

L
I
G H
· T S

**Our
light
makes
you
shine.**

new products

Boa Trimless Ceiling	09	Micro Tommy 2 Ceiling	23
Boa Trimless Wall	19	Microscoop Track ST5	71
Cedrus Quantum Flex	11	MIX 6W	15
Clever	27	MIX Accessories	83
Clever Track	65	Nobel Elbow Track ST5	71
Cone Junior Track ST5	71	2U50	75
Domino	21	Prince Louis	59
Funnel Elbow 150 Track ST5	71	Ringo	51
Funnel Exo	13	Twist Track	61
Kombo + Glass	39	Twist Surface Mounted	25
Kombo Surface Mounted	41	Track 48V Recessed Trimless ST5	67
Mentor	81		

New Lighting New inspiration

Sustainable materials

Our new lighting fixture contains glass & aluminium. Why do we work with aluminium? Aluminium is strong, light and extremely durable. Moreover, it is 100 % recyclable. Unlike many other materials, aluminium does not lose its qualities during the recycling process. Therefore, it can be recycled endlessly without loss of quality. Glass is endlessly recyclable, saving many new raw materials.

Mix & match
bowls, colors & glass shells
Discover our new Kombo



Surface Mounted



▶ Micro Tommy 2 p.23



▶ Domino Basic p.21



▶ Clever p.27 - 37
▶ Clever track p.63



▶ Twist p.25
▶ Twist track p.61

Profiles & Tracks



▶ 2U50 p.75



▶ ST5 p.67

Exterior



▶ Mentor p.81

Downlights




▶ Cedrus Quantum p.11



▶ Funnel Exo p.13



▶ Mix 6W p.15
▶ Mix accessories p.83



▶ Boa Ceiling p.9
▶ Boa Wall p.19

Suspended



▶ Kombo p.39 - 49



▶ Prince Louis p.59




▶ Ringo p.51



Boa Trimless Ceiling

POWERLED - 6,44W - 700mA DC - (9,2Vf)
 500 lumen 2700K CRI90
 520 lumen 3000K CRI90
 dimmability: PWM/CCR

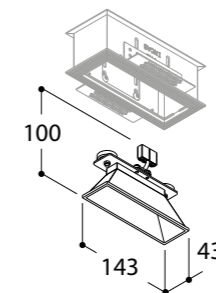


finish	reflector	2700K	3000K
		405167	405157
		405146	405136
+ frame for plastered concrete slabs		701187	
+ frame + box for plaster		701177	
+ frame for plaster		701117	

Family members:




CASAMBI
ON DEMAND





Cedrus Quantum Flex Leaf

BRIDGELUX - 6,2W - 350MA DC - (17,7Vf)
 600 lumen 2700K CRI90
 622 lumen 3000K CRI90
 dimmability: PWM/CCR
 beam 36°

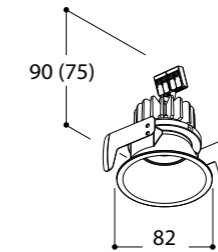


76 mm
 Installation depth:
 95 mm solid ceilings
 80 mm hollow ceilings
 20°

finish	2700K	3000K
Black	348837	348838
White	348858	348859
+	Frame for plaster	348100

Cedrus Quantum Flex Torsion


BRIDGELUX - 6,2W - 350MA DC - (17,7Vf)
 600 lumen 2700K CRI90
 622 lumen 3000K CRI90
 dimmability: PWM/CCR
 beam 36°

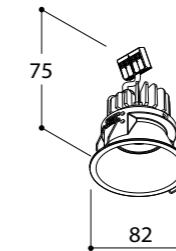

76 mm
 Installation depth:
 80 mm hollow ceilings
 20°

finish	2700K	3000K
Black	348737	348738
White	348758	348759
+	Frame for plaster	348100

Family members:



*LED module is IP54






Funnel Exo Torsion

LUXEON M - 7,84W - 700mA DC - (11,2Vf)

755 lumen 2700K CRI90
 810 lumen 3000K CRI90
 dimmability: PWM/CCR
 beam 36°



56 mm
 Installation depth 60 mm

finish	2700K	3000K
	484627	484637
	484648	484658
	Frame for plaster	178000

Family members:



CREATE YOUR DOWNLIGHT




MIX CONFIGURATOR

Visit our website and compose your Mix
www.mixconfigurator.be

CONFIGURATION IN 6 STEPS

- ① Model: Round or Square
- ② Trimless or Non Trimless
- ③ Fix or Flex
- ④ Beam Angle: 15° 36° 60°
- ⑤ Colour Temperature
- ⑥ Focus Color

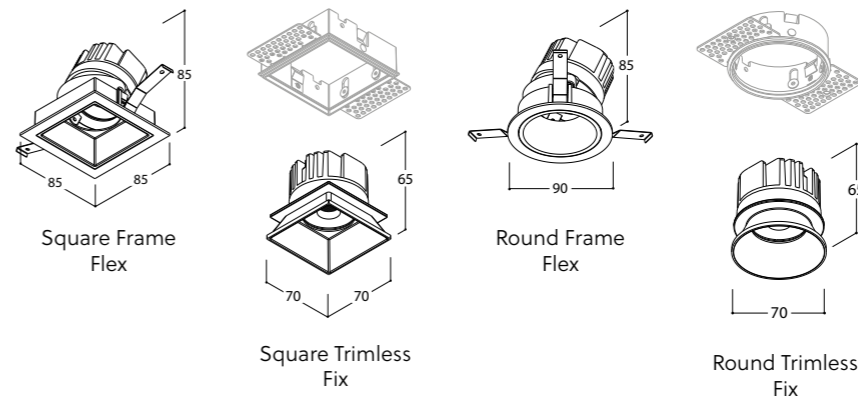

Mix 6W - Square - Round - Fix or Flex

CITIZEN - 6,5W - 350mA DC - (18,5Vf)

790 lumen 2700K CRI90
822 lumen 3000K CRI90
835 lumen 4000K CRI90
dimmability: PWM/CCR
beam 15° - 36° - 60°

76 mm
Installation depth 90 mm (105mm) Flex
Installation depth 70 mm (85mm) Fix

76 x76mm

HALOSPHERE - 5,95W - 350mA DC - (17Vf)

336 lumen 1800 ▶ 3000K CRI 90
dimmability: CCR
beam 15° - 36° - 60°

30° only for flex models

359° only for round flex models

Family members:



See page p.82 for Mix Accessories

CASAMBI
ON DEMAND

Standard for bathroom use
* Led module is IP54

HALOSPHERE
NXT

M	X	O	DIGIT 1	DIGIT 2	DIGIT 3	DIGIT 4	DIGIT 5
6W	MODEL	BEAM ANGLE	COLOUR TEMP LED	FOCUS COLOUR	FRONT COLOUR		
	1: Round	N: 15°	1: Halosphere 3000-1800K	1: Matt White	6: Textured Black		
	2: Round Flex	M: 36°	2: 2700K	2: Matt Black	7: Textured White		
	3: Trimless Round	W: 60°	3: 3000K	3: Matt Gold	0: Trimless		
	4: Trimless Round Flex		4: 4000K	4: Black Chrome			
	5: Square						
	6: Square Flex						
	7: Trimless Square						
	8: Trimless Square Flex						

Example of article number for the MIX 6 range

MX05W216 = MIX 6W Square 60° 2700K Matt White Focus Textured Black Front




MIX 6W





Boa Trimless Wall

POWERLED - 6,44W - 700mA DC - (9,2Vf)
 500 lumen 2700K CRI90
 520 lumen 3000K CRI90
 dimmability: PWM/CCR



finish	reflector	2700K	3000K
		405067	405057
		405082	405072
		405096	405086
		405095	405085
+ frame for plastered concrete slabs		701187	
+ frame + box for plaster		701177	
+ frame for plaster		701117	

Family members:



CASAMBI
ON DEMAND




surface mounted



Domino Basic

CITIZEN - (2X) 6,48W - 230V 50-60Hz AC
 2x790 lumen 2700K CRI90
 2x822 lumen 3000K CRI90
 dimmability: mains dimm RC or DALI
 beam 36°



↻ 245° ↕ 30°


housing	2700K	3000K	2700K	3000K
	mains dimm		dali touch	
■	468626	468636	468726	468736
□	468647	468657	468747	468757

Family members:



CASAMBI
ON DEMAND

Domino Basic

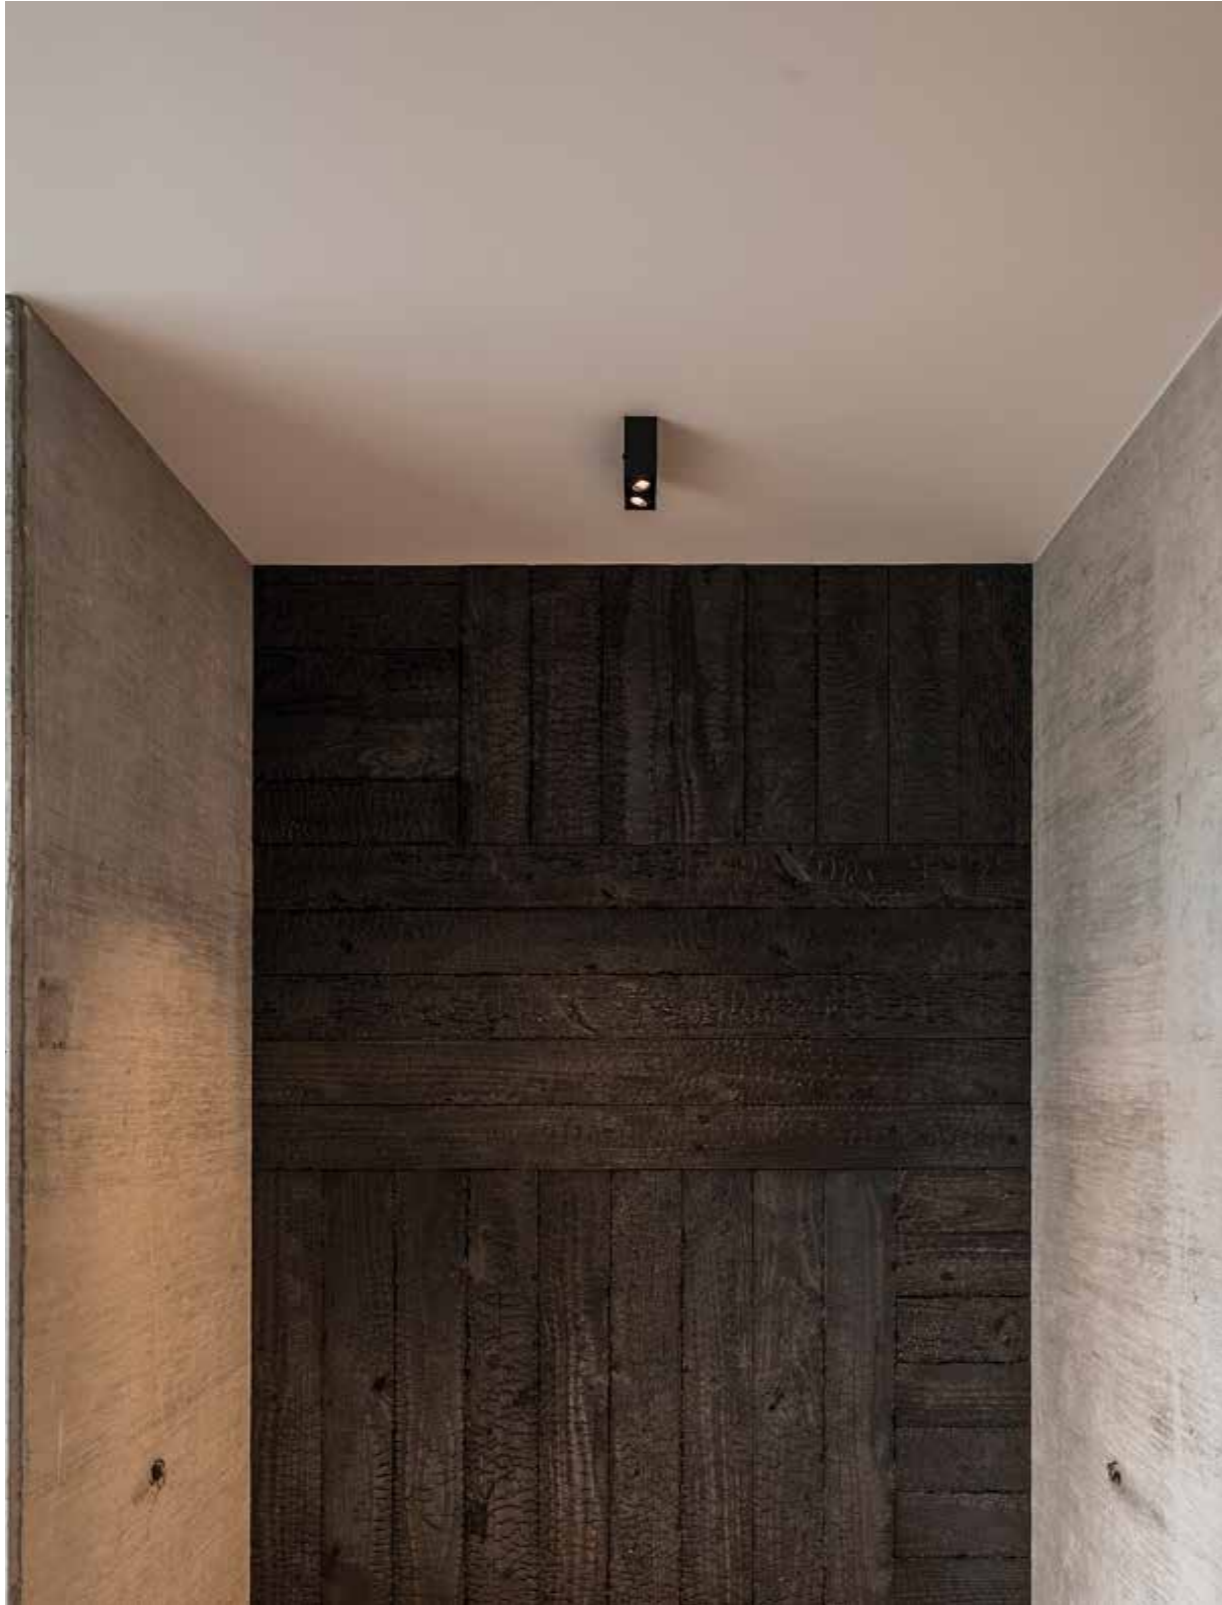

Micro Tommy 2 Ceiling

LUXEON M - (2X) 3,82W - 230V 50-60Hz AC


2x400 lumen 2700K CRI90

2x429 lumen 3000K CRI90

2x470 lumen 4000K CRI90

dimmiability: mains dim RC

beam 36°



↻ 15° ↕ 20°

housing	focus	2700K	3000K	4000K
Black	Black	418826	418816	418806
White	White	418847	418837	418827
White	Yellow	418892	418882	418872
Black	White	418895	418885	418875
Black	Yellow	418896	418886	418876
White	Black	418897	418887	418877

Family members:




CASAMBI
ON DEMAND




Twist CI Surface Mounted Base

CERTAFLUX - 9W - 230V 50-60HZ AC
 850 lumen 2700K CRI92
 dimmability: mains dim LC
 beam 15° - 36° - 60°



housing	focus	2700K 15°	2700K 36°	2700K 60°
		292016	292036	292066
		292017	292037	292067
		3000K 15°	3000K 36°	3000K 60°
		292026	292046	292076
		292027	292047	292077

Family members:



CASAMBI
ON DEMAND



CLEVER

A new design

GW2-Architects wanted to create a minimalistic lighting fixture floating just below the ceiling where the mounting base also becomes part of the aesthetic.


LED module, reflector, driver, cooling, control and hinge come together into a slim designed disc of only 29mm thick.

Clever has a limited recessed depth. No visible screws in the design and is directly connectable on 230V.

In addition, the luminaire has a narrow or wide beam and is dimmable and fully orientable.

Light and luminaire become one. Clever.


Design by
Frederik Grimmelprez
GW2-architecten

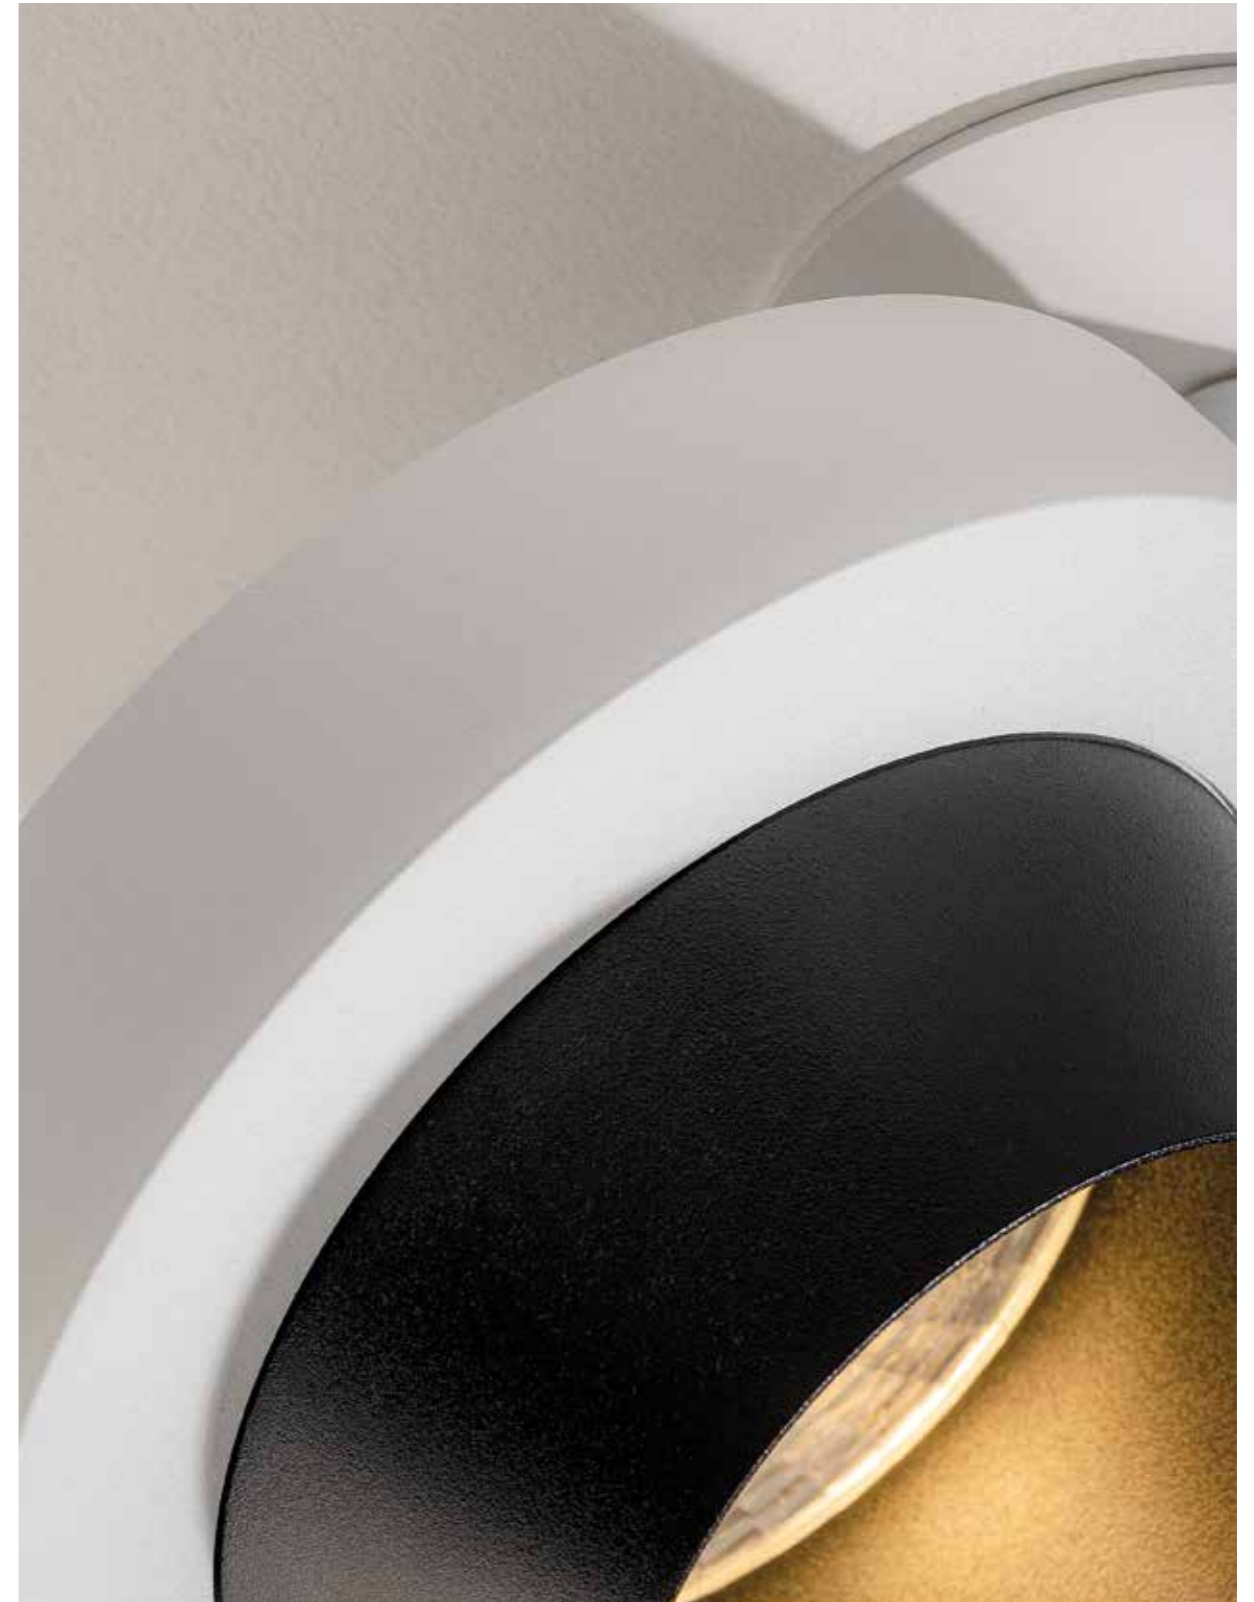



Clever Semi-Recessed Leaf CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



70 mm
 Installation depth: 40mm


0° to 315° 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291000	291001	291003	291005	291007	291009
Black	291010	291011	291013	291015	291017	291019
Antiglare Ring	291099					



Clever Focus Semi-Recessed Leaf CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°




70 mm
 Installation depth: 40mm

0° to 315° 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291020	291021	291023	291025	291027	291029
Black	291030	291031	291033	291035	291037	291039

Family members:




DALI / CASAMBI
 ON DEMAND





Clever Semi-Recessed Torsion CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



70 mm
 Installation depth: 40mm

0° to 315° 0° to 90°


finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291100	291101	291103	291105	291107	291109
Black	291110	291111	291113	291115	291117	291119

Antiglare Ring 291099



Clever Focus Semi-Recessed Torsion CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°




70 mm
 Installation depth: 40mm

0° to 315° 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291120	291121	291123	291125	291127	291129
Black	291130	291131	291133	291135	291137	291139


Family members:





Clever Recessed Base Large CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



42 mm
 Installation depth: 40mm

0° to 315° 0° to 90°


finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291200	291201	291203	291205	291207	291209
Black	291210	291211	291213	291215	291217	291219

Antiglare Ring 291099



Clever Focus Recessed Base Large CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



42 mm
 Installation depth: 40mm

0° to 315° 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291220	291221	291223	291225	291227	291229
Black	291230	291231	291233	291235	291237	291239


Family members:





Clever Surface Mounted CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



↻ 0° to 315° ↻ 0° to 90°


finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
□	291300	291301	291303	291305	291307	291309
■	291310	291311	291313	291315	291317	291319

! Antiglare Ring ■ 291099



Clever Focus Surface Mounted CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



↻ 0° to 315° ↻ 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
□	291320	291321	291323	291325	291327	291329
■	291330	291331	291333	291335	291337	291339

Family members:




DALI / CASAMBI
 ON DEMAND





Clever M10 CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°




finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291500	291501	291503	291505	291507	291509
Black	291510	291511	291513	291515	291517	291519

Antiglare Ring 291099
 Must be placed on M10 Base p.87 or Profile with M10 compatibility



Clever Focus M10 CI


OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°



finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291520	291521	291523	291525	291527	291529
Black	291530	291531	291533	291535	291537	291539

Must be placed on M10 Base p.85 or Profile with M10 compatibility

Family members:




KOMBO

A new circular design

Kombo is a lighting fixture for indoor use. With or without a hand-blown glass in different colors and textures. Keeping in line with our belief that longevity is at the core of sustainable design, we use aluminium, a strong and highly durable material, for several designs in our lighting collection.


Design by
FFF design
Frederik Degreve



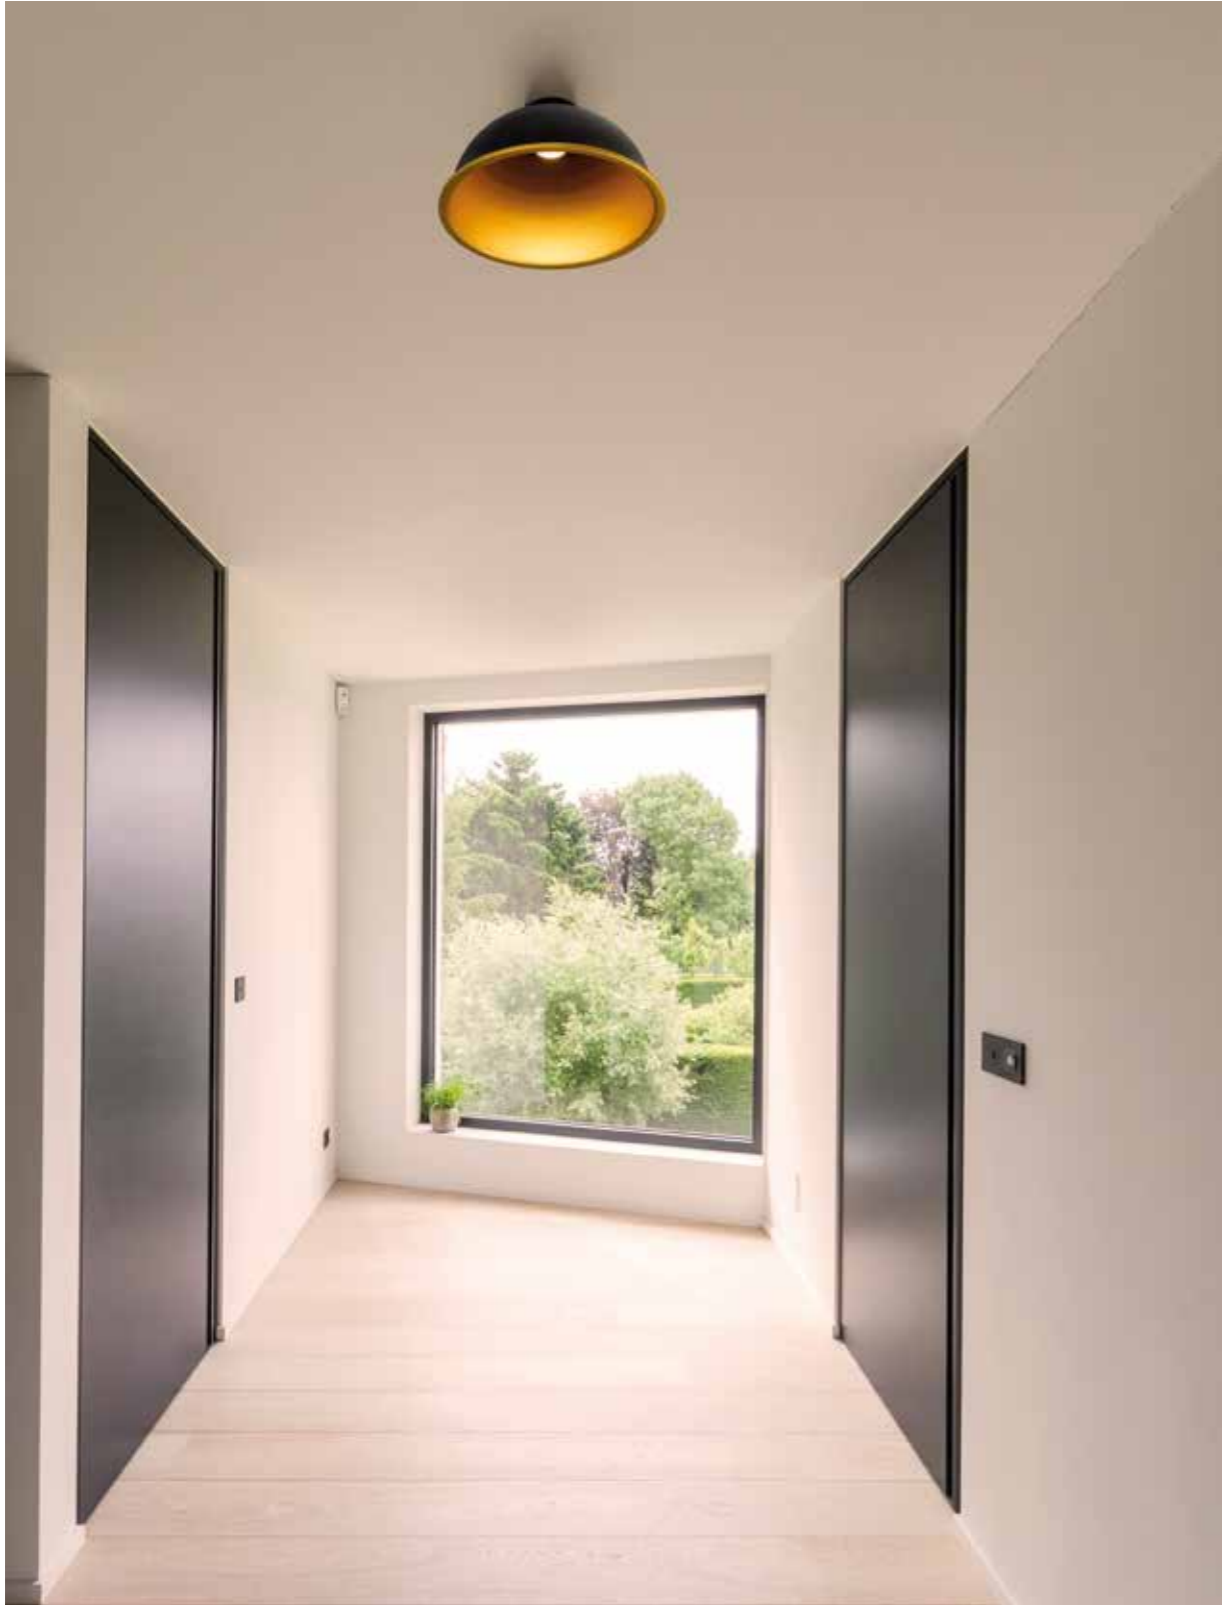

Kombo Led Surface Mounted


OPTOGA CLARA - 10W - 230V 50-60Hz AC
 1050 lumen 2700K CRI90
 dimmability: mains dim RC



housing	focus	2700K
		346326
		346347
		346396
		346397

No glass accessory possible

Family members:



Kombo

Traditional craftsmanship
meets
modern lighting




Kombo Textured Black

Kombo Textured White

Kombo + Glass

The brown and grey glass get
different colour appearances
depending on the colour of the bowl.

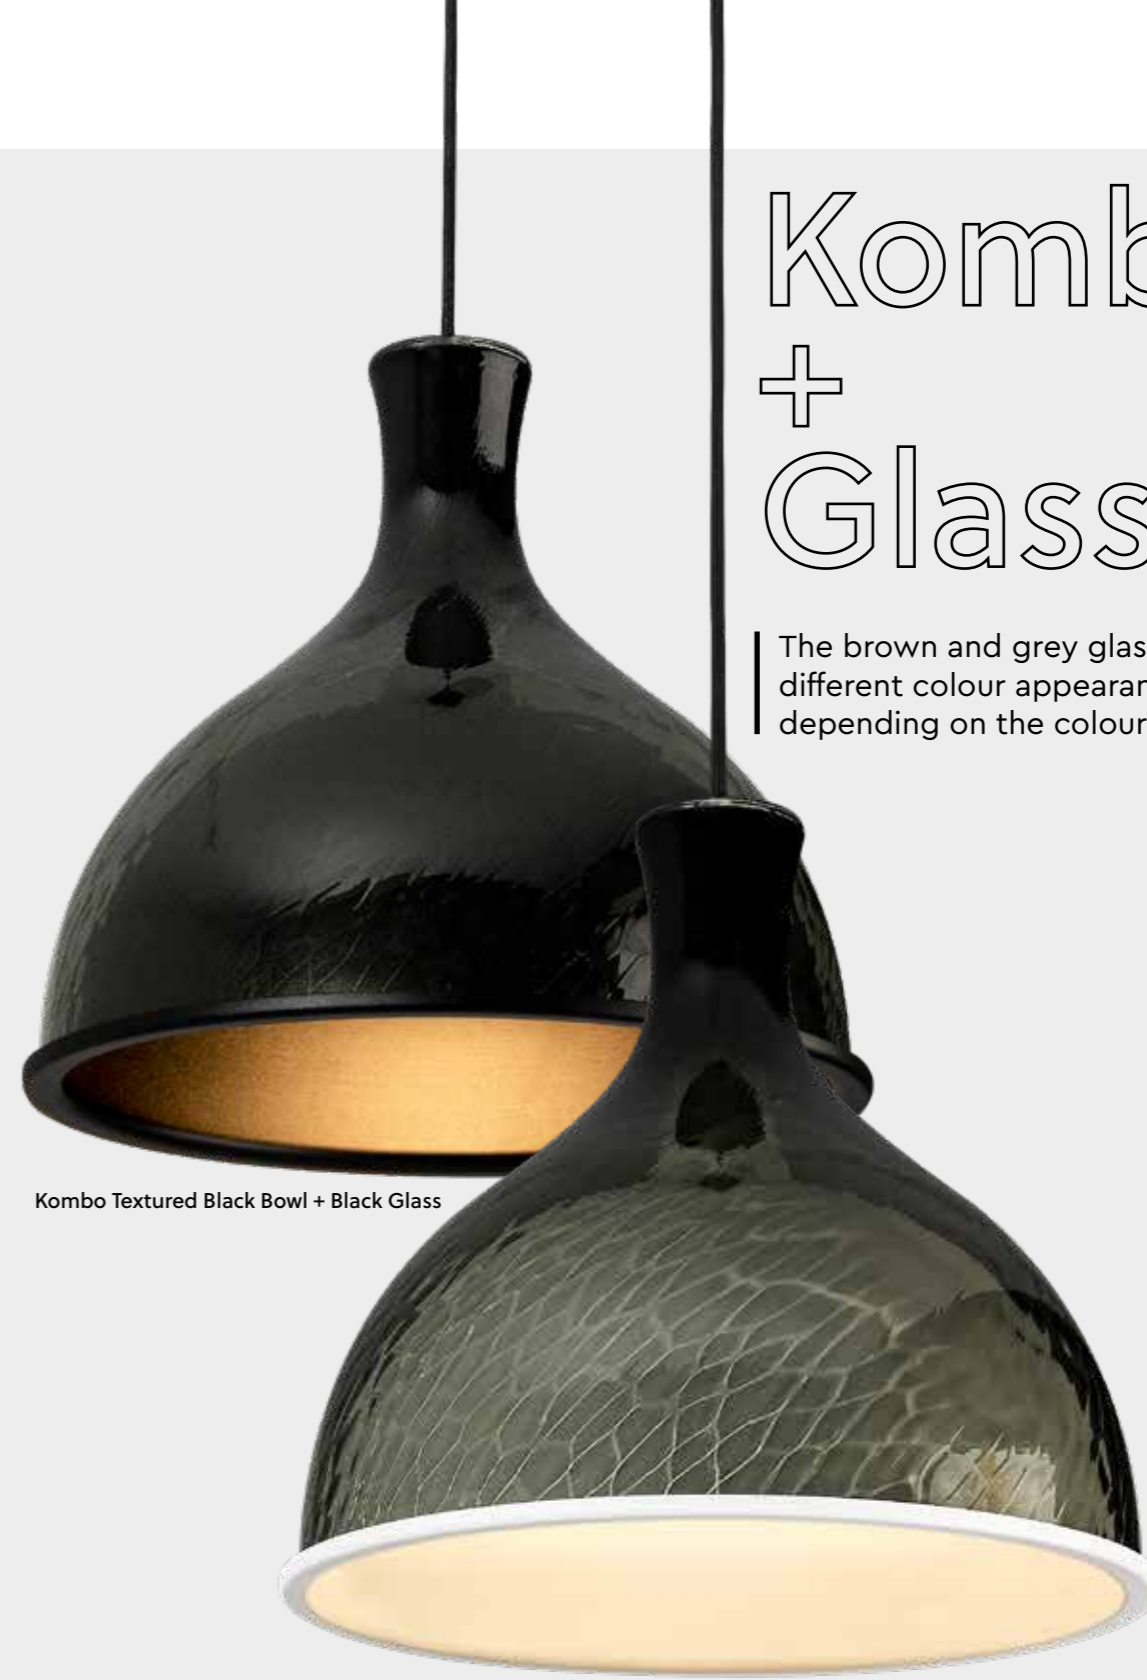


Kombo Textured Black Bowl + Black Glass

Kombo Textured White + Brown Glass




Kombo E27 Suspension

A60 - MAX. 40W - 230V 50Hz AC
 E27
 dimmability: dependent on bulb
 bulb not included

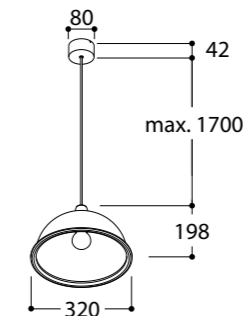

housing	focus	main-scord	
			346047
			346026
			346057
			346087
			346096
			346097

+ Compatible with Kombo Glass p.49



Family members:




Kombo
 Textured Black Bowl
 + Grey Glass




Kombo Led Suspension

OPTOGA CLARA - 10W - 230V 50-60Hz AC
 1050 lumen 2700K CRI90
 dimmability: mains dim RC

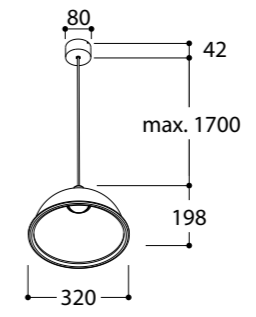


housing	focus	main-scord	2700K
Black	Black	Black	346126
White	White	Black	346147
White	White	White	346157
Black	Yellow	Black	346196
White	White	Black	346197
White	White	White	346187



Compatible with Kombo Glass p.49

Family members:








Kombo



Glass

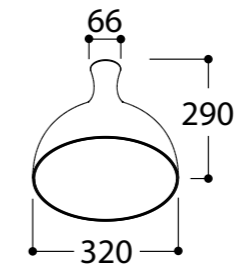Accessory to place over your Kombo



finish	ACCESSORY
 GREY	346901
 BROWN	346902
 TEXTURED GREY	346903
 TEXTURED BROWN	346904

+ Compatible with Kombo




Kombo
Textured White Bowl
+ Grey Glass

RINGO RINGO RINGO

Ringo

Choose between three different dimensions, starting from 835, 1185 or 1535mm. The left side and right side size are configured separately to give you more possibilities. Choose your finish in textured black, textured white or anodic brown. Ledlines in 2700K, 3000K, 4000K. Mounting: surface mounted or suspended.

An absolute Must-have
with its many options in colours,
sizes and accessories

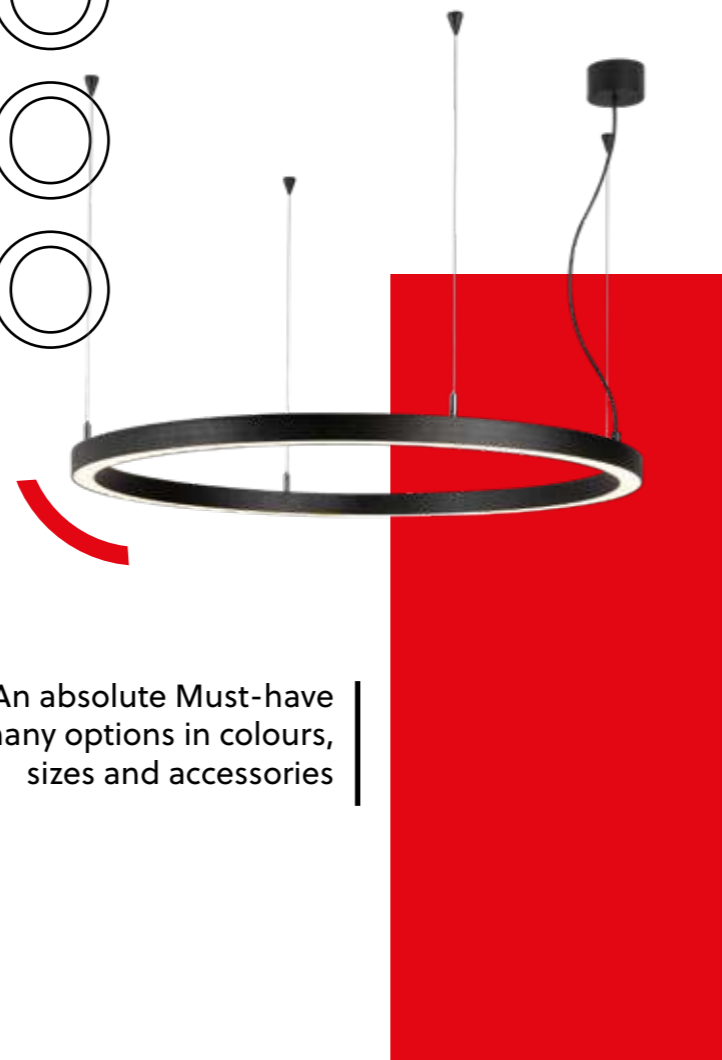

Ringo Surface Mounted without converter



Suspension without converter
Felt cover only compatible in combination
with suspension set



Ringo Surface Mounted with converter



Suspension with converter




Ringo
 Visit our website and compose your own Ringo
www.ringoconfigurator.be




Ringo
 Configurator

Felt cover only compatible in combination with suspension set


Step 1: Choose Ringo size



835mm

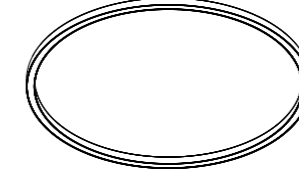


1185mm

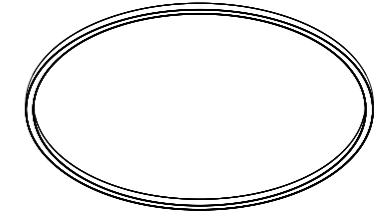


1535mm


Step 2 & 3: Choose left & right




Type A
 180° ledline

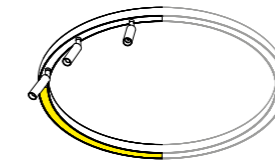


Type B
 90° ledline + 90° 3xM10

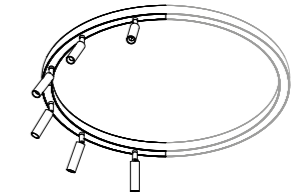


Type C
 180° 6xM10

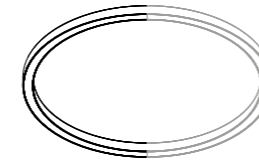

Type D
 180° empty

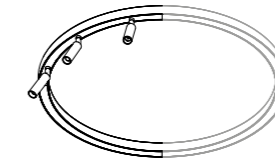


Type E
 90° empty + 90° 3xM10

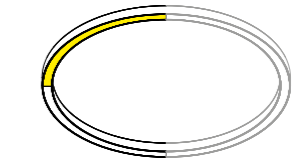


Type F
 90° empty + 90° ledline


Step 4: Choose Ringo mounting type




Surface Mounted CI



Surface Mounted WC

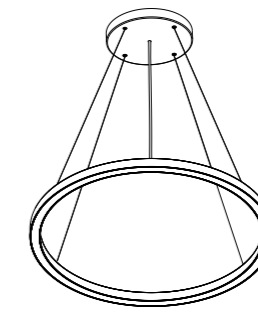

Suspension CI

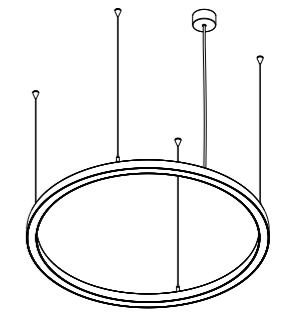

Suspension WC


Step 5-6-7: Choose additional circuit, accessories & connection








Suspension Set

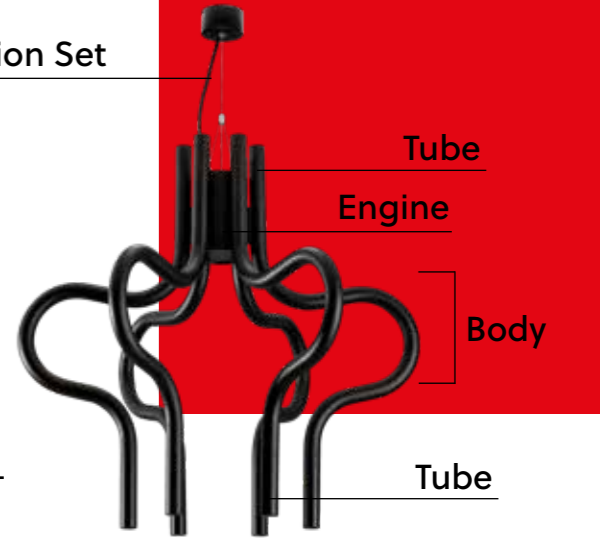

Prince Louis

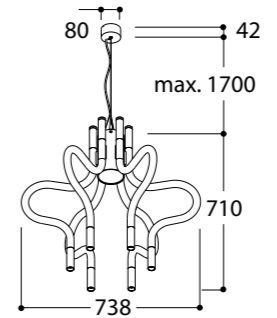


* Available as of January 2023
 * Will soon be added to King George Configurator

CONFIGURATION EXAMPLE

- BODY
- ENGINE 30W
- SUSPENSION SET 4m | 3P
- 6 x TUBE DOWN
- 6 x TUBE UP


Family members:







Twist Track

CERTAFLUX - 9W - 230V 50-60HZ AC
 850 lumen 2700K CRI92
 dimmability: mains dim LC
 beam 15° - 36° - 60°



housing	focus	2700K 15°	2700K 36°	2700K 60°
		292116	292136	292166
		292117	292137	292167
		3000K 15°	3000K 36°	3000K 60°
		292126	292146	292176
		292127	292147	292177

Family members:

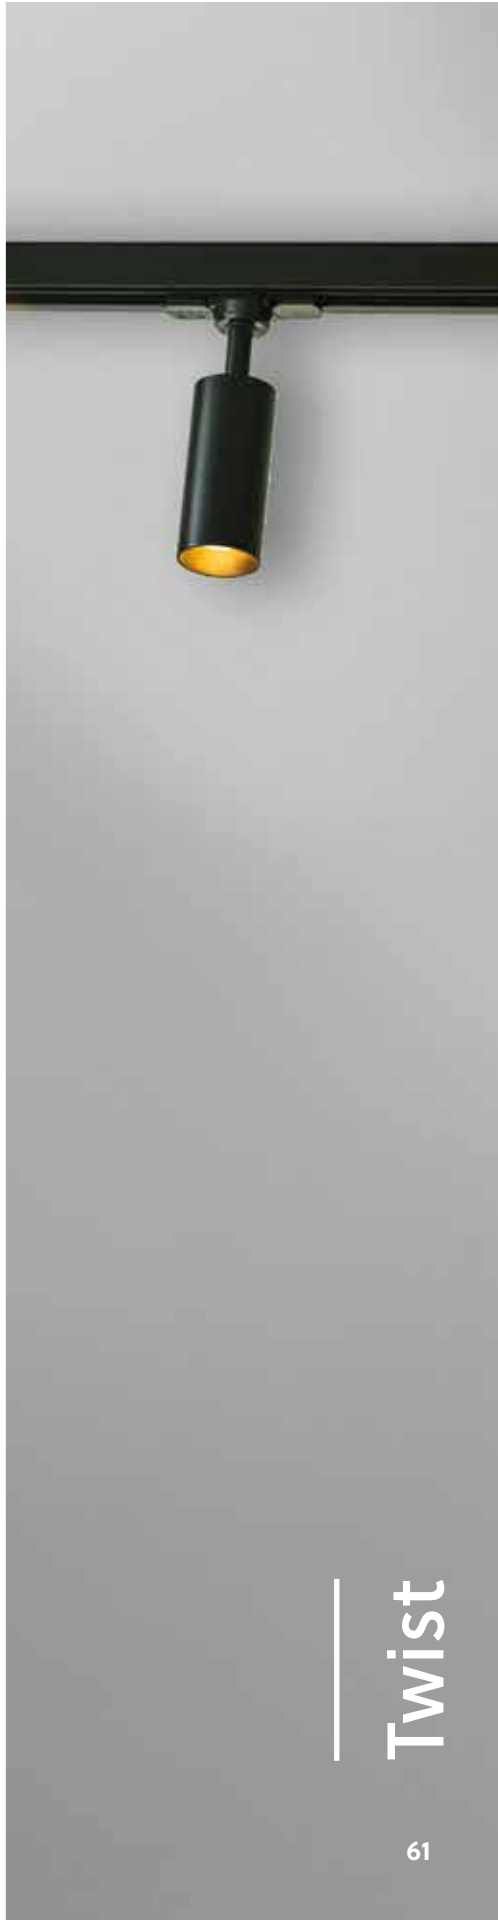






Clever Track CI

OPTOGA - 10W - 230V 50Hz AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°




↻ 0° to 359° ↕ 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291400	291401	291403	291405	291407	291409
Black	291410	291411	291413	291415	291417	291419
Antiglare Ring	291099					

Clever Focus Track CI

OPTOGA - 10W - 230V 50-60HZ AC
 900 lumen 2700K CRI90
 960 lumen 3000K CRI90
 dimmability: mains dim RC
 beam 24° - 40° - 60°




↻ 0° to 359° ↕ 0° to 90°

finish	2700K			3000K		
	24°	40°	60°	24°	40°	60°
White	291420	291421	291423	291425	291427	291429
Black	291430	291431	291433	291435	291437	291439

Family members:




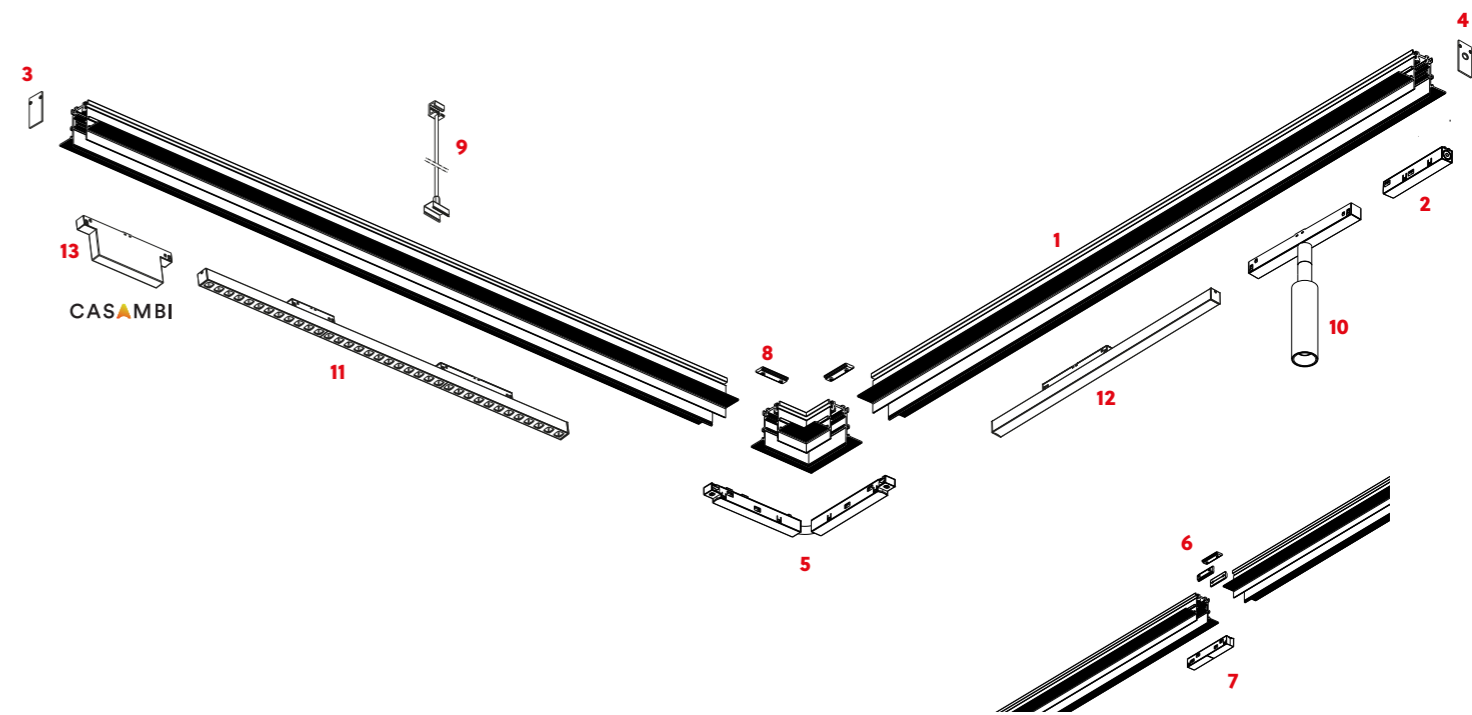

How to compose Track 48V ST5


PRODUCT	ref. nr.
01 TRACK 48V TRIMLESS ST5 1000mm	TR6126
02 LIVE END RIGHT	TR4726
03 ENDCAP	TR6526
04 ENDCAP WITH HOLE	TR6527
05 FLEXIBLE COUPLER	TR4727
06 MECHANICAL COUPLER	TR6926
07 STRAIGHT ELECTRICAL COUPLER	TR4826
08 MECHANICAL CORNER	TR6426
09 OPTIONAL ROD SET	TR6002
10 NOBEL ELBOW ST5 DALI	459735
11 LEDLINE UGR L847 DALI (FLUSH WITH CEILING)	446727
12 LEDLINE OPAL L567 DALI (FLUSH WITH CEILING)	446712
13 CASAMBI DALI GATE 8CHANNEL	TR6526

Track 48V Recessed Trimless ST5

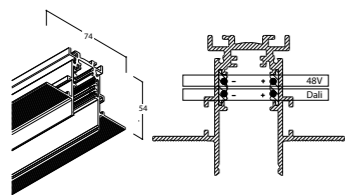


finish	1 M	2 M	3 M
White	TR6147	TR6247	TR6347
Black	TR6126	TR6226	TR6326

Straight Electrical Coupler




finish	
White	TR4847
Black	TR4826

Corner

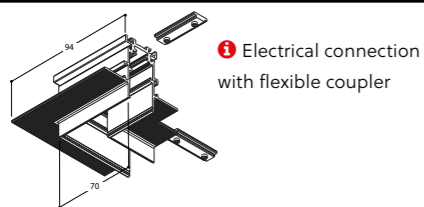


finish	
White	TR6447
Black	TR6426

Live End

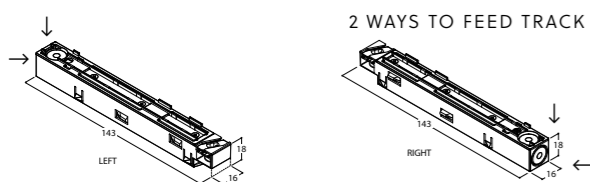


finish	LEFT	RIGHT
White	TR4757	TR4747
Black	TR4736	TR4726

Endcap



finish	STANDARD	WITH POWER SUPPLY
White	TR6547	TR6548
Black	TR6526	TR6527

Mechanical Coupler




finish	
White	TR6947
Black	TR6926

Rod Set



finish	
White	TR6002

Flexible Coupler



finish	
White	TR4748
Black	TR4727

Screw Template




finish	
White	TR6001

Aesthetic Cover




finish	1,5 M	3 M
White	TR6847	TR6849
Black	TR6826	TR6828

Plaster Installation Guard



finish	1 M	2 M	3 M
White	TR6101	TR6201	TR6301



DALI GATE Casambi has been designed and developed to control lamps with DALI drivers using the Casambi app, installed on mobile devices.

Suitable for installation on ST1/ST3/ST5 - 48V track.

The Casambi app communicates with DALI GATE by means of Bluetooth technology.

The received signal is then adequately interpreted to generate the corresponding command on the DALI bus.

Up to 64 lamps (control gear) can be programmed, assigning them to up to 8 groups. It must be the only DALI master on the bus (MONO MASTER BUS)

Compatible with **Lithoss** Casambi Switches.






Cone Junior Track ST5 48V


housing	focus	2700K	3000K	2700K DALI	3000K DALI
■	■	450702	450712	450722	450732
■	□	450734	450724	450794	450784
■	■	450745	450755	450765	450775
■	■	450744	450754	450764	450774
■	■	450752	450762	450772	450782
■	■	450796	450786	450756	450766

4000K ON DEMAND




Nobel Elbow Track ST5 48V

housing	focus	2700K	3000K	2700K DALI	3000K DALI
■	■	459726	459736	459725	459735
■	□	459747	459757	459746	459756
■	■	459796	459786	459795	459785




Funnel Elbow Track ST5 48V

housing	focus	2700K	3000K	2700K DALI	3000K DALI
■	■	483926	483936	483925	483975
■	□	483947	483957	483946	483956




Funnel Elbow 150 Track ST5 48V

housing	focus	2700K	3000K	2700K DALI	3000K DALI
■	■	483966	483976	483965	483975
■	□	483987	483981	483986	483996



Microscop Track ST5 48V

housing	focus	2700K	3000K	2700K DALI	3000K DALI
■	■	407526	407536	407525	407535
■	□	407547	407557	407546	407556
■	■	407596	407586	407595	407585
■	■	407591	407581	407590	407580









2U50 Profile / m

finish	
	965047
	965026




Endcap UGR

finish	
	965149
	965128



Alu Cover Profile


finish	
	965007
	965008



! To be used in empty profile spaces

Straight Connection

Straight Connection	965060
---------------------	--------



Mounting Spring


Mounting Spring	965055
-----------------	--------




! # mounting springs
=rounded length
of profile in m + 1

Corner 90° / 135° / On Request


Corner 90°	965070
Corner 135°	965080
Corner 45°-85° on request	965090



! Section view




! Fixation on ceiling or wall

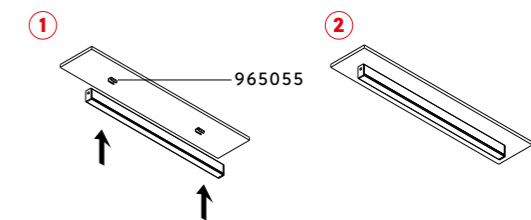

Suspension Single


finish	2,25 M	4 M
	965041	965031
	965042	965032

1 suspension/ 1,5 m profile
min. 2 suspensions

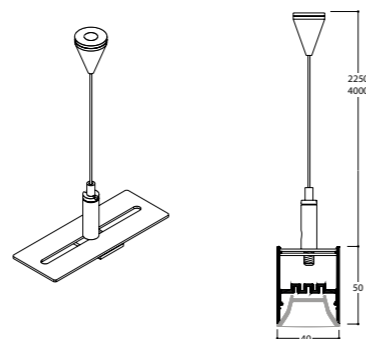


Connection Set Square

finish	3P			5P		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
	890847	890947	891047	891147	891247	891347
	890826	890926	891026	891126	891226	891326




Connection Set Round

finish	3P			5P		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
	691047	691147	691247	691347	691447	691547
	691026	691126	691226	691326	691426	691526




Connection Set Kosmos (recessed)

finish	3P			5P		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
	691057	691157	691257	691357	691457	691557
	691036	691136	691236	691336	691436	691536

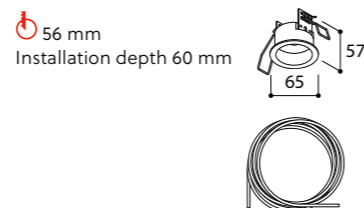

2U50 Module M10 230V


1X	965780
----	--------



- 1 Cover profile / m 965007 / 965008
- 1 Mounting spring 965055
- 1 Fall protection 965065

2U50 Module M10 350 / 700 mA mains dimm


1X	350	700
	965980	965990

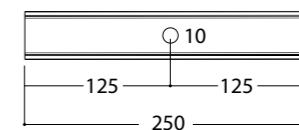

- 1 Cover profile / m 965007 / 965008
- 1 Mounting spring 965055
- 1 Fall protection 965065

2U50 Module M10 350 / 700 DALI

1X	350	700
	965981	965991
2X	965982	965992
3X	965983	965993
4X	965984	965994

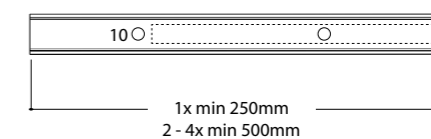

Positioning of M10 modules to be determined by customer.

- 1 Cover profile / m 965007 / 965008
- 1 Mounting spring 965055
- 1 Fall protection 965065

2U50 UGR	CASAMBI
892090	UNIVERSAL PROFILE CASAMBI MODULE DALI 1CH
892091	UNIVERSAL PROFILE CASAMBI MODULE DALI 4CH


- Compatible with DALI modules



Low UGR > 180 l/w

2U50 LEDSYSTEM 50°= UGR <19 80°= UGR <19

INPUT VOLTAGE 230V AC



	50°				80°			
	not dimm		dali		not dimm		dali	
3000k								
2U50 LEDSYSTEM 2x650lm	965820	965825	965830	965835	965700	965705	965710	965715
2U50 LEDSYSTEM 3x650lm	965821	965826	965831	965836	965701	965706	965711	965716
2U50 LEDSYSTEM 4x650lm	965822	965827	965832	965837	965702	965707	965712	965717
2U50 LEDSYSTEM 2x1100lm	965860	965865	965870	965875	965720*	965725*	965730*	965735*
2U50 LEDSYSTEM 3x1100lm	965861	965866	965871	965876	965721*	965726*	965731*	965736*
2U50 LEDSYSTEM 4x1100lm	965862	965867	965872	965877	965722*	965727*	965732*	965737*

! * UGR <20

	50°				80°			
	not dimm		dali		not dimm		dali	
4000K								
2U50 LEDSYSTEM 2x650lm	965920	965925	965930	965935	965740	965745	965750	965755
2U50 LEDSYSTEM 3x650lm	965921	965926	965931	965936	965741	965746	965751	965756
2U50 LEDSYSTEM 4x650lm	965922	965927	965932	965937	965742	965747	965752	965757
2U50 LEDSYSTEM 2x1100lm	965960	965965	965970	965975	965760*	965765*	965770*	965775*
2U50 LEDSYSTEM 3x1100lm	965961	965966	965971	965976	965761*	965766*	965771*	965776*
2U50 LEDSYSTEM 4x1100lm	965962	965967	965972	965977	965762*	965767*	965772*	965777*

! * UGR <20

	length	W	3000K	4000K
			lumen (l/w)	lumen (l/w)
2U50 LEDSYSTEM 2x650lm	558	7,54	1386	1442
2U50 LEDSYSTEM 3x650lm	837,5	11,31	2079	2163
2U50 LEDSYSTEM 4x650lm	1116,5	15,08	2772	2884
2U50 LEDSYSTEM 2x1100lm	558	12,32	2182	2271
2U50 LEDSYSTEM 3x1100lm	837,5	18,48	3274	3406
2U50 LEDSYSTEM 4x1100lm	1116,5	24,64	4365	4542


2U50 UGR	CASAMBI
892090	UNIVERSAL PROFILE CASAMBI MODULE DALI 1CH
892091	UNIVERSAL PROFILE CASAMBI MODULE DALI 4CH

! Compatible with DALI modules











Mentor









LUXEON M - 3,82W - 230V 50-60HZ AC
 400 lumen 2700K CRI90
 429 lumen 3000K CRI90
 dimmability: mains dim LC
 beam 36°








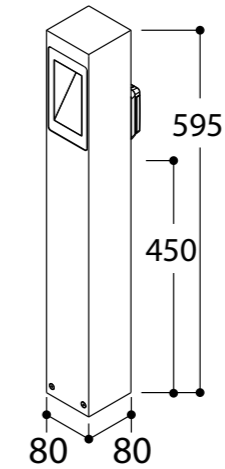


finish	socket	2700K	3000K
textured grey	(BE-FR)	431313	431713
silver anthracite	(BE-FR)	431333	431733
textured black	(BE-FR)	431336	431736
textured grey	(EU)	431343	431743
silver anthracite	(EU)	431363	431763
textured black	(EU)	431366	431766
ⓘ Groundpin			260992




REF	Description	Recessed Dimensions	Recessed Depth	Compatible
MX110077	MIX 6-13W ROUND FRAME + BOX FOR PLASTER	 230x195mm	130mm	MIX 6-13W NON TRIMLESS
MX110097	MIX 6-13W ROUND FRAME FOR PLASTERED CONCRETE SLABS	 76mm	See luminaire	MIX 6-13W NON TRIMLESS
MX130077	MIX-T 6-13W ROUND FRAME + BOX FOR PLASTER	 230x195mm	130mm	MIX 6-13W NON TRIMLESS
MX130087	MIX-T 6-13W ROUND FRAME FOR PLASTERED CONCRETE SLABS	 83mm	See luminaire	MIX 6-13W TRIMLESS
MX130097	MIX-T 6-13W ROUND FRAME FOR PLASTER	 76mm	See luminaire	MIX 6-13W TRIMLESS
MX150077	MIX 6-13W SQUARE FRAME + BOX FOR PLASTER	 230x195mm	130mm	MIX 6-13W TRIMLESS
MX150097	MIX 6-13W SQUARE FRAME FOR PLASTERED CONCRETE SLABS	 111mm	See luminaire	MIX 6-13W NON TRIMLESS
MX170077	MIX-T 6-13W SQUARE FRAME + BOX FOR PLASTER	 230x195mm	130mm	MIX 6-13W TRIMLESS


REF	Description	Recessed Dimensions	Recessed Depth	Compatible
MX170087	MIX-T 6-13W SQUARE FRAME FOR PLASTERED CONCRETE SLABS	 111mm	See Luminaire	MIX 6-13W TRIMLESS
MX170097	MIX-T 6-13W SQUARE FRAME FOR PLASTER	 76x76mm	See Luminaire	MIX 6-13W TRIMLESS
MX210077	MIX 26W ROUND FRAME + BOX FOR PLASTER	 300x225mm	160mm	MIX 26W NON TRIMLESS
MX210097	MIX-T 26W ROUND FRAME FOR PLASTERED CONCRETE SLABS	 102mm	140mm	MIX 26W NON TRIMLESS
MX230077	MIX-T 26W ROUND FRAME + BOX FOR PLASTER	 300x225mm	160mm	MIX 26W TRIMLESS
MX230087	MIX-T 26W ROUND FRAME FOR PLASTERED CONCRETE SLABS	 111mm	140mm	MIX 26W TRIMLESS
MX230097	MIX-T 26W ROUND FRAME FOR PLASTER	 300x225mm	160mm	MIX 26W TRIMLESS
MX250077	MIX 26W SQUARE FRAME + BOX FOR PLASTER	 300x225mm	160mm	MIX 26W NON TRIMLESS


MX250097		MIX 26W SQUARE FRAME FOR PLASTERED CONCRETE SLABS	140mm	MIX 26W NON TRIMLESS	
MX270077		MIX-T 26W SQUARE FRAME + BOX FOR PLASTER	160mm	MIX 26W TRIMLESS	
MX270087		MIX-T 26W SQUARE FRAME FOR PLASTERED CONCRETE SLABS	140mm	MIX 26W TRIMLESS	
MX270097		MIX-T 26W SQUARE FRAME FOR PLASTER	140mm	MIX 26W TRIMLESS	

M10 Base Pro 1 (300)

230V 50-60Hz AC





finish	230V*
	375827
	375848




M10 Base Pro 2 (600)

230V 50-60Hz AC





finish	230V*
	375527
	375548




M10 Base Pro 3 (900)

230V 50-60Hz AC

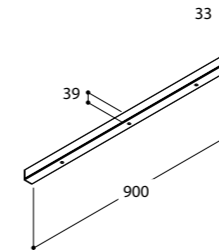


finish	230V*
	375627
	375648





M10 Base Pro 4 (1200)

230V 50-60Hz AC

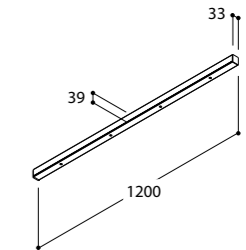

finish	230V*
	375727
	375748



 For custom made lengths please use Protut profile with M10 modules

How to use

Mini Tommy 1 Haloled

Lamp type - power - supply: **LUXEON M - 7,84W - 700mA DC - (11,2 Vf)**

Light output: 755 lumen 2700K CRI90
810 lumen 3000K CRI90

Dim protocol: dimmability: PWM/CCR

Beam angle: beam 36°

Product dimensions: 120 x 120 x 132 mm

Cut out dimensions + Installation depth: 110 x 110 mm, Installation depth 135 mm

Adjustability: 30°

Color temperature (for LED only): 2700K, 3000K

Beam angle	finish	2700K	3000K
35°	○	123456	123456
70°	○	123456	123456
35°	●	123456	123456
70°	●	123456	123456

Reference number: 123456

Obligatory accessories to be ordered separately: Installation frame for plaster 123456

Optional accessories to be ordered separately: +

Family members:

Same product to be found in different product categories:

European conformity: CE,

Energy class: E A1 G

Product weight: 0,8

Indoor/outdoor use:

Flammability index:

IP rate: IP 20


Electrical class:

Gear type:


4000K product on demand



Finishes

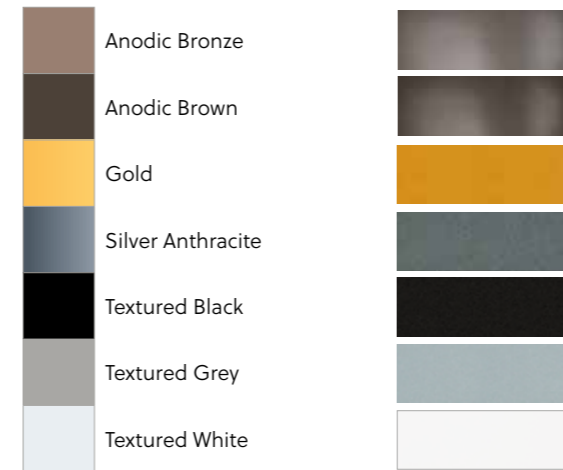

Glass finishes

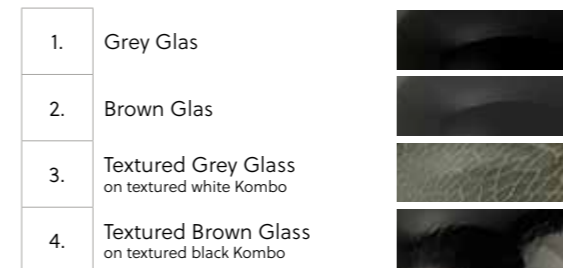

Properties

APPLICATION	
	Interior use
	Exterior use
	Normally flammable surface
IP XX	IP rating
	Obligatory accessory
	Optional accessory
CE	Conformance EU
	Rotation
	Tilt
	Gimble
	Cut out round
	Cut out round
	135 ≤ TM < 160
	110 ≤ TM < 135
	85 ≤ TM < 110
	TM < 85
	Weight
	Class 1
	Class 2
	Class 3
	Electrical gear included
	Mains voltage
	Electrical gear required
C	Dimmable with trailing edge dimmer
L,C	Dimmable with universal dimmer
L	Dimmable with leading edge dimmer
R	Dimmable with standard dimmer
PWM	Pulse width modulation