


News 2023



Black Foster Micro Surface

NEW BLACK FOSTER MICRO SURFACE

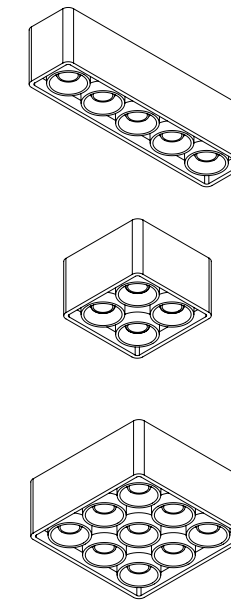

		P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Surface 5	A459-20-00- NT WT	7W	2700K	500mA	775Lm	87%
	A459-20-01- NT WT	7W	3000K	500mA	800Lm	87%
	A459-20-02- NT WT	7W	4000K	500mA	850Lm	87%
BLACK FOSTER MICRO Surface 2x2	A459-30-00- NT WT	5,6W	2700K	500mA	620Lm	87%
	A459-30-01- NT WT	5,6W	3000K	500mA	640Lm	87%
	A459-30-02- NT WT	5,6W	4000K	500mA	680Lm	87%
BLACK FOSTER MICRO Surface 3x3	A459-40-00- NT WT	10W	2700K	400mA	1170Lm	87%
	A459-40-01- NT WT	10W	3000K	400mA	1200Lm	87%
	A459-40-02- NT WT	10W	4000K	400mA	1300Lm	87%




DRIVER OPTIONS*		Black Foster Micro Surface 5	Black Foster Micro Surface 2x2	Black Foster Micro Surface 3x3
On/Off	0434-00-42	1 to 2	1 to 3	
	0434-01-53			1
DALI	0434-00-44	1 to 3	1 to 3	
	0434-01-54			1

220 V ~
240

DRIVER MUST BE PLACED ON REMOTE

DIMENSIONES EMBALAJE: 122x85x31mm
 PESO EMBALAJE CARTÓN: 40g
 PESO EMBALAJE PLÁSTICO: 0g
 PESO PRODUCTO W/O EQ: 5: 75g / 2x2: 60g / 3x3: 100g

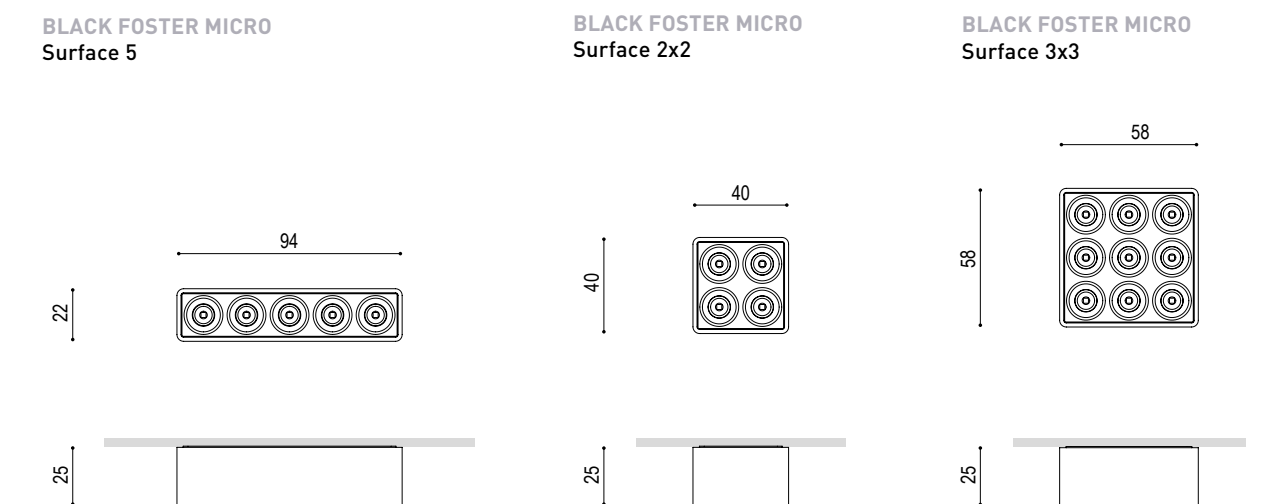

17/11/2022
 MODIFICACIONES MARCADAS EN VERDE

COLOUR | NT ■ | WT □ | MATERIAL | AL | ABS+PC

* OTHER DIM OPTIONS PLEASE CONSULT







Rec Slim



		P	CCT	I	Flux	LOR
REC SLIM	A457-00-00-0- WT NT PR	27 W	2700K	700mA	3700Lm	86%
	A457-00-00-1- WT NT PR	27 W	3000K	700mA	3800Lm	86%
	A457-00-00-2- WT NT PR	27 W	4000K	700mA	4000Lm	86%

220
240 V~ | CE | IP20 | CRI>90 | L80B10 > 60.000 h

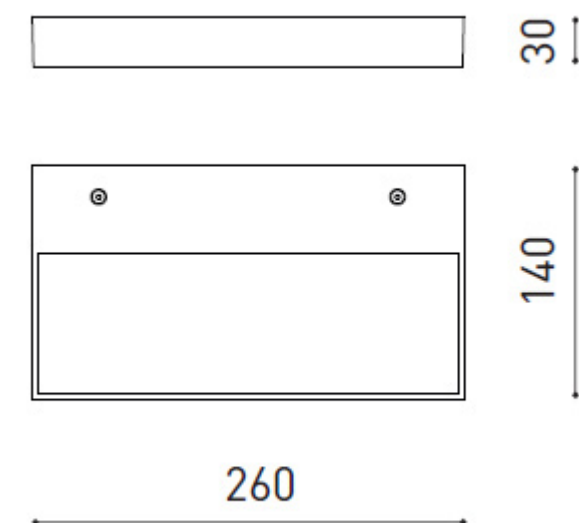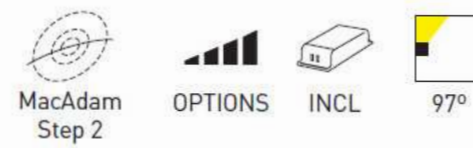

Rec Micro




		CCT	LOR
REC MICRO	A461-00-00- WT NT PR	2700K	79%
	A461-00-01- WT NT PR	3000K	79%
	A461-00-02- WT NT PR	4000K	79%

III | IP20 | CRI>90 | L80B10 > 60.000 h



*DRIVER OPTIONS

	P	I	CCT	Flux
NO DIM	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm
DALI	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm






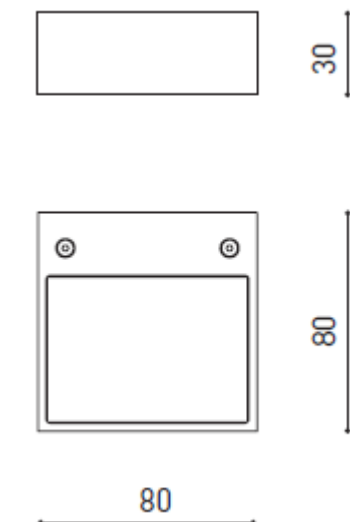


220
240 V~ | **DRIVER MUST BE PLACED ON REMOTE






Rec family

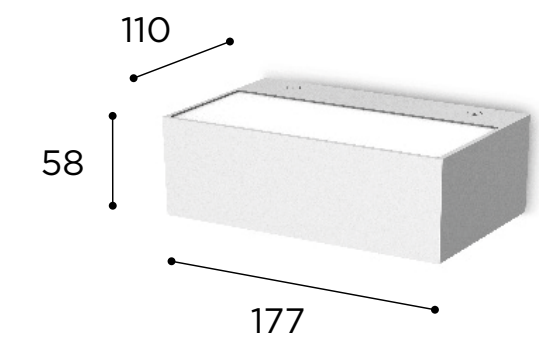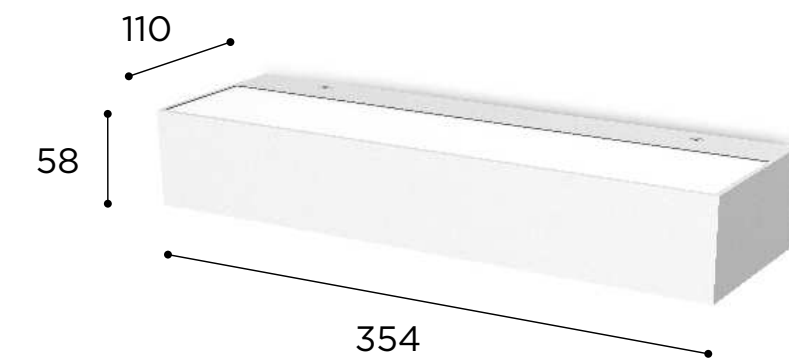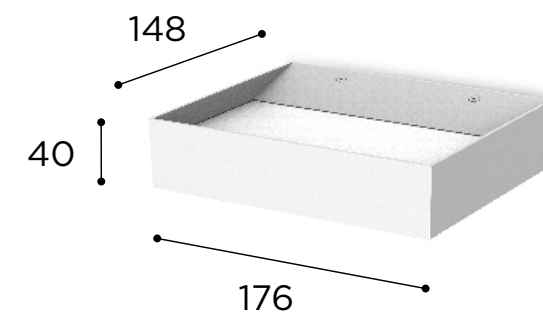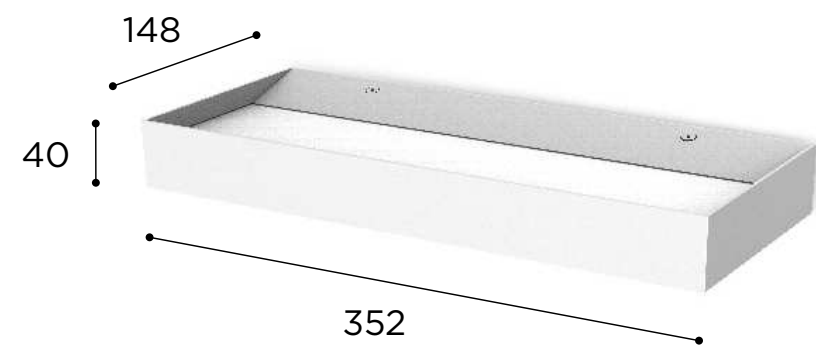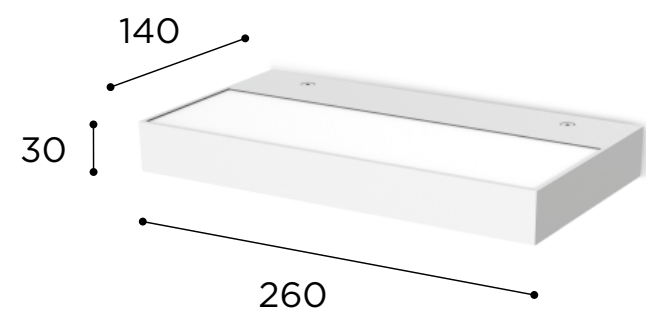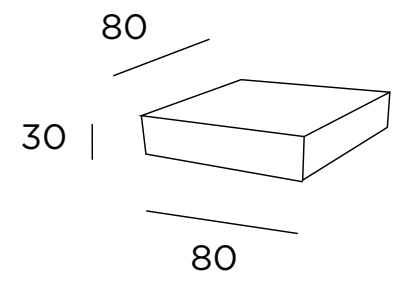



Black Foster Custom Trimless

NEW BLACK FOSTER CUSTOM TRIMLESS



21/09/2022
PRELIMINAR

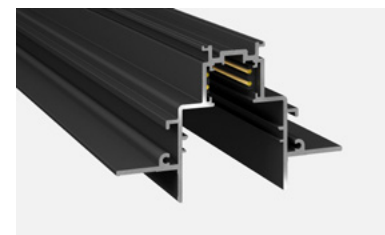

BLACK FOSTER CUSTOM TRIMLESS 1M	A458-01-00- N
BLACK FOSTER CUSTOM TRIMLESS 2M	A458-02-00- N
BLACK FOSTER CUSTOM TRIMLESS 3M	A458-03-00- N

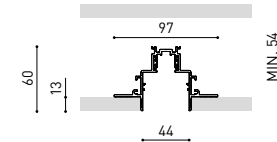

BLACK FOSTER CUSTOM TRIMLESS L-JOINT	A458-04-00- N
--------------------------------------	-----------------

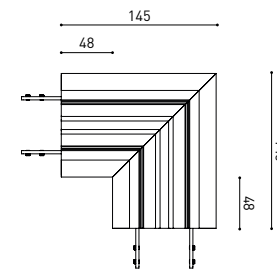


		P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	04340161* N	100 W	48 V	298 x 19 x 16 mm
	04340162	150 W	48 V	350 x 30 x 18 mm

220 V-
240 *To be installed inside the track.

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		5	10	20	30
100	0,75	50	50	x	x
	1,5	50	50	40	25
150	0,75	40	15	x	x
	1,5	50	40	20	x

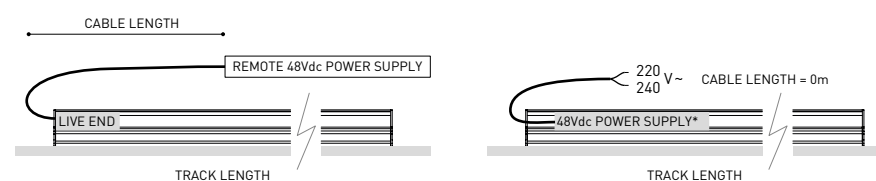

COLOUR | N ■ |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

NEW BLACK FOSTER CUSTOM TRIMLESS

21/09/2022
PRELIMINAR




BF CUSTOM TRIMLESS End	A458-00-01- N
	Cover Thickness = 2 mm.




BF CUSTOM TRIMLESS End Feed	A458-00-02- N
	Cover Thickness = 2 mm.




BLACK FOSTER Straight Joiner	A317-00-06
------------------------------	------------



Live-End Connector 48V	A338-00-01- N
------------------------	-----------------




Central Connector 48V	A338-00-02- N
-----------------------	-----------------



L-JOINT Connector 48V	A338-00-12- N
-----------------------	-----------------

MOUNTING ACCESSORIES

Track Fixation Kit	A219-21-06- B
Track Flush Ceiling Kit	A219-22-06- B
Track Clamp Kit for M6 ROD	A219-21-21- B
Track Suspension Kit	A219-21-10- B



SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs
2000 mm - 2 Pcs
3000 mm - 3 Pcs

COLOUR | N ■ | B □ |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

Wiz 48V



NEW



WIZ 48V
 DIMENSIONES EMBALAJE . 20x150x105mm
 PESO EMBALAJE CARTON . 120g
 PESO EMBALAJE PLASTICO . -
 PESO PRODUCTO . 150g
 PESO TOTAL . 270g

MODIFICACIONES EN VERDE
 Actualización potencia

		P	CCT	I	Flux	LOR
WIZ 48V	A465-0-∅-10- WT NT WTW NTW -S	12,4W	2700K	350mA	1470Lm	86%
	A465-0-∅-11- WT NT WTW NTW -S	12,4W	3000K	350mA	1530Lm	86%
	A465-0-∅-12- WT NT WTW NTW -S	12,4W	4000K	350mA	1550Lm	86%

48 V | III | IP20 | CRI>90 | L80B10 >40.000h




∅	OPTIONS*
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A4650110WT
-S	Track 48V Short	A4650110WT-S

FINISHING	Body	Lampshade	Adaptor
WT	WT □	N ■	N ■
NT	NT ■	N ■	N ■
WTW	WT □	N ■	W □
NTW	NT ■	N ■	W □

OPTIONAL
WIZ 48V High Chromatic LED ⓘ »XXX
 NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

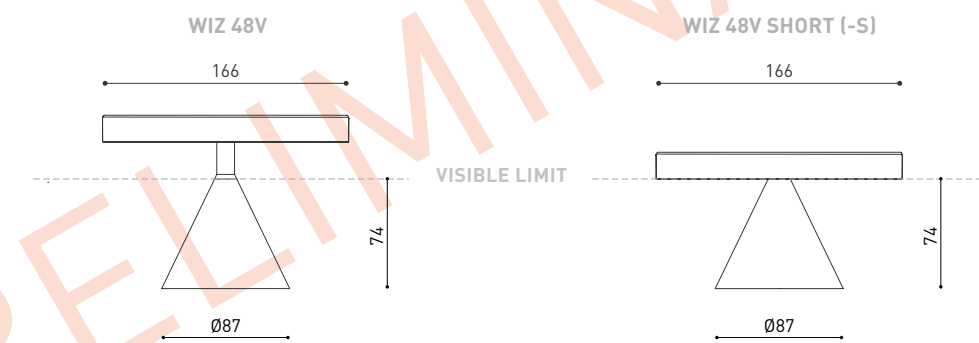

14/09/2022


COLOUR | WT □ | NT ■ | W □ | N ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » XXX

* OTHER DIM OPTIONS PLEASE CONSULT
 +RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT). ⓘ » PLEASE CONSULT

PRELIMINAR

Shot Light S

NEW SHOT LIGHT S

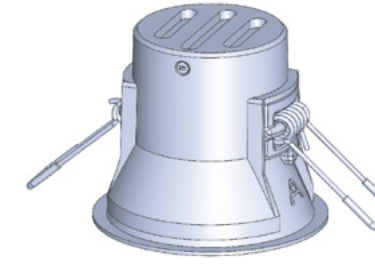

	P	CCT	BEAM	I	Flux	LOR
SHOT LIGHT S						
A462-0-00-00-N NMG WMG	6W	2700K	18°	500mA	640Lm	87%
A462-0-00-01-N NMG WMG	6W	3000K	18°	500mA	670Lm	87%
A462-0-00-02-N NMG WMG	6W	4000K	18°	500mA	720Lm	87%
A462-0-00-10-N NMG WMG	6W	2700K	40°	500mA	640Lm	87%
A462-0-00-11-N NMG WMG	6W	3000K	40°	500mA	670Lm	87%
A462-0-00-12-N NMG WMG	6W	4000K	40°	500mA	720Lm	87%

220 V- 240 V- IP20 | CRI>90 | L80B10 > 60.000h

DIMENSIONES EMBALAJE ON/OFF: 86x86x75mm
 DIMENSIONES EMBALAJE DALI: 173x85x74mm
 PESO EMBALAJE CARTÓN ON/OFF: 45g
 PESO EMBALAJE CARTÓN DALI: 70g
 PESO EMBALAJE PLÁSTICO: 0g
 PESO PRODUCTO W/O EQ: 70g
 PESO PRODUCTO W/O EQ IP: 75g
 PESO PRODUCTO ON/OFF: 110g
 PESO PRODUCTO ON/OFF IP: 115g
 PESO PRODUCTO DALI: 145g
 PESO PRODUCTO DALI IP: 150g



DIMENSIONES EMBALAJE ACCESORIO: 103x100x24mm
 PESO EMBALAJE CARTÓN ACCESORIO: 20g
 PESO PRODUCTO ACCESORIO: 65g
 PESO CONJUNTO: 85g

	P	CCT	BEAM	I	Flux	LOR
SHOT LIGHT S						
IP65						
A462-1-00-10-N W NMG WMG	6W	2700K	40°	500mA	640Lm	84%
A462-1-00-11-N W NMG WMG	6W	3000K	40°	500mA	670Lm	84%
A462-1-00-12-N W NMG WMG	6W	4000K	40°	500mA	720Lm	84%

220 V- 240 V- IP65 | CRI>90 | L80B10 > 60.000h

OPTIONS

- 1 No DIM
- 2 DIM DALI
- 3 DIM PUSH

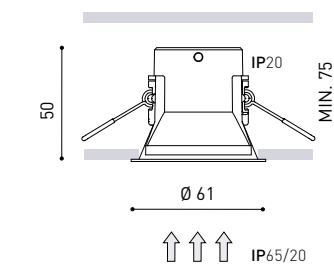

07/11/2022
 MODIFICACIONES MARCADAS EN VERDE

COLOUR | N ■ | NMG ■ | W □ | WMG □ | MATERIAL | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

Fit 27 24V

Höhere Leistung


FIT 27 24V

03/08/2022

FIT 27 24V: Se incorpora nueva potencia




					P	CCT	Beam	I	Flux	LOR
FIT 27 24V 1	A399-00-10-	WT	NT	G	4,5W	2700K	22°	400mA	440Lm	84%
	A399-00-11-	WT	NT	G	4,5W	3000K	22°	400mA	475Lm	84%
	A399-00-20-	WT	NT	G	4,5W	2700K	37°	400mA	440Lm	82%
	A399-00-21-	WT	NT	G	4,5W	3000K	37°	400mA	475Lm	82%
	A399-00-30-	WT	NT	G	4,5W	2700K	46°	400mA	440Lm	81%
	A399-00-31-	WT	NT	G	4,5W	3000K	46°	400mA	475Lm	81%
FIT 27 24V 2	A399-10-10-	WT	NT	G	5,5W	2700K	22°	500mA	550Lm	84%
	A399-10-11-	WT	NT	G	5,5W	3000K	22°	500mA	600Lm	84%
	A399-10-20-	WT	NT	G	5,5W	2700K	37°	500mA	550Lm	82%
	A399-10-21-	WT	NT	G	5,5W	3000K	37°	500mA	600Lm	82%
	A399-10-30-	WT	NT	G	5,5W	2700K	46°	500mA	550Lm	81%
	A399-10-31-	WT	NT	G	5,5W	3000K	46°	500mA	600Lm	81%



Medidas ext. caja = 113x111x32mm

Peso neto: 0.075 Kg
Peso bruto: 0.115 Kg

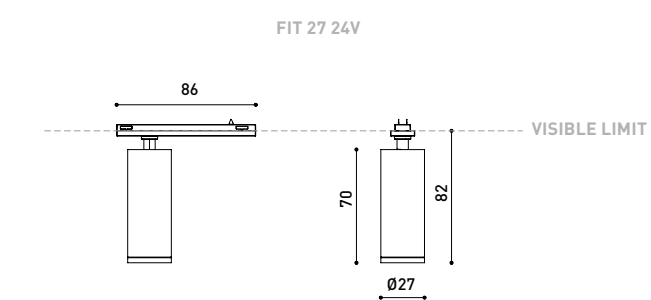

COLOUR | WT □ | NT ■ | G ■

MATERIAL | AL | PC


»

Black Foster Recessed

Neue weiße Ausführung

BLACK FOSTER RECESSED

07/09/2022
DATOS ACTUALIZADOS MARCADOS EN VERDE

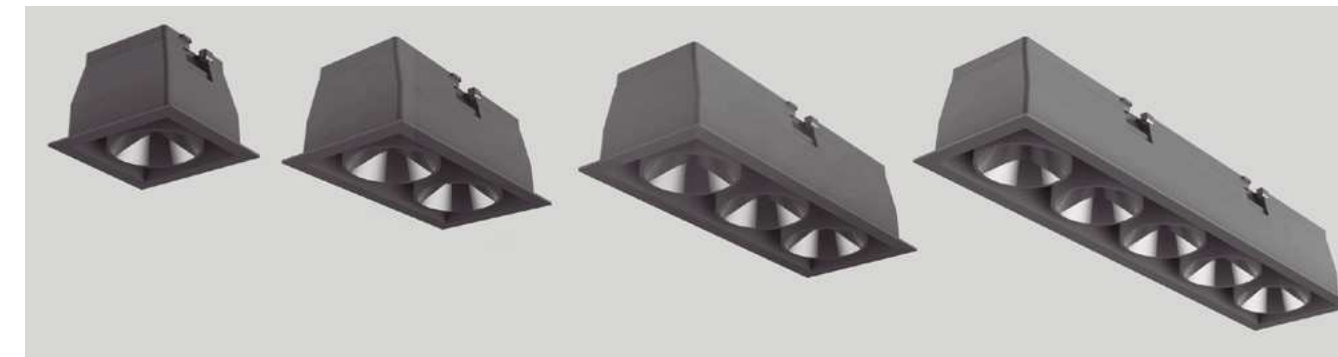

		P	CCT	I	Flux	LOR	⌄
BLACK FOSTER Recessed 1	A319-10-0-0- N W WN NMG	2,1 W	2700K	700	190	92%	50x50
	A319-10-0-1- N W WN NMG	2,1 W	3000K	700	210	92%	50x50
	A319-10-0-2- N W WN NMG	2,1 W	4000K	700	250	92%	50x50
BLACK FOSTER Recessed 2	A319-20-0-0- N W WN NMG	4,2 W	2700K	700	380	92%	50x93
	A319-20-0-1- N W WN NMG	4,2 W	3000K	700	420	92%	50x93
	A319-20-0-2- N W WN NMG	4,2 W	4000K	700	500	92%	50x93
BLACK FOSTER Recessed 3	A319-30-0-0- N W WN NMG	6,3 W	2700K	700	570	92%	50x136
	A319-30-0-1- N W WN NMG	6,3 W	3000K	700	630	92%	50x136
	A319-30-0-2- N W WN NMG	6,3 W	4000K	700	750	92%	50x136
BLACK FOSTER Recessed 5	A319-40-0-0- N W WN NMG	10,5 W	2700K	700	950	92%	50x222
	A319-40-0-1- N W WN NMG	10,5 W	3000K	700	1050	92%	50x222
	A319-40-0-2- N W WN NMG	10,5 W	4000K	700	1250	92%	50x222


220-240 V~ | CE | IP20 | CRI>90 | L80B10 >40.000h

MacAdam Step 3 | OPTIONS* | INCL | UGR <19 | 38*

OPTIONS


- 1 No DIM
- 2 DIM Push *
- 3 DIM 1-10V *
- 4 DIM DALI


*Except A319-10 reference.

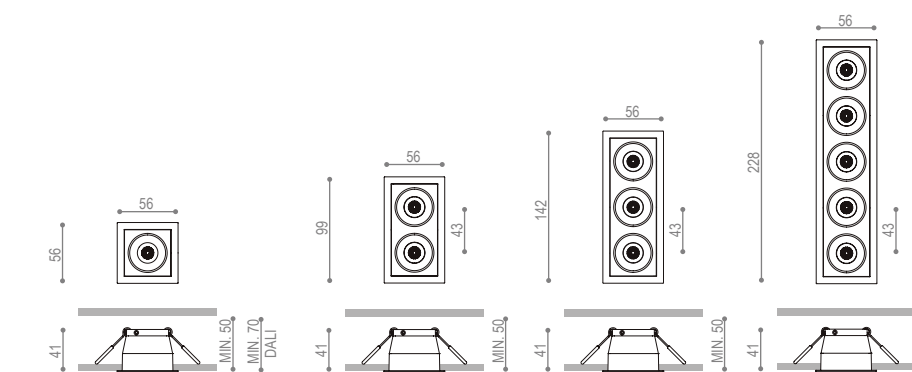

COLOUR | N ■ | W □ | WN ■ | NMG ■ | MATERIAL | AL | ABS+PC

Track 48V bi-emission

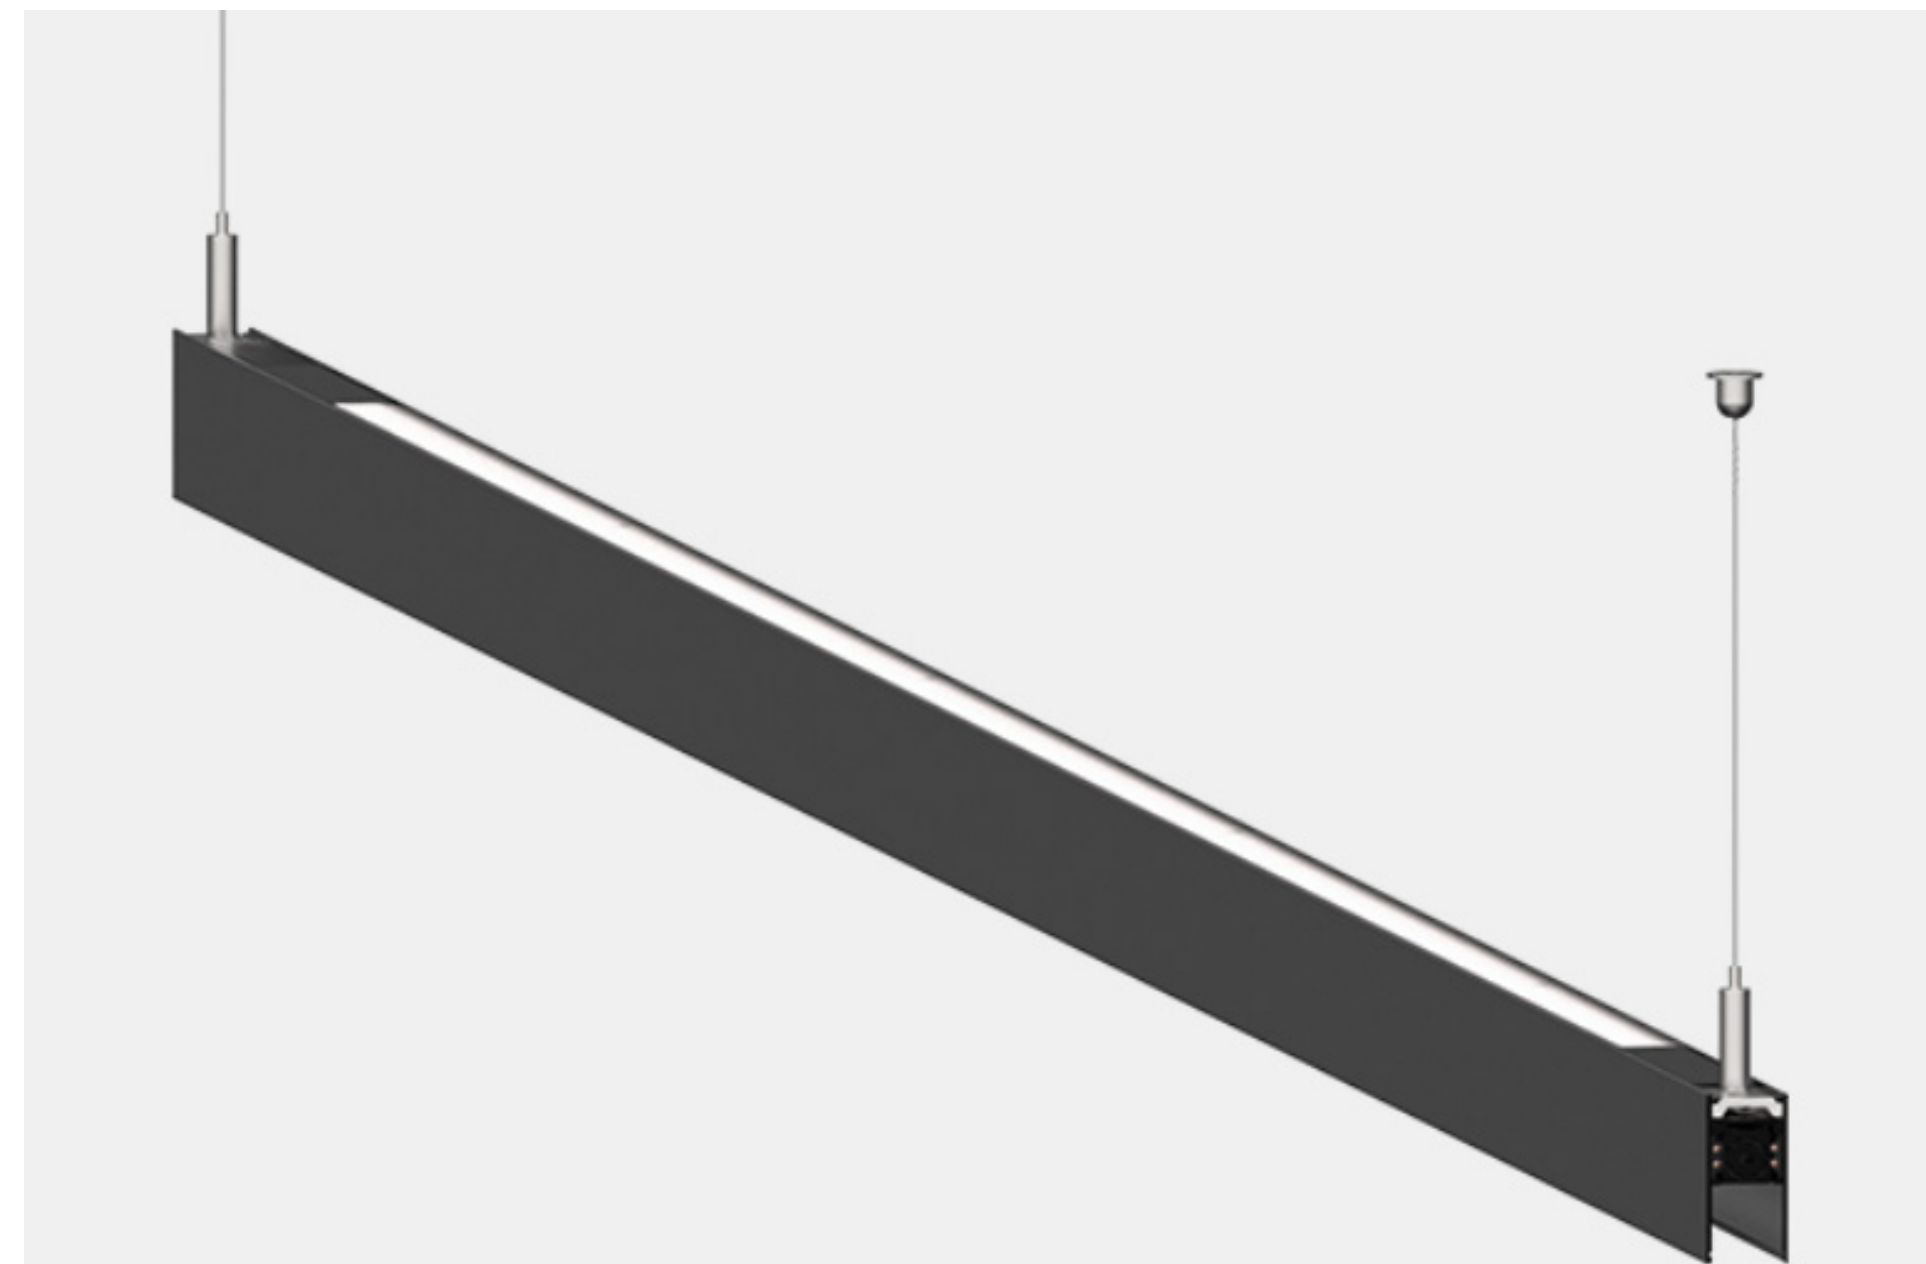

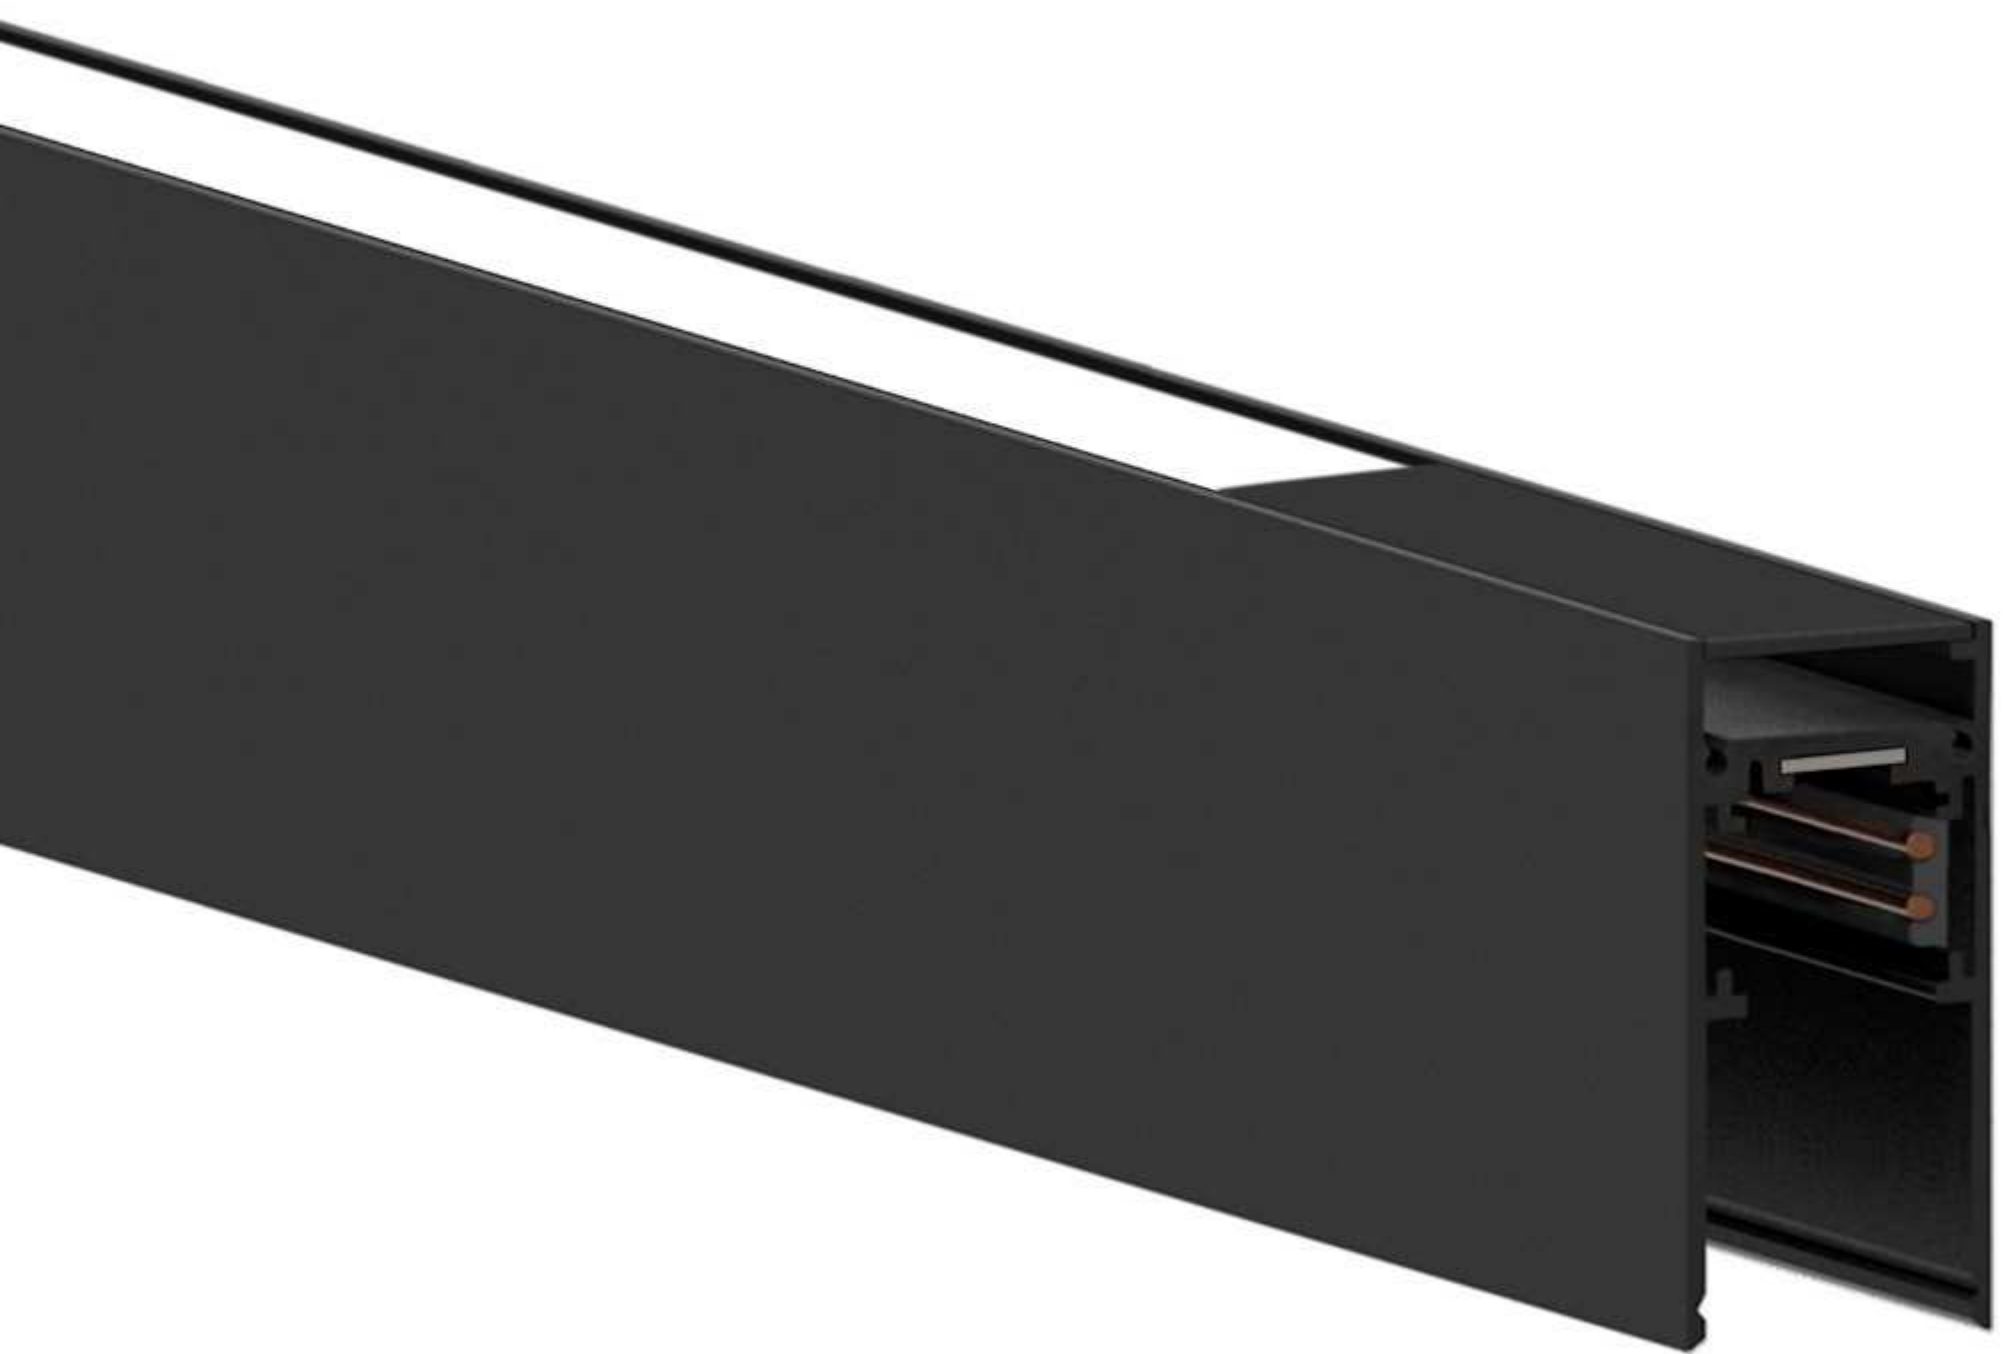




Minimal Track WT

Neue weiße Ausführung



24V SYSTEM
MINIMAL TRACK SUSPENSION

15/09/2022
AÑADIDO ACABADO EN BLANCO TEXTURADO (WT)



MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N | WT |


Profile 2m Initial feed kit

A400-02-10- | N | WT |

Profile 2m Middle feed kit*

A400-02-20- | N | WT |


* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N | WT |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m


A400-00-01- | N |

n = Total Length of System.

24V | Max. 4A | CE |


MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N | WT |



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N | WT |



MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N | WT |

Two End Caps Included



	P	V	D (A x B x C) mm
MINIMAL TRACK 24V Suspension Power Supply Box ON/OFF A400-00-06- NT WT	40 W	24V	280 x 30 x 36
A400-00-07- NT WT	100 W	24V	280 x 30 x 36

220 V- 240 V- Included ON/OFF 24Vdc Power Supply.

	P	V	D (A x B x C) mm
MINIMAL TRACK 24V Remote Power Supply ON/OFF 0434-01-37	60 W	24V	180 x 52 x 30
0433-10-22	100 W	24V	295 x 43 x 30



220 V- 240 V-

	V	D (A x B x C) mm
MINIMAL TRACK 24V Remote Constant Voltage Dimmer 0433-01-32	DALI / PUSH 24V	181 x 42 x 20
0433-01-33	CASAMBI 24V	172 x 42 x 20
0434-01-64	WIFI 24V	105 x 44 x 23

24V

DROP VOLTAGE TABLE




POWER [W]	CABLE SECTION [mm ²]	CABLE LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

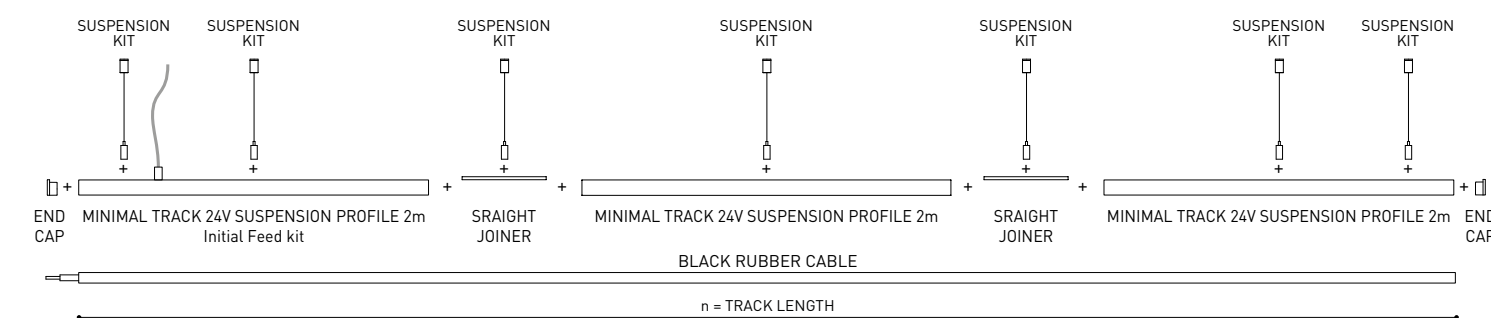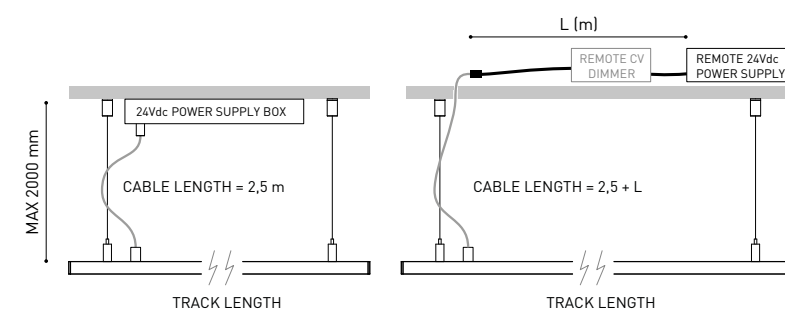

COLOUR | N ■ | NT ■ | WT □ | DIM OPTIONS PLEASE CONSULT

NEW MINIMAL TRACK 24V

15/09/2022
AÑADIDO ACABADO EN BLANCO TEXTURADO (WT)

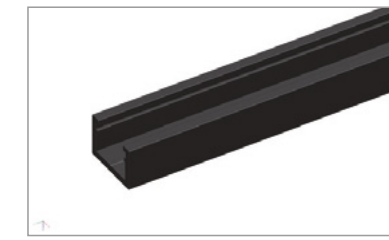


MINIMAL TRACK 24V Profile 2M A384-02-00- | N | WT |



MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |



MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |



	P	V	D (A x B x C) mm
MINIMAL TRACK 24V Power Supply Box ON/OFF A384-00-07- NT WT	40 W	24V	280 x 30 x 24
A384-00-08- NT WT	100 W	24V	280 x 30 x 24

220 V- 240 V- Included ON/OFF 24Vdc Power Supply.

	P	V	D (A x B x C) mm
MINIMAL TRACK 24V Remote Power Supply ON/OFF 0434-01-37	60 W	24V	180 x 52 x 30
0433-10-22	100 W	24V	295 x 43 x 30



220 V- 240 V-

	V	D (A x B x C) mm
MINIMAL TRACK 24V Remote Constant Voltage Dimmer 0433-01-32	DALI / PUSH 24V	181 x 42 x 20
0433-01-33	CASAMBI 24V	172 x 42 x 20
0434-01-64	WIFI 24V	105 x 44 x 23

24V

DROP VOLTAGE TABLE

POWER [W]	CABLE SECTION [mm ²]	CABLE LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

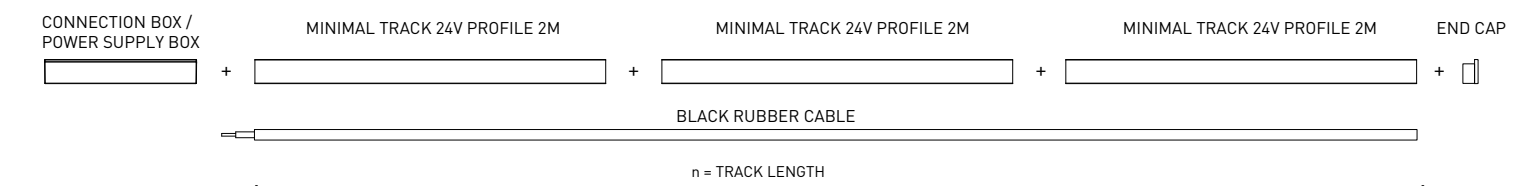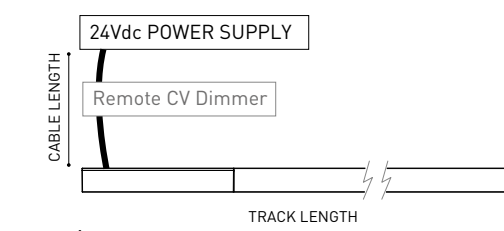

COLOUR | N ■ | NT ■ | WT □ | DIM OPTIONS PLEASE CONSULT


Line Micro 24V

Neue weiße Ausführung

09/11/2022

SE AÑADE NOTA RESTRICTIVA A PIE DE PÁGINA
AÑADIDO ACABADO EN BLANCO TEXTURADO (WT) - 15/09/2022


NEW LINE MICRO 24V

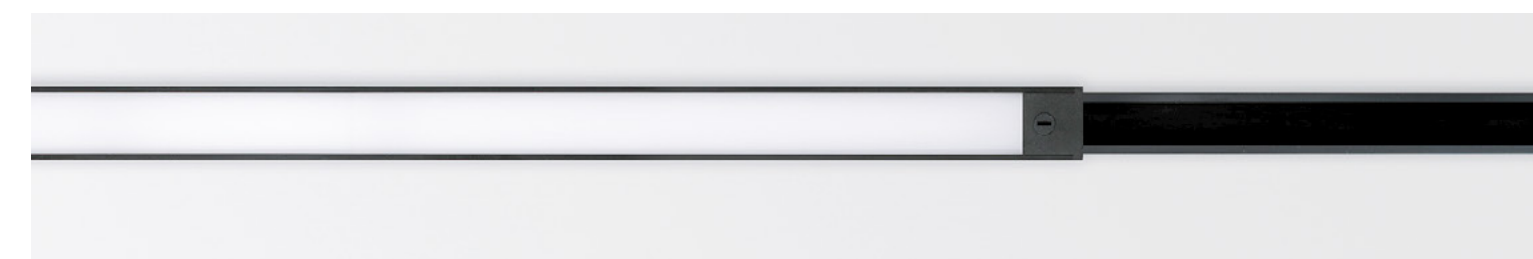


	P	CCT	I	Flux	LOR	
LINE MICRO 250 24V	A395-00-00- N WT	2W	2700K	400	330	52%
	A395-00-01- N WT	2W	3000K	400	340	52%
LINE MICRO 500 24V	A395-10-00- N WT	5W	2700K	400	820	52%
	A395-10-01- N WT	5W	3000K	400	840	52%
LINE MICRO 1000 24V	A395-20-00- N WT	9W	2700K	700	1430	52%
	A395-20-01- N WT	9W	3000K	700	1500	52%




LINE MICRO 250 24V



LINE MICRO 500 24V



LINE MICRO 1000 24V



LINE MICRO 250 24V

- Peso embalaje: 30gr.
- Medidas embalaje: 265x46x40mm
- Peso producto: 95gr.

- Peso total: 125gr.

LINE MICRO 500 24V

- Peso embalaje: 55gr.
- Medidas embalaje: 515x46x40mm
- Peso producto: 175gr.

- Peso total: 230gr.

LINE MICRO 1000 24V

- Peso embalaje: 110gr.
- Medidas embalaje: 1015x46x40mm
- Peso producto: 330gr.

- Peso total: 440gr.

COLOUR | N ■ | WT □ |

MATERIAL | AL | PC |


» ???

NOT VALID FOR MINIMAL TRACK 24V TRIMLESS



Loop

NEW

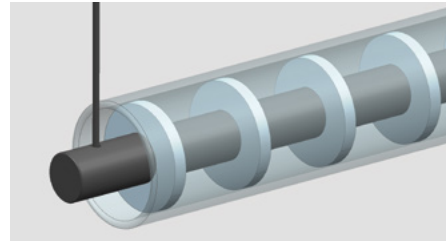

EMBALAJE DIMENSIONES . 000mm
 PESO EMBALAJE CARTON . 0,000kg
 PESO EMBALAJE PLASTICO . 2,8 Kg.
 PESO PRODUCTO 1,0m . 0,000kg
 PESO TOTAL . 0,000kg

		P	CCT	I	Flux	LOR
LOOP 1250	A???-11- 00 -0- N	26,7W	2700K	700mA	2556Lm	37%
	A???-11- 00 -1- N	26,7W	3000K	700mA	3094Lm	37%


220 V- | IP20 | CRI>90 | L80B10 >60.000h | MacAdam Step 3 | OPTIONS INCL UGR <19 | 40°

		P	CCT	I	Flux	LOR
LOOP 1250 Base	A???-11- 00 -0- N	26,7W	2700K	700mA	2556Lm	37%
	A???-11- 00 -1- N	26,7W	3000K	700mA	3094Lm	37%

220 V- | IP20 | CRI>90 | L80B10 >60.000h | MacAdam Step 3 | OPTIONS INCL UGR <19 | 40°

00 OPTIONS*


- 1 No DIM
- 2 DIM DALI
- 3 DIM PUSH

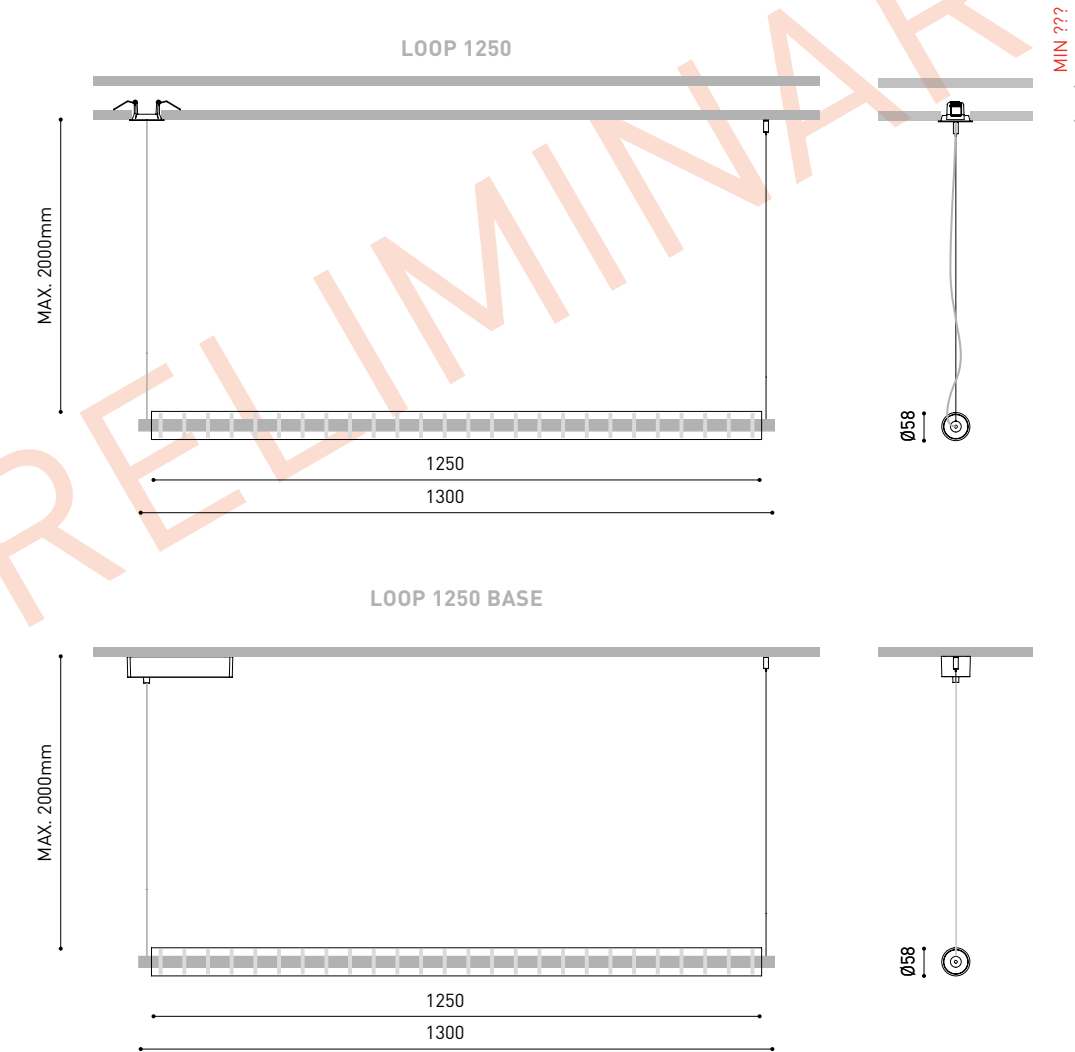

30/09/2022
 DATASHEET PRELIMINAR

COLOUR | N ■ | MATERIAL | OPTICAL GLASS | OPTICAL PMMA | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

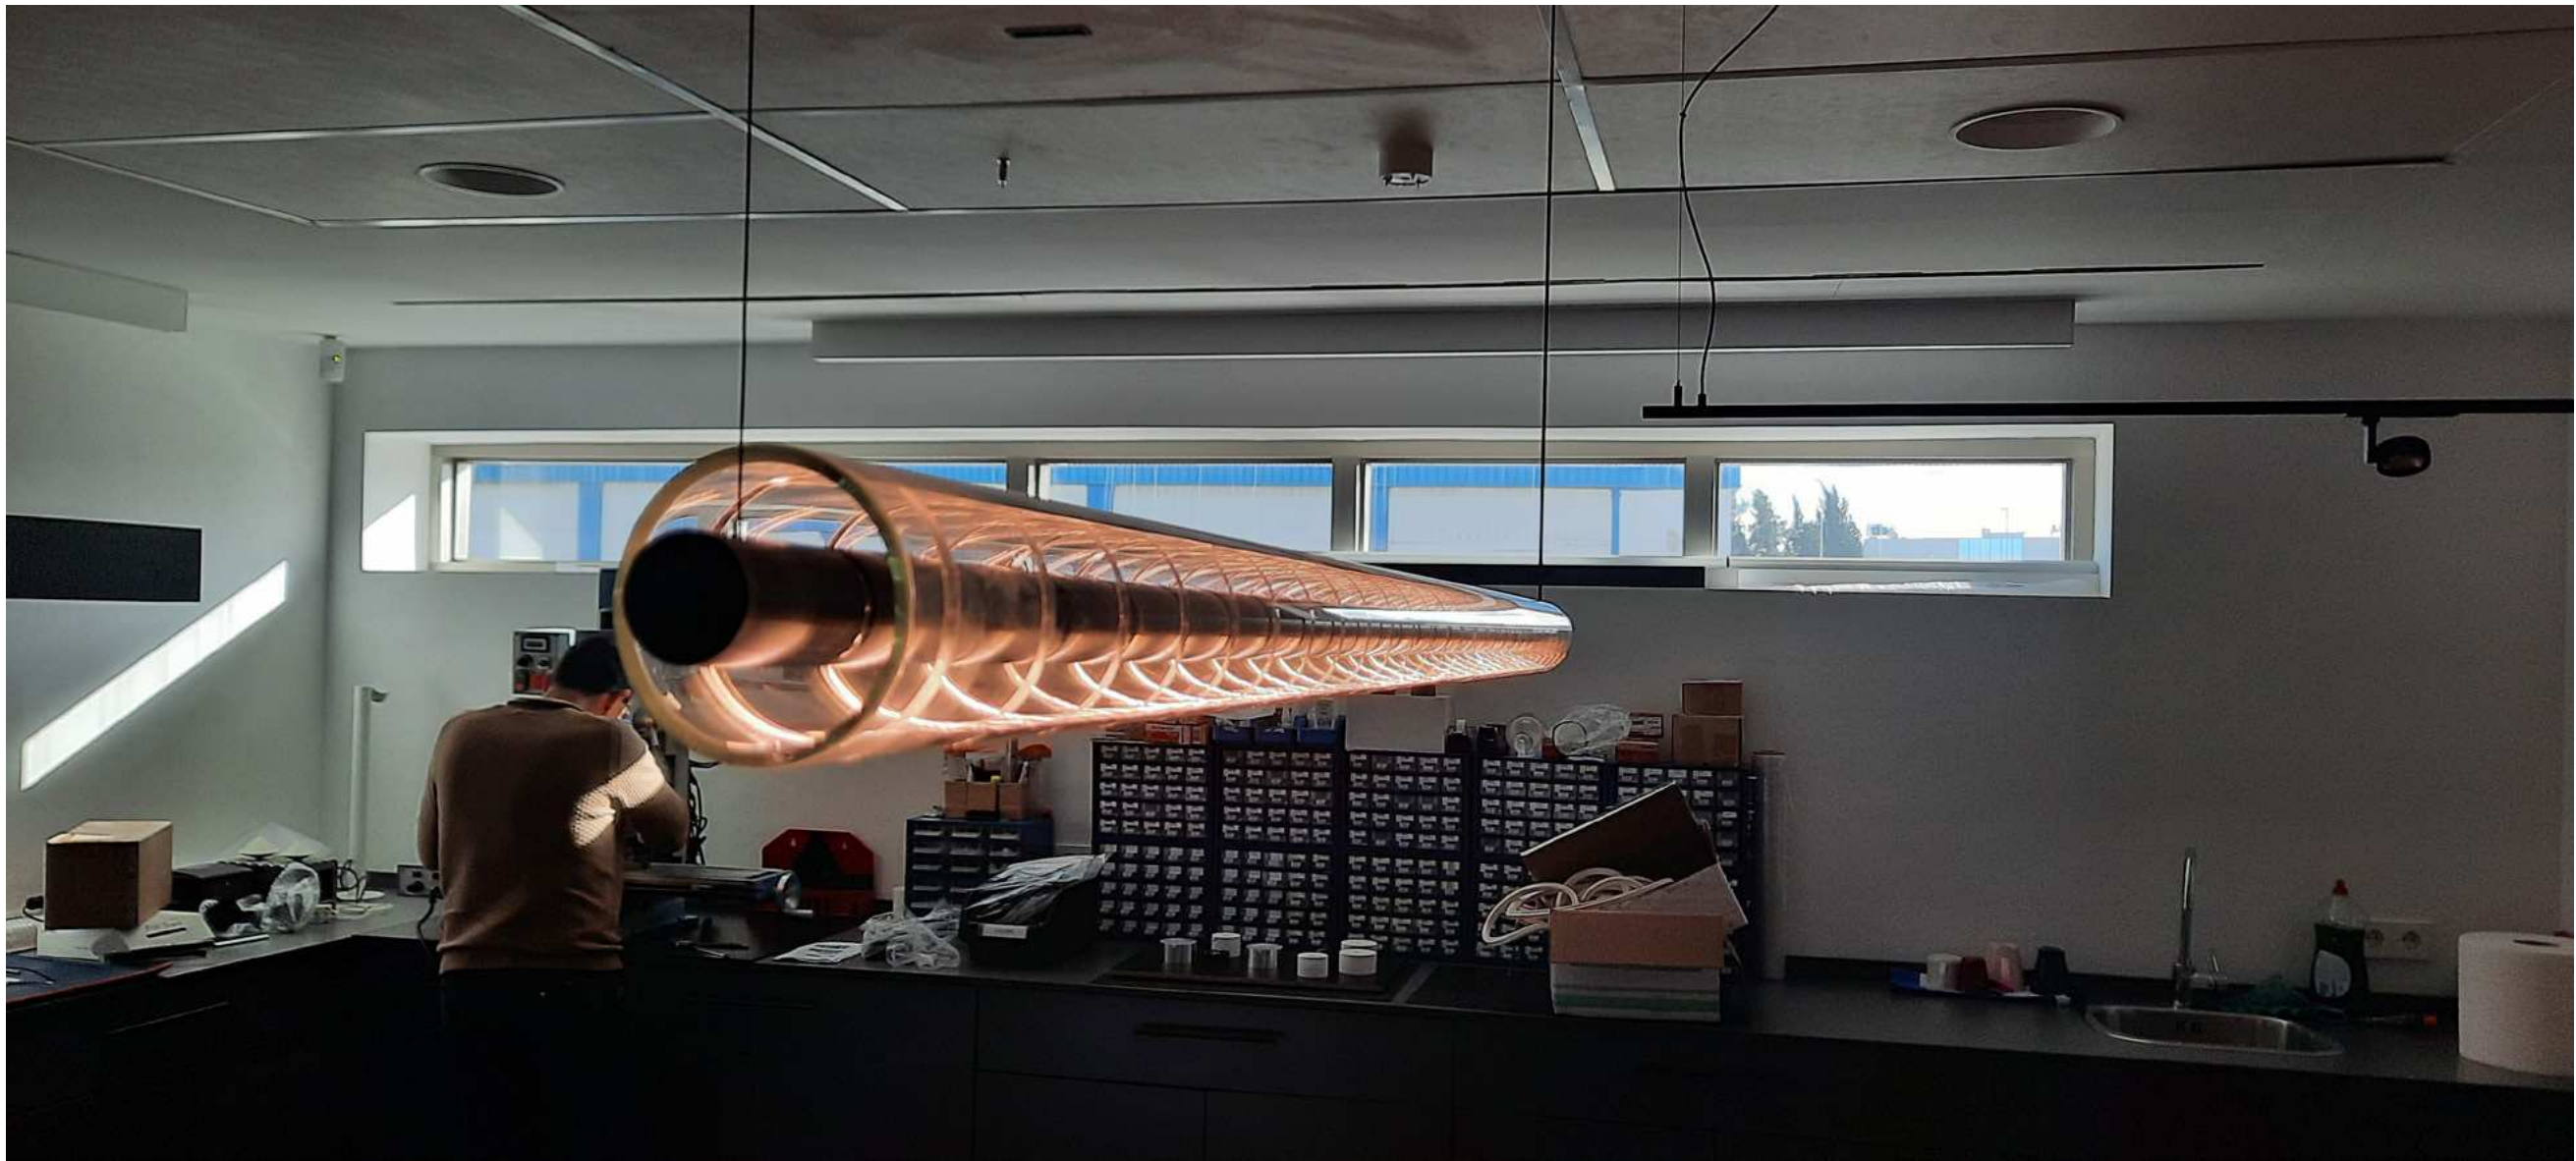

Lens Light

NEW




DIMENSIONES EMBALAJE: 150x158x128mm
 PESO EMBALAJE CARTÓN: 125g
 PESO EMBALAJE PLÁSTICO: 0g
 PESO PRODUCTO W/O EQ: 500g

		P	CCT	I	Flux	LOR
LENS LIGHT	A469-01- ☉ -0- W N	5,8W	2700K	500mA	482Lm	XX%
	A469-01- ☉ -1- W N	5,8W	3000K	500mA	516Lm	XX%
	A469-01- ☉ -2- W N	5,8W	4000K	500mA	556Lm	XX%
DALI	A469-02- ☉ -0- W N	5,8W	2700K	500mA	482Lm	XX%
	A469-02- ☉ -1- W N	5,8W	3000K	500mA	516Lm	XX%
	A469-02- ☉ -2- W N	5,8W	4000K	500mA	556Lm	XX%
PUSH	A469-03- ☉ -0- W N	5,8W	2700K	500mA	482Lm	XX%
	A469-03- ☉ -1- W N	5,8W	3000K	500mA	516Lm	XX%
	A469-03- ☉ -2- W N	5,8W	4000K	500mA	556Lm	XX%

220 V~
240

IP20 | CRI>90 | L80B10 >60.000h



BEAM OPTIONS

0	10°
1	40°



11/11/2022

DATOS MODIFICADOS


SIN DATOS (EN ROJO)

COLOUR | N ■ | W □ |

MATERIAL | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

PRELIMINAR

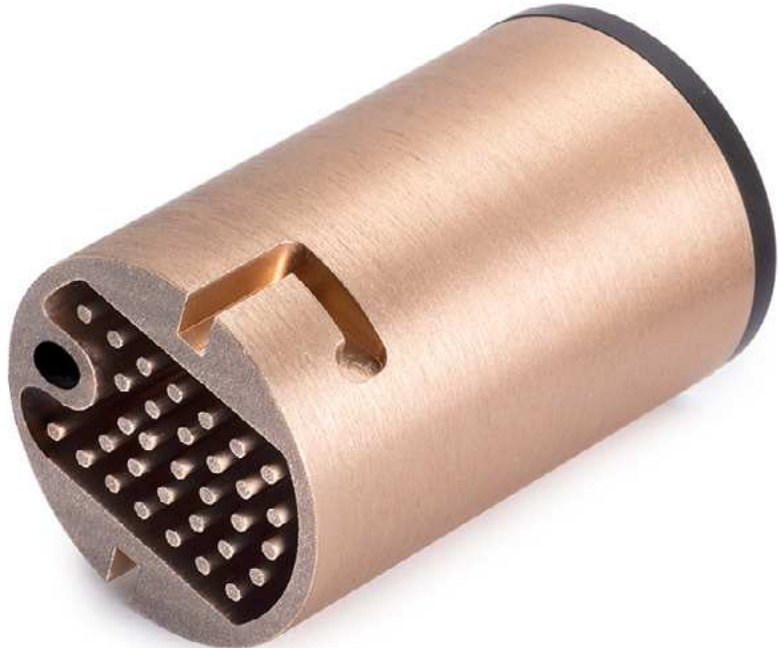

Dune

NEW DUNE 35



OPTIONS

CORD LENGTH - L

- 0 2 m
- 1 3 m
- 2 5 m

DIM

- 1 No DIM
- 2 DIM DALI


	P	CCT	I	Flux	LOR	
DUNE 35	A???-00-1-00-0- WT NT	6,8 W	2700K	200	909	??%
	A???-00-1-00-0- WT NT	6,8 W	3000K	200	945	??%



	P	CCT	I	Flux	LOR	
DUNE 35 Recessed	A???-00-1-00-0- WT NT	6,8 W	2700K	200	909	??%
	A???-00-1-00-0- WT NT	6,8 W	3000K	200	945	??%




	P	CCT	I	Flux	LOR	
DUNE 35 Wire Trimless	A???-00-1-00-0- WT NT	6,8 W	2700K	200	909	??%
	A???-00-1-00-0- WT NT	6,8 W	3000K	200	945	??%

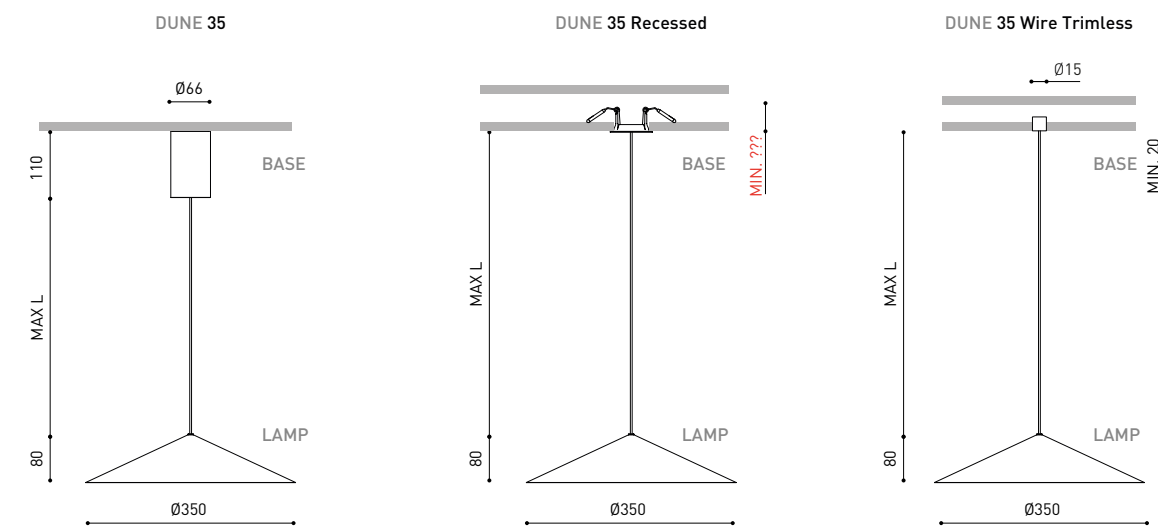


*FINISHING: LAMP | BASE
WT | WT
NT | NT

OPTIONAL ACCESSORY
Cord Accessory 0223-00-00- | N |



DUNE 35 Recessed + CORD ACCESSORY

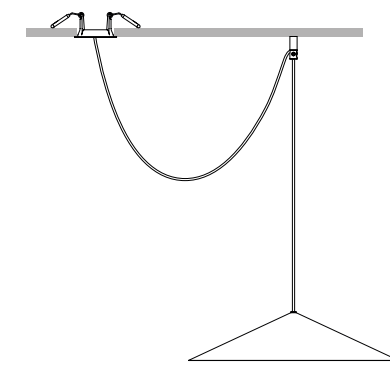

PRELIMINAR
24/10/2022

COLOUR | WT | NT |

MATERIAL | AL | PC |

OTHER K & DIM OPTIONS PLEASE CONSULT
* OTHER FINISHING COMBINATIONS PLEASE CONSULT

NEW DUNE 55



OPTIONS

CORD LENGTH - L

- 0 2 m
- 1 3 m
- 2 5 m

DIM

- 1 No DIM
- 2 DIM DALI


	P	CCT	I	Flux	LOR	
DUNE 55	A???-00-1-00-0- WT NT	10,5 W	2700K	300	1320	??%
	A???-00-1-00-0- WT NT	10,5 W	3000K	300	1373	??%



	P	CCT	I	Flux	LOR	
DUNE 55 Recessed	A???-00-1-00-0- WT NT	10,5 W	2700K	300	1320	??%
	A???-00-1-00-0- WT NT	6,8 W	3000K	300	1373	??%




	P	CCT	I	Flux	LOR	
DUNE 55 Wire Trimless	A???-00-1-00-0- WT NT	10,5 W	2700K	300	1320	??%
	A???-00-1-00-0- WT NT	10,5 W	3000K	300	1373	??%

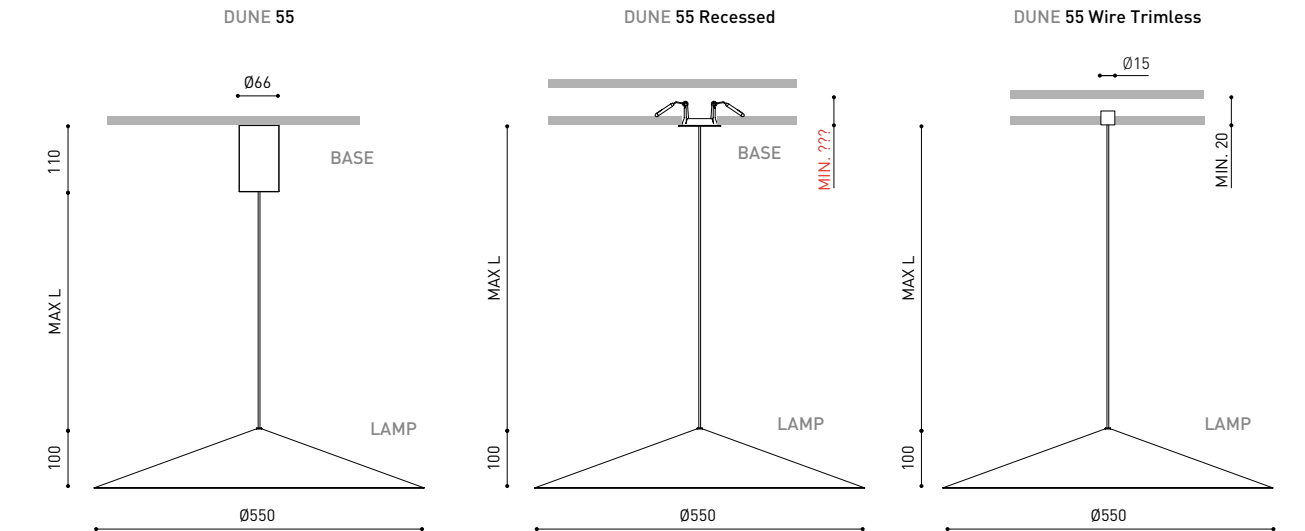

*FINISHING: LAMP | BASE
WT | WT
NT | NT

OPTIONAL ACCESSORY
Cord Accessory 0223-00-00- | N |



DUNE 55 Recessed + CORD ACCESSORY



PRELIMINAR
24/10/2022


COLOUR | WT | NT |

MATERIAL | AL | PC |

OTHER K & DIM OPTIONS PLEASE CONSULT
* OTHER FINISHING COMBINATIONS PLEASE CONSULT



Minimal Track Trimless

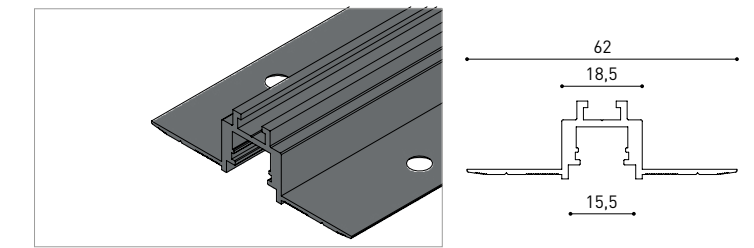


MINIMAL TRACK 24V Trimless Profile 2m
A467-02-00- | N |




MINIMAL TRACK 24V Trimless
Rubber Cable n x 1 meter A467-00-01- | N |
n = Total Length of System


MINIMAL TRACK 24V Trimless Corner 90° 1 Plane
A467-00-02- | N |
Cable Length = 140mm

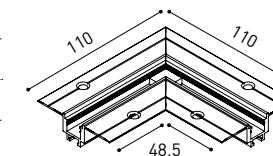


MINIMAL TRACK 24V Trimless Corner 90° 1 Plane Connector
A467-00-03- | N |




MINIMAL TRACK 24V Trimless Corner 90° 2 Planes
A467-00-04- | N |
Cable Length = 200mm

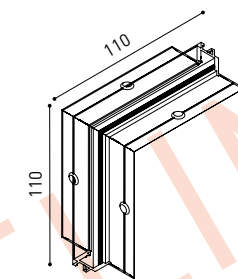

MINIMAL TRACK 24V Trimless End Caps
A467-00-05- | N |
Two End Caps Included





MINIMAL TRACK 24V Trimless Straight Joiner
A467-00-06



MINIMAL TRACK 24V Trimless Connection Box
A467-00-07 | N |





	P	V	D (A x B x C) mm
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60 W 24V 180 x 52 x 30
		0433-10-22	100 W 24V 295 x 43 x 30
220 V _~ 240 V _~			
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / PUSH 24V 181 x 42 x 20
		0433-01-33	CASAMBI 24V 172 x 42 x 20
		0434-01-64	WIFI 24V 105 x 44 x 23
24V			



POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	x	x
	1,5	20	20	10	x

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

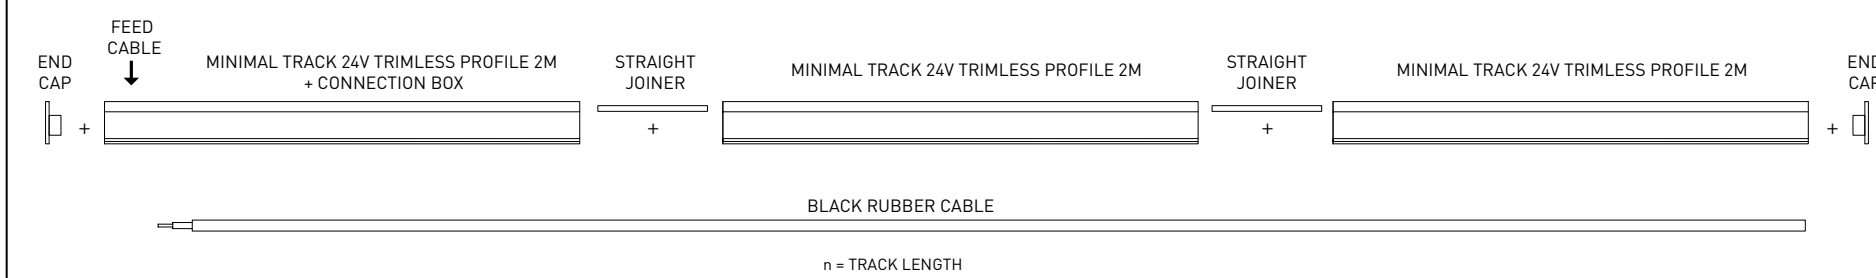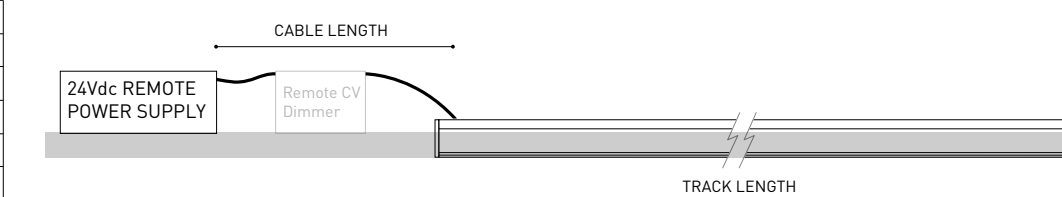


COLOUR | N | DIM OPTIONS PLEASE CONSULT



Black Foster Micro 24V Surface 5


Für Minimal Track Trimless

NEW BLACK FOSTER MICRO 24V SURFACE 5




	P	CCT	I	Flux	LOR	
BLACK FOSTER Micro 24V Surface 5	A468-20-10- NT WT	7W	2700K	500mA	775Lm	87%
	A468-20-11- NT WT	7W	3000K	500mA	800Lm	87%
	A468-20-12- NT WT	7W	4000K	500mA	850Lm	87%

24V | III | IP20 | CRI>90 | L90B10 > 60.000h



DIMENSIONES EMBALAJE: 148x74x26mm
 PESO EMBALAJE CARTÓN: 20g
 PESO EMBALAJE PLÁSTICO: 0g
 PESO PRODUCTO: 80g

BLACK FOSTER
Micro 24V Surface 5

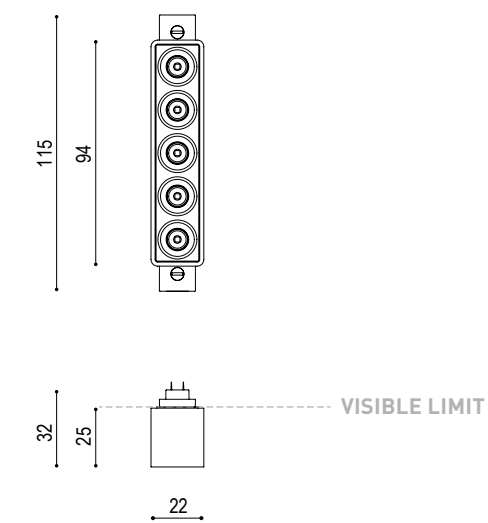

COLOUR | NT ■ | WT □ | MATERIAL | AL | ABS+PC |



Fit Surface


NEW FIT 65 SURFACE

03/10/2022



	P	CCT	Beam	I	Flux	LOR
FIT 65 SURFACE A??-0- -11- WT NT	10,3W	3000K	18°	300mA	1300 lm	90%
A??-0- -12- WT NT	10,3W	4000K	18°	300mA	1320 lm	90%
A??-0- -21- WT NT	10,3W	3000K	26°	300mA	1300 lm	88%
A??-0- -22- WT NT	10,3W	4000K	26°	300mA	1320 lm	88%
A??-0- -31- WT NT	10,3W	3000K	36°	300mA	1300 lm	84%
A??-0- -32- WT NT	10,3W	4000K	36°	300mA	1320 lm	84%

220 V~ | IP20 | CRI>90 | L80B10 >60.000h



>> MORE INFO

*OPTIONS

1	No DIM
2	DIM DALI


OPTIONAL ACCESSORY

FIT65 Anti-glare Honeycomb Louver ** A356-00-00

NOT SOLD SEPARATELY



FIT 65 SURFACE

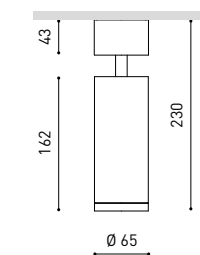

Medidas ext. caja ON-OFF/DALI = ???x??x??mm

Peso neto No DIM: 0.??? Kg
Peso bruto No DIM: 0.??? Kg

Peso neto DIM DALI: 0.??? Kg
Peso bruto DIM DALI: 0.??? Kg

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» 422

» PLEASE CONSULT


NEW FIT 80 SURFACE

03/10/2022



	P	CCT	Beam	I	Flux	LOR
FIT 80 SURFACE A??-0- -11- WT NT	19W	3000K	19°	550mA	2500 lm	90%
A??-0- -12- WT NT	19W	4000K	19°	550mA	2540 lm	90%
A??-0- -21- WT NT	19W	3000K	28°	550mA	2500 lm	84%
A??-0- -22- WT NT	19W	4000K	28°	550mA	2540 lm	84%
A??-0- -31- WT NT	19W	3000K	37°	550mA	2500 lm	85%
A??-0- -32- WT NT	19W	4000K	37°	550mA	2540 lm	85%

220 V~ | IP20 | CRI>90 | L80B10 >60.000h



>> MORE INFO


*OPTIONS

1	No DIM
2	DIM DALI


OPTIONAL ACCESSORY

FIT 80 Anti-glare Honeycomb Louver ** A357-00-00

NOT SOLD SEPARATELY



FIT 80 SURFACE

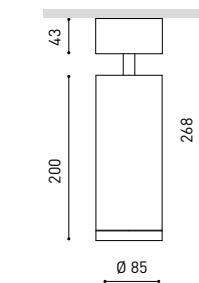

Medidas ext. caja ON-OFF/DALI = ???x??x??mm

Peso neto No DIM: ??? Kg
Peso bruto No DIM: ??? Kg

Peso neto DIM DALI: ??? Kg
Peso bruto DIM DALI: ??? Kg

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» 422


» PLEASE CONSULT



Black Foster Recessed 2 x 2

BLACK FOSTER RECESSED

06/10/2022
DATOS ACTUALIZADOS MARCADOS EN VERDE

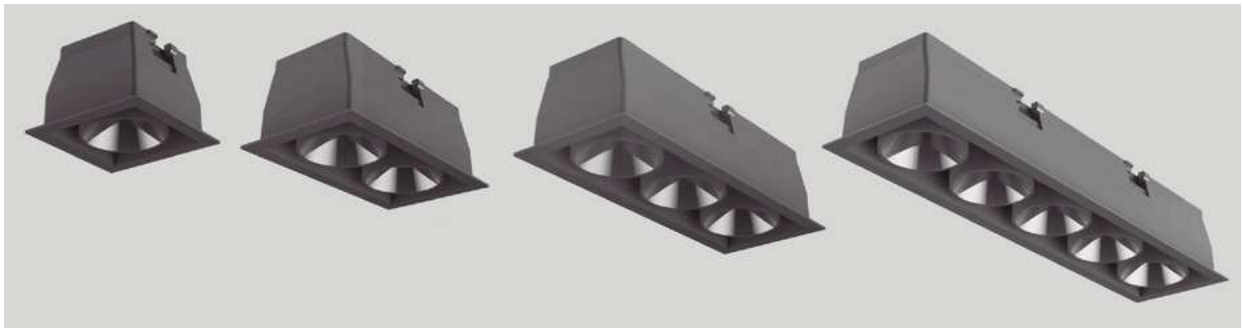

		P	CCT	I	Flux	LOR	Ⓞ
BLACK FOSTER Recessed 1	A319-10-Ⓞ-0- N W WN NMG	2,1 W	2700K	700	190	92%	50x50
	A319-10-Ⓞ-1- N W WN NMG	2,1 W	3000K	700	210	92%	50x50
	A319-10-Ⓞ-2- N W WN NMG	2,1 W	4000K	700	250	92%	50x50
BLACK FOSTER Recessed 2	A319-20-Ⓞ-0- N W WN NMG	4,2 W	2700K	700	380	92%	50x93
	A319-20-Ⓞ-1- N W WN NMG	4,2 W	3000K	700	420	92%	50x93
	A319-20-Ⓞ-2- N W WN NMG	4,2 W	4000K	700	500	92%	50x93
BLACK FOSTER Recessed 3	A319-30-Ⓞ-0- N W WN NMG	6,3 W	2700K	700	570	92%	50x136
	A319-30-Ⓞ-1- N W WN NMG	6,3 W	3000K	700	630	92%	50x136
	A319-30-Ⓞ-2- N W WN NMG	6,3 W	4000K	700	750	92%	50x136
BLACK FOSTER Recessed 5	A319-40-Ⓞ-0- N W WN NMG	10,5 W	2700K	700	950	92%	50x222
	A319-40-Ⓞ-1- N W WN NMG	10,5 W	3000K	700	1050	92%	50x222
	A319-40-Ⓞ-2- N W WN NMG	10,5 W	4000K	700	1250	92%	50x222
BLACK FOSTER Recessed 2x2 NO ENEC	A319-50-Ⓞ-0- N W WN	8,4 W	2700K	700	760	92%	93x93
	A319-50-Ⓞ-1- N W WN	8,4 W	3000K	700	840	92%	93x93
	A319-50-Ⓞ-2- N W WN	8,4 W	4000K	700	1000	92%	93x93


220 V~ | CE | IP20 | CRI>90 | L80B10 >60.000h

MacAdam Step 3 | OPTIONS* | INCL | UGR <19 | 38°

Ⓞ OPTIONS

1	No DIM
2	DIM Push *
4	DIM DALI


*Except A319-10 reference.
DIM PHASE CUT PLEASE CONSULT

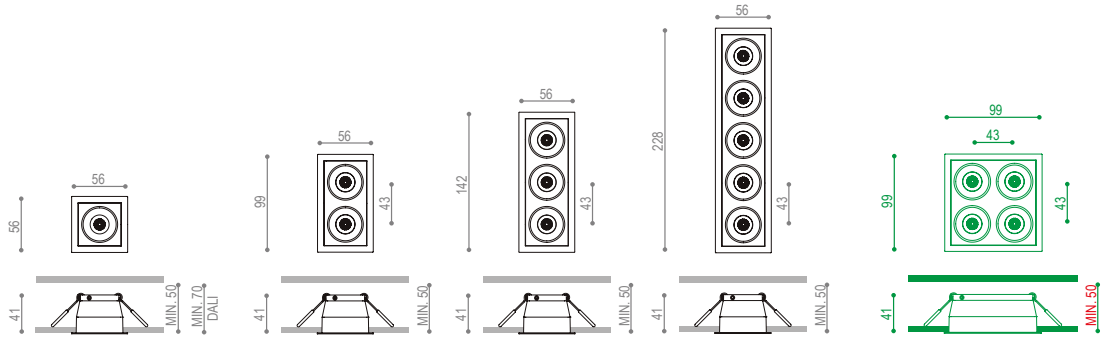

COLOUR | N ■ | W □ | WN ▣ | NMG ■ | MATERIAL | AL | ABS+PC

BLACK FOSTER RECESSED

06/10/2022
DATOS ACTUALIZADOS MARCADOS EN VERDE

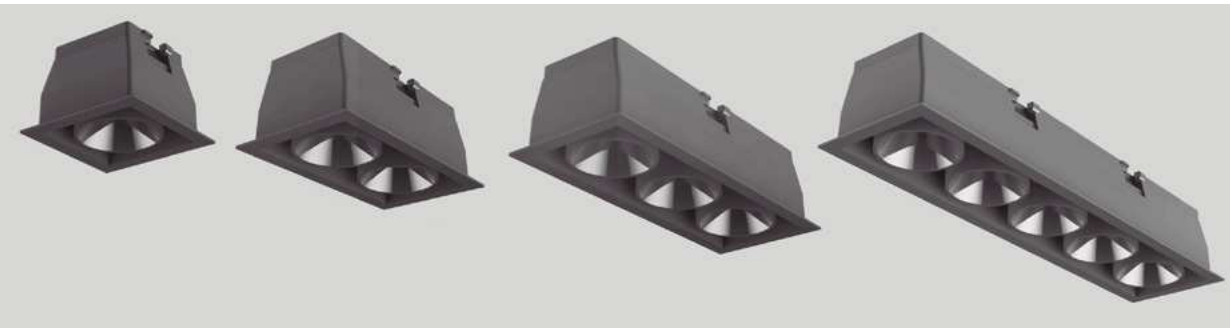

		P	CCT	I	Flux	LOR	Ⓞ
BLACK FOSTER Recessed 1	A319-11-Ⓞ-0- N WN NMG	2,1 W	2700K	700	190	90%	50x50
	A319-11-Ⓞ-1- N WN NMG	2,1 W	3000K	700	210	90%	50x50
	A319-11-Ⓞ-2- N WN NMG	2,1 W	4000K	700	250	90%	50x50
BLACK FOSTER Recessed 2	A319-21-Ⓞ-0- N WN NMG	4,2 W	2700K	700	380	90%	50x93
	A319-21-Ⓞ-1- N WN NMG	4,2 W	3000K	700	420	90%	50x93
	A319-21-Ⓞ-2- N WN NMG	4,2 W	4000K	700	500	90%	50x93
BLACK FOSTER Recessed 3	A319-31-Ⓞ-0- N WN NMG	6,3 W	2700K	700	570	90%	50x136
	A319-31-Ⓞ-1- N WN NMG	6,3 W	3000K	700	630	90%	50x136
	A319-31-Ⓞ-2- N WN NMG	6,3 W	4000K	700	750	90%	50x136
BLACK FOSTER Recessed 5	A319-41-Ⓞ-0- N WN NMG	10,5 W	2700K	700	950	90%	50x222
	A319-41-Ⓞ-1- N WN NMG	10,5 W	3000K	700	1050	90%	50x222
	A319-41-Ⓞ-2- N WN NMG	10,5 W	4000K	700	1250	90%	50x222
BLACK FOSTER Recessed 2x2 NO ENEC	A319-51-Ⓞ-0- N WN	8,4 W	2700K	700	760	90%	93x93
	A319-51-Ⓞ-1- N WN	8,4 W	3000K	700	840	90%	93x93
	A319-51-Ⓞ-2- N WN	8,4 W	4000K	700	1000	90%	93x93


220 V~ | CE | IP20 | CRI>90 | L80B10 >60.000h

MacAdam Step 3 | OPTIONS* | INCL | UGR <19 | 19°

Ⓞ OPTIONS

1	No DIM
2	DIM Push *
4	DIM DALI

*Except A319-11 reference.
DIM PHASE CUT PLEASE CONSULT

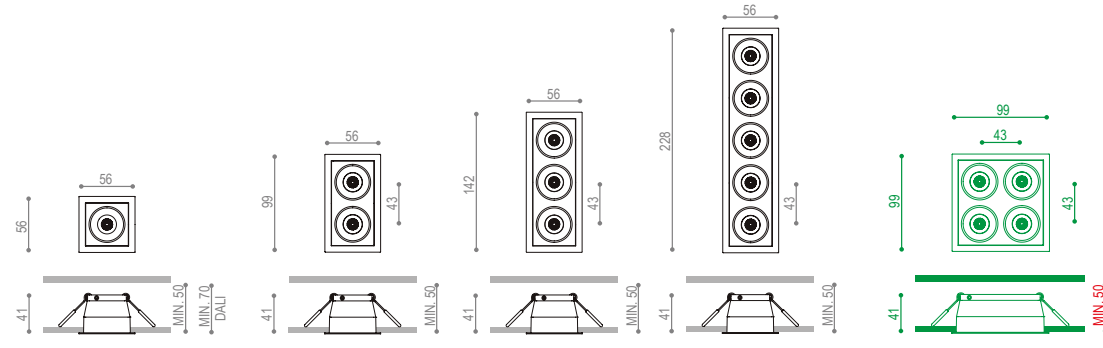

COLOUR | N ■ | WN □ | NMG ■ | MATERIAL | AL | ABS+PC




Shot Light S Flex

NEW SHOT LIGHT S FLEX



	P	CCT	Beam	I	Flux	LOR
SHOT LIGHT S FLEX	A477-0-00-00- WT NT	6W	2700K	18°	500mA	640Lm 87%
	A477-0-00-01- WT NT	6W	3000K	18°	500mA	670Lm 87%
	A477-0-00-02- WT NT	6W	4000K	18°	500mA	720Lm 87%
	A477-0-00-10- WT NT	6W	2700K	40°	500mA	640Lm 87%
	A477-0-00-11- WT NT	6W	3000K	40°	500mA	670Lm 87%
	A477-0-00-12- WT NT	6W	4000K	40°	500mA	720Lm 87%


220 V~ | IP20 | CRI>90 | L80B10 >60,000h



DIMENSIONES EMBALAJE: 86x86x75mm
 PESO EMBALAJE CARTÓN: 45g
 PESO EMBALAJE PLÁSTICO: 70g
 PESO PRODUCTO ON/OFF: 0g
 PESO PRODUCTO DALI: 70g

☉ OPTIONS

1	No DIM
2	DIM DALI
3	DIM PUSH

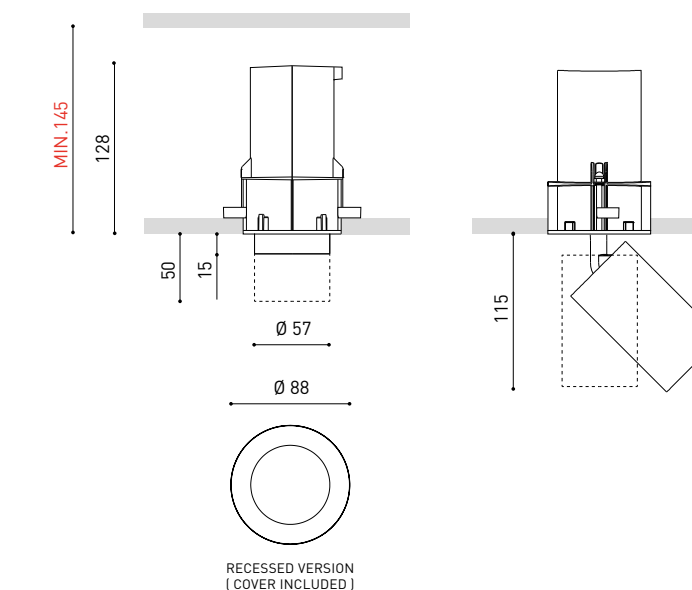

10/01/2023

COLOUR | NT ■ | WT □ |

MATERIAL | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

Trimless Einbauteil

Zubehör, um die Installation des Arkoslight
Trimless Accessory zu erleichtern

