

**davide groppi**

HANDBOOK 2025

**INDEX**

<b>WIRELESS / SENZA FILO</b>	13
35MM	15
BUGIA	19
PoPuP	25
POST PRANDIUM	31
QuiQuoQua	39
TeTaTeT	45
TeTaTeT Flûte	61
VIS À VIS	71
<b>TABLE / TAVOLO</b>	79
ABA	81
ANIMA	85
CALVINO	93
FM	97
MOON T	105
PIGRECO	111
RIBBON	115
<b>FLOOR / TERRA</b>	121
BANNER	123
HASHI	127
MASAI	133
MISTER	141
MOON F	145
MOVIE	151
ORIGINE	155
PABLO	163
Q	169
SAMPEI	175
SHOJI	183
STOP	187

<b>SUSPENSION / SOSPENSIONE</b>	195
CARTESIO	197
CATHODE	201
FOSBURY	211
LED IS MORE	215
LOUIS XIV	219
MAGIA	225
MISS	239
MOON	249
NEURO	263
OVO	273
OVONELPIATTO	277
REFLEX S	281
SHANGHAI	287
SIMBIOSI	291
SOTTILE	301
SOTTOSOPRA	313
SPY	319
<b>WALL / PARETE</b>	323
DOT P	325
DUET	335
EDISON'S NIGHTMARE	339
FILM	343
FOIL	347
FOLDER	351
LINET	359
MIRA	363
MIRA MAGNETIC	371
RAIL	377
REFLEX	381
SHADE	385
SOL 1	389
SOL 2	393
SPOT	397
TOAST	405
VICEVERSA	411

<b>CEILING / SOFFITTO</b>	417
ASINTOTO	419
AURORA	425
DOT PL 51	431
HAKO PL	437
MINI PL 51	441
NULLA PL	445
PUNTO PL	449
PUNTO 2 PL	453
SANMARTINO	457
TRICK TRACK	461
<b>RECESSED / INCASSO</b>	465
BUCO R	467
DOT R	471
MINI 51	477
MINI BIT 51	481
MIRA R	485
NULLA	491
PUNTO	511
<b>SYSTEMS / SISTEMI</b>	517
ENDLESS	519
FLASH	551
INFINITO	571
OHM	591
UTOPIA	607
<b>TRACKS - PROFILES / BINARI - PROFILI</b>	619
BINARIO TRIFASE	621
COLIBRÌ	637
FRAMELESS	653
LIGHTLINE 0808	661
LIGHTLINE 1010	668
LIGHTLINE 1508	674
LIGHTLINE 2612	681
LIGHTLINE 7454	688

<b>OUTDOOR / ESTERNO</b>	695
BELLADINOTTE	697
BUBKA	701
BUBKA BOLLARD	707
BUIO	711
BUIO - SPOT	721
CHILLOUT	729
GRILLO	733
HAZARD	737
IMU	741
JULIET	745
LENTA	749
NEURO OUTDOOR	753
NUIT	759
ORIGINE OUTDOOR	765
Q²	771
SAMPEI OUTDOOR	775
SHOJI OUTDOOR	783
SPOT OUTDOOR	787
<b>BULBS / LAMPADINE</b>	790
DG111 LED MODULES / MODULI LED DG111	791
DRIVERS / ALIMENTATORI	792
COMMON ACCESSORIES / ACCESSORI COMUNI	796
SUSPENSION KITS / KIT DI SOSPENSIONE	798
COMMERCIAL TERMS / CONDIZIONI COMMERCIALI	801

**INDEX**

Our codification system consists of a fifteen-digit structure defined as follows:

Il nostro sistema di codifica prevede una struttura a quindici cifre così definita:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY FAMIGLIA PRODOTTO					FINISH FINITURA		INTERNAL USE ONLY SOLO PER USO INTERNO			COLOUR TEMPERATURE* TEMPERATURA COLORE*		ELECTRIFICATION ELETTRIFICAZIONE		

**Finish / Finitura**

0	0	Standard
0	1	Polished Chrome / Cromo Lucido
0	3	Matt White / Bianco Opaco
0	4	Matt Black / Nero Opaco
0	8	Brushed Brass / Ottone Spazzolato
1	0	Stainless Steel / Inox
1	3	Black Brushed Stainless Steel / Inox Nero Spazzolato
1	4	Brushed Chrome / Cromo Spazzolato
1	5	Natural Brass / Ottone Naturale
1	8	Matt Gold / Oro Opaco
1	9	Polished Gold / Oro Lucido
2	0	Magic Blue
2	6	Total Black / Nero Totale
2	7	Gravity Black
2	8	Polished Black Chrome/ Cromo Nero Lucido
2	9	Brushed Bronze / Bronzo Spazzolato
3	0	Grey Blue
3	1	Black Red
3	2	Copper Oxide
3	3	Black Green
3	4	Matt White - Black Bicolour / Bianco - Nero Opaco Bicolore
3	5	Grey Green
3	6	Brushed Black / Nero Spazzolato
3	7	Copper Brown
3	8	Blasted Inox / Inox Pallinato
3	9	Matt White - Polished Gold / Bianco Opaco - Oro Lucido
4	0	Grey Beige
4	1	Umbra Grey
4	9	Matt Black - Polished Gold / Nero Opaco - Oro Lucido

**Colour temperature / Temperatura di colore**

0	0	Light source not included / Sorgente non inclusa
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

\*Excluding tracks and profiles / Esclusi binari e profili.

**Electrification / Elettrificazione**

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

The Davide Groppi handbook is a confidential document and cannot be disclosed.  
In this document the drawings and technical information are to be considered indicative.  
All product features and technical measurements are available on our website  
davidegropi.com

Il manuale tecnico Davide Groppi è un documento riservato e non può essere divulgato.  
In questo documento i disegni e le informazioni tecniche sono da ritenersi indicative.  
Tutte le caratteristiche di prodotto e le misure tecniche sono disponibili sul nostro sito  
davidegropi.com

# GUIDELINE TO PROPERLY READ THE CATALOGUE / GUIDA ALLA LETTURA DEL CATALOGO

## General data on the product

Informazioni generali sul prodotto

*Mounting - Lighting - Use - Material - Finish - Note*

## Model specifications

Specifiche modello

*Technical data - Certifications - Codes*

NULLA		Davide Groppi / 2010	
Recessed / Direct / Indoor			
Material	Metal		
Finish	.00 Standard		
Note	Recessed luminaire. Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.		
<hr/>			
	<b>NULLA - 23°</b> 14W 24V DC 2700K - 425lm / 3000K - 458lm Beam: 23° UGR <19 Driver not included CE <img alt="IP20/IP65 icon" data-bbox="835 300 845 310"/>	Standard - 2700K Standard - 3000K	1A410000.27.20   1A410000.30.20
	<b>NULLA - 32°</b> 14W 24V DC 2700K - 538lm / 3000K - 579lm Beam: 32° UGR <19 Driver not included CE <img alt="IP20/IP65 icon" data-bbox="835 395 845 405"/>	Standard - 2700K Standard - 3000K	1A211000.27.20   1A211000.30.20
398			

## Compulsory and optional accessories

Accessori obbligatori e accessori opzionali

*Accessories finishes and specifications - Codes*

NULLA		Davide Groppi / 2010	
<b>Compulsory accessories / Accessori obbligatori</b>			
Installation kits / Kit d'installazione			
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 25 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm		Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A3980400.00.00
	Plasterboard flange (bottom) = 12,5 mm / Flangia (da sotto) per cartongesso = 12,5 mm		Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	NULLA 25	1A4960400.00.00
<hr/>			
Drivers / Alimentatori			
	Driver / Alimentatore 220-240V(100-127V) 24V/16W(15W)/IP20/DALI		Not included 12024180.24
	Driver / Alimentatore 220-240V(100-127V) 24V/20W(15W)/IP20/PUSH		Not included 120240870.24
	Driver / Alimentatore 220-240V 24V/20W/IP20/TRIAC/IGBT		Not included 120240850.24
400			

## Reference model

Modello di riferimento

## PICTOGRAPHY / SIMBOLOGIA



**Class II luminaire:** luminaire whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



**Class III luminaire:** luminaire whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the luminaire is powered by a SELV safety transformer/driver in compliance with legislation in force. The luminaire must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and water.



Luminaire with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the luminaire to the closest lighting object.



**Color Rendering Index:** the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.



The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.

**Apparecchio in classe II:** apparecchio in cui la protezione contro le scariche elettriche non interessa solamente l'isolamento principale, bensì comprende misure di sicurezza supplementari, come il doppio isolamento o l'isolamento rinforzato. Tali misure non comprendono mezzi di messa a terra come protezione e non dipendono dalle condizioni di installazione.

**Apparecchio in classe III:** apparecchio in cui la sicurezza contro la scossa elettrica si basa sull'alimentazione a bassissima tensione di sicurezza. La conformità alla normativa è garantita solo se l'apparecchio è alimentato da un trasformatore/driver di sicurezza SELV conforme alla normativa in vigore. L'apparecchio non deve essere collegato a conduttori di messa a terra.

Livello di protezione contro l'accesso di corpi estranei, polvere e acqua.

Apparecchio che può utilizzare solamente lampadine a bassa pressione o con vetro di protezione.

Non utilizzare lampade a luce fredda.

Per prevenire il rischio di incendio, mantenere come minimo la distanza indicata dalla lampadina agli oggetti illuminati. Tale distanza va misurata lungo l'asse ottico dell'apparecchio all'oggetto illuminato più vicino.

**Color Rendering Index:** grado di alterazione dei colori sotto una data illuminazione in confronto ad una sorgente luminosa di riferimento. L'indice ottimale di resa cromatica Ra è pari a 100.

Il flusso luminoso, misurato in lumen, indica la quantità di luce percepita dall'occhio umano emessa da una sorgente luminosa. Nelle lampade Davide Groppi con modulo integrato è indicato il reale flusso luminoso ricavato dal rilievo fotometrico. Nelle lampade in cui è inclusa una lampadina è indicato il flusso luminoso fornito dal fabbricante della lampadina stessa.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR\* <19).

Apparecchio predisposto per essere alimentato dal tape conduttivo ENDLESS.

Apparecchio in cui è integrata la tecnologia Bluetooth Low Energy (BLE), per il controllo dell'illuminazione, Casambi.

Apparecchio dotato di Extradark comfort system. Il sistema Extradark è l'unione di un'ottica TIR in PMMA ottico a un elemento che schermata geometricamente l'angolo di visione del fascio luminoso ottenendo un'elevata uniformità di illuminamento e il pieno controllo dell'emissione. L'elemento ottico schermante, con finitura nero lucido, permette di controllare la riflessione speculare della luce e quindi di controllare in maniera perfetta l'indice di abbagliamento (UGR\* <19).

\*Unified Glare Rating

All Davide Groppi products, except those specifically indicated,  
are equipped with electronic light sources (LED).  
The selection of diodes is carried out with the utmost care to guarantee  
the highest levels of performance and luminous uniformity.

Tutti i prodotti Davide Groppi, salvo quelli specificamente indicati,  
sono equipaggiati con fonti luminose elettroniche (LED).  
La selezione dei diodi è eseguita con la massima cura per garantire  
i più alti livelli di prestazione e di uniformità luminosa.

**WIRELESS / SENZA FILO**



Those dear old slides. Nobody pays any attention to them anymore.  
It's the smallest lamp in our collection.  
It's an idea, a thought, a pendant, something you can wear.  
The pulsating light and the images you choose to display on it  
make 35MM unique and exceptional.

La vecchia, cara diapositiva. Purtroppo ormai in disuso.  
È la più piccola lampada della nostra collezione.  
È un'idea, un pensiero, un ciondolo, luce da indossare.  
La luce pulsante e le immagini personalizzabili  
rendono 35MM un progetto unico ed eccezionale.


# 35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

**Material** Metal - Polycarbonate  
**Finish** .00 Standard


**Note** Battery-operated wearable luminaire. Matt white front. Glossy black back. *Apparecchio illuminante da indossare a batteria. Fronte bianco opaco. Customised image not included. Intermittent light. Retro nero lucido. Immagine personalizzabile non inclusa. Luce intermittente.*



**35MM**  
0,3W  
ON/OFF  
Batteries 2xCR2032 included  
CE IP20

Standard - ON/OFF

|1A2640000.00.00 |

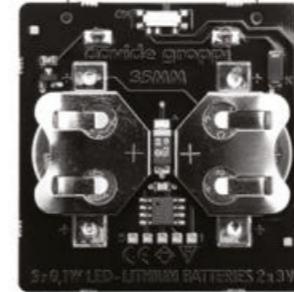

## BUGIA

Daide Groppi / 2018



A lightweight and soft light.  
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.

Una luce morbida e leggera.  
Una lampada pensata per godere di una meravigliosa luce diffusa  
senza il vincolo del cavo elettrico.


# BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

**Material** Metal - Methacrylate  
**Finish** .18 Matt Gold

**Note** Rechargeable table luminaire. Matt white diffuser. Gold finish base. *Apparecchio illuminante da tavolo a batteria ricaricabile. Diffusore bianco opaco. Base verniciata dorata. Autonomia della batteria: 9 ore.*



## BUGIA


2W  
3000K - 120lm  
CRI >90  
Driver with plug not included  
USB cable included  
ON/OFF  
CE IP20

Matt Gold - 3000K - ON/OFF

1A2351800.30.00

## Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132







Light\*Music\*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.

Light\*Music\*Wireless

Ideata per ottenere luce e musica in qualsiasi luogo ed in qualunque momento.

PoPuP permette di vivere un'esperienza musicale emozionante

grazie ad un suono ampio e dinamico.


Luce e suono sono utilizzabili separatamente.

Ascolta la luce.

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Rechargeable table luminaire and speaker. Magnetic fixing stem. *Apparecchio illuminante e diffusore audio da tavolo a batteria ricaricabile. Battery life: 12 hours light only and 30 hours audio only at medium volume. Stelo con fissaggio magnetico. Autonomia della batteria: 12 ore solo luce e 30 ore solo audio a medio volume.*

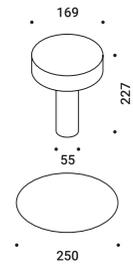

**PoPuP**


2W  
 3000K - 183lm  
 CRI >80  
 Driver with plug included  
 ON/OFF  
 5W Audio - 50-20000Hz  
 CE IP20

Matt White - 3000K - ON/OFF

1A2610300.30.00

**Optional accessories / Accessori opzionali**

Drivers / Alimentatori




**Driver with plug / Alimentatore con spina**

Included

Matt Black Input 110-240V - 50/60Hz  
 Output 10000mAh - 4,2-14V DC  
 18W - IP20  
 1Z1530030

Other accessories / Altri accessori



**Rechargeable battery / Batteria ricaricabile**

Included

Matt White 12V DC - NiMH 3700mAh  
 Battery life 12 hours light only and  
 30 hours audio only at medium volume  
 1A2620300.00.00





## POST PRANDIUM

Daide Groppi / 2023



During a meal with friends, a ladle is reused to scoop up the light  
and serve it onto the table.

A project from many years ago, today in a new wireless version.

**Archiproducts Design Award 2023**

Durante una cena tra amici, un mestolo è ri-utilizzato  
per raccogliere la luce e servirla al tavolo.

Un progetto di molti anni fa, oggi rieditato in versione wireless.

**Archiproducts Design Award 2023**


# POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .01 Polished Chrome

**Note** Rechargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours. *Apparecchio illuminante da tavolo a batteria ricaricabile. Dettagli con finitura oro lucido. Base nero opaco. Autonomia della batteria: 9 ore.*



**POST PRANDIUM**


2W  
 3000K - 171lm  
 CRI >90  
 Driver with plug not included  
 USB cable included  
 ON/OFF  
 CE IP20

Polished Chrome - 3000K - ON/OFF

| 1A4550100.30.00 |

**Optional accessories / Accessori opzionali**

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132





Al Gatto Verde Restaurant  
Modena





The light where you want it.

A unique suspension lamp with a rechargeable battery.  
The light source is applied magnetically to a metal dish that hangs from the ceiling  
using a very thin steel wire. The effect is delicately elegant.  
QuiQuoQua takes light where it is needed, without the limitation of electric wires.


La luce dove vuoi.

Un'inedita lampada a sospensione a batteria ricaricabile.  
La parte ottica è applicata magneticamente ad una parabola  
e sospesa attraverso un sottilissimo cavo in acciaio. L'effetto è delicatamente elegante.  
QuiQuoQua offre la possibilità di portare la luce dove si desidera  
senza il vincolo del cavo elettrico.

Suspension / Direct / Wireless

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Rechargeable suspension luminaire. Magnetic fixing LED module. *Apparecchio illuminante a sospensione a batteria ricaricabile. Matt white rose. AISI 304 stainless steel suspension cable. Modulo LED con fissaggio magnetico. Rosone bianco opaco. Battery life: 8 hours. Cavo di sospensione in inox AISI 304. Autonomia della batteria: 8 ore.*

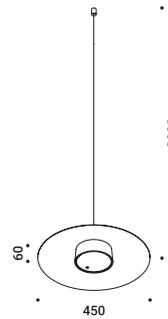

**QuiQuoQua**


5W  
 3000K - 345lm  
 CRI >80  
 Driver with plug included  
 ON/OFF  
 CE IP20

Matt White - 3000K - ON/OFF

1A2630300.30.00

**Optional accessories / Accessori opzionali**

LED modules / Moduli LED




LED module / Modulo LED		Included
Matt Black	5W - 3000K - 345lm - CRI >80 Rechargeable lithium battery 9V DC Li-Ion 5800mAh - Battery life 8 hours	1A0570400.30.00

Suspension kits / Kit di sospensione



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato		Not included
	Nickel plated - 1 Piece	1A0510000.00.00

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Included
Matt Black	Input 110-240V - 50/60Hz Output 9V DC - 3A - 30W - IP20	1Z1120710





A timeless icon with an eye on the future.  
Portable and rechargeable, the greatest expression of freedom.  
With TeTaTeT, every table becomes a meeting place, a complete dining experience.  
Its light caresses those it illuminates with pure emotion.  
Equipped with Touch technology and a magnetic fixing base.  
**Mention of Honour XXIV Compasso d'Oro ADI 2016**


Un'icona senza tempo, con lo sguardo rivolto al futuro.  
Portatile e ricaricabile, la massima espressione della libertà.  
Grazie a TeTaTeT, ogni tavola diventa un luogo d'incontro, ogni cena un'emozione.  
La sua luce accarezza i volti e amplifica le sensazioni.  
Dotata di accensione touch, il fissaggio alla base è magnetico.  
**Menzione d'Onore XXIV Compasso d'Oro ADI 2016**

Compasso d'Oro ADI  
Mention of Honour  
2016



Table / Direct / Wireless

<b>Material</b>	ABS - Metal - Methacrylate			
<b>Finish</b>	<b>.03</b> Matt White	<b>.18</b> Matt Gold	<b>.27</b> Gravity Black	<b>.30</b> Grey Blue
	<b>.31</b> Black Red	<b>.33</b> Black Green	<b>.35</b> Grey Green	<b>.40</b> Grey Beige
<b>Note</b>	Rechargeable table luminaire. Magnetic fixing stem. Touch ON/OFF. <i>Apparecchio illuminante da tavolo a batteria ricaricabile. Stelo con fissaggio magnetico. ON/OFF touch. Autonomia della batteria: 12 ore.</i>			




**TeTaTeT**

2W  
 2700K - 165lm / 3000K - 178lm  
 CRI >90  
 Driver with plug included  
 ON/OFF  
 CE IP20

Matt White - 2700K - ON/OFF	1A0310300.27.00
Matt White - 3000K - ON/OFF	1A0310300.30.00
Matt Gold - 2700K - ON/OFF	1A0311800.27.00
Matt Gold - 3000K - ON/OFF	1A0311800.30.00
Gravity Black - 2700K - ON/OFF	1A0312700.27.00
Gravity Black - 3000K - ON/OFF	1A0312700.30.00
Grey Blue - 2700K - ON/OFF	1A0313000.27.00
Grey Blue - 3000K - ON/OFF	1A0313000.30.00
Black Red - 2700K - ON/OFF	1A0313100.27.00
Black Red - 3000K - ON/OFF	1A0313100.30.00
Black Green - 2700K - ON/OFF	1A0313300.27.00
Black Green - 3000K - ON/OFF	1A0313300.30.00
Grey Green - 2700K - ON/OFF	1A0313500.27.00
Grey Green - 3000K - ON/OFF	1A0313500.30.00
Grey Beige - 2700K - ON/OFF	1A0314000.27.00
Grey Beige - 3000K - ON/OFF	1A0314000.30.00

**Optional accessories / Accessori opzionali**

**Drivers / Alimentatori**




<b>Driver with plug / Alimentatore con spina</b>		Included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073

**Other accessories / Altri accessori**



<b>Rechargeable battery / Batteria ricaricabile</b>		Included
Matt White	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0430300.00.00
Matt Gold	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0431800.00.00
Gravity Black	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0432700.00.00
Grey Blue	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433000.00.00
Black Red	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433100.00.00
Black Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433300.00.00
Grey Green	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0433500.00.00
Grey Beige	4,8V DC - NiMH 4300mAh Battery life 12 hours	1A0434000.00.00

<b>Table / Tavolino</b>		Not included
Matt White		1A4020300.00.00
Matt Black		1A4020400.00.00

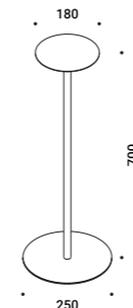





Matt White



Matt Gold



Gravity Black



Grey Blue



Black Red



Black Green




Grey Green



Grey Beige





Hosteria in Certosa Restaurant  
Venezia



Torre del Saracino Restaurant  
Vico Equense







## TeTaTeT Flûte

Davide Groppi / 2017

This is an evolution of our TeTaTeT lamp.  
The lamp head is lightweight and appears to be floating in air.  
The transparent stem brings to mind the glasses used in the classic "mise en place".  
Magnetic fixing base.

L'evoluzione del nostro modello TeTaTeT.  
La testa appare leggera e sospesa nel vuoto.  
Lo stelo trasparente evoca i bicchieri utilizzati nelle classiche "mise en place".  
Il fissaggio alla base è magnetico.


# TeTaTeT Flûte

Davide Groppi / 2017

Table / Direct / Wireless

**Material** ABS - Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Rechargeable table luminaire. Magnetic fixing transparent stem. Magnetic LED module. Battery life: 9 hours.  
*Apparecchio illuminante da tavolo a batteria ricaricabile. Stelo trasparente con fissaggio magnetico. Modulo LED con fissaggio magnetico. Autonomia della batteria: 9 ore.*



## TeTaTeT Flûte

2W  
 2700K - 167lm / 3000K - 180lm  
 CRI >90  
 Driver with plug not included  
 USB cable included  
 ON/OFF  
 CE IP20

Matt White - 2700K - ON/OFF  
 Matt White - 3000K - ON/OFF


1A2360300.27.00  
 1A2360300.30.00

# TeTaTeT Flûte

Davide Groppi / 2017

## Optional accessories / Accessori opzionali

### Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

### LED modules / Moduli LED



LED module / Modulo LED		Included
Matt White	2W - 2700K - 167lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.27.00
	2W - 3000K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5360300.30.00

### Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132



Table / Tavolino		Not included
Matt White		1A4020300.00.00
Matt Black		1A4020400.00.00



Identità Golose Milano Restaurant  
Milano







Vis à Vis is a magic trick, between technique and illusion.  
Once again, we decided to take away, seeking only the light.  
Transparency is the main feature of this battery-powered lamp.

**German Design Award 2025**

**Elle Deco International Design Award 2024**

**Archiproducts Design Award 2023**

Vis à Vis è un gioco di prestigio, tra la tecnica e l'illusione.  
Abbiamo pensato, ancora una volta, di togliere, cercando solo la luce.  
La trasparenza è la caratteristica principale di questa lampada a batteria.

**German Design Award 2025**

**Premio Elle Deco International Design 2024**

**Archiproducts Design Award 2023**


## VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

**Material** ABS - Methacrylate  
**Finish** .00 Standard

**Note** Rechargeable table luminaire. Transparent disc with refractive effect. *Apparecchio illuminante da tavolo a batteria ricaricabile. Disco trasparente con effetto rifrattivo. Stelo trasparente e modulo LED con fissaggio magnetico. Autonomia della batteria: 9 ore.*  
Magnetic fixing LED module and transparent stem. Battery life: 9 hours.



### VIS À VIS


2W  
2700K - 110lm / 3000K - 113lm  
CRI >90  
Driver with plug not included  
USB cable included  
ON/OFF  
CE IP20

Standard - 2700K - ON/OFF  
Standard - 3000K - ON/OFF

1A4530000.27.00  
1A4530000.30.00

### Optional accessories / Accessori opzionali

#### Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

#### LED modules / Moduli LED



LED module / Modulo LED		Included
Standard	2W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.27.00
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370000.30.00

#### Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132



Mies van der Rohe Pavilion  
Barcelona





**TABLE / TAVOLO**



Inspired by the shape of a traditional lampshade.  
The bulb is not shielded but displayed, and it peeks out from the shade.

Ispirata alla forma di un'abat-jour tradizionale.  
La lampadina non è schermata, ma esibita, e fa capolino dal paralume.

# ABA


Omar Carraglia / 2007

Table / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Table luminaire. Dimmer on the cable. White cable.

*Apparecchio illuminante da tavolo. Dimmer lungo il cavo. Cavo bianco.*



## ABA

Max 10W - E27  
100-240V - 50/60Hz  
Dimmer on board  
Bulb not included

CE IP20 0,5m

Matt White - Dimmer on board

| 1A2700300.00.06 |

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - G125

220-240V - 7W - 360°  
2700K - 806lm - CRI >80  
Energy Efficiency E - Dimmable

Not included

1Y2080010





## ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.

At the top, an open circle, almost a hook for fishermen of the soul.

**XXVIII Compasso d'Oro ADI Award 2024**

**AZ Award 2022**

**Archiproducts Design Award 2021**

Scultura filiforme, leggera, effimera, astratta, è un ideogramma senza peso. È l'emozione di una luce indiretta con un'estetica in bilico tra la Scandinavia e il Giappone, due culture apparentemente lontane, ma in realtà molto vicine tra loro.

In cima, un cerchio non chiuso, quasi un amo per pescatori d'anime.

**XXVIII Premio Compasso d'Oro ADI 2024**

**Premio AZ Award 2022**

**Premio Archiproducts Design Award 2021**


Compasso d'Oro ADI  
Award 2024



Table-Floor / Indirect / Indoor

**Material** ABS - Carbon fiber - Metal  
**Finish** .04 Matt Black

**Note** Table luminaire. Touch ON/OFF and adjustment. Black cable. *Apparecchio illuminante da tavolo. ON/OFF e regolazione touch. Cavo nero.*



**ANIMA**


4W  
 5V DC  
 2700K - 575lm / 3000K - 589lm  
 CRI >80  
 Driver with plug not included  
 USB cable included  
 Dimmer on board  
 CE IP20

Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A1090400.27.06  
 1A1090400.30.06

**Optional accessories / Accessori opzionali**

Drivers / Alimentatori




Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132



Power bank		Not included
	10000mAh/36Wh Output 5V DC Battery life 10 hours	1A1990000.00.00









**CALVINO**

Davide Groppi / 2018

Full and empty, shadow and light.  
A circular mirror to be positioned as you please,  
to both light and capture the surrounding space.  
**Born Series Award 2019**

Pieni e vuoti, ombra e luce.  
Uno specchio circolare può essere orientato a piacimento  
per illuminare e nello stesso tempo cogliere lo spazio circostante.  
**Premio Born Series Award 2019**


# CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor

**Material** Brass - Metal - Methacrylate - Mirror  
**Finish** .00 Standard

**Note** Table luminaire. Disc with mirror finish adjustable in all directions. *Apparecchio illuminante da tavolo. Disco con finitura a specchio orientabile in tutte le direzioni. Retro del disco blu opaco. Base nero opaco. Black cable.*  
*Stelo in ottone. Dimmer lungo il cavo. Cavo nero.*



## CALVINO

18W

24V DC

2700K - 1275lm / 3000K - 1372lm

CRI >90

Driver with plug included

Dimmer on board


CE IP20

Standard - 2700K - Dimmer on board  
 Standard - 3000K - Dimmer on board

1A2710000.27.06  
 1A2710000.30.06

## Optional accessories / Accessori opzionali

Drivers / Alimentatori




### Driver with plug / Alimentatore con spina

Included

Matt Black      Input 110-240V - 50/60Hz  
 Output 24V DC - 18W - IP20

1Z0431020

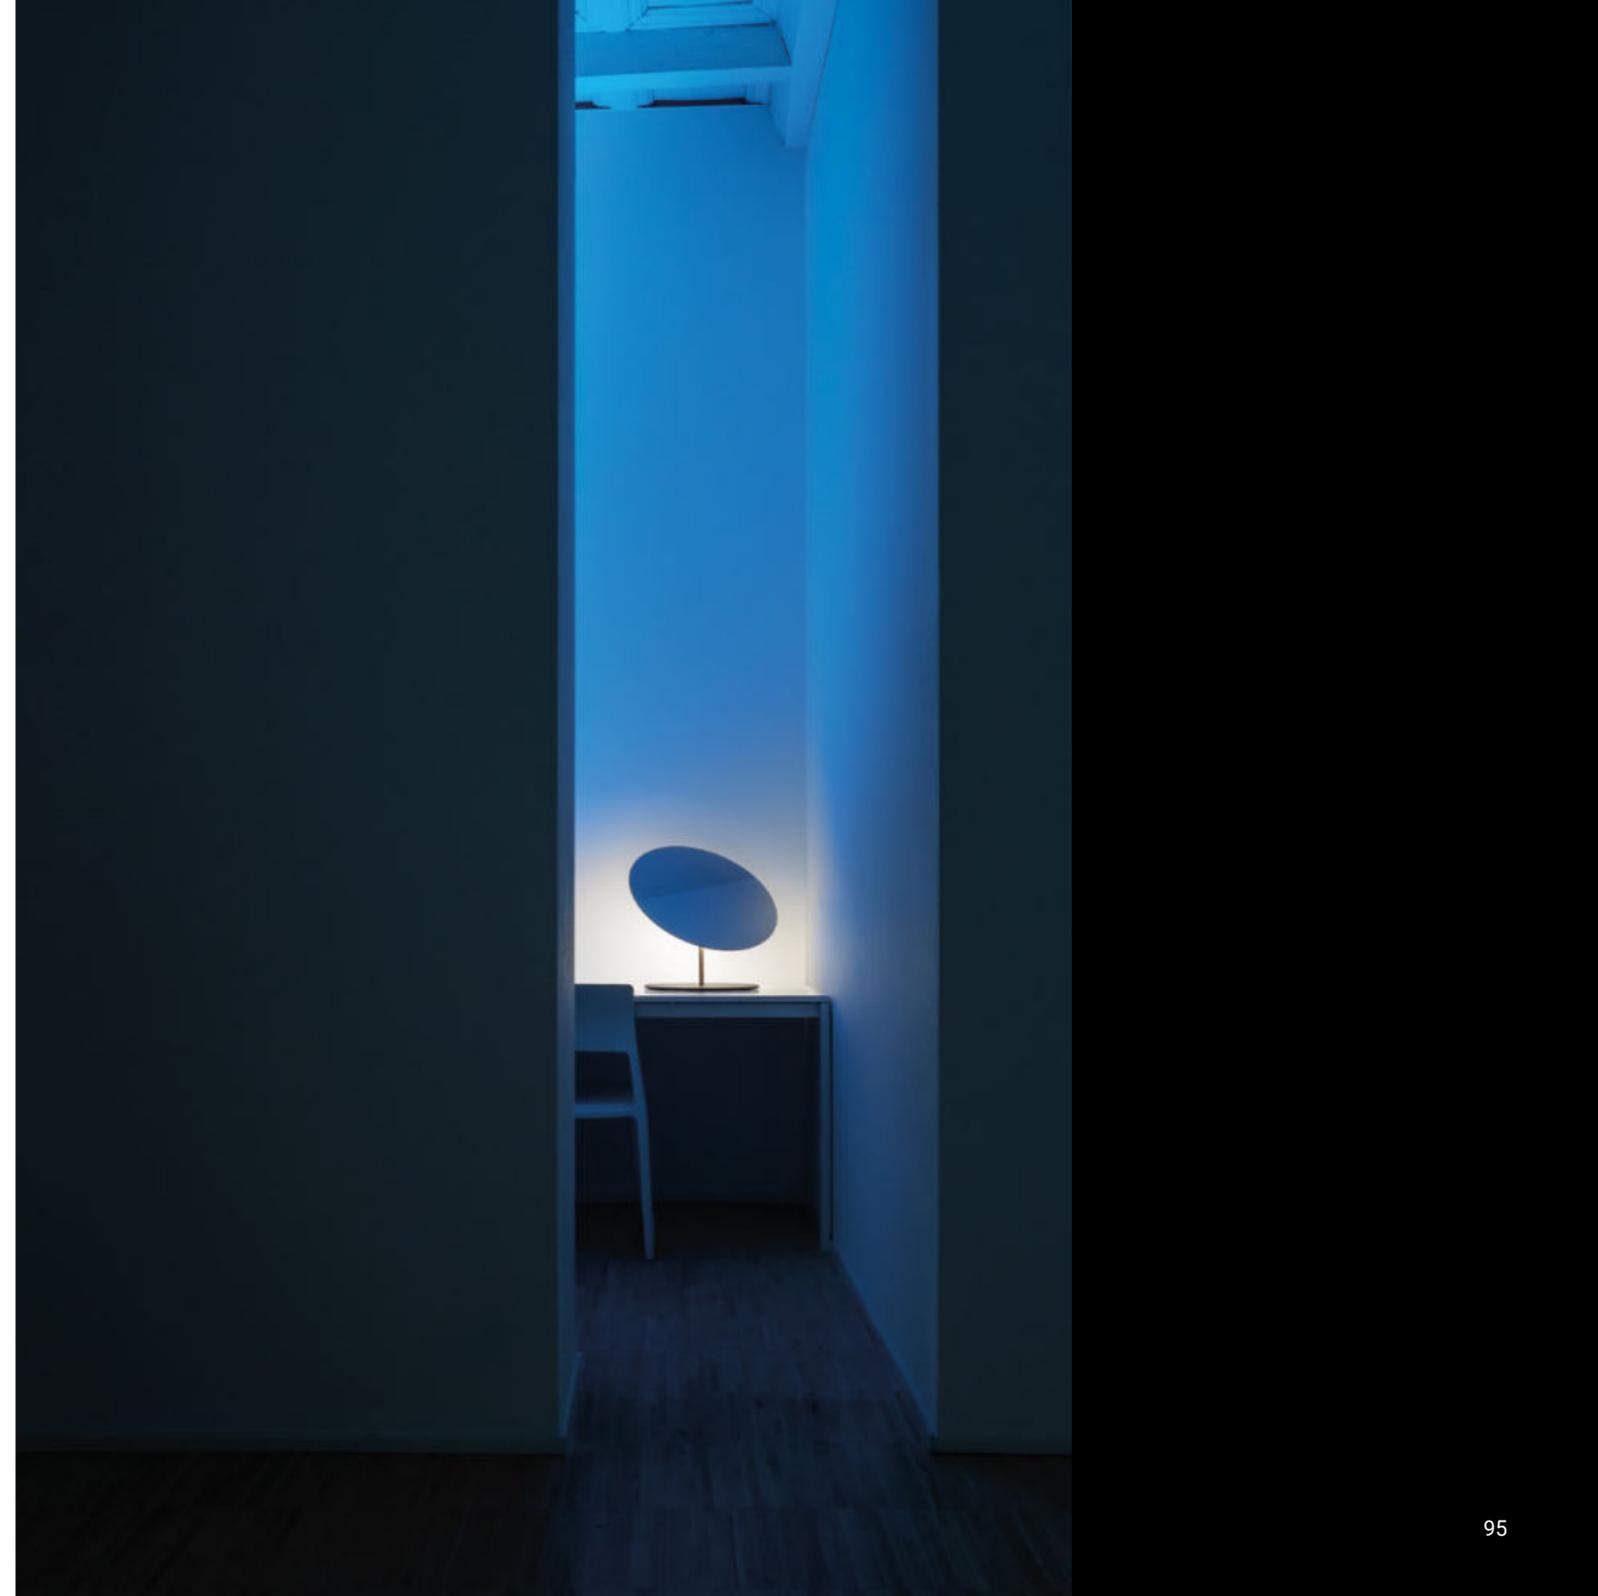



An antenna of light.

Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function.

A performing, adjustable and extremely comfortable light.

**Mention of Honour XXVIII Compasso d'Oro ADI 2024**  
**Archiproducts Design Award 2022**

Un'antenna di luce.

Le antenne sono misteriose, assolute e intrinsecamente belle perché esprimono, con la loro essenzialità, null'altro che la loro funzione.

Una luce prestante, orientabile ed estremamente confortevole.

**Menzione d'Onore XXVIII Compasso d'Oro ADI 2024**  
**Archiproducts Design Award 2022**


Compasso d'Oro ADI  
Mention of Honour  
2024



Table / Direct / Indoor

**Material** Carbon fiber - Metal  
**Finish** .04 Matt Black

**Note** Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable. *Apparecchio illuminante da tavolo. Orientabile lungo l'asse verticale. ON/OFF e regolazione push. Cavo nero.*

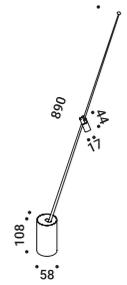


**FM**

1,5W  
 5V DC  
 2700K - 154lm / 3000K - 179lm  
 CRI >90  
 UGR <19  
 Driver with plug not included  
 USB cable included  
 Dimmer on board  
 CE IP20

Matt Black - 2700K - Dimmer on board	1A2440400.27.06
Matt Black - 3000K - Dimmer on board	1A2440400.30.06

**Optional accessories / Accessori opzionali**

Drivers / Alimentatori



<b>Driver with plug / Alimentatore con spina</b>		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



<b>USB to USB-C cable / Cavo da USB a USB-C</b>		Included
Matt Black	Length 1 m	1Z0000132



<b>Power bank</b>		Not included
	10000mAh/36Wh Output 5V DC Battery life 10 hours	1A1990000.00.00





Private Residence  
Amsterdam



## MOON T

Daide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and floor versions also available.

Moon nasce da un sogno, quello di portare la luna dentro casa.  
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.  
Disponibile anche nelle versioni a sospensione e da terra.

# MOON T


Davide Groppi / 2019

Table / Diffuse / Indoor

**Material** Japanese paper - Metal - PE  
**Finish** .00 Standard

**Note** Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.

*Apparecchio illuminante da tavolo. Paralume in PE e carta giapponese. Base verniciata dorata. Dimmer lungo il cavo. Cavo bianco. Sacco barriera obbligatorio per spedizioni aerea e via nave. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.*



## MOON T

Max 15W - E27  
100-240V - 50/60Hz  
Dimmer on board  
Bulb not included  
CE IP20

Standard - Dimmer on board

| 1A2690000.00.06 |

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



<b>LED - E27 - A60</b>	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories / Altri accessori

<b>Moisture barrier bag / Sacco barriera</b>	Not included
Packaging for air and sea shipping	4A2690010








A rigorous project in its design.  
A dialogue between two essential, concrete and tangible materials: wood and glass.  
Part frosted and part transparent, it moves feely on the base,  
functioning both as diffuser and convex lens.

Un progetto dalle linee rigorose.  
Un dialogo tra due materiali primari, concreti e tangibili: il legno e il vetro.  
Satinata e in parte trasparente, si muove liberamente sulla base,  
diventando a volte diffusore, a volte lente convessa.

Table / Diffuse / Indoor

**Material** Glass - Oak wood  
**Finish** .00 Standard

**Note** Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable. *Apparecchio illuminante da tavolo. Sfera in vetro sabbiato. Base in legno di rovere. Dimmer lungo il cavo. Cavo nero.*



**PIGRECO**


6,5W  
 24V DC  
 3000K - 450lm  
 CRI >90  
 Driver with plug included  
 Dimmer on board  
 CE IP20

Standard - 3000K - Dimmer on board

| 1A2600000.30.06 |

**Optional accessories / Accessori opzionali**

Drivers / Alimentatori



**Driver with plug / Alimentatore con spina**

Included

Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020
------------	--	-----------



## RIBBON

Maurici Ginés / 2024



The ribbon is a symbol of union and continuity.

The light reaches the table spontaneously,  
almost as if a continuation of the electric cable.

Ribbon is the result of research into simple and intuitive graphic gestures.

A project that brings light to the table, in a certain formal sense.

Il nastro è un simbolo di unione e di continuità.

La luce arriva sul tavolo con spontaneità, quasi come prosecuzione del cavo elettrico.

Ribbon è il risultato della ricerca di un gesto grafico, semplice e intuitivo.

Un progetto per portare la luce sul tavolo, con un certo senso formale.


# RIBBON

Maurici Ginés / 2024

Table / Direct / Indoor

**Material** Brass - Metal - Silicone  
**Finish** .04 Matt Black

**Note** Table luminaire. Adjustable in all directions. Touch ON/OFF and adjustment. Black cable. *Apparecchio illuminante da tavolo. Orientabile in tutte le direzioni. ON/OFF e regolazione touch. Cavo nero.*

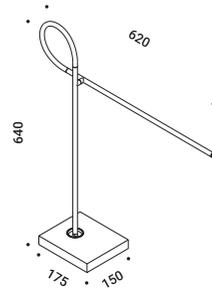

## RIBBON

6W  
 5V DC  
 2700K - 450lm / 3000K - 450lm  
 CRI >90  
 Driver with plug not included  
 USB cable included  
 Dimmer on board


CE IP20

Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A5850400.27.06  
 1A5850400.30.06

## Optional accessories / Accessori opzionali

Drivers / Alimentatori




Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories / Altri accessori



USB to USB-C cable / Cavo da USB a USB-C		Included
Matt Black	Length 1 m	1Z0000132



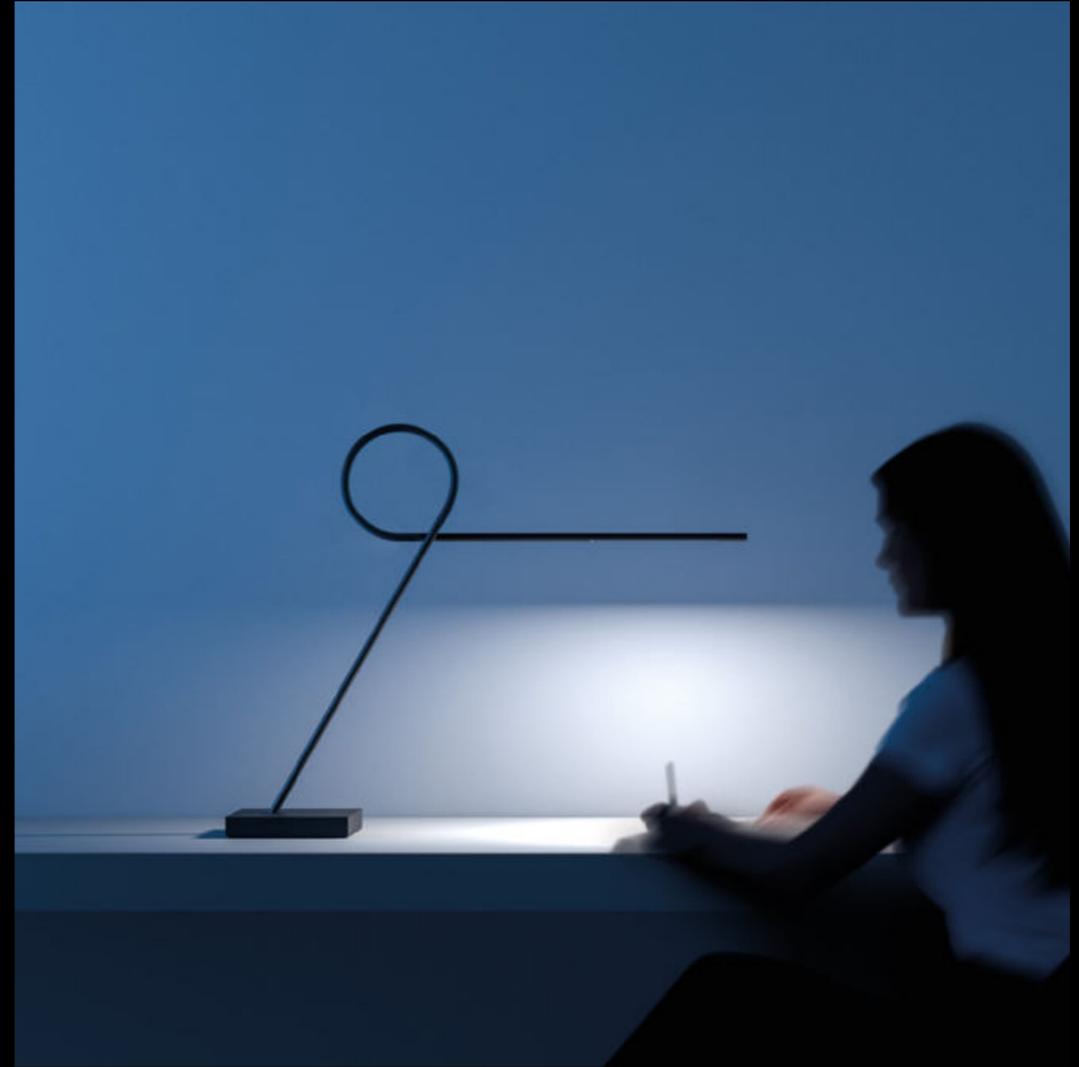

**FLOOR / TERRA**

## BANNER

Mauro Ferrari / 2004



A solution that is part fixed and part mobile.  
The lamp is fixed to the wall, but is powered by a cable and normal electrical plug.  
Banner is one of our many solutions for bringing light where you need it,  
with the greatest freedom.

Una soluzione fissa ma anche mobile.  
La lampada è fissata a parete, ma viene alimentata attraverso un cavo  
e una normale spina elettrica. Banner è una delle nostre tante soluzioni  
per portare la luce dove si desidera con la massima libertà.

# BANNER


Mauro Ferrari / 2004

Floor / Indirect / Indoor

**Material** Metal - Polycarbonate  
**Finish** .03 Matt White

**Note** Floor lamp with wall fixing. Connection cable not included.

*Apparecchio illuminante da terra con fissaggio a parete. Cavo di connessione non incluso.*



## BANNER

90W

110-240V - 50/60Hz

2700K - 11083lm / 3000K - 11918lm

CRI >80

Driver integrated

DALI


CE IP20

Matt White - 2700K - DALI

1A1840300.27.01

Matt White - 3000K - DALI

1A1840300.30.01



## BANNER

90W

110-240V - 50/60Hz

2700K - 11083lm / 3000K - 11918lm

CRI >80

Driver integrated

Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board

1A1840300.27.06

Matt White - 3000K - Dimmer on board

1A1840300.30.06



## HASHI

Federico Delrosso / 2017

A floor lamp conceived to provide direct light in a simple and flexible manner. Its principle component is the pivot point between two "chopsticks" (Hashi) that serve as light sources which, positioned in different ways, create a strong, graphic effect in space. Particular care has been given to the proportions. The sticks always appear lightweight and balanced.

Lampada da terra pensata per fare luce d'accento con purezza e flessibilità. La componente fondamentale di progetto è lo snodo che, grazie alla sua energica tenacia, permette di posizionare le "bacchette" (Hashi) nello spazio in modo grafico e deciso. La particolare attenzione per le proporzioni rende il gesto molto libero, ma sempre equilibrato.

# HASHI


Federico Delrosso / 2017

Floor / Direct / Indoor

Material Metal - Methacrylate

Finish .04 Matt Black .18 Matt Gold

Note Floor luminaire. Adjustable along the vertical axis. Dimmer on the cable. *Apparecchio illuminante da terra. Orientabile lungo l'asse verticale. Dimmer lungo il cavo. Cavo nero.*

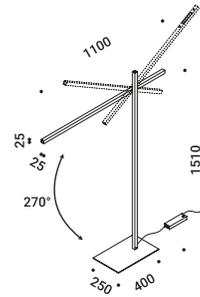

## HASHI

15,5W

110-240V - 50/60Hz

2700K - 765lm / 3000K - 823lm

CRI >90

UGR <19

Driver integrated

Dimmer on board

CE IP20

Matt Black - 2700K - Dimmer on board

Matt Black - 3000K - Dimmer on board

Matt Gold - 2700K - Dimmer on board

Matt Gold - 3000K - Dimmer on board

1A2510400.27.06

1A2510400.30.06

1A2511800.27.06

1A2511800.30.06








A tribute to Alberto Giacometti and to his thin fellows...  
A lamp for lighting pictures, powered by an ordinary electrical socket.  
The lamp has an adjustable light and it can be oriented.  
The lamp section is reduced to a minimum.

Un omaggio ad Alberto Giacometti e alle sue figure sottili...  
Una lampada per illuminare i quadri prendendo corrente da una normale presa elettrica.  
La lampada è regolabile in altezza ed il flusso luminoso orientabile.  
La sezione del corpo illuminante è ridotta ai minimi termini.

Floor-Suspension / Indirect / Indoor

**Material** Brass - Methacrylate  
**Finish** **.03** Matt White **.04** Matt Black **.08** Brushed Brass

**Note** Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver. *Apparecchio da terra con fissaggio a soffitto. Orientabile lungo l'asse verticale. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Dimmer lungo il cavo. Cavo trasparente. MASAI 2: versione con solo il cavo di alimentazione e senza driver.*

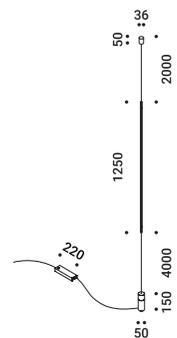


**MASAI 1**

Driver with plug version  
 15,5W  
 110-240V - 50/60Hz  
 2700K - 600lm / 3000K - 619lm  
 CRI >90  
 Driver integrated  
 Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board  
 Matt White - 3000K - Dimmer on board  
 Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board  
 Brushed Brass - 2700K - Dimmer on board  
 Brushed Brass - 3000K - Dimmer on board

1A2720300.27.06  
 1A2720300.30.06  
 1A2720400.27.06  
 1A2720400.30.06  
 1A2720800.27.06  
 1A2720800.30.06

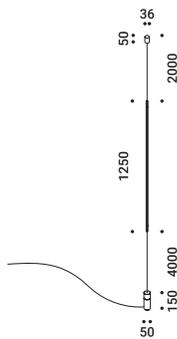

**MASAI 2**

Remote driver version  
 13W  
 24V DC - 50/60Hz  
 2700K - 600lm / 3000K - 619lm  
 CRI >90  
 Driver not included


CE IP20

Matt White - 2700K  
 Matt White - 3000K  
 Matt Black - 2700K  
 Matt Black - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K


1A2720300.27.20  
 1A2720300.30.20  
 1A2720400.27.20  
 1A2720400.30.20  
 1A2720800.27.20  
 1A2720800.30.20

**Compulsory accessories / Accessori obbligatori**


**Drivers / Alimentatori**



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	MASAI 2	1Z0241180.24	



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	MASAI 2	1Z0240870.24	



Driver / Alimentatore				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	MASAI 2	1Z0240850.24	

**Optional accessories / Accessori opzionali**

**Suspension kits / Kit di sospensione**




Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato			Not included
	Nickel plated - 1 Piece		1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.03.00




Ceiling suspension kit / Kit di sospensione da soffitto			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.03.00
Matt Black	For suspension cables - 1 Piece		1X0010400.03.00



Wall adapter plate / Piastra di adattamento da parete			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00



304 Stainless steel suspension cable / Cavo di sospensione in acciaio inox AISI 304			Not included
	Lenght 10 m		1A1680000.00.00

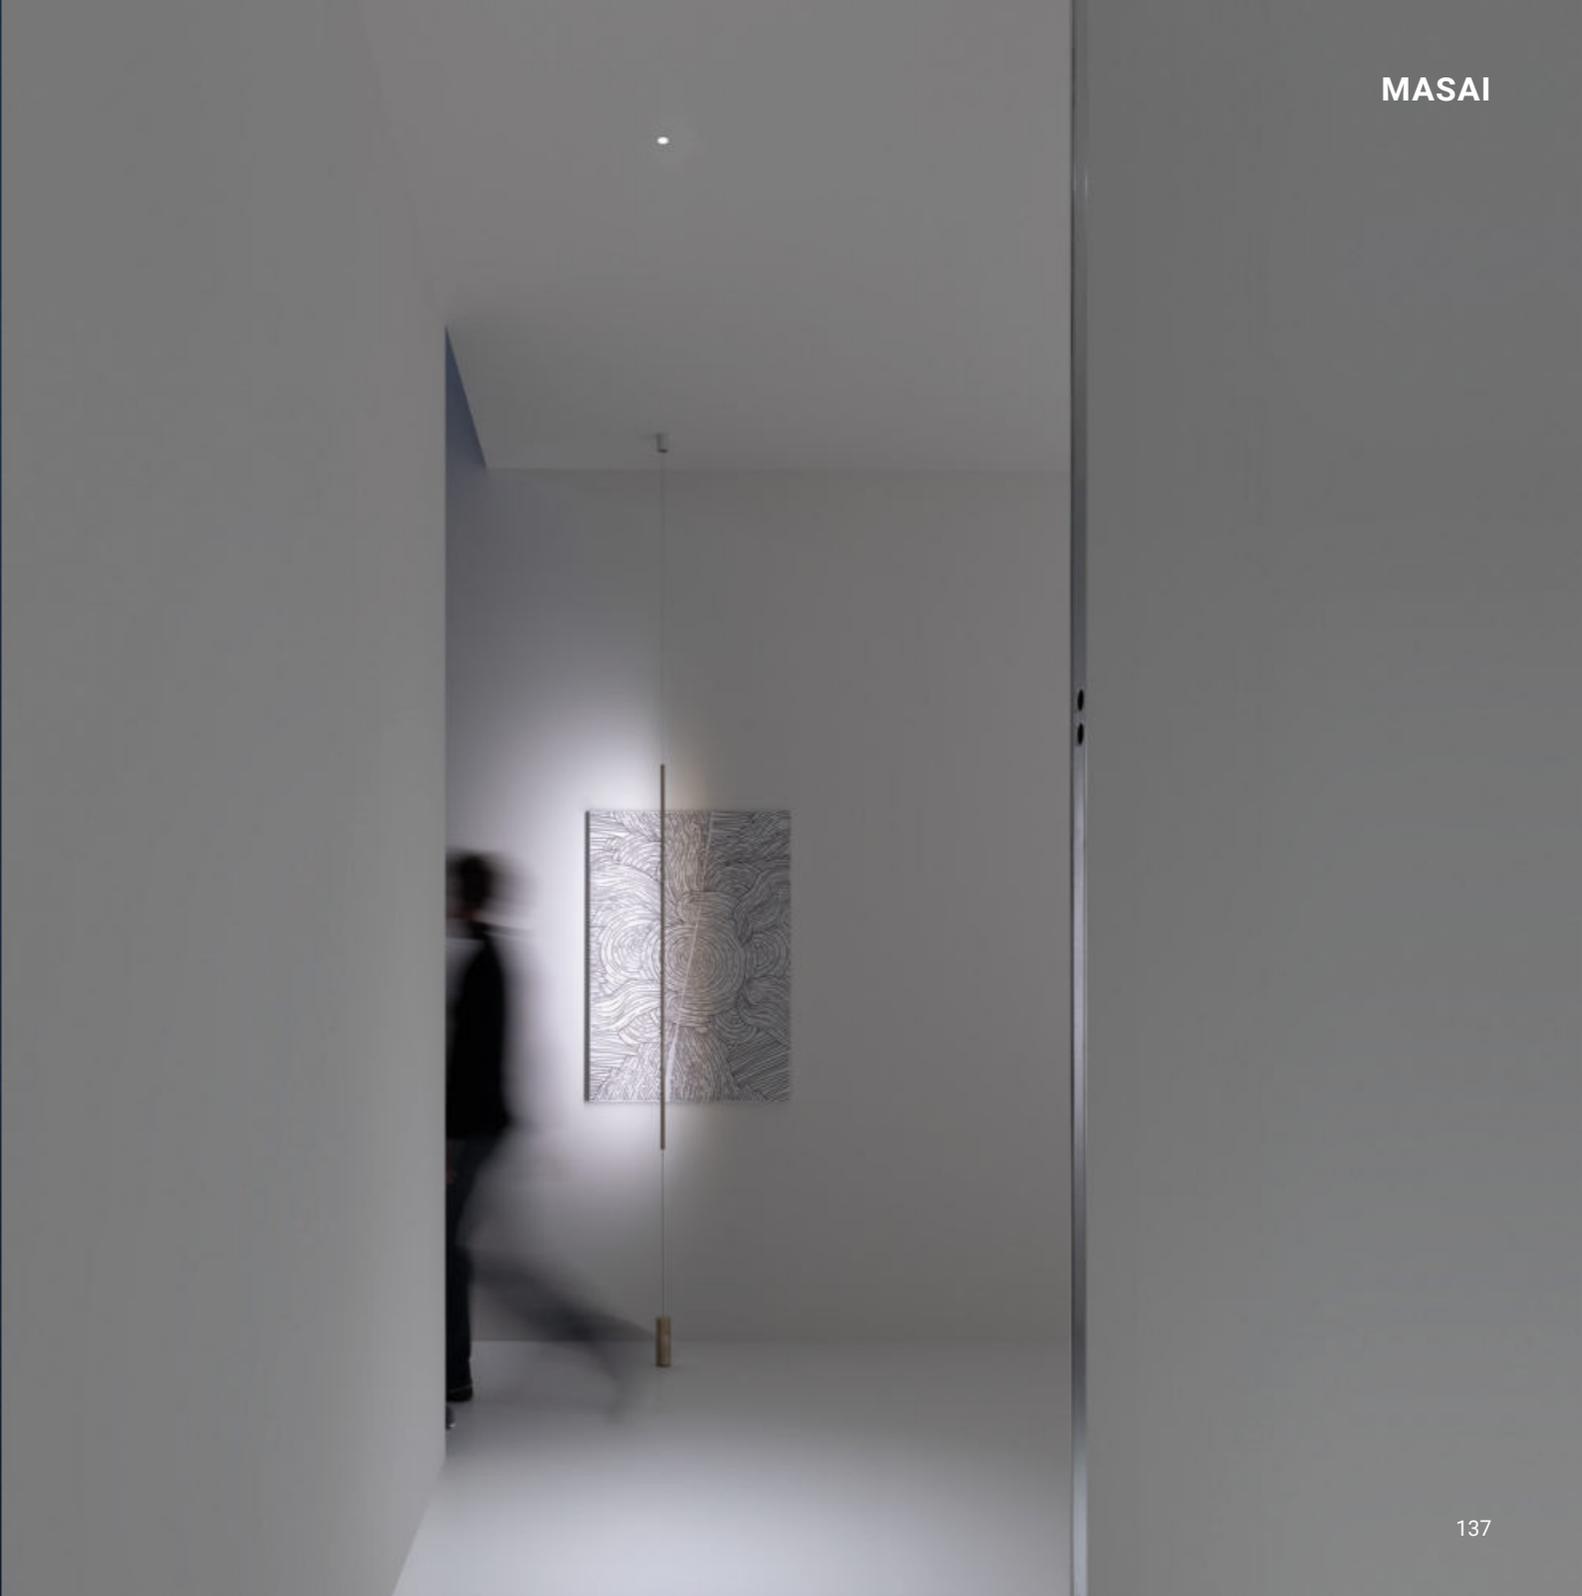




Marconi Restaurant  
Sasso Marconi

## MISTER

Omar Carraglia / 2013

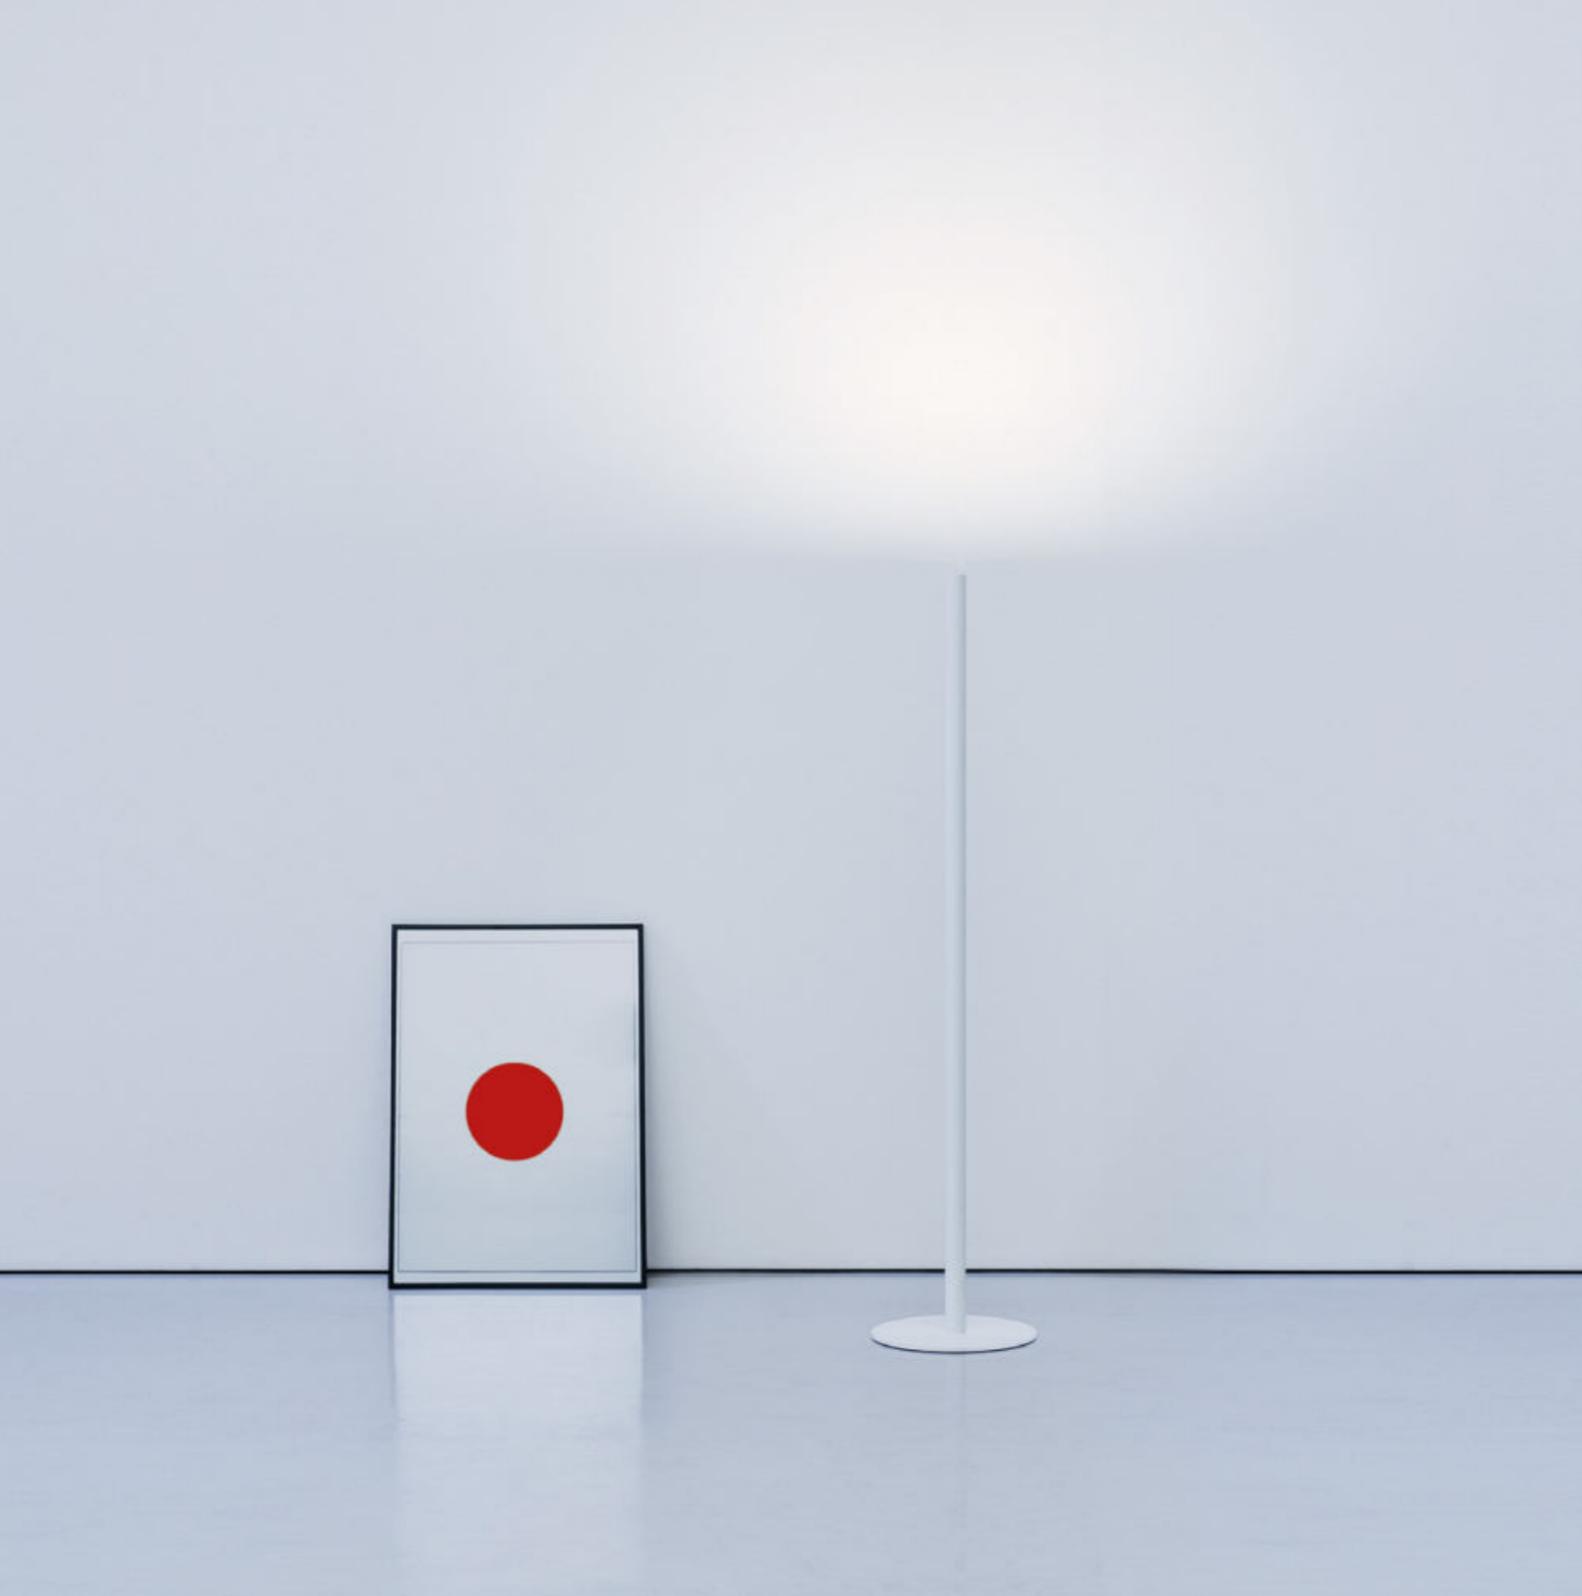

Portable light.

A floor tool to grant a wonderful indirect light in the purest possible way.

Luce mobile.

Un elemento da terra per garantire nel modo più puro possibile una meravigliosa luce indiretta.

# MISTER


Omar Carraglia / 2013

Floor / Indirect / Indoor

**Material** Metal - Methacrylate

**Finish** .03 Matt White .04 Matt Black

**Note** Floor luminaire. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish. *Apparecchio illuminante da terra. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per la finitura nero opaco.*

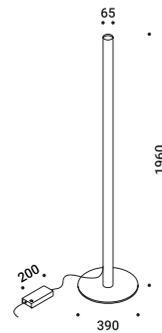

## MISTER

33W

110-240V - 50/60Hz

2700K - 2771lm / 3000K - 2884lm

CRI >90

Driver integrated

Dimmer on board

CE IP20

Matt White - 2700K - Dimmer on board

1A2750300.27.06

Matt White - 3000K - Dimmer on board

1A2750300.30.06

Matt Black - 2700K - Dimmer on board

1A2750400.27.06

Matt Black - 3000K - Dimmer on board

1A2750400.30.06





## MOON F

Daide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.  
The hand-made Japanese paper surface makes every lamp unique.  
Suspension and table versions also available.


Moon nasce da un sogno, quello di portare la luna dentro casa.  
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.  
Disponibile anche nelle versioni a sospensione e da tavolo.

Floor / Diffuse / Indoor

**Material** Japanese paper - PE  
**Finish** .00 Standard

**Note** Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag compulsory for all models and wooden crate compulsory for MOON 120 F model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.


*Apparecchio illuminante da terra. Paralume in PE e carta giapponese. Base bianco opaco. Dimmer lungo il cavo. Cavo bianco. Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per il modello MOON 120 F. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.*



**MOON 80 F**  
 Max 15W - E27  
 100-240V - 50/60Hz  
 Dimmer on board  
 Bulb not included  
 CE IP20

Standard - Dimmer on board

|1A4880000.00.06 |



**MOON 120 F**  
 Max 2x25W - E27  
 100-240V - 50/60Hz  
 Dimmer on board  
 Bulb not included  
 CE IP20

Standard - Dimmer on board

|1A4890000.00.06 |

**Optional accessories / Accessori opzionali**

**Bulbs / Lampadine**



<b>LED - E27 - A60</b>			Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790



<b>LED - E27 - A150</b>			Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020

**Other accessories / Altri accessori**

<b>Moisture barrier bag / Sacco barriera</b>			Not included
	Packaging for air and sea shipping	MOON 80 F	4A2840010

<b>Moisture barrier bag / Sacco barriera</b>			Not included
	Packaging for air and sea shipping	MOON 120 F	49860020

<b>Wooden crate / Cassa in legno</b>			Not included
	Packaging for air and sea shipping	MOON 120 F	49860010



## MOVIE

Omar Carraglia / 2005



To "play" with the light.  
A RGBW system lets you create all the light of the world.  
To feel the light and to live it in all its spectrum.

Per giocare con i colori della luce.  
Un sistema RGBW permette di creare tutta la luce del mondo.  
Per sentire la luce e viverla in tutto il suo spettro.

# MOVIE

Omar Carraglia / 2005


Floor / Indirect / Indoor

**Material** Metal - Polycarbonate

**Finish** .03 Matt White .13 Black Brushed Stainless Steel

**Note** Floor luminaire. RGBW wireless control. Black cable.

*Apparecchio illuminante da terra. RGBW wireless control. Cavo nero.*

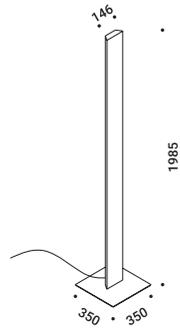

## MOVIE

80W

100-240V - 50/60Hz

2832lm

CRI >90

Driver integrated

Dimmer on board

RGBW wireless control

CE  IP20

Matt White - RGBW - Dimmer on board

1A2740300.98.06

Black Brushed Stainless Steel - RGBW - Dimmer on board

1A2741300.98.06



## ORIGINE

Davide Groppi - Giorgio Rava / 2020



From the Latin "origo", start, birth, source.  
It appears like a bud emerging from the ground and soaring upwards towards the sky,  
a stem that becomes increasingly thinner.

Mysterious and enigmatic, it combines the fascination of the unknown  
with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light,  
which is intentionally non-invasive, graphic and fascinating.

Available in 3 different heights and in an outdoor version.

**AZ Award 2021 and People's Choice  
Archiproducts Design Award 2020**

Dal latino "origo", inizio, nascita, fonte.

Evoca un germoglio che emerge dalla terra e si slancia verso il cielo,  
lo stelo che diventa sempre più sottile.

Misteriosa ed enigmatica, unisce il fascino dell'incognito  
al piacere di una luce d'ambiente sofisticata ed elegante.

Origine scolpisce e valorizza ogni ambiente con la sua luce indiretta,  
volutamente non invasiva, grafica e affascinante.

Disponibile in 3 altezze differenti e nella versione outdoor.


**Premio AZ Award 2021 e People's Choice  
Premio Archiproducts Design Award 2020**

Floor / Indirect / Indoor

**Material** Glass fiber - Metal  
**Finish** .04 Matt Black

**Note** Floor luminaire. Dimmer on the cable. Black cable.

*Apparecchio illuminante da terra. Dimmer lungo il cavo. Cavo nero.*

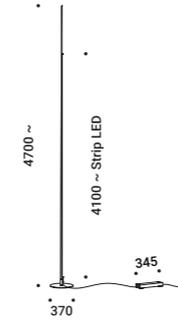

**ORIGINE 490**  
 35W  
 24V DC  
 2700K - 3760lm / 3000K - 4051lm  
 CRI >80  
 Driver included  
 Dimmer on board  
 CE IP20

Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2320400.27.06  
 1A2320400.30.06



**ORIGINE 290**  
 25W  
 24V DC  
 2700K - 1926lm / 3000K - 2075lm  
 CRI >80  
 Driver included  
 Dimmer on board  
 CE IP20

Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2300400.27.06  
 1A2300400.30.06



**ORIGINE 390**  
 30W  
 24V DC  
 2700K - 2843lm / 3000K - 3063lm  
 CRI >80  
 Driver included  
 Dimmer on board  
 CE IP20

Matt Black - 2700K - Dimmer on board  
 Matt Black - 3000K - Dimmer on board

1A2310400.27.06  
 1A2310400.30.06







The light is elevated to a work of art and contemplation.  
A luminous panel without a frame leans against the wall as if waiting to be hung.  
The colour and brightness can be controlled from the remote control.

La luce è elevata a oggetto d'arte e di contemplazione.  
Un pannello luminoso senza cornice è appoggiato alla parete  
come se aspettasse di essere appeso.  
È possibile scegliere il colore e l'intensità della luce agendo sul telecomando.


# PABLO

Davide Groppi / 2015

Floor / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .00 Standard

**Note** Floor luminaire. Matt white diffuser. RGB wireless control. Transparent cable. *Apparecchio illuminante da terra. Diffusore bianco opaco. RGB wireless control. Cavo trasparente.*

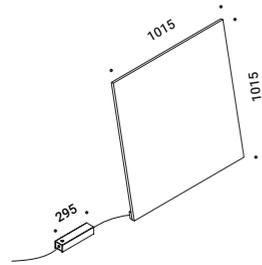

## PABLO

66W  
220-240V - 50/60Hz  
Driver integrated  
Dimmer on board  
RGB wireless control  
CE IP20

Standard - RGB - Dimmer on board

| 1A2730000.99.06 |





A piece of architecture to be used in space.  
A concrete cube that allows you to understand volumes  
and architecture in an unusual and unprecedented way.  
Outdoor version also available.


Un pezzo di architettura da utilizzare nello spazio.  
Un cubo realizzato in cemento che permette di interpretare i volumi  
e le architetture in modo inconsueto e inedito.  
Disponibile anche nella versione outdoor.

Floor / Direct / Indoor

Material Cement - Metal  
 Finish .00 Standard

Note Floor luminaire. Concrete body. Orange cable.

*Apparecchio illuminante da terra. Corpo in cemento. Cavo arancione.*



Q

Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Standard - ON/OFF

| 1A2760000.00.00 |

### Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU10 - PAR16

Not included

220-240V - 4,9W - 120°  
 3000K - 550lm - CRI >80  
 Energy Efficiency E

1Y0330740







A special project, an authentic ready-made.  
Obtained from a flexible fishing rod, it is a delicate and elegant sign,  
which brings to mind the subtle branches of a willow tree  
or bamboo canes floating on a light breeze.  
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,  
and being amazed by so much weightlessness.

The light is the fisherman's line, catching faces, gazes, people.  
Available in 4 different heights and also in an outdoor version.

**XXIII Compasso d'Oro ADI Award 2014**

**Elle Deco International Design Award 2011**

Un progetto speciale, un autentico ready-made.  
Ricavata da una canna da pesca flessibile, è un segno delicato ed elegante,  
che fa pensare a effimeri rami di salice, a canne di bambù mosse da un debole vento.

Sampei è un regalo inaspettato, è la magia di guardare in alto,  
usando la luce come amo, e stupirsi di tanta leggerezza.

La luce è la lenza del pescatore, pronta per catturare volti, sguardi, persone.  
Disponibile in 4 altezze differenti e anche nella versione outdoor.


**XXIII Premio Compasso d'Oro ADI 2014**

**Premio Elle Deco International Design Award 2011**

Floor / Direct / Indoor


<b>Material</b>	Glass fiber - Metal			
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.20</b> Magic Blue	<b>.37</b> Copper Brown
	<b>.41</b> Umbra Grey			

**Note** Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the other finishes. *Apparecchio illuminante da terra. Orientabile in tutte le direzioni. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per le altre finiture.*

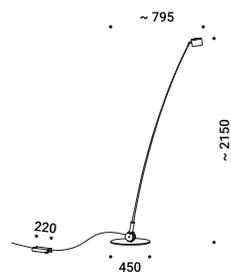


**SAMPEI 230**  
 Max 21W  
 220-240V - 50/60Hz  
 2700K - 1795lm / 3000K - 1890lm  
 CRI >90  
 Driver integrated  
 Dimmer on board  
**CE IP20**

Matt White - 2700K - Dimmer on board	1A3730300.27.06
Matt White - 3000K - Dimmer on board	1A3730300.30.06
Matt Black - 2700K - Dimmer on board	1A3730400.27.06
Matt Black - 3000K - Dimmer on board	1A3730400.30.06
Magic Blue - 2700K - Dimmer on board	1A3732000.27.06
Magic Blue - 3000K - Dimmer on board	1A3732000.30.06
Copper Brown - 2700K - Dimmer on board	1A3733700.27.06
Copper Brown - 3000K - Dimmer on board	1A3733700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3734100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3734100.30.06

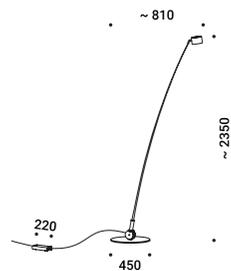


**SAMPEI 260**  
 Max 21W  
 220-240V - 50/60Hz  
 2700K - 1795lm / 3000K - 1890lm  
 CRI >90  
 Driver integrated  
 Dimmer on board  
**CE IP20**

Matt White - 2700K - Dimmer on board	1A3740300.27.06
Matt White - 3000K - Dimmer on board	1A3740300.30.06
Matt Black - 2700K - Dimmer on board	1A3740400.27.06
Matt Black - 3000K - Dimmer on board	1A3740400.30.06
Magic Blue - 2700K - Dimmer on board	1A3742000.27.06
Magic Blue - 3000K - Dimmer on board	1A3742000.30.06
Copper Brown - 2700K - Dimmer on board	1A3743700.27.06
Copper Brown - 3000K - Dimmer on board	1A3743700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3744100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3744100.30.06

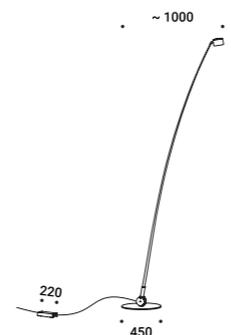

**SAMPEI 290**  
 Max 21W  
 220-240V - 50/60Hz  
 2700K - 1795lm / 3000K - 1890lm  
 CRI >90  
 Driver integrated  
 Dimmer on board  
**CE IP20**

Matt White - 2700K - Dimmer on board	1A3750300.27.06
Matt White - 3000K - Dimmer on board	1A3750300.30.06
Matt Black - 2700K - Dimmer on board	1A3750400.27.06
Matt Black - 3000K - Dimmer on board	1A3750400.30.06
Magic Blue - 2700K - Dimmer on board	1A3752000.27.06
Magic Blue - 3000K - Dimmer on board	1A3752000.30.06
Copper Brown - 2700K - Dimmer on board	1A3753700.27.06
Copper Brown - 3000K - Dimmer on board	1A3753700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3754100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3754100.30.06

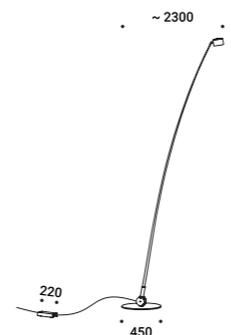

**SAMPEI 440**  
 Max 21W  
 220-240V - 50/60Hz  
 2700K - 1859lm / 3000K - 1943lm  
 CRI >90  
 Driver integrated  
 Dimmer on board  
**CE IP20**

Matt White - 2700K - Dimmer on board	1A3760300.27.06
Matt White - 3000K - Dimmer on board	1A3760300.30.06
Matt Black - 2700K - Dimmer on board	1A3760400.27.06
Matt Black - 3000K - Dimmer on board	1A3760400.30.06
Magic Blue - 2700K - Dimmer on board	1A3762000.27.06
Magic Blue - 3000K - Dimmer on board	1A3762000.30.06
Copper Brown - 2700K - Dimmer on board	1A3763700.27.06
Copper Brown - 3000K - Dimmer on board	1A3763700.30.06
Umbra Grey - 2700K - Dimmer on board	1A3764100.27.06
Umbra Grey - 3000K - Dimmer on board	1A3764100.30.06

**Optional accessories / Accessori opzionali**

Other accessories / Altri accessori



**Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape** Not included  
 Matt Black 1X0070400.04.00



**Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico** Not included  
 Matt Black 1X0070400.05.00



**Blue filter / Filtro blu** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.06.00



**Red filter / Filtro rosso** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.07.00



**Yellow filter / Filtro giallo** Not included  
 Standard Compulsory with  
1X0070400.04.00 / 1X0070400.05.00 1X0070000.08.00





Magic Blue

Copper Brown

Umbra Grey



## SHOJI

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.  
Outdoor version also available.

Un paralume in nylon rigorosamente cucito e confezionato a mano.  
Disponibile anche nella versione outdoor.

# SHOJI


Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Indoor

**Material** Metal - PBT - Polycarbonate

**Finish** .00 Standard

**Note** Floor luminaire. Hand-stitched shade. Matt black stems. Dimmer on the cable. Black cable. *Apparecchio illuminante da terra. Paralume cucito a mano. Steli nero opaco. Dimmer lungo il cavo. Cavo nero.*



## SHOJI

Max 18W - E27

100-240V - 50/60Hz

Dimmer on board

Bulb not included

CE IP20

Standard - Dimmer on board

| 1A2780000.00.06 |

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - E27 - A60

220-240V - 11,2W - 360°  
2700K - 1521lm - CRI >90  
Energy Efficiency D - Dimmable

1Y0330790

Not included





## STOP

Davide Groppi / 2024

Technology has allowed us to rethink the classic floor lamp,  
seeking the essence of its function.

A base, a stem, a head, STOP.

A circle in space, an ideographic project in which idea becomes form and function.

The disc can be oriented, while the luminous flux is extremely generous.

**Archiproducts Design Award 2024**

La tecnologia ci ha permesso di ripensare alla classica lampada da terra  
cercando l'essenza della sua funzione.

Una base, uno stelo, una testa, STOP.

Un cerchio nello spazio, un progetto ideografico in cui l'idea diventa forma e funzione.

Il disco è orientabile e il flusso luminoso estremamente generoso.

**Archiproducts Design Award 2024**


# STOP

Davide Groppi / 2024

Floor / Indirect / Indoor

**Material** Brass - Metal  
**Finish** .01 Polished Chrome .19 Polished Gold

**Note** Floor luminaire. Adjustable Gravity Black matt black head. Matt black base. Dimmer on the cable. Black cable. *Apparecchio illuminante da terra. Testa orientabile nero opaco Gravity Black. Base nero opaco. Dimmer lungo il cavo. Cavo nero.*

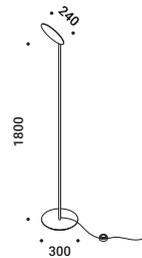

## STOP


28W  
 24V DC  
 2700K - 3335lm / 3000K - 3500lm  
 CRI >90  
 Driver with plug included  
 Dimmer on board

CE IP20

Polished Chrome - 2700K - Dimmer on board	1A4760100.27.06
Polished Chrome - 3000K - Dimmer on board	1A4760100.30.06
Polished Gold - 2700K - Dimmer on board	1A4761900.27.06
Polished Gold - 3000K - Dimmer on board	1A4761900.30.06

## Optional accessories / Accessori opzionali

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Included
Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 36W - IP20	1Z0431300





Mies van der Rohe Pavilion  
Barcelona



**SUSPENSION / SOSPENSIONE**



## CARTESIO

Davide Groppi / 2018

**A thin, circular mirror is suspended to provide light,  
combining both direct and indirect lighting.  
A sophisticated clamping system is used to position the disc wherever you want,  
without the need for wall or ceiling wires.**

Uno specchio circolare sospeso e sottile per illuminare,  
coniugando la luce diretta e quella indiretta.  
Il sofisticato sistema di fissaggio permette di posizionare il disco dove si desidera  
senza il vincolo della posizione dei cavi di alimentazione a soffitto o a parete.

# CARTESIO


Davide Groppi / 2018

Suspension / Direct-Indirect / Indoor

Material Metal - Methacrylate

Finish .00 Standard

Note Suspension luminaire. Disc with mirror finish. Matt red rear disc. *Apparecchio illuminante a sospensione. Disco con finitura a specchio. Retro del disco rosso opaco. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Doppia emissione. Cavo bianco.*  
Matt white rose. AISI 304 stainless steel suspension cables.

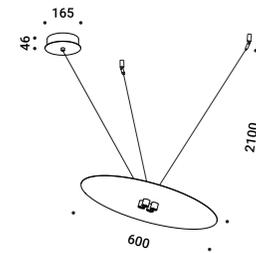

## CARTESIO 60

19W

110-240V - 50/60Hz

3000K - Down 350lm - Up 1050lm

CRI >80 / >90


Driver integrated

PUSH

CE IP20

Standard - 3000K - PUSH

| 1A3190000.30.04 |

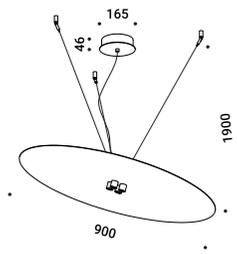

## CARTESIO 90

19W

110-240V - 50/60Hz

3000K - Down 350lm - Up 1050lm

CRI >80 / >90


Driver integrated

PUSH

CE IP20

Standard - 3000K - PUSH

| 1A0070000.30.04 |

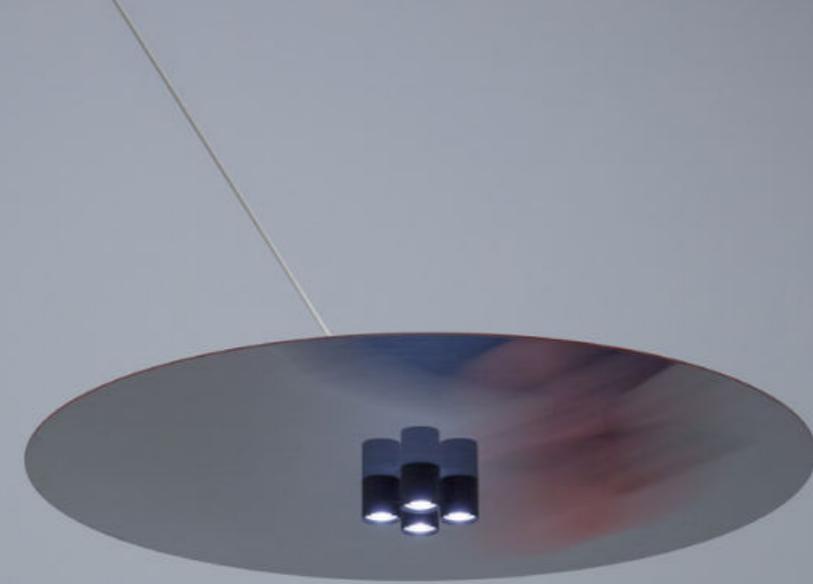



## CATHODE

Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.  
The shape brings to mind a light bulb that was never born.  
Think steampunk: situations in which instruments were inspired by  
the rudiments of electricity. The classic light bulb that has no future  
becomes a wonderful device made of luminous diodes.  
What would the past have looked like if the future had arrived first?  
Luminaire available also in ENDLESS version.

Un'ampolla di vetro soffiato a bocca dall'aspetto scientifico.  
La forma evoca quella di una lampadina mai nata, atmosfere steampunk,  
situazioni in cui le strumentazioni erano attivate dalle prime forme di elettricità.  
La classica lampadina senza più futuro diventa un apparecchio a diodi luminosi.  
Come sarebbe stato il passato se il futuro fosse arrivato prima?  
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Suspension / Diffuse / Indoor

**Material** Blown glass - Metal  
**Finish** **.03** Matt White **.08** Brushed Brass **.28** Polished Black Chrome

**Note** Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. CATHODE 2: version with power cable only and without rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante a sospensione. Diffusore in vetro soffiato. Rosone bianco opaco e cavo bianco per la finitura bianco opaco. Rosone nero opaco e cavo nero per le altre finiture. Rosone unico per più apparecchi su richiesta. CATHODE 2: versione con solo il cavo di alimentazione e senza rosone. CATHODE ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*



**CATHODE 1**

Ceiling driver version  
 5,6W  
 100-240V - 50/60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 ON/OFF

CE IP20

Matt White - 2700K - ON/OFF  
 Matt White - 3000K - ON/OFF  
 Brushed Brass - 2700K - ON/OFF  
 Brushed Brass - 3000K - ON/OFF  
 Polished Black Chrome - 2700K - ON/OFF  
 Polished Black Chrome - 3000K - ON/OFF

1A2980300.27.00  
 1A2980300.30.00  
 1A2980800.27.00  
 1A2980800.30.00  
 1A2982800.27.00  
 1A2982800.30.00



**CATHODE 1**

Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 DALI

CE IP20

Matt White - 2700K - DALI  
 Matt White - 3000K - DALI  
 Brushed Brass - 2700K - DALI  
 Brushed Brass - 3000K - DALI  
 Polished Black Chrome - 2700K - DALI  
 Polished Black Chrome - 3000K - DALI

1A2980300.27.01  
 1A2980300.30.01  
 1A2980800.27.01  
 1A2980800.30.01  
 1A2982800.27.01  
 1A2982800.30.01



**CATHODE 1**

Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 PUSH

CE IP20

Matt White - 2700K - PUSH  
 Matt White - 3000K - PUSH  
 Brushed Brass - 2700K - PUSH  
 Brushed Brass - 3000K - PUSH  
 Polished Black Chrome - 2700K - PUSH  
 Polished Black Chrome - 3000K - PUSH

1A2980300.27.04  
 1A2980300.30.04  
 1A2980800.27.04  
 1A2980800.30.04  
 1A2982800.27.04  
 1A2982800.30.04



**CATHODE 1**

Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 1-10V

CE IP20

Matt White - 2700K - 1-10V  
 Matt White - 3000K - 1-10V  
 Brushed Brass - 2700K - 1-10V  
 Brushed Brass - 3000K - 1-10V  
 Polished Black Chrome - 2700K - 1-10V  
 Polished Black Chrome - 3000K - 1-10V

1A2980300.27.03  
 1A2980300.30.03  
 1A2980800.27.03  
 1A2980800.30.03  
 1A2982800.27.03  
 1A2982800.30.03




**CATHODE 1**

Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 264lm / 3000K - 284lm  
 CRI >90  
 Driver integrated  
 TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT  
 Matt White - 3000K - TRIAC/IGBT  
 Brushed Brass - 2700K - TRIAC/IGBT  
 Brushed Brass - 3000K - TRIAC/IGBT  
 Polished Black Chrome - 2700K - TRIAC/IGBT  
 Polished Black Chrome - 3000K - TRIAC/IGBT

1A2980300.27.02  
 1A2980300.30.02  
 1A2980800.27.02  
 1A2980800.30.02  
 1A2982800.27.02  
 1A2982800.30.02

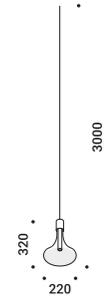


**CATHODE 2**

Remote driver version  
4W  
Max 350mA DC  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver not included



Matt White - 2700K  
Matt White - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A2980300.27.20  
1A2980300.30.20  
1A2980800.27.20  
1A2980800.30.20  
1A2982800.27.20  
1A2982800.30.20

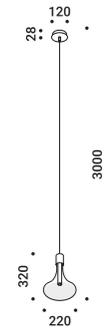

**CATHODE ENDLESS**

ENDLESS version only  
6,3W - 0,16A  
48V DC  
2700K - 264lm / 3000K - 284lm  
CRI >90  
Driver not included  
See page ENDLESS




Matt White - 2700K  
Matt White - 3000K  
Brushed Brass - 2700K  
Brushed Brass - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K


1A2980300.27.40  
1A2980300.30.40  
1A2980800.27.40  
1A2980800.30.40  
1A2982800.27.40  
1A2982800.30.40

**Compulsory accessories / Accessori obbligatori**


**Drivers / Alimentatori**



Driver / Alimentatore			Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0241180.350




Driver / Alimentatore			Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	CATHODE 2	1Z0240870.350




Driver / Alimentatore			Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	CATHODE 2	1Z0240850.350

**Optional accessories / Accessori opzionali**

**Suspension kits / Kit di sospensione**




Decentralization kit / Kit decentratore		Not included	
	CATHODE 1		1A0360000.00.00




Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included	
Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000300.06.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	CATHODE 2	1X0000400.06.00



Ceiling suspension kit / Kit di sospensione da soffitto		Not included	
Matt White	For electrical cables - 1 Piece	CATHODE 2	1X0010300.06.00
Matt Black	For electrical cables - 1 Piece	CATHODE 2	1X0010400.06.00



Wall adapter plate / Piastra di adattamento da parete		Not included	
Matt White	For mounting on brick masonry walls	CATHODE 2	1X0050300.01.00





## FOSBURY

Davide Groppi / 2014



A lamp that interprets the classic theme of decentralization.  
An acrobatic and apparently precarious presence, bringing light where you prefer it,  
starting from a simple wall socket.  
**AZ Award 2016**

Una lampada che interpreta il classico tema del decentramento.  
Una presenza funambolica e apparentemente instabile per portare la luce  
dove si desidera partendo da una semplice presa elettrica.  
**Premio AZ Award 2016**


# FOSBURY

Davide Groppi / 2014

Suspension / Direct-Indirect / Indoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Suspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable. *Apparecchio illuminante a sospensione con appoggio a terra. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Doppia emissione. Luce indiretta blu. Cavo trasparente.*

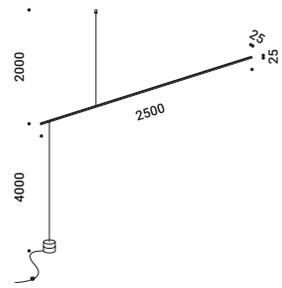

## FOSBURY

23W  
220-240V - 50/60Hz  
2700K - Down 765lm - Up 59lm /  
3000K - Down 823lm - Up 59lm  
CRI >90  
UGR <19  
Driver integrated  
ON/OFF  
CE IP20

Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF

1A2590400.27.00  
1A2590400.30.00

## Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato

Not included

Nickel plated - 1 Piece

1A0510000.00.00





## LED IS MORE

Daide Groppi / 2011


A tribute to Mies van der Rohe and his Less is More.  
The project represents a light icon in a LED key,  
with a peculiar attention to energy savings and the quality of light.

Un omaggio a Mies van der Rohe e al suo Less is More.  
Il progetto rappresenta un'icona della luce, rivisitata in chiave LED,  
con una particolare attenzione al risparmio energetico e alla qualità della luce stessa.

Suspension / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White

**Note** Suspension luminaire. Sanded methacrylate diffuser. Matt white rose. White cable. Single rose for more than one lamp on request. LED IS MORE 2: version with power cable only and without rose. *Apparecchio illuminante a sospensione. Diffusore in metacrilato sabbiato. Rosonebiancoopaco.Cavobianco.Rosoneunicoperpiùapparechisurichiesta. LED IS MORE 2: versione con solo il cavo di alimentazione e senza rosone.*



**LED IS MORE 1**

Ceiling driver version  
 5,6W  
 100-240V - 50/60Hz  
 3000K - 354lm  
 CRI >90  
 Driver integrated  
 ON/OFF  
**CE IP20**

Matt White - 3000K - ON/OFF

| 1A2790300.30.00 |



**LED IS MORE 2**


Remote driver version  
 4W  
 Max 350mA DC  
 3000K - 354lm  
 CRI >90  
 Driver not included  
**CE IP20**

Matt White - 3000K


| 1A2790300.30.20 |

**Compulsory accessories / Accessori obbligatori**


Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	LED IS MORE 2	1Z0241180.350	




Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	LED IS MORE 2	1Z0240870.350	



Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	LED IS MORE 2	1Z0240850.350	

**Optional accessories / Accessori opzionali**


Suspension kits / Kit di sospensione




Decentralization kit / Kit decentratore			Not included
	LED IS MORE 1	1A0360000.00.00	




Kit ceiling rose and decentralizer / Kit rosone e decentratore				Not included
Matt White	White cable 3 m included	LED IS MORE 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	LED IS MORE 1	1A0770400.00.00	



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000300.06.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LED IS MORE 2	1X0000400.06.00	



Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For electrical cables - 1 Piece	LED IS MORE 2	1X0010300.06.00	
Matt Black	For electrical cables - 1 Piece	LED IS MORE 2	1X0010400.06.00	



Wall adapter plate / Piastra di adattamento da parete				Not included
Matt White	For mounting on brick masonry walls	LED IS MORE 2	1X0050300.01.00	

## LOUIS XIV

Daide Groppi / 2023




Louis XIV is the freakiest letter of our light alphabet.  
It's a disobedient design that translates a certain rebellion  
to common lamp models into light.  
I wanted to investigate the idea of the chandelier: in line with our poetics,  
Louis XIV is the only possible solution for lightness and irony.  
Dimmable suspension lamp with dual emission.

Louis XIV è la lettera più "freak" del nostro alfabeto luminoso.  
È un progetto disobbediente, che traduce in luce  
una certa ribellione ai modelli comuni di fare lampade.  
Volevo affrontare il tema del lampadario a gocce:  
Louis XIV è l'unica soluzione possibile, secondo le nostre poetiche, tra leggerezza e ironia.  
Lampada a sospensione dimmerabile a doppia emissione.

Suspension / Direct-Indirect / Indoor

**Material** Glass - Metal  
**Finish** .19 Polished Gold

**Note** Suspension luminaire. Seventy-five crystal drops and two birds. *Apparecchio illuminante a sospensione. Settantacinque gocce in cristallo e due uccellini. Rami in ottone naturale. Struttura con finitura oro lucido. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.*  
*Rosone bianco opaco. Doppia emissione ed accensione. Cavo bianco. LOUIS XIV 2: versione con solo il cavo di alimentazione e senza rosone.*

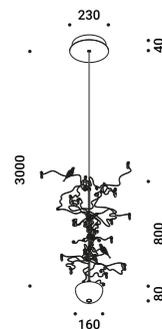


**LOUIS XIV 1**

Ceiling driver version  
 17W  
 220-240V - 50/60Hz  
 2700K - Up 842lm - Down 198lm /  
 3000K - Up 842lm - Down 198lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 TRIAC/IGBT  
 CE IP20

Polished Gold - 2700K - TRIAC/IGBT  
 Polished Gold - 3000K - TRIAC/IGBT

1A4361900.27.02  
 1A4361900.30.02

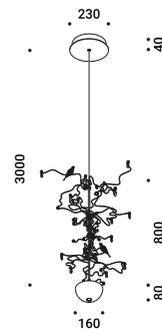


**LOUIS XIV 1**

Ceiling driver version  
 18W  
 110-240V - 50/60Hz  
 2700K - Up 842lm - Down 198lm /  
 3000K - Up 842lm - Down 198lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 DALI - PUSH - 1-10V  
 CE IP20

Polished Gold - 2700K - DALI - PUSH - 1-10V  
 Polished Gold - 3000K - DALI - PUSH - 1-10V

1A4361900.27.07  
 1A4361900.30.07

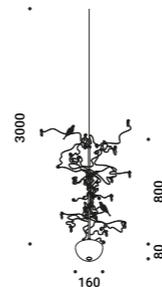

**LOUIS XIV 2**

Remote driver version  
 14W  
 Max 250mA DC  
 2700K - Up 842lm - Down 198lm /  
 3000K - Up 842lm - Down 198lm  
 CRI >90  
 UGR <19  
 Driver not included  
 2 Drivers required


Polished Gold - 2700K  
 Polished Gold - 3000K

1A4361900.27.20  
 1A4361900.30.20



**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori

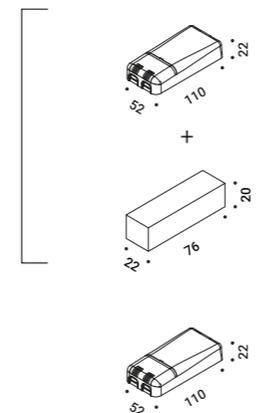


Driver for uplight emission / Alimentatore per emissione uplight				Not included
220-240V	250mA/12,5W/IP20/TRIAC/IGBT	LOUIS XIV 2	1Z0241280	

Driver for downlight emission / Alimentatore per emissione downlight				Not included
100-277	250mA/3W/IP20/TRIAC/IGBT	LOUIS XIV 2	1Z0400900	

Driver / Alimentatore				Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH - 1-10V	LOUIS XIV 2	1Z0241270.250	

**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000300.05.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	LOUIS XIV 2	1X0000400.05.00	



LOUIS XIV





Light and transparency are the true stars of this project.  
We have always liked to think heretically, evoking mystery, magic and seduction.  
Magia is a modular suspension lighting system for indirect light  
that can be adapted to suit different heights of the rooms.  
In this case, the lens is not used to focus,  
but to modify the vision and perception of the object.  
The effect of the convex lens conceals the part of the light beam  
and produces the lightest effect of suspension and inconsistency.  
Luminaire designed also to be powered by ENDLESS conductive tape.


**Archiproducts Design Award 2023**

La luce e la trasparenza sono le vere protagoniste di questo progetto.  
Da sempre ci piace pensare in modo eretico, evocando mistero, magia e seduzione.  
Magia è un sistema d'illuminazione a luce indiretta e a sospensione,  
componibile e adattabile a seconda delle diverse altezze degli ambienti.


In questo caso, la lente non è usata per focalizzare,  
ma per modificare la visione e la percezione dell'oggetto.  
L'effetto della lente convessa permette di celare la parte di emissione della luce  
e produrre un leggerissimo effetto di sospensione e inconsistenza.  
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

**Archiproducts Design Award 2023**


Single installation  
with ceiling driver

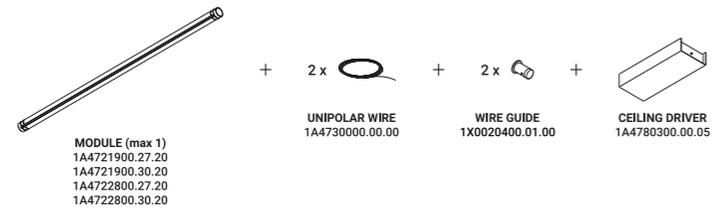


Multiple installation  
with ceiling driver

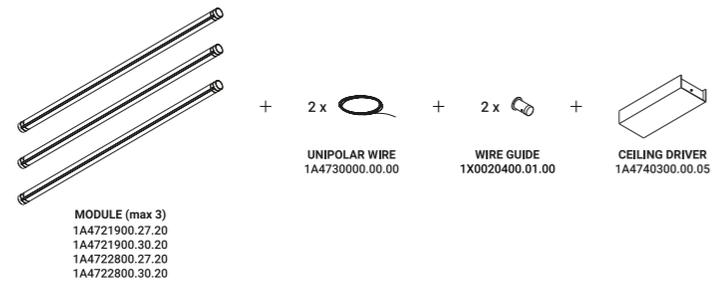

Single installation  
with recessed or ceiling  
suspension kit

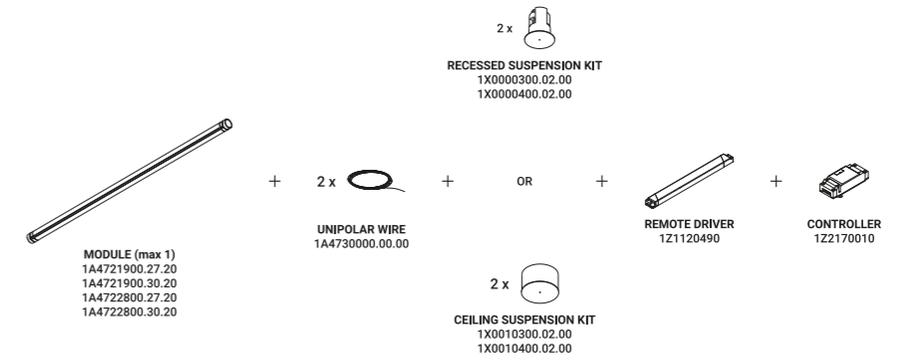

Multiple installation  
with recessed or ceiling  
suspension kit

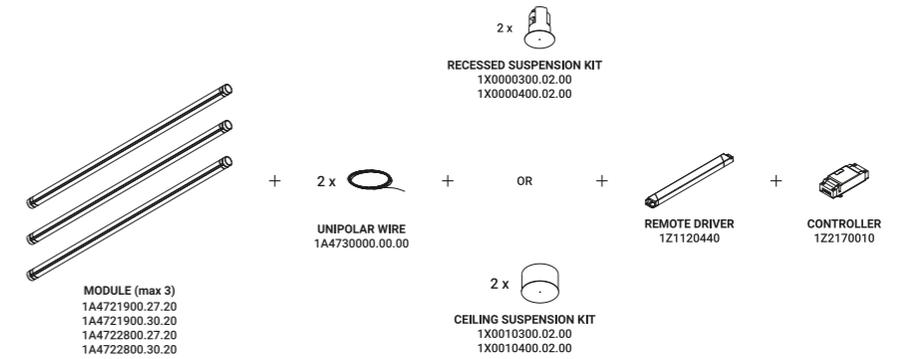


Suspension / Direct-Indirect / Indoor

<b>Material</b>	Metal - PMMA
<b>Finish</b>	.19 Polished Gold .28 Polished Black Chrome

**Note** Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

*Apparecchio illuminante a sospensione componibile. Orientabile lungo l'asse orizzontale. Barra trasparente con effetto rifrattivo. Profilo del modulo LED con finitura nero opaco. Dettagli con finitura oro lucido o cromo nero. Rosone bianco opaco. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*

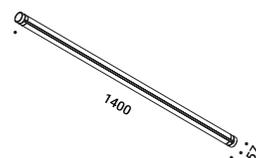**MAGIA - MODULE**

19W  
24V DC  
2700K - 1272lm / 3000K - 1312lm  
CRI >90  
Driver not included



Polished Gold - 2700K  
Polished Gold - 3000K  
Polished Black Chrome - 2700K  
Polished Black Chrome - 3000K

1A4721900.27.20  
1A4721900.30.20  
1A4722800.27.20  
1A4722800.30.20

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Wire guide / Guidacavo</b>			Not included
Matt Black	1 Piece		1X0020400.01.00



<b>Unipolar wire - 6 m / Cavo unipolare - 6 m</b>			Not included
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00

Suspension kits / Kit di sospensione




<b>Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm</b>			Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.02.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.02.00




<b>Ceiling suspension kit / Kit di sospensione da soffitto</b>			Not included
Matt White	For electrical cables - 1 Piece		1X0010300.02.00
Matt Black	For electrical cables - 1 Piece		1X0010400.02.00

**Compulsory accessories / Accessori obbligatori**


Drivers / Alimentatori




<b>Ceiling driver / Driver da soffitto</b>			Not included
Matt White	Input 220-240V - 50/60Hz Output 24V - 21W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 1 module	1A4780300.00.05




<b>Ceiling driver / Driver da soffitto</b>			Not included
Matt White	Input 110-240V - 50/60Hz Output 24V - 60W - IP20 DALI - PUSH - 1-10V - TRIAC	Max 3 modules	1A4740300.00.05




<b>Driver / Alimentatore</b>			Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490



<b>Driver / Alimentatore</b>			Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 modules	1Z1120440




<b>Driver / Alimentatore</b>			Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500



<b>Controller</b>			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20		1Z2170010


**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione




<b>Wall adapter plate / Piastra di adattamento da parete</b>			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00




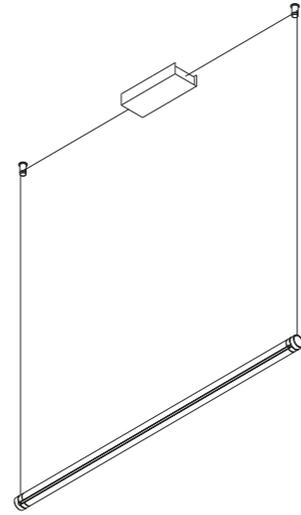


Example of single installation with ceiling driver

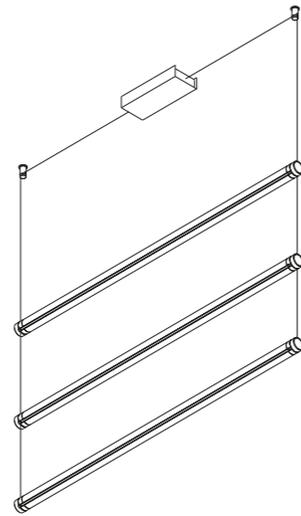


Example of multiple installation with ceiling driver

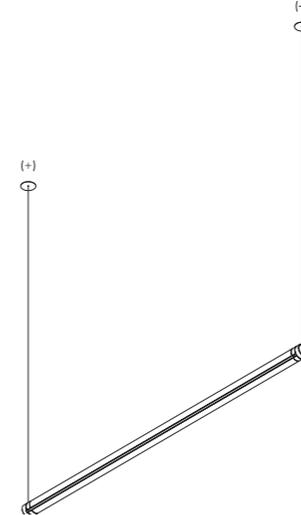


Example of single installation with recessed suspension kit

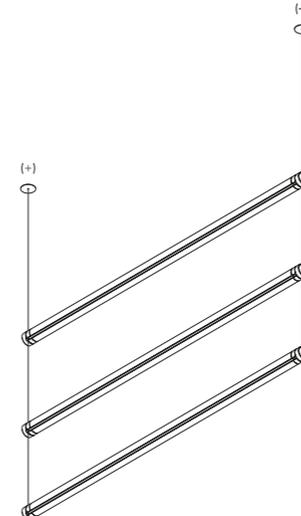


Example of multiple installation with recessed suspension kit

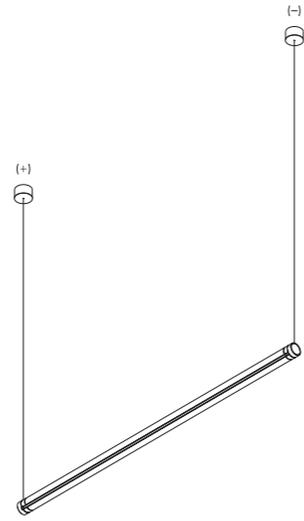


Example of single installation with ceiling suspension kit

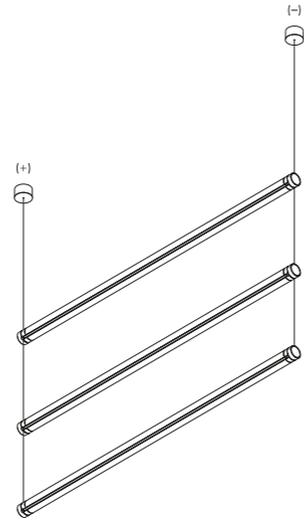


Example of multiple installation with ceiling suspension kit

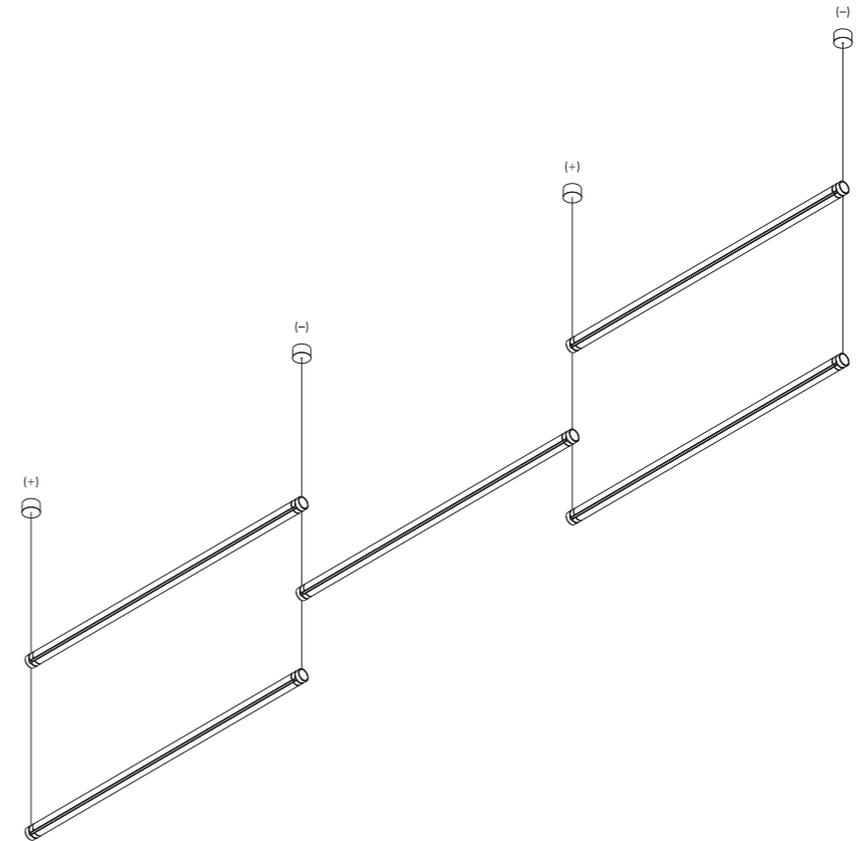

Example of multiple installation | Max 3 modules for cable

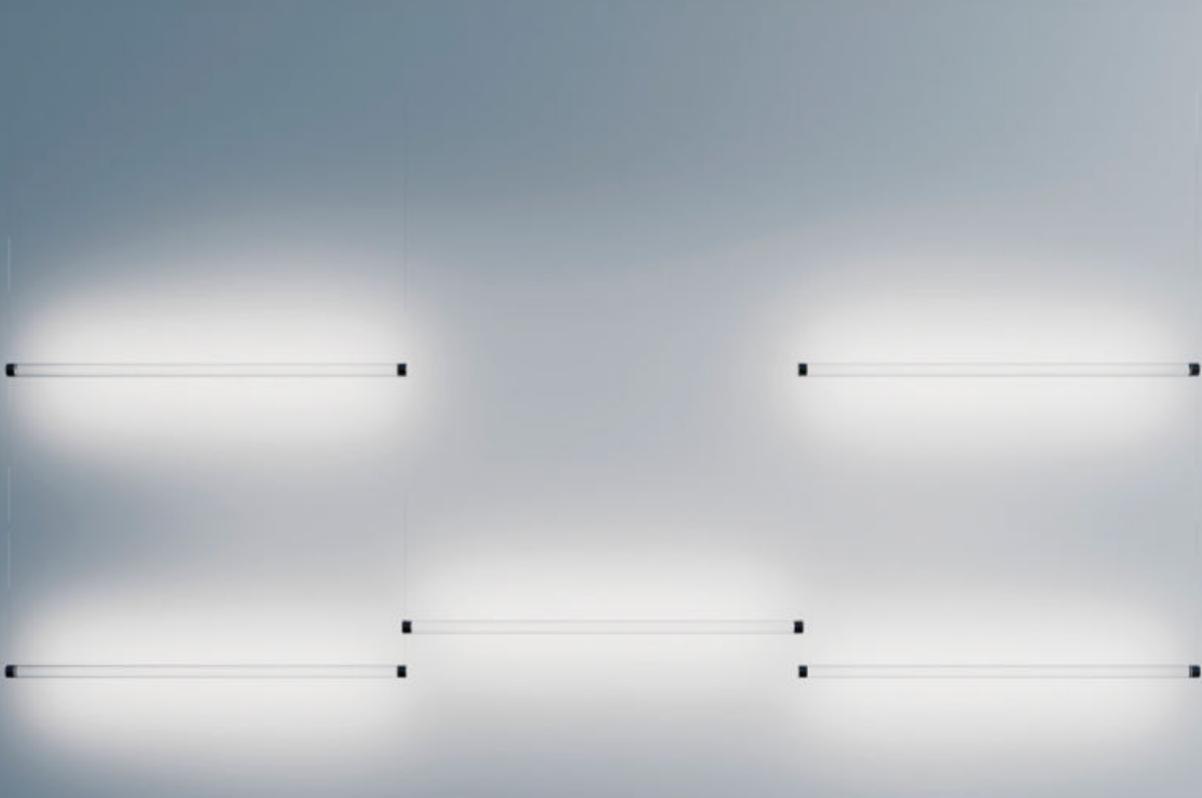



So slim and essential...

The fundamental concept of this project is minimalism.

A small tube that lights the table with wonder.

A real dual project: sign and light.

Luminaire available also in ENDLESS version.

Così esile ed essenziale...

L'essenzialità è la componente fondamentale di progetto.

Un piccolo tubo in metallo per fare una meravigliosa luce sul tavolo.

Un vero progetto duale: segno e luce.

Apparecchio illuminante disponibile anche nella versione ENDLESS.

Suspension / Direct / Indoor

<b>Material</b>	Metal			
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.08</b> Brushed Brass	<b>.26</b> Total Black
<b>Note</b>	Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the other finishes. Single rose for more than one lamp on request. MISS 2: version with power cable only and without rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.			

*Apparecchio illuminante a sospensione. Rosone bianco opaco e cavo bianco per la finitura bianco opaco e nero opaco. Rosone nero opaco e cavo nero per le altre finiture. Rosone unico per più apparecchi su richiesta. MISS 2: versione con solo il cavo di alimentazione e senza rosone. MISS ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*



**MISS 1**  
 Ceiling driver version  
 5,6W  
 100-240V - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 ON/OFF  
**CE IP20**

Matt White - 2700K - ON/OFF	1A2960300.27.00
Matt White - 3000K - ON/OFF	1A2960300.30.00
Matt Black - 2700K - ON/OFF	1A2960400.27.00
Matt Black - 3000K - ON/OFF	1A2960400.30.00
Brushed Brass - 2700K - ON/OFF	1A2960800.27.00
Brushed Brass - 3000K - ON/OFF	1A2960800.30.00
Total Black - 2700K - ON/OFF	1A2962600.27.00
Total Black - 3000K - ON/OFF	1A2962600.30.00
Polished Black Chrome - 2700K - ON/OFF	1A2962800.27.00
Polished Black Chrome - 3000K - ON/OFF	1A2962800.30.00




**MISS 1**  
 Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 DALI  
**CE IP20**

Matt White - 2700K - DALI	1A2960300.27.01
Matt White - 3000K - DALI	1A2960300.30.01
Matt Black - 2700K - DALI	1A2960400.27.01
Matt Black - 3000K - DALI	1A2960400.30.01
Brushed Brass - 2700K - DALI	1A2960800.27.01
Brushed Brass - 3000K - DALI	1A2960800.30.01
Total Black - 2700K - DALI	1A2962600.27.01
Total Black - 3000K - DALI	1A2962600.30.01
Polished Black Chrome - 2700K - DALI	1A2962800.27.01
Polished Black Chrome - 3000K - DALI	1A2962800.30.01



**MISS 1**  
 Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 PUSH  
**CE IP20**

Matt White - 2700K - PUSH	1A2960300.27.04
Matt White - 3000K - PUSH	1A2960300.30.04
Matt Black - 2700K - PUSH	1A2960400.27.04
Matt Black - 3000K - PUSH	1A2960400.30.04
Brushed Brass - 2700K - PUSH	1A2960800.27.04
Brushed Brass - 3000K - PUSH	1A2960800.30.04
Total Black - 2700K - PUSH	1A2962600.27.04
Total Black - 3000K - PUSH	1A2962600.30.04
Polished Black Chrome - 2700K - PUSH	1A2962800.27.04
Polished Black Chrome - 3000K - PUSH	1A2962800.30.04




**MISS 1**  
 Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 1-10V  
**CE IP20**

Matt White - 2700K - 1-10V	1A2960300.27.03
Matt White - 3000K - 1-10V	1A2960300.30.03
Matt Black - 2700K - 1-10V	1A2960400.27.03
Matt Black - 3000K - 1-10V	1A2960400.30.03
Brushed Brass - 2700K - 1-10V	1A2960800.27.03
Brushed Brass - 3000K - 1-10V	1A2960800.30.03
Total Black - 2700K - 1-10V	1A2962600.27.03
Total Black - 3000K - 1-10V	1A2962600.30.03
Polished Black Chrome - 2700K - 1-10V	1A2962800.27.03
Polished Black Chrome - 3000K - 1-10V	1A2962800.30.03



**MISS 1**  
 Ceiling driver version  
 6W  
 110-240V - 50/60Hz  
 2700K - 290lm / 3000K - 310lm  
 CRI >90  
 Driver integrated  
 TRIAC/IGBT  
**CE IP20**

Matt White - 2700K - TRIAC/IGBT	1A2960300.27.02
Matt White - 3000K - TRIAC/IGBT	1A2960300.30.02
Matt Black - 2700K - TRIAC/IGBT	1A2960400.27.02
Matt Black - 3000K - TRIAC/IGBT	1A2960400.30.02
Brushed Brass - 2700K - TRIAC/IGBT	1A2960800.27.02
Brushed Brass - 3000K - TRIAC/IGBT	1A2960800.30.02
Total Black - 2700K - TRIAC/IGBT	1A2962600.27.02
Total Black - 3000K - TRIAC/IGBT	1A2962600.30.02
Polished Black Chrome - 2700K - TRIAC/IGBT	1A2962800.27.02
Polished Black Chrome - 3000K - TRIAC/IGBT	1A2962800.30.02




**MISS 2**

Remote driver version  
4W  
Max 350mA DC  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver not included



Matt White - 2700K	1A2960300.27.20
Matt White - 3000K	1A2960300.30.20
Matt Black - 2700K	1A2960400.27.20
Matt Black - 3000K	1A2960400.30.20
Brushed Brass - 2700K	1A2960800.27.20
Brushed Brass - 3000K	1A2960800.30.20
Total Black - 2700K	1A2962600.27.20
Total Black - 3000K	1A2962600.30.20
Polished Black Chrome - 2700K	1A2962800.27.20
Polished Black Chrome - 3000K	1A2962800.30.20



**MISS ENDLESS**


Endless version only  
6,3W - 0,16A  
48V DC  
2700K - 290lm / 3000K - 310lm  
CRI >90  
Driver not included  
See page ENDLESS




Matt White - 2700K	1A2960300.27.40
Matt White - 3000K	1A2960300.30.40
Matt Black - 2700K	1A2960400.27.40
Matt Black - 3000K	1A2960400.30.40
Brushed Brass - 2700K	1A2960800.27.40
Brushed Brass - 3000K	1A2960800.30.40
Total Black - 2700K	1A2962600.27.40
Total Black - 3000K	1A2962600.30.40
Polished Black Chrome - 2700K	1A2962800.27.40
Polished Black Chrome - 3000K	1A2962800.30.40

**Compulsory accessories / Accessori obbligatori**


**Drivers / Alimentatori**



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0241180.350	



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	MISS 2	1Z0240870.350	




Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	MISS 2	1Z0240850.350	

**Optional accessories / Accessori opzionali**


**Suspension kits / Kit di sospensione**




Decentralization kit / Kit decentratore		Not included	
	MISS 1	1A0360000.00.00	




Kit ceiling rose and decentralizer / Kit rosone e decentratore		Not included	
Matt White	White cable 3 m included	MISS 1	1A0770300.00.00
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000300.06.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	MISS 2	1X0000400.06.00



Ceiling suspension kit / Kit di sospensione da soffitto		Not included	
Matt White	For electrical cables - 1 Piece	MISS 2	1X0010300.06.00
Matt Black	For electrical cables - 1 Piece	MISS 2	1X0010400.06.00




Wall adapter plate / Piastra di adattamento da parete		Not included	
Matt White	For mounting on brick masonry walls	MISS 2	1X0050300.01.00



• 25 mm •



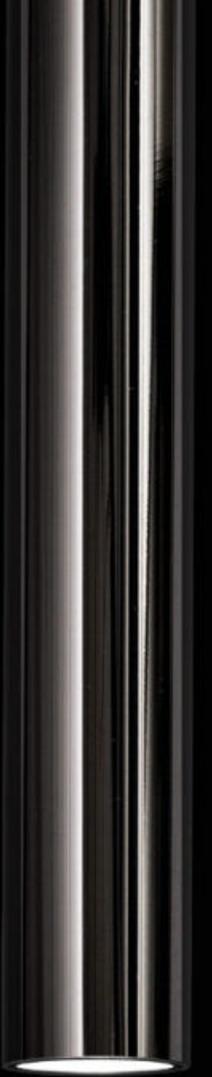



## MOON

Daide Groppi / 2005

Moon was created from the dream of bringing the moon inside your own home.  
The handmade Japanese paper surface makes every lamp unique.  
Table and floor versions available.


Moon nasce da un sogno, quello di portare la luna dentro casa.  
La superficie di carta giapponese, fatta a mano, rende unico ogni pezzo.  
Disponibile anche nelle versioni da tavolo e terra.

Suspension / Diffuse / Indoor

**Material** Japanese paper - PE  
**Finish** .00 Standard

**Note** Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. MOON 60 DE: version with dual emission and on/off. Transparent cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 model. A deliberate feature of MOON design is the creased, glued and overlapping effect of the paper. The used material is sensitive to humidity. This product is not suitable for use in high humidity environments.


*Apparecchio illuminante a sospensione. Paralume in PE e carta giapponese. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Cavo bianco. MOON 60 DE: versione a doppia emissione ed accensione. Cavo trasparente. Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per modello MOON 120. Una caratteristica voluta del design di MOON è l'effetto stropicciato, incollato e sovrapposto della carta. Il materiale utilizzato è sensibile all'umidità. Questo prodotto non è adatto all'uso in ambienti ad alta umidità.*

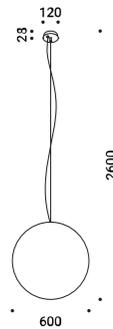

**MOON 60**  
 Max 15W - E27  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Standard - ON/OFF


|1A2820000.00.00 |

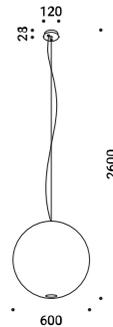

**MOON 60 DE**  
 Dual emission  
 Max 15W - E27 + Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Standard - ON/OFF


|1A2830000.00.00 |

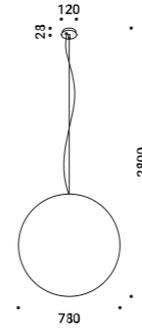

**MOON 80**  
 Max 15W - E27  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Standard - ON/OFF


|1A2840000.00.00 |

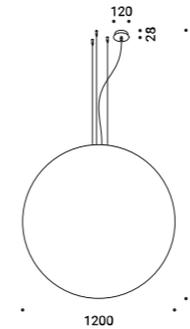

**MOON 120**  
 Max 2x25W - E27  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Standard - ON/OFF

|1A2850000.00.00 |

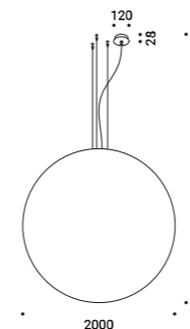

**MOON 200**  
 Max 4x25W - E27  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 Moisture barrier bag included  
 Wooden crate included  
 Transport excluded  
 CE IP20

Standard - ON/OFF

|1A2860000.00.00 |

## Optional accessories / Accessori opzionali

## Bulbs / Lampadine



<b>LED - GU10 - PAR16</b>			Not included
220-240V - 5,5W - 25° 2700K - 355lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330770	



<b>LED - E27 - A60</b>			Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / MOON 80 / MOON 200	1Y0330790	



<b>LED - E27 - A150</b>			Not included
220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120	1Y2160020	

## Suspension kits / Kit di sospensione




<b>Sloped rose suspension kit / Kit di sospensione per rosone inclinato</b>			Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00	



<b>Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato</b>			Not included
Nickel plated - 1 Piece	MOON 120	1A0510000.00.00	



<b>Decentralization kit / Kit decentratore</b>			Not included
		1A0360000.00.00	



<b>Kit ceiling rose and decentralizer / Kit rosone e decentratore</b>			Not included
Matt White	White cable 3 m included	1A0770300.00.00	
Matt Black	Black cable 3 m included	1A0770400.00.00	

## Optional accessories / Accessori opzionali


## Other accessories / Altri accessori


<b>Moisture barrier bag / Sacco barriera</b>			Not included
Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010	


<b>Moisture barrier bag / Sacco barriera</b>			Not included
Packaging for air and sea shipping	MOON 80	4A2840010	

<b>Moisture barrier bag / Sacco barriera</b>			Not included
Packaging for air and sea shipping	MOON 120	49860020	


<b>Wooden crate / Cassa in legno</b>			Not included
Packaging for air and sea shipping	MOON 120	49860010	



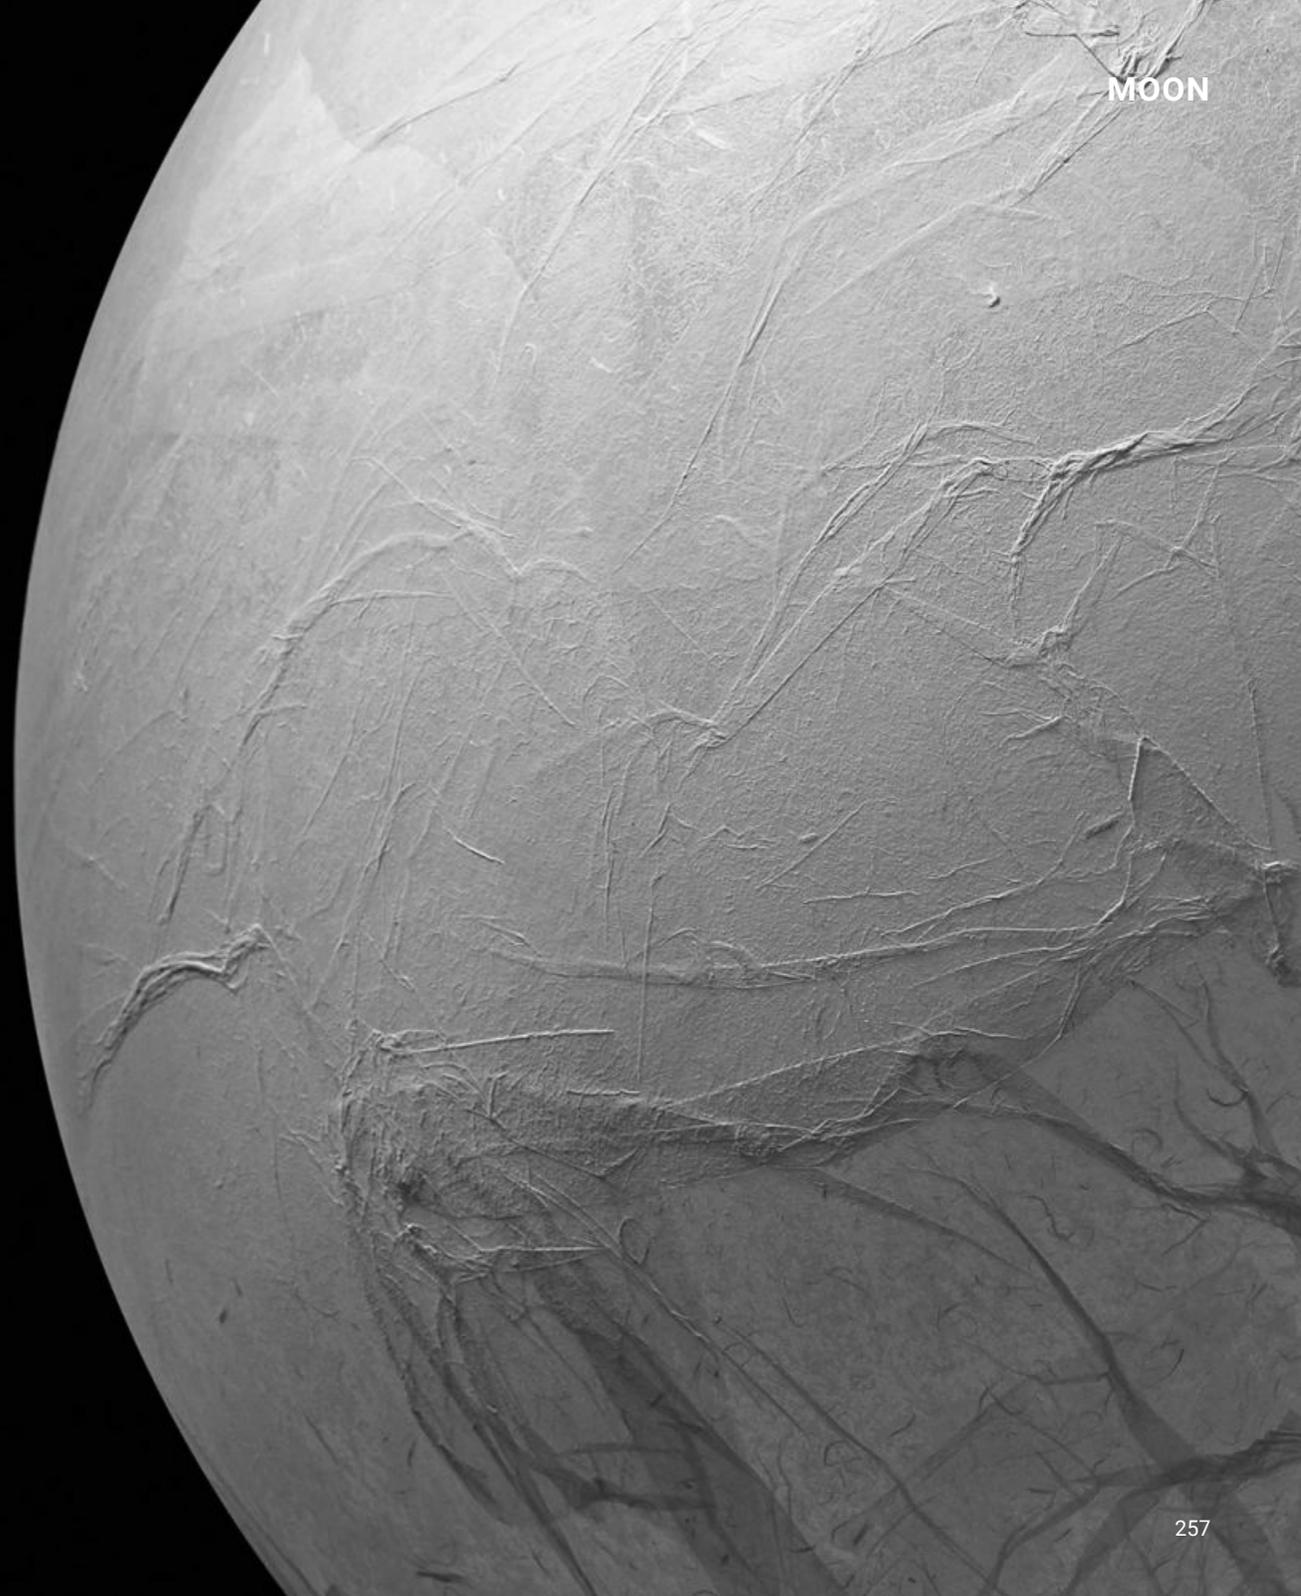



Private Residence  
Piacenza

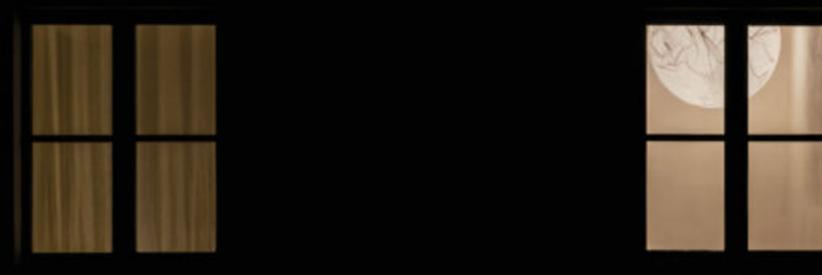

## NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.  
A simple project, almost a revival of the old electrical wiring.  
A plug, a cable, some isolators, a socket and a LED.  
Outdoor version also available.

**Design Plus Award 2014**

È l'idea di portare la luce dove si desidera, partendo da una presa elettrica.  
Un progetto semplice, quasi la rivisitazione dei vecchi impianti elettrici. Una spina, un  
cavo, degli isolatori, un portalamпада e una lampadina a LED.  
Disponibile anche nella versione outdoor.

**Premio Design Plus 2014**




# NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Suspension luminaire. Five cable clamps included. Matt white cable clamps and white cable for the matt white finish. Matt black cable clamps and black cable for the matt black finish. *Apparecchio illuminante a sospensione. Cinque bloccacavo inclusi. Bloccacavo bianco opaco e cavo bianco per la finitura bianco opaco. Bloccacavo nero opaco e cavo nero per la finitura nero opaco.*

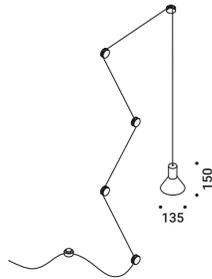

## NEURO

Max 15W - E27  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Matt White - ON/OFF  
 Matt Black - ON/OFF

1A0160300.00.00  
 1A0160400.00.00

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Wall and ceiling rose / Rosone da parete e soffitto		Not included
Matt White		1X0030300.01.00
Matt Black		1X0030400.01.00




Cable clamp / Bloccacavo		Included
Matt White	1 Piece	1X0110300.02.00
Matt Black	1 Piece	1X0110400.02.00

Bulbs / Lampadine



LED - E27 - PAR30s		Not included
	220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730

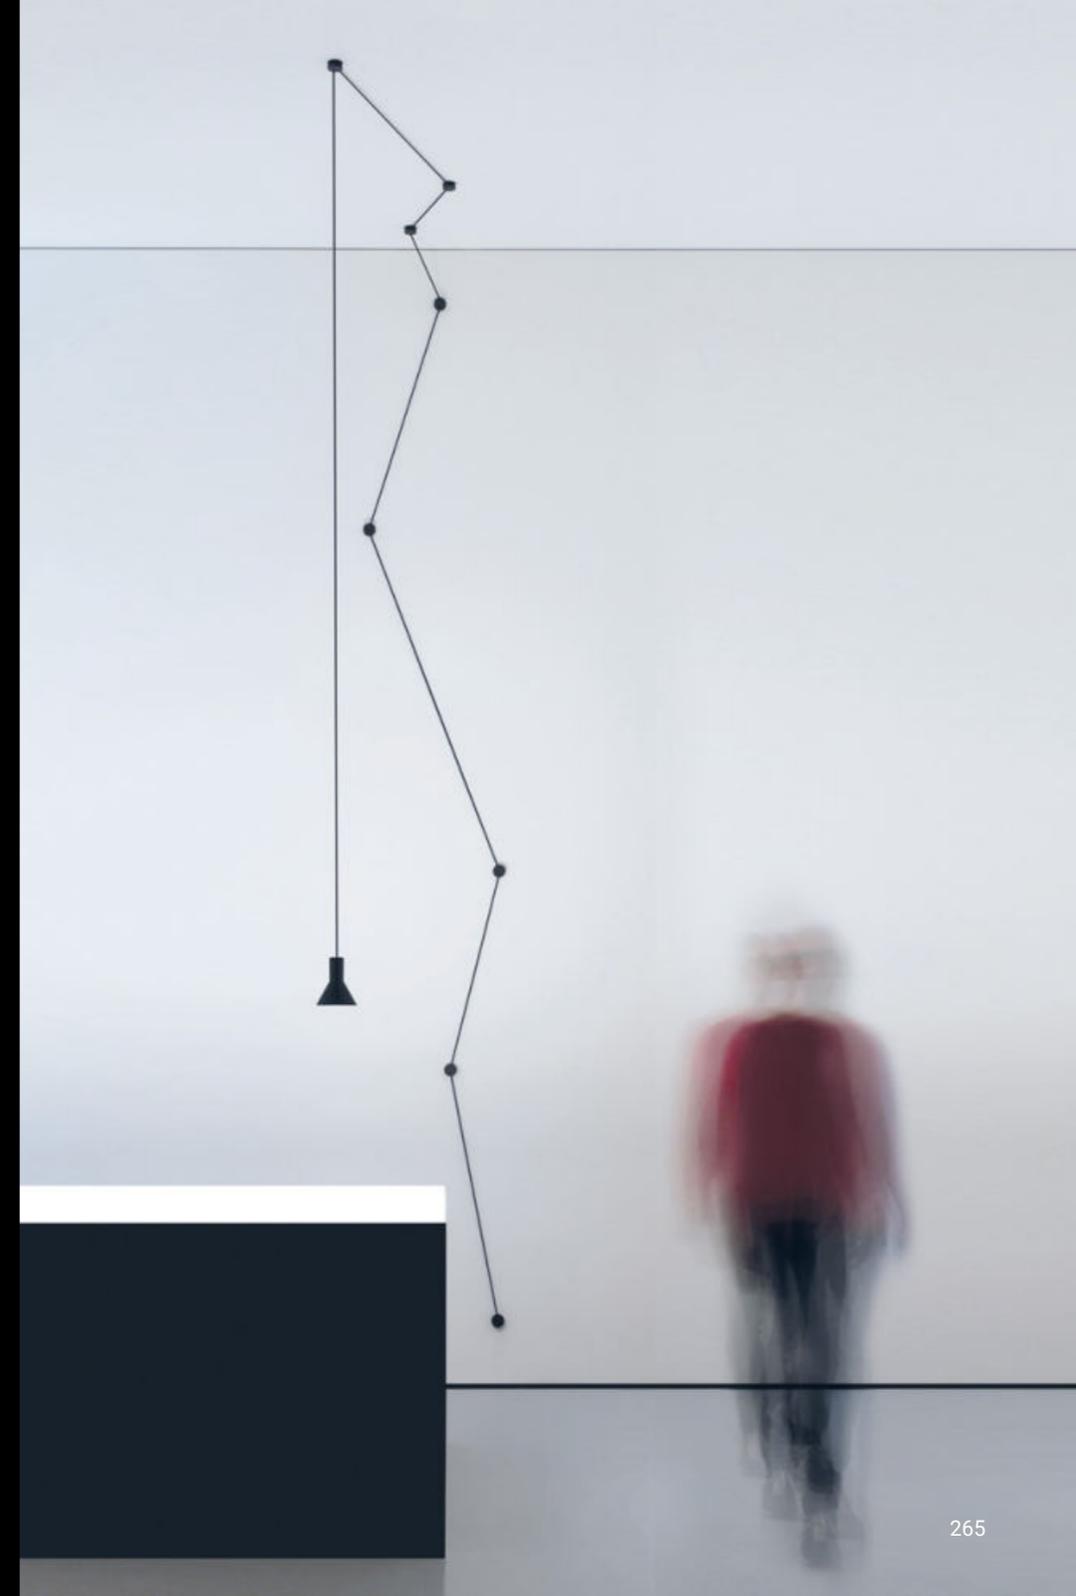





Santa Clara 1728 Hotel  
Lisbon






The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.

La luce nel piatto è la luce più bella.  
Una luce intesa come ingrediente della cucina, usata con garbo,  
ma nello stesso tempo con decisione.

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Suspension luminaire. Matt white rose. White cable. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo bianco.*



**OVO**

Max 20W - GU4 - 12V  
 230-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20 0,5 m

Matt White - ON/OFF

| 1A2890300.00.00 |

**Optional accessories / Accessori opzionali**

Bulbs / Lampadine



LED - GU4 - MR11

Not included

12V - 4W - 24°  
 2700K - 200lm - CRI >80  
 Energy Efficiency G

1Y0330450





## OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

The light in the plate is the most beautiful light.  
Light as an ingredient, used courteously but at the same time decisively.

La luce nel piatto è la luce più bella.  
Una luce intesa come ingrediente della cucina, usata con garbo,  
ma nello stesso tempo con decisione.


# OVONELPIATTO

Massimiliano Alajmo - Raffaele Alajmo / 2010

Suspension / Direct / Indoor

Material Metal  
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. White cable. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo bianco.*

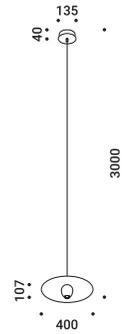

## OVONELPIATTO

Max 20W - GU4 - 12V  
230-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20 0,5 m

Matt White - ON/OFF

1A2880300.00.00

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



LED - GU4 - MR11

Not included

12V - 4W - 24°  
2700K - 200lm - CRI >80  
Energy Efficiency G

1Y0330450





## REFLEX S

Michele Groppi / 2023

A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.

Wall version also available.

Luminaire designed also to be powered by ENDLESS conductive tape.

Un LED potente, uno specchio sottile.

Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi  
e regala allo sguardo prospettive inedite, profondità impreviste, illusioni di luce.

Disponibile anche nella versione da parete.


Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

Suspension / Indirect / Indoor

**Material** Metal - Mirror  
**Finish** .04 Matt Black

**Note** Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable. REFLEX S 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.


*Apparecchio illuminante a sospensione. Piano con finitura a specchio. Retro del piano nero opaco. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Cavo nero. REFLEX S 2: versione con solo il cavo di alimentazione e senza rosone. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*

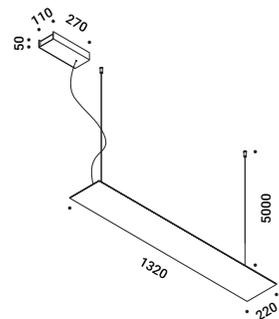

**REFLEX S 1**

Ceiling driver version  
 56W  
 220-240V - 50/60Hz  
 2700K - 6136lm / 3000K - 6326lm  
 CRI >90  
 Driver integrated  
 TRIAC/IGBT  
**CE IP20**


Matt Black - 2700K - TRIAC/IGBT | 1A4790400.27.02 |  
 Matt Black - 3000K - TRIAC/IGBT | 1A4790400.30.02 |

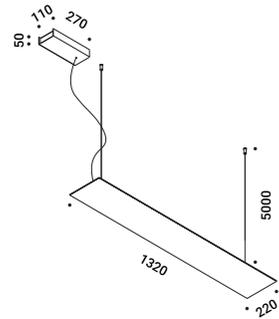

**REFLEX S 1**

Ceiling driver version  
 56W  
 110-240V - 50/60Hz  
 2700K - 6136lm / 3000K - 6326lm  
 CRI >90  
 Driver integrated  
 DALI - PUSH - 1-10V  
**CE IP20**

Matt Black - 2700K - DALI - PUSH - 1-10V | 1A4790400.27.07 |  
 Matt Black - 3000K - DALI - PUSH - 1-10V | 1A4790400.30.07 |

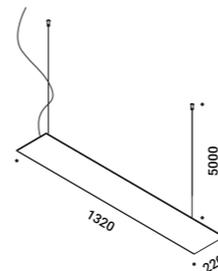

**REFLEX S 2**


Remote driver version  
 50W  
 Max 1400mA DC  
 2700K - 6136lm / 3000K - 6326lm  
 CRI >90  
 Driver not included

**CE IP20 E**


Matt Black - 2700K | 1A4790400.27.20 |  
 Matt Black - 3000K | 1A4790400.30.20 |

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore		Not included	
220-240V(110-120V)	1400mA/55W(40W)/IP20/DALI - PUSH	REFLEX S 2	1Z0240830.1400
	- 1-10V		



Driver / Alimentatore		Not included	
220-240V	1400mA/50W/IP20/TRIAC - PUSH	REFLEX S 2	1Z0241370.1400

## Optional accessories / Accessori opzionali


## Suspension kits / Kit di sospensione




Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.03.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.03.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	REFLEX S 2	1X0000400.04.00	



Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.03.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.03.00	
Matt White	For electrical cables - 1 Piece	REFLEX S 2	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	REFLEX S 2	1X0010400.04.00	




Wall adapter plate / Piastra di adattamento da parete				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	

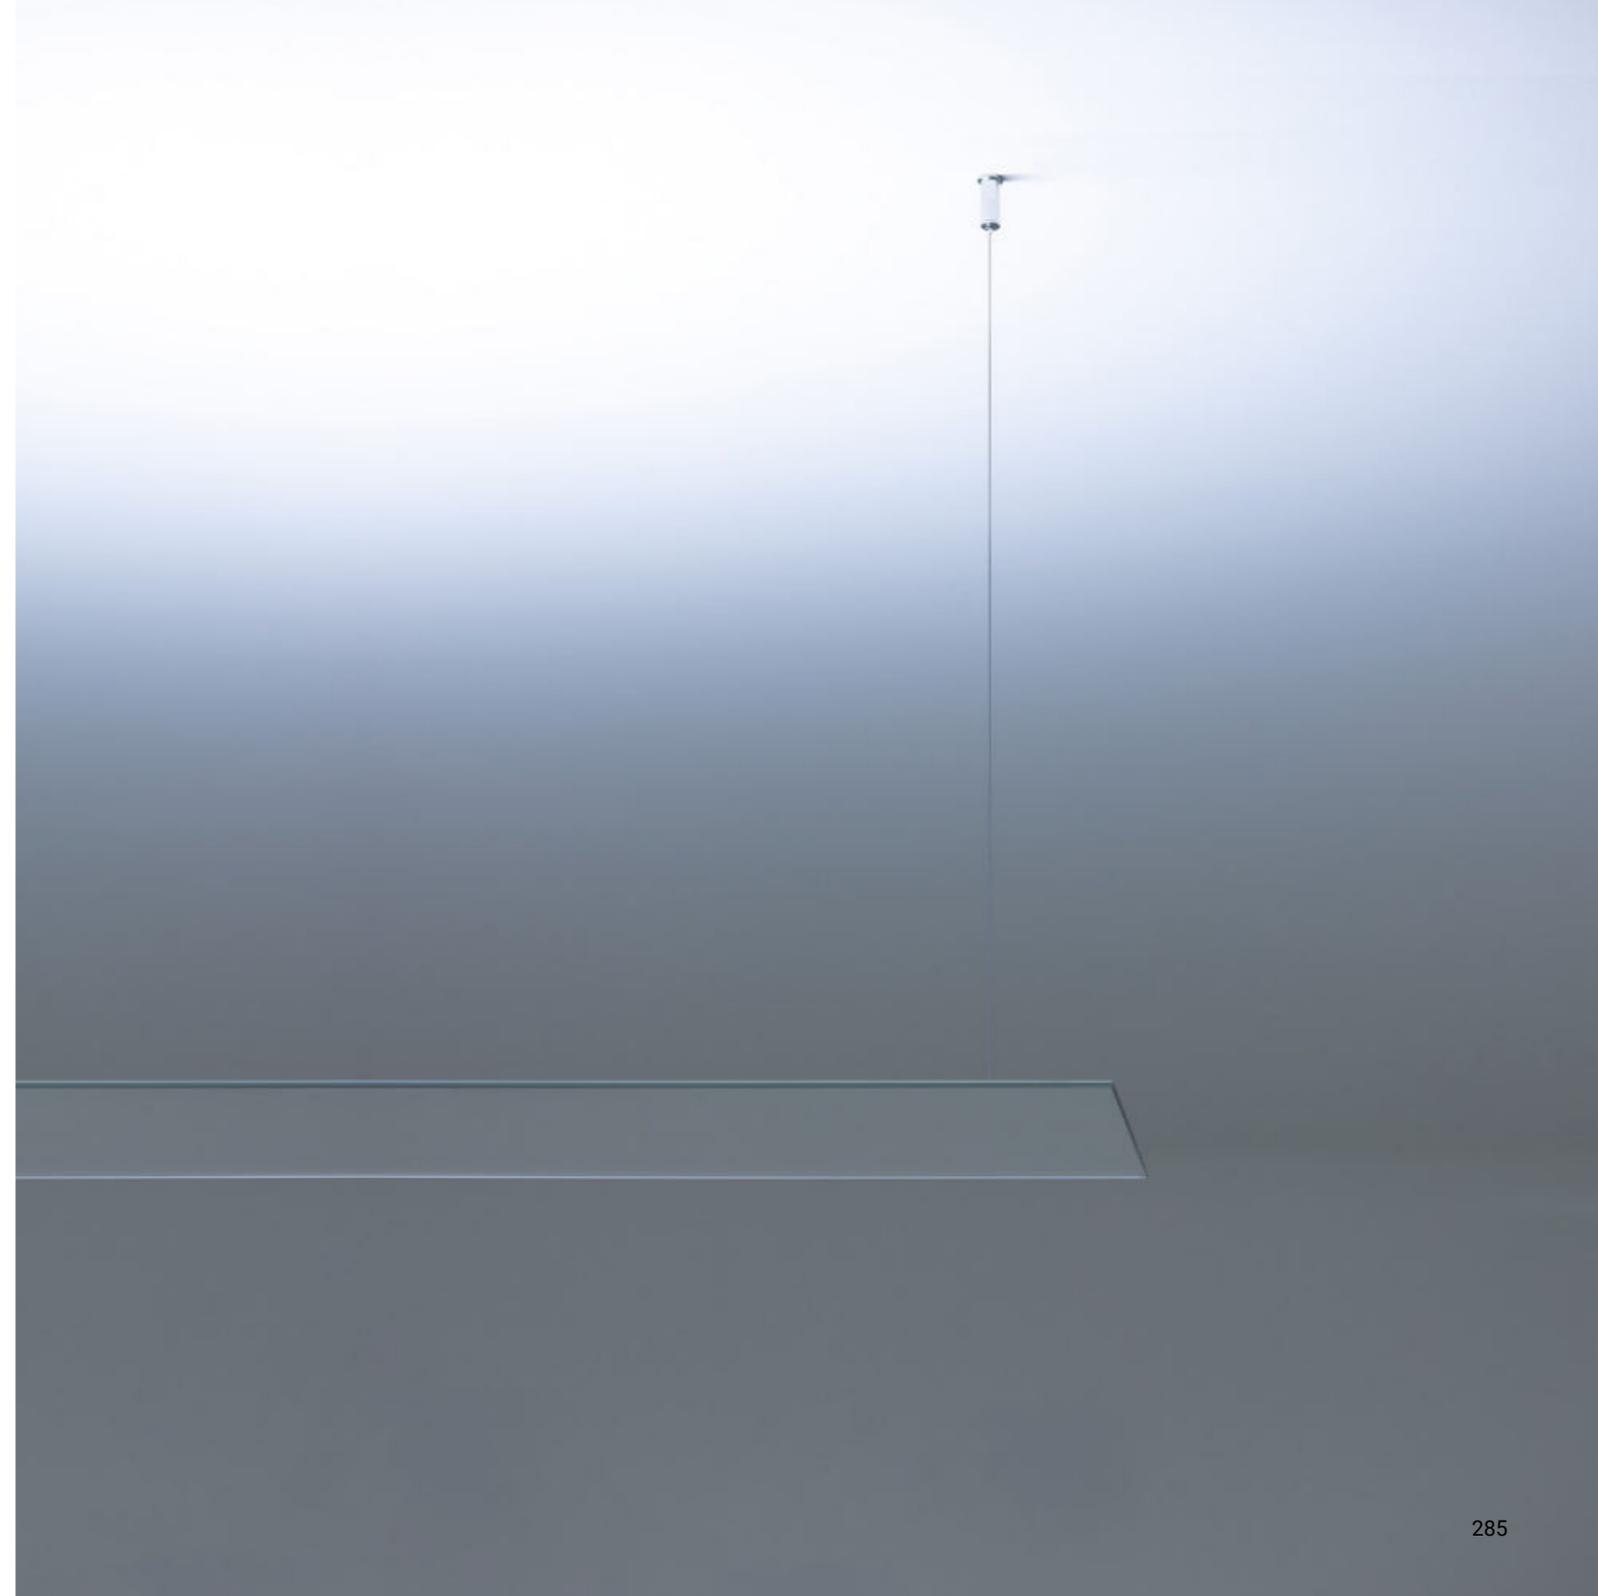

## SHANGHAI

Davide Groppi / 2013

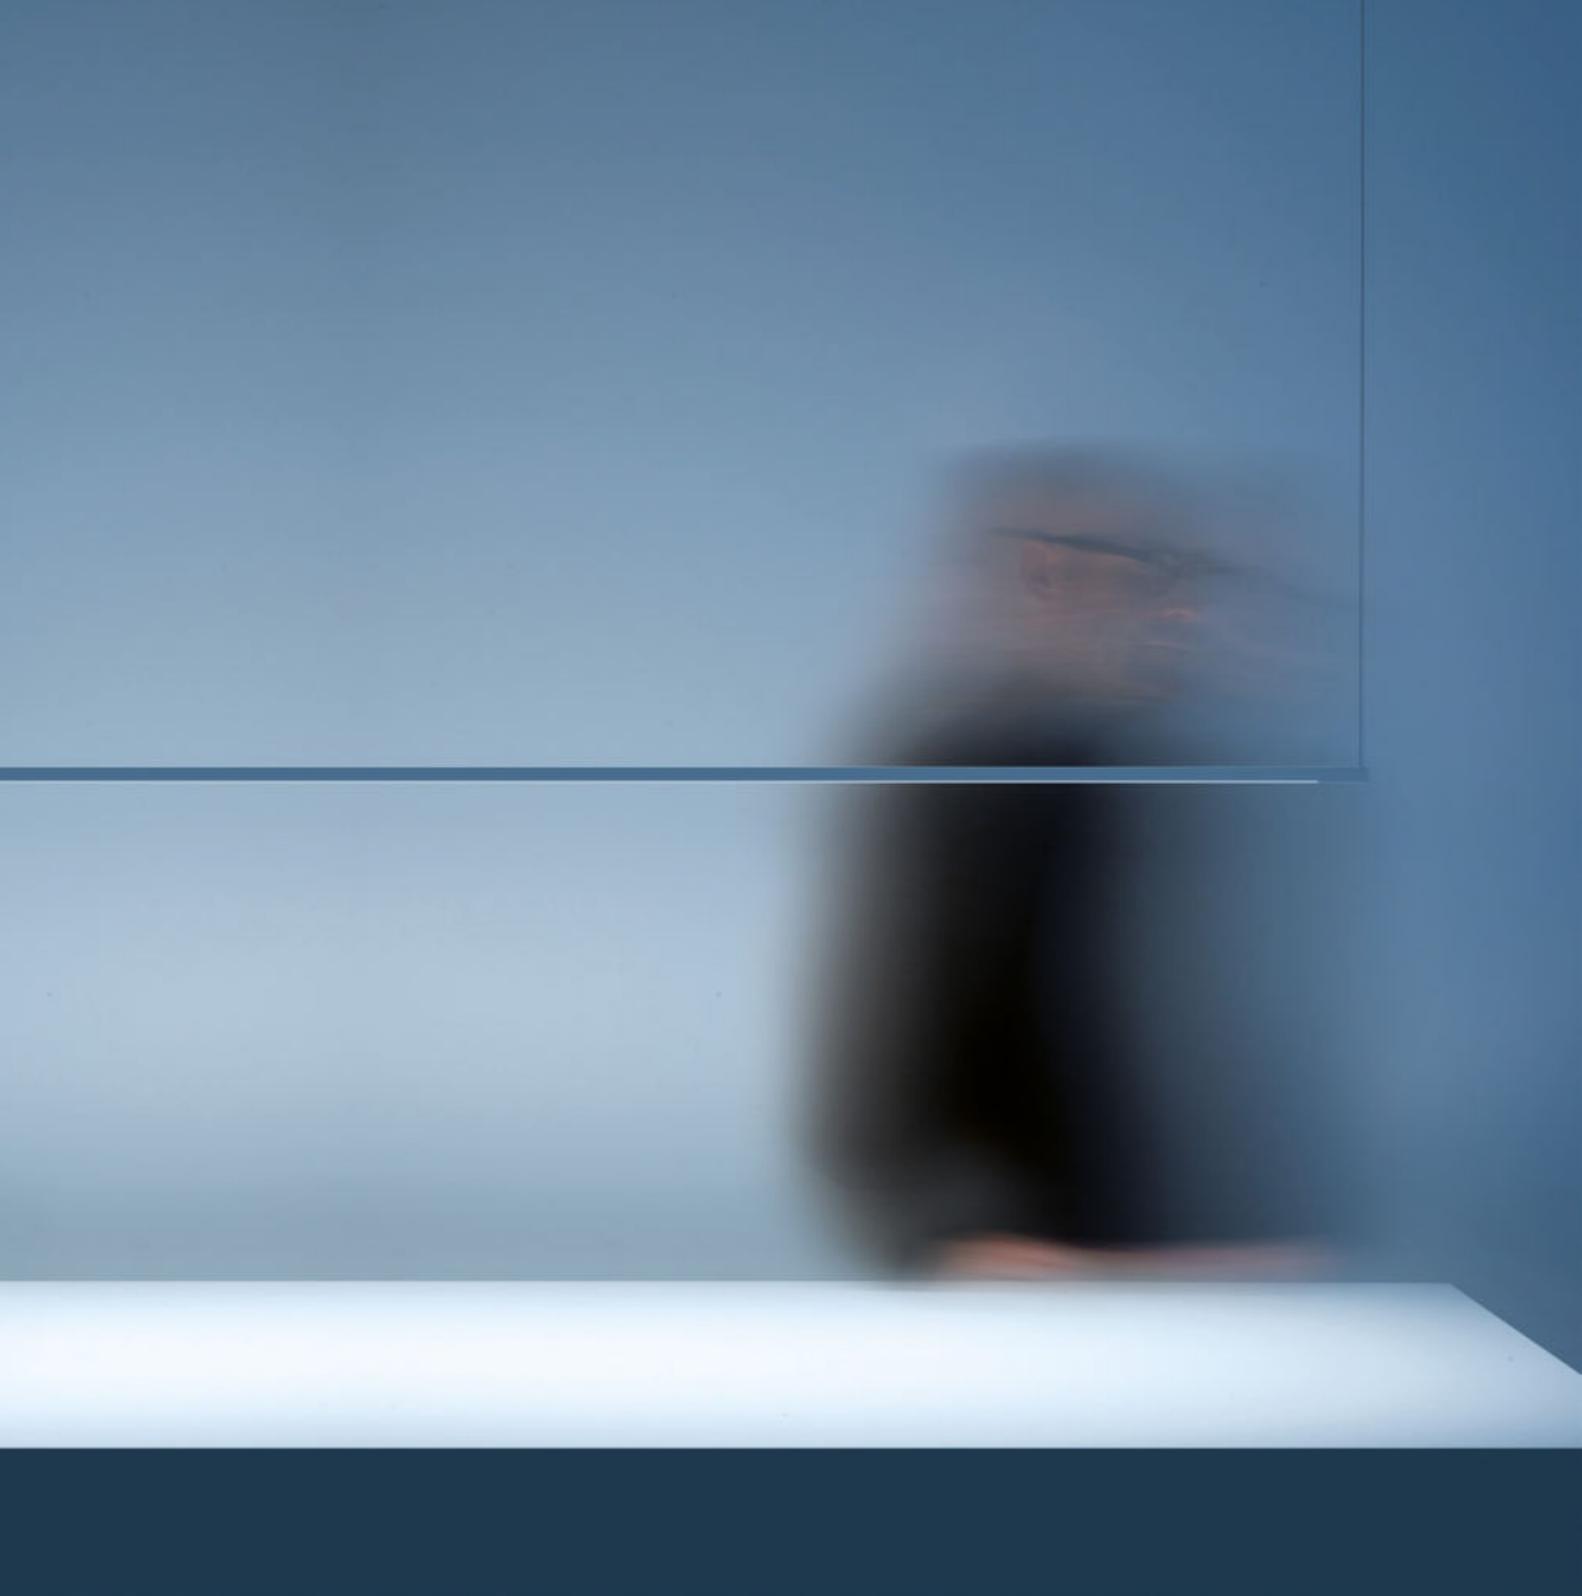

The smallest possible shape.  
A suspended luminous segment.  
Beautiful by itself or in composition.  
Suitable for working area or kitchen.  
Luminaire designed also to be powered by ENDLESS conductive tape.


La forma minima possibile.  
Un segmento luminoso sospeso.  
Bellissima da sola o in composizione.  
Per i luoghi di lavoro o per la cucina.  
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

Suspension / Direct / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White .08 Brushed Brass

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable. SHANGHAI 2: version with power cable only and without rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

*Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Cavo trasparente. SHANGHAI 2: versione con solo il cavo di alimentazione e senza rosone. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*

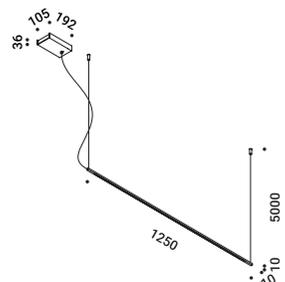


**SHANGHAI 1**

Ceiling driver version  
 15,5W  
 110-240V - 50/60Hz  
 2700K - 592lm / 3000K - 619lm  
 CRI >90  
 Driver integrated  
 PUSH  
 CE IP20

Matt White - 2700K - PUSH  
 Matt White - 3000K - PUSH  
 Brushed Brass - 2700K - PUSH  
 Brushed Brass - 3000K - PUSH

1A3260300.27.04  
 1A3260300.30.04  
 1A3260800.27.04  
 1A3260800.30.04

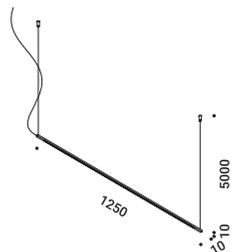

**SHANGHAI 2**


Remote driver version  
 13W  
 24V DC  
 2700K - 592lm / 3000K - 619lm  
 CRI >90  
 Driver not included  
 CE IP20 TE

Matt White - 2700K  
 Matt White - 3000K  
 Brushed Brass - 2700K  
 Brushed Brass - 3000K


1A3260300.27.20  
 1A3260300.30.20  
 1A3260800.27.20  
 1A3260800.30.20

**Compulsory accessories / Accessori obbligatori**


Drivers / Alimentatori



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/16W(15W)/IP20/DALI	SHANGHAI 2	1Z0241180.24	



Driver / Alimentatore				Not included
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V	SHANGHAI 2	1Z0240870.24	



Driver / Alimentatore				Not included
220-240V	24V/20W/IP20/TRIAC/IGBT	SHANGHAI 2	1Z0240850.24	

**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione



Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato			Not included
	Chrome plated - 1 Piece		1A0530000.00.00



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00	



Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00	



Wall adapter plate / Piastra di adattamento da parete			Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00



**A de-structured chandelier that can be re-assembled as you like.  
A conjuring trick that gives you the possibility of connecting the diodes in series  
using very weak electric currents with wires that are practically invisible.  
The very thin wire that connects the light sources and brings them alive,  
one in relation to the other, is the principal component of this project.**

Un lampadario destrutturato e componibile a piacere.  
Un piccolo gioco di prestigio sfruttando la possibilità di collegare i diodi in serie  
utilizzando correnti elettriche molto basse e quindi cavi quasi invisibili.  
Il filo, sottilissimo, che unisce i corpi e li fa vivere l'uno in funzione dell'altro,  
è la caratteristica principale di questo progetto.


# SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .19 Polished Gold .26 Total Black

**Note** Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the other finishes. AISI 304 stainless steel suspension cables. *Apparecchio illuminante a sospensione. Rosone bianco opaco e cavi rossi per la finitura bianco opaco. Rosone nero opaco e cavi grigio antracite per le altre finiture. Cavi di sospensione in inox AISI 304.*

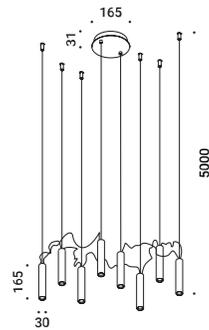


## SIMBIOSI

15W  
 110-240V - 50/60Hz  
 2700K - 931lm / 3000K - 960lm  
 CRI >90  
 Driver integrated  
 DALI

CE IP20

Matt White - 2700K - DALI  
 Matt White - 3000K - DALI  
 Polished Gold - 2700K - DALI  
 Polished Gold - 3000K - DALI  
 Total Black - 2700K - DALI  
 Total Black - 3000K - DALI

1A2870300.27.01  
 1A2870300.30.01  
 1A2871900.27.01  
 1A2871900.30.01  
 1A2872600.27.01  
 1A2872600.30.01

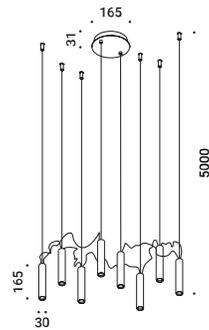

## SIMBIOSI

16W  
 110-240V - 50/60Hz  
 2700K - 931lm / 3000K - 960lm  
 CRI >90  
 Driver integrated  
 PUSH


CE IP20

Matt White - 2700K - PUSH  
 Matt White - 3000K - PUSH  
 Polished Gold - 2700K - PUSH  
 Polished Gold - 3000K - PUSH  
 Total Black - 2700K - PUSH  
 Total Black - 3000K - PUSH

1A2870300.27.04  
 1A2870300.30.04  
 1A2871900.27.04  
 1A2871900.30.04  
 1A2872600.27.04  
 1A2872600.30.04

## Optional accessories / Accessori opzionali

Suspension kits / Kit di sospensione



Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato

Not included

Chrome plated - 1 Piece

1A0530000.00.00







Private Residence  
Bologna

SIMBIOSI



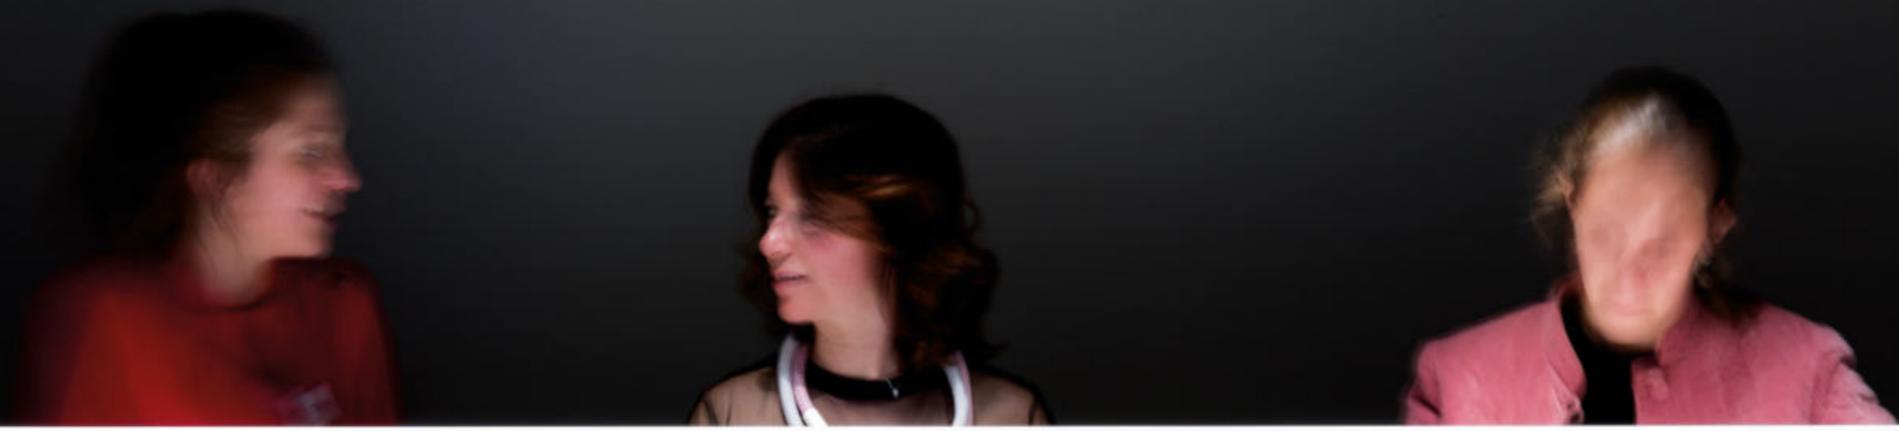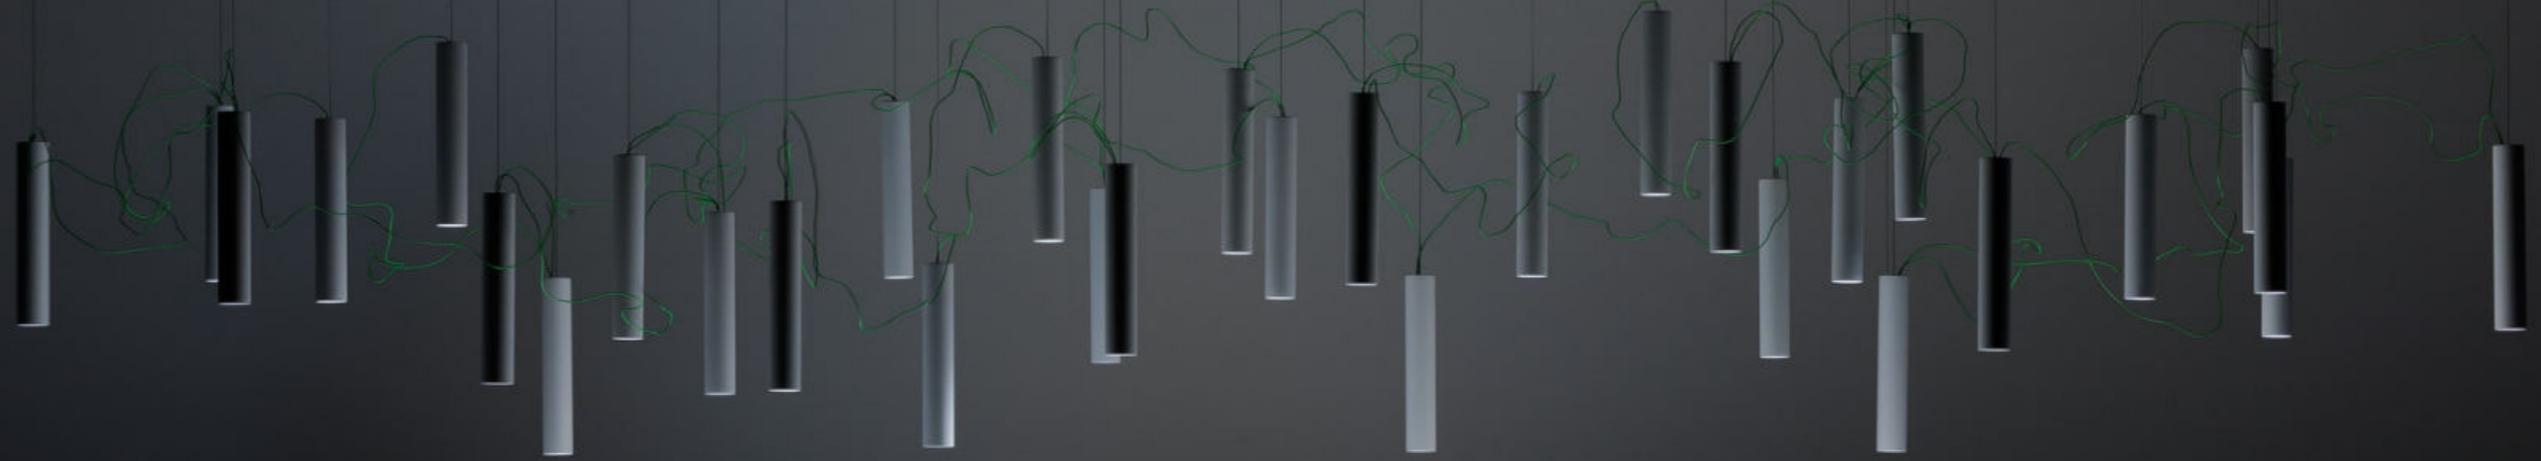



## SOTTILE

Daide Groppi / 2023

A blade of light just 7 millimetres thick,  
the expression of that purest and most essential part of our thought.  
The surprise of an extremely thin, yet at the same time very bright, lamp.  
Luminaire designed also to be powered by ENDLESS conductive tape.


Una lama di luce spessa solo 7 millimetri,  
espressione di una parte del nostro pensiero, quello più puro ed essenziale.  
La sorpresa di una lampada estremamente sottile, ma al contempo molto luminosa.  
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

Suspension / Direct / Indoor

<b>Material</b>	Metal			
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.29</b> Brushed Bronze	<b>.36</b> Brushed Black

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. White cable for the matt white finish, black cable for the other finishes. SOTTILE 1 DE and SOTTILE 2 DE: mono on/off and dual emission version. SOTTILE 2 and SOTTILE 2 DE: version with power cable only and without rose. Luminaire designed to be powered by our ENDLESS conductive tape and dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

*Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Cavo bianco per la finitura bianco opaco e cavo nero per le altre finiture. SOTTILE 1 DE e SOTTILE 2 DE: versione monoaccensione a doppia emissione. SOTTILE 2 e SOTTILE 2 DE: versione con solo il cavo di alimentazione e senza rosone. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*

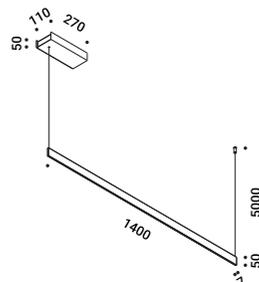


**SOTTILE 1**

Ceiling driver version  
21W  
220-240V - 50/60Hz  
2700K - 1692lm / 3000K - 1855lm  
CRI >90  
Driver integrated  
DALI - PUSH - 1-10V - TRIAC

CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4230300.27.05
Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4230300.30.05
Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4230400.27.05
Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4230400.30.05
Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4232900.27.05
Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4232900.30.05
Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4233600.27.05
Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4233600.30.05

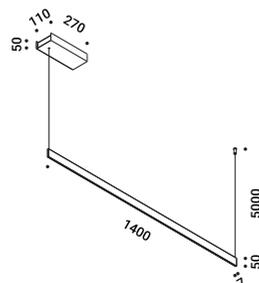


**SOTTILE 1 DE**

Ceiling driver version - Dual emission  
41W  
220-240V - 50/60Hz  
2700K - Up 1692lm - Down 1692lm /  
3000K - Up 1855lm - Down 1855lm  
CRI >90  
Driver integrated  
DALI - PUSH - 1-10V - TRIAC

CE IP20

Matt White - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4640300.27.05
Matt White - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4640300.30.05
Matt Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4640400.27.05
Matt Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4640400.30.05
Brushed Bronze - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4642900.27.05
Brushed Bronze - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4642900.30.05
Brushed Black - 2700K - DALI - PUSH - 1-10V - TRIAC	1A4643600.27.05
Brushed Black - 3000K - DALI - PUSH - 1-10V - TRIAC	1A4643600.30.05

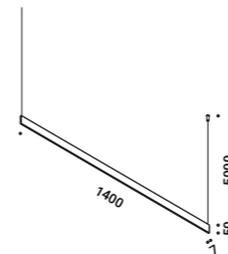


**SOTTILE 2**

Remote driver version  
19W  
24V DC  
2700K - 1692lm / 3000K - 1855lm  
CRI >90  
Driver not included

CE IP20 E

Matt White - 2700K	1A4230300.27.20
Matt White - 3000K	1A4230300.30.20
Matt Black - 2700K	1A4230400.27.20
Matt Black - 3000K	1A4230400.30.20
Brushed Bronze - 2700K	1A4232900.27.20
Brushed Bronze - 3000K	1A4232900.30.20
Brushed Black - 2700K	1A4233600.27.20
Brushed Black - 3000K	1A4233600.30.20

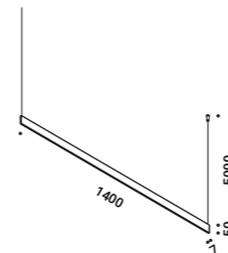

**SOTTILE 2 DE**


Remote driver version - Dual emission  
2x19W  
24V DC  
2700K - Up 1692lm - Down 1692lm /  
3000K - Up 1855lm - Down 1855lm  
CRI >90  
Driver not included

CE IP20 E


Matt White - 2700K	1A4640300.27.20
Matt White - 3000K	1A4640300.30.20
Matt Black - 2700K	1A4640400.27.20
Matt Black - 3000K	1A4640400.30.20
Brushed Bronze - 2700K	1A4642900.27.20
Brushed Bronze - 3000K	1A4642900.30.20
Brushed Black - 2700K	1A4643600.27.20
Brushed Black - 3000K	1A4643600.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



<b>Driver / Alimentatore</b>			Not included
100-240V	24V/50W/IP20/ON/OFF	SOTTILE 2 / SOTTILE 2 DE	1Z1120490



<b>Controller</b>			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SOTTILE 2 / SOTTILE 2 DE	1Z2170010

Optional accessories / Accessori opzionali


Suspension kits / Kit di sospensione




Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm				Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE	1X0000300.04.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTILE 2 / SOTTILE 2 DE	1X0000400.04.00	





Ceiling suspension kit / Kit di sospensione da soffitto				Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010300.04.00	
Matt Black	For electrical cables - 1 Piece	SOTTILE 2 / SOTTILE 2 DE	1X0010400.04.00	



Wall adapter plate / Piastra di adattamento da parete				Not included
Matt White	For mounting on brick masonry walls		1X0050300.01.00	

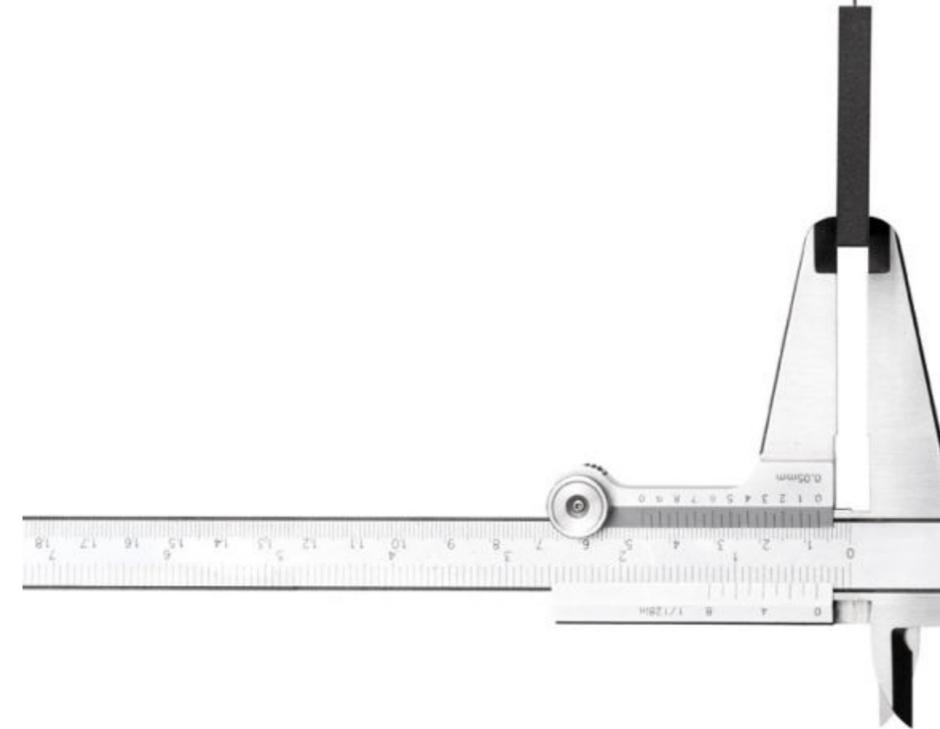

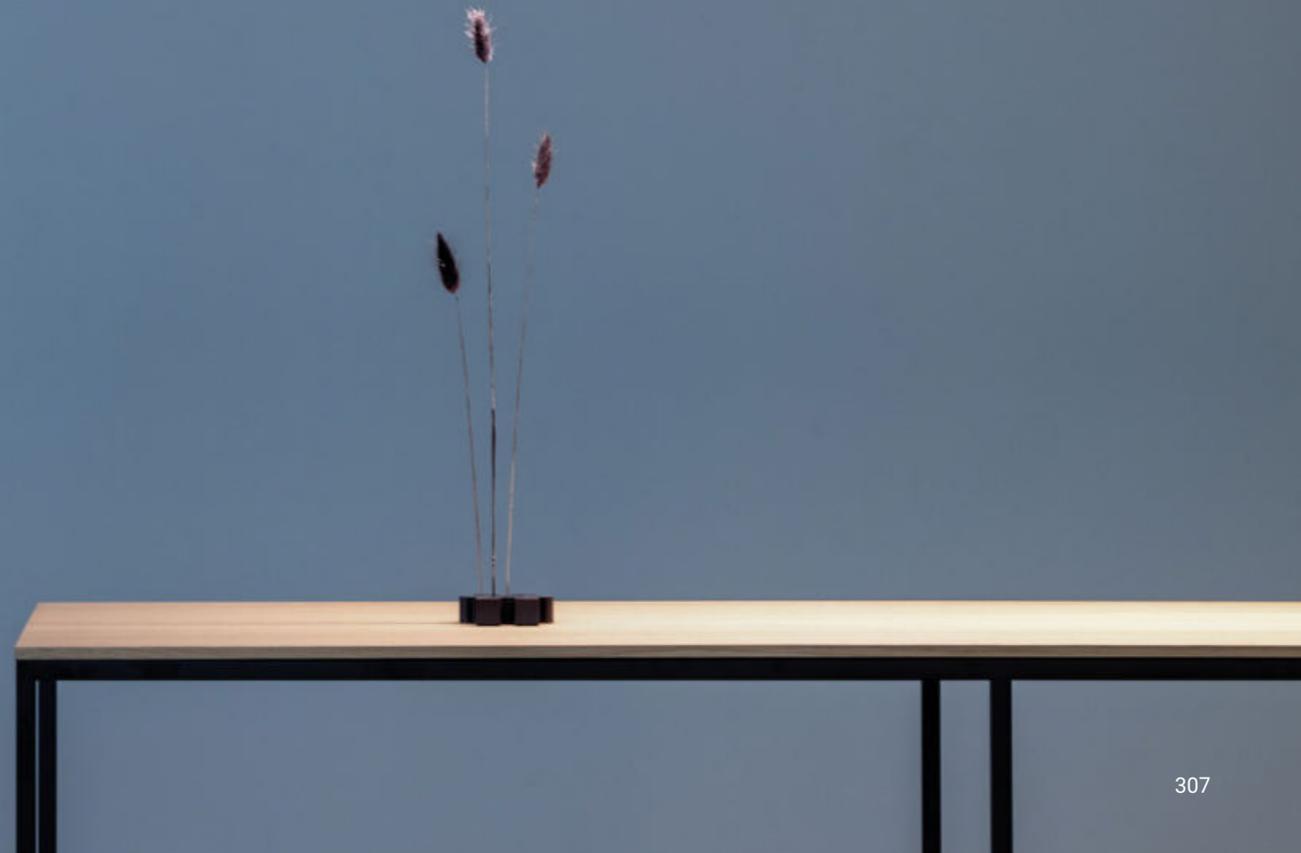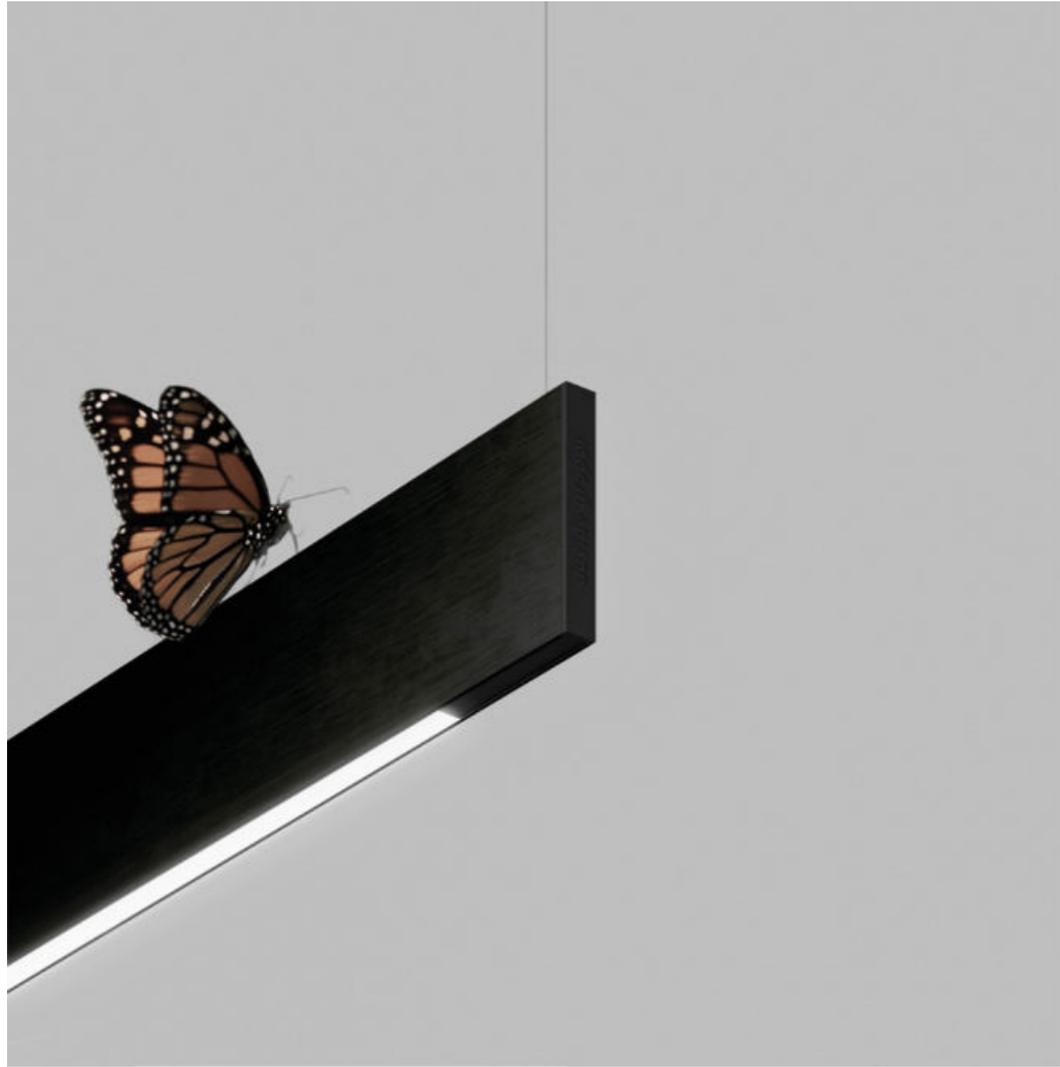



Abba Restaurant  
Milano





## SOTTOSOPRA

Daide Groppi / 2023

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.

Sottosopra: pure, elegant, wonderfully efficient.


La purezza del cono sospeso racchiude una piccola macchina di luce che produce contemporaneamente luce diretta, indiretta e diffusa.

Sottosopra: pura, elegante, meravigliosamente efficiente.

Suspension / Direct-Indirect / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Doppia emissione ed accensione. Cavo bianco. SOTTOSOPRA 2: versione con solo il cavo di alimentazione e senza rosone.*

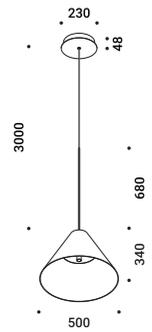


**SOTTOSOPRA 1**

Ceiling driver version  
 27W  
 220-240V - 50/60Hz  
 2700K - Up 375lm - Down 366lm /  
 3000K - Up 387lm - Down 366lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 TRIAC/IGBT  
**CE IP20**

Matt White - 2700K - TRIAC/IGBT  
 Matt White - 3000K - TRIAC/IGBT

1A4540300.27.02  
 1A4540300.30.02

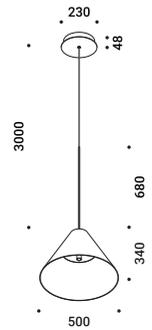


**SOTTOSOPRA 1**

Ceiling driver version  
 27W  
 110-240V - 50/60Hz  
 2700K - Up 375lm - Down 366lm /  
 3000K - Up 387lm - Down 366lm  
 CRI >90  
 UGR <19  
 Driver integrated  
 DALI - PUSH - 1-10V  
**CE IP20**

Matt White - 2700K - DALI - PUSH - 1-10V  
 Matt White - 3000K - DALI - PUSH - 1-10V

1A4540300.27.07  
 1A4540300.30.07

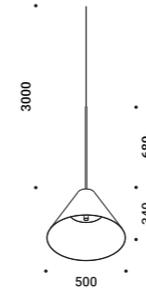

**SOTTOSOPRA 2**


Remote driver version  
 24W  
 Max 500mA DC  
 2700K - Up 375lm - Down 366lm /  
 3000K - Up 387lm - Down 366lm  
 CRI >90  
 UGR <19  
 Driver not included  
 2 Drivers required  
**CE IP20**

Matt White - 2700K  
 Matt White - 3000K


1A4540300.27.20  
 1A4540300.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore	Not included		
220-240V	500mA/20W/IP20/TRIAC/IGBT	SOTTOSOPRA 2	1Z0240850.500



Driver / Alimentatore	Not included		
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	SOTTOSOPRA 2	1Z0241270.500


**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included	
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000300.05.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SOTTOSOPRA 2	1X0000400.05.00



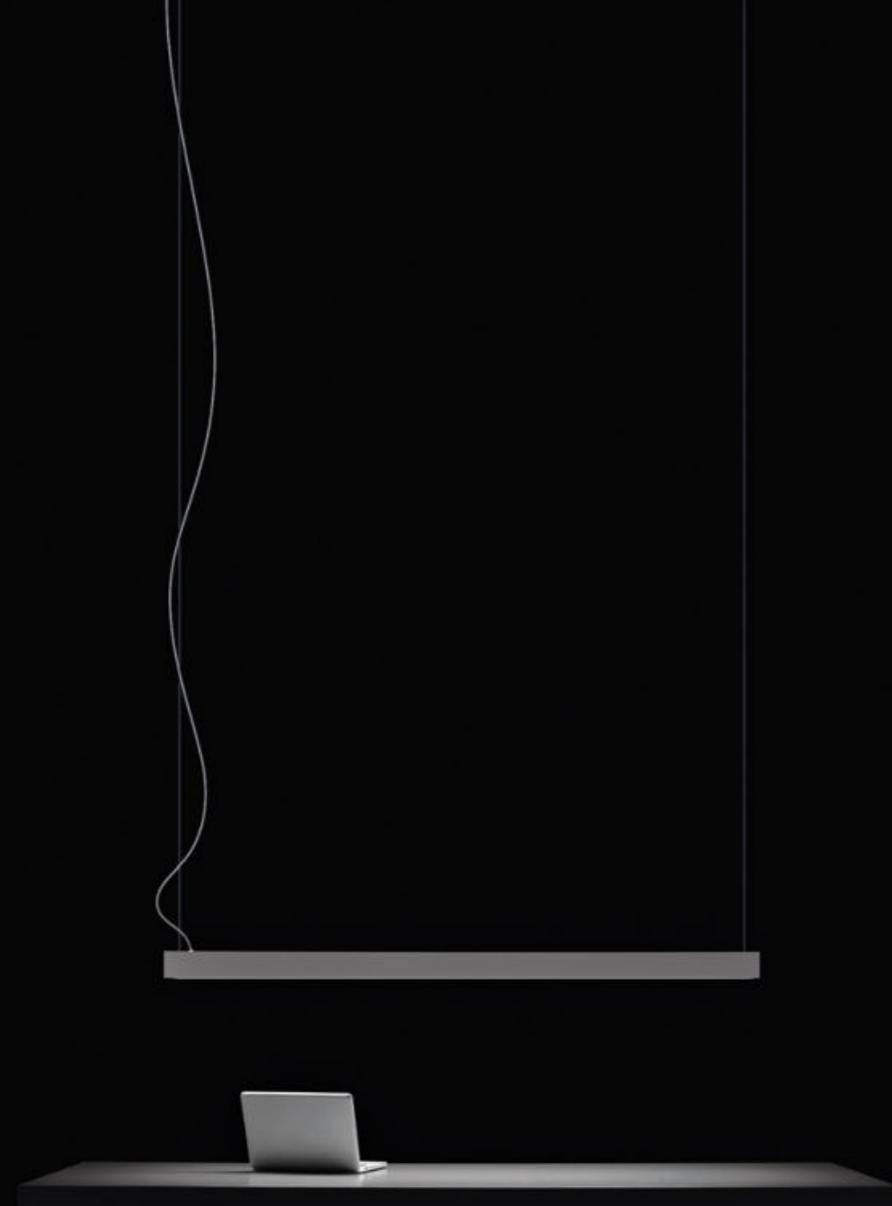

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Suspension / Direct / Indoor

**Material** Metal - Polycarbonate  
**Finish** .03 Matt White

**Note** Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. White cable. *Apparecchio illuminante a sospensione. Rosone bianco opaco. Cavi di sospensione in inox AISI 304. Cavo bianco.*

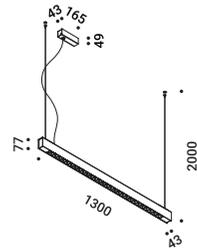

**SPY**

39W  
 110-240V - 50/60Hz  
 3000K - 4292lm  
 CRI >80  
 UGR <19  
 Driver integrated  
 DALI



Matt White - 3000K - DALI

| 1A2910300.30.01 |

**Optional accessories / Accessori opzionali**

Suspension kits / Kit di sospensione




<b>Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato</b>		Not included
	Nickel plated - 1 Piece	1A0510000.00.00



<b>Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm</b>		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



<b>Ceiling suspension kit / Kit di sospensione da soffitto</b>		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00



<b>Wall adapter plate / Piastra di adattamento da parete</b>		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

**WALL / PARETE**

## DOT P

Omar Carraglia - Davide Groppi / 2015



**A tool to light.**

**A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.**

**Luminaire available also in ENDLESS version.**

Elemento di luce.

Un apparecchio progettato per utilizzare moduli a LED in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.


Apparecchio illuminante disponibile anche nella versione ENDLESS.

Wall-Ceiling / Direct / Indoor

<b>Material</b>	Metal
<b>Finish</b>	<b>.03</b> Matt White <b>.04</b> Matt Black <b>.49</b> Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. DOT P DE and DOT P DE 51: dual emission versions. DOT P ENDLESS and DOT P ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante da parete. Orientabile in tutte le direzioni. DOT P DE e DOT P DE 51: versioni a doppia emissione. DOT P ENDLESS e DOT P ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**DOT P**

13W  
100-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI	1A2340300.27.01
Matt White - 3000K - DALI	1A2340300.30.01
Matt Black - 2700K - DALI	1A2340400.27.01
Matt Black - 3000K - DALI	1A2340400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A2344900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A2344900.30.01




**DOT P**

13W  
100-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH	1A2340300.27.04
Matt White - 3000K - PUSH	1A2340300.30.04
Matt Black - 2700K - PUSH	1A2340400.27.04
Matt Black - 3000K - PUSH	1A2340400.30.04
Matt Black/Polished Gold - 2700K - PUSH	1A2344900.27.04
Matt Black/Polished Gold - 3000K - PUSH	1A2344900.30.04




**DOT P 51**

Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Matt White - ON/OFF	1A2490300.00.00
Matt Black - ON/OFF	1A2490400.00.00
Matt Black/Polished Gold - ON/OFF	1A2494900.00.00




**DOT P ENDLESS**

ENDLESS version only  
13W - 0,34A  
48V DC  
2700K / 3000K  
CRI >97  
Driver not included  
See page ENDLESS

CE IP20 E

Matt White - 2700K	1A2340300.27.40
Matt White - 3000K	1A2340300.30.40
Matt Black - 2700K	1A2340400.27.40
Matt Black - 3000K	1A2340400.30.40
Matt Black/Polished Gold - 2700K	1A2344900.27.40
Matt Black/Polished Gold - 3000K	1A2344900.30.40




**DOT P ENDLESS CASAMBI**

ENDLESS version only  
15,5W - 0,4A  
48V DC  
2700K / 3000K  
CRI >97  
Driver not included  
See page ENDLESS

CE IP20 E A

Matt White - 2700K	1A2340300.27.41
Matt White - 3000K	1A2340300.30.41
Matt Black - 2700K	1A2340400.27.41
Matt Black - 3000K	1A2340400.30.41
Matt Black/Polished Gold - 2700K	1A2344900.27.41
Matt Black/Polished Gold - 3000K	1A2344900.30.41




**DOT P DE**

Dual emission  
29W  
220-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI	1A4900300.27.01
Matt White - 3000K - DALI	1A4900300.30.01
Matt Black - 2700K - DALI	1A4900400.27.01
Matt Black - 3000K - DALI	1A4900400.30.01
Matt Black/Polished Gold - 2700K - DALI	1A4904900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A4904900.30.01



**DOT P DE 51**

Dual emission  
Max 2x10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Matt White - ON/OFF	1A3810300.00.00
Matt Black - ON/OFF	1A3810400.00.00
Matt Black/Polished Gold - ON/OFF	1A3814900.00.00

**Compulsory accessories / Accessori obbligatori**


Other accessories / Altri accessori




Lens / Lente		Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT P 1A3090000.00.00
	3000K - CRI >97 - 1038lm	
	2700K - CRI >97 - 983lm	DOT P ENDLESS
	3000K - CRI >97 - 1038lm	
	2700K - CRI >97 - 983lm	DOT P ENDLESS CASAMBI
	3000K - CRI >97 - 1038lm	
Beam - 24°	2700K - CRI >97 - 1966lm	DOT P DE
	3000K - CRI >97 - 2076lm	
	2700K - CRI >97 - 943lm	DOT P 1A3100000.00.00
	3000K - CRI >97 - 996lm	
	2700K - CRI >97 - 943lm	DOT P ENDLESS
	3000K - CRI >97 - 996lm	
Beam - 36°	2700K - CRI >97 - 943lm	DOT P ENDLESS CASAMBI
	3000K - CRI >97 - 996lm	
	2700K - CRI >97 - 1886lm	DOT P DE
	3000K - CRI >97 - 1992lm	
	2700K - CRI >97 - 955lm	DOT P 1A3110000.00.00
	3000K - CRI >97 - 1005lm	
Beam - 50°	2700K - CRI >97 - 955lm	DOT P ENDLESS
	3000K - CRI >97 - 1005lm	
	2700K - CRI >97 - 955lm	DOT P ENDLESS CASAMBI
	3000K - CRI >97 - 1005lm	
	2700K - CRI >97 - 1910lm	DOT P DE
	3000K - CRI >97 - 2010lm	
Beam - 50°	2700K - CRI >97 - 965lm	DOT P 1A3120000.00.00
	3000K - CRI >97 - 1016lm	
	2700K - CRI >97 - 965lm	DOT P ENDLESS
	3000K - CRI >97 - 1016lm	
	2700K - CRI >97 - 965lm	DOT P ENDLESS CASAMBI
	3000K - CRI >97 - 1016lm	
Beam - 50°	2700K - CRI >97 - 1930lm	DOT P DE
	3000K - CRI >97 - 2032lm	

## Optional accessories / Accessori opzionali


Other accessories / Altri accessori




<b>Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape</b>				Not included
		DOT P /	1X0080400.01.00	
		DOT P ENDLESS /		
		DOT P ENDLESS CASAMBI /		
		DOT P DE		




<b>Elliptical filter / Filtro ellittico</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.02.00	
		DOT P ENDLESS /		
		DOT P ENDLESS CASAMBI /		
		DOT P DE		



<b>Blue filter / Filtro blu</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.03.00	
		DOT P ENDLESS /		
		DOT P ENDLESS CASAMBI /		
		DOT P DE		



<b>Red filter / Filtro rosso</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.04.00	
		DOT P ENDLESS /		
		DOT P ENDLESS CASAMBI /		
		DOT P DE		



<b>Yellow filter / Filtro giallo</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT P /	1X0080000.05.00	
		DOT P ENDLESS /		
		DOT P ENDLESS CASAMBI /		
		DOT P DE		

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



<b>LED - GU10 - PAR16</b>			Not included
	220-240V - 5,5W - 25°	DOT P 51 / DOT P DE 51	1Y0330500
	3000K - 375lm - CRI >97		
	Energy Efficiency G - Dimmable		




<b>LED SORAA - GU10 - MR16</b>			Not included
	230V - 7,5W - 10°	DOT P 51 / DOT P DE 51	1Y1580210
	2700K - 390lm - CRI >95		
	Energy Efficiency G - Dimmable		




<b>LED SORAA - GU10 - MR16</b>			Not included
	230V - 7,5W - 10°	DOT P 51 / DOT P DE 51	1Y1580010
	3000K - 410lm - CRI >95		
	Energy Efficiency G - Dimmable		


Other accessories / Altri accessori



<b>Darklight</b>			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580040



<b>25° beam filter / Filtro fascio 25°</b>			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580020



<b>36° beam filter / Filtro fascio 36°</b>			Not included
	LED SORAA - GU10 - MR16	DOT P 51 / DOT P DE 51	1Y1580030





**1**

It is pure form.  
A tool to light, simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

È forma pura.  
Elemento di luce semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

# DUET

/ 2014

Wall / Diffuse / Indoor

**Material** Glass - Metal


**Finish** .03 Matt White

.04 Matt Black

.08 Brushed Brass

**Note** Wall luminaire. Dual emission.

*Apparecchio illuminante da parete. Doppia emissione.*



## DUET

23W

220-240V - 50/60Hz

2700K - 1293lm / 3000K - 1352lm

CRI >90

TRIAC/IGBT

CE IP20

Matt White - 2700K - TRIAC/IGBT

Matt White - 3000K - TRIAC/IGBT

Matt Black - 2700K - TRIAC/IGBT

Matt Black - 3000K - TRIAC/IGBT

Brushed Brass - 2700K - TRIAC/IGBT

Brushed Brass - 3000K - TRIAC/IGBT

1A3300300.27.02

1A3300300.30.02

1A3300400.27.02

1A3300400.30.02

1A3300800.27.02

1A3300800.30.02



## EDISON'S NIGHTMARE

Harry Thaler / 2014



A gestural project, full of irony and nostalgia.  
Therefore, among a thousand stories, prohibitions, absurd technical rules,  
we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb\*,  
a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

*\* From 01 September 2012, incandescent bulbs cannot be sold in the EU.*

Un progetto gestuale, carico di ironia e nostalgia.  
E così, tra mille vicende, divieti, assurde norme tecniche, siamo arrivati alla fine.

Alla fine della lampadina a incandescenza.

Edison's Nightmare è un saluto alla lampadina di Edison\*,  
ad un sogno che ha cambiato per sempre il modo di vivere,  
sottraendo al sonno ore da dedicare a lettura e scrittura.

Si tratta di una classica lampadina inchiodata al muro. Come un'opera d'arte.

*\* Dal 1 Settembre 2012 non è più possibile, nella Comunità Europea,  
vendere lampadine ad incandescenza.*


# EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

**Material** Blown glass - Metal  
**Finish** .00 Standard

**Note** Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable. *Apparecchio illuminante da parete. Diffusore in vetro soffiato. Dimmer lungo il cavo. Cavo trasparente.*

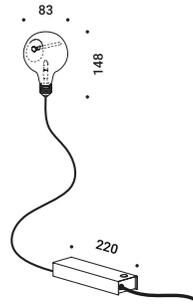

## EDISON'S NIGHTMARE

Max 10W - G4 - 12V  
100-240V - 50/60Hz  
Driver integrated  
Dimmer on board  
Bulb included  
CE IP20

Standard - Dimmer on board

| 1A3380000.00.06 |





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time. The light message is punctuated by a blinking LED, offering reading in movement.

Un cortometraggio luminoso.

Per raccontare una storia con la luce, retroilluminando in modo pulsante e casuale le vecchie diapositive da 35MM.

Le fotografie possono essere montate e sostituite a piacimento.

La scelta del messaggio da comunicare è del tutto personale: può essere un'immagine, un logo, una frase, tutto ciò che al momento si vuole rappresentare.

Il messaggio luminoso, ritmato attraverso la diversa intermittenza dei LED, permette una lettura in movimento.


# FILM

Alessandra Dallagiovanna - Davide Groppi / 2010

Objects-Wall / Diffuse / Indoor

**Material** Metal - Polycarbonate  
**Finish** .00 Standard

**Note** Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable. *Apparecchio illuminante da parete componibile. Supporto nero opaco. Immagini personalizzabili non incluse. Connettore moduli incluso. Cavo nero.*

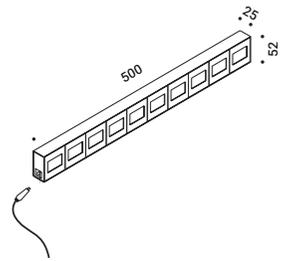


**FILM**  
 3W  
 5V DC  
 Driver not included  
 ON/OFF  
 CE IP20

Standard - ON/OFF


| 1A3410000.00.00 |

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with plug / Alimentatore con spina		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 15W - IP40	1Z1470180



Driver / Alimentatore		Not included
100-240V	5V/17,5W/IP20/ON/OFF	1Z1120180





An architectural lamp for wall and ceiling installation.  
Although it's there, you can't see the thickness.  
A luminaire that amazes with skill, so you only notice its two-dimensional effect.

Lampada architettuale, da installare sia a parete che a soffitto.  
Lo spessore c'è, ma non si vede. Apparecchio efficace e stupendo  
nel momento in cui si coglie solo l'aspetto bidimensionale.


# FOIL

967ARCH / 2011

Wall / Indirect / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. *Apparecchio illuminante da parete.*



## FOIL

24,5W  
220-230V - 50/60Hz  
2700K - 1681lm / 3000K - 1808lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3150300.27.02  
1A3150300.30.02  
1A3150400.27.02  
1A3150400.30.02



**An indirect wall light project.  
The light source remains invisible while the light comes out soft from the metal diffuser,  
creating a delicate atmosphere.**

Un lavoro sulla luce indiretta da parete.  
La sorgente rimane invisibile mentre la luce esce morbida dal diffusore metallico,  
creando un'atmosfera delicata.

## FOLDER


967ARCH / 2011

Wall / Indirect / Indoor

Material Metal  
Finish .03 Matt White

Note Wall luminaire.

*Apparecchio illuminante da parete.*



### FOLDER

20W

110-240V - 50/60Hz

2700K - 397lm / 3000K - 415lm

CRI >80

Driver integrated

DALI

CE IP20


Matt White - 2700K - DALI

1A3350300.27.01

Matt White - 3000K - DALI

1A3350300.30.01





FOLDER



502

DO NOT DISTURB

Golden Crown Hotel  
Prague





A tool to light.

The luminaire is pure form, a simple container for the light source.

Single-emission lamp with light directed downwards.

Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.

Lampada monoemissione con luce direzionata verso il basso.

La luce si integra con lo spazio diventando elemento architettonico.


# LINET

Omar Carraglia / 2014

Wall / Diffuse / Indoor

**Material** Metal - Methacrylate  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. *Apparecchio illuminante da parete.*



## LINET

11,5W  
220-240V - 50/60Hz  
2700K - 626lm / 3000K - 655lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3310300.27.02  
1A3310300.30.02  
1A3310400.27.02  
1A3310400.30.02





Lamp with a simple and essential shape.  
For interiors and adjustable.  
Luminaire available also in ENDLESS version.


Lampada dalla forma semplice ed essenziale.  
Per interni e orientabile.  
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Wall-Ceiling / Direct / Indoor

<b>Material</b>	Metal
<b>Finish</b>	<b>.03</b> Matt White <b>.04</b> Matt Black <b>.49</b> Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. MIRA ENDLESS and MIRA ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante da parete. Orientabile in tutte le direzioni. MIRA ENDLESS e MIRA ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*


**MIRA**

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
PUSH

CE IP20

Matt White - 2700K - PUSH  
Matt White - 3000K - PUSH  
Matt Black - 2700K - PUSH  
Matt Black - 3000K - PUSH  
Matt Black/Polished Gold - 2700K - PUSH  
Matt Black/Polished Gold - 3000K - PUSH

1A2280300.27.04  
1A2280300.30.04  
1A2280400.27.04  
1A2280400.30.04  
1A2284900.27.04  
1A2284900.30.04


**MIRA SWITCH**

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
ON/OFF

CE IP20

Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF  
Matt Black/Polished Gold - 2700K - ON/OFF  
Matt Black/Polished Gold - 3000K - ON/OFF

1A2280300.27.00  
1A2280300.30.00  
1A2280400.27.00  
1A2280400.30.00  
1A2284900.27.00  
1A2284900.30.00


**MIRA ENDLESS**

ENDLESS version only  
6W - 0,16A  
48V DC  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver not included  
See page ENDLESS

CE IP20 E

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Matt Black/Polished Gold - 2700K  
Matt Black/Polished Gold - 3000K

1A2280300.27.40  
1A2280300.30.40  
1A2280400.27.40  
1A2280400.30.40  
1A2284900.27.40  
1A2284900.30.40


**MIRA**

8W  
110-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI  
Matt Black/Polished Gold - 2700K - DALI  
Matt Black/Polished Gold - 3000K - DALI

1A2280300.27.01  
1A2280300.30.01  
1A2280400.27.01  
1A2280400.30.01  
1A2284900.27.01  
1A2284900.30.01


**MIRA ENDLESS CASAMBI**

ENDLESS version only  
7W - 0,18A  
48V DC  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver not included  
See page ENDLESS

CE IP20 E A

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Matt Black/Polished Gold - 2700K  
Matt Black/Polished Gold - 3000K

1A2280300.27.41  
1A2280300.30.41  
1A2280400.27.41  
1A2280400.30.41  
1A2284900.27.41  
1A2284900.30.41







## MIRA MAGNETIC

Omar Carraglia / 2015

Lamp with a simple and essential shape.  
For interiors and adjustable, it is designed with a magnetic application system  
to be even more versatile and functional.

Lampada dalla forma semplice ed essenziale.  
Per interni e orientabile, è concepita con un sistema di applicazione magnetico  
per essere ancora più versatile e funzionale.


# MIRA MAGNETIC

Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

<b>Material</b>	Metal		
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.49</b> Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. Magnetic fixing. *Apparecchio illuminante da parete. Orientabile in tutte le direzioni.*  
 Dimmer on the cable. White cable for the matt white finish, black cable for *Fissaggio magnetico. Dimmer lungo il cavo. Cavo bianco per la finitura*  
 the other finishes. *bianco opaco e cavo nero per le altre finiture.*



## MIRA MAGNETIC


5,6W  
 Max 500mA DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included

CE IP20


Matt White - 2700K	1A3680300.27.20
Matt White - 3000K	1A3680300.30.20
Matt Black - 2700K	1A3680400.27.20
Matt Black - 3000K	1A3680400.30.20
Matt Black/Polished Gold - 2700K	1A3684900.27.20
Matt Black/Polished Gold - 3000K	1A3684900.30.20

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




<b>Driver with plug / Alimentatore con spina</b>		<b>Not included</b>
Matt White	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180300.00.06
Matt Black	Input 110-240V - 50/60Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180400.00.06




<b>Driver / Alimentatore</b>		<b>Not included</b>
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500




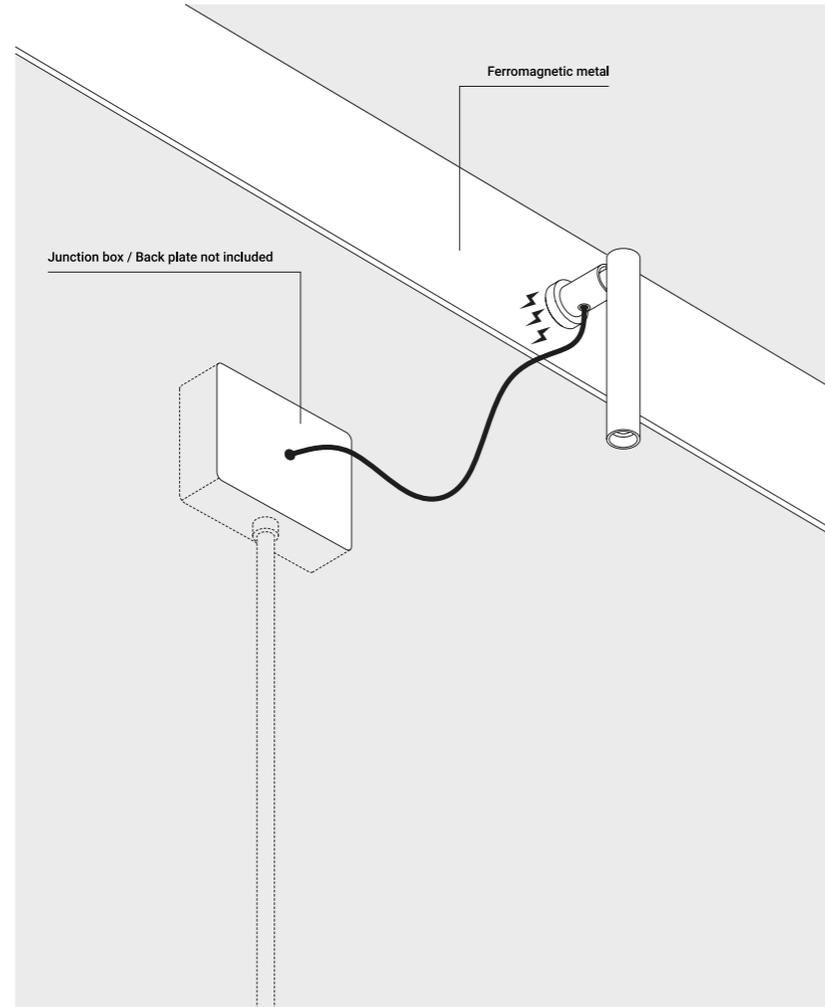

Example of installation with remote driver

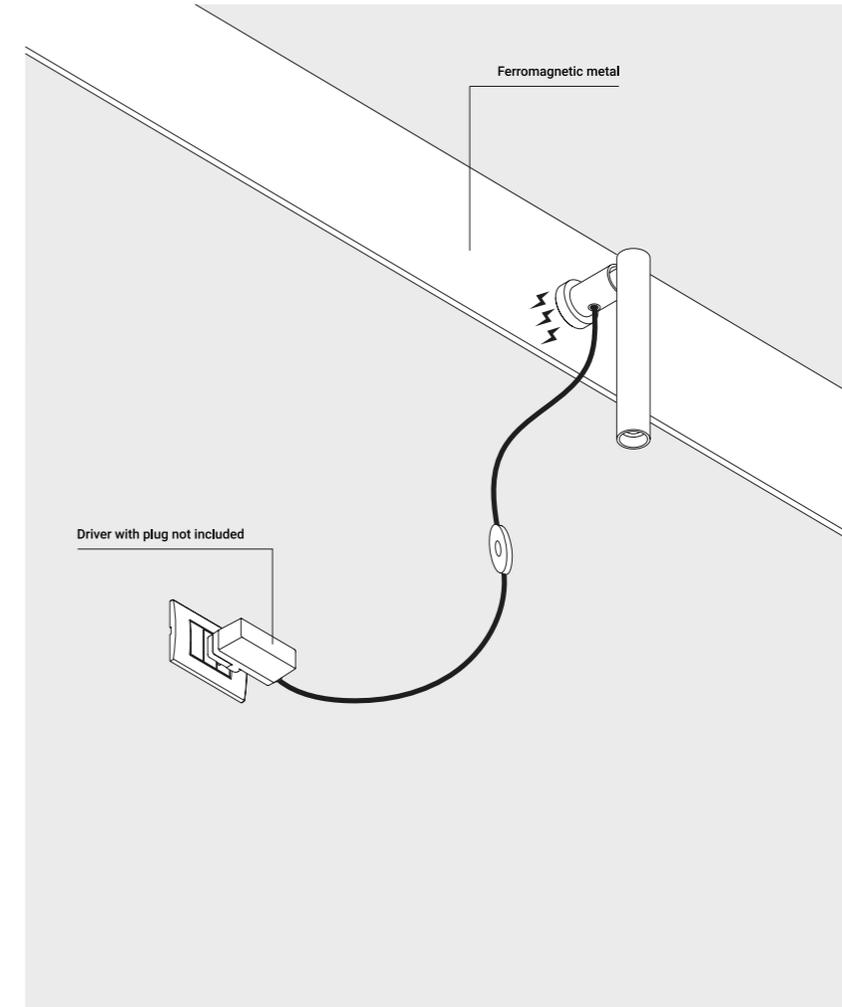

1A3180300.00.06 - 1A3180400.00.06 - Example of installation with driver with plug

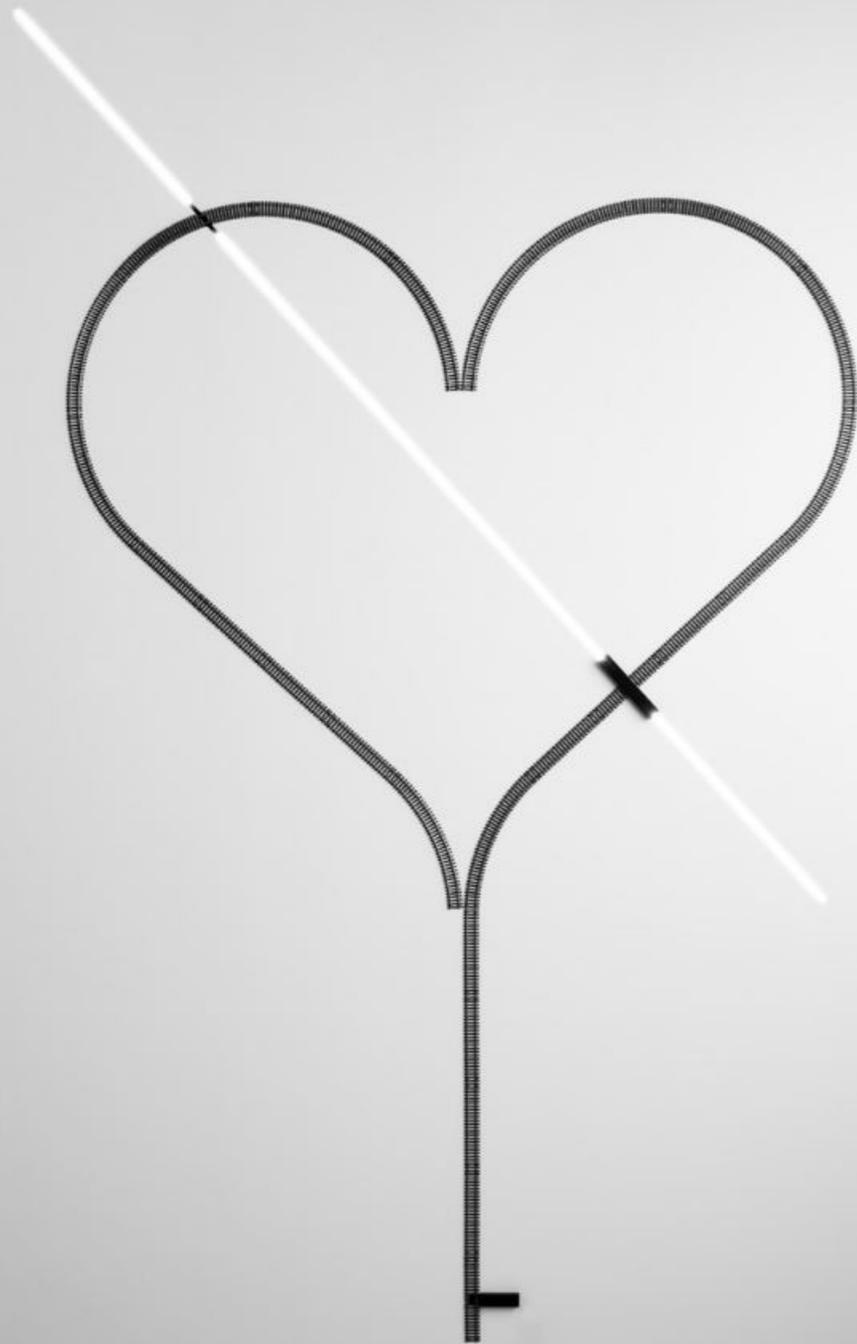

A ready-made project to design the space with a sense of irony and weightlessness.  
The tracks of an electric train can be used to draw a heart, but also to conduct electricity.  
Rail is the boundary between usefulness and show, between art and design.

Un ready-made per firmare lo spazio con ironia e leggerezza.  
I binari di un trenino elettrico sono lo strumento per disegnare un cuore,  
ma anche per condurre la corrente elettrica.  
Rail è sul confine tra utilità e rappresentazione, design e arte.


# RAIL

Davide Groppi / 2019

Wall / Direct / Indoor

**Material** ABS - Metal  
**Finish** .00 Standard


**Note** Wall luminaire. Matt black modular tracks. Dimmer on the cable. *Apparecchio illuminante da parete. Binari componibili nero opaco. Black cable. Dimmer lungo il cavo. Cavo nero.*

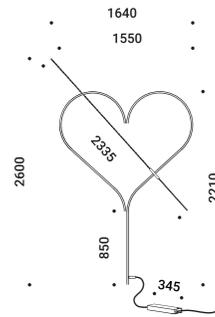

**RAIL**  
22W  
24V DC  
3000K - 2000lm  
CRI >90  
Driver included  
Dimmer on board  
CE IP20

Standard - 3000K - Dimmer on board

| 1A3400000.30.06 |

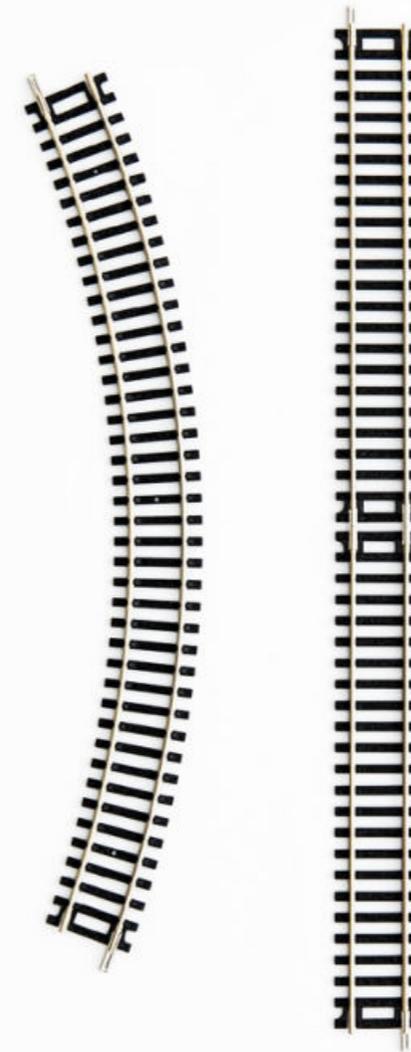



## REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.  
A magic and almost invisible lighting solution,  
which provides an indirect light that multiplies spaces  
and gives the eye unprecedented perspectives, unexpected depths, illusions of light.  
Suspension version also available.  
Luminaire designed also to be powered by ENDLESS system.

Un LED potente, uno specchio sottile.  
Un apparecchio magico e quasi invisibile per una luce che moltiplica gli spazi  
e regala allo sguardo prospettive inedite, profondità impreviste, illusioni di luce.  
Disponibile anche nella versione a sospensione.  
Apparecchio illuminante alimentabile anche con il sistema ENDLESS.


# REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

**Material** Metal - Mirror  
**Finish** .04 Matt Black

**Note** Wall luminaire. Plane with mirror finish. Matt black rear plane. *Apparecchio illuminante da parete. Piano con finitura a specchio. Retro del piano nero opaco. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.* *Apparecchio illuminante da parete. Piano con finitura a specchio. Retro del piano nero opaco. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*



**REFLEX**


40W - 1,04A  
 48V DC  
 2700K - 3676lm / 3000K - 3761lm  
 CRI >90  
 Driver not included  
 CE IP20 ENEC

Matt Black - 2700K  
 Matt Black - 3000K


1A5500400.27.20  
 1A5500400.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640



Driver / Alimentatore		Not included
220-240V	48V/60W/IP20/DALI	1Z0830820





Reflections of light.

The pure and essential form of a thin mirror wich provides indirect light.

Riflessioni di luce.

La forma pura ed essenziale di uno specchio sottile a luce indiretta.

# SHADE


Federico Delrosso / 2013

Wall / Indirect / Indoor

**Material** Metal - Mirror  
**Finish** .00 Standard

**Note** Wall luminaire. Plane with mirror finish. Dual emission.

*Apparecchio illuminante da parete. Piano con finitura a specchio. Doppia emissione.*



## SHADE

23W

220-240V - 50/60Hz

2700K - 1293lm / 3000K - 1352lm

CRI >90

TRIAC/IGBT

CE IP20


Standard - 2700K - TRIAC/IGBT

1A3360000.27.02

Standard - 3000K - TRIAC/IGBT

1A3360000.30.02



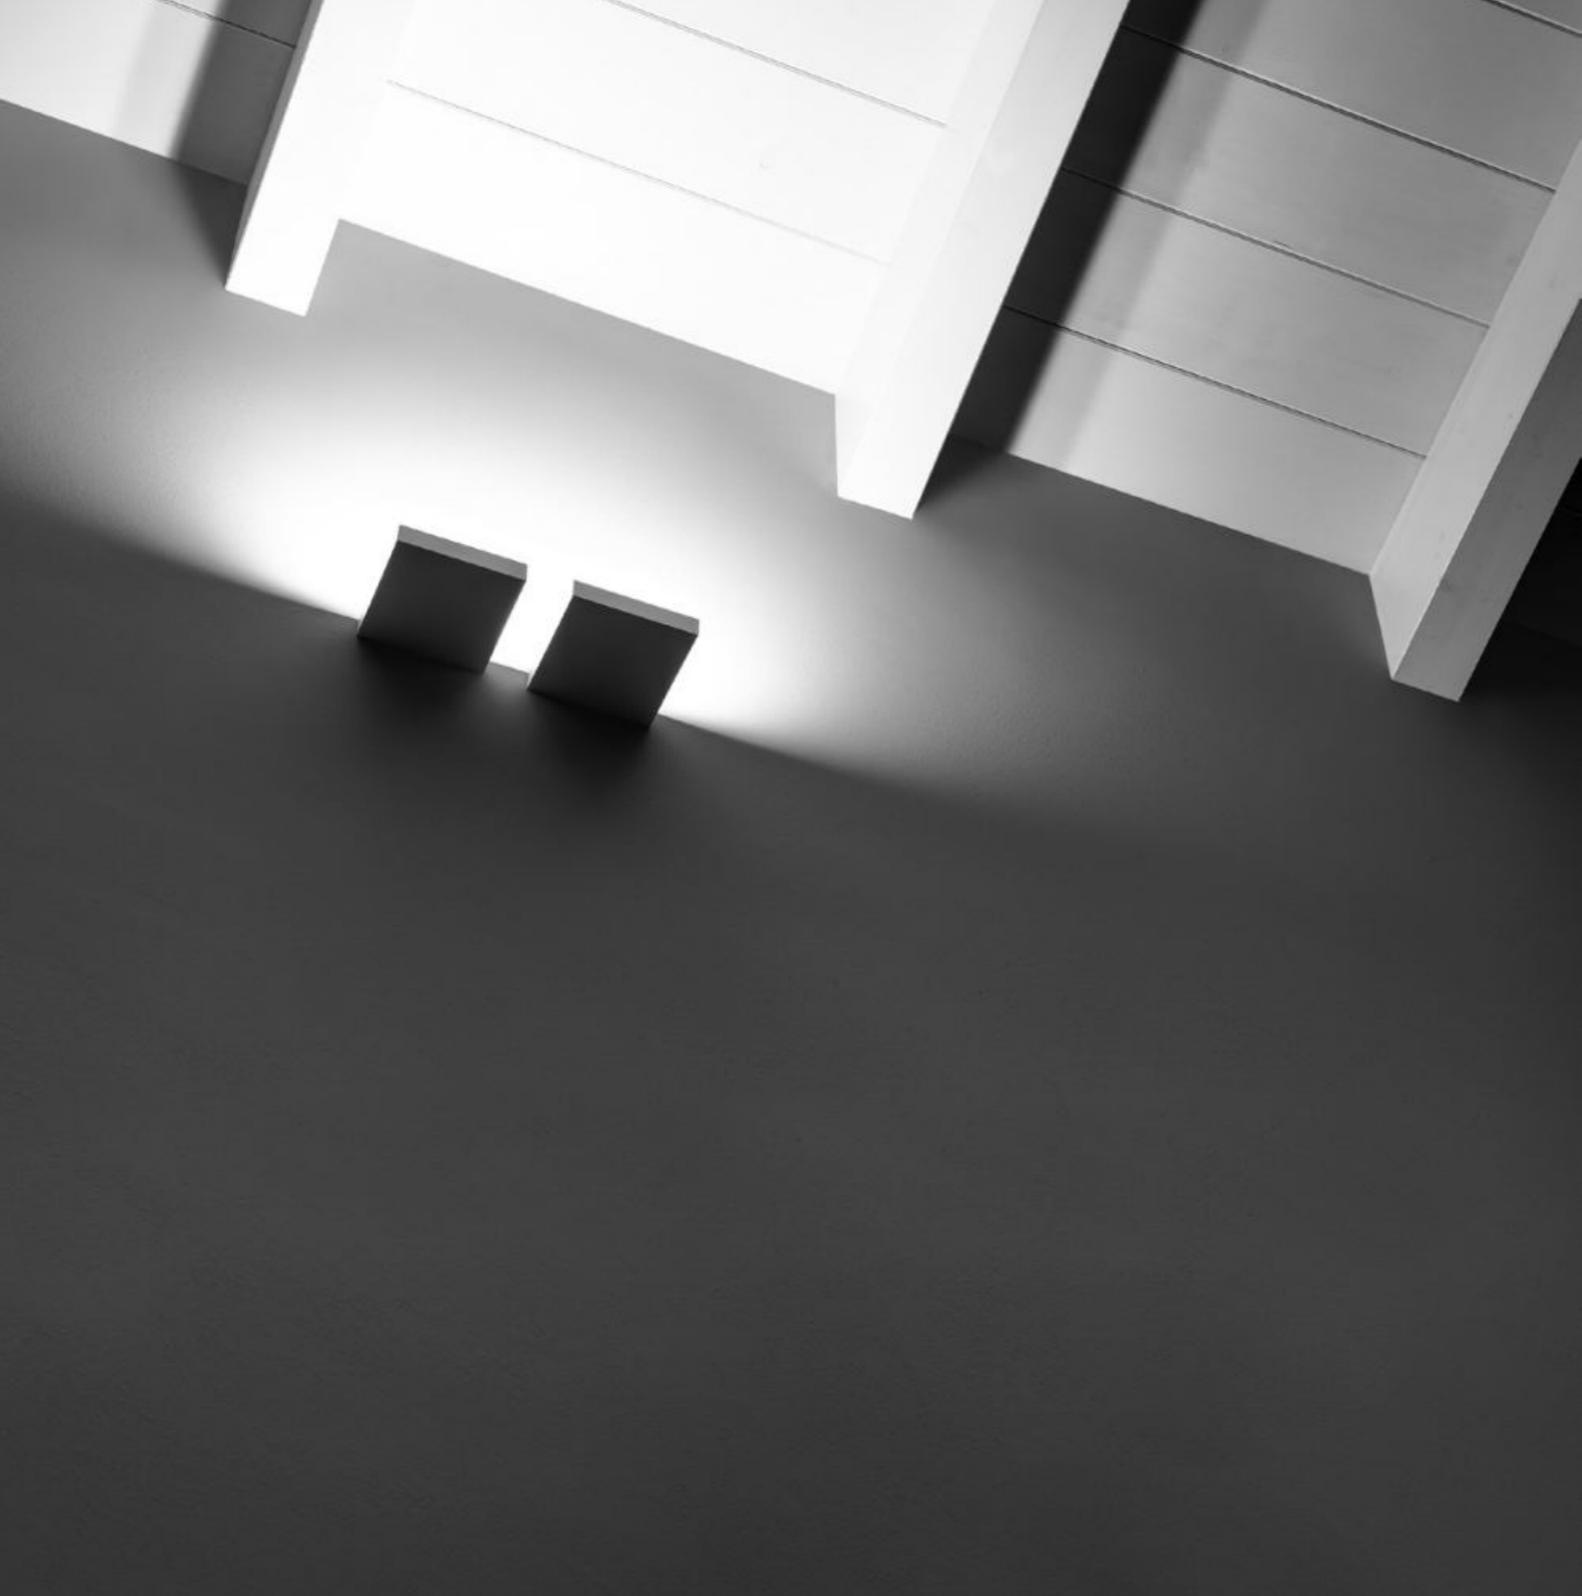

## SOL 1

Omar Carraglia - Davide Groppi / 2003

A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.


# SOL 1

Omar Carraglia - Davide Groppi / 2003

Wall / Indirect / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Wall luminaire. *Apparecchio illuminante da parete.*




## SOL 1

12,5W  
220-230V - 50/60Hz  
2700K - 836lm / 3000K - 899lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3130300.27.02  
1A3130300.30.02  
1A3130400.27.02  
1A3130400.30.02

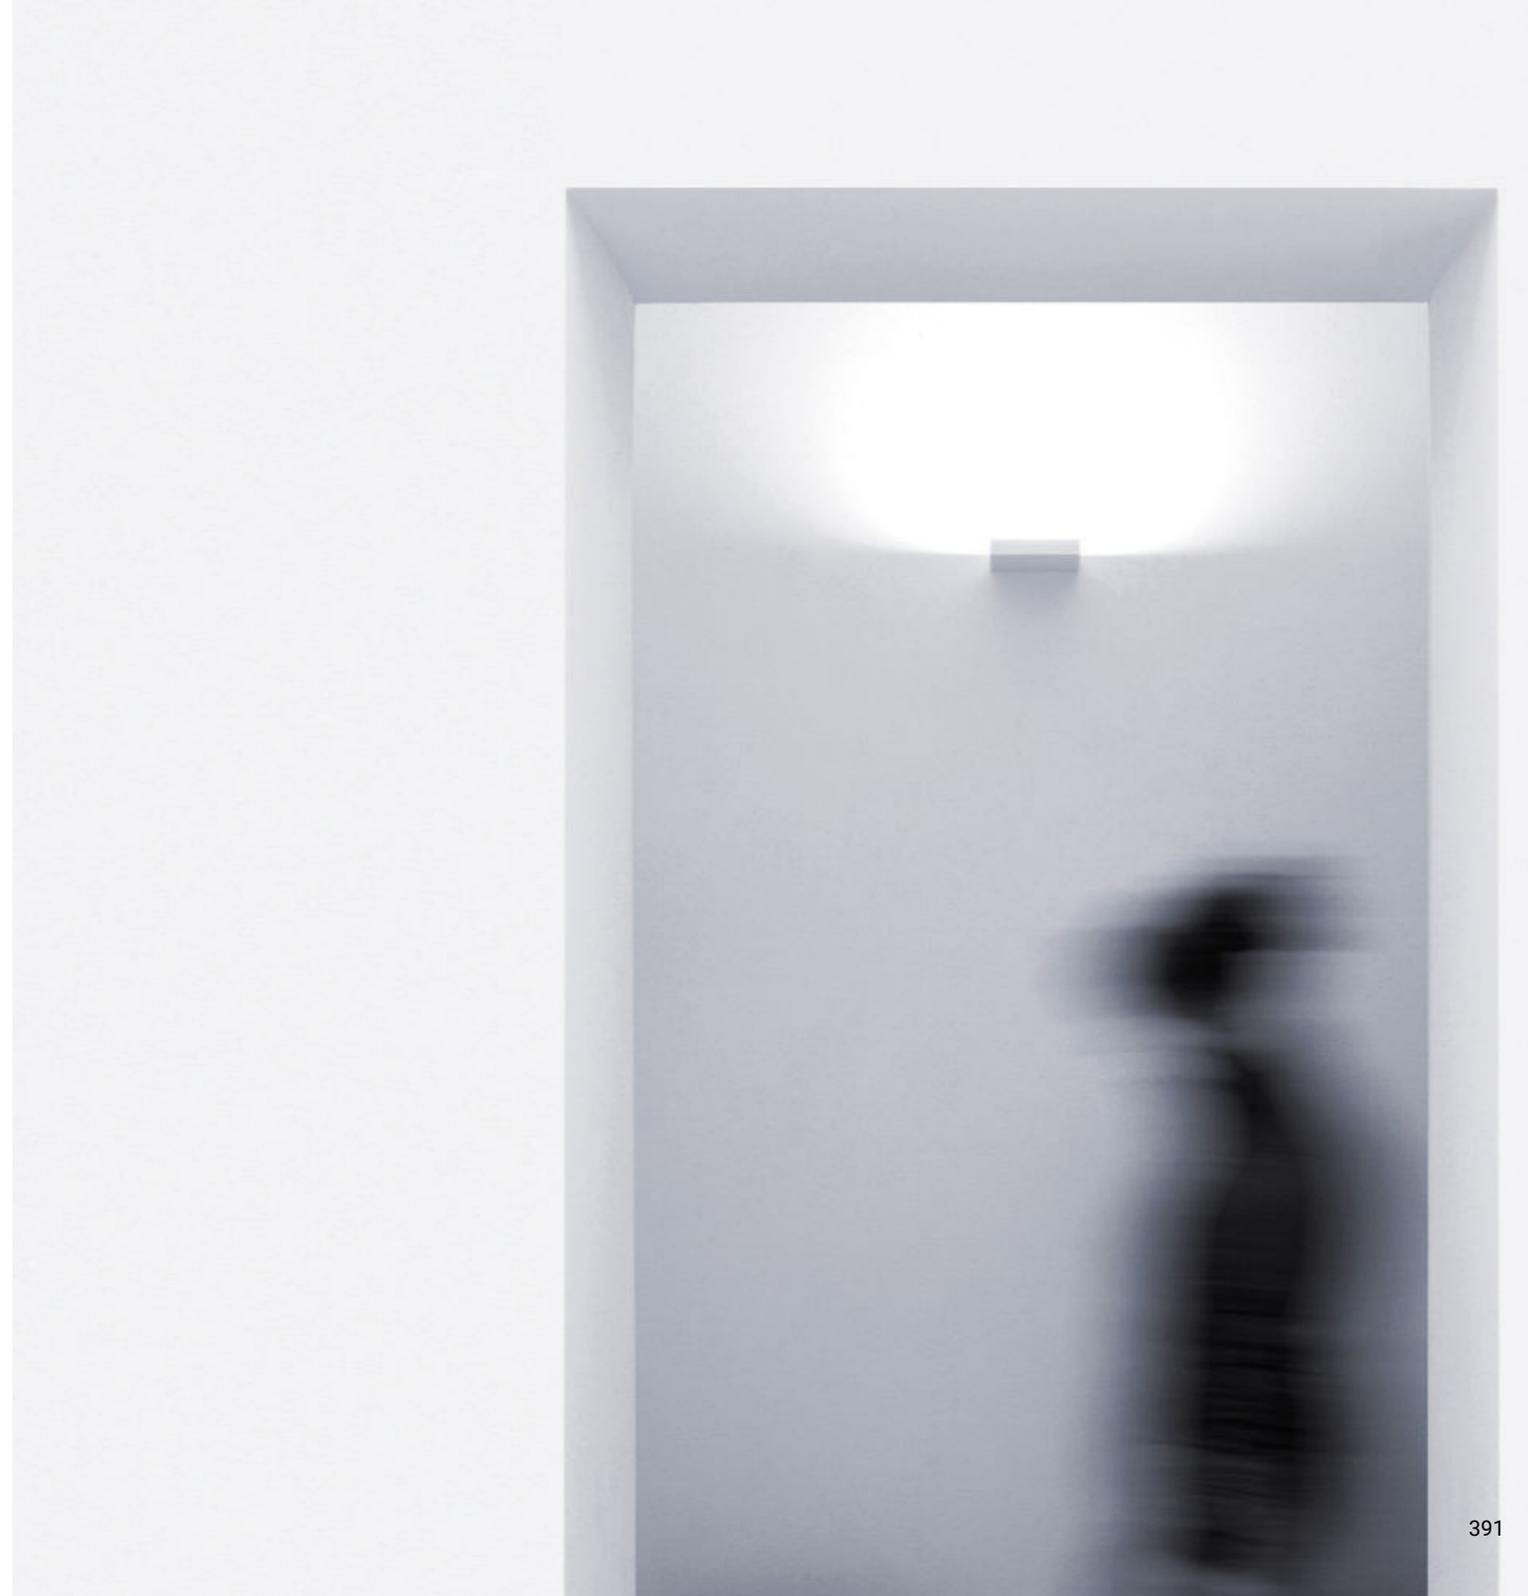



**A tool to light.**

**The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.**

**Elemento di luce.**

**Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.**


## SOL 2

/ 2008

Wall / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. *Apparecchio illuminante da parete.*




### SOL 2

24,5W  
220-230V - 50/60Hz  
2700K - 1681lm / 3000K - 1808lm  
CRI >90  
TRIAC/IGBT  
CE IP20

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT  
Matt Black - 2700K - TRIAC/IGBT  
Matt Black - 3000K - TRIAC/IGBT

1A3140300.27.02  
1A3140300.30.02  
1A3140400.27.02  
1A3140400.30.02

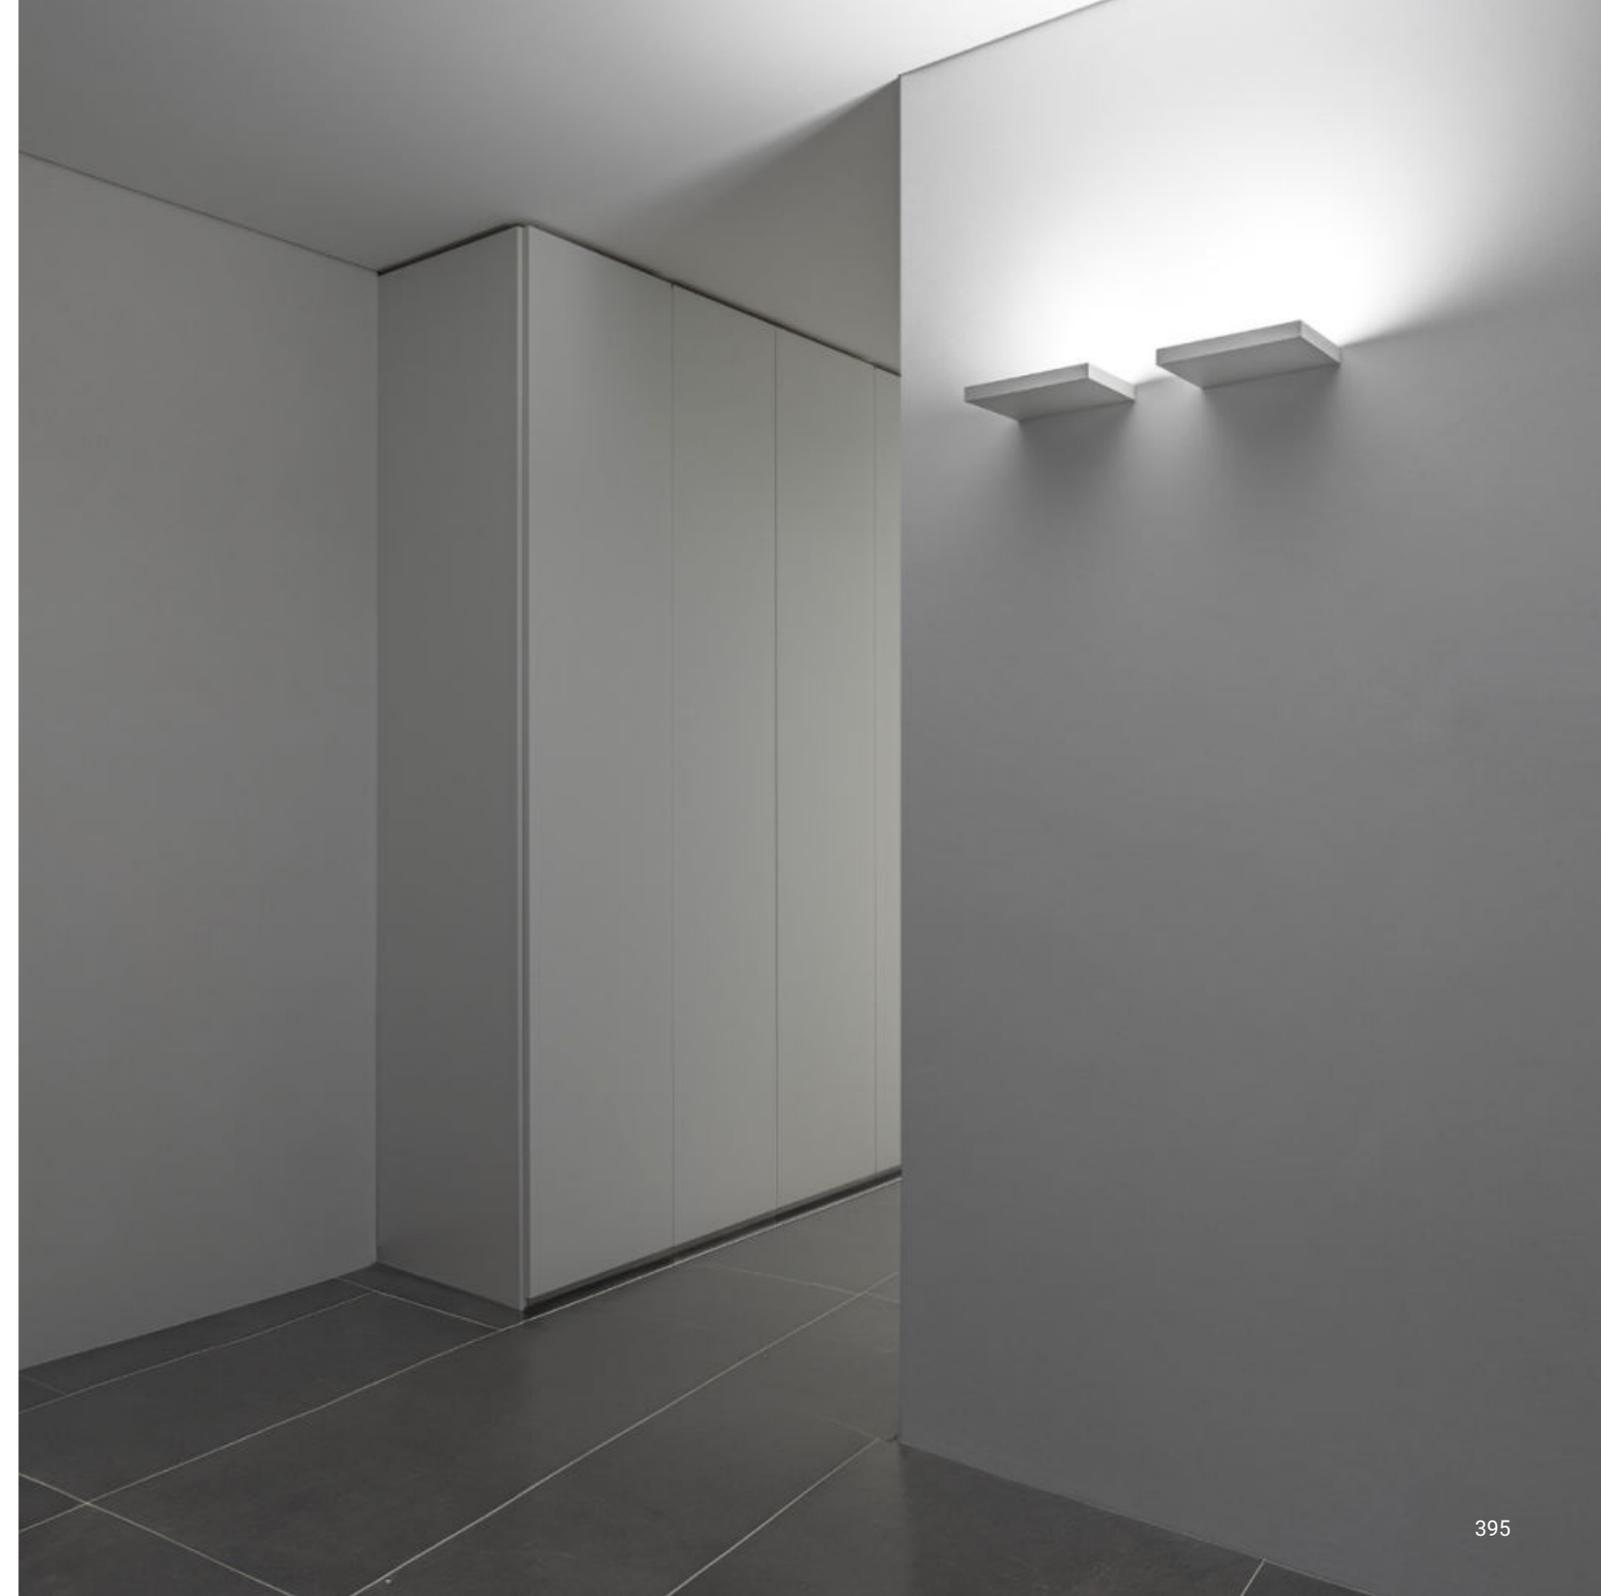



A luminaire designed for use with state-of-the-art LED modules  
to offer superior performance and a wide range of light beams.  
Luminaire available also in ENDLESS version.


Un apparecchio illuminante progettato per utilizzare moduli a LED in grado di fornire  
prestazioni superiori ed un'ampia gamma di fasci luminosi.  
Apparecchio illuminante disponibile anche nella versione ENDLESS.

Wall-Ceiling / Direct / Indoor

<b>Material</b>	Metal		
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.49</b> Matt Black/Polished Gold

**Note** Wall luminaire. Adjustable in all directions. SPOT ENDLESS and SPOT ENDLESS CASAMBI: luminaires dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). They can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante da parete. Orientabile in tutte le direzioni. SPOT ENDLESS e SPOT ENDLESS CASAMBI: apparecchi illuminanti dedicati al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**SPOT**

Max 21W  
220-240V - 50/60Hz  
Driver integrated  
DALI  
LED module not included

CE IP20

Matt White - DALI	1A1080300.00.01
Matt Black - DALI	1A1080400.00.01
Matt Black/Polished Gold - DALI	1A1084900.00.01




**SPOT**

Max 21W  
220-240V - 50/60Hz  
Driver integrated  
PUSH  
LED module not included

CE IP20

Matt White - PUSH	1A1080300.00.04
Matt Black - PUSH	1A1080400.00.04
Matt Black/Polished Gold - PUSH	1A1084900.00.04




**SPOT ENDLESS**

ENDLESS version only  
Max 13W - Max 0,34A  
48V DC  
Driver not included  
See page ENDLESS  
LED module not included

CE IP20

Matt White	1A1080300.00.40
Matt Black	1A1080400.00.40
Matt Black/Polished Gold	1A1084900.00.40



**SPOT ENDLESS CASAMBI**


ENDLESS version only  
Max 15,5W - Max 0,4A  
48V DC  
Driver not included  
See page ENDLESS  
LED module not included

CE IP20


Matt White	1A1080300.00.41
Matt Black	1A1080400.00.41
Matt Black/Polished Gold	1A1084900.00.41

Compulsory accessories / Accessori obbligatori


LED modules / Moduli LED




<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
16,7W - 15° - 500mA DC	SPOT	1A4700000.27.20	
2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable			
16,7W - 15° - 500mA DC		1A4700000.30.20	
3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable			




<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
16,7W - 22° - 500mA DC	SPOT	1A3890000.27.20	
2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable			
16,7W - 22° - 500mA DC		1A3890000.30.20	
3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable			




<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
16,7W - 36° - 500mA DC	SPOT	1A3900000.27.20	
2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable			
16,7W - 36° - 500mA DC		1A3900000.30.20	
3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable			



<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
11,7W - 15° - 350mA DC	SPOT ENDLESS /	1A4700000.27.20	
2700K - 1336lm - CRI >90 Energy Efficiency F - Dimmable			
11,7W - 15° - 350mA DC	SPOT ENDLESS CASAMBI	1A4700000.30.20	
3000K - 1364lm - CRI >90 Energy Efficiency F - Dimmable			




<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
11,7W - 22° - 350mA DC	SPOT ENDLESS /	1A3890000.27.20	
2700K - 1322lm - CRI >90 Energy Efficiency F - Dimmable			
11,7W - 22° - 350mA DC	SPOT ENDLESS CASAMBI	1A3890000.30.20	
3000K - 1382lm - CRI >90 Energy Efficiency F - Dimmable			




<b>DG111 LED module / Modulo LED DG111</b> <span style="float: right;">Not included</span>			
11,7W - 36° - 350mA DC	SPOT ENDLESS /	1A3900000.27.20	
2700K - 1276lm - CRI >90 Energy Efficiency F - Dimmable			
11,7W - 36° - 350mA DC	SPOT ENDLESS CASAMBI	1A3900000.30.20	
3000K - 1343lm - CRI >90 Energy Efficiency F - Dimmable			

Optional accessories / Accessori opzionali


Other accessories / Altri accessori




<b>Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape</b> <span style="float: right;">Not included</span>		
Matt Black		1X0070400.04.00




<b>Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico</b> <span style="float: right;">Not included</span>		
Matt Black		1X0070400.05.00




<b>Blue filter / Filtro blu</b> <span style="float: right;">Not included</span>		
Standard	Compulsory with	1X0070000.06.00
	1X0070400.04.00 / 1X0070400.05.00	




<b>Red filter / Filtro rosso</b> <span style="float: right;">Not included</span>		
Standard	Compulsory with	1X0070000.07.00
	1X0070400.04.00 / 1X0070400.05.00	




<b>Yellow filter / Filtro giallo</b> <span style="float: right;">Not included</span>		
Standard	Compulsory with	1X0070000.08.00
	1X0070400.04.00 / 1X0070400.05.00	



<b>Directional fins / Alette direzionali</b> <span style="float: right;">Not included</span>		
Matt Black		1X0070400.01.00



<b>Cylindrical screen / Schermo cilindrico</b> <span style="float: right;">Not included</span>		
Matt Black		1X0070400.02.00



<b>Cone 45° / Cono 45°</b> <span style="float: right;">Not included</span>		
Matt Black		1X0070400.03.00





## TOAST

Daide Groppi - Alberto Zattin / 2001

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

# TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

<b>Material</b>	Glass - Metal			
<b>Finish</b>	<b>.01</b> Polished Chrome	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.08</b> Brushed Brass
	<b>.14</b> Brushed Chrome			
<b>Note</b>	Wall luminaire. Dual emission.		<i>Apparecchio illuminante da parete. Doppia emissione.</i>	




## TOAST

Max 100W - R7s  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20  $\varnothing$  0,5m

Polished Chrome - ON/OFF  
Matt White - ON/OFF  
Matt Black - ON/OFF  
Brushed Brass - ON/OFF  
Brushed Chrome - ON/OFF

1A3290100.00.00  
1A3290300.00.00  
1A3290400.00.00  
1A3290800.00.00  
1A3291400.00.00



## TOAST LED

12W  
100-240V - 50/60Hz  
2700K - 743lm / 3000K - 743lm  
CRI >90  
Driver integrated  
ON/OFF  
CE IP20

Polished Chrome - 2700K - ON/OFF  
Polished Chrome - 3000K - ON/OFF  
Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF  
Matt Black - 2700K - ON/OFF  
Matt Black - 3000K - ON/OFF  
Brushed Brass - 2700K - ON/OFF  
Brushed Brass - 3000K - ON/OFF  
Brushed Chrome - 2700K - ON/OFF  
Brushed Chrome - 3000K - ON/OFF

1A3280100.27.00  
1A3280100.30.00  
1A3280300.27.00  
1A3280300.30.00  
1A3280400.27.00  
1A3280400.30.00  
1A3280800.27.00  
1A3280800.30.00  
1A3281400.27.00  
1A3281400.30.00

## Optional accessories / Accessori opzionali

Bulbs / Lampadine




LED - R7s COB - 78 mm

220-240V - 4W - 330°  
3000K - 450lm - CRI >80  
Energy Efficiency E

1Y0000138

Not included

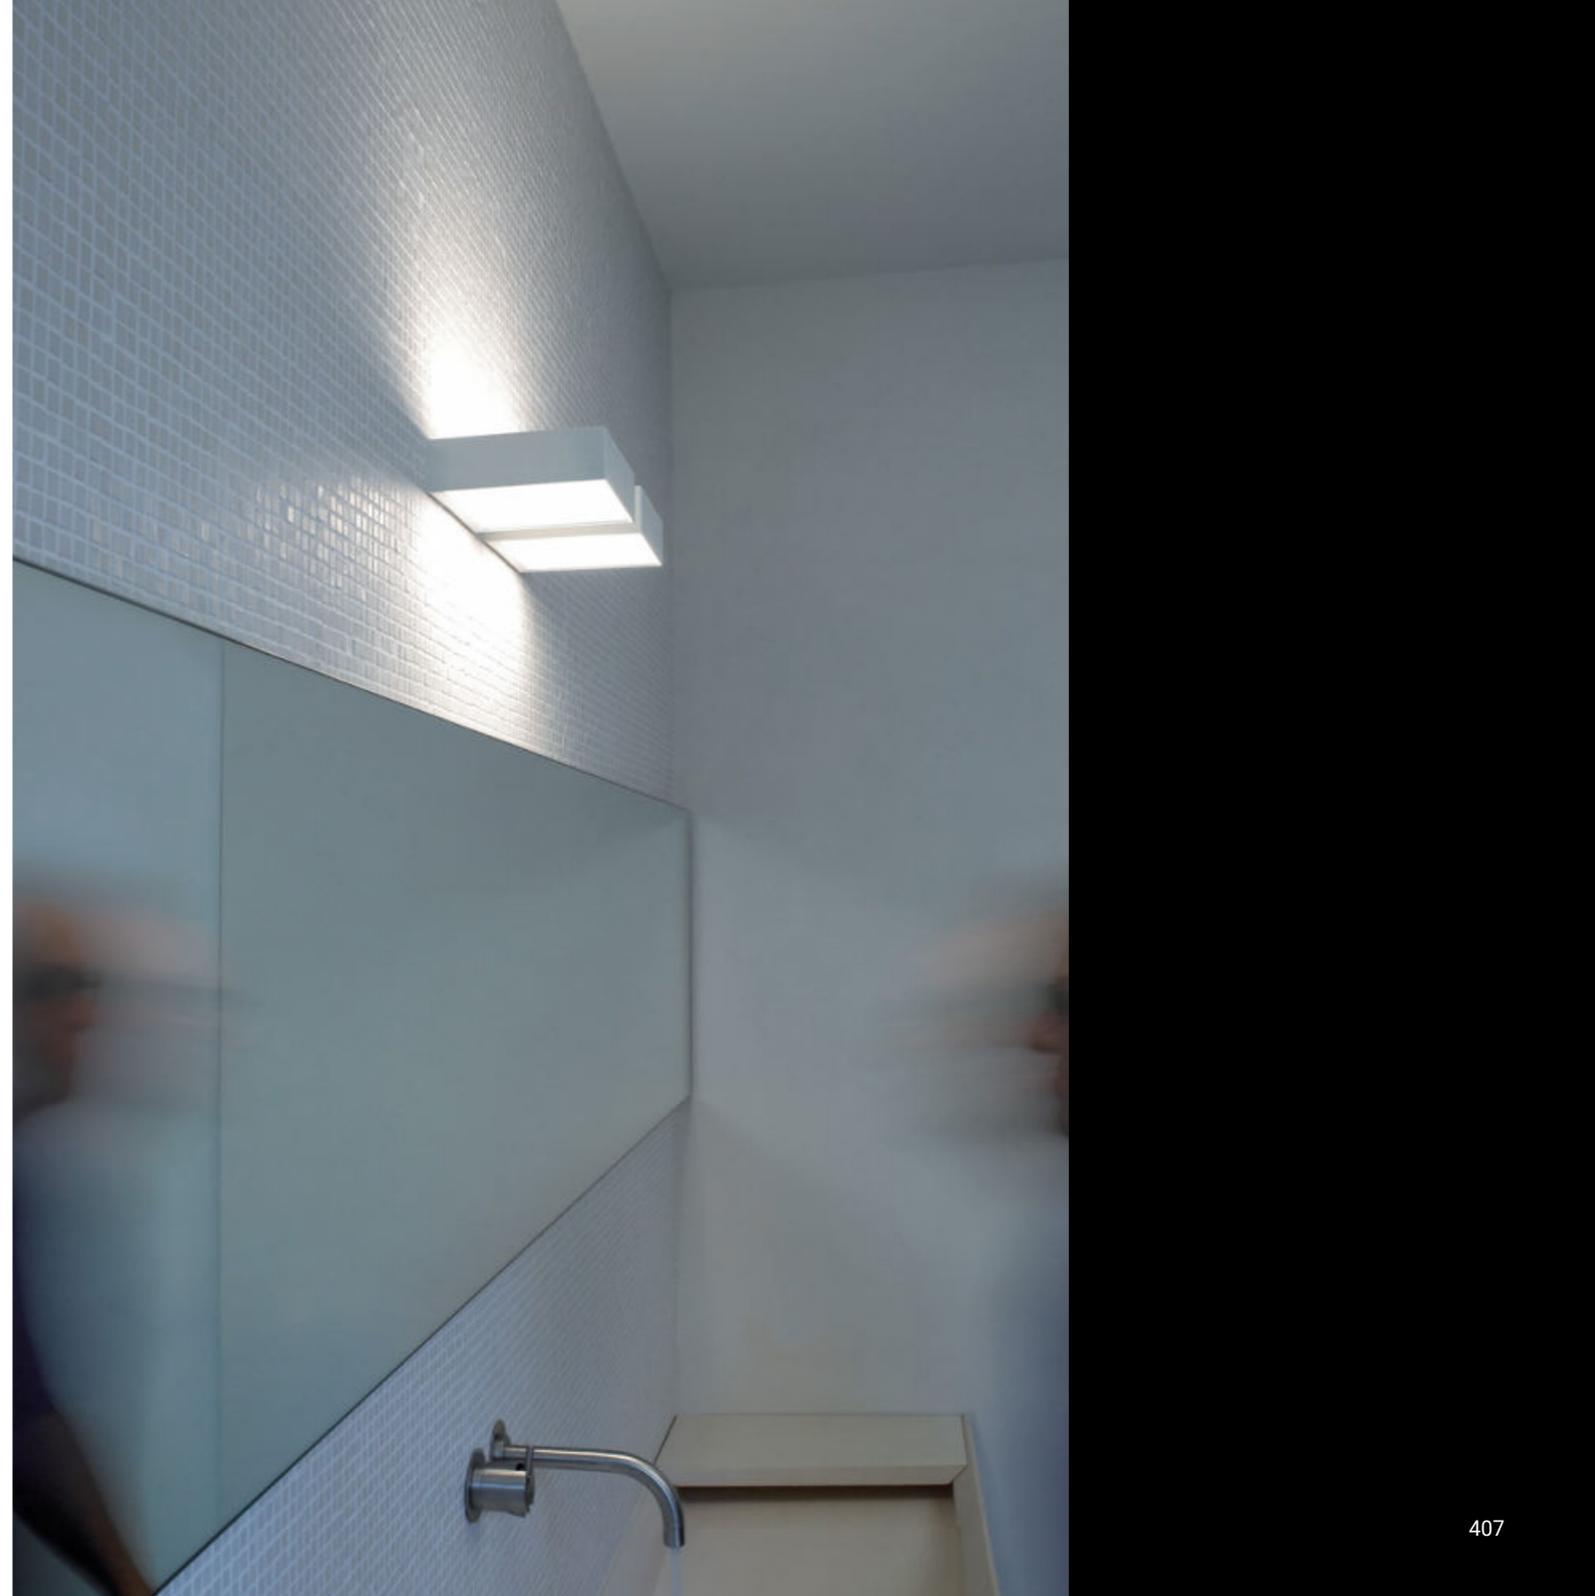

Private Residence  
Montecarlo





## **VICEVERSA**

Daide Groppi / 2024


**A simple and elegant wall lamp.  
The light is projected both upwards and downwards,  
offering incredible lightness to the design.**

Una lampada da parete, semplice ed elegante.  
La luce viene diffusa sia verso l'alto che verso il basso  
e regala al progetto grande leggerezza.

Wall / Diffuse / Indoor

**Material** Metal  
**Finish** .03 Matt White .39 Matt White/Polished Gold .49 Matt Black/Polished Gold


**Note** Wall-mounted luminaire. Dual emission. *Apparecchio illuminante da parete. Doppia emissione.*



**VICEVERSA**

28W  
 110-240V - 50/60Hz  
 2700K - Up 3000lm - Down 140lm /  
 3000K - Up 3200lm - Down 144lm  
 CRI >90  
 Driver integrated  
 DALI  
**CE IP20**


Matt White - 2700K - DALI	1A5310300.27.01
Matt White - 3000K - DALI	1A5310300.30.01
Matt White/Polished Gold - 2700K - DALI	1A5313900.27.01
Matt White/Polished Gold - 3000K - DALI	1A5313900.30.01
Matt Black/Polished Gold - 2700K - DALI	1A5314900.27.01
Matt Black/Polished Gold - 3000K - DALI	1A5314900.30.01



**VICEVERSA**

28W  
 110-240V - 50/60Hz  
 2700K - Up 3000lm - Down 140lm /  
 3000K - Up 3200lm - Down 144lm  
 CRI >90  
 Driver integrated  
 PUSH  
**CE IP20**


Matt White - 2700K - PUSH	1A5310300.27.04
Matt White - 3000K - PUSH	1A5310300.30.04
Matt White/Polished Gold - 2700K - PUSH	1A5313900.27.04
Matt White/Polished Gold - 3000K - PUSH	1A5313900.30.04
Matt Black/Polished Gold - 2700K - PUSH	1A5314900.27.04
Matt Black/Polished Gold - 3000K - PUSH	1A5314900.30.04



**VICEVERSA**

28W  
 110-240V - 50/60Hz  
 2700K - Up 3000lm - Down 140lm /  
 3000K - Up 3200lm - Down 144lm  
 CRI >90  
 Driver integrated  
 1-10V  
**CE IP20**

Matt White - 2700K - 1-10V	1A5310300.27.03
Matt White - 3000K - 1-10V	1A5310300.30.03
Matt White/Polished Gold - 2700K - 1-10V	1A5313900.27.03
Matt White/Polished Gold - 3000K - 1-10V	1A5313900.30.03
Matt Black/Polished Gold - 2700K - 1-10V	1A5314900.27.03
Matt Black/Polished Gold - 3000K - 1-10V	1A5314900.30.03



**VICEVERSA**

28W  
 110-240V - 50/60Hz  
 2700K - Up 3000lm - Down 140lm /  
 3000K - Up 3200lm - Down 144lm  
 CRI >90  
 Driver integrated  
 TRIAC/IGBT  
**CE IP20**

Matt White - 2700K - TRIAC/IGBT	1A5310300.27.02
Matt White - 3000K - TRIAC/IGBT	1A5310300.30.02
Matt White/Polished Gold - 2700K - TRIAC/IGBT	1A5313900.27.02
Matt White/Polished Gold - 3000K - TRIAC/IGBT	1A5313900.30.02
Matt Black/Polished Gold - 2700K - TRIAC/IGBT	1A5314900.27.02
Matt Black/Polished Gold - 3000K - TRIAC/IGBT	1A5314900.30.02



**CEILING / SOFFITTO**



## ASINTOTO

Davide Groppi / 2023


Abstraction, purity, graphic sign.  
The projected reduction of Infinito.  
The disc appears enigmatic, the symbolic presence of the absence of light.

Astrazione, purezza, segno grafico.  
La riduzione puntuale di Infinito.  
Il disco appare enigmatico, presenza simbolica dell'assenza della luce.

Ceiling / Indirect / Indoor

**Material** Metal - Methacrylate  
**Finish** .27 Gravity Black

**Note** Ceiling luminaire. Disc with Gravity Black finish. Magnetic weight available for disc tilting. Black cable. *Apparecchio illuminante da soffitto. Disco con finitura Gravity Black. Disponibile un peso magnetico per l'orientamento inclinato del disco. Cavo nero.*



**ASINTOTO**


18W  
 Max 500mA DC  
 2700K - 1435lm / 3000K - 1481lm  
 CRI >90  
 Driver not included  
 CE IP20

Gravity Black - 2700K  
 Gravity Black - 3000K


1A4072700.27.20  
 1A4072700.30.20

**Compulsory accessories / Accessori obbligatori**


Drivers / Alimentatori



Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0241180.500




Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



Driver / Alimentatore	Not included
220-240V 500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



Circular plasterboard panel 12,5 mm / Botola circolare per cartongesso 12,5 mm		Not included
Standard	Cut-out 400x400 mm Minimum space for mounting 115 mm	1A4520000.00.00



Remote clamp for electrical cable / Bloccacavo remoto per cavo elettrico		Not included
Standard		1X0110000.01.00


Suspension kits / Kit di sospensione



Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling suspension kit / Kit di sospensione da soffitto		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00





Wall adapter plate / Piastra di adattamento da parete		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Other accessories / Altri accessori



Magnetic weight / Peso magnetico		Not included
Matt Black	For sloped installation	1A4710400.00.00





A white disc, the perfect representation of diffused light.  
It can be mounted on the wall or ceiling, with modular brightness.

Un disco bianco, rappresentazione perfetta della luce diffusa.  
È applicabile a soffitto o a parete ed è modulabile in tutte le intensità.

# AURORA

Davide Groppi / 2023


Ceiling-Wall / Diffuse / Indoor

Material Metal - PMMA

Finish **.03** Matt White **.04** Matt Black **.32** Copper Oxide

Note Wall and ceiling luminaire. Matt white diffuser.

*Apparecchio illuminante da parete e soffitto. Diffusore bianco opaco.*



## AURORA

28W

110-240V - 50/60Hz

3000K - 2700lm

CRI >80

Driver integrated

DALI - PUSH - 1-10V

CE IP20

Matt White - 3000K - DALI - PUSH - 1-10V

1A4010300.30.07

Matt Black - 3000K - DALI - PUSH - 1-10V

1A4010400.30.07

Copper Oxide - 3000K - DALI - PUSH - 1-10V

1A4013200.30.07

**Spazio Davide Groppi**  
Madrid



## DOT PL 51

Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED bulbs  
to offer superior performance and a wide range of light beams.

Elemento di luce.

Un apparecchio illuminante progettato per utilizzare lampadine a LED  
in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.

# DOT PL 51

Omar Carraglia - Davide Groppi / 2015

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Ceiling luminaire.

*Apparecchio illuminante da soffitto.*



## DOT PL 51

Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Matt White - ON/OFF

| 1A3800300.00.00 |

# DOT PL 51

Omar Carraglia - Davide Groppi / 2015

## Optional accessories / Accessori opzionali

### Bulbs / Lampadine



#### LED - GU10 - PAR16

220-240V - 5,5W - 25°  
 3000K - 375lm - CRI >97  
 Energy Efficiency G - Dimmable

1Y0330500

Not included



#### LED SORAA - GU10 - MR16

230V - 7,5W - 10°  
 2700K - 390lm - CRI >95  
 Energy Efficiency G - Dimmable

1Y1580210

Not included




#### LED SORAA - GU10 - MR16

230V - 7,5W - 10°  
 3000K - 410lm - CRI >95  
 Energy Efficiency G - Dimmable

1Y1580010

Not included

### Other accessories / Altri accessori




#### Darklight

LED SORAA - GU10 - MR16

1Y1580040

Not included




#### 25° beam filter / Filtro fascio 25°

LED SORAA - GU10 - MR16

1Y1580020

Not included



#### 36° beam filter / Filtro fascio 36°

LED SORAA - GU10 - MR16

1Y1580030

Not included

Cracco Restaurant  
Milano



## HAKO PL

Alberto Zattin / 2000



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

## HAKO PL

Alberto Zattin / 2000


Ceiling / Diffuse / Indoor

Material Metal - Methacrylate

Finish .03 Matt White

Note Ceiling luminaire. Sanded glass diffuser.

*Apparecchio illuminante da soffitto. Diffusore in vetro sabbato.*



### HAKO PL

12,5W

220-230V - 50/60Hz

2700K - 593lm / 3000K - 638lm

CRI >90

TRIAC/IGBT


CE IP20

Matt White - 2700K - TRIAC/IGBT

1A3160300.27.02

Matt White - 3000K - TRIAC/IGBT

1A3160300.30.02

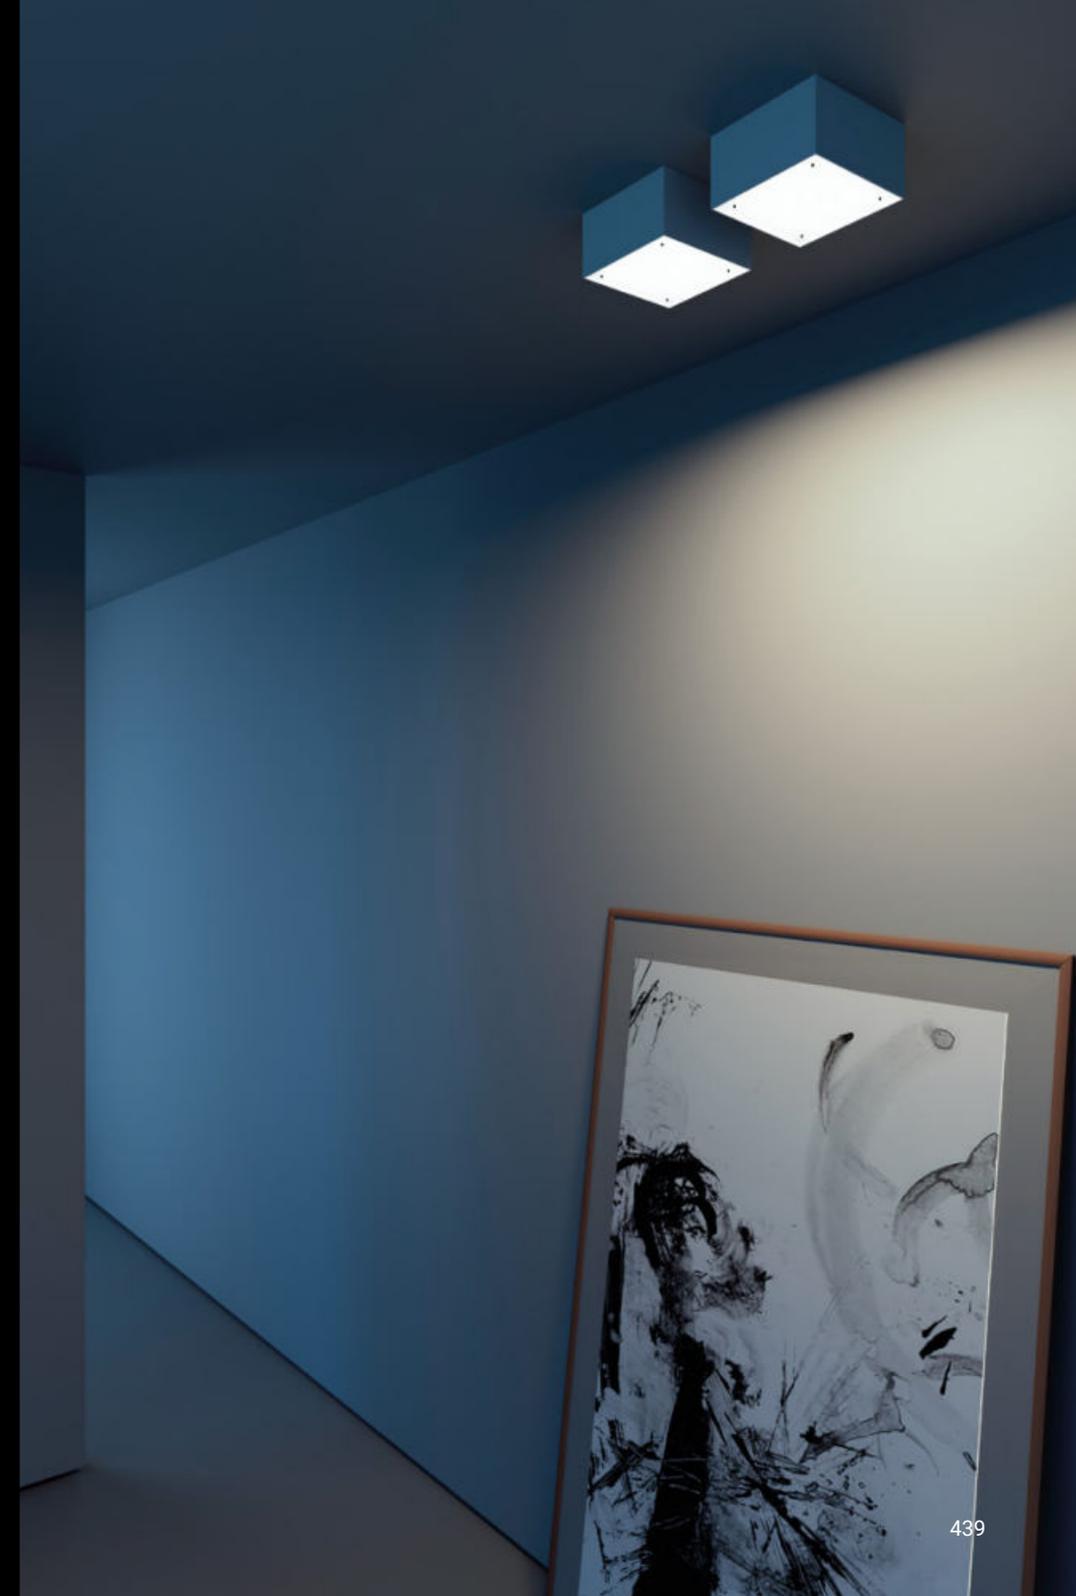




The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions. *Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.*



**MINI PL 51**

Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF  
 Bulb not included  
 CE IP20

Matt White - ON/OFF  
 Matt White/Black Bicolor - ON/OFF

1A3450300.00.00  
 1A3453400.00.00

**Optional accessories / Accessori opzionali**

**Bulbs / Lampadine**



<b>LED - GU10 - PAR16</b>	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


**Other accessories / Altri accessori**



<b>Darklight</b>	Not included
LED SORAA - GU10 - MR16	1Y1580040




<b>25° beam filter / Filtro fascio 25°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580020



<b>36° beam filter / Filtro fascio 36°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580030

## **NULLA PL**

Daide Groppi / 2014



The marvellous Nulla project, also available in a surface mounted version.

Il meraviglioso progetto Nulla utilizzabile anche in versione non incassata.

# NULLA PL


Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal  
Finish .03 Matt White

Note Ceiling luminaire. Visible 18 mm diameter hole.

*Apparecchio illuminante da soffitto. Foro visibile con diametro da 18 mm.*



## NULLA PL

8,5W  
100-240V - 50/60Hz  
2700K - 460lm / 3000K - 495lm  
CRI >90  
Driver integrated  
ON/OFF  
CE IP20

Matt White - 2700K - ON/OFF  
Matt White - 3000K - ON/OFF

1A2500300.27.00  
1A2500300.30.00





A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions. *Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.*



**PUNTO PL**


Max 21W  
 100-240V - 50/60Hz  
 Driver integrated  
 PUSH  
 LED module not included  
 CE IP20

Matt White - PUSH  
 Matt White/Black Bicolor - PUSH


1A1110300.00.04  
 1A1113400.00.04

**Compulsory accessories / Accessori obbligatori**


LED modules / Moduli LED



<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 15° - 500mA DC		1A4700000.27.20
2700K - 1648lm - CRI >90		
Energy Efficiency F - Dimmable		
16,7W - 15° - 500mA DC		1A4700000.30.20
3000K - 1682lm - CRI >90		
Energy Efficiency F - Dimmable		




<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 22° - 500mA DC		1A3890000.27.20
2700K - 1859lm - CRI >90		
Energy Efficiency F - Dimmable		
16,7W - 22° - 500mA DC		1A3890000.30.20
3000K - 1943lm - CRI >90		
Energy Efficiency F - Dimmable		




<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 36° - 500mA DC		1A3900000.27.20
2700K - 1795lm - CRI >90		
Energy Efficiency F - Dimmable		
16,7W - 36° - 500mA DC		1A3900000.30.20
3000K - 1890lm - CRI >90		
Energy Efficiency F - Dimmable		

**Optional accessories / Accessori opzionali**


Other accessories / Altri accessori




<b>Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape</b>		Not included
Matt Black		1X0070400.04.00




<b>Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico</b>		Not included
Matt Black		1X0070400.05.00



<b>Blue filter / Filtro blu</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



<b>Red filter / Filtro rosso</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



<b>Yellow filter / Filtro giallo</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.


Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Ceiling / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Ceiling luminaire. Adjustable in all directions. *Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni.*




**PUNTO 2 PL**  
 Max 2x21W  
 100-240V - 50/60Hz  
 Driver integrated  
 PUSH  
 LED modules not included  
 CE IP20

Matt White - PUSH  
 Matt White/Black Bicolor - PUSH


1A1120300.00.04  
 1A1123400.00.04

**Compulsory accessories / Accessori obbligatori**


LED modules / Moduli LED



<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 15° - 500mA DC	2700K - 1648lm - CRI >90	1A4700000.27.20
Energy Efficiency F - Dimmable		
16,7W - 15° - 500mA DC	3000K - 1682lm - CRI >90	1A4700000.30.20
Energy Efficiency F - Dimmable		



<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 22° - 500mA DC	2700K - 1859lm - CRI >90	1A3890000.27.20
Energy Efficiency F - Dimmable		
16,7W - 22° - 500mA DC	3000K - 1943lm - CRI >90	1A3890000.30.20
Energy Efficiency F - Dimmable		




<b>DG111 LED module / Modulo LED DG111</b>		Not included
16,7W - 36° - 500mA DC	2700K - 1795lm - CRI >90	1A3900000.27.20
Energy Efficiency F - Dimmable		
16,7W - 36° - 500mA DC	3000K - 1890lm - CRI >90	1A3900000.30.20
Energy Efficiency F - Dimmable		

**Optional accessories / Accessori opzionali**


Other accessories / Altri accessori




<b>Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape</b>		Not included
Matt Black		1X0070400.04.00




<b>Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico</b>		Not included
Matt Black		1X0070400.05.00



<b>Blue filter / Filtro blu</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



<b>Red filter / Filtro rosso</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



<b>Yellow filter / Filtro giallo</b>		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



Where did the chandelier go?  
A work about absence. About something missing.  
As if by removing the chandelier, its memory stays, but with a modern and sensual light.

Dov'è finito il lampadario?  
Un progetto sull'assenza, su qualcosa che manca.  
Come se togliendo il lampadario, rimanga la sua memoria,  
ma con una luce moderna e sensuale.

# SANMARTINO

Omar Carraglia - Davide Groppi / 2014

Ceiling / Direct / Indoor

Material Metal  
Finish .03 Matt White .15 Natural Brass

Note Ceiling luminaire. Visible 18 mm diameter hole. *Apparecchio illuminante da soffitto. Foro visibile con diametro da 18 mm.*



## SANMARTINO

8,5W  
100-240V - 50/60Hz  
3000K - 375lm  
CRI >90  
Driver integrated  
ON/OFF  
CE IP20

Matt White - 3000K - ON/OFF  
Natural Brass - 3000K - ON/OFF

1A3420300.30.00  
1A3421500.30.00






**A simple, graphic solution.  
Bringing accent lighting with an external wiring system.**

Una soluzione semplice e grafica.  
Per portare luce d'accento con un sistema fuori traccia.

Wall-Ceiling / Direct / Indoor

<b>Material</b>	Metal
<b>Finish</b>	<b>.03</b> Matt White <b>.04</b> Matt Black

**Note** Ceiling luminaire. Adjustable in all directions. White cable (2 m) for the matt white finish. Black cable (2 m) for the matt black finish. Connects max 20 lamps. *Apparecchio illuminante da soffitto. Orientabile in tutte le direzioni. Cavobianco (2 m) per la finitura bianco opaco. Cavo nero (2 m) per la finitura nero opaco. Collegabili max 20 apparecchi.*



**TRICK TRACK**

Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
CE IP20

Matt White - ON/OFF  
Matt Black - ON/OFF

1A3430300.00.00  
1A3430400.00.00

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



<b>Wall and ceiling rose / Rosone da parete e soffitto</b>	Not included
Matt White	1X0030300.01.00
Matt Black	1X0030400.01.00

Bulbs / Lampadine



<b>LED - GU10 - PAR16</b>	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500



<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210



<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010

Other accessories / Altri accessori



<b>Darklight</b>	Not included
LED SORAA - GU10 - MR16	1Y1580040



<b>25° beam filter / Filtro fascio 25°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580020



<b>36° beam filter / Filtro fascio 36°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580030

**RECESSED / INCASSO**



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: Ø 90 mm. Minimum space for recessed installation: 100 mm. *Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: Ø 90 mm. Spazio minimo per incasso: 100 mm.*



**BUCO R**

Max 35W - GU5,3 - 12V

12V

Driver not included

ON/OFF

Bulb not included




Matt White - ON/OFF

| 1A3720300.00.00 |

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



**Driver / Alimentatore**

230-240V 12V/50W/IP20/TRIAC/IGBT

Not included

1Z0240440

**Optional accessories / Accessori opzionali**

Bulbs / Lampadine



**LED - GU5,3 - MR16**

12V - 6,7W - 36°  
 3000K - 440lm - CRI >97  
 Energy Efficiency G - Dimmable

Not included

1Y0330530





**A tool to light.**

**A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.**


Elemento di luce.

Un apparecchio illuminante progettato per utilizzare moduli a LED in grado di fornire prestazioni superiori ed un'ampia gamma di fasci luminosi.

Recessed / Direct / Indoor

<b>Material</b>	Metal		
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.49</b> Matt Black/Polished Gold

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 60 mm. *Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 40x40 mm. Spazio minimo per incasso: 60 mm.*




**DOT R**

13W  
Max 350mA DC  
2700K / 3000K  
CRI >97  
Driver not included



Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K  
Matt Black/Polished Gold - 2700K  
Matt Black/Polished Gold - 3000K

1A4770300.27.20  
1A4770300.30.20  
1A4770400.27.20  
1A4770400.30.20  
1A4774900.27.20  
1A4774900.30.20



**DOT R 51**

Max 10W - GU10  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included




Matt White - ON/OFF  
Matt Black - ON/OFF  
Matt Black/Polished Gold - ON/OFF


1A3700300.00.00  
1A3700400.00.00  
1A3704900.00.00

**Compulsory accessories / Accessori obbligatori**


**Drivers / Alimentatori**



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	DOT R	1Z0241180.350	



Driver / Alimentatore				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH - 1-10V	DOT R	1Z0240870.350	



Driver / Alimentatore				Not included
220-240V	350mA/17W/IP20/TRIAC/IGBT	DOT R	1Z0240850.350	


**Other accessories / Altri accessori**




Lens / Lente			Not included
Beam - 14°	2700K - CRI >97 - 983lm	DOT R	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT R	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT R	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT R	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

## Optional accessories / Accessori opzionali


Other accessories / Altri accessori




<b>Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape</b>				Not included
	DOT R	1X0080400.01.00		




<b>Elliptical filter / Filtro ellittico</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.02.00	



<b>Blue filter / Filtro blu</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.03.00	



<b>Red filter / Filtro rosso</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.04.00	



<b>Yellow filter / Filtro giallo</b>				Not included
Standard	Compulsory with 1X0080400.01.00	DOT R	1X0080000.05.00	

## Optional accessories / Accessori opzionali

Bulbs / Lampadine



<b>LED - GU10 - PAR16</b>			Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT R 51	1Y0330500	




<b>LED SORAA - GU10 - MR16</b>			Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580210	




<b>LED SORAA - GU10 - MR16</b>			Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT R 51	1Y1580010	


Other accessories / Altri accessori



<b>Darklight</b>			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580040	



<b>25° beam filter / Filtro fascio 25°</b>			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580020	



<b>36° beam filter / Filtro fascio 36°</b>			Not included
LED SORAA - GU10 - MR16	DOT R 51	1Y1580030	



**A tool to light.**

**The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.**

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm. *Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 104x104 mm. Spazio minimo per incasso: 130 mm.*



**MINI 51**

Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF

Bulb not included



Matt White - ON/OFF  
 Matt Black - ON/OFF

1A0660300.00.00  
 1A0660400.00.00

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm</b>			Not included
Matt White	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500300.00.00	
Matt Black	Cut-out 104x104 mm Minimum space for mounting 130 mm	1A3500400.00.00	

**Optional accessories / Accessori opzionali**

Bulbs / Lampadine



<b>LED - GU10 - PAR16</b>	Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	1Y0330500




<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580210




<b>LED SORAA - GU10 - MR16</b>	Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	1Y1580010


Other accessories / Altri accessori




<b>Darklight</b>	Not included
LED SORAA - GU10 - MR16	1Y1580040



<b>25° beam filter / Filtro fascio 25°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580020



<b>36° beam filter / Filtro fascio 36°</b>	Not included
LED SORAA - GU10 - MR16	1Y1580030

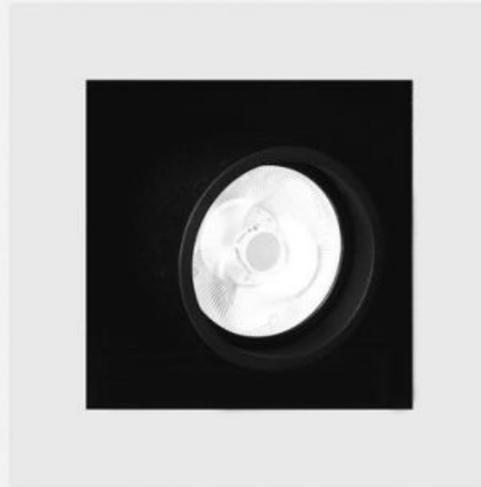

**A tool to light.**

**The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.**

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

# MINI BIT 51

/ 2016

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .34 Matt White/Black Bicolor

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 104x104 mm. Minimum space for recessed installation: 130 mm.  
*Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 104x104 mm. Spazio minimo per incasso: 130 mm.*



## MINI BIT 51

Max 10W - GU10  
 100-240V - 50/60Hz  
 ON/OFF

Bulb not included



Matt White - ON/OFF

Matt White/Black Bicolor - ON/OFF

1A0670300.00.00

1A0673400.00.00

# MINI BIT 51

/ 2016

## Optional accessories / Accessori opzionali

### Bulbs / Lampadine



#### LED - GU10 - PAR16

220-240V - 5,5W - 25°  
 3000K - 375lm - CRI >97  
 Energy Efficiency G - Dimmable

1Y0330500

Not included



#### LED SORAA - GU10 - MR16

230V - 7,5W - 10°  
 2700K - 390lm - CRI >95  
 Energy Efficiency G - Dimmable

1Y1580210

Not included




#### LED SORAA - GU10 - MR16

230V - 7,5W - 10°  
 3000K - 410lm - CRI >95  
 Energy Efficiency G - Dimmable

1Y1580010

Not included

### Other accessories / Altri accessori




#### Darklight

LED SORAA - GU10 - MR16

1Y1580040

Not included




#### 25° beam filter / Filtro fascio 25°

LED SORAA - GU10 - MR16

1Y1580020

Not included



#### 36° beam filter / Filtro fascio 36°

LED SORAA - GU10 - MR16

1Y1580030

Not included

## MIRA R

Omar Carraglia / 2015



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.


# MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black .49 Matt Black/Polished Gold

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 60 mm. *Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 40x40 mm. Spazio minimo per incasso: 60 mm.*




## MIRA R

5,6W  
 Max 500mA DC  
 2700K - 327lm / 3000K - 352lm  
 CRI >90  
 Driver not included  
 CE IP20


Matt White - 2700K	1A3690300.27.20
Matt White - 3000K	1A3690300.30.20
Matt Black - 2700K	1A3690400.27.20
Matt Black - 3000K	1A3690400.30.20
Matt Black/Polished Gold - 2700K	1A3694900.27.20
Matt Black/Polished Gold - 3000K	1A3694900.30.20

## Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori



Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0241180.500




Driver / Alimentatore	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH - 1-10V	1Z0240870.500



Driver / Alimentatore	Not included
220-240V 500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500



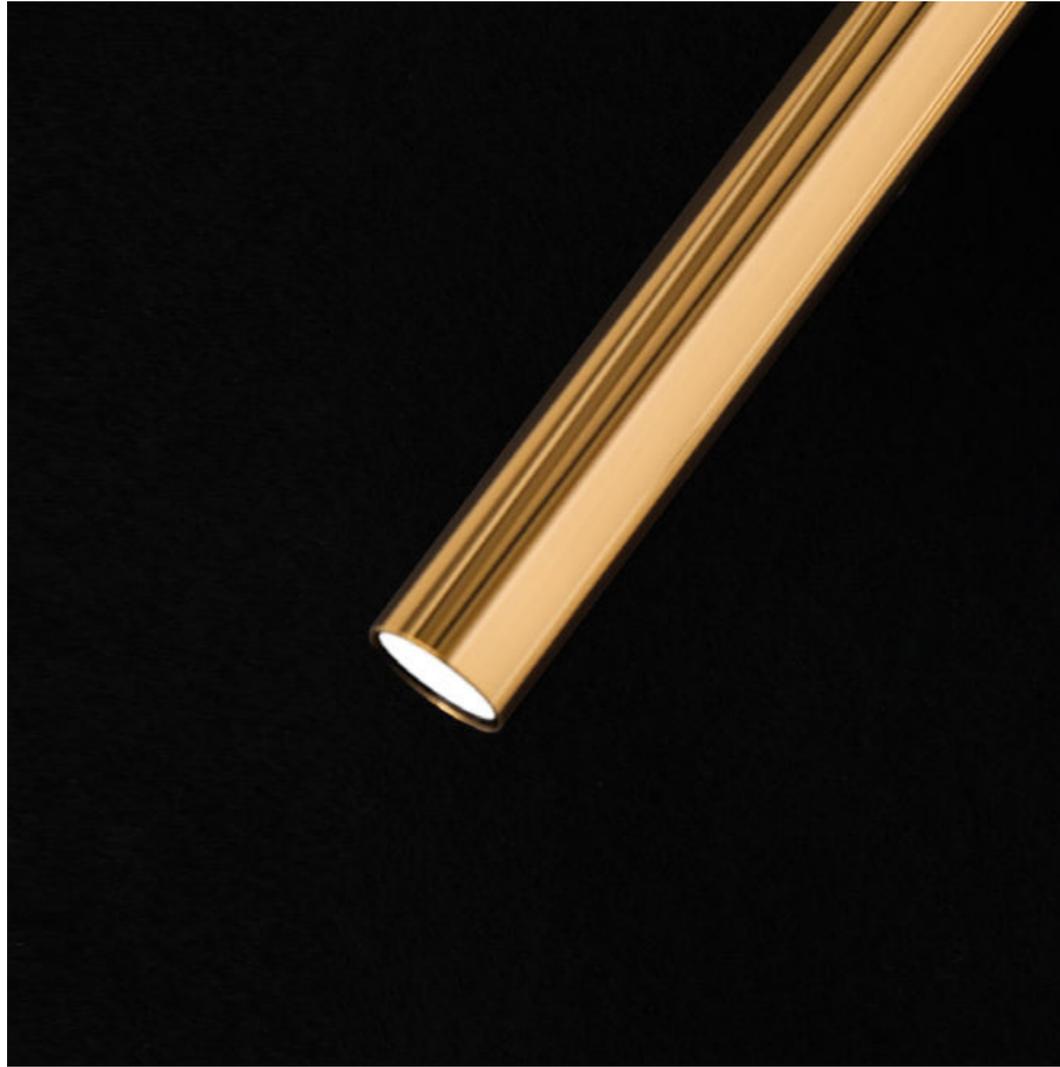



An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source.

It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

**XXIII Compasso d'Oro ADI Award 2014**

Un lavoro estremo di sottrazione, che unisce elettronica e l'ottica verso la sfida finale: l'assenza del supporto e l'essenza della luce.

Nulla è un progetto che rappresenta l'inizio e la fine del nostro lavoro sulla luce. L'inizio perché da sempre cerchiamo la luce assoluta, quella che arriva da lontano, quasi senza fonte. La fine perché ogni volta che guardiamo Nulla ci sembra di non potere andare più avanti di così.

Nulla genera luce e diffonde mistero. È la più generosa delle nostre lampade, quella che si nasconde al solo scopo di regalare la scena al soggetto illuminato.

Ciò che appare è solo un minuscolo buco nero, quasi disegnato.

Un foro nel soffitto, un LED potentissimo e una lente che generano la luce.


**XXIII Premio Compasso d'Oro ADI 2014**



Recessed / Direct / Indoor

**Material** Metal  
**Finish** .00 Standard

**Note** Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance. *Apparecchio illuminante da incasso. Foro visibile con diametro da 18 / 25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.*




**NULLA - 23°**

14W  
24V DC  
2700K - 347lm / 3000K - 357lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K

1A4100000.27.20  
1A4100000.30.20



**NULLA - 32°**

14W  
24V DC  
2700K - 403lm / 3000K - 415lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K

1A2110000.27.20  
1A2110000.30.20



**NULLA 18 - 20°**

4,5W  
24V DC  
2700K - 174lm / 3000K - 186lm  
CRI >90  
Beam 20°  
UGR <19  
Driver not included  
CE IP20

Standard - 2700K  
Standard - 3000K

1A2010000.27.20  
1A2010000.30.20



**NULLA 25 - 23°**

9W  
24V DC  
2700K - 304lm / 3000K - 327lm  
CRI >90  
Beam 23°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K

1A4080000.27.20  
1A4080000.30.20



**NULLA 25 - 32°**

9W  
24V DC  
2700K - 384lm / 3000K - 413lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP20/IP65

Standard - 2700K  
Standard - 3000K


1A2020000.27.20  
1A2020000.30.20

**Compulsory accessories / Accessori obbligatori**


Installation kits / Kit d'installazione




<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b> Not included			
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00



<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b> Not included			
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00



<b>Masonry Box / Cassaforma per laterizio</b> Not included			
Standard		NULLA 18	1A2390000.00.00



<b>Concrete box / Cassaforma per cemento</b> Not included			
Standard		NULLA 18	1A2240000.00.00



<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b> Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00




<b>Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm</b> Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00




<b>Plasterboard flange (bottom) ≠ 12,5 mm / Flangia (da sotto) per cartongesso ≠ 12,5 mm</b> Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione




<b>Masonry Box / Cassaforma per laterizio</b> Not included			
Standard		NULLA 25	1A2380000.00.00




<b>Concrete box / Cassaforma per cemento</b> Not included			
Standard		NULLA 25	1A2230000.00.00


**Drivers / Alimentatori**



<b>Driver / Alimentatore</b> Not included			
220-240V(100-127V)	24V/16W(15W)/IP20/DALI		1Z0241180.24



<b>Driver / Alimentatore</b> Not included			
220-240V(100-127V)	24V/20W(15W)/IP20/PUSH - 1-10V		1Z0240870.24




<b>Driver / Alimentatore</b> Not included			
220-240V	24V/20W/IP20/TRIAC/IGBT		1Z0240850.24

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione




<b>Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm</b> Not included			
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00




<b>Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm</b> Not included			
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00

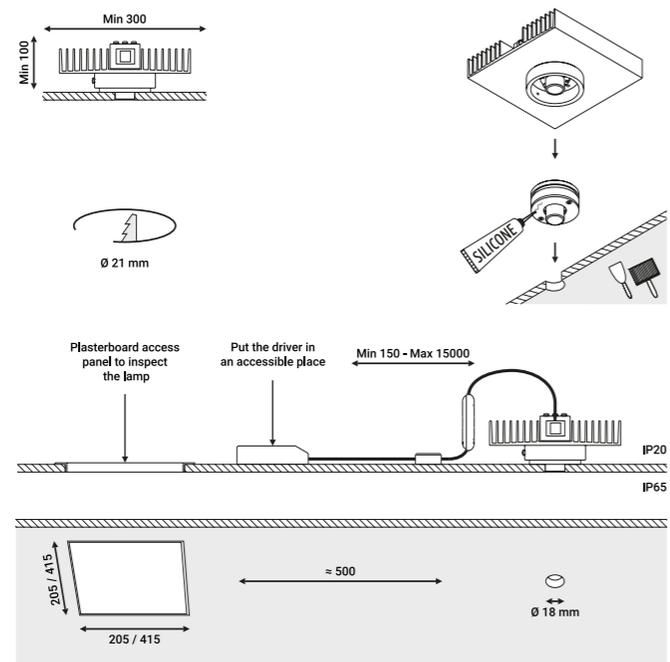


1A2200400.00.00 - NULLA installation conditions

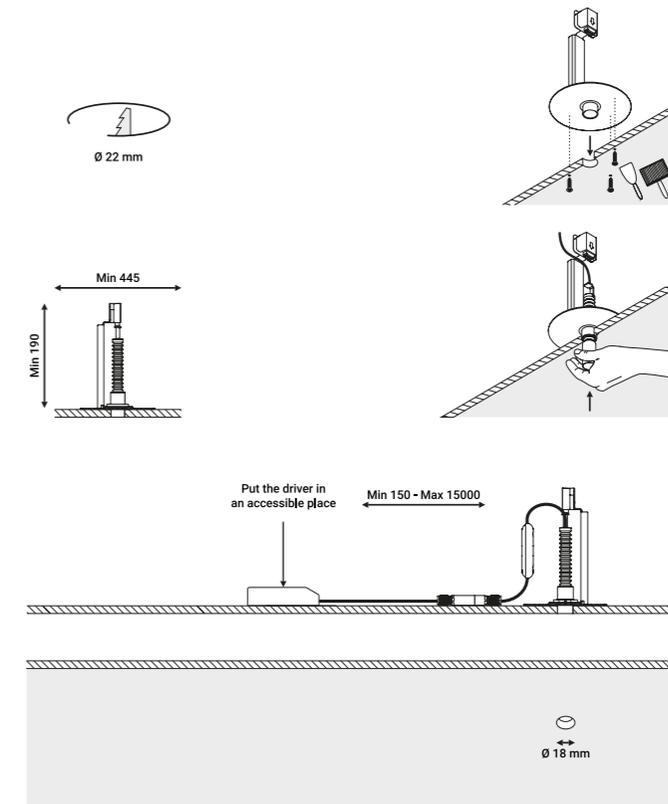


1A2210400.00.00 - NULLA 18 installation conditions

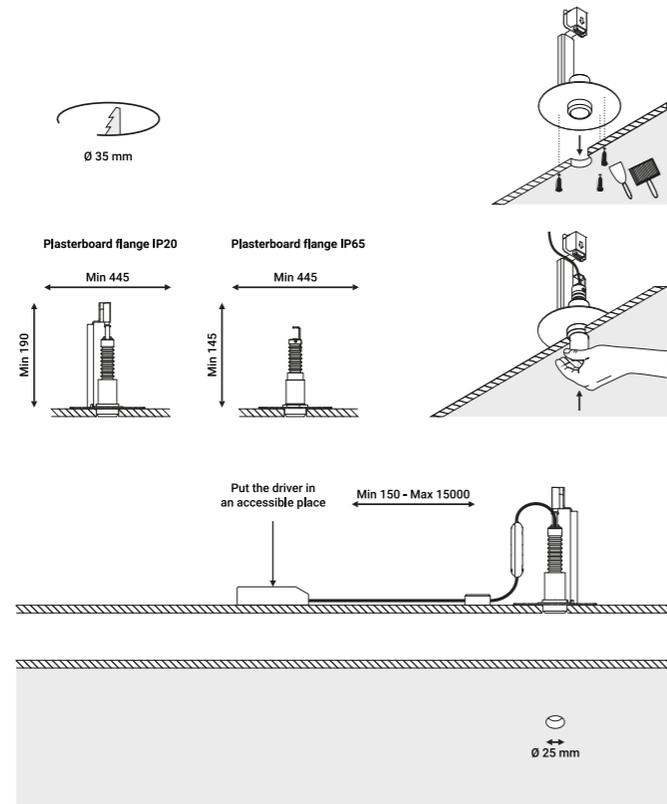


1A2170400.00.00 - 1A3980400.00.00 - NULLA 25 installation conditions

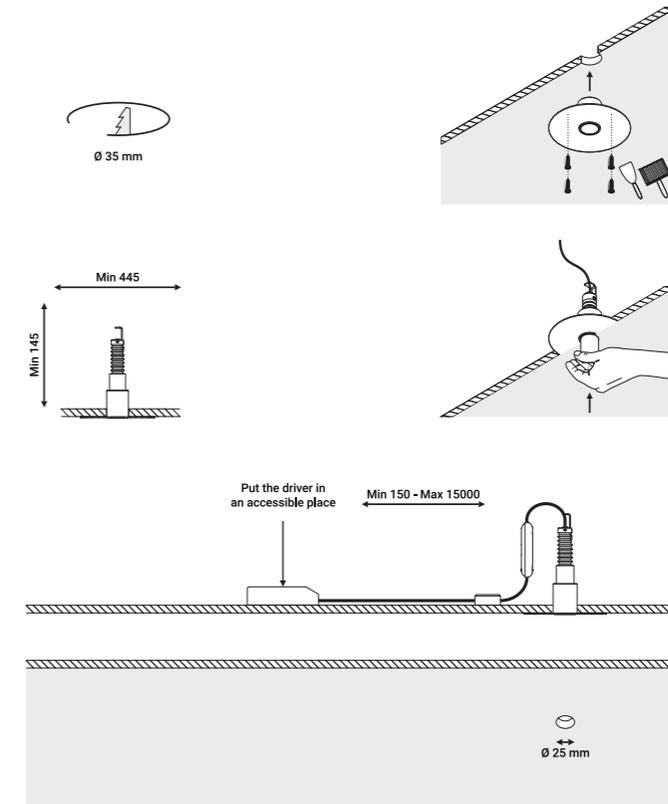

1A4960400.00.00 - NULLA 25 installation conditions



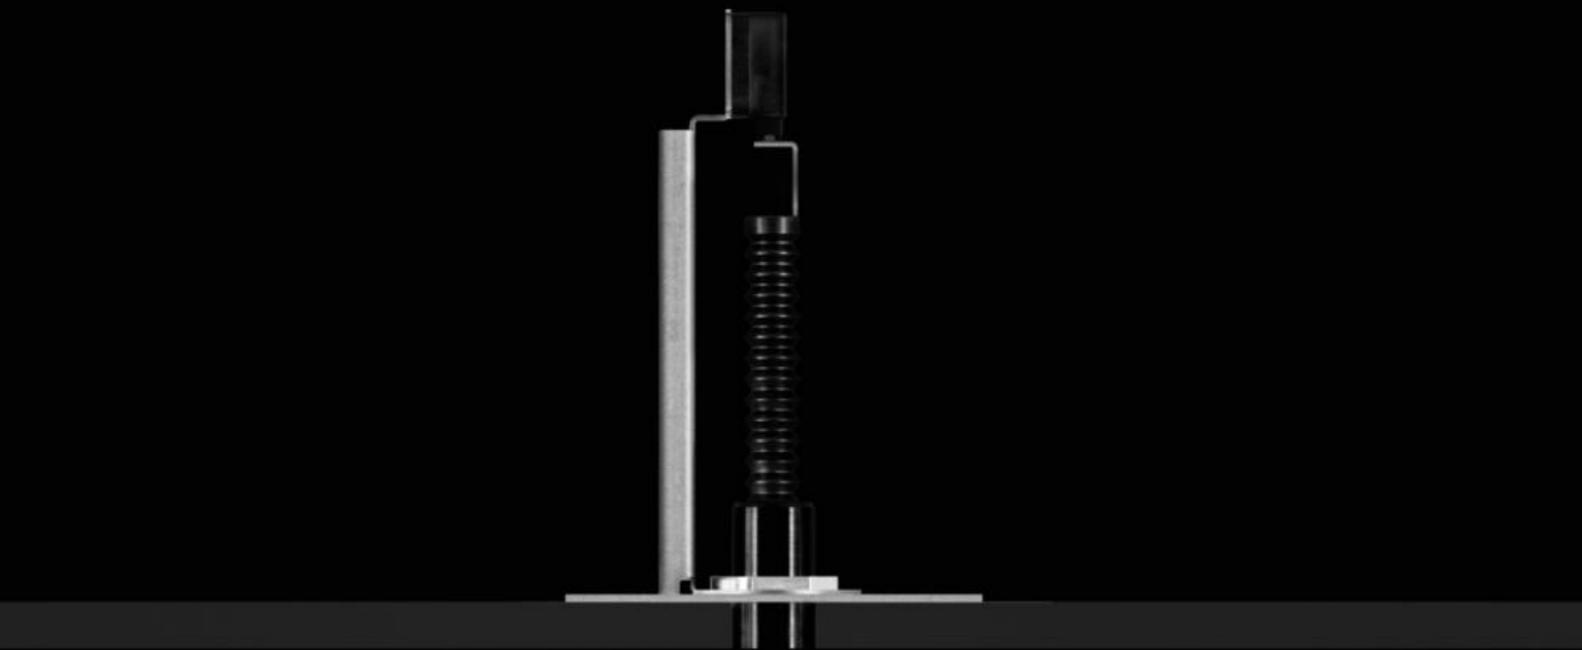

Private Residence  
Treviso



Villa Sparina Resort  
Gavi



Osteria Francescana Restaurant  
Modena





A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.

Recessed / Direct / Indoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Recessed luminaire. Adjustable in all directions. Plasterboard hole: 133x148 mm. Minimum space for recessed installation: 180 mm. *Apparecchio illuminante da incasso. Orientabile in tutte le direzioni. Foro del cartongesso: 133x148 mm. Spazio minimo per incasso: 180 mm.*



**PUNTO**

Max 21W  
 Max 500mA DC  
 Driver not included  
 LED module not included



Matt White  
 Matt Black

1A1100300.00.20  
 1A1100400.00.20


**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione




<b>Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm</b>			Not included
Matt White	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510300.00.00	
Matt Black	Cut-out 133x148 mm Minimum space for mounting 180 mm	1A3510400.00.00	


LED modules / Moduli LED



<b>DG111 LED module / Modulo LED DG111</b>			Not included
	16,7W - 15° - 500mA DC 2700K - 1648lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.27.20	
	16,7W - 15° - 500mA DC 3000K - 1682lm - CRI >90 Energy Efficiency F - Dimmable	1A4700000.30.20	




<b>DG111 LED module / Modulo LED DG111</b>			Not included
	16,7W - 22° - 500mA DC 2700K - 1859lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.27.20	
	16,7W - 22° - 500mA DC 3000K - 1943lm - CRI >90 Energy Efficiency F - Dimmable	1A3890000.30.20	




<b>DG111 LED module / Modulo LED DG111</b>			Not included
	16,7W - 36° - 500mA DC 2700K - 1795lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.27.20	
	16,7W - 36° - 500mA DC 3000K - 1890lm - CRI >90 Energy Efficiency F - Dimmable	1A3900000.30.20	


Drivers / Alimentatori



<b>Driver / Alimentatore</b>			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/DALI	1Z0241180.500	



<b>Driver / Alimentatore</b>			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500	



<b>Driver / Alimentatore</b>			Not included
220-240V	500mA/20W/IP20/TRIAC/IGBT	1Z0240850.500	

**Optional accessories / Accessori opzionali**

Other accessories / Altri accessori



**Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangilucente nido d'ape** Not included  
 Matt Black 1X0070400.04.00



**Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico** Not included  
 Matt Black 1X0070400.05.00



**Blue filter / Filtro blu** Not included  
 Standard Compulsory with 1X0070000.06.00  
 1X0070400.04.00 / 1X0070400.05.00




**Red filter / Filtro rosso** Not included  
 Standard Compulsory with 1X0070000.07.00  
 1X0070400.04.00 / 1X0070400.05.00



**Yellow filter / Filtro giallo** Not included  
 Standard Compulsory with 1X0070000.08.00  
 1X0070400.04.00 / 1X0070400.05.00



**SYSTEMS / SISTEMI**

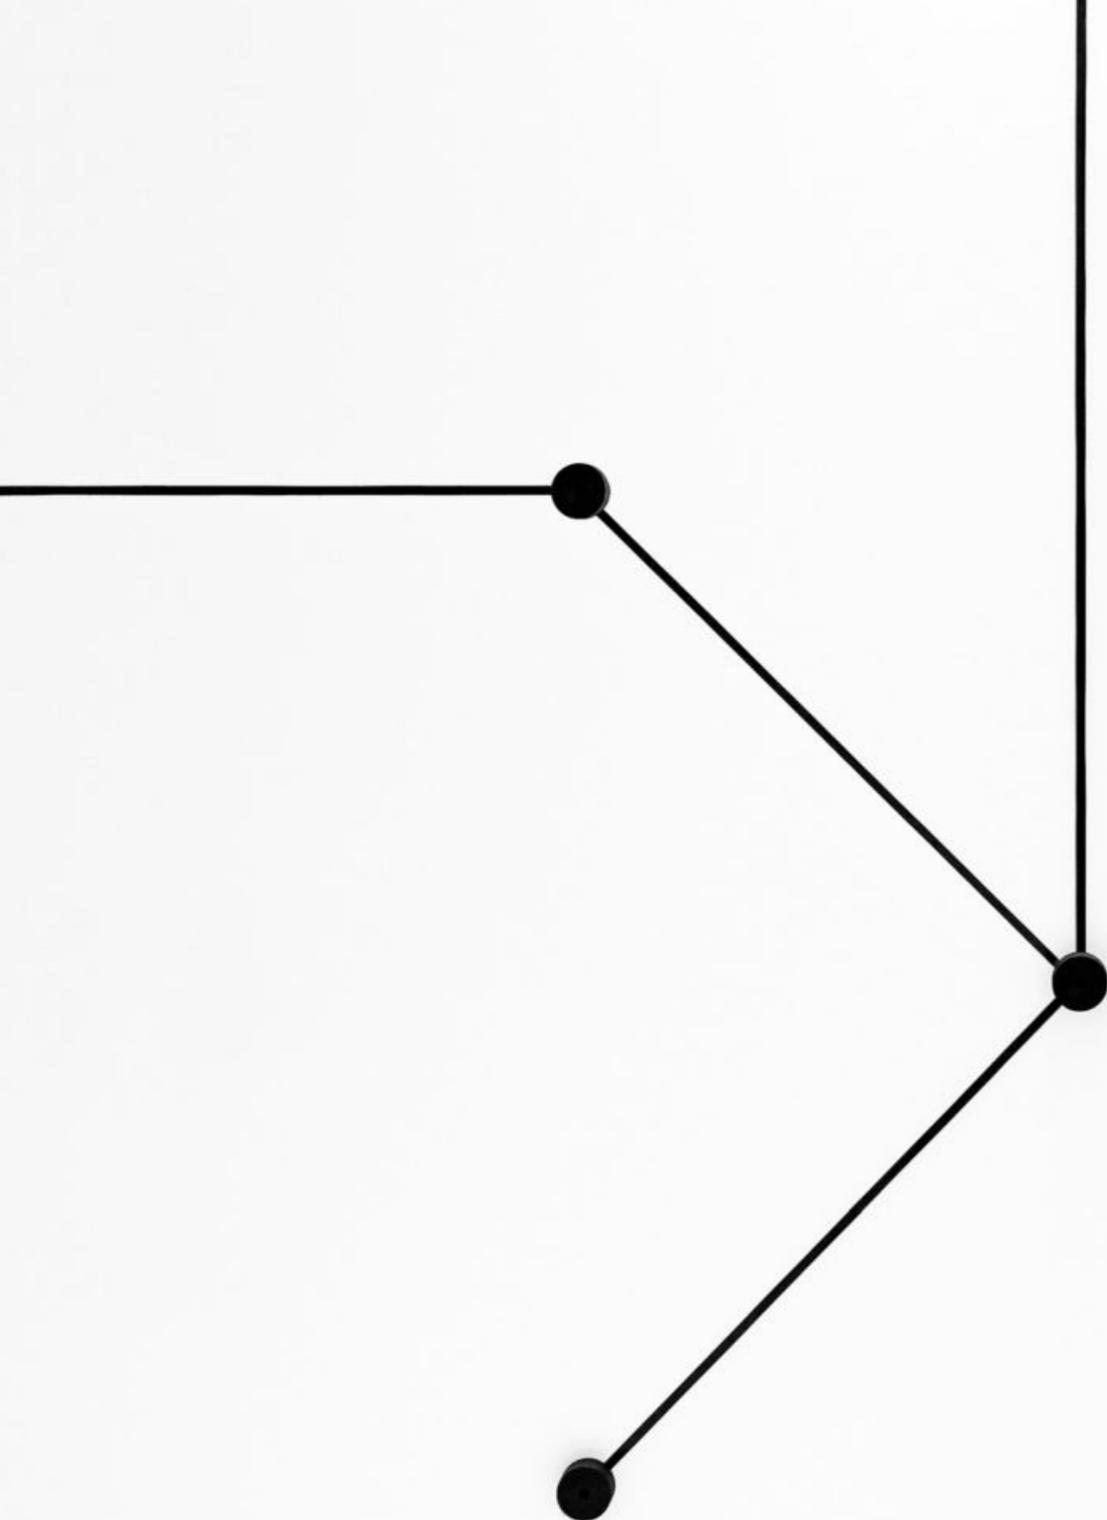

Absolute freedom, absolute spatiality, absolute creativity.  
An adhesive tape that conducts electricity can be placed anywhere  
on walls and ceilings to power our lighting projects.  
Endless is the system created and patented by our Team in order to transport  
electric energy in a digital and graphic manner.  
It's the idea of considering walls and ceilings like electronic circuits,  
where luminaires can be done fixed freely and easily.  
This system comes with various accessories  
to provide and manage the flow of electricity.



Libertà assoluta, spazialità assoluta, creatività assoluta.  
Un nastro conduttore e adesivo che può essere disposto a piacimento  
su pareti e soffitti per alimentare i nostri modelli.  
Endless è il sistema ideato e brevettato dal nostro Team  
per portare "differenza di potenziale" dove si desidera in modo grafico e digitale.  
È l'idea di considerare le pareti e i soffitti come circuiti elettronici  
per posizionare gli apparecchi illuminanti con la massima libertà.  
Il sistema è dotato di vari accessori di alimentazione e derivazione.

201811 3990010 decide group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010 decide group1 + MAX 48V DC MAX 4A MAX 150W 201811 3990010  
 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX 4A DRY LOC





ENDLESS


**ENDLESS ON/OFF**  
(Max 48V DC -  
Max 150W - Max 4A)

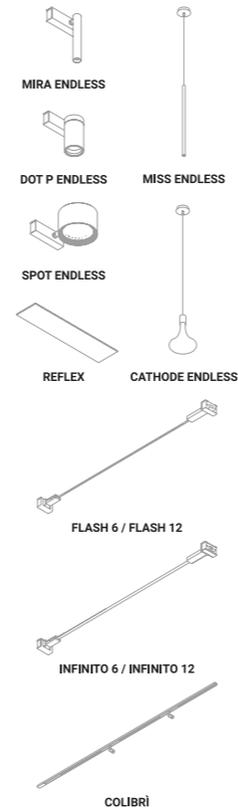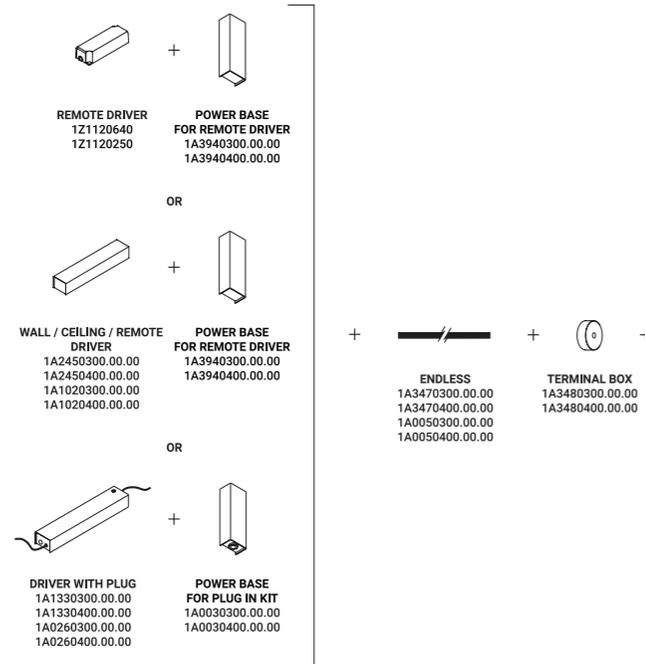


**ENDLESS dimmable**  
(Max 48V DC -  
Max 150W - Max 4A)

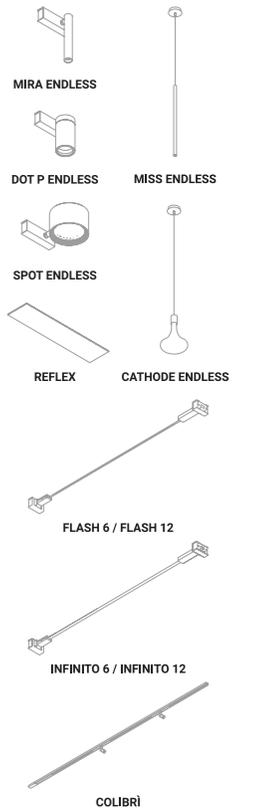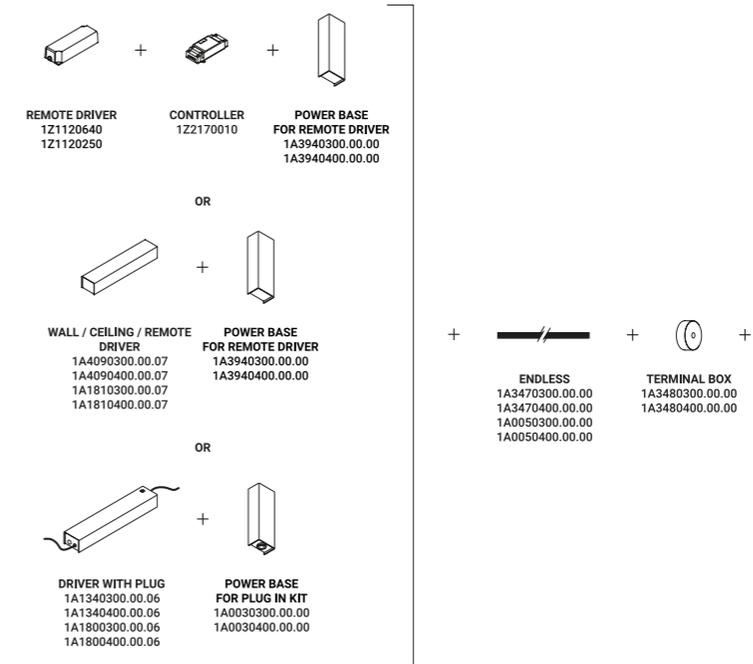

**ENDLESS CASAMBI**  
(Max 48V DC -  
Max 150W - Max 4A)

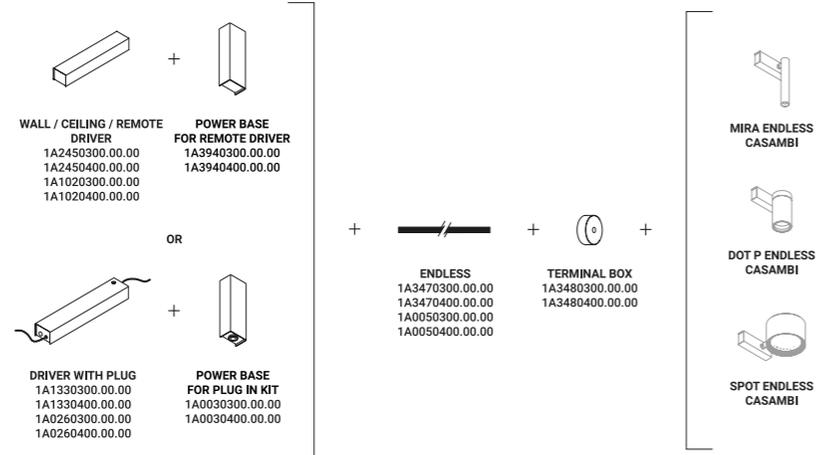

**ENDLESS** conductive tape  
used with voltage/current  
other than 48V DC

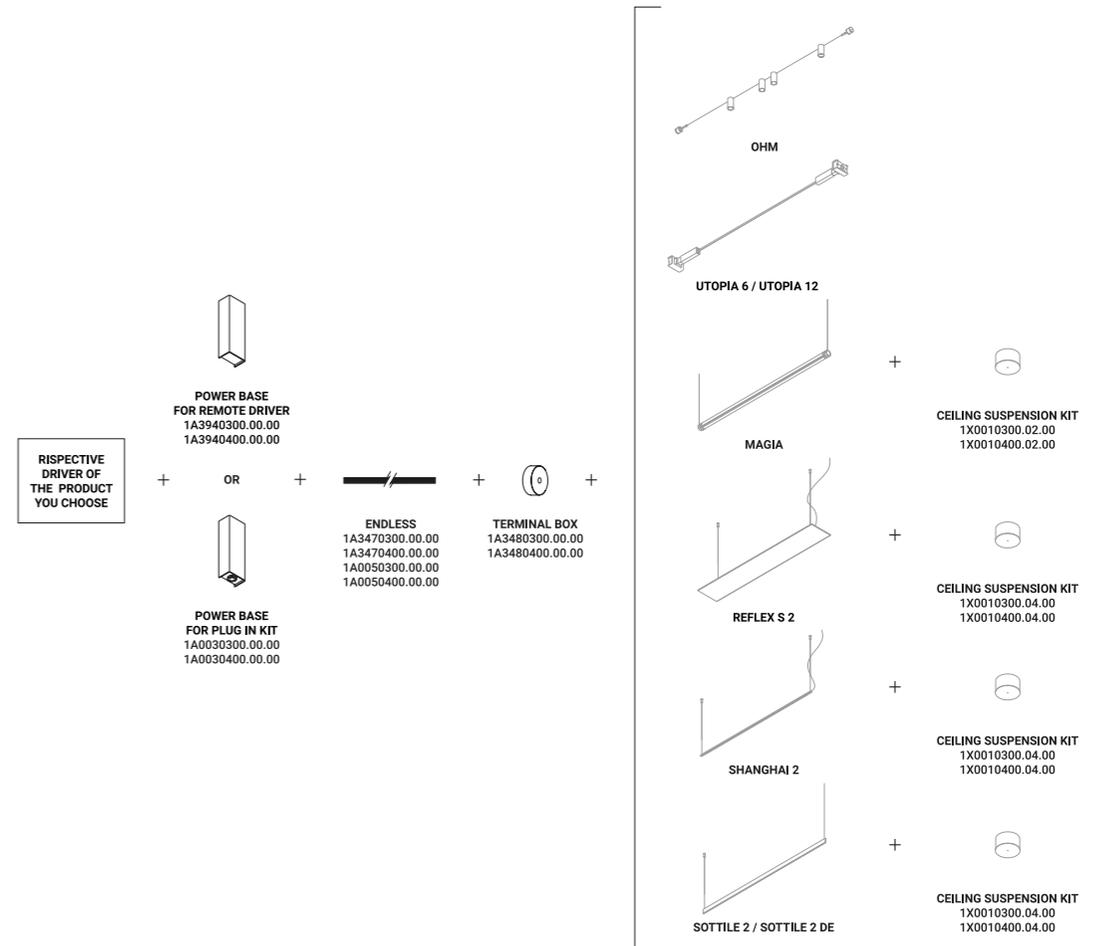


Davide Groppi / 2018

Systems / Direct-Indirect-Diffuse / Indoor

**Material** Metal  
**Finish** .00 Standard

**Note** System consisting of a conductive adhesive tape to apply to surfaces. *Sistema costituito da un nastro conduttivo adesivo applicabile alle superfici.*  
 Possibility to connect several lamps (Max 48V DC - Max 150W - Max 4A). *Possibilità di collegare più apparecchi (Max 48V DC - Max 150W - Max 4A).*

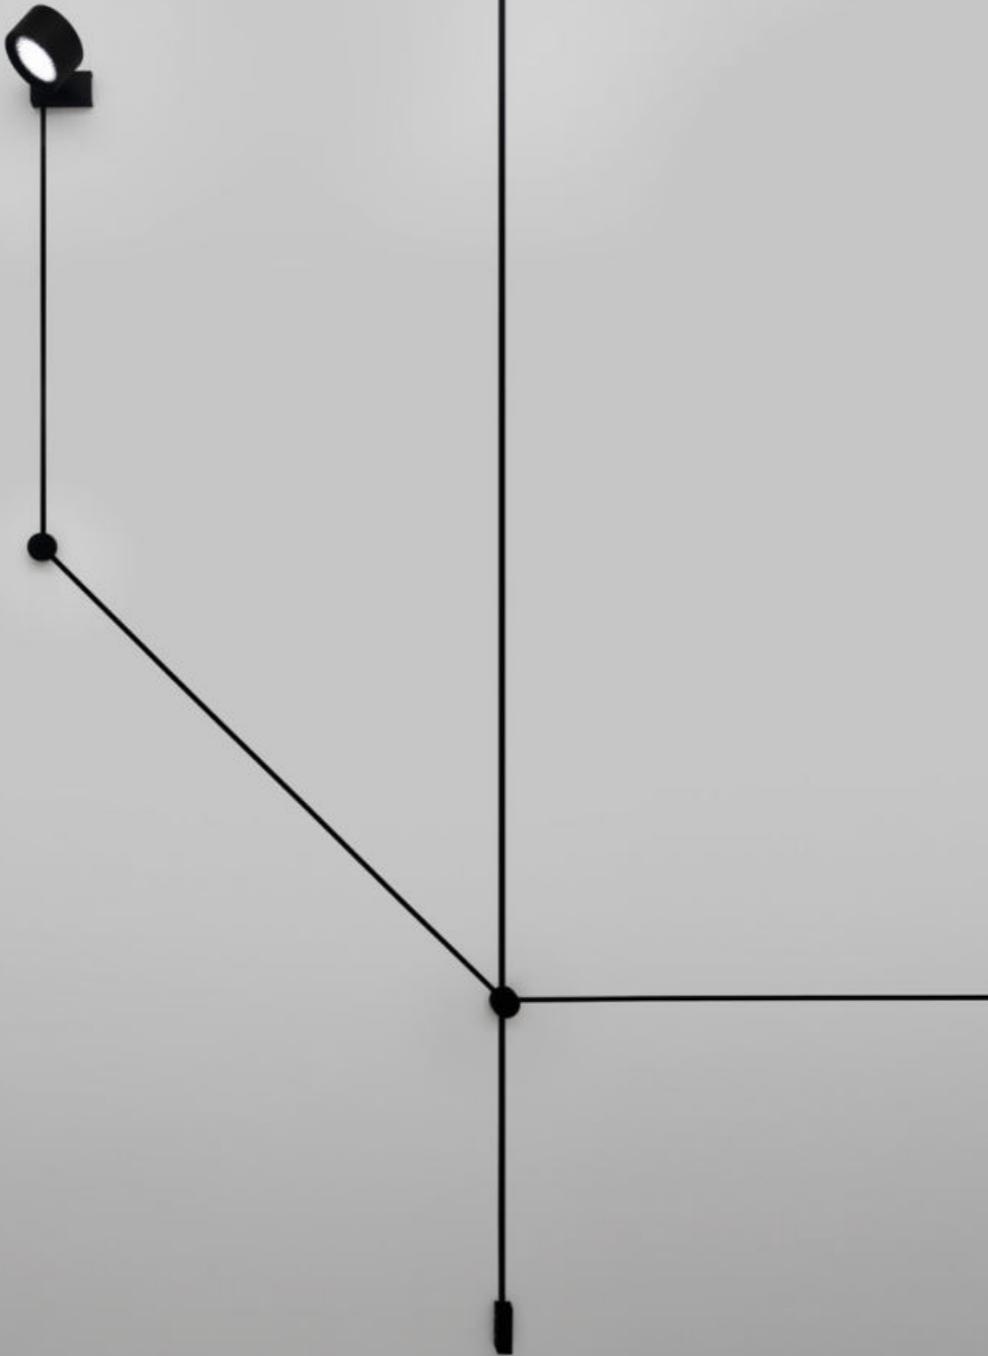

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Strip Endless - 5 m / Strip Endless - 5 m</b>			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A3470300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A3470400.00.00	




<b>Strip Endless - 10 m / Strip Endless - 10 m</b>			Not included
Matt White	Max 48V DC - Max 150W - Max 4A	1A0050300.00.00	
Matt Black	Max 48V DC - Max 150W - Max 4A	1A0050400.00.00	




<b>Fixing rough walls kit / Kit di fissaggio per pareti ruvide</b>			Not included
Length 2,5 m		1A0370000.00.00	



<b>Terminal box / Scatola di collegamento</b>			Not included
Matt White	2 Terminals included	1A3480300.00.00	
Matt Black	2 Terminals included	1A3480400.00.00	



<b>Power base for plug in kit / Base di alimentazione per kit con spina</b>			Not included
Matt White		1A0030300.00.00	
Matt Black		1A0030400.00.00	




<b>Power base for remote driver / Base di alimentazione per alimentatore remoto</b>			Not included
Matt White		1A3940300.00.00	
Matt Black		1A3940400.00.00	




<b>Terminals / Morsetti</b>			Not included
2 Pieces		1A3490000.00.00	

**Compulsory accessories / Accessori obbligatori**


Drivers for ENDLESS ON/OFF system and CASAMBI / Alimentatori per ENDLESS ON/OFF e CASAMBI




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A1330400.00.00



Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - ON/OFF	1A2450400.00.00




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A0260400.00.00




Wall/ceiling/remote driver / Alimentatore parete/soffitto/remoto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020300.00.00
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - ON/OFF	1A1020400.00.00

**Compulsory accessories / Accessori obbligatori**


Drivers for ENDLESS dimmable system / Alimentatori per ENDLESS dimmerabile




Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - Dimmer on board	1A1340400.00.06



Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 60W - Max 1,25A IP20 - DALI - PUSH - 1-10V	1A4090400.00.07



Driver with plug / Alimentatore con spina		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800300.00.06
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - Dimmer on board	1A1800400.00.06




Wall/ceiling driver / Alimentatore parete/soffitto		Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810300.00.07
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - Max 3,12A IP20 - DALI - PUSH - 1-10V	1A1810400.00.07




**Compulsory accessories / Accessori obbligatori**


Remote drivers for ENDLESS / Alimentatori remoti per ENDLESS



Driver / Alimentatore			Not included
100-240V	48V/60W/IP67/ON/OFF	1Z1120640	




Driver / Alimentatore			Not included
100-240V	48V/150W/IP67/1-10V	1Z1120250	




Controller		Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010	

Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
<b>Power Kit:</b>			
1A133XX00.00.00	Driver with plug - 48V - ON/OFF	Max 60	Max 1,25
1A245XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 60	Max 1,25
1A026XX00.00.00	Driver with plug - 48V - ON/OFF	Max 150	Max 3,12
1A102XX00.00.00	Wall/ceiling/remote driver - 48V - ON/OFF	Max 150	Max 3,12
1A134XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 60	Max 1,25
1A409XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 60	Max 1,25
1A180XX00.00.06	Driver with plug - 48V - Dimmer on board	Max 150	Max 3,12
1A181XX00.00.07	Wall/ceiling driver - 48V - DALI - PUSH - 1-10V	Max 150	Max 3,12
1Z1120640	Remote driver - 48V - ON/OFF	Max 60	Max 1,25
1Z1120250	Remote driver - 48V - 1-10V	Max 150	Max 3,12
<b>Elements:</b>			
1A2980300.27.40	CATHODE ENDLESS - Matt White - 2700K	6,3	0,16
1A2980300.30.40	CATHODE ENDLESS - Matt White - 3000K	6,3	0,16
1A2980800.27.40	CATHODE ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2980800.30.40	CATHODE ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2982800.27.40	CATHODE ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2982800.30.40	CATHODE ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A4260400.27.01	COLIBRÌ 18 - 15° - Matt Black - 2700K - DALI	2	0,05
1A4260400.30.01	COLIBRÌ 18 - 15° - Matt Black - 3000K - DALI	2	0,05
1A4270400.27.01	COLIBRÌ 18 - 25° - Matt Black - 2700K - DALI	2	0,05
1A4270400.30.01	COLIBRÌ 18 - 25° - Matt Black - 3000K - DALI	2	0,05
1A4280400.27.01	COLIBRÌ 28 - 15° - Matt Black - 2700K - DALI	4	0,10
1A4280400.30.01	COLIBRÌ 28 - 15° - Matt Black - 3000K - DALI	4	0,10
1A4290400.27.01	COLIBRÌ 28 - 25° - Matt Black - 2700K - DALI	5	0,13
1A4290400.30.01	COLIBRÌ 28 - 25° Matt Black - 3000K - DALI	5	0,13
1A2340300.27.40	DOT P ENDLESS - Matt White - 2700K	13	0,34
1A2340300.30.40	DOT P ENDLESS - Matt White - 3000K	13	0,34
1A2340400.27.40	DOT P ENDLESS - Matt Black - 2700K	13	0,34
1A2340400.30.40	DOT P ENDLESS - Matt Black - 3000K	13	0,34
1A2344900.27.40	DOT P ENDLESS - Matt Black/Polished Gold - 2700K	13	0,34
1A2344900.30.40	DOT P ENDLESS - Matt Black/Polished Gold - 3000K	13	0,34
1A2340300.27.41	DOT P ENDLESS CASAMBI - Matt White - 2700K	15,5	0,40
1A2340300.30.41	DOT P ENDLESS CASAMBI - Matt White - 3000K	15,5	0,40
1A2340400.27.41	DOT P ENDLESS CASAMBI - Matt Black - 2700K	15,5	0,40
1A2340400.30.41	DOT P ENDLESS CASAMBI - Matt Black - 3000K	15,5	0,40
1A2344900.27.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	15,5	0,40
1A2344900.30.41	DOT P ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	15,5	0,40
1A2130300.27.20	FLASH 6 - Matt White - 2700K	57	1,48
1A2130300.30.20	FLASH 6 - Matt White - 3000K	57	1,48
1A2130400.27.20	FLASH 6 - Matt Black - 2700K	57	1,48
1A2130400.30.20	FLASH 6 - Matt Black - 3000K	57	1,48


Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125A		Wattage (W)	Ampere (A)
1A2150300.27.20	FLASH 12 - Matt White - 2700K	114	2,97
1A2150300.30.20	FLASH 12 - Matt White - 3000K	114	2,97
1A2150400.27.20	FLASH 12 - Matt Black - 2700K	114	2,97
1A2150400.30.20	FLASH 12 - Matt Black - 3000K	114	2,97
1A2250300.27.20	INFINITO 6 - Matt White - 2700K	57	1,48
1A2250300.30.20	INFINITO 6 - Matt White - 3000K	57	1,48
1A2250400.27.20	INFINITO 6 - Matt Black - 2700K	57	1,48
1A2250400.30.20	INFINITO 6 - Matt Black - 3000K	57	1,48
1A2260300.27.20	INFINITO 12 - Matt White - 2700K	114	2,97
1A2260300.30.20	INFINITO 12 - Matt White - 3000K	114	2,97
1A2260400.27.20	INFINITO 12 - Matt Black - 2700K	114	2,97
1A2260400.30.20	INFINITO 12 - Matt Black - 3000K	114	2,97
1A2280300.27.40	MIRA ENDLESS - Matt White - 2700K	6	0,16
1A2280300.30.40	MIRA ENDLESS - Matt White - 3000K	6	0,16
1A2280400.27.40	MIRA ENDLESS - Matt Black - 2700K	6	0,16
1A2280400.30.40	MIRA ENDLESS - Matt Black - 3000K	6	0,16
1A2284900.27.40	MIRA ENDLESS - Matt Black/Polished Gold - 2700K	6	0,16
1A2284900.30.40	MIRA ENDLESS - Matt Black/Polished Gold - 3000K	6	0,16
1A2280300.27.41	MIRA ENDLESS CASAMBI - Matt White - 2700K	7	0,18
1A2280300.30.41	MIRA ENDLESS CASAMBI - Matt White - 3000K	7	0,18
1A2280400.27.41	MIRA ENDLESS CASAMBI - Matt Black - 2700K	7	0,18
1A2280400.30.41	MIRA ENDLESS CASAMBI - Matt Black - 3000K	7	0,18
1A2284900.27.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 2700K	7	0,18
1A2284900.30.41	MIRA ENDLESS CASAMBI - Matt Black/Polished Gold - 3000K	7	0,18
1A2960300.27.40	MISS ENDLESS - Matt White - 2700K	6,3	0,16
1A2960300.30.40	MISS ENDLESS - Matt White - 3000K	6,3	0,16
1A2960400.27.40	MISS ENDLESS - Matt Black - 2700K	6,3	0,16
1A2960400.30.40	MISS ENDLESS - Matt Black - 3000K	6,3	0,16
1A2960800.27.40	MISS ENDLESS - Brushed Brass - 2700K	6,3	0,16
1A2960800.30.40	MISS ENDLESS - Brushed Brass - 3000K	6,3	0,16
1A2962600.27.40	MISS ENDLESS - Total Black - 2700K	6,3	0,16
1A2962600.30.40	MISS ENDLESS - Total Black - 3000K	6,3	0,16
1A2962800.27.40	MISS ENDLESS - Polished Black Chrome - 2700K	6,3	0,16
1A2962800.30.40	MISS ENDLESS - Polished Black Chrome - 3000K	6,3	0,16
1A5500400.27.20	REFLEX - Matt Black - 2700K	40	1,04
1A5500400.30.20	REFLEX - Matt Black - 3000K	40	1,04
1A1080300.00.40	SPOT ENDLESS - Matt White	Max 13	Max 0,34
1A1080400.00.40	SPOT ENDLESS - Matt Black	Max 13	Max 0,34
1A1084900.00.40	SPOT ENDLESS - Matt Black/Polished Gold	Max 13	Max 0,34
1A1080300.00.41	SPOT ENDLESS CASAMBI - Matt White	Max 15,5	Max 0,40
1A1080400.00.41	SPOT ENDLESS CASAMBI - Matt Black	Max 15,5	Max 0,40
1A1084900.00.41	SPOT ENDLESS CASAMBI - Matt Black/Polished Gold	Max 15,5	Max 0,40

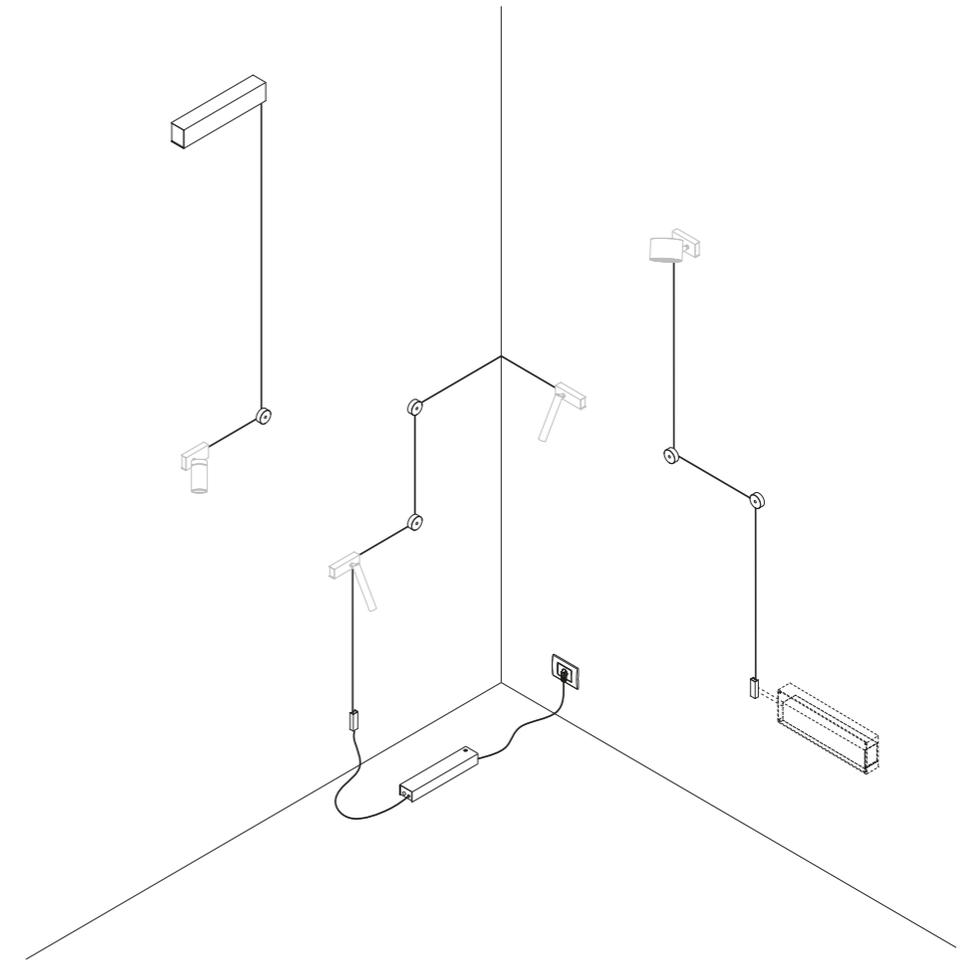


Examples of installation with the three different power supply modes

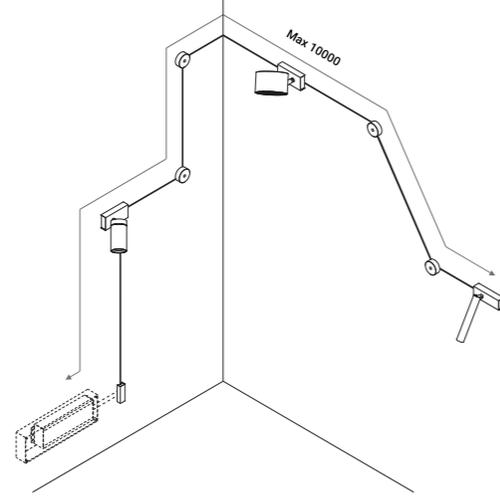


Example of combined installation between various devices with remote driver

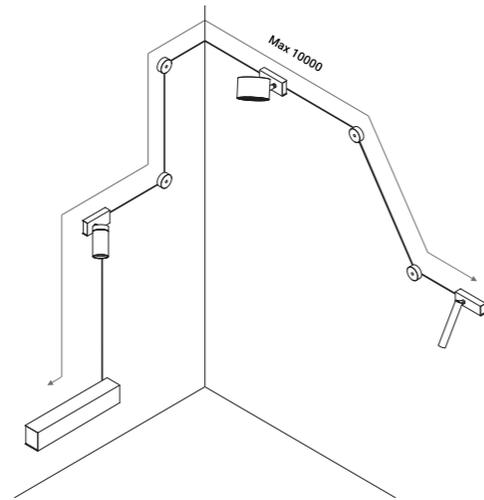


Example of combined installation between various devices with wall/ceiling driver

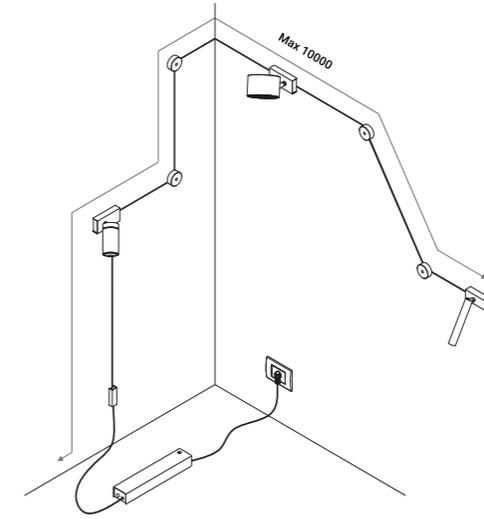

Example of combined installation between various devices with driver with plug

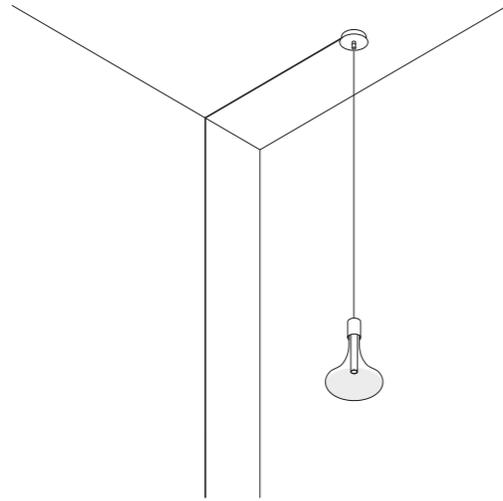


CATHODE: example of installation

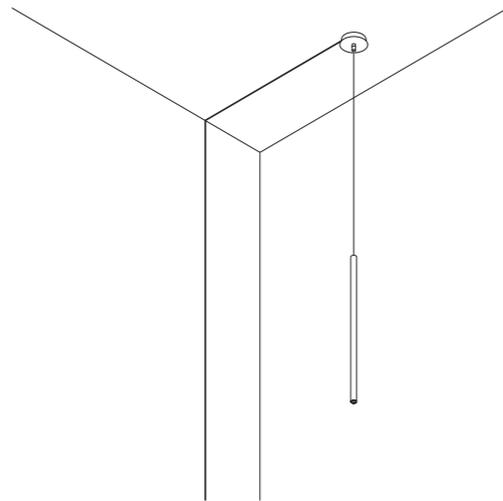


MISS: example of installation




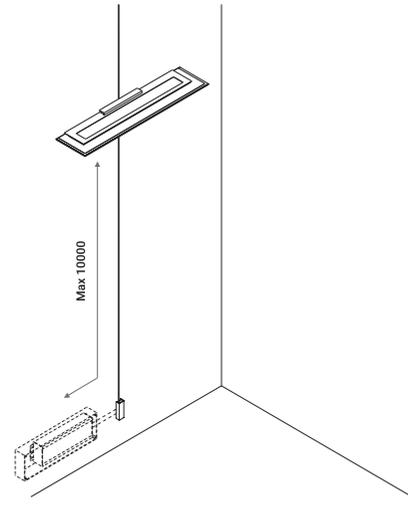


REFLEX: example of installation with remote driver

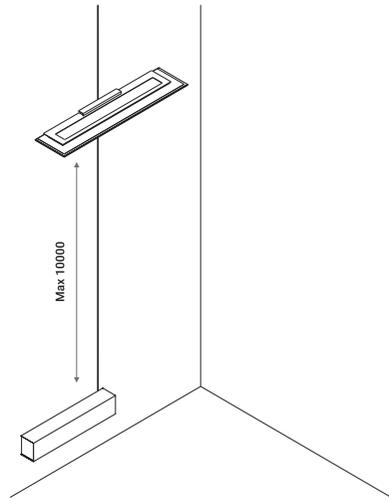


REFLEX: example of installation with wall/ceiling driver

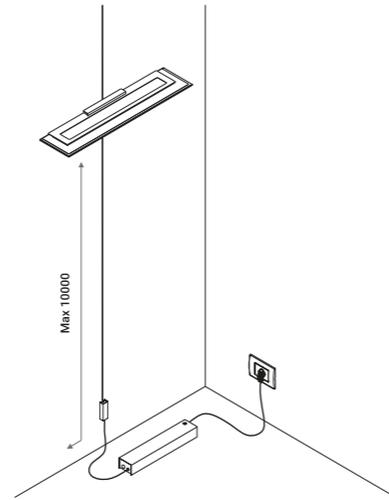


REFLEX: example of installation with driver with plug

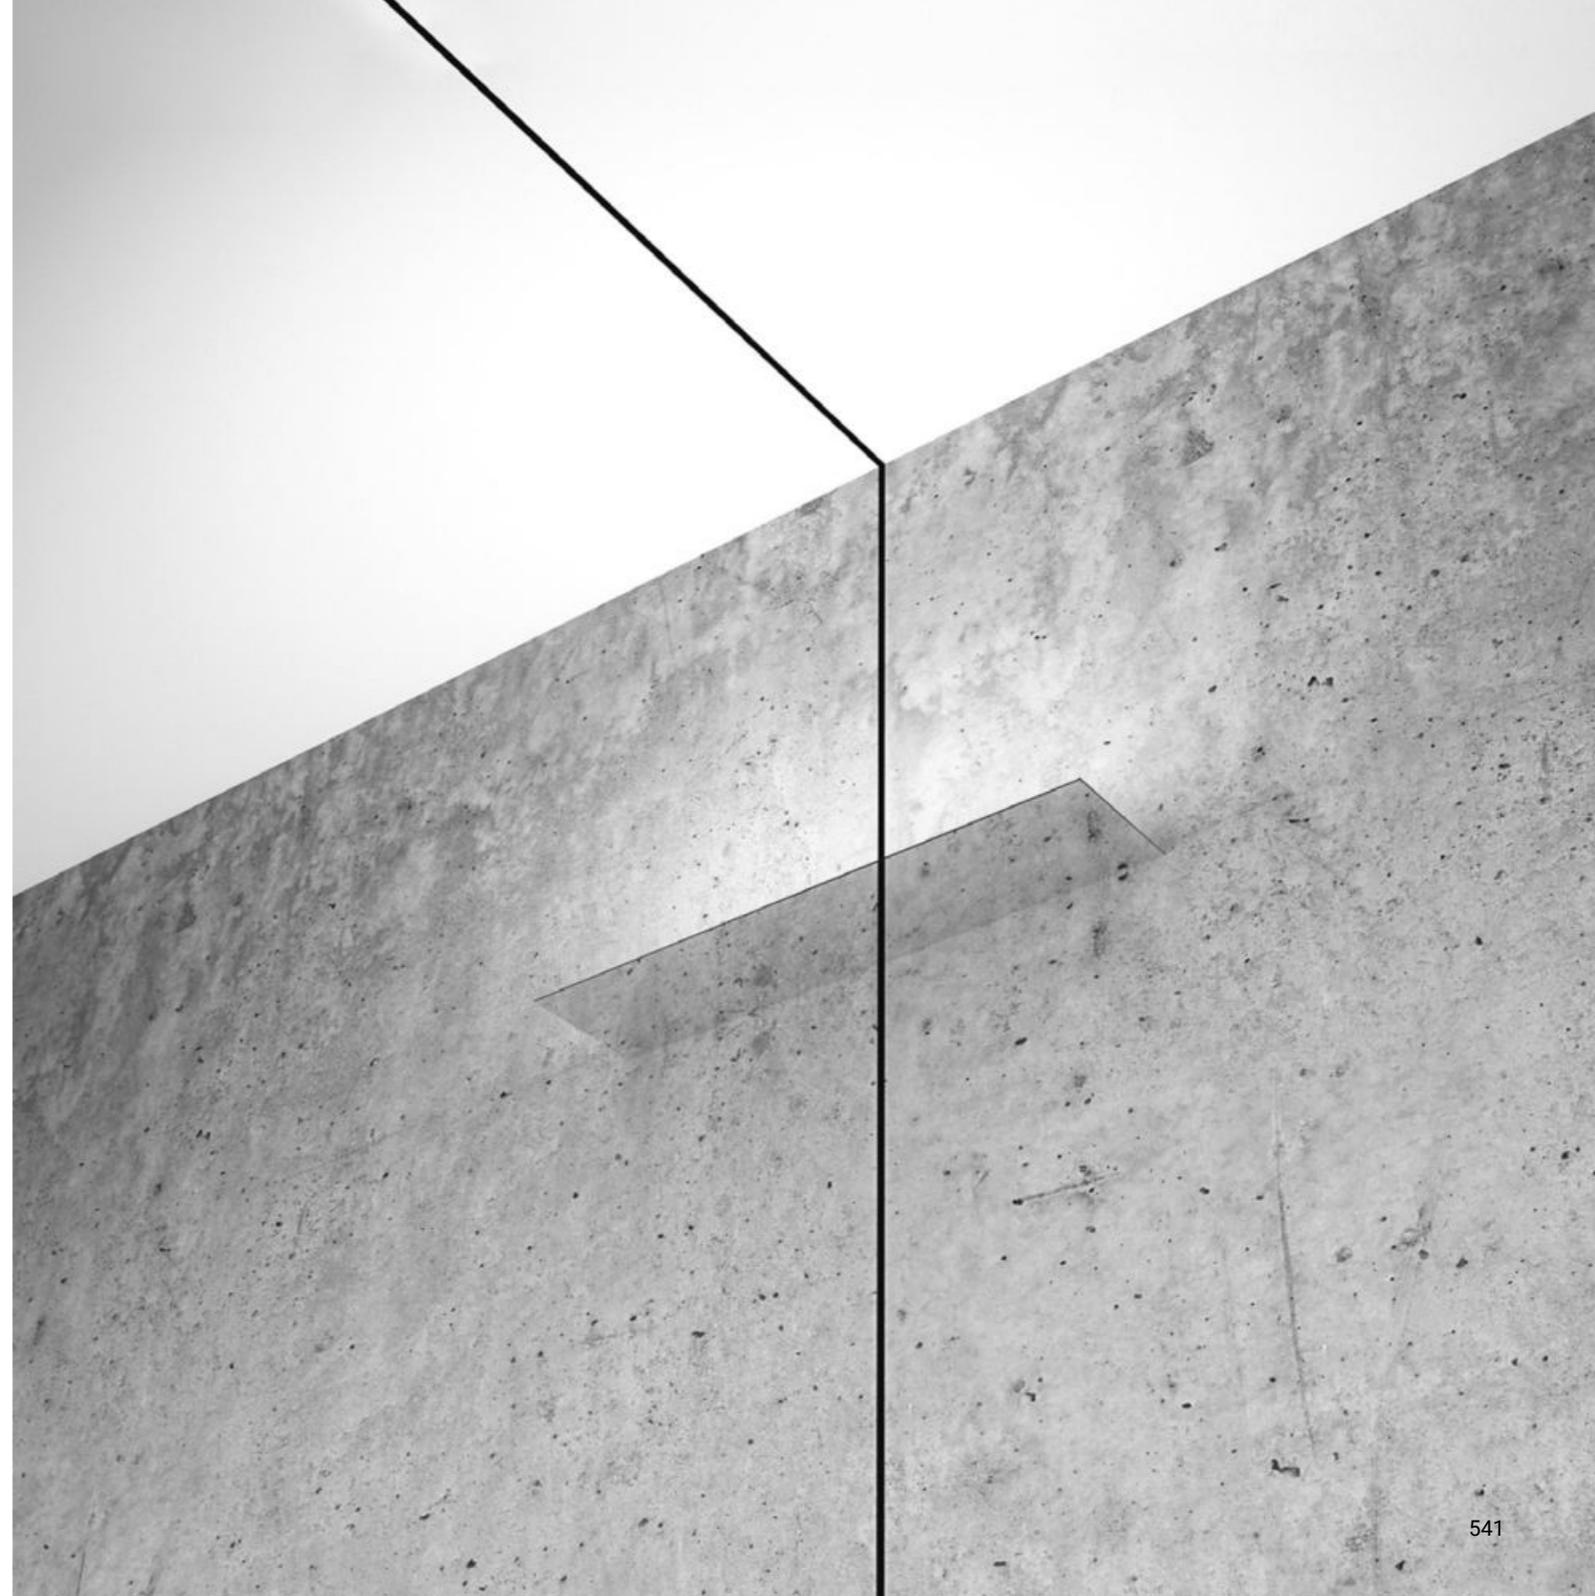


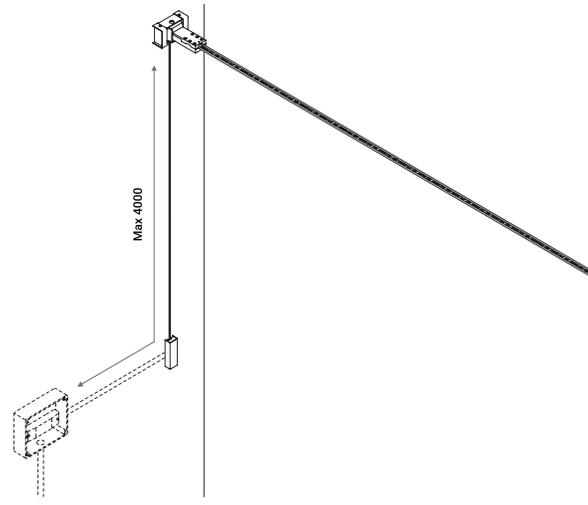

FLASH and INFINITO: example of installation with remote driver

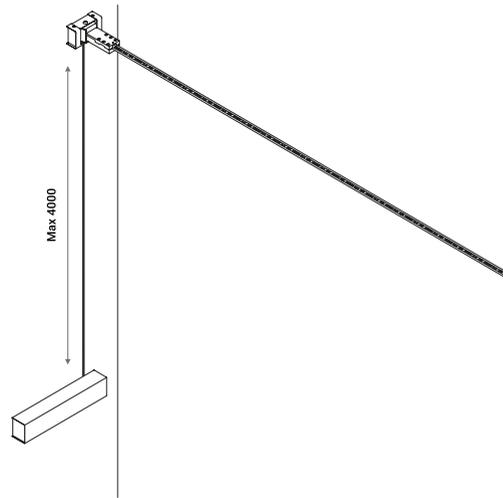


FLASH and INFINITO: example of installation with wall/ceiling driver

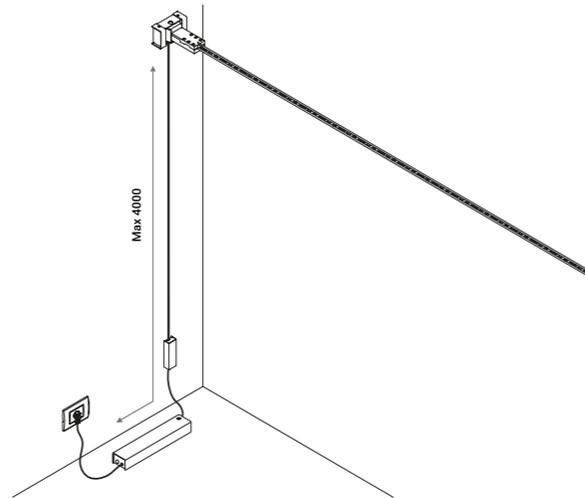

FLASH and INFINITO: example of installation with driver with plug




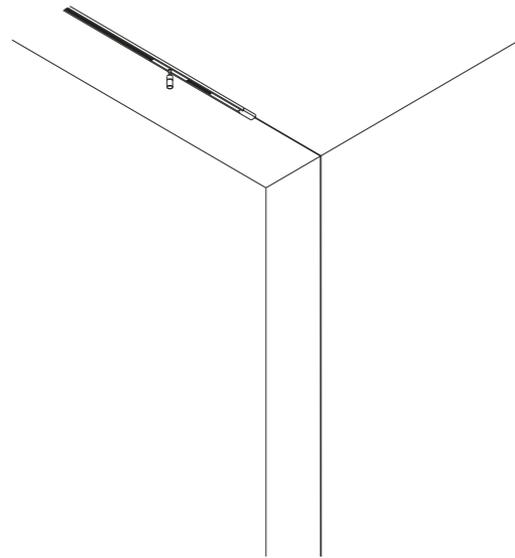


COLIBRI: example of installation




1A4170000.20.00  
COLIBRI ENDLESS connector

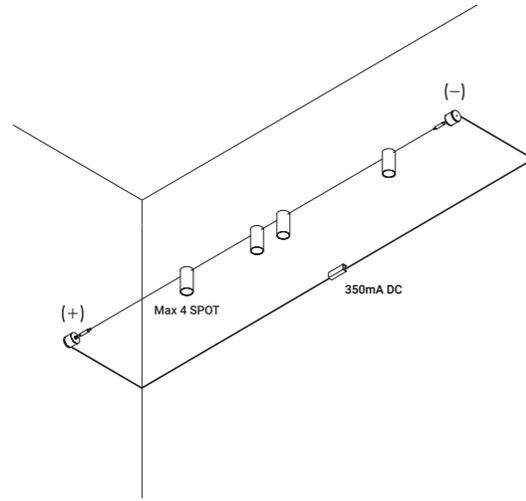

OHM: example of installation

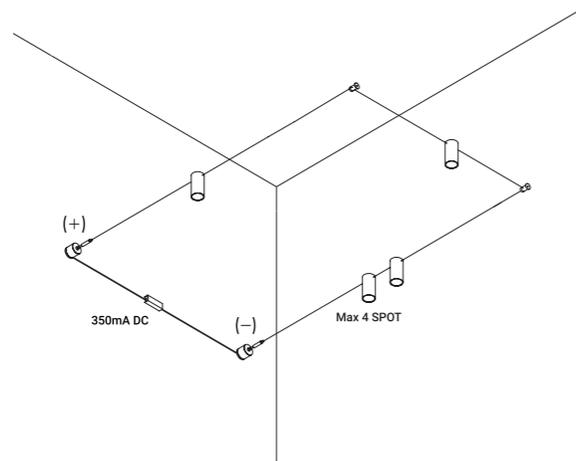


OHM: example of installation

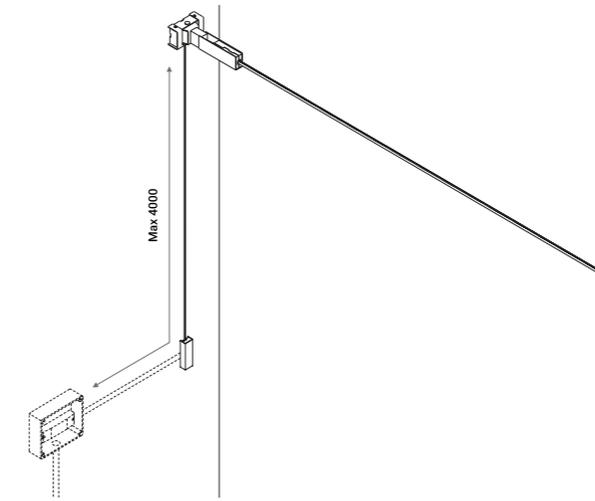

UTOPIA: example of installation

1X001XX00.02.00 - 1X001XX00.04.00  
Ceiling suspension kit

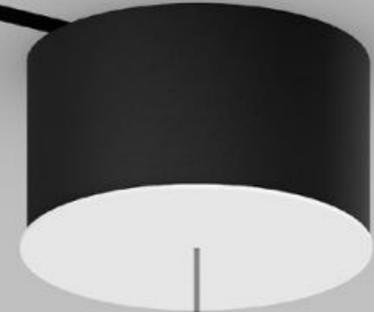



## FLASH

Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.  
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length  
(standard versions at 6 / 12 / 18 metres in length).

The ideal solution for direct illumination of spaces with very high ceilings.

Its name pays homage to the famous comic book superhero,  
who can run seven times the speed of light.

Luminaire designed also to be powered by ENDLESS system.

È la declinazione del nostro modello Infinito, ma con la luce diretta verso il basso.

Il nastro in acciaio inossidabile, largo 9 millimetri, può essere teso perfettamente  
fino a 36 metri di lunghezza (lampada standard 6 / 12 / 18 metri).


La soluzione ideale per l'illuminazione diretta di spazi di grande altezza.

Il nome è un omaggio al leggendario supereroe dei fumetti.


Famoso perché corre sette volte più veloce della luce...

Apparecchio illuminante alimentabile anche con il sistema ENDLESS.


How to order - FLASH 6

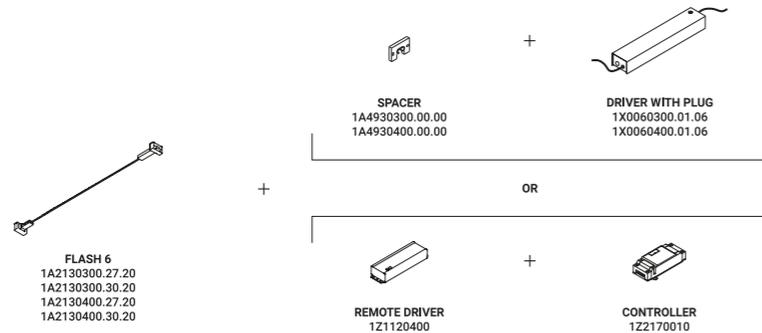

How to order - FLASH 12

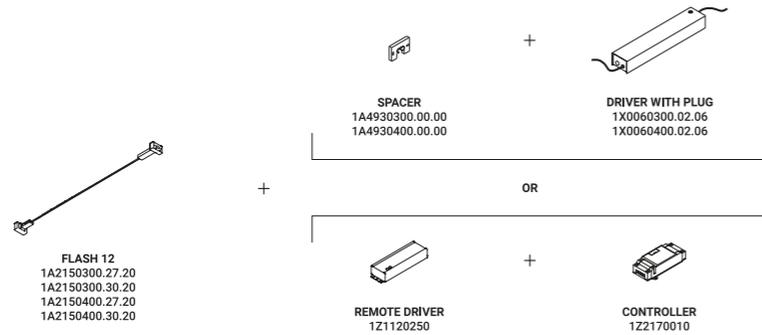

How to order - FLASH 18

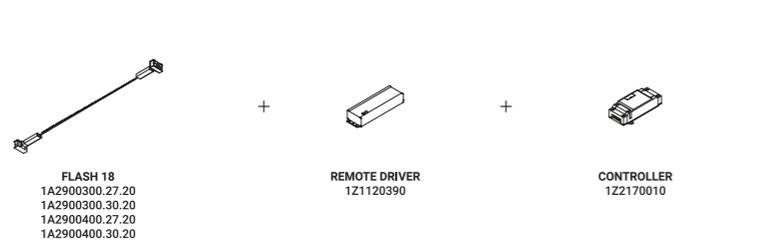

Wall-Systems / Direct / Indoor

Material Metal  
 Finish .03 Matt White .04 Matt Black

**Note** Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW – 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Speciale nastro (9 mm) in acciaio inox teso da parete a parete. Disponibile da 6/12/18m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione a Doppia Emissione (DE) e in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. Le versioni DE sono realizzabili con doppia accensione (necessari due driver). FLASH 6 e FLASH 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*

**FLASH 6**  
 57W - 1,48A  
 48V DC  
 2700K - 6576lm / 3000K - 6708lm  
 CRI >90  
 Driver not included  
 CE IP20 E

Matt White - 2700K	1A2130300.27.20
Matt White - 3000K	1A2130300.30.20
Matt Black - 2700K	1A2130400.27.20
Matt Black - 3000K	1A2130400.30.20


**FLASH 12**  
 114W - 2,97A  
 48V DC  
 2700K - 13152lm / 3000K - 13416lm  
 CRI >90  
 Driver not included  
 CE IP20 E

Matt White - 2700K	1A2150300.27.20
Matt White - 3000K	1A2150300.30.20
Matt Black - 2700K	1A2150400.27.20
Matt Black - 3000K	1A2150400.30.20


**FLASH 18**  
 171W  
 48V DC  
 2700K - 19728lm / 3000K - 20124lm  
 CRI >90  
 Driver not included  
 CE IP20

Matt White - 2700K	1A2900300.27.20
Matt White - 3000K	1A2900300.30.20
Matt Black - 2700K	1A2900400.27.20
Matt Black - 3000K	1A2900400.30.20



How to order -  
FLASH 6 DE

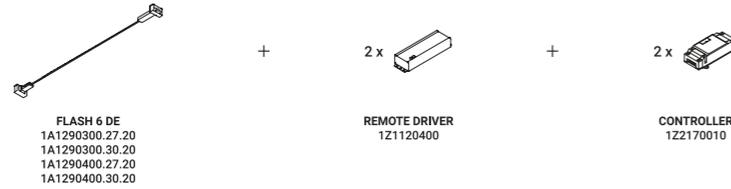

How to order -  
FLASH 12 DE

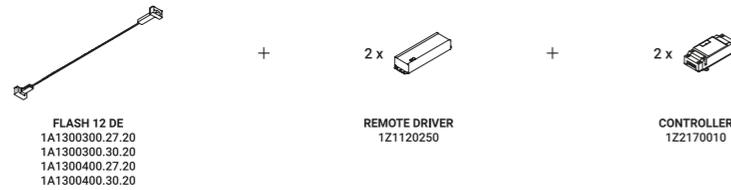

How to order -  
FLASH 18 DE

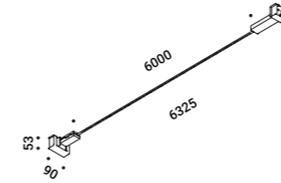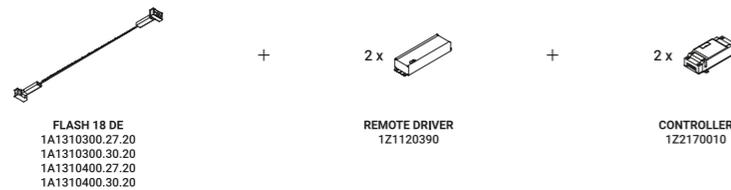


**FLASH 6 DE**

Dual emission  
114W  
48V DC  
2700K - Up 6576lm - Down 6576lm /  
3000K - Up 6708lm - Down 6708lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1290300.27.20  
1A1290300.30.20  
1A1290400.27.20  
1A1290400.30.20

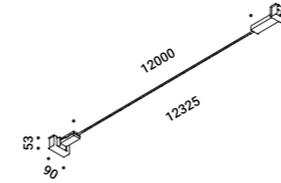


**FLASH 12 DE**

Dual emission  
228W  
48V DC  
2700K - Up 13152lm - Down 13152lm /  
3000K - Up 13416lm - Down 13416lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1300300.27.20  
1A1300300.30.20  
1A1300400.27.20  
1A1300400.30.20

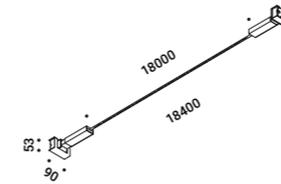


**FLASH 18 DE**

Dual emission  
342W  
48V DC  
2700K - Up 19728lm - Down 19728lm /  
3000K - Up 20124lm - Down 20124lm  
CRI >90  
Driver not included  
CE IP20


Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A1310300.27.20  
1A1310300.30.20  
1A1310400.27.20  
1A1310400.30.20


How to order -  
FLASH 5 TW

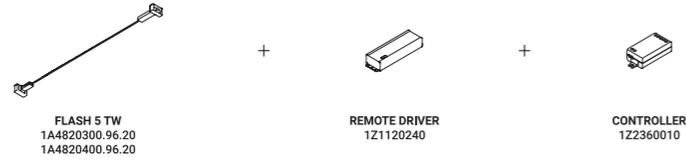

How to order -  
FLASH 10 TW

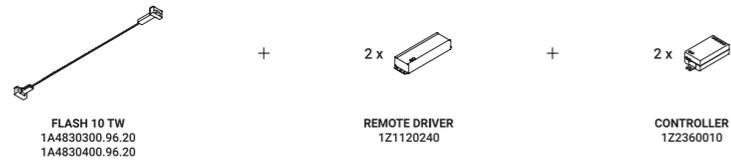


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*

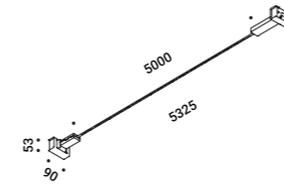

**FLASH 5 TW**  
Tunable White  
96W  
24V DC  
2700K - 4690lm / 6500K - 5190lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4820300.96.20  
1A4820400.96.20

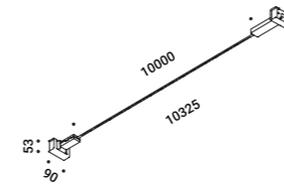


**FLASH 10 TW**  
Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE IP20


Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4830300.96.20  
1A4830400.96.20


How to order -  
FLASH 5 DE TW

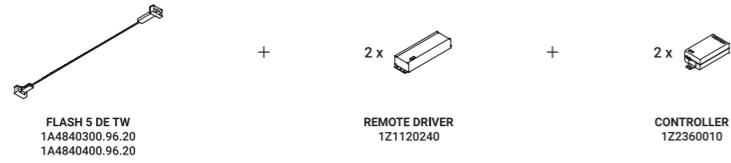

How to order -  
FLASH 10 DE TW

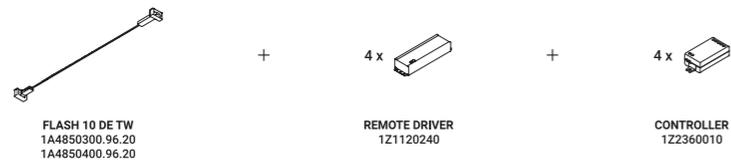


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*

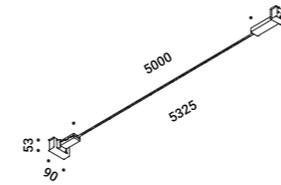

**FLASH 5 DE TW**  
Dual emission - Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4840300.96.20  
1A4840400.96.20

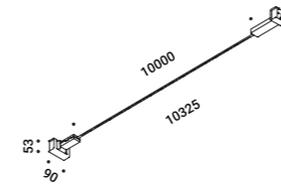


**FLASH 10 DE TW**  
Dual emission - Tunable White  
384W  
24V DC  
2700K - 18760lm / 6500K - 20760lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K


1A4850300.96.20  
1A4850400.96.20

## Compulsory accessories / Accessori obbligatori


## Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	FLASH 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	FLASH 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	FLASH 6 / FLASH 6 DE	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	FLASH 12 / FLASH 12 DE	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	FLASH 18 / FLASH 18 DE	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120240	

## Compulsory accessories / Accessori obbligatori

## Drivers / Alimentatori



Controller				Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 18 DE	1Z2170010		



Controller Casambi - Tunable White				Not included
	FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z2360010		

## Optional accessories / Accessori opzionali

## Installation kits / Kit d'installazione



Spacer / Distanziale				Not included
Matt White	For driver kit with plug	FLASH 6 / FLASH 12	1A4930300.00.00	
Matt Black	For driver kit with plug	FLASH 6 / FLASH 12	1A4930400.00.00	



Ceiling installation kit / Kit d'installazione da soffitto				Not included
Matt White			1A0080300.00.00	
Matt Black			1A0080400.00.00	



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°				Not included
Matt White			1A0120300.00.00	
Matt Black			1A0120400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro				Not included
Matt White			1A0340300.00.00	
Matt Black			1A0340400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro				Not included
Matt White			1A0350300.00.00	
Matt Black			1A0350400.00.00	




Swallows / Rondini				Not included
Matt Black			1A0800400.00.00	

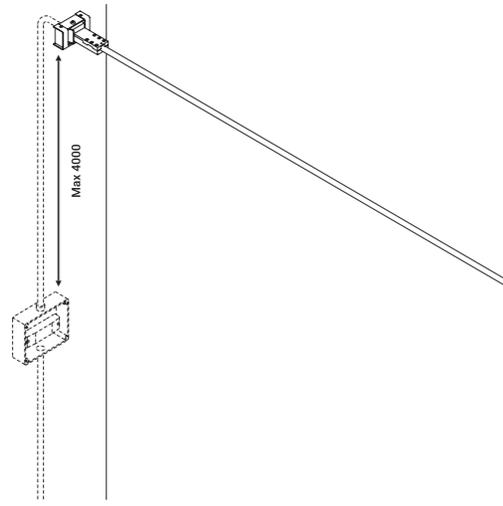


Example of installation with remote driver

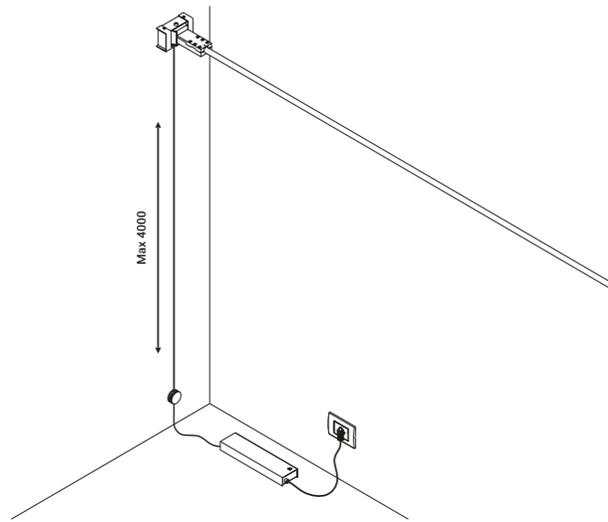


Example of installation with driver with plug

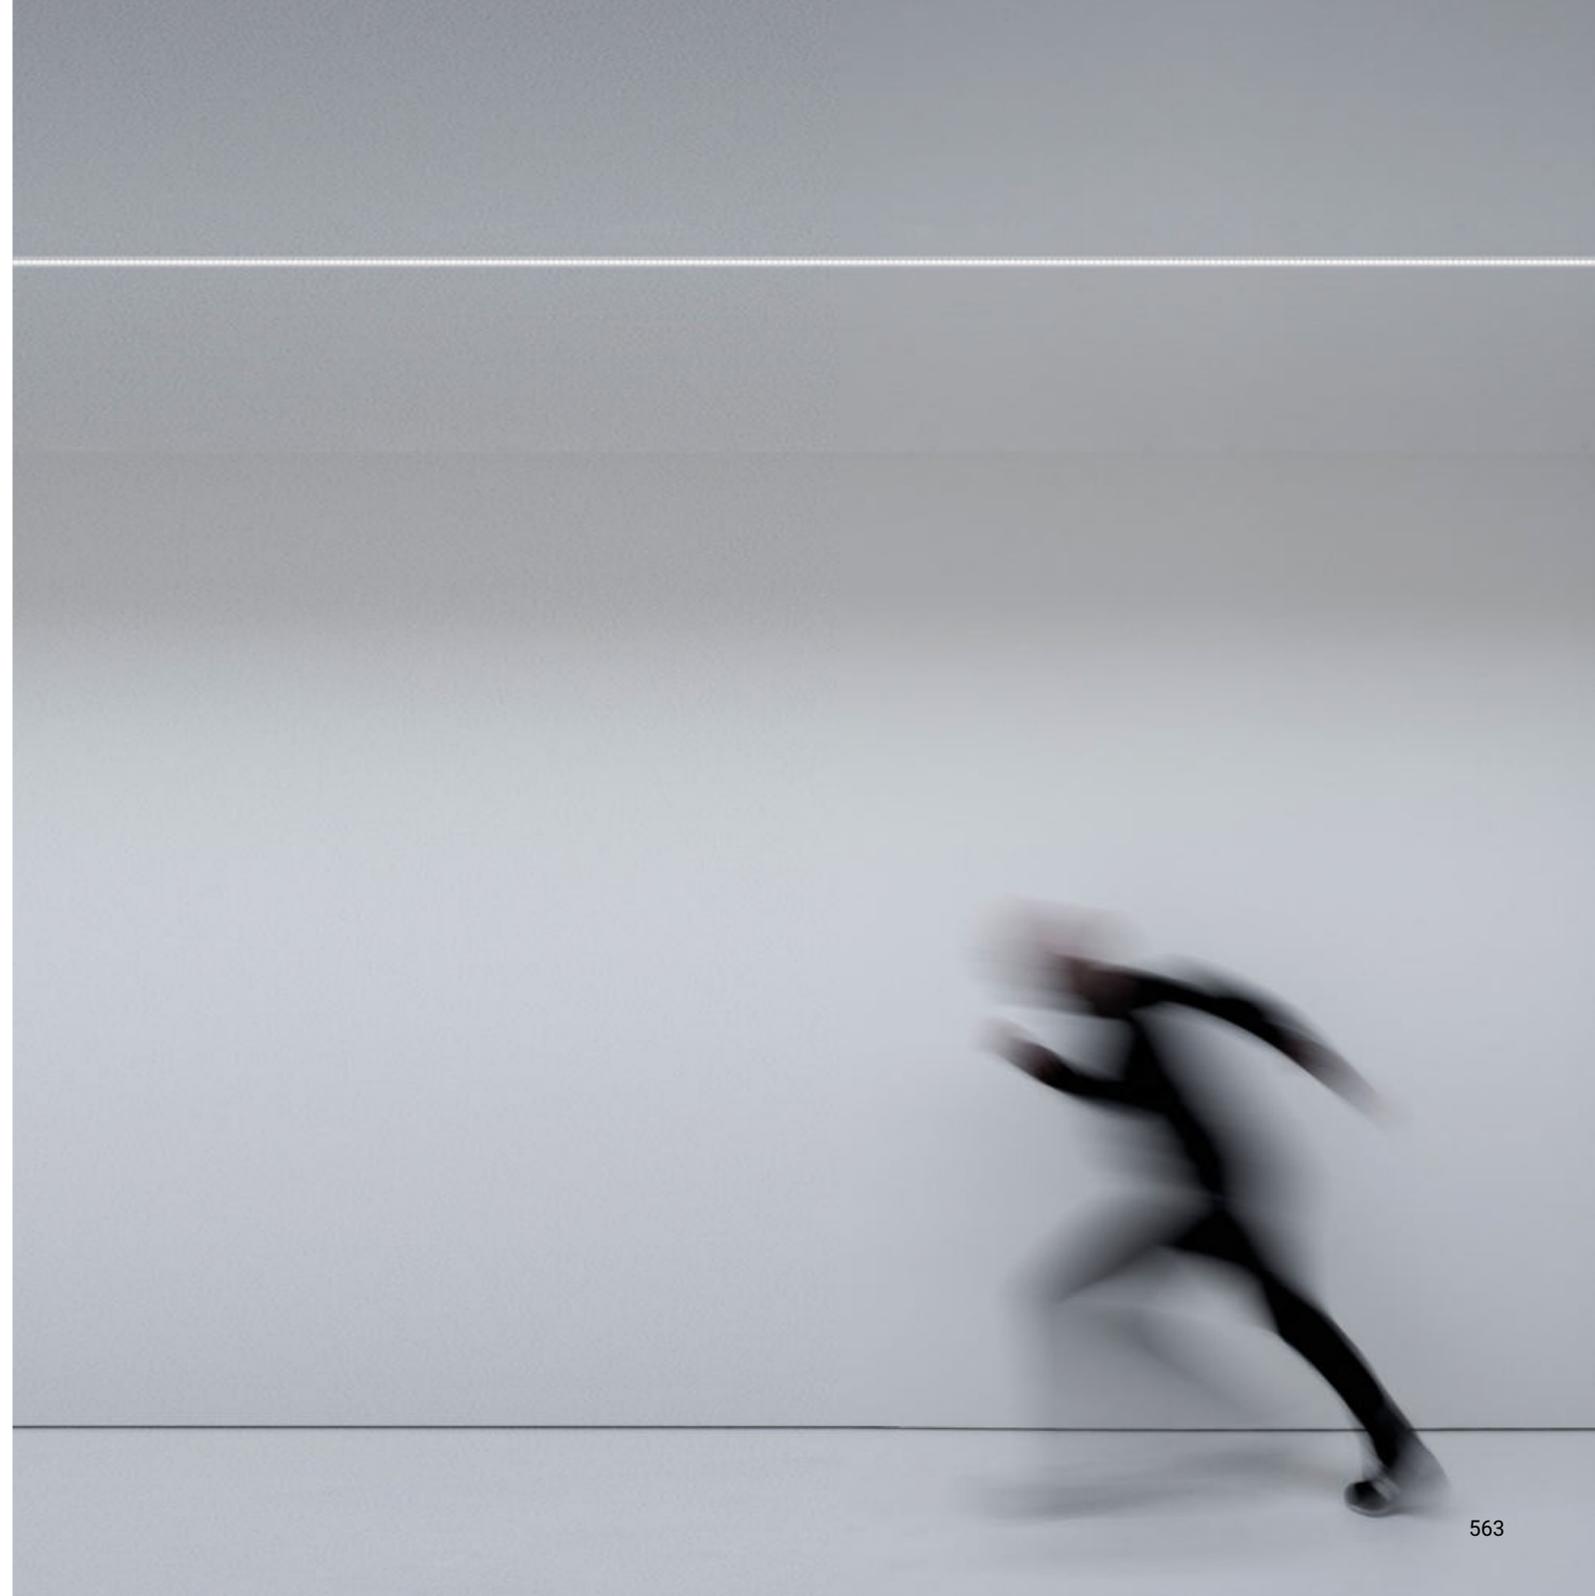


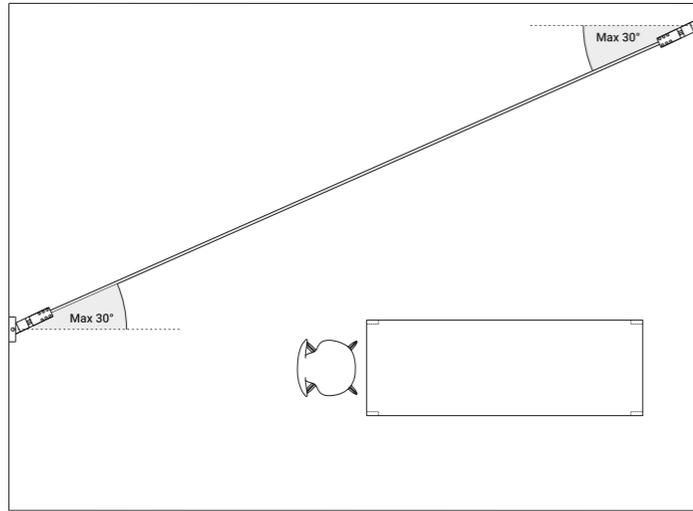


Example of installation with max rotation 30°

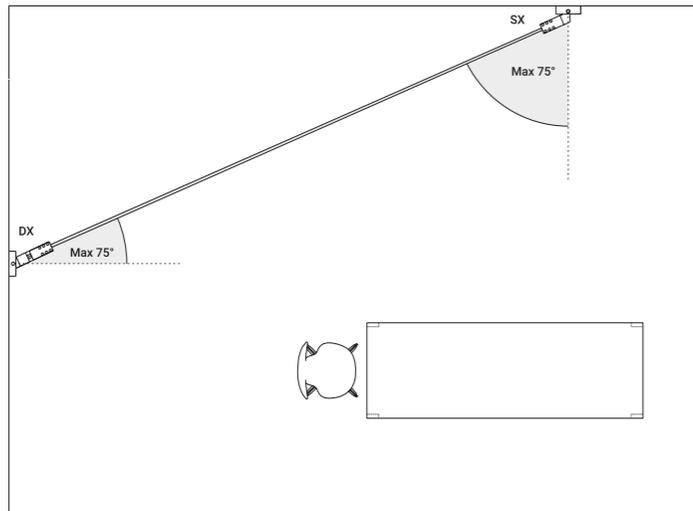


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

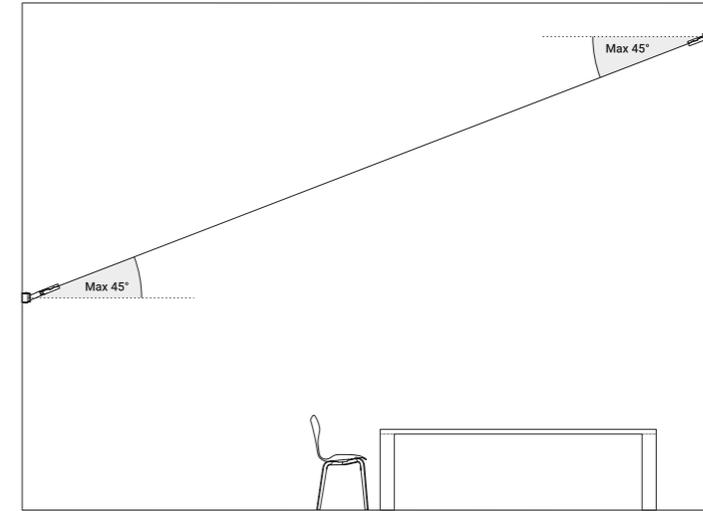

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

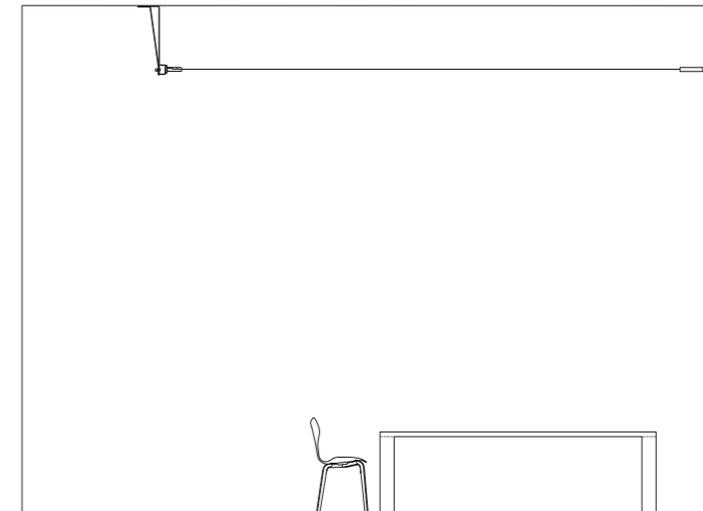

1A0080400.00.00 - Example of installation with ceiling installation kit

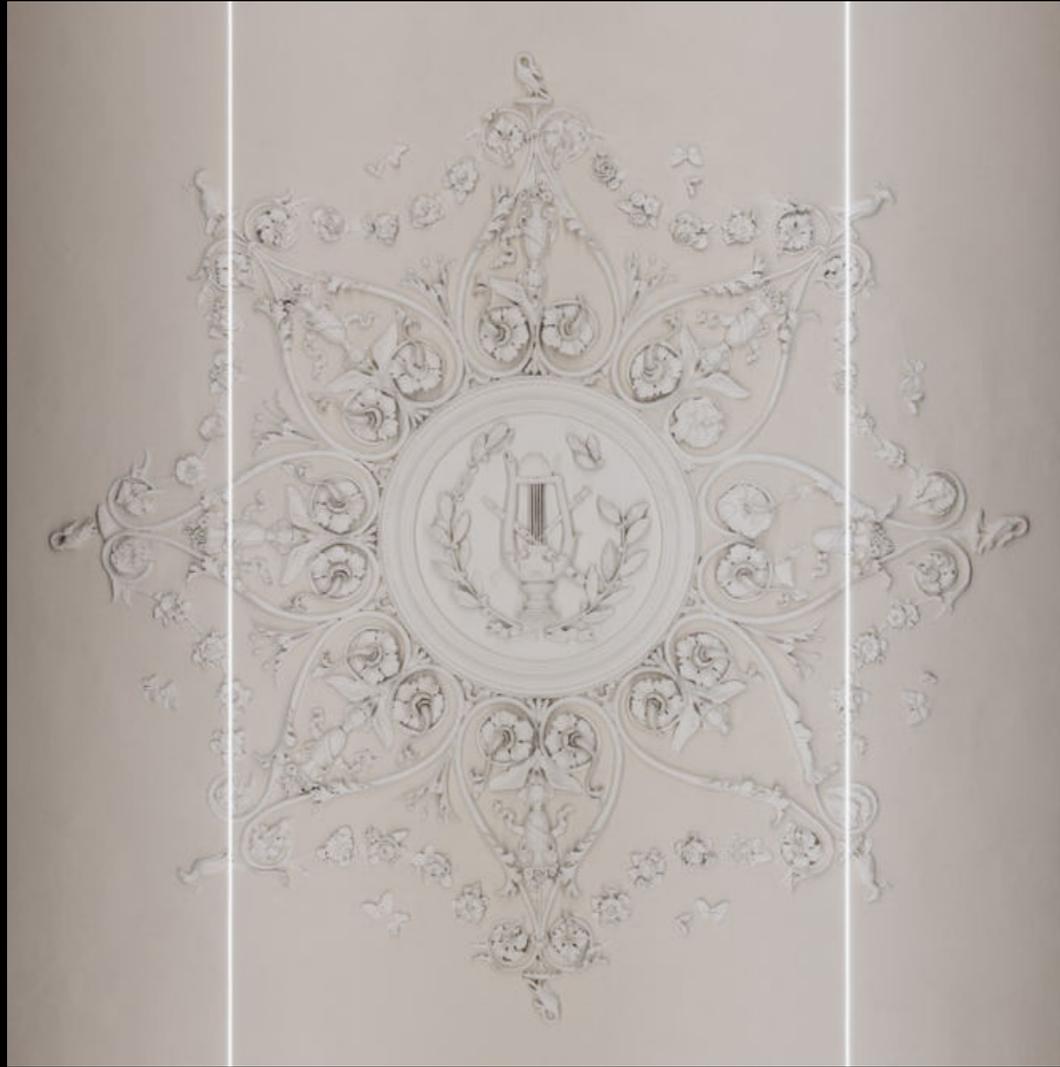

Acetaia Maria Luigia  
Modena





## INFINITO

Davide Groppi / 2016


A spatial concept, it is continuous light.  
An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor.  
It comes in strips up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length).  
Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.  
This project pays homage to the art of Lucio Fontana and his spatial concepts.  
The graphic force of this system is surprising.  
It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.  
Luminaire designed also to be powered by ENDLESS system.

**Archiproducts Design Award 2017**  
**People's Choice AZ Award 2017**


È un concetto spaziale, è luce continua.  
Un nastro sottilissimo, in un particolare acciaio inossidabile e di soli 18 millimetri di larghezza, taglia lo spazio e produce luce indiretta.  
È possibile adattare, tendere e orientare Infinito da parete a parete, da soffitto a pavimento, fino a 36 metri di lunghezza (lampada standard 6 / 12 / 18 metri).  
Infinito smaterializza l'oggetto lampada, trasformandolo in qualcos'altro, lasciandone solo una traccia, una riga e poi nemmeno più quella, solo la luce.  
È un omaggio all'arte di Lucio Fontana e ai suoi concetti spaziali.  
La forza grafica di questo sistema è sorprendente, per la sua capacità di essere integrato e nello stesso tempo presente nello spazio.  
Infinito, essenza e assenza.  
Apparecchio illuminante alimentabile anche con il sistema ENDLESS.

**Archiproducts Design Award 2017**  
**People's Choice AZ Award 2017**

How to order - INFINITO 6

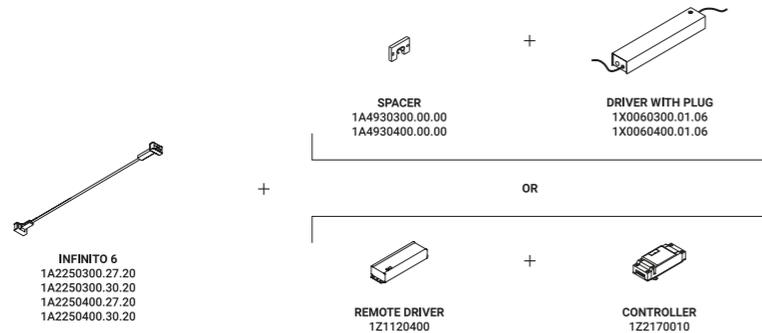

How to order - INFINITO 12

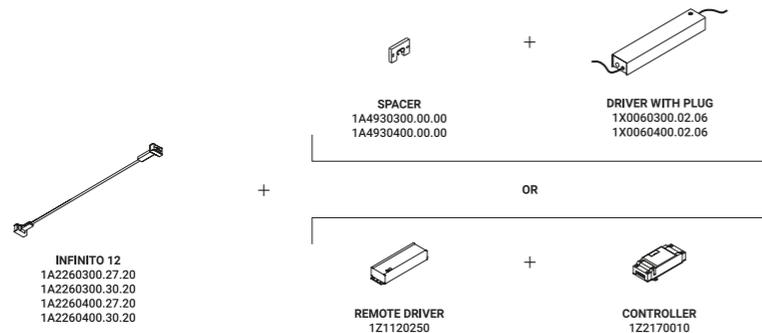

How to order - INFINITO 18



Wall-Systems / Indirect / Indoor

Material Metal  
Finish .03 Matt White .04 Matt Black

Note Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW – 5 / 10 m) version. LED strip that can be divided every 96,6 mm. INFINITO 6 and INFINITO 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

Speciale nastro (18 mm) in acciaio inox teso da parete a parete. Disponibile da 6 / 12 / 18 m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. INFINITO 6 e INFINITO 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.

**INFINITO 6**  
57W - 1,48A  
48V DC  
2700K - 6576lm / 3000K - 6708lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K	1A2250300.27.20
Matt White - 3000K	1A2250300.30.20
Matt Black - 2700K	1A2250400.27.20
Matt Black - 3000K	1A2250400.30.20


**INFINITO 12**  
114W - 2,97A  
48V DC  
2700K - 13152lm / 3000K - 13416lm  
CRI >90  
Driver not included  
CE IP20 E

Matt White - 2700K	1A2260300.27.20
Matt White - 3000K	1A2260300.30.20
Matt Black - 2700K	1A2260400.27.20
Matt Black - 3000K	1A2260400.30.20


**INFINITO 18**  
171W  
48V DC  
2700K - 19728lm / 3000K - 20124lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K	1A2270300.27.20
Matt White - 3000K	1A2270300.30.20
Matt Black - 2700K	1A2270400.27.20
Matt Black - 3000K	1A2270400.30.20


How to order -  
INFINITO 5 TW

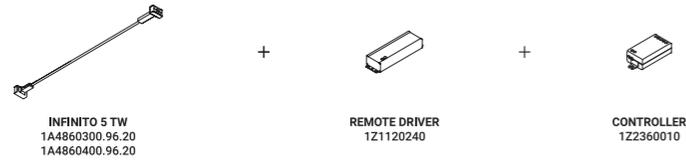

How to order -  
INFINITO 10 TW

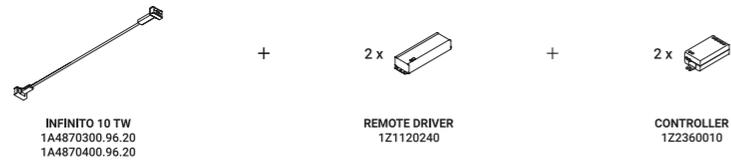


**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light. *Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*

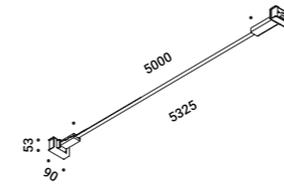

**INFINITO 5 TW**  
Tunable White  
96W  
24V DC  
2700K - 4690lm / 6500K - 5190lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K

1A4860300.96.20  
1A4860400.96.20

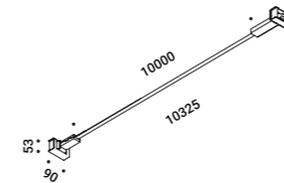


**INFINITO 10 TW**  
Tunable White  
192W  
24V DC  
2700K - 9380lm / 6500K - 10380lm  
CRI >90  
Driver not included  
CE IP20

Matt White - 2700K / 6500K  
Matt Black - 2700K / 6500K


1A4870300.96.20  
1A4870400.96.20

Compulsory accessories / Accessori obbligatori


Drivers / Alimentatori




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060300.01.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 80W - IP20 Dimmer on board	INFINITO 6	1X0060400.01.06	




Driver with plug / Alimentatore con spina				Not included
Matt White	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060300.02.06	
Matt Black	Input 100-240V - 50/60Hz Output 48V - Max 150W - IP20 Dimmer on board	INFINITO 12	1X0060400.02.06	




Driver / Alimentatore				Not included
100-240V	48V/80W/IP67/1-10V	INFINITO 6	1Z1120400	



Driver / Alimentatore				Not included
100-240V	48V/150W/IP67/1-10V	INFINITO 12	1Z1120250	




Driver / Alimentatore				Not included
100-240V	48V/240W/IP67/1-10V	INFINITO 18	1Z1120390	




Driver / Alimentatore				Not included
100-240V	24V/120W/IP67/1-10V	INFINITO 5 TW / INFINITO 10 TW	1Z1120240	

Compulsory accessories / Accessori obbligatori



Controller			Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	INFINITO 6 / INFINITO 12 / INFINITO 18	INFINITO 6 / INFINITO 12 / 1Z2170010	




Controller Casambi - Tunable White			Not included
	INFINITO 5 TW / INFINITO 10 TW	1Z2360010	

Optional accessories / Accessori opzionali


Installation kits / Kit d'installazione




Spacer / Distanziale				Not included
Matt White	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930300.00.00	
Matt Black	For driver kit with plug	INFINITO 6 / INFINITO 12	1A4930400.00.00	




Ceiling installation kit / Kit d'installazione da soffitto				Not included
Matt White			1A0080300.00.00	
Matt Black			1A0080400.00.00	



Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45°				Not included
Matt White			1A0120300.00.00	
Matt Black			1A0120400.00.00	




Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro				Not included
Matt White			1A0340300.00.00	
Matt Black			1A0340400.00.00	




Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro				Not included
Matt White			1A0350300.00.00	
Matt Black			1A0350400.00.00	



Swallows / Rondini				Not included
Matt Black			1A0290400.00.00	

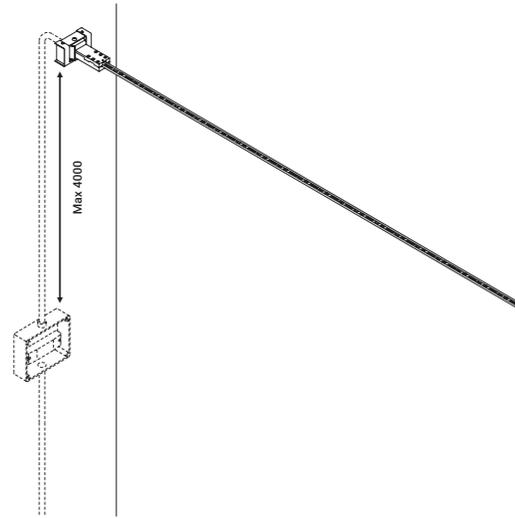


Example of installation with remote driver

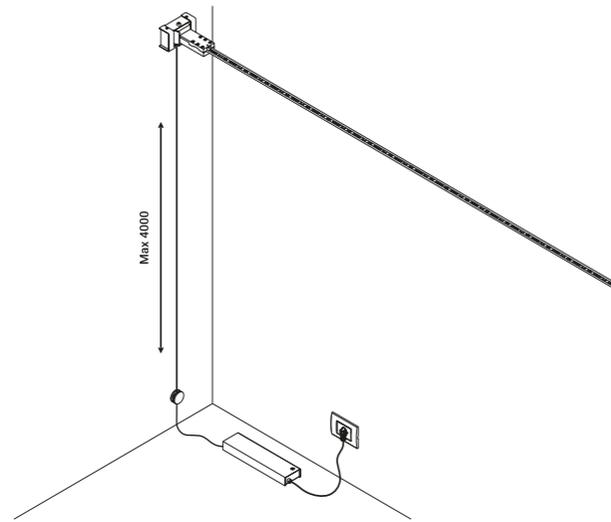


Example of installation with driver with plug




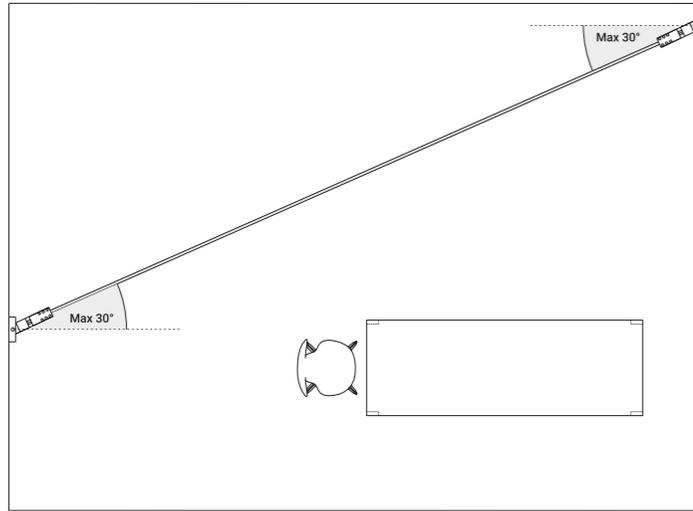


Example of installation with max rotation 30°

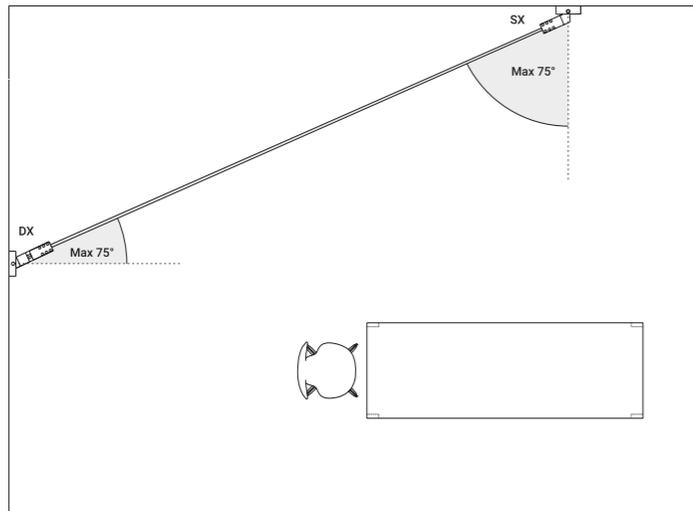

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

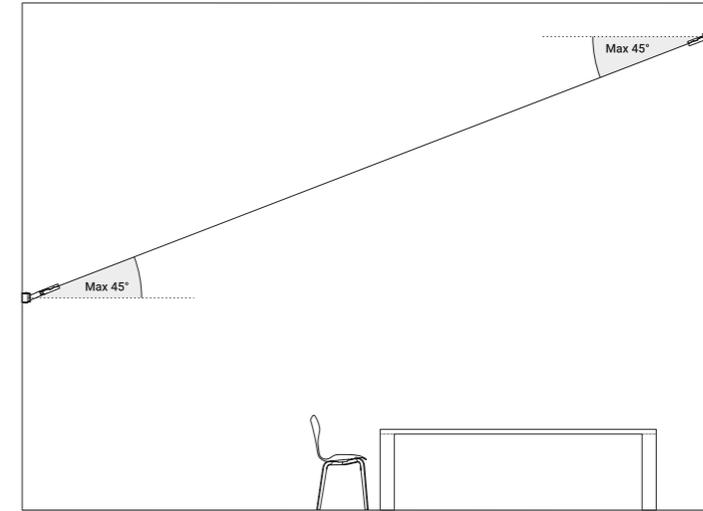

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

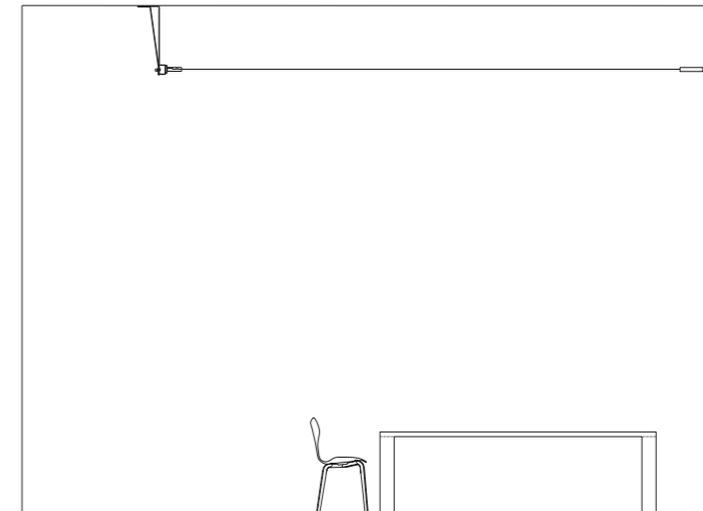

1A0080400.00.00 - Example of installation with ceiling installation kit








Ciò che è stato è un oggetto di studio  
tradizionale di questo museo, una ricerca  
creativa interpretazione di materiali, forme e strutture.  
La collezione per interni è un sistema, offrendo un  
spazio in profondità, un'atmosfera, un'idea di spazio  
e prodotti destinati a diventare nuovi spazi grazie  
alla semplicità delle loro caratteristiche.

Funzionali e decorativi, tutti i oggetti sono pensati  
a tutto per rispondere a necessità progettuali di design,  
senza mai rinunciare a un'idea di modernità.  
Ogni oggetto è un pezzo unico, realizzato dalla  
manifattura locale, in modo da creare un'atmosfera  
affascinante. In questi, decorazione e funzionalità  
potrebbero coesistere, e possono essere in grado  
di un grande successo.





INFINITO





Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope,  
the light reaches everywhere, weightless and wonderful.

Ohm is an electro mechanic project that takes maximum advantage  
of the characteristics of luminous diodes.

Its secret is a special unipolar wire stretched from wall to wall.

Where the light comes from is discreetly hidden,  
giving all the attention to what it is illuminating.

It is possible to replace the light source even with the luminaire assembled.

Luminaire designed also to be powered by ENDLESS conductive tape.

**Selection for ADI Design Index 2020**

La luce corre sul filo. Un filo quasi impercettibile, sospeso nello spazio.

Come un funambolo su una corda sottilissima,  
la luce arriva ovunque, con leggerezza ed emozione.

Ohm è un progetto elettromeccanico,  
che sfrutta al massimo le caratteristiche dei diodi luminosi.

Il segreto è uno speciale cavo unipolare tirato da parete a parete.


La fonte quasi si nasconde, impalpabile e discreta,  
regalando la scena al soggetto illuminato.

È possibile sostituire l'ottica anche ad apparecchio montato.


Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.

**Selezione per ADI Design Index 2020**

Remote driver version

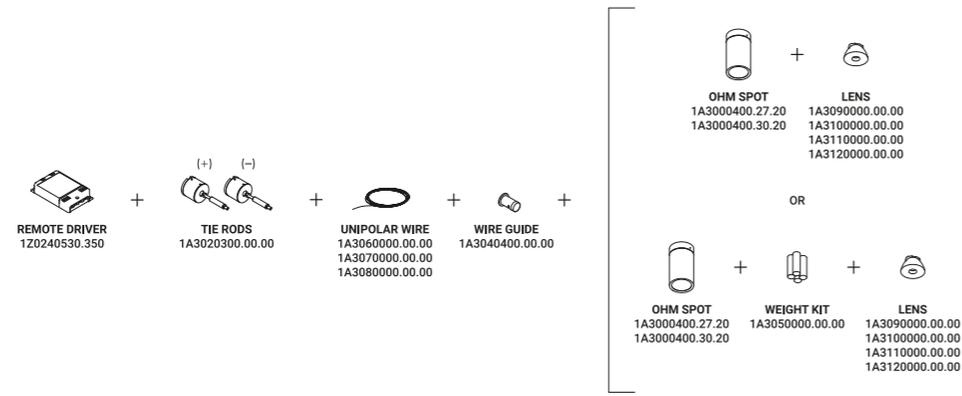

Wall/ceiling driver version

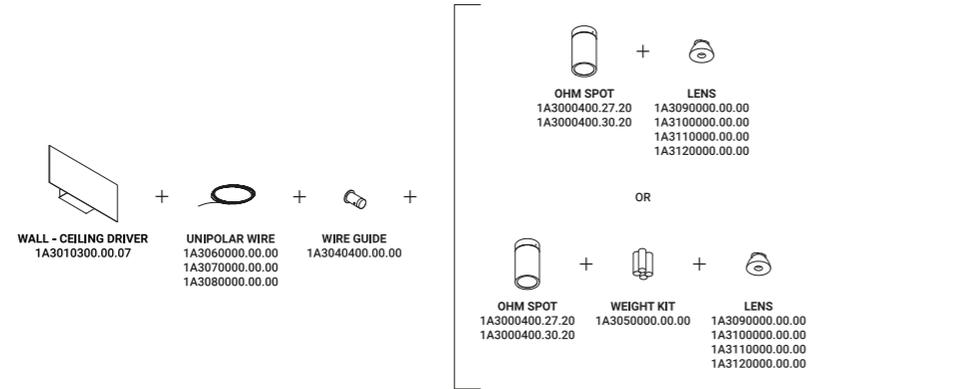


Systems / Direct / Indoor

**Material** Metal - PA  
**Finish** .04 Matt Black

**Note** Special unipolar wire stretched from wall to wall. Max 4 Spots. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

*Speciale cavo unipolare teso da parete a parete. Max 4 Spot. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*




**OHM SPOT**  
 3,2W  
 Max 350mA DC  
 2700K / 3000K  
 CRI >95  
 Driver not included  
 CE IP20 ENEC

Matt Black - 2700K  
 Matt Black - 3000K

1A3000400.27.20  
 1A3000400.30.20

**Compulsory accessories / Accessori obbligatori**

## Installation kits / Kit d'installazione



<b>Tie rods / Tiranti</b>			Not included
Matt White	2 Pieces	1A3020300.00.00	



<b>Unipolar wire - 12 m / Cavo unipolare - 12 m</b>			Not included
	Max 60V DC	1A3060000.00.00	


<b>Unipolar wire - 24 m / Cavo unipolare - 24 m</b>			Not included
	Max 60V DC	1A3070000.00.00	

<b>Unipolar wire - 48 m / Cavo unipolare - 48 m</b>			Not included
	Max 60V DC	1A3080000.00.00	

## Drivers / Alimentatori




<b>Driver / Alimentatore</b>			Not included
220-240V(100-127V)	350mA/18W(18W)/IP20/DALI - PUSH - 1-10V	1Z0240530.350	



<b>Wall/ceiling driver / Alimentatore da parete/soffitto</b>			Not included
Matt White	Input 100-240V - 50/60Hz Output 350mA - 18,5W - IP20 DALI - PUSH - 1-10V	1A3010300.00.07	


## Other accessories / Altri accessori



<b>Lens / Lente</b>			Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

**Optional accessories / Accessori opzionali**


## Installation kits / Kit d'installazione




<b>Wall adapter plate / Piastra parete</b>			Not included
Matt White	For mounting on brick masonry walls	1A3030300.00.00	



<b>Wire guide / Guidacavo</b>			Not included
Matt Black	1 Piece	1X0020400.01.00	




<b>Weight kit for suspension version / Kit pesi per versione a sospensione</b>			Not included
	4 Pieces	1A3050000.00.00	




OHM




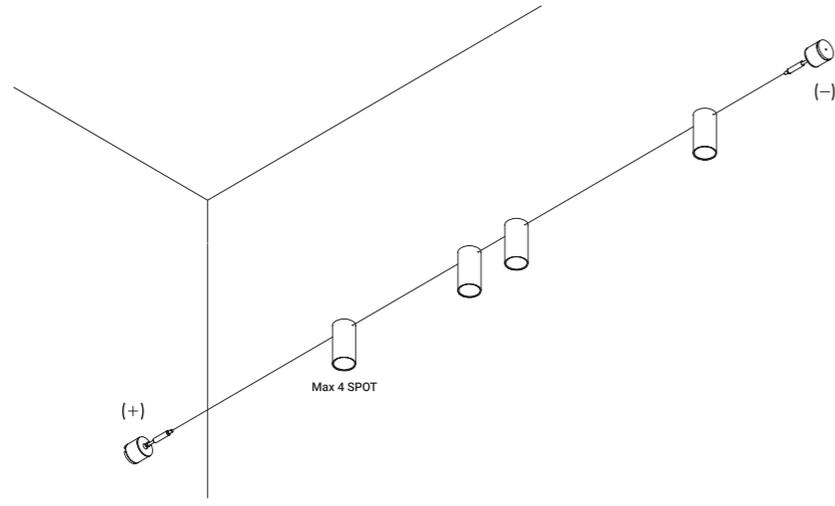

Remote driver version

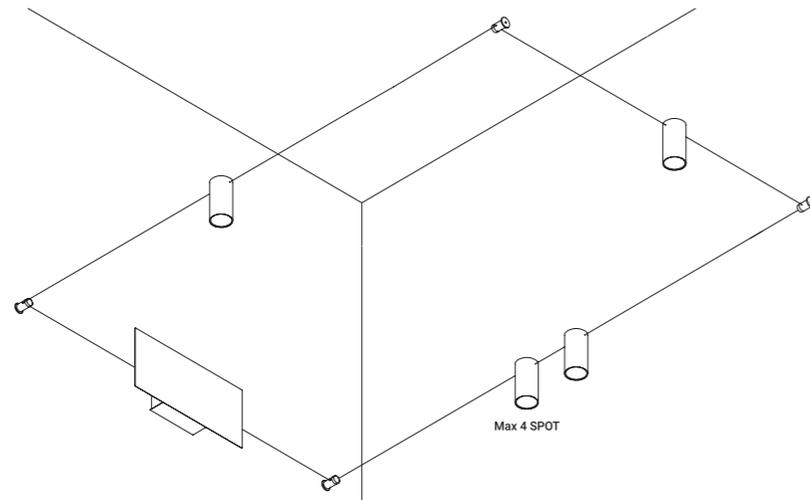

Wall/ceiling driver version

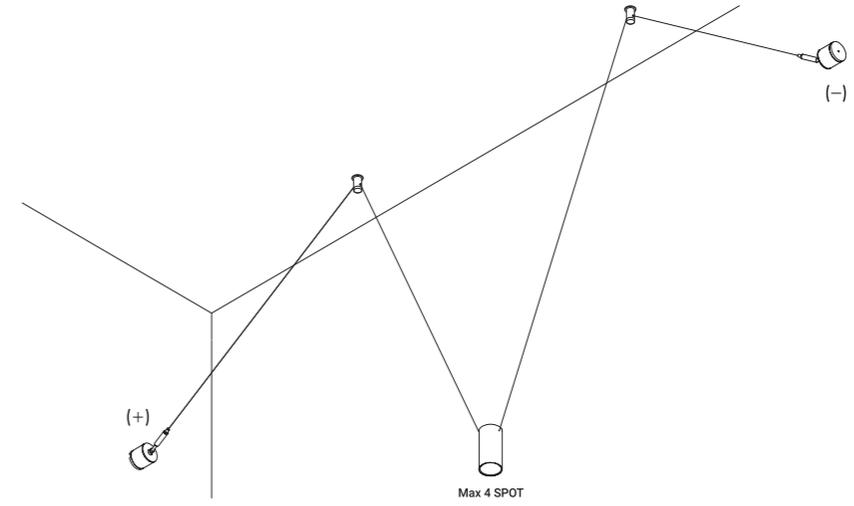

Suspension version



Metamorphosis Gallery Wunderkammer  
Mantova



Private Residence  
Berlin






Utopia is a project on the limit state of light,  
the research for the minimum dimension necessary  
for pure and essential lighting.

It represents full flexibility, in both its design and its light control.  
The light strip reaches into space, bending and drawing abstract, mysterious patterns.  
Luminaire designed also to be powered by ENDLESS conductive tape.


Utopia è un progetto sullo stato limite della luce,  
alla ricerca della dimensione minima necessaria  
per illuminare in modo puro ed essenziale.

Rappresenta la massima flessibilità,  
sia nel disegno della linea che nella gestione della luce.  
Il nastro luminoso si tende nello spazio, piegandosi, disegnando grafi astratti e misteriosi.  
Apparecchio illuminante alimentabile anche con il tape conduttivo ENDLESS.


Linear version - UTOPIA 6

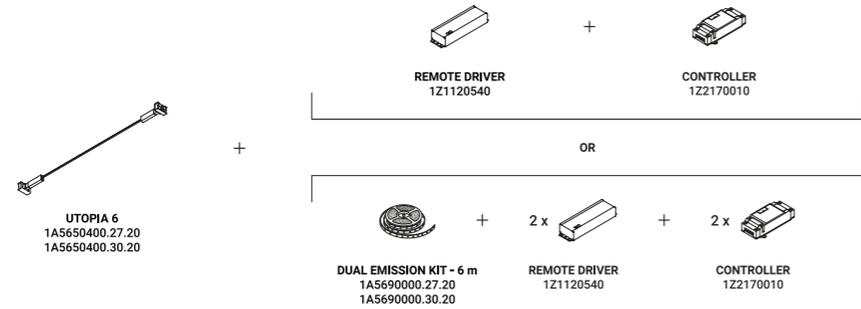

Linear version - UTOPIA 12

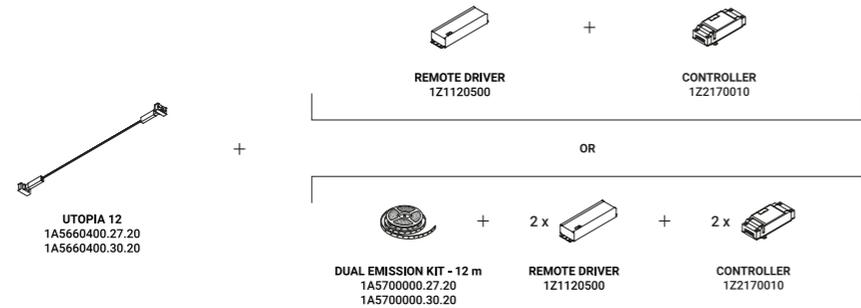

Bent version

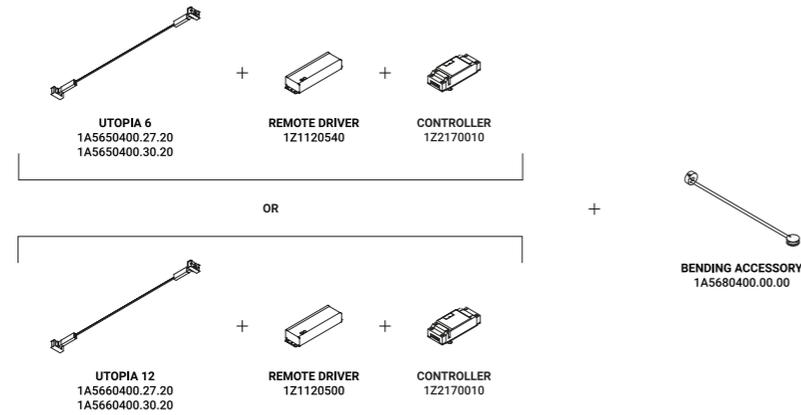

Systems / Indirect / Indoor


Material Metal - PVC

Finish .04 Matt Black

Note

Special stainless steel profile stretched from wall to wall, only 3 mm thick. Available in 6 / 12 m with a single power unit and uniform lighting. Recommended installation height is 2,3 m from the floor. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

Speciale profilo in acciaio inox teso da parete a parete di soli 3 mm di spessore. Disponibile da 6 / 12 m con un'unica alimentazione e illuminamento uniforme. Possibilità di piegare il profilo nello spazio. Altezza di installazione consigliata superiore a 2,3 m dal pavimento. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.

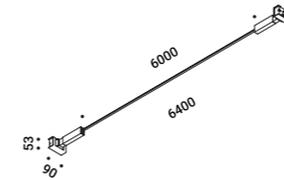


UTOPIA 6

72W  
24V DC  
2700K - 6079lm / 3000K - 6322lm  
CRI >90  
Driver not included  
CE IP20 ENEC

Matt Black - 2700K  
Matt Black - 3000K

1A5650400.27.20  
1A5650400.30.20

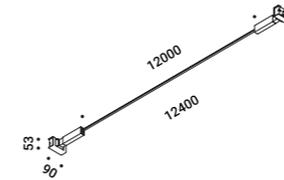

UTOPIA 12


144W  
24V DC  
2700K - 10133lm / 3000K - 10538lm  
CRI >90  
Driver not included  
CE IP20 ENEC

Matt Black - 2700K  
Matt Black - 3000K


1A5660400.27.20  
1A5660400.30.20

**Compulsory accessories / Accessori obbligatori**


Drivers / Alimentatori



<b>Driver / Alimentatore</b>				Not included
100-240V	24V/96W/IP67/1-10V	UTOPIA 6	1Z1120540	




<b>Driver / Alimentatore</b>				Not included
100-240V	24V/150W/IP67/1-10V	UTOPIA 12	1Z1120500	



<b>Controller</b>			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010	

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione




<b>Bending accessory / Accessorio di piega</b>			Not included
Matt Black	Not for dual emission kits	1A5680400.00.00	



<b>Spacer / Distanziale</b>			Not included
Matt Black		1A4930400.00.00	



<b>Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro</b>			Not included
Matt Black		1A5710400.00.00	



<b>Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro</b>			Not included
Matt Black		1A5720400.00.00	

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione




<b>Dual emission kit - 6 m / Kit doppia emissione - 6 m</b>				Not included
Standard	Input 24V DC - 72W - IP20 2700K - 6079lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.27.20	

Standard	Input 24V DC - 72W - IP20 3000K - 6322lm - CRI >90 Not bendable	UTOPIA 6	1A5690000.30.20	
----------	---	----------	-----------------	--

<b>Dual emission kit - 12 m / Kit doppia emissione - 12 m</b>				Not included
Standard	Input 24V DC - 144W - IP20 2700K - 10133lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.27.20	


Standard	Input 24V DC - 144W - IP20 3000K - 10538lm - CRI >90 Not bendable	UTOPIA 12	1A5700000.30.20	
----------	---	-----------	-----------------	--

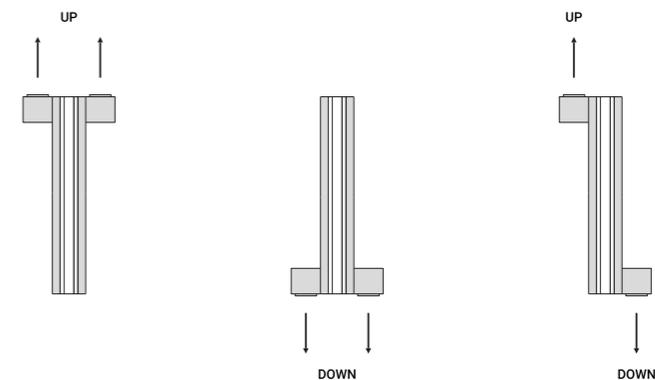


Possibilities of strip LED installation for dual emission




Example of linear installation

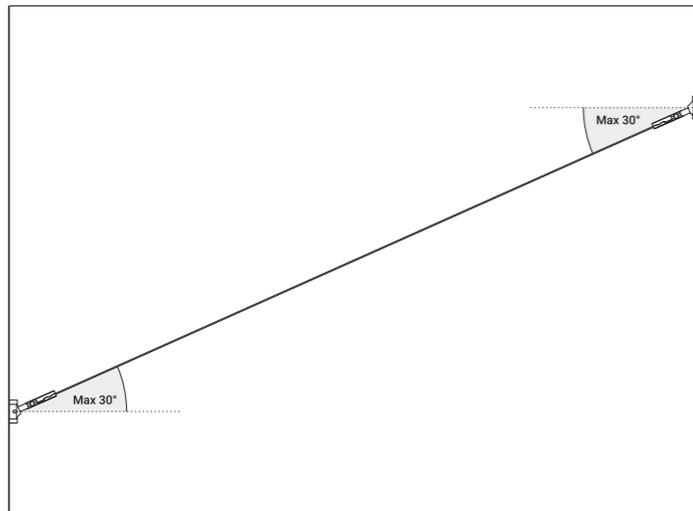


Example of installation with max rotation 30°

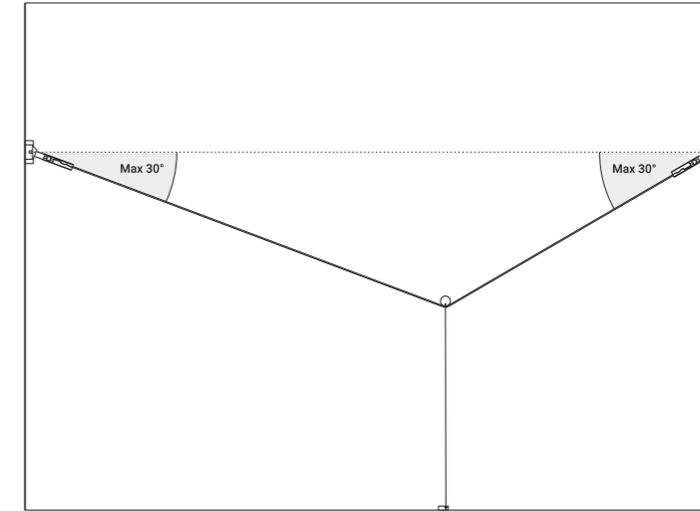


1A5680400.00.00 - Example of installation with bending accessory

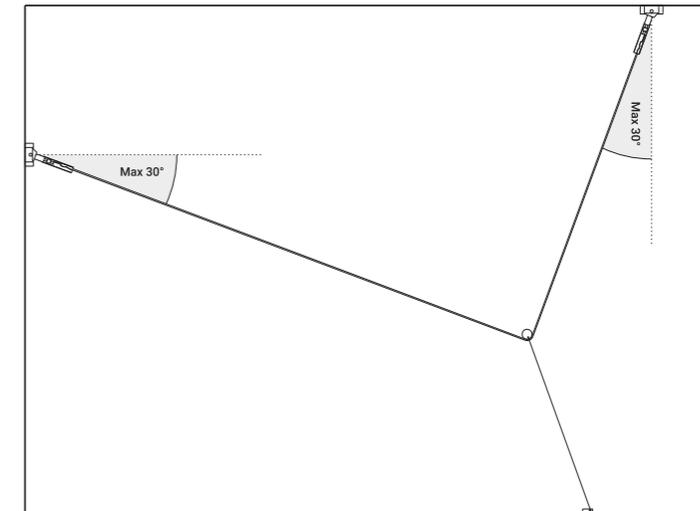


1A5680400.00.00 - Example of installation with bending accessory

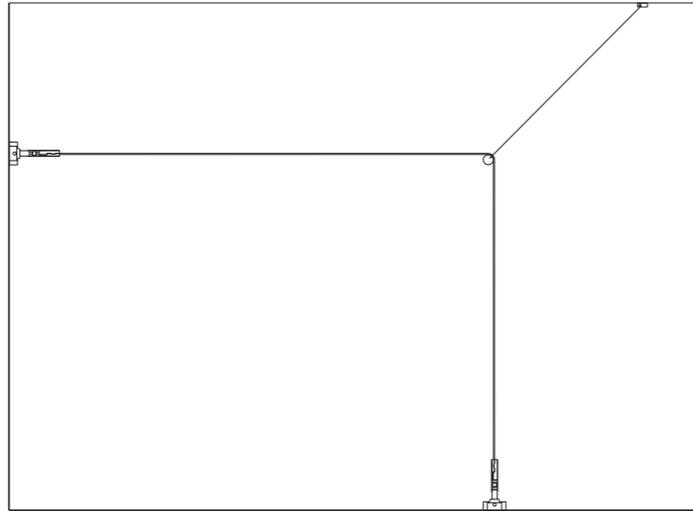

1A5680400.00.00 - Example of installation with bending accessory

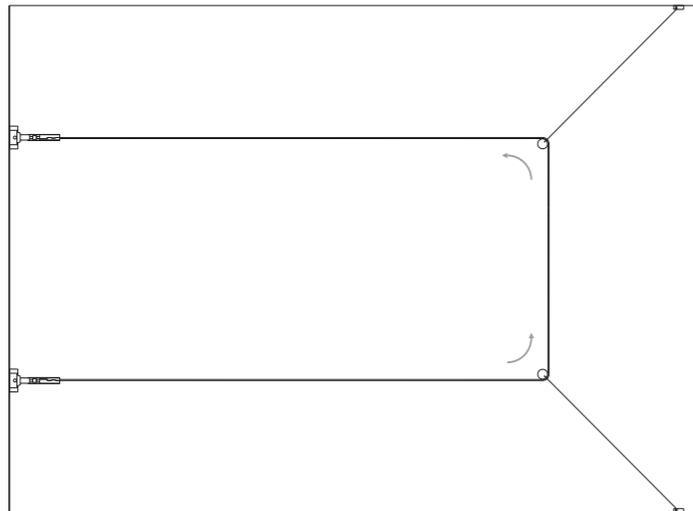

1A5680400.00.00 - Example of installation with bending accessory

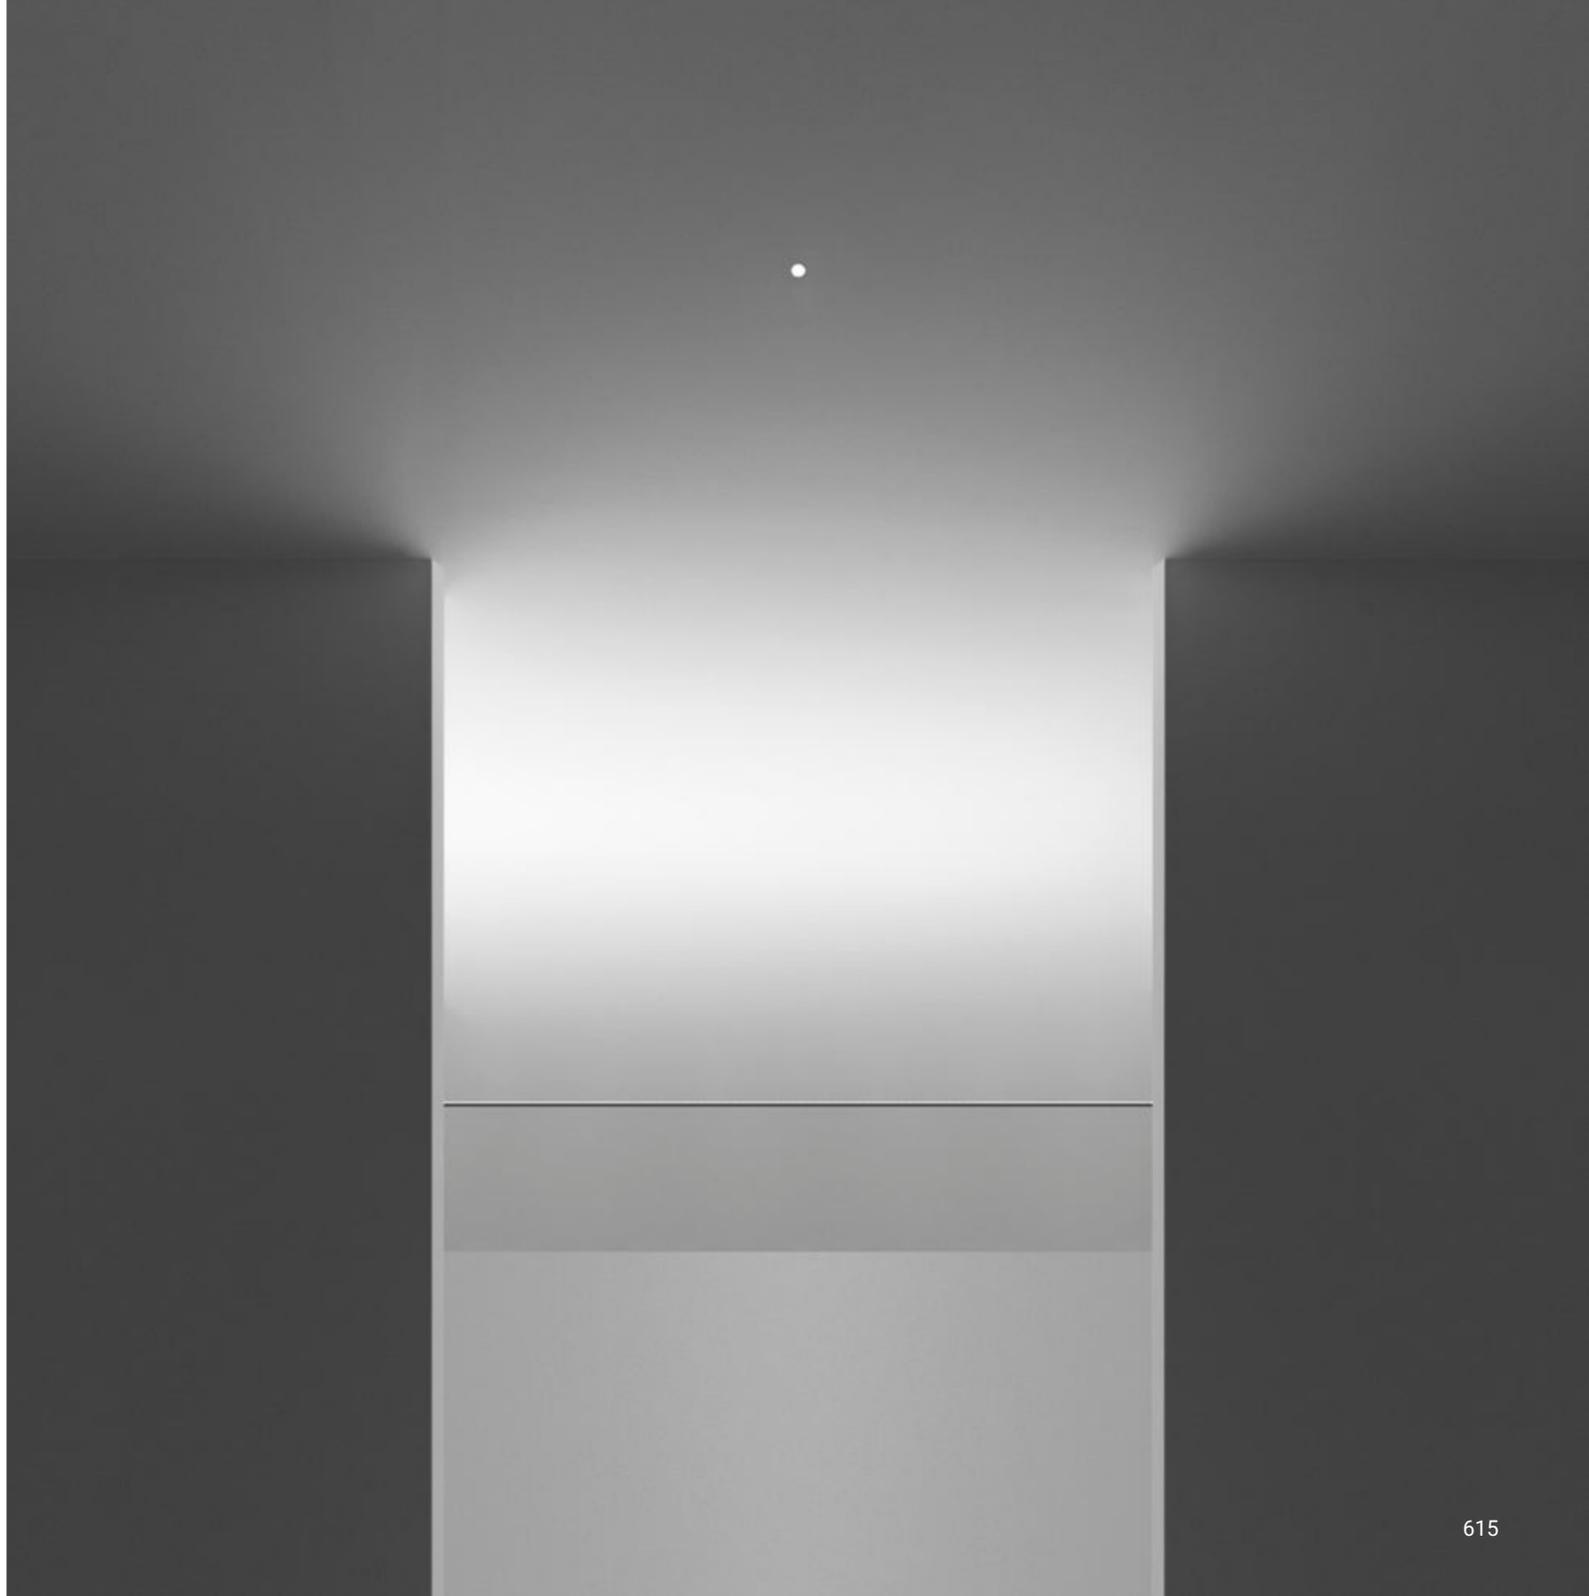



only 3 mm


**TRACKS - PROFILES / BINARI - PROFILI**




Pure line in space.  
Our track holds the models Dot, Mira and Spot.

Linea pura nello spazio.  
Il nostro binario accoglie i modelli Dot, Mira e Spot.

**Power right connector and power left connector installation**

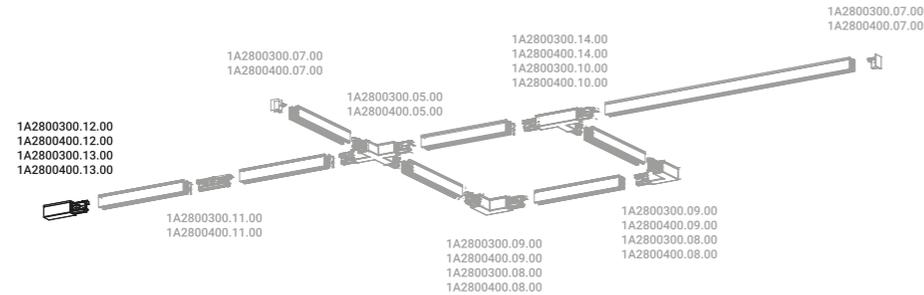

**Power intermediate connector installation**

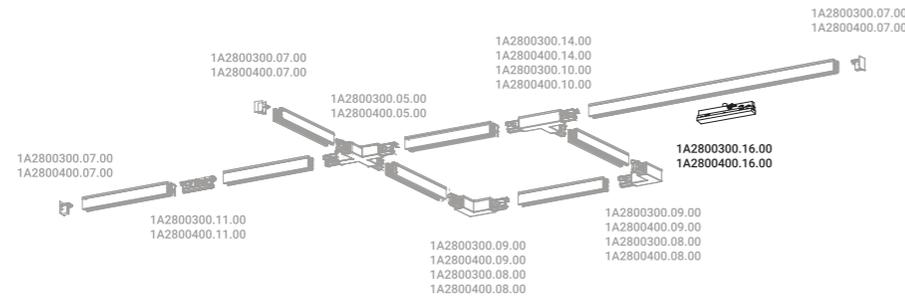

Systems / Direct / Indoor

Material Metal - Polycarbonate


Finish **.03** Matt White **.04** Matt Black **.39** Matt White/Polished Gold **.49** Matt Black/Polished Gold

Note Ceiling and wall track system.

Sistema a binario da soffitto e parete.

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Track 1 m / Binario 1 m</b>	Not included
Matt White	1A2800300.01.00
Matt Black	1A2800400.01.00

<b>Track 2 m / Binario 2 m</b>	Not included
Matt White	1A2800300.02.00
Matt Black	1A2800400.02.00

<b>Track 3 m / Binario 3 m</b>	Not included
Matt White	1A2800300.03.00
Matt Black	1A2800400.03.00

<b>End cap / Tappo di chiusura</b>	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00



Connectors / Connettori



<b>Power right connector / Elemento di alimentazione destro</b>	Not included
Matt White	1A2800300.13.00
Matt Black	1A2800400.13.00



<b>Power left connector / Elemento di alimentazione sinistro</b>	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00



<b>Power intermediate connector / Elemento di alimentazione intermedio</b>	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione

	<b>Linear jointing connector / Connettore lineare passante</b>		Not included
	Matt White	1A2800300.11.00	
	Matt Black	1A2800400.11.00	
	<b>Linear insulating connector / Connettore lineare isolante</b>		Not included
	Matt White	1A2800300.19.00	
	Matt Black	1A2800400.19.00	
	<b>Internal L connector / Connettore L interno</b>		Not included
	Matt White	1A2800300.09.00	
	Matt Black	1A2800400.09.00	
	<b>External L connector / Connettore L esterno</b>		Not included
	Matt White	1A2800300.08.00	
	Matt Black	1A2800400.08.00	
	<b>Right T connector / Connettore T destro</b>		Not included
	Matt White	1A2800300.14.00	
	Matt Black	1A2800400.14.00	
	<b>Left T connector / Connettore T sinistro</b>		Not included
	Matt White	1A2800300.10.00	
	Matt Black	1A2800400.10.00	
	<b>X connector / Connettore X</b>		Not included
	Matt White	1A2800300.15.00	
	Matt Black	1A2800400.15.00	
	<b>Adjustable suspension cable / Cavo di sospensione regolabile</b>		Not included
	Length 1500 mm	1A2800000.04.00	
	Length 3000 mm	1A2800000.05.00	
	Length 5000 mm	1A2800000.06.00	
	<b>Cutting tool / Tronchese per taglio</b>		Not included
		1A2800000.17.00	



**Compulsory accessories / Accessori obbligatori**

Luminaires / Corpi illuminanti



**DOT BINARIO**

13W  
220-240V - 50/60Hz  
2700K / 3000K  
CRI >97  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI  
Matt White/Polished Gold - 2700K - DALI  
Matt White/Polished Gold - 3000K - DALI  
Matt Black/Polished Gold - 2700K - DALI  
Matt Black/Polished Gold - 3000K - DALI

1A2290300.27.01  
1A2290300.30.01  
1A2290400.27.01  
1A2290400.30.01  
1A2290400.30.01  
1A2293900.27.01  
1A2293900.30.01  
1A2294900.27.01  
1A2294900.30.01




**DOT BINARIO 51**

Max 10W  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included

CE IP20

Matt White - ON/OFF  
Matt Black - ON/OFF  
Matt White/Polished Gold - ON/OFF  
Matt Black/Polished Gold - ON/OFF

1A3710300.00.00  
1A3710400.00.00  
1A3713900.00.00  
1A3714900.00.00



**MIRA BINARIO**

8W  
220-240V - 50/60Hz  
2700K - 327lm / 3000K - 352lm  
CRI >90  
Driver integrated  
DALI

CE IP20

Matt White - 2700K - DALI  
Matt White - 3000K - DALI  
Matt Black - 2700K - DALI  
Matt Black - 3000K - DALI  
Matt White/Polished Gold - 2700K - DALI  
Matt White/Polished Gold - 3000K - DALI  
Matt Black/Polished Gold - 2700K - DALI  
Matt Black/Polished Gold - 3000K - DALI

1A0490300.27.01  
1A0490300.30.01  
1A0490400.27.01  
1A0490400.30.01  
1A0493900.27.01  
1A0493900.30.01  
1A0494900.27.01  
1A0494900.30.01



**SPOT BINARIO**

21W  
220-240V - 50/60Hz  
Driver integrated  
DALI  
LED Module not included  
CE IP20

Matt White - DALI  
Matt Black - DALI  
Matt White/Polished Gold - DALI  
Matt Black/Polished Gold - DALI

1A0280300.00.01  
1A0280400.00.01  
1A0283900.00.01  
1A0284900.00.01


**Compulsory accessories / Accessori obbligatori**

Other accessories / Altri accessori




Lens / Lente	Not included		
Beam - 14°	2700K - CRI >97 - 983lm	DOT BINARIO	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT BINARIO	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT BINARIO	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT BINARIO	1A3120000.00.00
	3000K - CRI >97 - 1016lm		


**LED modules / Moduli LED**



DG111 LED module / Modulo LED DG111	Not included		
16,7W - 15° - 500mA DC	SPOT BINARIO	1A4700000.27.20	
2700K - 1648lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 15° - 500mA DC		1A4700000.30.20	
3000K - 1682lm - CRI >90			
Energy Efficiency F - Dimmable			



DG111 LED module / Modulo LED DG111	Not included		
16,7W - 22° - 500mA DC	SPOT BINARIO	1A3890000.27.20	
2700K - 1859lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 22° - 500mA DC		1A3890000.30.20	
3000K - 1943lm - CRI >90			
Energy Efficiency F - Dimmable			




DG111 LED module / Modulo LED DG111	Not included		
16,7W - 36° - 500mA DC	SPOT BINARIO	1A3900000.27.20	
2700K - 1795lm - CRI >90			
Energy Efficiency F - Dimmable			
16,7W - 36° - 500mA DC		1A3900000.30.20	
3000K - 1890lm - CRI >90			
Energy Efficiency F - Dimmable			

**Optional accessories / Accessori opzionali**


Other accessories / Altri accessori




Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape	Not included		
	DOT BINARIO	1X0080400.01.00	




Elliptical filter / Filtro ellittico	Not included		
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.02.00



Blue filter / Filtro blu	Not included		
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.03.00



Red filter / Filtro rosso	Not included		
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.04.00






Yellow filter / Filtro giallo	Not included		
Standard	Compulsory with 1X0080400.01.00	DOT BINARIO	1X0080000.05.00

**Optional accessories / Accessori opzionali**

Bulbs / Lampadine





	<b>LED - GU10 - PAR16</b>			Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500	
	<b>LED SORAA - GU10 - MR16</b>			Not included
	230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580210	
	<b>LED SORAA - GU10 - MR16</b>			Not included
	230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT BINARIO 51	1Y1580010	

Other accessories / Altri accessori

	<b>Darklight</b>			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040	
	<b>25° beam filter / Filtro fascio 25°</b>			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020	
	<b>36° beam filter / Filtro fascio 36°</b>			Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030	

**Optional accessories / Accessori opzionali**

Other accessories / Altri accessori

	<b>Accessory holder + Soft filter + Honeycomb louvre / Porta accessori + Filtro soft + Frangiluce nido d'ape</b>			Not included
	Matt Black	SPOT BINARIO	1X0070400.04.00	
	<b>Accessory holder + Elliptical filter / Porta accessori + Filtro ellittico</b>			Not included
	Matt Black	SPOT BINARIO	1X0070400.05.00	
	<b>Blue filter / Filtro blu</b>			Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.06.00
	<b>Red filter / Filtro rosso</b>			Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.07.00
	<b>Yellow filter / Filtro giallo</b>			Not included
	Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	SPOT BINARIO	1X0070000.08.00
	<b>Directional fins / Alette direzionali</b>			Not included
	Matt Black	SPOT BINARIO	1X0070400.01.00	
	<b>Cylindrical screen / Schermo cilindrico</b>			Not included
	Matt Black	SPOT BINARIO	1X0070400.02.00	
	<b>Cone 45° / Cono 45°</b>			Not included
	Matt Black	SPOT BINARIO	1X0070400.03.00	









A minimal track system with tiny lights, small hummingbirds that perch where needed.  
Luminaire designed also to be powered by ENDLESS system.

Un sistema a binario ridotto al minimo, con minuscoli corpi luminosi,  
piccoli Colibri che si posano dove necessario.  
Apparecchio illuminante alimentabile anche con il sistema ENDLESS.

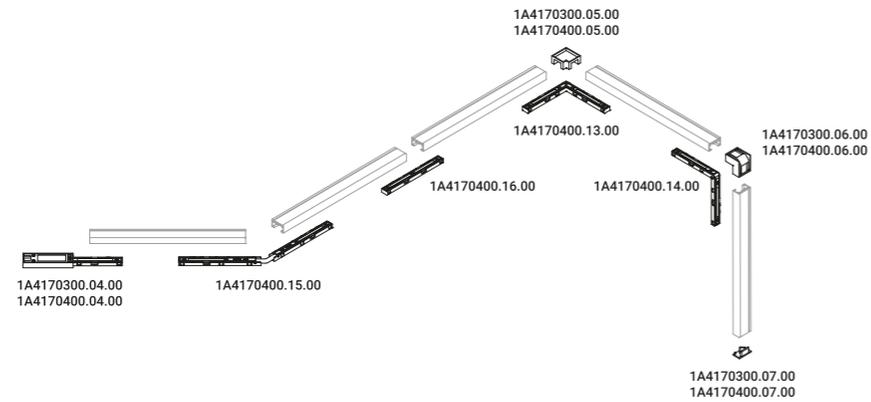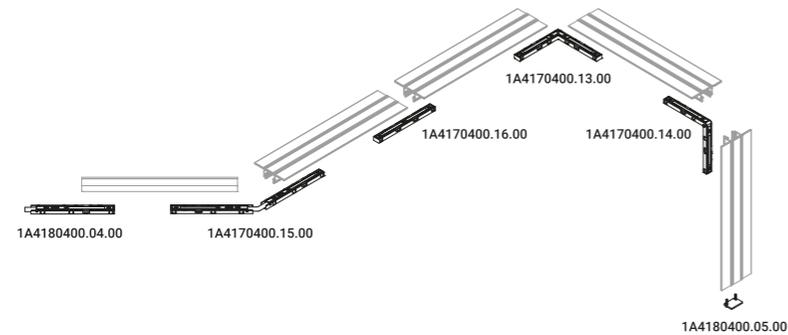Layout example of  
wall and ceiling versionLayout example of  
recessed version

Systems / Direct / Indoor


**Material** Metal - Polycarbonate**Finish** .04 Matt Black**Note**

Ceiling and wall track system operating at 48V DC. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Sistema a binario da soffitto e parete funzionante a 48V DC. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*

**Compulsory accessories / Accessori obbligatori**


Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto



<b>Wall and ceiling track - 1 m / Binario da parete e soffitto - 1 m</b>	Not included
Matt White	1A4170300.01.00
Matt Black	1A4170400.01.00

<b>Wall and ceiling track - 2 m / Binario da parete e soffitto - 2 m</b>	Not included
Matt White	1A4170300.02.00
Matt Black	1A4170400.02.00

<b>Wall and ceiling track - 3 m / Binario da parete e soffitto - 3 m</b>	Not included
Matt White	1A4170300.03.00
Matt Black	1A4170400.03.00




<b>Power connector / Elemento di alimentazione</b>	Not included
Matt White	1A4170300.04.00
Matt Black	1A4170400.04.00



<b>End cap / Tappo di chiusura</b>	Not included
Matt White	1A4170300.07.00
Matt Black	1A4170400.07.00

**Compulsory accessories / Accessori obbligatori**

Installation kits for recessed track / Kit d'installazione per binario da incasso



<b>Recessed wall and ceiling track - 1 m / Binario da parete e soffitto da incasso - 1 m</b>		Not included
Matt Black		1A4180400.01.00

<b>Recessed wall and ceiling track - 2 m / Binario da parete e soffitto da incasso - 2 m</b>		Not included
Matt Black		1A4180400.02.00

<b>Recessed wall and ceiling track - 3 m / Binario da parete e soffitto da incasso - 3 m</b>		Not included
Matt Black		1A4180400.03.00




<b>Power connector / Elemento di alimentazione</b>		Not included
Matt Black	For recessed track	1A4180400.04.00




<b>End cap / Tappo di chiusura</b>		Not included
Matt Black	For recessed track	1A4180400.05.00

**Drivers / Alimentatori**

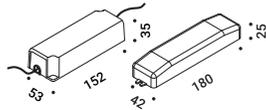

<b>Driver with optoisolator / Alimentatore con optoisolatore</b>		Not included
	Input 100-240V - 50/60Hz Output 48V - 60W - IP20 - DALI	1A4170000.19.00

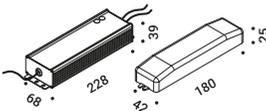

<b>Driver with optoisolator / Alimentatore con optoisolatore</b>		Not included
	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00



**Optional accessories / Accessori opzionali**

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto




Corner joint cover H / Coprigiunto angolare H			Not included
Matt White	For wall and ceiling track	1A4170300.05.00	
Matt Black	For wall and ceiling track	1A4170400.05.00	



Corner joint cover V / Coprigiunto angolare V			Not included
Matt White	For wall and ceiling track	1A4170300.06.00	
Matt Black	For wall and ceiling track	1A4170400.06.00	



Cover - 3 m / Copertura - 3 m			Not included
Matt White	For wall and ceiling track	1A4170300.08.00	
Matt Black	For wall and ceiling track	1A4170400.08.00	



Endless connector / Connettore Endless			Not included
Standard	For wall and ceiling track	1A4170000.20.00	


Installation kits for recessed track / Kit d'installazione per binario da incasso




Cover - 3 m / Copertura - 3 m			Not included
Matt White	For recessed track	1A4180300.08.00	
Matt Black	For recessed track	1A4180400.08.00	

**Optional accessories / Accessori opzionali**


Installation kits / Kit d'installazione



L connector / Connettore a L			Not included
Matt Black		1A4170400.13.00	



Ceiling-wall connector / Connettore soffitto-parete			Not included
Matt Black		1A4170400.14.00	



Flexible joint / Giunto flessibile			Not included
Matt Black		1A4170400.15.00	




Linear connector / Connettore lineare			Not included
Matt Black		1A4170400.16.00	



Locking tool / Strumento per bloccaggio			Not included
Standard		1A4170000.17.00	


Other accessories / Altri accessori



Shelf / Mensola			Not included
Matt Black	For wall and ceiling track	1A4170400.21.00	

Compulsory accessories / Accessori obbligatori


Luminaires / Corpi illuminanti



**COLIBRÌ 18 - 15°**  
 2W  
 48V DC  
 2700K - 81lm / 3000K - 84lm  
 CRI >90  
 Beam 15°  
 Driver integrated  
 DALI  
 CE IP20 E

Matt Black - 2700K - DALI  
 Matt Black - 3000K - DALI


1A4260400.27.01  
 1A4260400.30.01



**COLIBRÌ 18 - 25°**  
 2W  
 48V DC  
 2700K - 79lm / 3000K - 81lm  
 CRI >90  
 Beam 25°  
 Driver integrated  
 DALI  
 CE IP20 E

Matt Black - 2700K - DALI  
 Matt Black - 3000K - DALI


1A4270400.27.01  
 1A4270400.30.01



**COLIBRÌ 28 - 15°**  
 4W  
 48V DC  
 2700K - 147lm / 3000K - 151lm  
 CRI >90  
 Beam 15°  
 Driver integrated  
 DALI  
 CE IP20 E

Matt Black - 2700K - DALI  
 Matt Black - 3000K - DALI

1A4280400.27.01  
 1A4280400.30.01



**COLIBRÌ 28 - 25°**  
 5W  
 48V DC  
 2700K - 250lm / 3000K - 258lm  
 CRI >90  
 Beam 25°  
 Driver integrated  
 DALI  
 CE IP20 E

Matt Black - 2700K - DALI  
 Matt Black - 3000K - DALI

1A4290400.27.01  
 1A4290400.30.01



Metamorphosis Gallery Wunderkammer  
Mantova



Al Gatto Verde Restaurant  
Modena






Plasterboard track for recessed installation.  
It is designed for use with state-of-the-art LED modules  
to create a wide range of light beams.

Binario per installazione da incasso per cartongesso.  
Ideato per utilizzare moduli a LED di ultima generazione  
ed avere un'ampia disponibilità di fasci luminosi.

Layout example

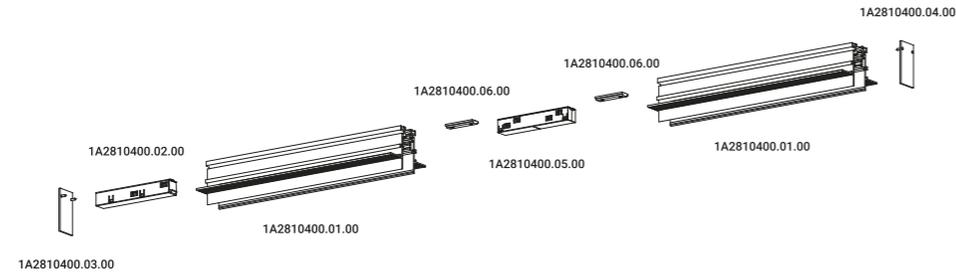

Systems / Direct / Indoor

Material Metal - Polycarbonate


Finish .03 Matt White .04 Matt Black .49 Matt Black/Polished Gold

Note Recessed track system operating at 48V DC.

Sistema a binario da incasso funzionante a 48V DC.

Compulsory accessories / Accessori obbligatori

Installation kits / Kit d'installazione



<b>Plasterboard track 12,5 mm / Binario per cartongesso 12,5 mm</b>		Not included
Matt Black	48V DC - Max 15A Length 2000 mm Cut-out 2000x26 mm	1A2810400.01.00



<b>Power connector / Elemento di alimentazione</b>		Not included
Matt Black	Output 48V - Max 15A	1A2810400.02.00






<b>End cap for power connector / Tappo di chiusura per alimentazione</b>		Not included
Matt Black		1A2810400.03.00



<b>End cap / Tappo di chiusura</b>		Not included
Matt Black		1A2810400.04.00



Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori

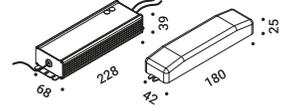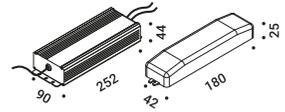	<b>Driver / Alimentatore</b> 100-240V      48V/150W/IP67/1-10V	1Z1120250	Not included
	<b>Driver with optoisolator / Alimentatore con optoisolatore</b> Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00	Not included
	<b>Driver with optoisolator / Alimentatore con optoisolatore</b> Input 100-240V - 50/60Hz Output 48V - 320W - IP20 - DALI	1A2810000.12.00	Not included


Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

	<b>Linear connector / Connettore lineare</b> Matt Black      Output 48V - Max 15A	1A2810400.05.00	Not included
	<b>Reinforcing bracket / Staffa di rinforzo</b> Matt Black	1A2810400.06.00	Not included
	<b>Clamp with M6 grippe / Morsetto con pinza M6</b>	1A2810000.07.00	Not included
	<b>Suspension set / Set sospensione</b>	1A2810000.08.00	Not included
	<b>Plaster installation guard / Protezione per installazione cartongesso</b> Length 2000 mm	1A2810000.09.00	Not included
	<b>Cutting tool / Tronchese per taglio</b>	1A2800000.17.00	Not included

Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti



**DOT FRAMELESS**

13W

48V DC

2700K / 3000K

CRI >97

Driver integrated

DALI



Matt White - 2700K - DALI

Matt White - 3000K - DALI

Matt Black - 2700K - DALI

Matt Black - 3000K - DALI

Matt Black/Polished Gold - 2700K - DALI

Matt Black/Polished Gold - 3000K - DALI

1A0090300.27.01

1A0090300.30.01

1A0090400.27.01

1A0090400.30.01

1A0094900.27.01

1A0094900.30.01

Other accessories / Altri accessori




**Lens / Lente**

Not included

Beam - 14°	2700K - CRI >97 - 983lm	DOT FRAMELESS	1A3090000.00.00
	3000K - CRI >97 - 1038lm		
Beam - 24°	2700K - CRI >97 - 943lm	DOT FRAMELESS	1A3100000.00.00
	3000K - CRI >97 - 996lm		
Beam - 36°	2700K - CRI >97 - 955lm	DOT FRAMELESS	1A3110000.00.00
	3000K - CRI >97 - 1005lm		
Beam - 50°	2700K - CRI >97 - 965lm	DOT FRAMELESS	1A3120000.00.00
	3000K - CRI >97 - 1016lm		

Optional accessories / Accessori opzionali


Other accessories / Altri accessori



**Accessory holder + Honeycomb louvre / Porta accessori + Frangiluce nido d'ape**

Not included


DOT FRAMELESS 1X0080400.01.00



**Elliptical filter / Filtro ellittico**

Not included


Standard Compulsory with 1X0080400.01.00 DOT FRAMELESS 1X0080000.02.00



**Blue filter / Filtro blu**

Not included


Standard Compulsory with 1X0080400.01.00 DOT FRAMELESS 1X0080000.03.00



**Red filter / Filtro rosso**

Not included


Standard Compulsory with 1X0080400.01.00 DOT FRAMELESS 1X0080000.04.00



**Yellow filter / Filtro giallo**

Not included

Standard Compulsory with 1X0080400.01.00 DOT FRAMELESS 1X0080000.05.00

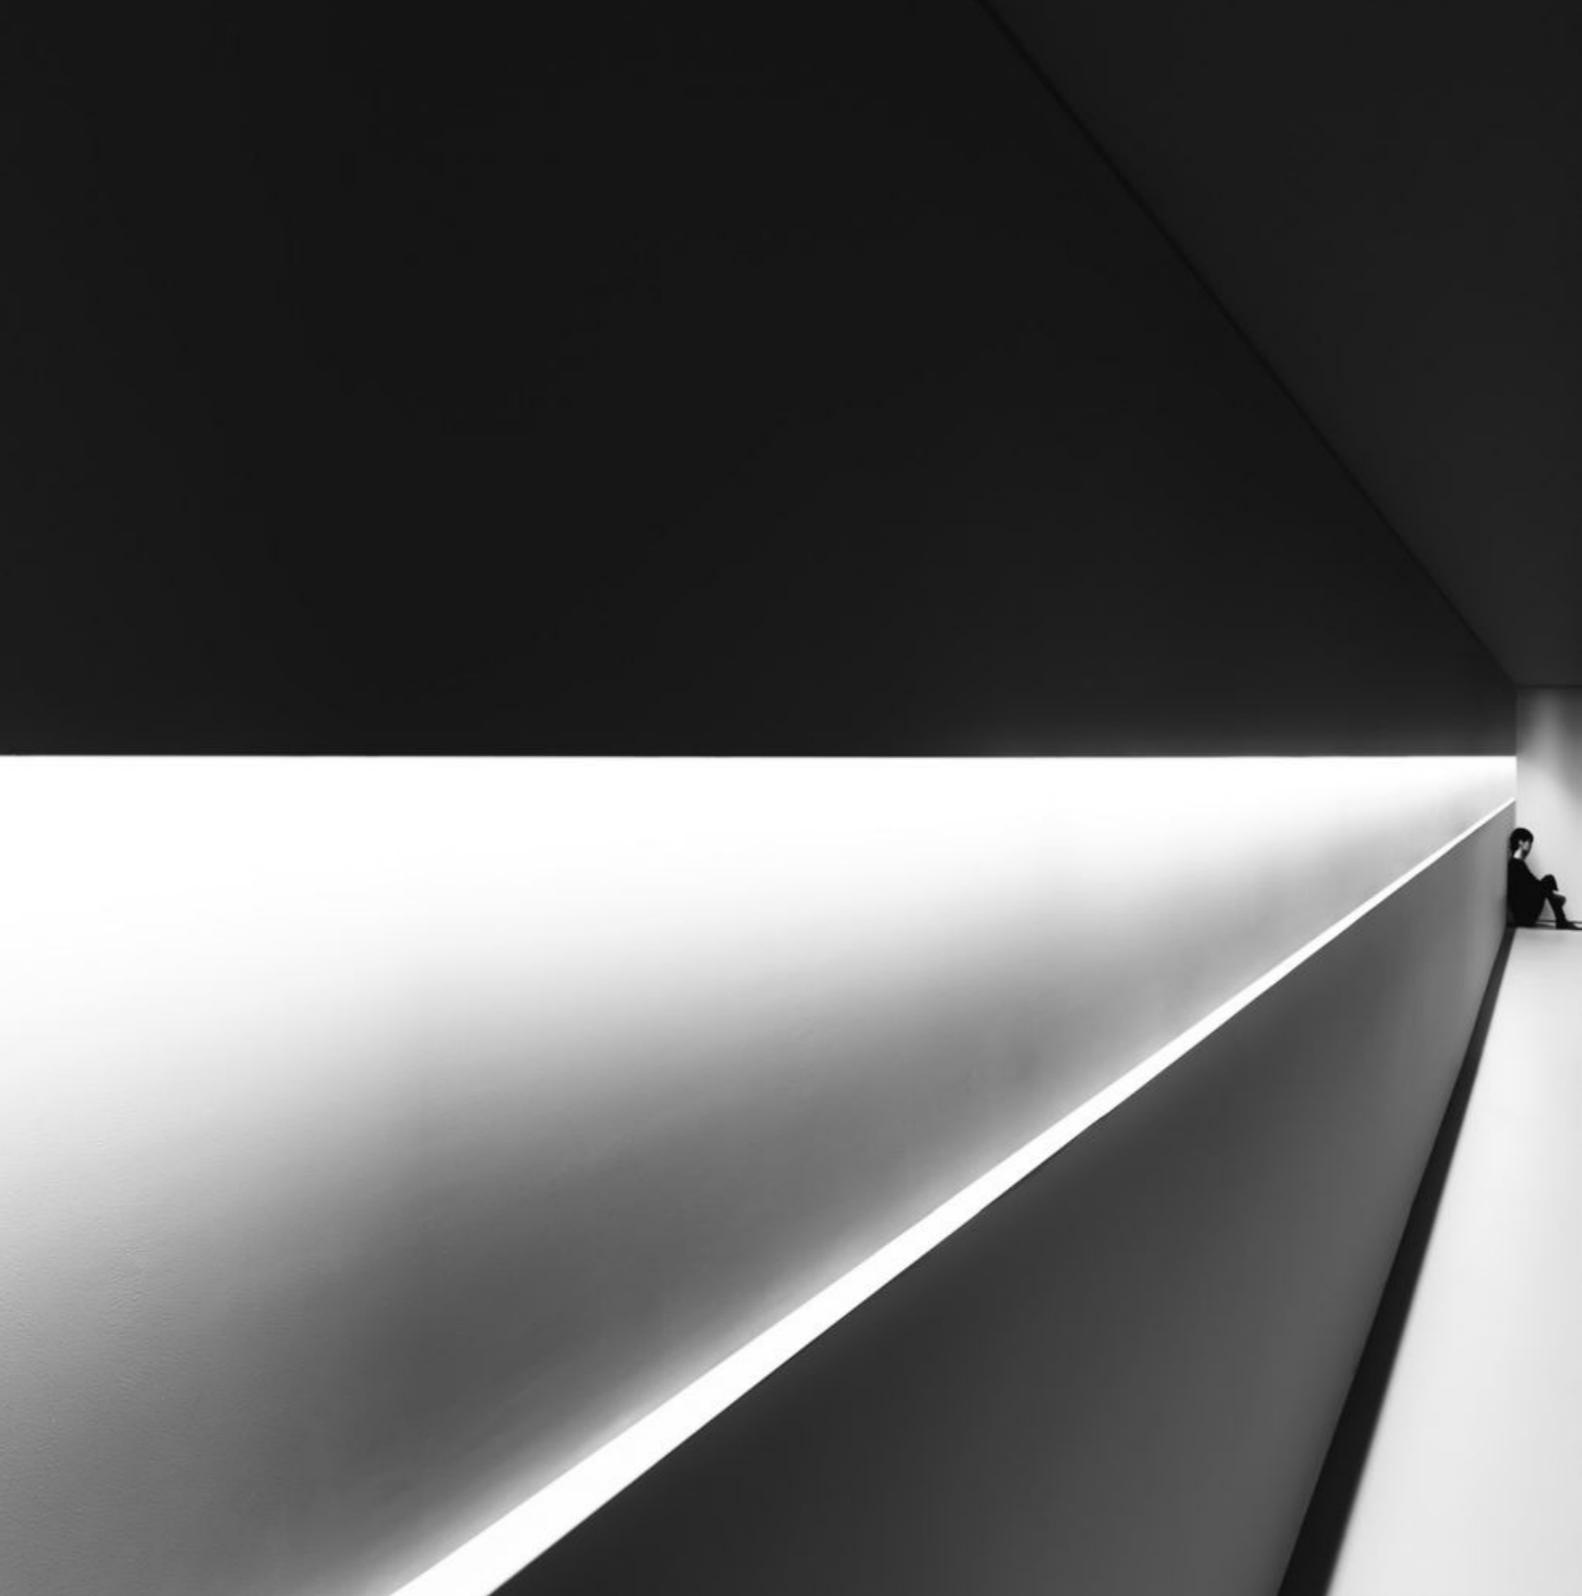

Profiles designed to create projects with continuous light.

Profili pensati per realizzare progetti di luce continua.


Systems / Direct / Indoor

**Material** Metal  
**Finish** .00 Standard

**Note** Profile with continuous light. *Profilo a luce continua.*

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Aluminium profile 2 m / Profilo in alluminio 2 m</b>		Not included
Standard	With opal cover	1A4970000.01.00



<b>Cap / Tappo</b>		Not included
Standard		1A4970000.02.00



<b>Fixing spring / Molla di fissaggio</b>		Not included
Standard		1A4970000.03.00


**Compulsory accessories / Accessori obbligatori**

LED modules / Moduli LED




<b>Strip LED - 5 m - IP20</b>		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20


Drivers / Alimentatori




<b>Driver / Alimentatore</b>		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440




<b>Driver / Alimentatore</b>		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



<b>Driver / Alimentatore</b>		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



<b>Controller</b>		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

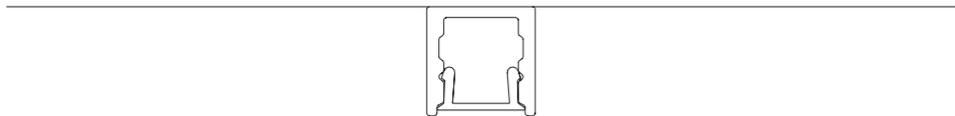




Systems / Direct / Indoor

Material Metal  
 Finish .00 Standard

Note Profile with continuous light. *Profilo a luce continua.*

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m		Not included
Standard	With opal cover	1A4970000.04.00



Cap / Tappo		Not included
Standard		1A4970000.05.00



Fixing spring / Molla di fissaggio		Not included
Standard		1A4970000.06.00

**Compulsory accessories / Accessori obbligatori**

LED modules / Moduli LED




Strip LED - 5 m - IP20		Not included
	Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
	Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20


Drivers / Alimentatori




Driver / Alimentatore		Not included
100-240V	24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore		Not included
100-240V	24V/96W/IP67/1-10V	1Z1120540



Driver / Alimentatore		Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500



Controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

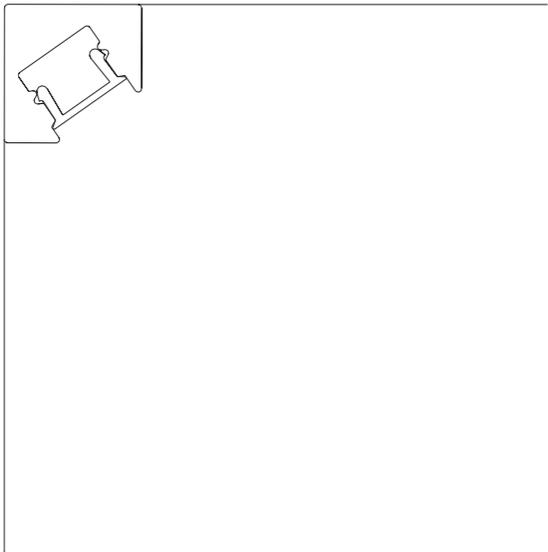




Systems / Direct / Indoor

Material Metal  
Finish .00 Standard

Note Profile with continuous light. *Profilo a luce continua.*

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m Not included  
Standard 1A4970000.07.00



Opal cover 2 m / Diffusore opale 2 m Not included  
Standard 1A4970000.08.00



Transparent cover 2 m / Diffusore trasparente 2 m Not included  
Standard 1A4970000.09.00



Satin cover 2 m / Diffusore satinato 2 m Not included  
Standard 1A4970000.10.00



Cap / Tappo Not included  
Standard 1A4970000.11.00



Adhesive 1 m / Adesivo 1 m Not included  
Standard 1A4970000.12.00



Adhesive magnet 1 m / Calamita adesiva 1 m Not included  
Standard 1A4970000.13.00

**Compulsory accessories / Accessori obbligatori**

LED modules / Moduli LED



Strip LED - 5 m - IP20 Not included  
Input 24V DC - 12,5W/m - IP20 1A5010000.27.20  
2700K - 1240lm/m - CRI >94  
Input 24V DC - 12,5W/m - IP20 1A5010000.30.20  
3000K - 1380lm/m - CRI >94



Strip LED - 5 m - IP20 Not included  
Input 24V DC - 14,4W/m - IP20 1A4980000.27.20  
2700K - 1420lm/m - CRI >80  
Input 24V DC - 14,4W/m - IP20 1A4980000.30.20  
3000K - 1575lm/m - CRI >80




Strip LED - 5 m - IP20 Not included  
Input 24V DC - 19,2W/m - IP20 1A4990000.27.20  
2700K - 2100lm/m - CRI >80  
Input 24V DC - 19,2W/m - IP20 1A4990000.30.20  
3000K - 2340lm/m - CRI >80




Strip LED - 5 m - IP65 Not included  
Input 24V DC - 14,4W/m - IP65 1A5000000.27.20  
2700K - 1420lm/m - CRI >82  
Input 24V DC - 14,4W/m - IP65 1A5000000.30.20  
3000K - 1575lm/m - CRI >82


Drivers / Alimentatori




Driver / Alimentatore Not included  
100-240V 24V/80W/IP20/ON/OFF 1Z1120440




Driver / Alimentatore Not included  
100-240V 24V/96W/IP67/1-10V 1Z1120540



Driver / Alimentatore Not included  
100-240V 24V/150W/IP67/1-10V 1Z1120500



Controller Not included  
DALI - PUSH - 0/1-10V - TRIAC - IP20 1Z2170010

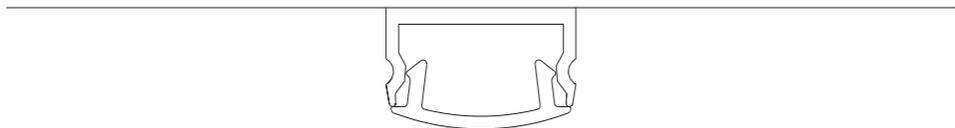





Recessed profiles designed to create projects with continuous light.

Profili da incasso pensati per realizzare progetti di luce continua.


Systems / Direct / Indoor

Material Metal  
Finish .00 Standard

Note Recessed profile with continuous light. *Profilo da incasso a luce continua.*

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m Not included  
Standard 1A4970000.14.00



Opal cover 2 m / Diffusore opale 2 m Not included  
Standard 1A4970000.08.00



Transparent cover 2 m / Diffusore trasparente 2 m Not included  
Standard 1A4970000.09.00




Satin cover 2 m / Diffusore satinato 2 m Not included  
Standard 1A4970000.10.00



Cap / Tappo Not included  
Standard 1A4970000.15.00



Fixing spring / Molla di fissaggio Not included  
Standard 1A4970000.16.00



Formwork kit 2 m / Kit cassaforma 2 m Not included  
Standard 1A4970000.17.00

**Compulsory accessories / Accessori obbligatori**

LED modules / Moduli LED



Strip LED - 5 m - IP20 Not included  
Input 24V DC - 12,5W/m - IP20 1A5010000.27.20  
2700K - 1240lm/m - CRI >94  
Input 24V DC - 12,5W/m - IP20 1A5010000.30.20  
3000K - 1380lm/m - CRI >94



Strip LED - 5 m - IP20 Not included  
Input 24V DC - 14,4W/m - IP20 1A4980000.27.20  
2700K - 1420lm/m - CRI >80  
Input 24V DC - 14,4W/m - IP20 1A4980000.30.20  
3000K - 1575lm/m - CRI >80




Strip LED - 5 m - IP20 Not included  
Input 24V DC - 19,2W/m - IP20 1A4990000.27.20  
2700K - 2100lm/m - CRI >80  
Input 24V DC - 19,2W/m - IP20 1A4990000.30.20  
3000K - 2340lm/m - CRI >80




Strip LED - 5 m - IP65 Not included  
Input 24V DC - 14,4W/m - IP65 1A5000000.27.20  
2700K - 1420lm/m - CRI >82  
Input 24V DC - 14,4W/m - IP65 1A5000000.30.20  
3000K - 1575lm/m - CRI >82


Drivers / Alimentatori




Driver / Alimentatore Not included  
100-240V 24V/80W/IP20/ON/OFF 1Z1120440




Driver / Alimentatore Not included  
100-240V 24V/96W/IP67/1-10V 1Z1120540



Driver / Alimentatore Not included  
100-240V 24V/150W/IP67/1-10V 1Z1120500



Controller Not included  
DALI - PUSH - 0/1-10V - TRIAC - IP20 1Z2170010

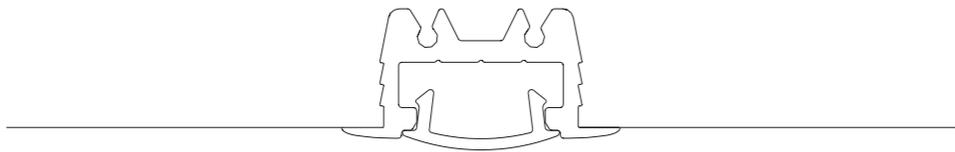



Systems / Direct / Indoor


Material Metal  
 Finish .00 Standard

Note Recessed profile with continuous light.

Profilo da incasso a luce continua.

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



Aluminium profile 2 m / Profilo in alluminio 2 m	Not included
Standard	1A4970000.18.00



Opal cover 2 m / Diffusore opale 2 m	Not included
Standard	1A4970000.19.00

**Compulsory accessories / Accessori obbligatori**

LED modules / Moduli LED



Strip LED - 5 m - IP20	Not included
Input 24V DC - 12,5W/m - IP20 2700K - 1240lm/m - CRI >94	1A5010000.27.20
Input 24V DC - 12,5W/m - IP20 3000K - 1380lm/m - CRI >94	1A5010000.30.20



Strip LED - 5 m - IP20	Not included
Input 24V DC - 14,4W/m - IP20 2700K - 1420lm/m - CRI >80	1A4980000.27.20
Input 24V DC - 14,4W/m - IP20 3000K - 1575lm/m - CRI >80	1A4980000.30.20




Strip LED - 5 m - IP20	Not included
Input 24V DC - 19,2W/m - IP20 2700K - 2100lm/m - CRI >80	1A4990000.27.20
Input 24V DC - 19,2W/m - IP20 3000K - 2340lm/m - CRI >80	1A4990000.30.20




Strip LED - 5 m - IP65	Not included
Input 24V DC - 14,4W/m - IP65 2700K - 1420lm/m - CRI >82	1A5000000.27.20
Input 24V DC - 14,4W/m - IP65 3000K - 1575lm/m - CRI >82	1A5000000.30.20


Drivers / Alimentatori




Driver / Alimentatore	Not included
100-240V 24V/80W/IP20/ON/OFF	1Z1120440




Driver / Alimentatore	Not included
100-240V 24V/96W/IP67/1-10V	1Z1120540




Driver / Alimentatore	Not included
100-240V 24V/150W/IP67/1-10V	1Z1120500



Controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z2170010

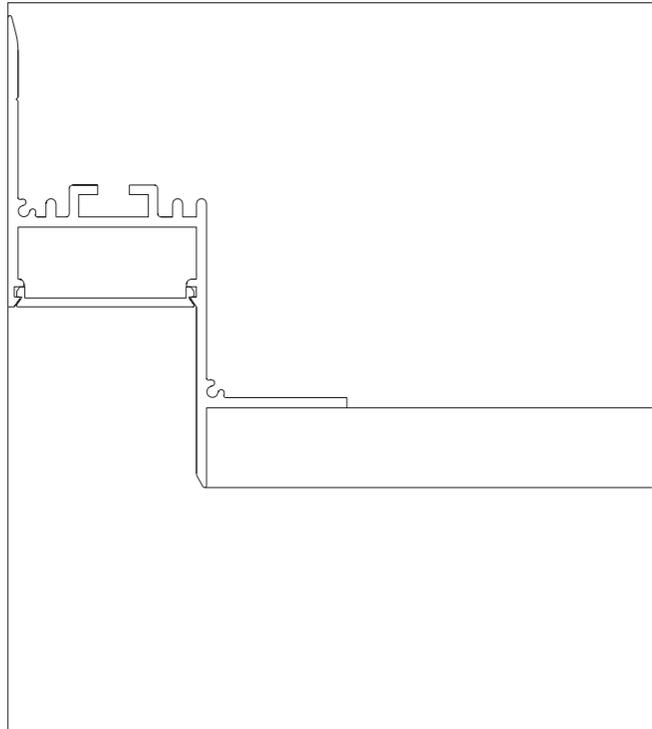



**OUTDOOR / ESTERNO**



## BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.  
A study of camouflage. The reflective surface is used as a tool  
to camouflage and hide the machine to create light.  
The reflection of the environment makes the luminaire invisible.

La magia dello specchio portata in giardino.  
Un lavoro sulla mimetica. La superficie riflettente utilizzata come strumento  
per mimetizzare e nascondere la macchina per fare luce.  
La riflessione del contesto ambientale rende invisibile il corpo illuminante.


# BELLADINOTTE

Maurizio Mancini / 2012

Floor / Indirect / Outdoor

Material Metal  
Finish .00 Standard

Note Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m). *Apparecchio illuminante da esterno a picchetto. Orientabile lungo l'asse verticale. Piano con finitura a specchio. Retro del piano a specchio verde opaco. Cavo nero (5 m).*



## BELLADINOTTE


2x4,2W  
24V DC  
2700K - 2x262lm / 3000K - 2x282lm  
CRI >90  
Driver not included  
CE IP67

Standard - 2700K  
Standard - 3000K

1A3560000.27.20  
1A3560000.30.20

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00





**BUBKA**

Daniele Sprega / 2014

A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.


Un perfetto utensile per fare la luce fuori.  
La luce come strumento per condurre le persone lungo i percorsi.

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal

**Finish** .00 Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L *Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (7 m).*



**BUBKA**

8,4W

Max 700mA DC

2700K - 639lm / 3000K - 639lm

CRI >90

Driver not included



Standard - 2700K


Standard - 3000K

1A3600000.27.20

1A3600000.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00




Anchoring bolt / Tirafondo		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm		1A3620000.00.00

Lighting modules / Corpi illuminanti



Additional LED head / Testa LED supplementare		Not included
Matt Black	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20
	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20





## BUBKA BOLLARD

Daniele Sprega / 2021

A perfect tool to make outdoor light.  
The light as a tool for guiding people along a path.

Un perfetto utensile per fare la luce fuori.  
La luce come strumento per condurre le persone lungo i percorsi.


# BUBKA BOLLARD

Daniele Sprega / 2021

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** .00 Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L *Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (9 m).*



## BUBKA BOLLARD

8,4W  
 Max 700mA DC  
 2700K - 350lm / 3000K - 350lm  
 CRI >90  
 Driver not included  
 CE IP65

Standard - 2700K  
 Standard - 3000K


1A1440000.27.20  
 1A1440000.30.20

# BUBKA BOLLARD

Daniele Sprega / 2021

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




Driver / Alimentatore		Not included
220-240V(100-127V)	350mA/17W(15W)/IP68/ON/OFF	1Z0240880

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00



Anchoring bolt / Tirafondo		Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm		1A3620000.00.00

Lighting modules / Corpi illuminanti



Additional LED head / Testa LED supplementare		Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 639lm - CRI >90	1A3610400.27.20
	Max 700mA DC - 8,4W 3000K - 639lm - CRI >90	1A3610400.30.20



## **BUIO**

Maurici Ginés / 2023


A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity,  
but in the choice and assumption of a method,  
the method of amazement and memory.

Un piccolo punto nero svela la sua funzione solo quando necessario.  
Per noi il segreto della luce non è nella forma, o in alcuni virtuosismi produttivi,  
ma nella scelta e nell'assunzione di un metodo,  
il metodo dello stupore e della memoria.

Recessed / Direct / Outdoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Outdoor luminaire. Available with transparent or black glass. *Apparecchio illuminante da esterno. Disponibile con vetro trasparente o nero. Cavo nero (1 m).*




**BUJO TRIM - 13°**

Black filter  
 6W  
 24V DC  
 2700K - 93lm / 3000K - 93lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5120400.27.20  
 1A5120400.30.20




**BUJO TRIM - 25°**

Black filter  
 6W  
 24V DC  
 2700K - 158lm / 3000K - 158lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5140400.27.20  
 1A5140400.30.20




**BUJO TRIM - 32°**

Black filter  
 6W  
 24V DC  
 2700K - 144lm / 3000K - 144lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5130400.27.20  
 1A5130400.30.20




**BUJO TRIM ELLIPTICAL**

Black filter  
 6W  
 24V DC  
 2700K - 91lm / 3000K - 91lm  
 CRI >90  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5150400.27.20  
 1A5150400.30.20




**BUIO TRIM - 13°**

Transparent filter  
 6W  
 24V DC  
 2700K - 247lm / 3000K - 247lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5160400.27.20  
 1A5160400.30.20




**BUIO TRIM - 25°**

Transparent filter  
 6W  
 24V DC  
 2700K - 257lm / 3000K - 257lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5180400.27.20  
 1A5180400.30.20




**BUIO TRIM - 32°**

Transparent filter  
 6W  
 24V DC  
 2700K - 297lm / 3000K - 297lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5170400.27.20  
 1A5170400.30.20




**BUIO TRIM ELLIPTICAL**

Transparent filter  
 6W  
 24V DC  
 2700K - 233lm / 3000K - 233lm  
 CRI >90  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5190400.27.20  
 1A5190400.30.20






**BUIO TRIMLESS - 13°**

Black filter  
 6W  
 24V DC  
 2700K - 93lm / 3000K - 93lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5200400.27.20  
 1A5200400.30.20




**BUIO TRIMLESS - 25°**

Black filter  
 6W  
 24V DC  
 2700K - 158lm / 3000K - 158lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5220400.27.20  
 1A5220400.30.20




**BUIO TRIMLESS - 32°**

Black filter  
 6W  
 24V DC  
 2700K - 144lm / 3000K - 144lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5210400.27.20  
 1A5210400.30.20




**BUIO TRIMLESS ELLIPTICAL**

Black filter  
 6W  
 24V DC  
 2700K - 91lm / 3000K - 91lm  
 CRI >90  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5230400.27.20  
 1A5230400.30.20




**BUIO TRIMLESS - 13°**

Transparent filter  
 6W  
 24V DC  
 2700K - 247lm / 3000K - 247lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5240400.27.20  
 1A5240400.30.20




**BUIO TRIMLESS - 25°**

Transparent filter  
 6W  
 24V DC  
 2700K - 257lm / 3000K - 257lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5260400.27.20  
 1A5260400.30.20




**BUIO TRIMLESS - 32°**

Transparent filter  
 6W  
 24V DC  
 2700K - 297lm / 3000K - 297lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5250400.27.20  
 1A5250400.30.20



**BUIO TRIMLESS ELLIPTICAL**


Transparent filter  
 6W  
 24V DC  
 2700K - 233lm / 3000K - 233lm  
 CRI >90  
 UGR <19  
 Driver not included  
 CE IP67

Matt Black - 2700K  
 Matt Black - 3000K

1A5270400.27.20  
 1A5270400.30.20


**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione



<b>Installation box / Cassaforma</b>		Not included
Standard		1A5280000.00.00

Drivers / Alimentatori



<b>Driver / Alimentatore</b>		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



<b>Driver connector IP68 / Connettore driver IP68</b>		Included
	1 Piece	1A1660000.00.00





## BUIO - SPOT

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.  
For us the secret of light lies not in its shape, or in some technical virtuosity,  
but in the choice and assumption of a method,  
the method of amazement and memory.

Un piccolo punto nero svela la sua funzione solo quando necessario.  
Per noi il segreto della luce non è nella forma, o in alcuni virtuosismi produttivi,  
ma nella scelta e nell'assunzione di un metodo,  
il metodo dello stupore e della memoria.


## BUIO - SPOT

Maurici Ginés / 2023

Floor-Wall-Ceiling / Direct / Outdoor

**Material** Metal  
**Finish** .04 Matt Black

**Note** Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).  
*Apparecchio illuminante da esterno. Orientabile nella versione a picchetto e da parete. Disponibile con vetro trasparente o nero. Accessori per la versione a picchetto e da parete in inox AISI 316L. Cavo nero (1 m).*




### BUIO - 13°

Black filter  
6W  
24V DC  
2700K - 93lm / 3000K - 93lm  
CRI >90  
Beam 13°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5040400.27.20  
1A5040400.30.20



### BUIO - 25°


Black filter  
6W  
24V DC  
2700K - 158lm / 3000K - 158lm  
CRI >90  
Beam 25°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5060400.27.20  
1A5060400.30.20

Maurici Ginés / 2023

## BUIO - SPOT




### BUIO - 32°

Black filter  
6W  
24V DC  
2700K - 144lm / 3000K - 144lm  
CRI >90  
Beam 32°  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5050400.27.20  
1A5050400.30.20




### BUIO ELLIPTICAL

Black filter  
6W  
24V DC  
2700K - 91lm / 3000K - 91lm  
CRI >90  
UGR <19  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A5070400.27.20  
1A5070400.30.20




**BUIO - 13°**

Transparent filter  
 6W  
 24V DC  
 2700K - 247lm / 3000K - 247lm  
 CRI >90  
 Beam 13°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5080400.27.20  
 1A5080400.30.20




**BUIO - 25°**

Transparent filter  
 6W  
 24V DC  
 2700K - 257lm / 3000K - 257lm  
 CRI >90  
 Beam 25°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5100400.27.20  
 1A5100400.30.20




**BUIO - 32°**

Transparent filter  
 6W  
 24V DC  
 2700K - 297lm / 3000K - 297lm  
 CRI >90  
 Beam 32°  
 UGR <19  
 Driver not included



Matt Black - 2700K  
 Matt Black - 3000K

1A5090400.27.20  
 1A5090400.30.20



**BUIO ELLIPTICAL**

Transparent filter  
 6W  
 24V DC  
 2700K - 233lm / 3000K - 233lm  
 CRI >90  
 UGR <19  
 Driver not included




Matt Black - 2700K  
 Matt Black - 3000K

1A5110400.27.20  
 1A5110400.30.20




**Compulsory accessories / Accessori obbligatori**


Installation kits / Kit d'installazione




<b>Wall bracket / Staffa da parete</b>		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00



<b>Ceiling rose / Rosone</b>		Not included
Matt Black	Brushed INOX	1A4441000.00.00




<b>Earth spike / Picchetto</b>		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00



<b>Tree strap / Cinghia per albero</b>		Not included
Standard	Length 1 m	1A4590000.00.00

**Drivers / Alimentatori**




<b>Driver / Alimentatore</b>		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



<b>Driver connector IP68 / Connettore driver IP68</b>		Included
1 Piece		1A1660000.00.00

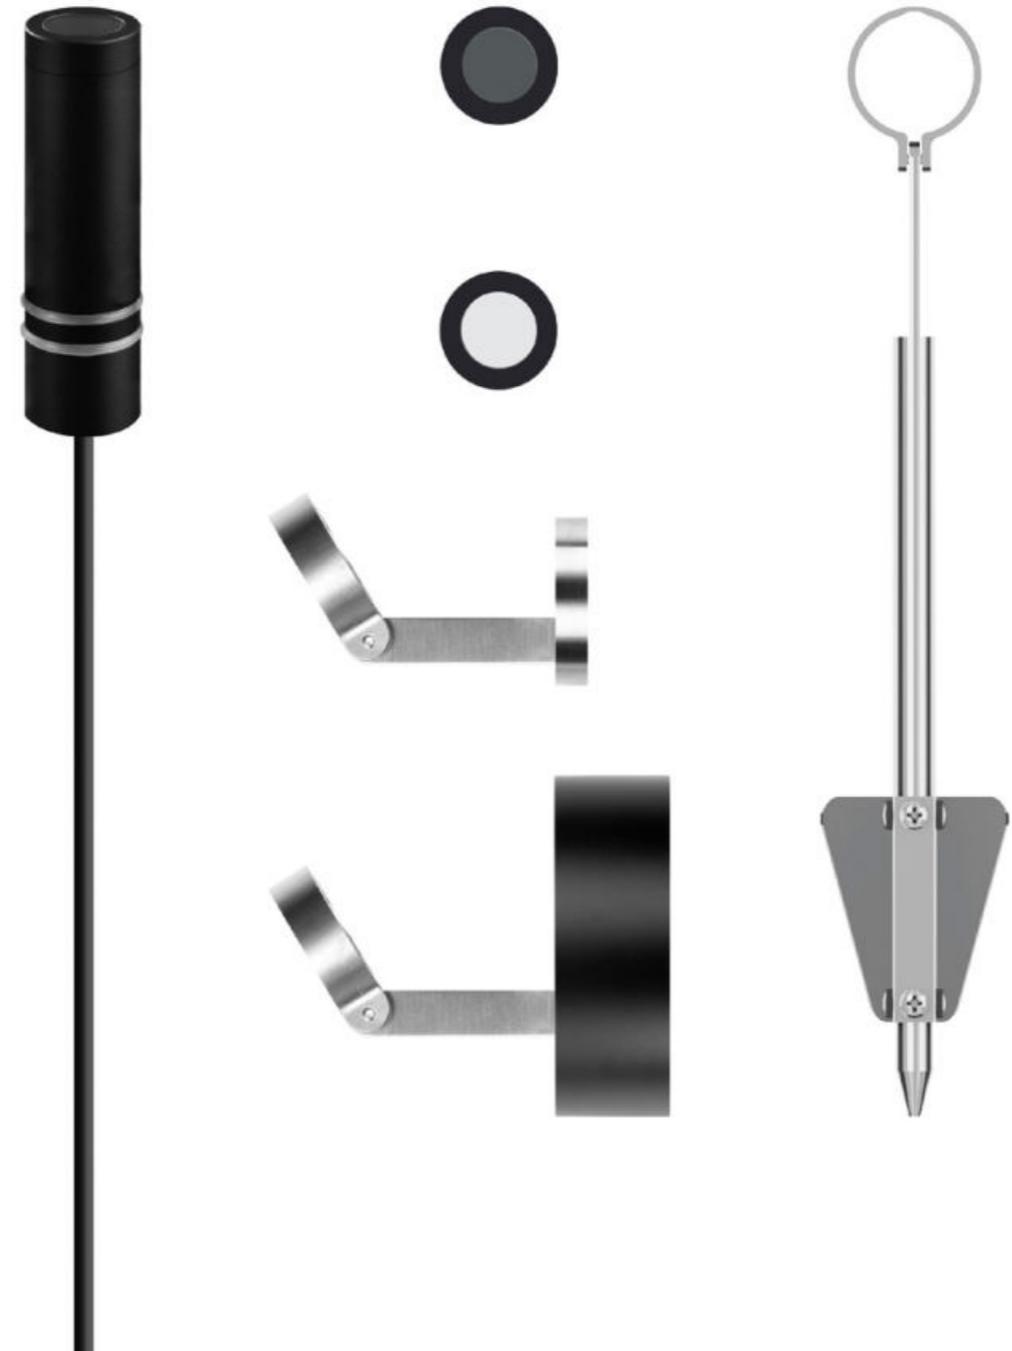



A tool to light.

The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.


# CHILLOUT

/ 2011

Wall / Direct / Outdoor

**Material** Glass - Metal  
**Finish** .03 Matt White

**Note** Outdoor wall luminaire. Adjustable along the vertical axis. *Apparecchio illuminante da esterno da parete. Orientabile lungo l'asse verticale.*



## CHILLOUT

Max 12W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
C E IP65

Matt White - ON/OFF

1A3660300.00.00

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



<b>Driver connector IP68 / Connettore driver IP68</b>	Included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



<b>LED - E27 - PAR30s</b>	Not included
220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730





## GRILLO

Daniele Sprega / 2012

A small luminous elf that you can install in your garden or inside a vase.  
A thin stem stuck into the ground and a little adjustable LED projector.  
For illuminating a flower, a plant or simply to accompany us along a path.  
Lamp with spike.


Un piccolo elfo luminoso da installare in giardino o all'interno di un vaso.  
Uno stelo sottile incastrato nel terreno e un piccolo proiettore a LED orientabile.  
Per illuminare un fiore, una pianta o semplicemente per accompagnare un percorso.  
Lampada con picchetto.

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal

**Finish** .04 Matt Black

**Note** Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m). *Apparecchio illuminante da esterno a picchetto. Orientabile in tutte le direzioni. Stelo in inox AISI 316L. Cavo nero (5 m).*

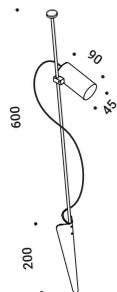

**GRILLO**


4,2W  
24V DC  
2700K - 262lm / 3000K - 282lm  
CRI >90  
Driver not included  
CE IP67

Matt Black - 2700K  
Matt Black - 3000K

1A3570400.27.20  
1A3570400.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00



Additional stem 1 m / Stelo supplementare 1 m		Not included
Standard	AISI 316L stainless steel	1A3590000.00.00

Lighting modules / Corpi illuminanti



Additional LED head / Testa LED supplementare		Not included
Matt Black	24V DC - 4,2W	1A3580400.27.20
	2700K - 262lm - CRI >90	
	24V DC - 4,2W	1A3580400.30.20
	3000K - 282lm - CRI >90	



## HAZARD

Daide Groppi / 2023

We have always been thrilled by bare, abandoned lamps.  
On the walls of mountain huts, in the countryside of our plain.  
Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.  
Wall lamp with direct light for outdoor environments  
with steel nail subject to natural oxidation over time.

Ci hanno sempre emozionato le lampadine abbandonate, nude.  
Sui muri delle case di montagna, nelle campagne della nostra pianura.  
Lavori non ancora finiti, lampade ancora da decidere,  
pensieri effimeri che diventano poesia.  
Lampada da parete a luce diretta per ambienti esterni  
con chiodo in acciaio soggetto ad ossidazione naturale nel tempo.

# HAZARD


Davide Groppi / 2023

Wall / Direct / Outdoor

Material Metal - Thermoplastic resin  
Finish .00 Standard

Note Outdoor wall luminaire. One red and one black cable (1,5 m).

*Apparecchio illuminante da esterno da parete. Un cavo rosso e un cavo nero (1,5 m).*

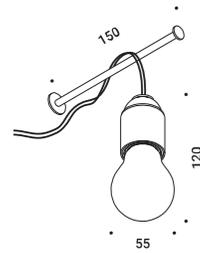

## HAZARD


0,6W - E27  
36V DC  
2200K - 50lm  
CRI 80  
Driver not included  
Bulb included  
CE IP65

Standard - 2200K

| 1A4210000.22.20 |

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



### Driver / Alimentatore

Not included

110-240V

36V/36W/IP67/ON/OFF

1Z1120590






Light has found a home.  
A lamp designed to welcome, illuminating the entrance.

La luce ha trovato casa.  
Una lampada pensata per dare il benvenuto, per illuminare la soglia.

Wall / Direct / Outdoor

Material Metal  
 Finish .00 Standard

Note Outdoor wall luminaire. Matt black body and matt red top cover. *Apparecchio illuminante da esterno da parete. Corpo nero opaco e tetto rosso opaco. Luce del foro rossa.*




**IMU**  
 5,5W  
 Max 350mA DC  
 3000K - 306lm  
 CRI >80  
 Driver not included  
 CE IP65

Standard - 3000K

| 1A3550000.30.20 |

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore	Not included
220-240V(100-127V) 350mA/17W(15W)/IP68/ON/OFF	1Z0240880

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00





Light, waiting for Romeo.

An outdoor light, for walls or to illuminate the entrance.

La luce, aspettando Romeo.

Una luce per esterno, sulle pareti o per illuminare le soglie.

# JULIET


/ 2014

Wall / Diffuse / Outdoor

**Material** Glass - Metal  
**Finish** .03 Matt White

**Note** Outdoor wall luminaire.

*Apparecchio illuminante da esterno da parete.*



## JULIET

18W  
220-240V - 50/60Hz  
2700K - 827lm / 3000K - 865lm  
CRI >80  
TRIAC/IGBT  
C E IP65

Matt White - 2700K - TRIAC/IGBT  
Matt White - 3000K - TRIAC/IGBT

1A3670300.27.02  
1A3670300.30.02

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68

Included

1 Piece

1A1660000.00.00





## LENTA

Bestetti Associati - Davide Groppi / 2011

A lantern. Soft and diffuse light.  
A Slow-Light project for outdoors.

Una lanterna, luce morbida e diffusa.  
Un progetto di slow-light per l'outdoor.


# LENTA

Bestetti Associati - Davide Groppi / 2011

Floor / Diffuse / Outdoor

**Material** Metal - Methacrylate - Polycarbonate  
**Finish** .03 Matt White

**Note** Outdoor floor luminaire. Matt white diffuser. Black cable (5 m). *Apparecchio illuminante da esterno da terra. Diffusore bianco opaco. Cavo nero (5 m).*



## LENTA

Max 18W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
C E IP65

Matt White - ON/OFF

| 1A3630300.00.00 |

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68

Included

1 Piece

1A1660000.00.00

Bulbs / Lampadine




LED - E27 - A60

Not included

220-240V - 11,2W - 360°  
2700K - 1521lm - CRI >90  
Energy Efficiency D - Dimmable

1Y0330790

Other accessories / Altri accessori



IP65 Schuko adapter / Adattatore Schuko IP65

Not included

IP65

1A2950000.00.00





## NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.  
A simple project: a cable and a LED.  
Indoor version also available.

È l'idea di portare la luce dove si desidera.  
Un progetto semplice: un cavo e un modulo LED.  
Disponibile anche nella versione indoor.


# NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal  
**Finish** **.04** Matt Black **.32** Copper Oxide

**Note** Outdoor suspension luminaire. Black cable (10 m). *Apparecchio illuminante da esterno a sospensione. Cavo nero (10 m).*




## NEURO OUTDOOR

4,2W  
 24V DC  
 2700K - 262lm / 3000K - 282lm  
 CRI >90  
 Driver not included  
 CE IP65

Matt Black - 2700K	1A4030400.27.20
Matt Black - 3000K	1A4030400.30.20
Copper Oxide - 2700K	1A4033200.27.20
Copper Oxide - 3000K	1A4033200.30.20

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00



Matt Black



Copper Oxide





## NUIT


Maurici Ginés / 2023

Night has always been a source of inspiration.  
We walk, and we are not alone.  
Nuit is a small travel companion that draws our night-time journeys.  
**Bronze Delta ADI-FAD Award 2024**

La notte è sempre fonte di ispirazione.  
Camminiamo e non siamo soli.  
Nuit è una piccola compagna di viaggio che disegna i nostri transiti notturni.  
**Bronze Delta ADI-FAD Award 2024**

Recessed / Diffuse / Indoor-Outdoor

<b>Material</b>	Metal		
<b>Finish</b>	<b>.03</b> Matt White	<b>.27</b> Gravity Black	<b>.38</b> Blasted Inox
<b>Note</b>	Outdoor recessed luminaire.		<i>Apparecchio illuminante da esterno da incasso.</i>




**NUIT**

1W  
24V DC  
2700K - 33lm / 3000K - 34lm  
CRI >90  
Driver not included  
CE IP65

Matt White - 2700K	1A1320300.27.20
Matt White - 3000K	1A1320300.30.20
Gravity Black - 2700K	1A1322700.27.20
Gravity Black - 3000K	1A1322700.30.20
Blasted Inox - 2700K	1A1323800.27.20
Blasted Inox - 3000K	1A1323800.30.20

**Compulsory accessories / Accessori obbligatori**

Installation kits / Kit d'installazione




<b>Concrete box / Cassaforma per cemento</b>	Not included
Standard	1A4460000.00.00



<b>Plasterboard frame 12,5 mm / Cornice per cartongesso 12,5 mm</b>	Not included	
Matt White	Cut-out 100x100 mm Minimum space for mounting 110 mm	1A4470300.00.00


Drivers / Alimentatori



<b>Driver / Alimentatore</b>	Not included	
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



<b>Adapter plasterboard 25 mm / Adattatore per cartongesso 25 mm</b>	Not included
Standard	1A5030000.00.00



<b>Driver connector IP68 / Connettore driver IP68</b>	Included
1 Piece	1A1660000.00.00



Matt White



Gravity Black



Blasted Inox





## ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light. Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.

**AZ Award 2021 and People's Choice  
Archiproducts Design Award 2020**

Dal latino "origo", inizio, nascita, fonte. Evoca un germoglio che emerge dalla terra e si slancia verso il cielo, lo stelo che diventa sempre più sottile. Misteriosa, enigmatica ma confortevole, unisce il fascino dell'incognito al piacere di una luce d'ambiente sofisticata ed elegante. Origine scolpisce e valorizza ogni ambiente con la sua luce indiretta, volutamente non invasiva, grafica e affascinante. Disponibile anche nella versione indoor.

**AZ Award 2021 e People's Choice  
Archiproducts Design Award 2020**

# ORIGINE OUTDOOR


Davide Groppi - Giorgio Rava / 2020

Floor / Indirect / Outdoor

Material Glass fiber - Metal  
Finish .04 Matt Black

Note Outdoor floor luminaire. Black cable (5 m).

Apparecchio illuminante da esterno da terra. Cavo nero (5 m).

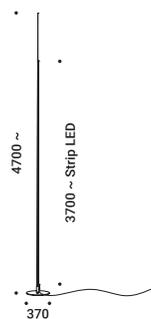

## ORIGINE OUTDOOR

35W  
24V DC  
2700K - 2872lm / 3000K - 2930lm  
CRI >80  
Driver not included


CE IP65

Matt Black - 2700K  
Matt Black - 3000K

1A2480400.27.20  
1A2480400.30.20

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
	1 Piece	1A1660000.00.00







Q<sup>2</sup>

Alberto Zattin / 2006

A piece of architecture to be used in space.  
A concrete cube that allows you to understand volumes and architecture  
in an unusual and sometimes unprecedented way.  
Indoor version also available.


Un pezzo di architettura da utilizzare nello spazio.  
Un cubo realizzato in cemento che permette di interpretare i volumi e le architetture  
in modo inconsueto e talvolta inedito.  
Disponibile anche nella versione indoor.

Floor / Direct / Outdoor

Material Cement - Metal  
 Finish .00 Standard

Note Outdoor floor luminaire. Concrete body. Black cable (2,5 m).

Apparecchio illuminante da esterno da terra. Corpo in cemento. Cavo nero (2,5 m).

Q<sup>2</sup>

20W

Max 500mA DC

3000K - 2058lm

CRI &gt;90

Driver not included


CE IP67

Standard - 3000K

| 1A1150000.30.20 |

### Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore

Not included

220-240V(110-127V) 500mA/24W(15W)/IP68/ON/OFF

1Z0241170

### Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




Driver connector IP68 / Connettore driver IP68

Included

1 Piece

1A1660000.00.00

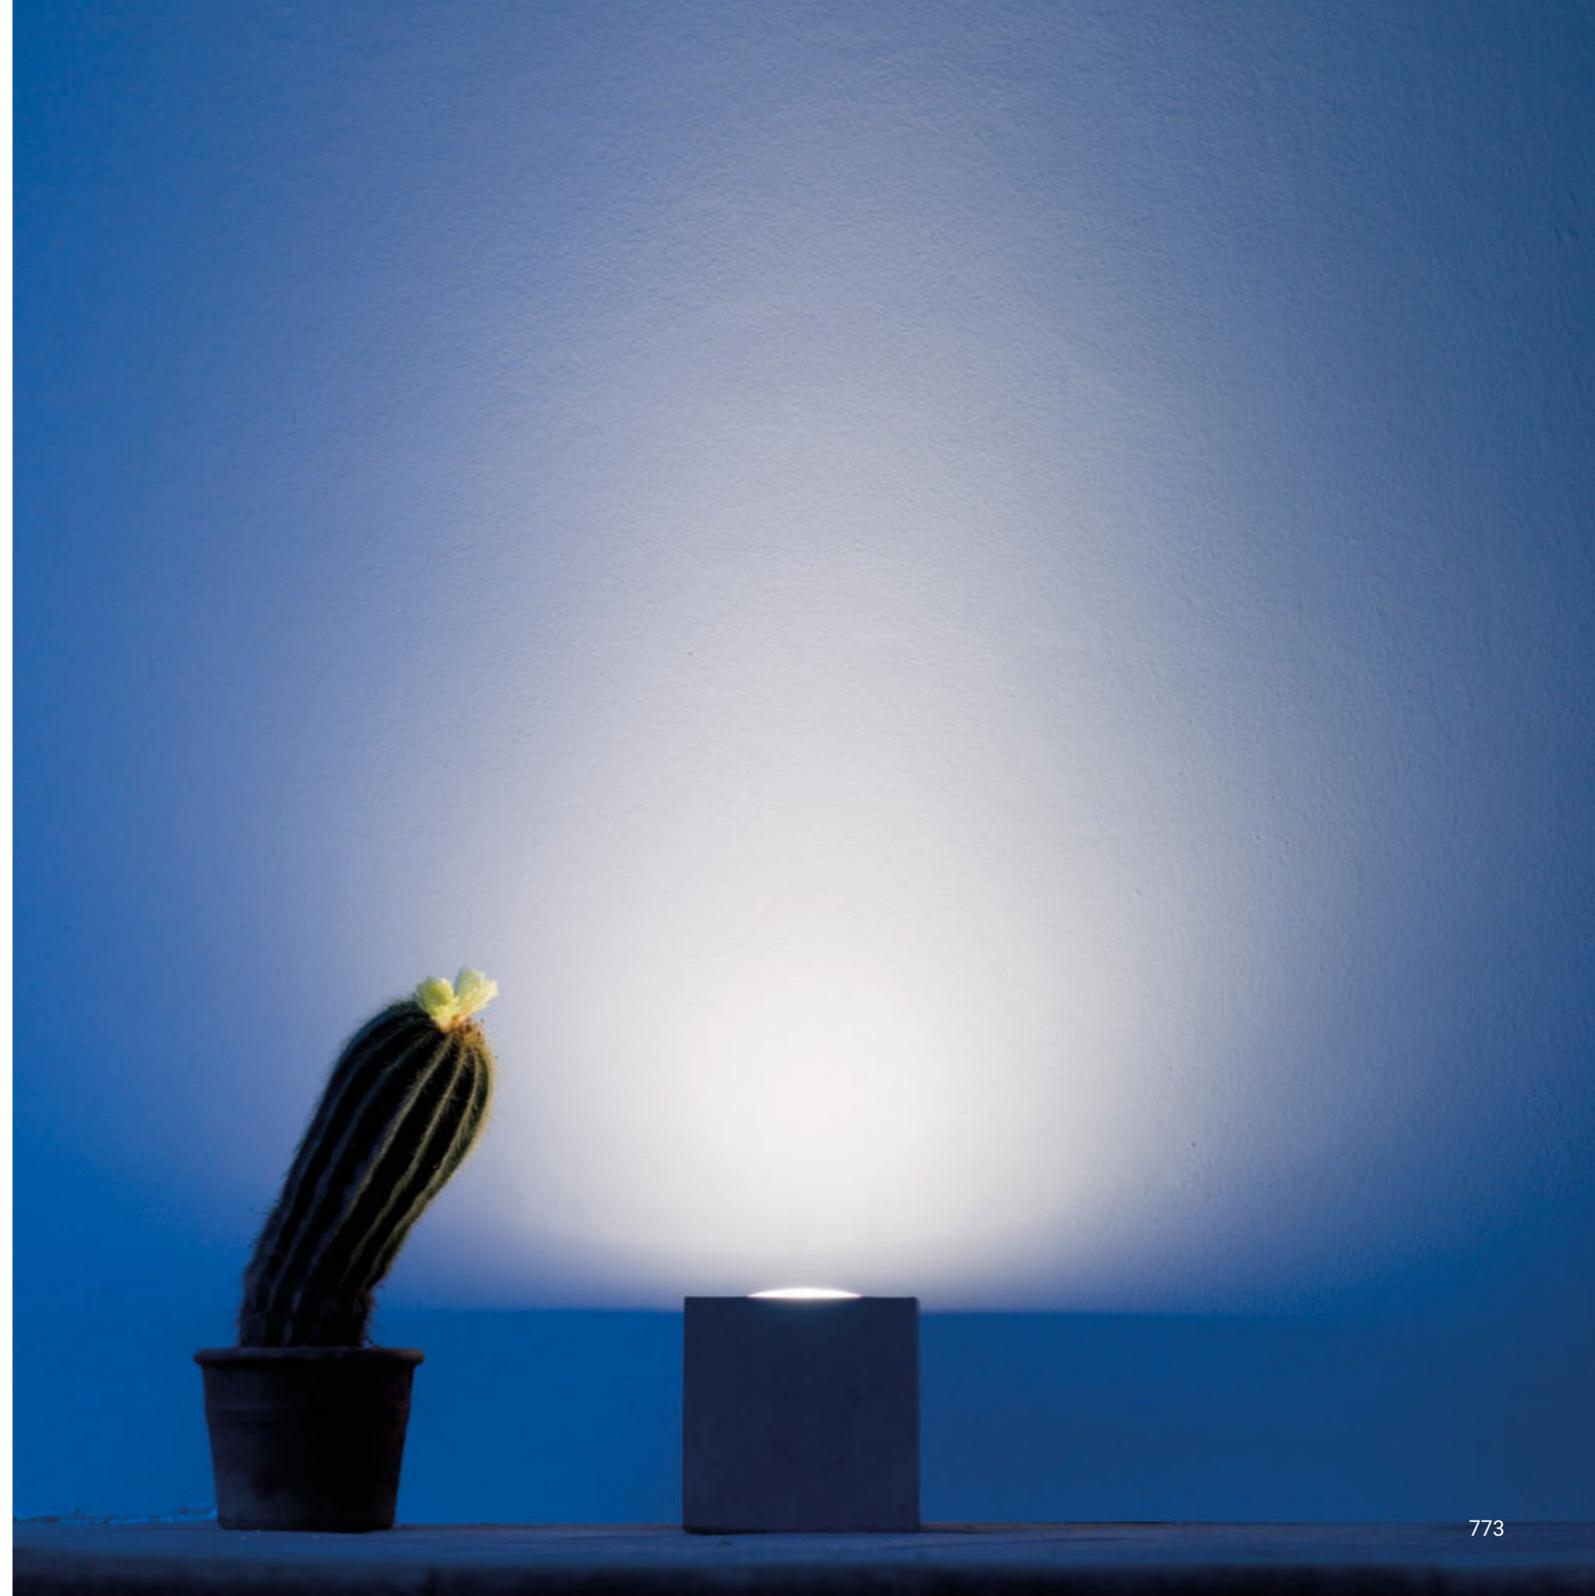

## SAMPEI OUTDOOR

Enzo Calabrese - Davide Groppi / 2011



A star that shines in the sky.  
We wanted to go further, beyond the usual meaning of a floor lamp.  
It is like watching a tiny miracle, an unexpected magic.  
A soft glow comes from far away,  
suggesting unforeseen solutions and indicating lost details.


Una stella che brilla nel cielo.  
Siamo voluti andare oltre, superando il senso comune del significato di lampada da terra.  
È come assistere ad un piccolo miracolo, una magia inattesa.  
Un bagliore gentile che arriva da lontanissimo  
e che suggerisce soluzioni imprevedute, indica dettagli smarriti.

Compasso d'Oro ADI  
Award 2014




Floor / Direct / Outdoor

<b>Material</b>	Glass fiber - Metal			
<b>Finish</b>	<b>.03</b> Matt White	<b>.04</b> Matt Black	<b>.20</b> Magic Blue	<b>.35</b> Grey Green
	<b>.40</b> Grey Beige			
<b>Note</b>	Outdoor floor luminaire. Adjustable in all directions. Black cable.		<i>Apparecchio illuminante da esterno da terra. Orientabile in tutte le direzioni. Cavo nero.</i>	

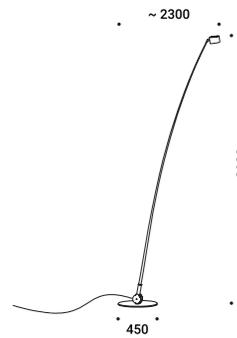

**SAMPEI 440 OUTDOOR**  
 8,4W  
 Max 700mA DC  
 2700K - 639lm / 3000K - 639lm  
 CRI >90  
 Driver not included  
**CE** **IP65**

Matt White - 2700K	1A3770300.27.20
Matt White - 3000K	1A3770300.30.20
Matt Black - 2700K	1A3770400.27.20
Matt Black - 3000K	1A3770400.30.20
Magic Blue - 2700K	1A3772000.27.20
Magic Blue - 3000K	1A3772000.30.20
Grey Green - 2700K	1A3773500.27.20
Grey Green - 3000K	1A3773500.30.20
Grey Beige - 2700K	1A3774000.27.20
Grey Beige - 3000K	1A3774000.30.20

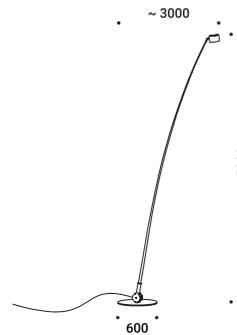


**SAMPEI XXL OUTDOOR**  
 12,8W  
 Max 700mA DC  
 2700K - 1256lm / 3000K - 1313lm  
 CRI >90  
 Driver not included  
**CE** **IP65**

Matt White - 2700K	1A5330300.27.20
Matt White - 3000K	1A5330300.30.20
Matt Black - 2700K	1A5330400.27.20
Matt Black - 3000K	1A5330400.30.20
Magic Blue - 2700K	1A5332000.27.20
Magic Blue - 3000K	1A5332000.30.20
Grey Green - 2700K	1A5333500.27.20
Grey Green - 3000K	1A5333500.30.20
Grey Beige - 2700K	1A5334000.27.20
Grey Beige - 3000K	1A5334000.30.20

**Compulsory accessories / Accessori obbligatori**

Drivers / Alimentatori



Driver / Alimentatore		Not included
220-240V(100-127V)	700mA/30W(15W)/IP68/ON/OFF	1Z0241110

**Optional accessories / Accessori opzionali**

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68		Included
1 Piece		1A1660000.00.00



Magic Blue



Grey Green



Grey Beige

Palazzo Venier dei Leoni  
Peggy Guggenheim Collection  
Venezia



## SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013



A nylon lampshade, strictly hand-stitched and hand-made.  
Indoor version also available.

Un paralume in nylon rigorosamente cucito e confezionato a mano.  
Disponibile anche nella versione indoor.


# SHOJI OUTDOOR

Davide Groppi - Paola Lenti / 2013

Floor / Diffuse / Outdoor

**Material** Metal - PBT - Polycarbonate  
**Finish** .00 Standard

**Note** Outdoor floor luminaire. Hand-stitched shade. Matt black stems. *Apparecchio illuminante da esterno da terra. Paralume cucito a mano. Steli nero opaco. Cavo nero (5 m).*



## SHOJI OUTDOOR

Max 18W - E27  
100-240V - 50/60Hz  
ON/OFF  
Bulb not included  
C E IP65

Standard - ON/OFF

| 1A3640000.00.00 |

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




<b>Driver connector IP68 / Connettore driver IP68</b>	Included
1 Piece	1A1660000.00.00

Bulbs / Lampadine



<b>LED - E27 - A60</b>	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories / Altri accessori



<b>IP65 Schuko adapter / Adattatore Schuko IP65</b>	Not included
IP65	1A2950000.00.00



**A tool to light.**

**The luminaire is pure form, a simple container for the light source.  
Light is incorporated into the space, becoming an architectural element.**

Elemento di luce.

Il corpo illuminante è forma pura, semplice contenitore della fonte luminosa.  
La luce si integra con lo spazio diventando elemento architettonico.


# SPOT OUTDOOR

/ 2018

Wall / Direct / Outdoor

**Material** Metal  
**Finish** .03 Matt White .04 Matt Black

**Note** Outdoor wall and ceiling luminaire. Adjustable in all directions. *Apparecchio illuminante da esterno da parete e soffitto. Orientabile in tutte le direzioni.*



## SPOT OUTDOOR

8,4W  
Max 700mA DC  
2700K - 639lm / 3000K - 639lm  
CRI >90  
Driver not included


CE IP65

Matt White - 2700K  
Matt White - 3000K  
Matt Black - 2700K  
Matt Black - 3000K

1A3650300.27.20  
1A3650300.30.20  
1A3650400.27.20  
1A3650400.30.20

## Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver / Alimentatore	Not included
220-240V(100-127V) 700mA/30W(15W)/IP68/ON/OFF	1Z0241110

## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione



Driver connector IP68 / Connettore driver IP68	Included
1 Piece	1A1660000.00.00

## BULBS / LAMPADINE

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	7W	360°	2700K	806lm	>80	E	X	1Y2080010
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730
	GU4	12V	4W	24°	2700K	200lm	>80	G	-	1Y0330450
	GU5,3	12V	6,7W	36°	3000K	440lm	>97	G	X	1Y0330530
	GU10	220-240V	4,9W	120°	3000K	550lm	>80	E	-	1Y0330740
	GU10	220-240V	5,5W	25°	2700K	355lm	>97	G	X	1Y0330770
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010
	R7s	220-240V	4W	330°	3000K	450lm	>80	E	-	1Y0000138

## DG111 LED MODULES / MODULI LED DG111

	Current	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	350mA DC	11,7W	15°	2700K	1336lm	>90	F	X	1A4700000.27.20
	350mA DC	11,7W	15°	3000K	1364lm	>90	F	X	1A4700000.30.20
	350mA DC	11,7W	22°	2700K	1322lm	>90	F	X	1A3890000.27.20
	350mA DC	11,7W	22°	3000K	1382lm	>90	F	X	1A3890000.30.20
	350mA DC	11,7W	36°	2700K	1276lm	>90	F	X	1A3900000.27.20
	350mA DC	11,7W	36°	3000K	1343lm	>90	F	X	1A3900000.30.20
	500mA DC	16,7W	15°	2700K	1648lm	>90	F	X	1A4700000.27.20
	500mA DC	16,7W	15°	3000K	1682lm	>90	F	X	1A4700000.30.20
	500mA DC	16,7W	22°	2700K	1859lm	>90	F	X	1A3890000.27.20
	500mA DC	16,7W	22°	3000K	1943lm	>90	F	X	1A3890000.30.20
	500mA DC	16,7W	36°	2700K	1795lm	>90	F	X	1A3900000.27.20
	500mA DC	16,7W	36°	3000K	1890lm	>90	F	X	1A3900000.30.20

## DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	50W	230-240V	12V	TRIAC/IGBT	IP20	1Z0240440
	50W	220-240V	1400mA	TRIAC - PUSH	IP20	1Z0241370.1400
	55W(40W)	220-240V(110-120V)	1400mA	DALI - PUSH - 1-10V	IP20	1Z0240830.1400
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	20W	220-240V	24V	TRIAC/IGBT	IP20	1Z0240850.24
	16W(15W)	220-240V(100-127V)	24V	DALI	IP20	1Z0241180.24
	20W(15W)	220-240V(100-127V)	24V	PUSH - 1-10V	IP20	1Z0240870.24
	3W	100-277	250mA	TRIAC/IGBT	IP20	1Z0400900
	12,5W	220-240V	250mA	TRIAC/IGBT	IP20	1Z0241280
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250

## DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	17W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240850.350
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0241180.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH - 1-10V	IP20	1Z0240870.350
	18W(18W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0240530.350
	60W	220-240V	48V	DALI	IP20	1Z0830820
	20W	220-240V	500mA	TRIAC/IGBT	IP20	1Z0240850.500
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241180.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH - 1-10V	IP20	1Z0240870.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	17,5W	100-240V	5V	ON/OFF	IP20	1Z1120180


## DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	120W	100-240V	24V	1-10V	IP67	1Z1120240
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	36W	110-240V	36V	ON/OFF	IP67	1Z1120590
	150W	100-240V	48V	1-10V	IP67	1Z1120250
	240W	100-240V	48V	1-10V	IP67	1Z1120390
	60W	100-240V	48V	ON/OFF	IP67	1Z1120640
	80W	100-240V	48V	1-10V	IP67	1Z1120400
	17W(15W)	220-240V(100-127V)	350mA	ON/OFF	IP68	1Z0240880


## DRIVERS / ALIMENTATORI

	Power	Input	Output	Dimming	Protection	Code
	24W(15W)	220-240V(110-127V)	500mA	ON/OFF	IP68	1Z0241170
	30W(15W)	220-240V(100-127V)	700mA	ON/OFF	IP68	1Z0241110

## COMMON ACCESSORIES / ACCESSORI COMUNI



Power	Input	Output	Dimming	Protection	Code
Controller Casambi - Radio signal 2.4 - 2.486 GHz					
	220-240V - 50Hz		DALI	IP20	1Z0400740
	220-240V - 50Hz		1-10 V	IP20	1Z0400660
(75W) 150W	(110V) 240V - 50/60Hz		TRIAC	IP20	1Z0400670

## COMMON ACCESSORIES / ACCESSORI COMUNI

Size	Cut-out	Finish	Code
Plasterboard trapdoors / Botole in cartongesso			
 200x200 mm	205x205 mm	Standard	1A3780000.00.00
 400x400 mm	415x415 mm	Standard	1A3790000.00.00
Clamp / Bloccacavo			
 Ø 50x20 mm		Matt White	1X0110300.02.00
		Matt Black	1X0110400.02.00
Remote clamp for electrical cable / Bloccacavo remoto per cavo elettrico*			
 50x50x30 mm		Standard	1X0110000.01.00
Wall and ceiling rose / Rosone da parete e soffitto			
 Ø 80x28 mm		Matt White	1X0030300.01.00
		Matt Black	1X0030400.01.00
Driver connector IP68 / Connettore driver IP68			
		Standard	1A1660000.00.00

## SUSPENSION KITS / KIT DI SOSPENSIONE

Recessed suspension kit / Kit di sospensione da incasso

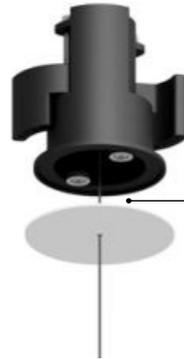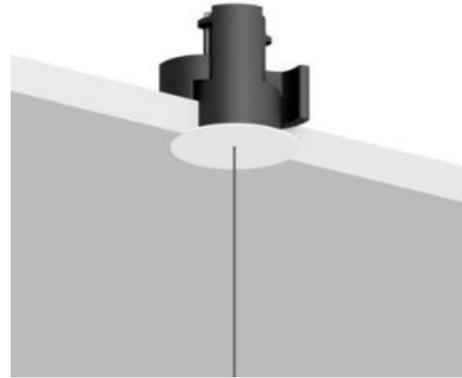

Suspension kit for 12,5 mm plasterboard  
Plasterboard cut-out Ø 44 mm  
Minimum space for mounting 70 mm

Kit di sospensione per cartongesso 12,5 mm  
Dimensioni taglio cartongesso Ø 44 mm  
Spazio minimo per incasso 70 mm


Magnetic fixing  
Fissaggio magnetico



Version	Use	Product reference	Finish	Code
Recessed suspension kit 01	For suspension cables	SHANGHAI 1	Matt White	1X0000300.01.00
		SHANGHAI 2 SOTTILE 1 SOTTILE 1 DE SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.01.00
Recessed suspension kit 02	For electrical cables	MAGIA	Matt White	1X0000300.02.00
			Matt Black	1X0000400.02.00
Recessed suspension kit 03	For suspension cables	MASAI 1	Matt White	1X0000300.03.00
		MASAI 2 REFLEX S 1 REFLEX S 2 SPY	Matt Black	1X0000400.03.00
Recessed suspension kit 04	For electrical cables	ASINTOTO	Matt White	1X0000300.04.00
		REFLEX S 2 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.04.00
Recessed suspension kit 05	For electrical cables	LOUIS XIV 2	Matt White	1X0000300.05.00
		SOTTOSOPRA 2	Matt Black	1X0000400.05.00
Recessed suspension kit 06	For electrical cables	CATHODE 2	Matt White	1X0000300.06.00
		LED IS MORE 2 MISS 2	Matt Black	1X0000400.06.00

## SUSPENSION KITS / KIT DI SOSPENSIONE

Ceiling suspension kit / Kit di sospensione da soffitto

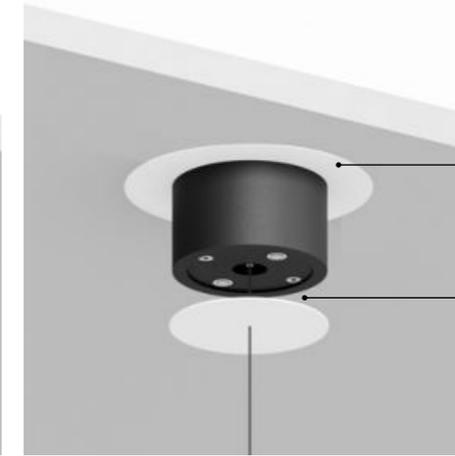


Back plate for masonry ceilings  
Back plate per soffitti in muratura

Magnetic fixing  
Fissaggio magnetico



Version	Use	Product reference	Finish	Code
Ceiling suspension kit 01	For suspension cables	SHANGHAI 1	Matt White	1X0010300.01.00
		SHANGHAI 2 SOTTILE 1 SOTTILE 1 DE SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0010400.01.00
Ceiling suspension kit 02	For electrical cables	MAGIA	Matt White	1X0010300.02.00
			Matt Black	1X0010400.02.00
Ceiling suspension kit 03	For suspension cables	MASAI 1	Matt White	1X0010300.03.00
		MASAI 2 REFLEX S 1 REFLEX S 2 SPY	Matt Black	1X0010400.03.00
Ceiling suspension kit 04	For electrical cables	ASINTOTO	Matt White	1X0010300.04.00
		REFLEX S 2 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0010400.04.00
Ceiling suspension kit 06	For electrical cables	CATHODE 2	Matt White	1X0010300.06.00
		LED IS MORE 2 MISS 2	Matt Black	1X0010400.06.00
Back plate	For masonry ceilings		Matt White	1X0050300.01.00



**General terms.**

This document replaces any other previous one.

Davide Groppi s.r.l. reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.

The sizes are expressed in millimeters.

**Shipment.**

Returned merchandise must be authorized in writing by Davide Groppi s.r.l.

Any claim must be made in writing to Davide Groppi s.r.l. within 7 days of the delivery date. If not, will not be accepted.

**Warranty.**

All products are guaranteed for 24 months from the date of delivery.

The warranty is not valid for damage caused by third parties.

Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi s.r.l.

**Rights.**

No part of this document may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise, without the written permission of Davide Groppi s.r.l.

**Jurisdiction.**

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

**Privacy.**

Davide Groppi s.r.l. protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).

**Condizioni generali.**

Il presente documento annulla e sostituisce ogni edizione precedente.

Davide Groppi s.r.l. si riserva la facoltà di modificare i propri prodotti senza preavviso pertanto le descrizioni riportate in questo documento non sono vincolanti.

Le dimensioni sono espresse in millimetri.

**Spedizioni.**

Resi di materiale sono accettati previa autorizzazione scritta dell'azienda.

Eventuali reclami sono considerati solo se comunicati per iscritto entro 7 giorni dalla data di consegna della merce.

**Garanzia.**

I prodotti di Davide Groppi s.r.l. sono garantiti per 24 mesi dalla data di consegna.

La garanzia non ha valore per danni causati da terzi.

Eventuali danni derivanti da errata installazione o da modifiche apportate ai prodotti non possono essere considerati responsabilità di Davide Groppi s.r.l.

**Diritti.**

Nessuna parte di questo documento può essere riprodotta o trasmessa in qualsiasi forma o con qualsiasi mezzo elettronico, meccanico o altro senza l'autorizzazione scritta di Davide Groppi s.r.l.

**Foro Competente.**

Per eventuali controversie è competente il Foro di Piacenza.

**Privacy.**

La Davide Groppi s.r.l. tutela la riservatezza dei dati personali come previsto degli art. 12, 13 e 14 del Regolamento Europeo n. 679/2016 (GDPR).

People who work with me:

Nicoletta Adorni  
Roberto Aroldi  
Luca Arzani  
Gabriele Baggi  
Diego Balconi  
Laura Bani  
Rosa Bardella  
Marco Benedetti  
Elena Bernazzani  
Nella Bisotti  
Eleonora Bolzoni  
Lorenzo Borsani  
Enrica Brunetti  
Cristina Bruzzi  
Silvia Caborni  
Riccardo Carini  
Omar Carraglia  
Moreno Casella  
Alberto Cavazzi  
Xhoana Cela  
Beatrice Cerrelli  
Sofia Cesarini  
David Chicheportiche  
Laura Claves  
Claudia Clienti  
Michael Cogni  
Andrea Costa  
Giacomo Costellini  
Alessandro Cremaschi  
Alessandra Dallagiovanna  
Monica Dallavalle  
Lara De Pietri  
Stefano De Santis  
Sabrina Delfini  
Alberto Di Felice  
Myzeien Elezi  
Monica Fornasari  
Lorenzo Fugazza  
Daniela Galesi  
Laura Garetti  
Gabriele Gelmetti

Alessandro Ghisoni  
Giovanni Giordano  
Marina Girometta  
Martin Grambozov  
Danilo Groppi  
Michele Groppi  
Silvia Guardiani  
Heather Huber  
Eriola Kacbufi  
Marialuisa Maffi  
Giorgia Marzani  
Katuscia Marzeddu  
Simone Maserati  
Giulia Mazzoni  
Mirko Mocenighi  
Marilena Molinari  
Lorenzo Nicoli  
Martina Orlandi  
Chiara Orsi  
Filippo Palumbo  
Franca Peveri  
Michelina Pinna  
Luca Pompili  
Vitalii Prosiyaniuk  
Laura Ronchini  
Marco Scaramuzza  
Giacomo Sesenna  
Nicolò Siligardi  
Luca Silvestri  
Enza Sorbo  
Michela Tiberto  
Bryan Emerson Velasquez  
Elena Vescovo  
Chiarina Gabriela Viceconte  
Luisa Vignati  
Jaime Alberto Villada Pastor  
Alessandro Villaggi  
Ivan Vitali  
Björn Wienand  
Alberto Zanardi  
Davide Zanoni

Thanks to:

Luigi Coppola  
Danord  
Donatella Nalio  
Daniele Sprega  
Franco Tagliaferri  
Alberto Zattin

Photos:

Fausto Mazza

Niccolò Biddau  
Alessandro Carra  
Fabrizio Cicconi  
Diego Cuoghi  
Nelson Garrido  
LineArchitects  
Nacása & Partners Inc.  
Thomas Pagani  
Iacopo Pasqui

**davidegroppi.com**

**Davide Groppi s.r.l.**  
Via Belizzi 20 / 22  
29122 Piacenza - Italia  
+39.0523.571590  
info@davidegroppi.com

Davide Groppi s.r.l. © 2025  
Company with sole shareholder under the direction and coordination of Dexelance s.p.a.