02/2022

MODULAR

ENCYCLOPEDIA SECRETO

Discover the inner secrets of Modular Lighting Instruments. Who's keeping secrets, and how? What are they? *Not for the faint hearted.*

MODULAR
LIGHTING —
INSTRUMENTS

Step into the light

Enter Secreto. Play with light and darkness. Share or be observed. Which side will you choose?

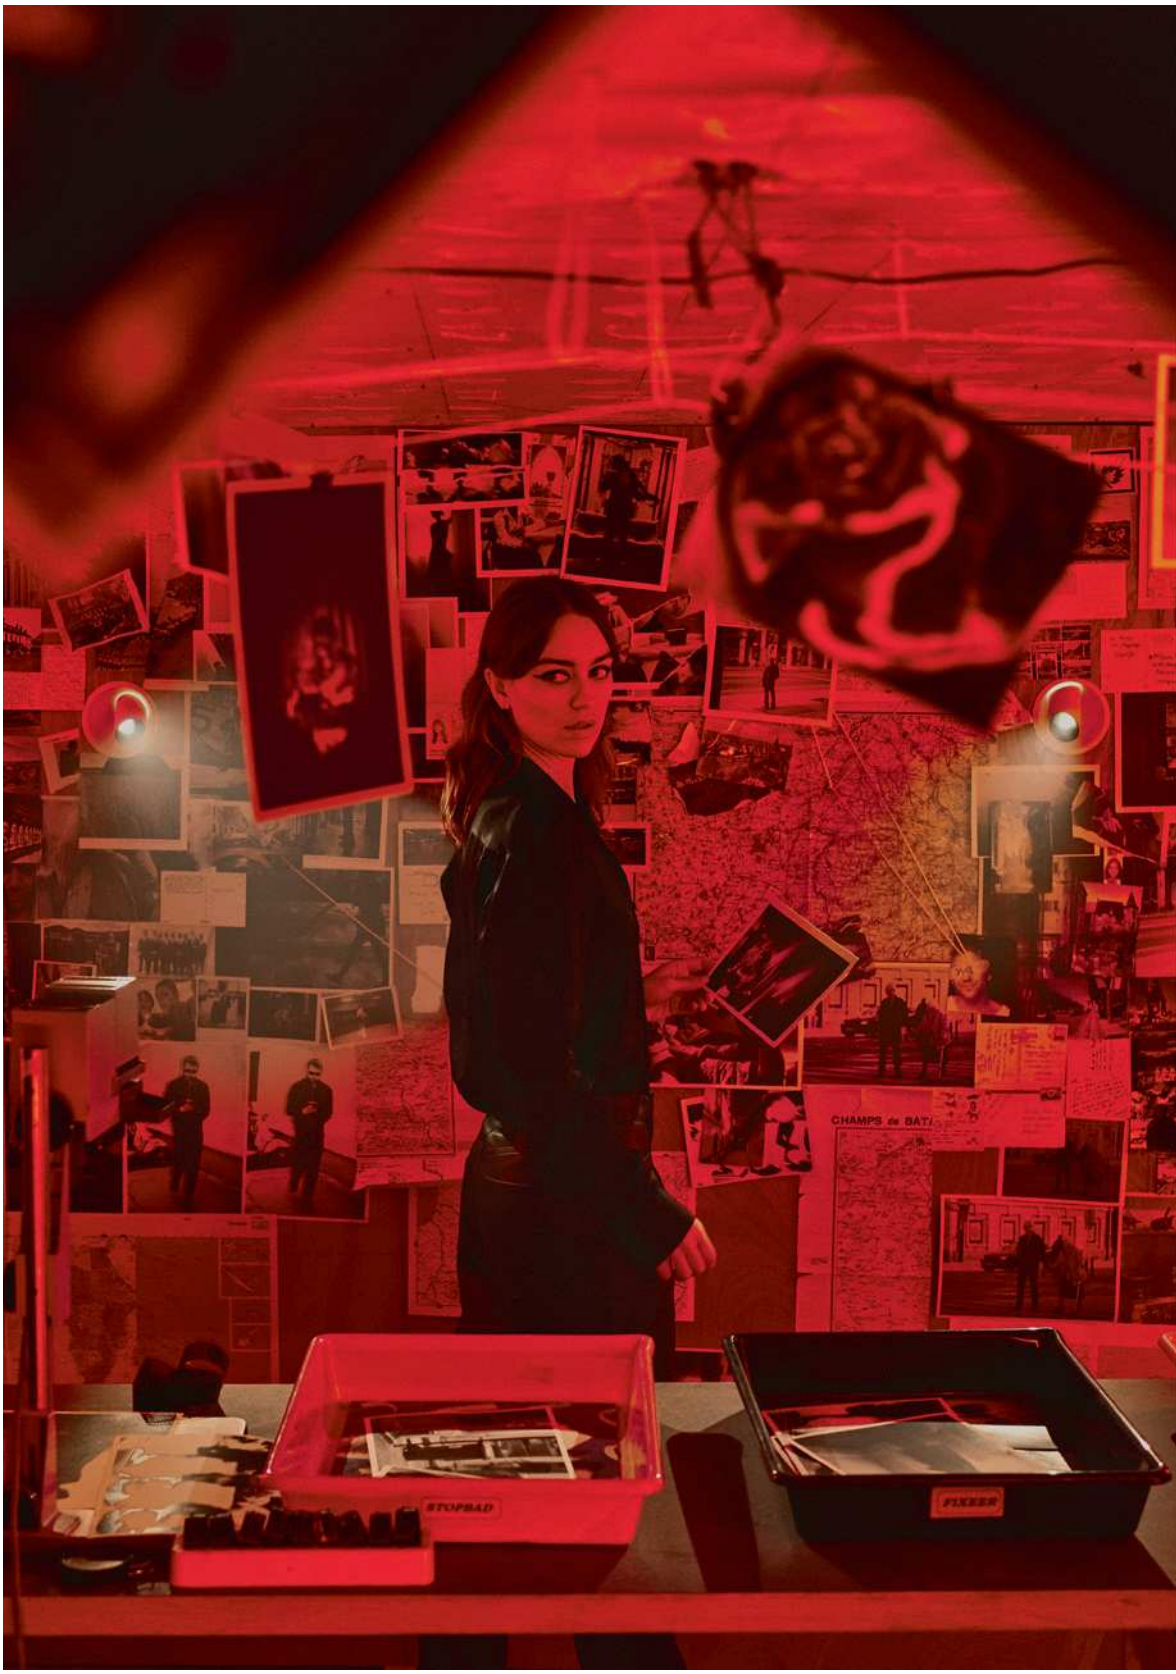
CHAMPS de BATA
STOPBAD
FIXEER

An eye for detail

At Modular Lighting Instruments, we pay obsessive attention to detail. High-quality textures with anodized aluminum and powder finishes. No wires and screws to be seen. We make our own parts, to customize our designs as we want them. We love to express our extreme passion for beauty and this time, we're sharing our enthusiasm in a workbook for you. Because we know, you love details too.

Take your time to flip through your new compact workbook. We made it small and easy to browse, so that it'll serve as your go-to reference book for architectural luminaires. All our products are listed with brief descriptions, beautiful images, as well as with all product specs and article numbers. Look, it's all in there.

Telling secrets

We've been known to provoke. We express ourselves with controversial themes to start conversations. Today, we're taking our distinguishing narrative forward with Secreto.

Modular Lighting Instruments is bringing two worlds to light. One in which an identity is shown, and one in which another is revealed. Much like many of our luminaires, we like to play in the dark.

Duality exposed

In Secreto, we uncover the secret world of several characters and their double lives, by following the life of a voyeur. Herself, confronted by the duality of her own actions. Solitary and remote by day, reaching out into the multiple lives she observes by night. Just like light, she peeks into dark corners and spaces where secrets reside, and brings stories to life.

A world of hidden stories

Secreto plays with the contemporary theme of online sharing, and exposes its counterparts, privacy and secrecy. All around us, people are publishing their lives. But what we see, isn't always what really is. Secreto peeks into our other lives, the ones with secrets.

Want to know a secret?
Visit our campaign page at: supermodular.com/secreto

NOVELTIES

Inspiring new thoughts and ideas that break convention. This is why we focus on high-end design and extreme modularity. We want to offer beauty, functionality, technology, in one. One daring lighting instrument with endless compositions to play with. We're not afraid of creating extraordinary designs with different choices. Because freedom of choice is what gives extraordinary people new ways of using our designs differently.

391 — MINUDE 45 ADJUSTABLE JACK with MODUPOINT LED DEEP RECESSED

209 — PLACEBO UP with GLASS TUBE & PLACEBO DOULI
447 — PLACEBO UP with GLASS TUBE & PLACEBO DOULI - TRACK 48V

333 — TETRIX CONE with LIGHT CONE 46

643 — SLD35 - ANO BRONZE

647 — SLD50 NAKED - ANO SILVER BRONZE

223 — QBIN1 SQUARE IN with SURFACE BOX GI



391 — MINUDE 45 ADJUSTABLE JACK
with CEILING BASE

39 — EXTRUDED

411 — MARBUL TRACK 48V



529 — HOLLOW

379 — MARBULITO JACK with MODUPOINT LED

447 — PLACEBO DOWN with GLASS BALL DOWN - TRACK 48V

85 — KOMPAS & HOOLAHOOP / TULIP BLOOM & BLOSSOM FOR KOMPAS

471 — MARBUL TRACK 230V

479 — REKTOR TRACK 230V

301 — SMART BALL SUSPENSION

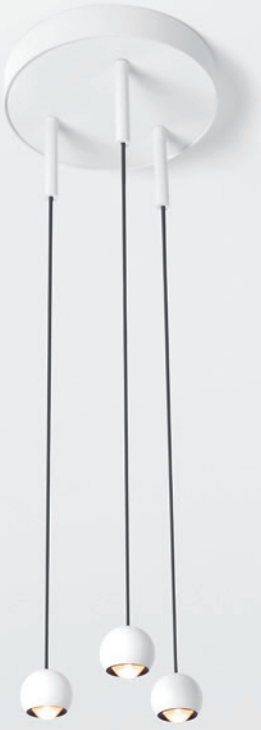

379 — MARBULITO JACK SUSPENSION with CEILING BASE

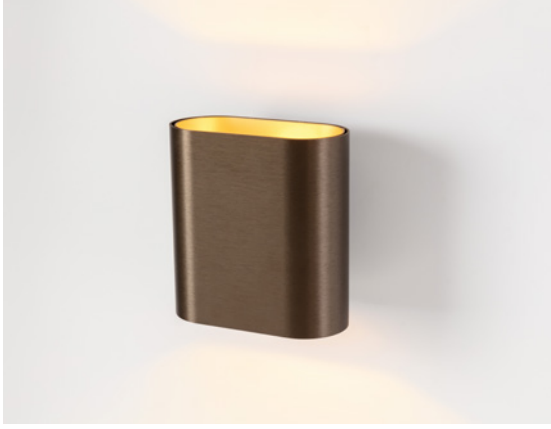

523 — DUELL WALL - BRONZE - CHAMPAGNE

385 — MEDARD 42 JACK with MODUPOINT LED DEEP RECESSED

249 — SHELLBY with ANO CHAMPAGNE SKIN

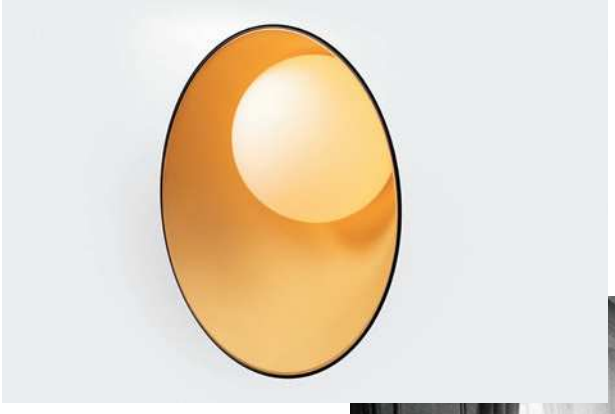

567 — SULFER UPLIGHT

01 CEILING
02 JACK
03 TRACK
04 WALL
05 EXTERIOR
06 PROFILES
07 GOODIES

01

CEILING

01

surface

BOLSTER
27

DUELL
34

FLAT MOON
50

FLAT MOON ECLIPS
58

IZAR
67

LOTIS TUBED
134



MARBUL
138



MÉDARD
154

MÉDARD STRETCHED
155



NOMAD
200

NOMAD MINIMAL
207

QBINI SURFACE BOX[2]
197

REKTOR
238

SEMIH
246

SMART SURFACE BOX[1]
306

SMART SURFACE TUBED[1]
312

CEILING & DESK

desk



STOVE
331



UNITED (ASY)
360

MÉDARD
161

VAEDER
366

(1) to be combined with Smart Cake / Smart Kup / Smart Lotis
(2) to be combined with 1x or 2x Qbini units

01

suspended

EXTRUDED
41

FLAT MOON
50

FLAT MOON ECLIPS
58

IZAR
67

KOMPAS & HOOLAHOOP
87



LOTIS TUBED
99

MARBUL
142

MINUDE SUSPENSION
167

PLACEBO
211

SMART BALL[1]
302

SMART TUBED SUSPENSION[1]
316

TULIP
355



UNITED
360



VAEDER
366

[1] to be combined with Smart Cake / Smart Kup / Smart Lotis

CEILING

recessed square

LOTIS SQUARE
128

MARCEL
148

MINI MULTIPLE
170

MINI MULTIPLE TRIMLESS
180

MULTIPLE
190

MULTIPLE TRIMLESS
194

QBINI
224

REKTOR
240

SLIDE
257

01

recessed round



BOLSTER
27



CHAPEAU
29

DOWNUT
31

DUELL
35

FLAT MOON
56



FLAT MOON ECLIPS
60

HOLLOW
64

K
70

LOTIS (ASY)
112

MARBUL
140

MÉDARD SEMI-RECESSED
152

MÉDARD STRETCHED SEMI-RECESSED
156

MÉDARD
158

MINUDE SEMI-RECESSED
165

PUPIL
221

SCOTTY
243



SHELLBY
251



SMART CAKE
260

SMART KUP
272

SMART LOTIS (ASY)
282

TETRIX
335

THIMBLE
348

WINK (ASY)
370

BOLSTER

Think roller skates and rock 'n roll. Bolster always brings a touch of 60s to a room. Choose the fully chromed version with mirror effect or tone things down with the matte black or white versions, also edged in chrome. Available as a foot, recessed and pendant variant. Highly adjustable (offering 359° rotation and 90° inclination), Bolster will create a festive atmosphere in the entire room.

more info? *supermodular.com/en/bolster*

Bolster foot GU10



1X QPAR 16-20 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
black struc	**11051632**

Bolster recessed 155 for LED GU10 AR111



1X LED AR111 (NOT INCL.) | GU10 | 15W

230V | IP20 | GWT 960° | 0.80KG

black struc	**11052232**

Bolster recessed 155 AR111 GE





1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

III | 12V | IP20 | GWT 960° | 0.90KG

black struc	**11050432**

CHAPEAU

Design — Couvreur-Devos

We take our hats off to this luminaire. Chapeau looks like Robin Hood's hat on the inside, hence the name. Chapeau's big innovation lies in the tilting system. When fully folded up in its shell, Chapeau is a downlighter, and you can see a glimpse of the rim of its bulb holder. However, the bulb holder can also be tilted to produce a clever wash effect on the walls. Available for fully recessed mounting or for recessed mounting with a rim, which creates a beautiful contrast on the ceiling. Crowned by a Good Design Award.

more info? *supermodular.com/en/chapeau*

Chapeau 206 LED GE



1X LED ARRAY INCL. 16.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

Friends of hue · III · 500mA · IP20 · GWT 960° · 1.90KG

	2700K / CRI90+
	25°
black struc	**11900132**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	940lm / 11W	**1290lm / 16.2W**

Chapeau trimless 222 LED GE



1X LED ARRAY INCL. 16.2W

! RECESSED RING INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

Friends of hue · III · 500mA · IP20 · GWT 960° · 2.10KG

	2700K / CRI90+
	25°
black struc	**11970132**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	940lm / 11W	**1290lm / 16.2W**

DOWNUT

This tantalising recessed luminaire was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist. Downut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the surrounding decor.

more info? *supermodular.com/en/downut*

Downut flange 292 TL5C GI



1X T16-R | 2GX13 | 22W

230V | IP20 | GWT 960° | 1.50KG

NOT DIMMABLE	
white struc	**11030709**
PUSHDIM	
white struc	**11037709**
DALI	
white struc	**11036709**

Downut 350 TL5C GI





1X T16-R | 2GX13 | 55W

Friends of hue | 230V | IP20 | GWT 960° | 3.20KG

NOT DIMMABLE	
white struc	**11030109**
1-10V	
white struc	**11035109**
DALI/PUSHDIM	
white struc	**11036109**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11030330 CONBOX 440X400X120X438

Downut flange 367 TL5C GI





1X T16-R | 2GX13 | 55W

Friends of hue | 230V | IP20 | GWT 960° | 3.20KG

NOT DIMMABLE	
white struc	**11030209**
1-10V	
white struc	**11035209**
DALI/PUSHDIM	
white struc	**11036209**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11030330 CONBOX 440X400X120X438

DUELL

SEE ALSO

WALL - P523



EXTERIOR - P580

DUELL

Duell has Modular L.I. written all over it. With its gentle curves, Duell gives every room a softer touch. The duo toned fixtures allow you to play with colour. For ceiling-mounted applications, we offer both a recessed version and a surface-mounted version. The recessed version has an attractive broad rim. Duell surface is available in a directional variant. The complete Duell range is available in LED and is perfect for accent lighting in a room.

more info? *supermodular.com/en/duell*

Duell surface 1x LED GI



1X LED ARRAY INCL. | 9.2W

CONNECTED > SEE GOODIES

NOT DIMMABLE	2700K / CRI90+	
	20°	40°
black struc - gold	11073032	11073232
white struc - champagne	11073009	11073209

1-10V/PUSHDIM	2700K / CRI90+	
	20°	40°
black struc - gold	11072932	11073132
white struc - champagne	11072909	11073109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

2700K / 20°	**592lm / 11W**

Duell surface 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

RESISTIVE DIMMABLE	
black struc - gold	11070732
white struc - champagne	11070709

Duell recessed 1x LED GE



1X LED ARRAY INCL. 9.2W

	2700K / CRI90+	
	20°	40°
white struc - champagne	11073839	11073739
white struc - gold	11073889	11073789

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

	350mA	**500mA**
2700K / 20°	460lm / 6.2W	**592lm / 9.2W**

Duell recessed 1x LED RG



1X LED ARRAY INCL. 9.2W

NOT DIMMABLE	2700K / CRI90+	
	20°	40°
white struc - champagne	11071439	-
white struc - gold	-	11071689

1-10V/PUSHDIM	2700K / CRI90+	
	20°	40°
white struc - champagne	11071339	11071539
white struc - gold	11071389	-

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

2700K / 20°	**592lm / 11W**

Duell recessed 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

III | 12V | IP20 | GWT 960° | 0.40KG

white struc - black	**11070429**

Duell recessed 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.60KG

RESISTIVE DIMMABLE	
white struc - black	**11070829**

Duell recessed 2x LED GE



2X LED ARRAY INCL. | 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.80KG

	2700K / CRI90+	
	20°	40°
white struc - black	**11074229**	**11074129**
white struc - champagne	-	**11074139**
white struc - gold	**11074289**	**11074189**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior) - values per lamp)

	350mA	**500mA**
2700K / 20°	460lm / 6.2W	**592lm / 9.2W**

Duell recessed 2x LED RG



2X LED ARRAY INCL. | 9.2W

Friends of hue | 230V | IP20 | GWT 960° | 0.80KG

NOT DIMMABLE	2700K / CRI90+	
	20°	40°
white struc - black	11072229	-
white struc - champagne	11072239	11072439
white struc - gold	11072289	-

1-10V/PUSHDIM	2700K / CRI90+	
	20°	40°
white struc - champagne	11072139	11072339
white struc - gold	-	11072389

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior) - values per lamp)

2700K / 20°	**592lm / 22W**

Duell recessed 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.45KG

white struc - black	11070529
white struc - champagne	11070539
white struc - gold	11070589

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

Duell recessed 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.60KG

RESISTIVE DIMMABLE	
white struc - black	11070929

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 – R38X80

EXTRUDED - ANODIZED CHAMPAGNE/ANODIZED CHAMPAGNE

EXTRUDED - ANODIZED BLACK/ANODIZED SILVER BRONZE

EXTRUDED 600MM - ANODIZED BRONZE/ANODIZED BRONZE

EXTRUDED - WHITE MATT/WHITE MATT

EXTRUDED

Design — Alain Gilles

Strong lines to bring vertical structure to your space, Extruded takes its own place. Its small looped hook at the tip peeks out subtly. The graceful lines that carve the outside of Extruded's tube never fail to capture your curiosity. All the way at the bottom, the conical lampshade offers a well-defined, flood beam of light, inviting intimate dialogue.

A story of light and lines

Watch Extruded tell a new story at every moment, thanks to the extrusions that catch light differently as the hours go by. The carefully designed ribs bring richness to the luminaire. Structure your space vertically with any of the 3 offered lengths or create a rhythm by playing with vertical lines. Or simply, let Extruded be. A graphic architectural element.

Vividly present & future-proof

Make Extruded's presence in a room even more pleasing by adding warm dim technology. Lower the brightness, and the colour of the light becomes warmer. This results in an instant magical glow, and cosy feeling. Think about different installation options as well. Semi-recessed or surface mounted, with or without integrated LED gear, which comes with different dimming technologies, or Casambi-integrated smart lighting.

Colours for statement

There's only one way to decide which of the several colours, or colour combinations will suit your space. You'll just have to discover yourself. Many rich anodised colours, matched in predefined colour schemes are making Extruded a tempting luminaire to play with. A thin, long, matte black power cable gives you freedom in deciding the height above your perfect, chosen spot for Extruded.

more info? *supermodular.com/en/extruded*

EXTRUDED - ANODIZED BLACK/ANODIZED BLACK

EXTRUDED - ANODIZED CHAMPAGNE/ANODIZED CHAMPAGNE

EXTRUDED - ANODIZED BRONZE/ANODIZED BLACK

EXTRUDED 300MM - ANODIZED BLACK/ANODIZED SILVER BRONZE

Extruded 300mm LED GE



1X LED ARRAY INCL. 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 500mA | IP20 | GWT 960° | 1.16KG

	2700K	3000K
	40°	40°
ano black - ano black	13520020	13520120
ano black - ano bronze	13520021	13520121
ano black - ano champagne	13520023	13520123
ano black - ano silver bronze	13520025	13520125
ano bronze - ano black	13520026	13520126
ano bronze - ano bronze	13520027	13520127
ano champagne - ano black	13520031	13520131
ano champagne - ano champagne	13520034	13520134
white matt - white matt	13520036	13520136

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

	350mA	**500mA**
2700K / 40°	549lm / 5.7W	**740lm / 8.5W**
3000K / 40°	561lm / 5.7W	**756lm / 8.5W**

WARM DIM

Extruded 300mm LED warm dim GE



1X LED ARRAY INCL. 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 350mA | IP20 | GWT 960° | 1.16KG

	1800K - 3000K
	45°
ano black - ano black	13520220
ano black - ano bronze	13520221
ano black - ano champagne	13520223
ano black - ano silver bronze	13520225
ano bronze - ano black	13520226
ano bronze - ano bronze	13520227
ano champagne - ano black	13520231
ano champagne - ano champagne	13520234
white matt - white matt	13520236

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

@3000K / 45°	**418lm / 6W**

INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
							
			TRAILING EDGE DIMMABLE WARM DIM		1-10V	DALI	CASAMBI
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536

REQUIRED PARTS

EXTRUDED - ANODIZED BLACK/ANODIZED BRONZE

EXTRUDED 600MM - ANODIZED BLACK/ANODIZED CHAMPAGNE

EXTRUDED 600MM - ANODIZED CHAMPAGNE/ANODIZED BLACK

Extruded 600mm LED GE



1X LED ARRAY INCL. 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 500mA | IP20 | GWT 960° | 1.79KG

	2700K	3000K
	40°	40°
ano black - ano black	13520320	13520420
ano black - ano bronze	13520321	13520421
ano black - ano champagne	13520323	13520423
ano black - ano silver bronze	13520325	13520425
ano bronze - ano black	13520326	13520426
ano bronze - ano bronze	13520327	13520427
ano champagne - ano black	13520331	13520431
ano champagne - ano champagne	13520334	13520434
white matt - white matt	13520336	13520436

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

	350mA	**500mA**
2700K / 40°	549lm / 5.7W	**740lm / 8.5W**
3000K / 40°	561lm / 5.7W	**756lm / 8.5W**

WARM DIM

Extruded 600mm LED warm dim GE



1X LED ARRAY INCL. 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 350mA | IP20 | GWT 960° | 1.79KG

	1800K - 3000K
	45°
ano black - ano black	13520520
ano black - ano bronze	13520521
ano black - ano champagne	13520523
ano black - ano silver bronze	13520525
ano bronze - ano black	13520526
ano bronze - ano bronze	13520527
ano champagne - ano black	13520531
ano champagne - ano champagne	13520534
white matt - white matt	13520536

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

@3000K / 45°	**418lm / 6W**

INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
							
			TRAILING EDGE DIMMABLE WARM DIM		1-10V	DALI	CASAMBI
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536

REQUIRED PARTS

EXTRUDED 600MM - WHITE MATT/WHITE MATT

EXTRUDED 900MM - ANODIZED BLACK/ANODIZED BLACK

Extruded 900mm LED GE



1X LED ARRAY INCL. 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 500mA | IP20 | GWT 960° | 2.37KG

	2700K	3000K
	40°	40°
ano black - ano black	13520620	13520720
ano black - ano bronze	13520621	13520721
ano black - ano champagne	13520623	13520723
ano black - ano silver bronze	13520625	13520725
ano bronze - ano black	13520626	13520726
ano bronze - ano bronze	13520627	13520727
ano champagne - ano black	13520631	13520731
ano champagne - ano champagne	13520634	13520734
white matt - white matt	13520636	13520736

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

	350mA	**500mA**
2700K / 40°	549lm / 5.7W	**740lm / 8.5W**
3000K / 40°	561lm / 5.7W	**756lm / 8.5W**

WARM DIM

Extruded 900mm LED warm dim GE



1X LED ARRAY INCL. 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

Friends of hue | 350mA | IP20 | GWT 960° | 2.37KG

	1800K - 3000K
	45°
ano black - ano black	13520820
ano black - ano bronze	13520821
ano black - ano champagne	13520823
ano black - ano silver bronze	13520825
ano bronze - ano black	13520826
ano bronze - ano bronze	13520827
ano champagne - ano black	13520831
ano champagne - ano champagne	13520834
white matt - white matt	13520836

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt - white matt)

@3000K / 45°	**418lm / 6W**

INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
							
			TRAILING EDGE DIMMABLE	WARM DIM	1-10V	DALI	CASAMBI
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536

REQUIRED PARTS

EXTRUDED 600MM - WHITE MATT/WHITE MATT
EXTRUDED SUSPENSION KIT SEMI-RECESSED GE

EXTRUDED 600MM - WHITE MATT/WHITE MATT
EXTRUDED SUSPENSION KIT SURFACE GE

EXTRUDED 600MM - WHITE MATT/WHITE MATT
EXTRUDED SUSPENSION KIT SURFACE GI

EXTRUDED - ANODIZED BLACK

Extruded suspension kit 2m semi-recessed GE



LUMINAIRE NOT INCL.

DRIVER > SEE DRIVER MATRIX

IP20 | GWT 960° | 0.16KG

black struc	13523032
white matt	13523036

Extruded suspension kit 2m surface GE



LUMINAIRE NOT INCL.

DRIVER > SEE DRIVER MATRIX

IP20 | GWT 960° | 0.16KG

black struc	13523132
white matt	13523136

Extruded suspension kit 2m surface GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED (*WARM DIM 350mA)

IP20 | GWT 960° | 0.77KG

TRAILING EDGE DIMMABLE		WARM DIM *
black struc	13523232	13523632
white matt	13523236	13523636

1-10V	
black struc	13523332
white matt	13523336

DALI	
black struc	13523432
white matt	13523436

CASAMBI	
black struc	13523532
white matt	13523536

FLAT MOON 650

FLAT MOON ECLIPS 650 SUSPENSION (TRIANGLE)

FLAT MOON

Contemporary architectural projects love a minimalist, slim lighting design. Modular L.I. offers a LED PCB solution for a homogeneous light surface.
In Flat moon, this solution creates a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments.

A piece of the night sky in your space

Bring the breathtaking subtlety of a lunar eclipse indoors, in the form of our Flat moon eclips lighting fixture. This enchanting ring-shaped luminaire distributes soft yet functional light. Its lumen output is lower than Flat moon's, while remaining powerful. As it illuminates without overwhelming, Flat moon eclips is also suitable for residential spaces.

more info? *supermodular.com/en/flat-moon*
supermodular.com/en/flat-moon-eclips

Flat moon 450 ceiling down LED GI



1X MED-POWER LED INCL. 25.9W

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290332	13290432	13290532
white struc	13290309	13290409	13290509

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290032	13290132	13290232
white struc	13290009	13290109	13290209

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289000	FLAT MOON PRISMATIC DIFFUSER 450/470
13289100	FLAT MOON ICE PRISMATIC DIFFUSER 450/470

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**2599lm / 29.4W**
3000K / 110°	**2546lm / 29.4W**
4000K / 110°	**2860lm / 29.4W**

Flat moon 450 suspension down LED GI



1X MED-POWER LED INCL. 25.9W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13309009	FLAT MOON 450 LED COVERPLATE WHITE STRUC
13309032	FLAT MOON 450 LED COVERPLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289000	FLAT MOON PRISMATIC DIFFUSER 450/470
13289100	FLAT MOON ICE PRISMATIC DIFFUSER 450/470

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300332	13300432	13300532
white struc	13300309	13300409	13300509

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300032	13300132	13300232
white struc	13300009	13300109	13300209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**2599lm / 29.4W**
3000K / 110°	**2545lm / 29.4W**
4000K / 110°	**2860lm / 29.4W**

REQUIRED PARTS

Flat moon 450 suspension up/down LED GI



1X MED-POWER LED INCL. | 40W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289000	FLAT MOON PRISMATIC DIFFUSER 450/470
13289100	FLAT MOON ICE PRISMATIC DIFFUSER 450/470

Friends of hue | 230V | IP20 | GWT 650° | 4.90KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13300932**	**13301032**	**13301132**
white struc	**13300909**	**13301009**	**13301109**

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13300632**	**13300732**	**13300832**
white struc	**13300609**	**13300709**	**13300809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**3720lm / 45.4W**
3000K / 110°	**3573lm / 45.4W**
4000K / 110°	**4102lm / 45.4W**

Flat moon 650 ceiling down LED GI



1X MED-POWER LED INCL. | 62W

230V | IP20 | GWT 650° | 10.70KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13292332	13292432	13292532
white struc	13292309	13292409	13292509

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289200	FLAT MOON PRISMATIC DIFFUSER 650/670
13289300	FLAT MOON ICE PRISMATIC DIFFUSER 650/670

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**6430lm / 70W**
3000K / 110°	**6232lm / 70W**
4000K / 110°	**7077lm / 70W**

Flat moon 650 suspension down LED GI



1X MED-POWER LED INCL. | 62W

! SUSPENSION KIT NOT INCLUDED

230V | IP20 | GWT 650° | 10.10KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13304332	13304432	13304532
white struc	13304309	13304409	13304509

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13309109	FLAT MOON 650 LED COVERPLATE WHITE STRUC
13309132	FLAT MOON 650 LED COVERPLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289200	FLAT MOON PRISMATIC DIFFUSER 650/670
13289300	FLAT MOON ICE PRISMATIC DIFFUSER 650/670

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**6430lm / 70W**
3000K / 110°	**6232lm / 70W**
4000K / 110°	**7077lm / 70W**

REQUIRED PARTS

Flat moon 650 suspension up/down LED GI



1X MED-POWER LED INCL. | 85W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289200	FLAT MOON PRISMATIC DIFFUSER 650/670
13289300	FLAT MOON ICE PRISMATIC DIFFUSER 650/670

Friends of hue | 230V | IP20 | GWT 650° | 10.50KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13304932**	**13305032**	**13305132**
white struc	**13304909**	**13305009**	**13305109**

LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	**8426lm / 98W**
3000K / 110°	**8061lm / 98W**
4000K / 110°	**9288lm / 98W**

Flat moon 950 ceiling down LED GI



1X MED-POWER LED INCL. | 129W

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13294332	13294432	13294532
white struc	13294309	13294409	13294509

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289400	FLAT MOON PRISMATIC DIFFUSER 950/970
13289500	FLAT MOON ICE PRISMATIC DIFFUSER 950/970

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**13988lm / 138W**
3000K / 110°	**13559lm / 138W**
4000K / 110°	**15397lm / 138W**

Flat moon 950 suspension down LED GI



1X MED-POWER LED INCL. | 129W

! SUSPENSION KIT NOT INCLUDED

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13305532	13305632	13305732
white struc	13305509	13305609	13305709

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13309209	FLAT MOON 950 LED COVERPLATE WHITE STRUC
13309232	FLAT MOON 950 LED COVERPLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289400	FLAT MOON PRISMATIC DIFFUSER 950/970
13289500	FLAT MOON ICE PRISMATIC DIFFUSER 950/970

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**13988lm / 138W**
3000K / 110°	**13559lm / 138W**
4000K / 110°	**15397lm / 138W**

REQUIRED PARTS

Flat moon 950 suspension up/down LED GI



1X MED-POWER LED INCL. | 175W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

OPTICAL ACCESSORIES

13289400	FLAT MOON PRISMATIC DIFFUSER 950/970
13289500	FLAT MOON ICE PRISMATIC DIFFUSER 950/970

230V | IP20 | GWT 650° | 17.00KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13308132**	**13308232**	**13308332**
white struc	**13308109**	**13308209**	**13308309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**18605lm / 192W**
3000K / 110°	**17794lm / 192W**
4000K / 110°	**20509lm / 192W**

Flat moon 470 recessed LED GI



1X MED-POWER LED INCL. | 25.9W

Friends of hue | 230V | IP20 | GWT 650° | 4.45KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13280332**	**13280432**	**13280532**
white struc	**13280309**	**13280409**	**13280509**

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13280032**	**13280132**	**13280232**
white struc	**13280009**	**13280109**	**13280209**

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289000	FLAT MOON PRISMATIC DIFFUSER 450/470
13289100	FLAT MOON ICE PRISMATIC DIFFUSER 450/470

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**2599lm / 30.5W**
3000K / 110°	**2545lm / 30.5W**
4000K / 110°	**2860lm / 30.5W**

Flat moon 670 recessed LED GI



1X MED-POWER LED INCL. | 62W

230V | IP20 | GWT 650° | 10.10KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13282332**	**13282432**	**13282532**
white struc	**13282309**	**13282409**	**13282509**

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289200	FLAT MOON PRISMATIC DIFFUSER 650/670
13289300	FLAT MOON ICE PRISMATIC DIFFUSER 650/670

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**6430lm / 70W**
3000K / 110°	**6232lm / 70W**
4000K / 110°	**7077lm / 70W**

Flat moon 970 recessed LED GI



1X MED-POWER LED INCL. | 129W

230V | IP20 | GWT 650° | 16.50KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13283332**	**13283432**	**13283532**
white struc	**13283309**	**13283409**	**13283509**

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

13289400	FLAT MOON PRISMATIC DIFFUSER 950/970
13289500	FLAT MOON ICE PRISMATIC DIFFUSER 950/970

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 110°	**13988lm / 138W**
3000K / 110°	**13559lm / 138W**
4000K / 110°	**15397lm / 138W**

Flat moon eclips 650 ceiling down LED GI



LED MODULE INCL. 36W

CONNECTED > SEE GOODIES

1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	-	-	**13362232**
white struc	-	-	-

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13362332**	**13362432**	**13362532**
white struc	**13362309**	**13362409**	**13362509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)
(1) DALI/PUSHDIM
(2) 1-10V

2700K	**2709lm / (1)43W / (2)44W**
3000K	**2625lm / (1)43W / (2)44W**
4000K	**2981lm / (1)43W / (2)44W**

Flat moon eclips 650 suspension down LED GI



LED MODULE INCL. 36W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13372332**	**13372432**	**13372532**
white struc	**13372309**	**13372409**	**13372509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**2709lm / 43W**
3000K	**2625lm / 43W**
4000K	**2981lm / 43W**

REQUIRED PARTS

Flat moon eclips 950 ceiling down LED GI



LED MODULE INCL. 67W

CONNECTED > SEE GOODIES

230V | IP20 | GWT 650° | 17.20KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13363332	13363432	13363532
white struc	13363309	13363409	13363509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**5624lm / 77W**
3000K	**5451lm / 77W**
4000K	**6191lm / 77W**

Flat moon eclips 950 suspension down LED GI



LED MODULE INCL. 67W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

230V | IP20 | GWT 650° | 16.70KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13373332	13373432	13373532
white struc	13373309	13373409	13373509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**5624lm / 77W**
3000K	**5451lm / 77W**
4000K	**6191lm / 77W**

Flat moon eclips 670 recessed LED GI



LED MODULE INCL. | 36W

CONNECTED > SEE GOODIES

230V | IP20 | GWT 650° | 10.70KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13382332**	**13382432**	**13382532**
white struc	**13382309**	**13382409**	**13382509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**2709lm / 43W**
3000K	**2625lm / 43W**
4000K	**2981lm / 43W**

Flat moon eclips 970 recessed LED GI



LED MODULE INCL. 67W

230V IP20 GWT 650° 16.70KG

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13383332	13383432	13383532
white struc	13383309	13383409	13383509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**5624lm / 77W**
3000K	**5451lm / 77W**
4000K	**6191lm / 77W**

CONNECTED > SEE GOODIES

HOLLOW 115 TRIMLESS

HOLLOW 125

HOLLOW 115 TRIMLESS

HOLLOW

Design — James van Vossel

For designer James van Vossel, it was time to rethink pure, simple forms. That's when the tube came in. Lit or dark, open or closed. Hollow is the luminaire that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality. It's the light companion you were waiting for.

Design that pops

One design, invisible and visible. It can hide, be one with the environment, showing nothing but glowing cavities. It can stick out playfully, casting light in an ocean of space. Hollow is a surprise and won't be revealed until you touch.

Present, not present

Rediscover light with Hollow's marvellous, unusual adjustability. Hollow's smooth rotation system slides open to let you choose a 90°, 60° or 45° angle, or anything else in between. Powerful beam, soft glow, discreet light.

Colours to caress

Experiment with colours and use the cup's inner glow as an additional light source. Gold for a warm, cosy mood maker. White, for a decisive indirect light effect. Black, for a stronger presence, but with softer, indirect light.

more info? *supermodular.com/en/hollow*

Hollow 125 LED GE



1X LED ARRAY INCL. 8.5W

	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	**12171056**	**12171156**
black struc - gold	**12171032**	**12171132**
black struc - white struc	**12171047**	**12171147**
gold - gold	**12171087**	**12171187**
white struc - white struc	**12171009**	**12171109**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE RIGHT PAGE

10889830	CONBOX 192X190X130X256
12292830	GYPSUM FIBREBOARD 190X190

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

	350mA	**500mA**
2700K / 30°	346lm / 5.7W	**467lm / 8.5W**
3000K / 30°	353lm / 5.7W	**476lm / 8.5W**

REQUIRED PARTS

Hollow 115 trimless LED GE



1X LED ARRAY INCL. | 8.5W

! MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

10889830	CONBOX 192X190X130X256
14204030	RECESSED RING Ø146
12292830	GYPSUM FIBREBOARD 190X190

Friends of hue | 500mA | IP20 | GWT 960° | 0.27KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	**12170056**	**12170156**
black struc - gold	**12170032**	**12170132**
black struc - white struc	**12170047**	**12170147**
gold - gold	**12170087**	**12170187**
white struc - white struc	**12170009**	**12170109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

	350mA	**500mA**
2700K / 30°	346lm / 5.7W	**467lm / 8.5W**
3000K / 30°	353lm / 5.7W	**476lm / 8.5W**

INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

HOLLOW 115	**PLASTERED** FINISH
	HOLLOW 115 TRIMLESS
	14204030 - RECESSED RING Ø146 

INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

HOLLOW 115 / 125	**10889830** CONBOX 190X192X130X256 	+	**PLASTERED** FINISH	
			HOLLOW 115 TRIMLESS	HOLLOW 125
			12292830 GYPSUM FIBREBOARD 190X190  + **14204030 -** RECESSED RING Ø146 	**12292830** GYPSUM FIBREBOARD 190X190 

IZAR

Design — Gerd Couckhuyt

Izar is based on a futuristic puzzle system whose basic shape - a three-pointed, rounded star - can be used either alone or in combination with other Izars. However you use it, it's impossible not to use Izar creatively in a space. For wall or ceiling mounting or use with the suspension set.

more info? *supermodular.com/en/izar*

Izar LED GI



1X LED INCL. | 30W

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11064009	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/WHSTR
11064058	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/BLSTR
11064059	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/ALU
11064109	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/WHSTR
11064158	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/BLSTR
11064159	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/ALU
11340409	SUSPENSION SET 4M (3 CABLES) - WHITE STRUC (NO POWER FEED INCL.)

ELECTRICAL

11340738	IZAR ELECTRICAL CONNECTION WHITE STRUC

Friends of hue | 230V | IP20 | GWT 960° | 4.40KG

NOT DIMMABLE	3000K / CRI80
	115°
shiny white	**11340801**

1-10V	3000K / CRI80
	115°
shiny white	**11345801**

DALI/PUSHDIM	3000K / CRI80
	115°
shiny white	**11346801**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(shiny white)

3000K	**1447lm / 32W**

K72

K77 ADJUSTABLE

SEE ALSO

CEILING - P79

CEILING - P219

K

Our iconic K family set the foundation for many architectural downlighters. The classic, beautiful brightness of this spotlight portfolio makes K an ideal candidate for residential, retail and hospitality environments.

Decorative simplicity

Every project needs a basic spotlight for general lighting. K is our suggestion for those who like to keep things simple. Available in different diameters, a flat or sloping edge and in white structure, black structure or donkey grey structure, K integrates easily into any room. Choose the directional model for a greater interplay of light. Available with halogen and LED.

Combining contradictions

Bring an extra touch of fun to a K family picnic. Create an installation of 2x, 3x, or 4x recessed K72 downlighters combined with playful Pupils sticking out of the ceiling. By pairing Pupil with spots, you can create a new fixture with both fixed and adjustable light sources and illuminate special places in high-end residences, hospitality environments and small boutiques

more info? *supermodular.com/en/k*
supermodular.com/en/k72
supermodular.com/en/k77-adjustable
supermodular.com/en/k120
supermodular.com/en/k-set

K72 IP55 LED GE



1X LED ARRAY INCL. 9.2W

	2700K / CRI90+		
	15°	25°	40°
black struc	14040032	14040132	14040232
donkey grey struc	14040071	14040171	14040271
white struc	14040009	14040109	14040209
	3000K / CRI90+		
	15°	25°	40°
black struc	14040332	14040432	14040532
donkey grey struc	14040371	14040471	14040571
white struc	14040309	14040409	14040509
	4000K / CRI90+		
	15°	25°	40°
black struc	14040632	14040732	14040832
donkey grey struc	14040671	14040771	14040871
white struc	14040609	14040709	14040809

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

INSTALLATION ACCESSORIES

10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	511lm / 6.2W	**687lm / 9.2W**
3000K / 25°	532lm / 6.2W	**714lm / 9.2W**
4000K / 25°	582lm / 6.2W	**731lm / 9.2W**

K72 IP55 LED RG



1X LED ARRAY INCL. 9.2W

TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	14041032	14041132	14041232
donkey grey struc	14041071	14041171	14041271
white struc	14041009	14041109	14041209
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	14041332	14041432	14041532
donkey grey struc	14041371	14041471	14041571
white struc	14041309	14041409	14041509
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	14041632	14041732	14041832
donkey grey struc	14041671	14041771	14041871
white struc	14041609	14041709	14041809

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

INSTALLATION ACCESSORIES

10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**687lm / 12W**
3000K / 25°	**714lm / 12W**
4000K / 25°	**731lm / 12W**

K-SET 72

14042032	K-SET 72 1X BLACK STRUC
14042071	K-SET 72 1X DONKEY GREY STRUC
14042009	K-SET 72 1X WHITE STRUC
14042132	K-SET 72 2X BLACK STRUC
14042171	K-SET 72 2X DONKEY GREY STRUC
14042109	K-SET 72 2X WHITE STRUC
14042232	K-SET 72 3X BLACK STRUC
14042271	K-SET 72 3X DONKEY GREY STRUC
14042209	K-SET 72 3X WHITE STRUC
14042332	K-SET 72 4SQX BLACK STRUC
14042371	K-SET 72 4SQX DONKEY GREY STRUC
14042309	K-SET 72 4SQX WHITE STRUC

K77 adjustable LED GE



1X LED ARRAY INCL. 9.2W

Friends of hue | 500mA | IP20 | GWT 960° | 0.21KG

	2700K / CRI90+		
	15°	25°	40°
black struc	14050032	14050132	14050232
donkey grey struc	14050071	14050171	14050271
white struc	14050009	14050109	14050209
	3000K / CRI90+		
	15°	25°	40°
black struc	14050332	14050432	14050532
donkey grey struc	14050371	14050471	14050571
white struc	14050309	14050409	14050509
	4000K / CRI90+		
	15°	25°	40°
black struc	14050632	14050732	14050832
donkey grey struc	14050671	14050771	14050871
white struc	14050609	14050709	14050809

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	511lm / 6.2W	**687lm / 9.2W**
3000K / 25°	532lm / 6.2W	**714lm / 9.2W**
4000K / 25°	582lm / 6.2W	**731lm / 9.2W**

K77 adjustable LED RG



1X LED ARRAY INCL. 9.2W

230V | R,C | IP20 | GWT 960° | 0.31KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	14051032	14051132	14051232
donkey grey struc	14051071	14051171	14051271
white struc	14051009	14051109	14051209
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	14051332	14051432	14051532
donkey grey struc	14051371	14051471	14051571
white struc	14051309	14051409	14051509
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	14051632	14051732	14051832
donkey grey struc	14051671	14051771	14051871
white struc	14051609	14051709	14051809

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**687lm / 12W**
3000K / 25°	**714lm / 12W**
4000K / 25°	**731lm / 12W**

K-SET 77

14052032	K-SET 77 1X BLACK STRUC	**14052232**	K-SET 77 3X BLACK STRUC
14052071	K-SET 77 1X DONKEY GREY STRUC	**14052271**	K-SET 77 3X DONKEY GREY STRUC
14052009	K-SET 77 1X WHITE STRUC	**14052209**	K-SET 77 3X WHITE STRUC
14052132	K-SET 77 2X BLACK STRUC	**14052332**	K-SET 77 4SQX BLACK STRUC
14052171	K-SET 77 2X DONKEY GREY STRUC	**14052371**	K-SET 77 4SQX DONKEY GREY STRUC
14052109	K-SET 77 2X WHITE STRUC	**14052309**	K-SET 77 4SQX WHITE STRUC

K120 ADJUSTABLE

K120 ADJUSTABLE

K120 adjustable LED GE



1X LED ARRAY INCL. | 17.2W

	2700K / CRI90+		
	15°	25°	40°
black struc	13340032	13340132	13340232
donkey grey struc	13340071	13340171	13340271
white struc	13340009	13340109	13340209
	3000K / CRI90+		
	15°	25°	40°
black struc	13341032	13341132	13341232
donkey grey struc	13341071	13341171	13341271
white struc	13341009	13341109	13341209
	4000K / CRI90+		
	15°	25°	40°
black struc	13342032	13342132	13342232
donkey grey struc	13342071	13342171	13342271
white struc	13342009	13342109	13342209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216903	SPREADLENS Ø80
10212802	HONEYCOMB Ø80 BLACK
10217002	CROSS BLADE Ø80 BLACK

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1238lm / 11.7W	**1679lm / 17.2W**	2198lm / 25W
3000K / 25°	1277lm / 11.7W	**1732lm / 17.2W**	2276lm / 25W
4000K / 25°	1380lm / 11.7W	**1872lm / 17.2W**	2460lm / 25W

K120 ADJUSTABLE WITH SPREAD LENS

K120 ADJUSTABLE WITH HONEYCOMB

K120 ADJUSTABLE WITH CROSSBLADE

K-0 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.16KG

RESISTIVE DIMMABLE	
alu	**10274805**
black	**10274802**
white struc	**10274801**

K-0 80 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

III | 12V | IP20 | GWT 960° | 0.09KG

alu	**10270005**
black	**10270002**
white struc	**10270001**

K-1 89 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.26KG

RESISTIVE DIMMABLE	
alu	10274905
black	10274902
white struc	10274901

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

K-1 89 MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.12KG

alu	10270105
black	10270102
white struc	10270101

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

K-2 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.08KG

RESISTIVE DIMMABLE	
alu	**10275205**
black	**10275202**
white struc	**10275209**

K-2 80 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

III | 12V | IP20 | GWT 960° | 0.08KG

alu	**10270205**
black	**10270202**
white struc	**10270201**

K-3 89 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.13KG

RESISTIVE DIMMABLE	
alu	**10275305**
black	**10275302**
white struc	**10275309**

K-3 89 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL ACCESSORIES

10280102	BL RING Ø50 HIGH BLACK

III | 12V | IP20 | GWT 960° | 0.11KG

alu	**10270305**
black	**10270302**
white struc	**10270301**

K-SET 72
K72

K-SET 77
K77

SEE ALSO

CEILING - P69

CEILING - P219

K-SET

Our iconic K family set the foundation for many architectural downlighters. The classic, beautiful brightness of this spotlight portfolio makes K an ideal candidate for residential, retail and hospitality environments. To give designers even more options for this already popular design, we added a mask accessory to the party. Rolling on with flair, K-set is the fashion plate of ceilings.

K's Choice...s

Made to cuddle K72 and K77 spots, K-set's simple, square or rectangular shape is easy to like. Available in units of 1x, 2x, 3x and 4x. All masks are available in white, black and donkey grey structure, opening up playful options for designers.

Application made easy

K-set offers the possibility of a recessed application for ceilings in new renovation projects. The plates are provided with torsion springs, making it a better installation in acoustic structures. And in case of applications with 2x, 3x, 4SQx, K-set makes installation easier by requiring 1 hole instead of many small ones. K-set 72's IP55 rating even allows it to light up a high-end bathroom or wellness area.

Combining contradictions

Bring an extra touch of fun to a K family picnic. Create an installation of 2x, 3x, or 4x recessed K72 downlighters combined with playful Pupils sticking out of the ceiling.

more info? *supermodular.com/en/k-set*

K-set 72 1x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL

0.22KG

black struc	**14042032**
donkey grey struc	**14042071**
white struc	**14042009**

K-set 72 2x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL

0.34KG

black struc	**14042132**
donkey grey struc	**14042171**
white struc	**14042109**

K-set 72 3x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL

0.46KG

black struc	14042232
donkey grey struc	14042271
white struc	14042209

K-set 72 4SQx





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL

0.54KG

black struc	14042332
donkey grey struc	14042371
white struc	14042309

K-set 77 1x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77

0.20KG

black struc	**14052032**
donkey grey struc	**14052071**
white struc	**14052009**

K-set 77 2x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77

0.30KG

black struc	**14052132**
donkey grey struc	**14052171**
white struc	**14052109**

K-set 77 3x





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77

0.41KG

black struc	14052232
donkey grey struc	14052271
white struc	14052209

K-set 77 4SQx





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77

0.47KG

black struc	14052332
donkey grey struc	14052371
white struc	14052309

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO BEANIE
KOMPAS CEILING BASE

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO BEANIE
KOMPAS CEILING BASE & HOOLAHOOP

KOMPAS CEILING BASE & HOOLAHOOP

KOMPAS
& HOOLAHOOP

Design — Jeffrey Huyghe

Kompas is an answer many interior professionals have been looking for. Many lights for the whole room, on just one power source. Our attractive circles invite your imagination to compose a unique chandelier. You'll be hard-pressed to choose which pendants to use in this party of light!

Create your chandelier with Kompas

Kompas is a ceiling base made to give you a ring of possibilities. Use its connection points to add pendants. Keep it subtle with just a few or choose a combination of architectural lights - dare we say up to 12? Position them how you prefer, around the edge of the base. The result will be a truly unique and playful chandelier.

Hoolahoop will expand your ideas

Make your chandelier even more expressive by adding a ring around Kompas. Hoolahoop shows an impressive volume and helps you extend the reach of your luminaires. This gives you the option of expanding your circle of light by having the different light sources hanging at greater intervals and at different heights.

Play with light and colours

A perfect solution for spaces with limited electrical points. All you need is one connection point and you can choose whether you want it with or without integrated dimmable LED driver. Our circles are available in white or black structure, and you can add a rich splash of colours with any of the pendant lights that fit on Kompas.

more info? *supermodular.com/en/kompas*

KOMPAS CEILING BASE

Kompas ceiling base ø340 GI



LUMINAIRE NOT INCL.

! MUST BE USED WITH:
MARBUL SUSPENDED FOR KOMPAS > SEE PAGES 88-91
MINUDE SUSPENDED FOR KOMPAS > SEE PAGES 92-93
PLACEBO DOWN/UP FOR KOMPAS > SEE PAGES 94-99
SMART BALL SUSPENDED FOR KOMPAS > SEE PAGES 100-101
SMART TUBED SUSPENDED FOR KOMPAS > SEE PAGES 102-105
TULIP BLOOM/BLOSSOM FOR KOMPAS > SEE PAGES 106-107

DECORATIVE ACCESSORIES



13572009	HOOLAHOOP Ø1000 WHITE STRUC
13572032	HOOLAHOOP Ø1000 BLACK STRUC

Friends of hue | 230V | IP20 | GWT 960° | 3.10KG

TRAILING EDGE DIMMABLE	350mA		500mA	
	30W	60W	30W	60W
black struc	**13570832**	**13570032**	**13571132**	**13570332**
white struc	**13570809**	**13570009**	**13571109**	**13570309**

1-10V	350mA		500mA	
	50W	100W	50W	100W
black struc	**13570932**	**13570132**	**13571232**	**13570432**
white struc	**13570909**	**13570109**	**13571209**	**13570409**

DALI	350mA		500mA	
	50W	100W	50W	100W
black struc	**13571032**	**13570232**	**13571332**	**13570532**
white struc	**13571009**	**13570209**	**13571309**	**13570509**

CASAMBI	350mA		500mA	
	50W	100W	50W	100W
black struc	**13571632**	**13571432**	**13571732**	**13571532**
white struc	**13571609**	**13571409**	**13571709**	**13571509**

Kompas ceiling base ø340 GE



LUMINAIRE NOT INCL. | MAX. 12X 35W

! MUST BE USED WITH:
MARBUL SUSPENDED FOR KOMPAS > SEE PAGES 88-91
MINUDE SUSPENDED FOR KOMPAS > SEE PAGES 92-93
PLACEBO DOWN/UP FOR KOMPAS > SEE PAGES 94-99
SMART BALL SUSPENDED FOR KOMPAS > SEE PAGES 100-101
SMART TUBED SUSPENDED FOR KOMPAS > SEE PAGES 102-105
TULIP BLOOM/BLOSSOM FOR KOMPAS > SEE PAGES 106-107

DECORATIVE ACCESSORIES

13572009	HOOLAHOOP Ø1000 WHITE STRUC
13572032	HOOLAHOOP Ø1000 BLACK STRUC

Friends of hue | 230V | IP20 | GWT 960° | 2.48KG

black struc	**13570632**
white struc	**13570609**

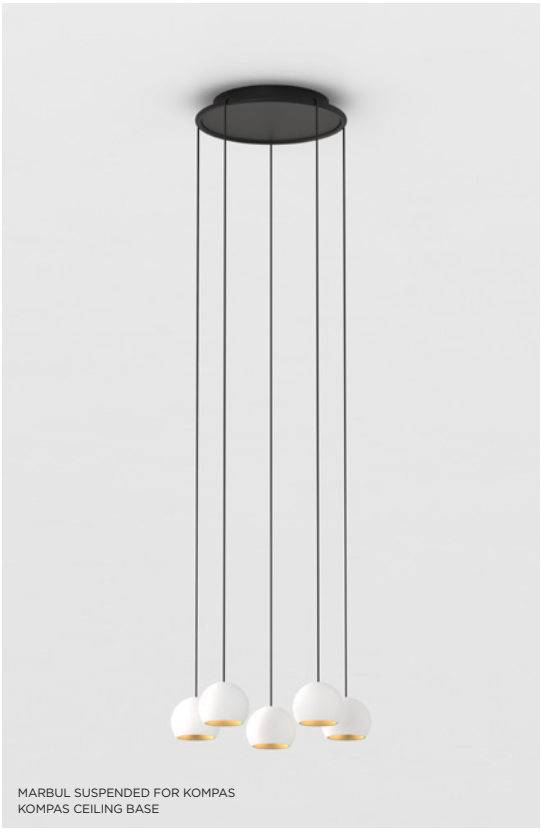

MARBUL SUSPENDED FOR KOMPAS
KOMPAS CEILING BASE

MARBUL SUSPENDED ADJUSTABLE FOR KOMPAS
KOMPAS CEILING BASE

MARBUL SUSPENDED ADJUSTABLE FOR KOMPAS
KOMPAS CEILING BASE & HOOLAHOOP

Marbul suspended LED for Kompas GE



1X LED ARRAY INCL. 8.9W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

III | 500mA | IP20 | GWT 960° | 0.87KG | ▲

	2700K / CRI90+	3000K / CRI90+
black struc	**14232632**	**14232732**
white struc	**14232609**	**14232709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25° alu	**703lm / 9.3W**	964lm / 13.8W
3000K / 25° alu	**748lm / 9.3W**	1026lm / 13.8W

WARM DIM

Marbul suspended LED warm dim for Kompas GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

III | 350mA | IP20 | GWT 960° | 0.87KG | ▲

	1800K - 3000K / CRI90+
black struc	**14232832**
white struc	**14232809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 12W**

REQUIRED PARTS

Marbul suspended adjustable LED for Kompas GE



1X LED ARRAY INCL. | 8.9W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

III | 500mA | IP20 | GWT 960° | 0.83KG | ▲

	2700K / CRI90+	3000K / CRI90+
black struc	**13481632**	**13481732**
white struc	**13481609**	**13481709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25° alu	**703lm / 9.3W**	964lm / 13.8W
3000K / 25° alu	**748lm / 9.3W**	1026lm / 13.8W

WARM DIM

Marbul suspended adjustable LED warm dim for Kompas GE



1X LED ARRAY INCL. | 12W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

III | 350mA | IP20 | GWT 960° | 0.83KG | ▲

	1800K - 3000K / CRI90+
black struc	**13481832**
white struc	**13481809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 12W**

REQUIRED PARTS

MINUDE SUSPENDED FOR KOMPAS
KOMPAS CEILING BASE & HOOLAHOOP

MINUDE SUSPENDED FOR KOMPAS
KOMPAS CEILING BASE

Minude 45 suspended LED for Kompas GE



1X LED ARRAY INCL. | 8.5W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)

KOMPAS CEILING BASE > SEE PAGE 87

500mA | IP20 | GWT 960° | 0.28KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	**11465281**	**11465381**
ano bronze	**11465282**	**11465382**
ano champagne	**11465241**	**11465341**
ano silver bronze	**11465284**	**11465384**
black struc	**11465232**	**11465332**
white struc	**11465209**	**11465309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	498lm / 5.6W	**686lm / 8.1W**
3000K / 30°	498lm / 5.6W	**686lm / 8.1W**

REQUIRED PARTS

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS TUBE DOWN 130MM
PLACEBO SOMBRERO
KOMPAS CEILING BASE

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO BEANIE
KOMPAS CEILING BASE

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO DOULI
KOMPAS CEILING BASE & HOOLAHOOP

Placebo down LED for Kompas GE



1X LED ARRAY INCL. 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! CAN BE COMBINED WITH PLACEBO SHADES
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

PLACEBO SHADES > SEE PAGE 96

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

III | 350mA | IP20 | GWT 650° | 0.50KG | ▲

	2700K / CRI90+	3000K / CRI90+
ano black	13582003	13582103
ano bronze	13582082	13582182
ano champagne	13582041	13582141
ano silver bronze	13582084	13582184
black struc	13582032	13582132
white struc	13582009	13582109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 6.3W**
3000K	**625lm / 6.3W**

WARM DIM

Placebo down LED warm dim for Kompas GE



1X LED ARRAY INCL. 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! CAN BE COMBINED WITH PLACEBO SHADES
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

PLACEBO SHADES > SEE PAGE 96

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

III | 350mA | IP20 | GWT 650° | 0.50KG | ▲

	1800K - 3000K / CRI90+
ano black	13582503
ano bronze	13582582
ano champagne	13582541
ano silver bronze	13582584
black struc	13582532
white struc	13582509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 7.4W**

REQUIRED PARTS

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø90/Ø155MM
KOMPAS CEILING BASE & HOOLAHOOP

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
KOMPAS CEILING BASE & HOOLAHOOP

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
KOMPAS CEILING BASE

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO DOULI
KOMPAS CEILING BASE

PLACEBO DOWN FOR KOMPAS
PLACEBO GLASS BALL DOWN Ø155MM
PLACEBO DOULI

Placebo up LED for Kompas GE



1X LED ARRAY INCL. 6.3W

III | 350mA | IP20 | GWT 650° | 0.50KG | ▲

	2700K / CRI90+	3000K / CRI90+
ano black	13582203	13582303
ano bronze	13582282	13582382
ano champagne	13582241	13582341
ano silver bronze	13582284	13582384
black struc	13582232	13582332
white struc	13582209	13582309

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! CAN BE COMBINED WITH PLACEBO SHADES
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

PLACEBO SHADES > SEE BELOW

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 6.3W**
3000K	**625lm / 6.3W**

PLACEBO SHADES







BEANIE				DOULI				SOMBRERO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	**12628083**	**12628018**	**12628017**	**12629038**	**12629083**	**12629018**	**12629017**	**12627038**	**12627083**	**12627018**	**12627017**

WARM DIM

Placebo up LED warm dim for Kompas GE



1X LED ARRAY INCL. | 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED); LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! CAN BE COMBINED WITH PLACEBO SHADES
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

PLACEBO SHADES > SEE LEFT PAGE

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

III | 350mA | IP20 | GWT 650° | 0.50KG

	1800K - 3000K / CRI90+
ano black	**13582403**
ano bronze	**13582482**
ano champagne	**13582441**
ano silver bronze	**13582484**
black struc	**13582432**
white struc	**13582409**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 9W**

REQUIRED PARTS

SMART BALL SUSPENDED 82 FOR KOMPAS
SMART LOTIS 82
KOMPAS CEILING BASE

SMART BALL SUSPENDED 115 FOR KOMPAS
SMART CAKE 115
KOMPAS CEILING BASE

SMART BALL SUSPENDED 82 FOR KOMPAS
SMART KUP 82
KOMPAS CEILING BASE & HOOLAHOOP

Smart ball suspended 82 for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 82
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 0.63KG | ▲

black struc	**11570532**
white struc	**11570509**

Smart ball suspended 115 for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 115
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 0.94KG | ▲

black struc	**11571532**
white struc	**11571509**

REQUIRED PARTS

SMART TUBED SUSPENDED 48 FOR KOMPAS
SMART CAKE 48
KOMPAS CEILING BASE

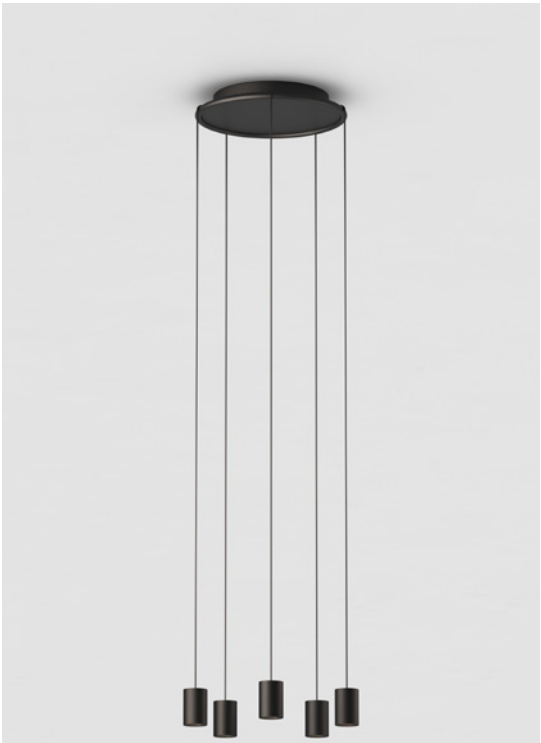

SMART TUBED SUSPENDED 48 FOR KOMPAS
SMART LOTIS 48
KOMPAS CEILING BASE

SMART TUBED SUSPENDED 82 X-LARGE FOR KOMPAS
SMART KUP 82
KOMPAS CEILING BASE & HOOLAHOOP

Smart tubed suspended 48 1x LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 48

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 0.22KG | ▲

black struc	**12903232**
white struc	**12903209**

Smart tubed suspended 82 large LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 82
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 0.82KG | ▲

black struc	**12843532**
white struc	**12843509**

Smart tubed suspended 82 X-large LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 82
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 1.30KG | ▲

black struc	**12843632**
white struc	**12843609**

REQUIRED PARTS

SMART TUBED SUSPENDED 115 FOR KOMPAS
SMART CAKE 115
KOMPAS CEILING BASE & HOOLAHOOP

Smart tubed suspended 115 LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)
! MUST BE COMBINED WITH SMART 115
! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

SMART COMBINATIONS > SEE PAGES 320-329

III | IP20 | GWT 960° | 1.11KG | ▲

black struc	**13141632**
white struc	**13141609**

TULIP BLOSSOM FOR KOMPAS
KOMPAS CEILING BASE

TULIP BLOSSOM/BLOOM FOR KOMPAS
KOMPAS CEILING BASE & HOOLAHOOP

TULIP BLOSSOM/BLOOM FOR KOMPAS
KOMPAS CEILING BASE & HOOLAHOOP

Tulip bloom for Kompas E27



LAMP EXCL. | E27 | MAX. 35W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)

CONNECTED > SEE GOODIES

KOMPAS CEILING BASE > SEE PAGE 87

Friends of hue | 230V | IP20 | GWT 960° | 0.97KG

black struc	**12663032**
black struc - gold	**12663091**
white struc	**12663009**
white struc - gold	**12663089**

Tulip blossom for Kompas E27



LAMP EXCL. | E27 | MAX. 35W

! MUST BE COMBINED WITH KOMPAS CEILING BASE
(SEE MATRIX PAGES 108-109)

CONNECTED > SEE GOODIES

KOMPAS CEILING BASE > SEE PAGE 87

Friends of hue | 230V | IP20 | GWT 960° | 0.94KG

black struc	**12663132**
black struc - gold	**12663191**
white struc	**12663109**
white struc - gold	**12663189**

REQUIRED PARTS

KOMPAS MATRIX | TRAILING EDGE DIMMABLE

	Fixture for Kompas	Extra	30W TRE				60W TRE			
			350mA		500mA		350mA		500mA	
			Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series
MONOCOLOUR	Marbul Susp Fix		3	1	3	1	6	1	6	1
	Marbul Susp Adj									
	Minude		3	1	3	1	6	1	6	1
	Placebo Down	+ optional shade	3	1	not compatible use 350mA version		6	1	not compatible use 350mA version	
	Placebo Up		3	1			6	1		
	Smart Ball 82	+ Smart 82	3	1	3	1	6	1	6	1
		+ Smart 82 Adjustable								
	Smart Ball 115	+ Smart 115	-	-	-	-	-	-	-	-
		+ Smart 115 Adj	3	1	3	1	6	1	6	1
	Smart Tubed Suspension 48 GE	+ Smart 48	12	min 5 max 6	12	min 4 max 6	use 30W version		use 30W version	
		+ Smart 48+	6	min 2 max 2	6	min 2 max 2	12	min 2 max 2	12	min 2 max 2
	Smart Tubed Suspension 82 large GE	+ Smart 82	3	1	3	1	6	1	6	1
		+ Smart 82 Adj								
	Smart Tubed Suspension 82 XL GE	+ Smart 82	3	1	3	1	6	1	6	1
		+ Smart 82 Adj								
	Smart Tubed Suspension 115 GE	+ Smart 115	-	-	-	-	-	-	-	-
		+ Smart 115 Adj	3	1	3	1	6	1	6	1
WARM DIM	Marbul Susp Fix Warm Dim		-	-	not compatible use 350mA version		-	-	not compatible use 350mA version	
	Marbul Susp Adj Warm Dim									
	Placebo Down Warm Dim	+ optional shade	3	1			6	1		
	Placebo Up Warm Dim									
	Smart Ball 82	+ Smart 82 Warm Dim	3	1			6	1		
		+ Smart 82 Adj Warm Dim								
	Smart Ball 115	+ Smart 115 Adj Warm Dim	-	-			-	-		
	Smart Tubed Suspension 48 GE	+ Smart 48 Warm Dim	-	-			-	-		
	Smart Tubed Suspension 82 large GE	+ Smart 82 Warm Dim	3	1			6	1		
		+ Smart 82 Adj Warm Dim								
	Smart Tubed Suspension 82 XL GE	+ Smart 82 Warm Dim	3	1			6	1		
		+ Smart 82 Adj Warm Dim								
	Smart Tubed Suspension 115 GE	+ Smart 115 Adj Warm Dim	-	-			-	-		

KOMPAS MATRIX | GE

Fixture for Kompas	Max Fixtures Total
Tulip Bloom	12
Tulip Blossom	

Fixture for Kompas		Extra	50W DALI / 1-10V / CASAMBI				100W DALI / 1-10V / CASAMBI			
			350mA		500mA		350mA		500mA	
			Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series
MONOCOLOUR	Marbul Susp Fix		6	3	4	2	12	3	8	2
	Marbul Susp Adj									
	Minude		6	3	4	2	12	3	8	2
	Placebo Down	+ optional shade	6	3	not compatible use 350mA version		12	3	not compatible use 350mA version	
	Placebo Up		6	3			12	3		
	Smart Ball 82	+ Smart 82	6	3	4	2	12	3	8	2
		+ Smart 82 Adjustable								
	Smart Ball 115	+ Smart 115	2	1	2	1	4	1	4	1
		+ Smart 115 Adj	6	3	4	2	12	3	8	2
	Smart Tubed Suspension 48 GE	+ Smart 48	12	6	12	6	use 50W version		use 50W version	
		+ Smart 48+	12	6	10	5			12	5
	Smart Tubed Suspension 82 large GE	+ Smart 82	6	3	4	2	12	3	8	2
		+ Smart 82 Adj								
	Smart Tubed Suspension 82 XL GE	+ Smart 82	6	3	4	2	12	3	8	2
		+ Smart 82 Adj								
	Smart Tubed Suspension 115 GE	+ Smart 115	2	1	2	1	4	1	4	1
		+ Smart 115 Adj	6	3	4	2	12	3	8	2
WARM DIM	Marbul Susp Fix Warm Dim		2	1	not compatible use 350mA version		4	1	not compatible use 350mA version	
	Marbul Susp Adj Warm Dim									
	Placebo Down Warm Dim	+ optional shade	4	2			8	2		
	Placebo Up Warm Dim									
	Smart Ball 82	+ Smart 82 Warm Dim	6	3			12	3		
		+ Smart 82 Adj Warm Dim								
	Smart Ball 115	+ Smart 115 Adj Warm Dim	2	1			4	1		
	Smart Tubed Suspension 48 GE	+ Smart 48 Warm Dim	-	-			-	-		
	Smart Tubed Suspension 82 large GE	+ Smart 82 Warm Dim	6	3			12	3		
		+ Smart 82 Adj Warm Dim								
	Smart Tubed Suspension 82 XL GE	+ Smart 82 Warm Dim	6	3			12	3		
		+ Smart 82 Adj Warm Dim								
	Smart Tubed Suspension 115 GE	+ Smart 115 Adj Warm Dim	2	1			4	1		

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - WHITE STRUCTURE

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - SILVER BRONZE BRUSHED

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - CHAMPAGNE BRUSHED

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - GOLD BRUSHED

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - BLACK BRUSHED

LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - BLACK STRUCTURE

LOTIS 82 (GU10 FOR LED / LED HUE) - BRONZE BRUSHED

(ASY) LOTIS

Lotis is the recessed spotlight where it all began. The hallmark of this luminaire is its deeply recessed, fine-edged cone that unveils the light source. Known for its effortless design and high functionality, Lotis comes with different light sources and smart lighting options, and in several colours.

Light on the wall

Asy lotis has all the features of a typical Lotis family member with one additional benefit: asymmetry. The light shines down at an angle of 28°, creating an attractive wash effect on the wall.

A splash of new colours...

Lotis 82 offers several finishes to add a splash of colour to your design. The original white structure, the new black structure and the new wet painted and brushed bronze, silver bronze, black, champagne and gold. The wet painted colours with visible brushed lines showing an authentic, strong architectural look & feel. Perfect for matching with other Modular families such as Thimble or Minude. The new colours are available for 3 types of Lotis 82.

... for 3 Lotis 82 family members

With Lotis 82 GU10, a GU10 lamp of your choice needs to be added. The Lotis 82 GU10 for smart lighting variant comes with an included Hue bulb. You can choose between Tunable White or 2700K white. Finally, Lotis 82 for LED, with our M-LED 50 module, offers warm dim, 3 beam angles: medium, spot, flood, 4 colour temperatures: 2700K, 3000K, 3500K, 4000K and a more powerful lumen output.

more info? *supermodular.com/en/lotis*

WARM DIM

Lotis 82 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

IP20 | GWT 960° | 0.10KG

alu	**13080005**
black	**13080002**
gold	**13080046**
white struc	**13080009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	406lm / 6.2W	**521lm / 9.2W**
3000K / 25°	430lm / 6.2W	**577lm / 9.2W**
3500K / 25°	446lm / 6.2W	**600lm / 9.2W**
4000K / 25°	459lm / 6.2W	**616lm / 9.2W**

WARM DIM

Lotis 82 for LED GE (NEW)



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

IP20 | GWT 960° | 0.16KG

black (brushed)	**13080602**
black struc	**13080632**
bronze (brushed)	**13080618**
champagne (brushed)	**13080617**
gold (brushed)	**13080646**
silver bronze (brushed)	**13080606**
white struc	**13080609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	406lm / 6.2W	**521lm / 9.2W**
3000K / 25°	430lm / 6.2W	**577lm / 9.2W**
3500K / 25°	446lm / 6.2W	**600lm / 9.2W**
4000K / 25°	459lm / 6.2W	**616lm / 9.2W**

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

WARM DIM

Lotis 82 concrete for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

IP20 | GWT 960° | 0.12KG

black	**13080102**

LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	406lm / 6.2W	**521lm / 9.2W**
3000K / 25°	430lm / 6.2W	**577lm / 9.2W**
3500K / 25°	446lm / 6.2W	**600lm / 9.2W**
4000K / 25°	459lm / 6.2W	**616lm / 9.2W**

Lotis 82 LED Hue retrofit (NEW)





1X LED GU10 INCL. | 5.2W

Friends of hue | 230V | IP20 | GWT 960° | 0.36KG

HUE DIMMABLE	2200K - 6500K TUNABLE WHITE	2700K
	MEDIUM	MEDIUM
black (brushed)	13080502	13080402
black struc	13080532	13080432
bronze (brushed)	13080518	13080418
champagne (brushed)	13080517	13080417
gold (brushed)	13080546	13080446
silver bronze (brushed)	13080506	13080406
white struc	13080509	13080409

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Lotis 82 GU10 for LED (NEW)



1X LED GU10 (NOT INCL.)

Friends of hue | 230V | IP20 | GWT 960° | 0.20KG

black (brushed)	13080302
black struc	13080332
bronze (brushed)	13080318
champagne (brushed)	13080317
gold (brushed)	13080346
silver bronze (brushed)	13080306
white struc	13080309

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Lotis 82 LED retrofit





1X LED GU10 INCL. | GU10 | 5.5W

230V | R,L | IP20 | GWT 960° | 0.25KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu	11450005
black	11450002
gold	11450046
white struc	11450009

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Lotis 82 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.15KG

RESISTIVE DIMMABLE	
alu	**10881005**
black	**10881002**
gold	**10881046**
white struc	**10881009**

Lotis 82 concrete GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.17KG

RESISTIVE DIMMABLE	
black	**12561002**

Lotis 82 MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

III	12V	IP20	GWT 960°	0.10KG	▲	

alu	**10880105**
black	**10880102**
gold	**10880146**
white struc	**10880109**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Lotis 82 concrete MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

III	12V	IP20	GWT 960°	0.15KG	▲	

black	**12560002**
white struc	**12560009**

WARM DIM

Lotis 86 IP55 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

Friends of hue | IP55 | GWT 960° | 0.16KG

alu struc	**13090028**
black struc	**13090008**
white struc	**13090009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	451lm / 6.2W	**580lm / 9.2W**
3000K / 25°	478lm / 6.2W	**642lm / 9.2W**
3500K / 25°	496lm / 6.2W	**667lm / 9.2W**
4000K / 25°	525lm / 6.2W	**704lm / 9.2W**

Lotis 86 IP55 LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W

INSTALLATION ACCESSORIES

12290230	GYPKIT 190X190 - Ø80

230V | R,L | IP55 | GWT 960° | 0.45KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu struc	**11456228**
black struc	**11456208**
white struc	**11456238**

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

Lotis 86 IP55 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

III	12V	IP55	GWT 960°	0.25KG		

alu struc	**10883528**
black struc	**10883508**
white struc	**10883538**

INSTALLATION ACCESSORIES

12290230 GYPKIT 190X190 - Ø80

Lotis 86 IP55 GU10



1X QPAR 16 | GU10 | MAX. 50W

Friends of hue		230V	* R	IP55	GWT 960°	0.25KG		

RESISTIVE DIMMABLE	
alu struc	**10883628**
black struc	**10883608**
white struc	**10883638**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12290230 GYPKIT 190X190 - Ø80

WARM DIM

Lotis 97 adjustable for LED GE



Friends of hue | IP20 | GWT 960° | 0.20KG

alu	13100005
black	13100002
white struc	13100009

1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	506lm / 6.2W	**651lm / 9.2W**
3000K / 25°	536lm / 6.2W	**721lm / 9.2W**
3500K / 25°	562lm / 6.2W	**755lm / 9.2W**
4000K / 25°	559lm / 6.2W	**752lm / 9.2W**

WARM DIM

Lotis 97 concrete adjustable for LED GE





Friends of hue | IP20 | GWT 960° | 0.17KG

black	13100102
white struc	13100109

1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	506lm / 6.2W	**651lm / 9.2W**
3000K / 25°	536lm / 6.2W	**721lm / 9.2W**
3500K / 25°	562lm / 6.2W	**755lm / 9.2W**
4000K / 25°	559lm / 6.2W	**752lm / 9.2W**

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

Lotis 97 adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12290330	GYPKIT 190X190 · Ø92

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.40KG

RESISTIVE DIMMABLE	
alu	**10881305**
black	**10881302**
white struc	**10881309**

Lotis 97 concrete adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.22KG

RESISTIVE DIMMABLE	
black	**12571002**
white struc	**12571009**

Lotis 97 adjustable MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.40KG | ▲

alu	**10881205**
black	**10881202**
white struc	**10881209**

INSTALLATION ACCESSORIES

12290330 GYPKIT 190X190 - Ø92

Lotis 97 concrete adjustable MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.18KG | ▲

black	**12570002**
white struc	**12570009**

Lotis 230 AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

III | 12V | IP20 | GWT 960° | 0.70KG | ▲

black	**10880202**

ASY LOTIS 82

ASY LOTIS 97 ADJUSTABLE

Asy lotis 82 LED retrofit





1X LED GU10 INCL. | 5.5W

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu	**11450105**
black	**11450102**
white struc	**11450109**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

WARM DIM

Asy lotis 82 for LED GE

OUTLET





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

black	**13080202**
white struc	**13080209**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø076

OPTICAL ACCESSORIES

10213103	SOFTLENS Ø44

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	432lm / 6.2W	**555lm / 9.2W**
3000K / 25°	457lm / 6.2W	**614lm / 9.2W**
3500K / 25°	475lm / 6.2W	**639lm / 9.2W**
4000K / 25°	491lm / 6.2W	**659lm / 9.2W**

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

Asy lotis 82 MR16 GE





1X QR-CBC 51 | GX5.3 | 50W

III	12V	IP20	GWT 960°	0.15KG	▲	

alu	**10880505**
black	**10880502**
white struc	**10880509**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

Asy lotis 82 GU10



1X QPAR 16 | GU10 | 50W

Friends of hue	□	230V	* R	IP20	GWT 960°	0.15KG	▲	

RESISTIVE DIMMABLE	
alu	**10880605**
black	**10880602**
white struc	**10880609**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

OPTICAL ACCESSORIES

10211903	SPREADLENS Ø50
10213003	SOFTLENS Ø50

Asy lotis 97 adjustable MR16 GE



1X QR-CBC 51 | GX5.3 | 50W

III	12V	IP20	GWT 960°	0.21KG	▲	

alu	**10881405**
black	**10881402**
white struc	**10881409**

INSTALLATION ACCESSORIES

12290330	GYPKIT 190X190 - Ø92

WARM DIM

Asy lotis 97 adjustable for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

12290330	GYPKIT 190X190 - Ø92

OPTICAL ACCESSORIES

10213103	SOFTLENS Ø44

Friends of hue | III | IP20 | GWT 960° | 0.26KG | ▲

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	459lm / 6.2W	**590lm / 9.2W**
3000K / 25°	487lm / 6.2W	**654lm / 9.2W**
3500K / 25°	505lm / 6.2W	**679lm / 9.2W**
4000K / 25°	524lm / 6.2W	**703lm / 9.2W**

Asy lotis 97 adjustable GU10



1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12290330	GYPKIT 190X190 - Ø92

OPTICAL ACCESSORIES

10211903	SPREADLENS Ø50
10213003	SOFTLENS Ø50

Friends of hue | ▢ | 230V | * R | IP20 | GWT 960° | 0.21KG | ▲

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

LOTIS SQUARE

LOTIS SQUARE

LOTIS SQUARE

Lotis square is a compact, square version of our successful round Lotis series. The bulb sits deep down in a conical cup, which means it is less visible. Besides the regular version, there is also an IP version for use in damp rooms or outdoor environments. Also available in a Lotis square for LED version, using our M-LED 50 module. This allows you to choose from a large range of lighting colours and three different beam angles (spot, medium or flood).

more info? *supermodular.com/en/lotis-square*

WARM DIM

Lotis square for LED GE





IP20 | GWT 960° | 0.17KG

black	**12619002**
white struc	**12619009**

1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	442lm / 6.2W	**568lm / 9.2W**
3000K / 25°	469lm / 6.2W	**630lm / 9.2W**
3500K / 25°	487lm / 6.2W	**655lm / 9.2W**
4000K / 25°	510lm / 6.2W	**685lm / 9.2W**

WARM DIM

Lotis square IP55 for LED GE





IP55 | GWT 960° | 0.26KG

black struc	**12619108**
white struc	**12619109**

1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	**500mA**
2700K / 25°	460lm / 6.2W	**591lm / 9.2W**
3000K / 25°	487lm / 6.2W	**655lm / 9.2W**
3500K / 25°	506lm / 6.2W	**681lm / 9.2W**
4000K / 25°	533lm / 6.2W	**715lm / 9.2W**

M-LED

14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU
14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

Lotis square MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W

III	12V	IP20	GWT 960°	0.23KG	▲	

black	**12611002**
white struc	**12611009**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

Lotis square GU10



1X QPAR 16 | GU10 | MAX. 50W

Friends of hue	⏚	230V	* R	IP20	GWT 960°	0.27KG	▲

RESISTIVE DIMMABLE	
black	**12610002**
white struc	**12610009**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

Lotis square IP55 MR16 GE



1X QR-C 51 | GX5.3 | MAX. 50W

III	12V	IP55	GWT 960°	0.24KG		

black struc	**12615008**
white struc	**12615009**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

Lotis square IP55 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

Friends of hue | 230V | * R | IP55 | GWT 960° | 0.28KG

RESISTIVE DIMMABLE	
black struc	**12614008**
white struc	**12614009**

LOTIS TUBED SURFACE

LOTIS TUBED SUSPENSION

SEE ALSO

WALL - P533



EXTERIOR - P602

LOTIS TUBED

Lotis tubed is the surface-mounted version of the standard Lotis recessed spot. The coloured cylinder houses the Lotis spot. Lotis tubed is available in different heights, from 130 mm (surface mounted) to 190 mm (suspended). Combining both versions creates depth in your rooms and spices up your interior. Lotis tubed allows you to play with colours: go for contrasting black, white and gold finishes, or choose a more uniform look instead.

more info? *supermodular.com/en/lotis-tubed*

Lotis tubed surface LED retrofit



1X LED GU10 INCL. | 5.5W

230V | R,L | IP20 | GWT 960° | 0.36KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11450232
black struc - white struc	11450237
white struc - black	11450229
white struc - gold	11450289
white struc - white struc	11450209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**346lm / 5.5W**

Lotis tubed surface MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 0.36KG

black struc - gold	10882932
black struc - white struc	10882937
white struc - black	10882929
white struc - gold	10882989
white struc - white struc	10882909

Lotis tubed surface GU10



1X QPAR 16 | GU10 | MAX. 35W

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.36KG

RESISTIVE DIMMABLE	
black struc - gold	10883032
black struc - white struc	10883037
white struc - black	10883029
white struc - gold	10883089
white struc - white struc	10883009

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Lotis tubed suspension LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W

230V | R,L | IP20 | GWT 960° | 1.30KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11458332
black struc - white struc	11458337
white struc - black	11458329
white struc - gold	11458389
white struc - white struc	11458309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**346lm / 5.5W**

Lotis tubed suspension GU10



1X QPAR 16 | GU10 | MAX. 35W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.20KG

RESISTIVE DIMMABLE	
black struc - gold	10883132
black struc - white struc	10883137
white struc - black	10883129
white struc - gold	10883189
white struc - white struc	10883109

Lotis tubed recessed MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.36KG

white struc - white struc	10883409

MARBUL - ALU REFLECTOR

MARBUL RECESSED - ALU REFLECTOR

MARBUL - CHAMPAGNE REFLECTOR

MARBUL RECESSED - GOLD REFLECTOR

MARBUL SUSPENSION ADJUSTABLE - CHAMPAGNE REFL.

MARBUL SUSPENSION - GOLD REFLECTOR

MARBUL SUSPENSION ADJUSTABLE - ALU REFLECTOR

SEE ALSO

CEILING - P85

TRACK 48V - P411

TRACK 230V - P471

HENRY VAN DE VELDE AWARDS 19 WINNER

GOOD DESIGN

MARBUL

Design — Jeffrey Huyghe

Marbul is an ideal choice for residential, hospitality and retail projects. Direct light with a simple twist of the lamp units, each with its own dedicated LED module. With Marbul also available for our Pista 48V and 230V track systems, and our Kompas ceiling base, the family is getting more versatile. All Marbuls include the option to interchange magnetic reflectors in aluminium, champagne or gold colours. Add warm dim technology to fine tune the mood even more.

Asymmetry rules

The elegant surface-mounted luminaires enable you to direct light with a simple twist of each lamp unit. Thanks to Marbul's streamlined driver box, the 1, 2 or 3 spheres appear to float against the ceiling. The unique magnetic cover plate keeps screws and wires neatly out of sight.

All-round sophistication

Marbul recessed is characterized by a thin trim of 5mm through which 1 or 2 spheres appear to gently hang from the ceiling, without any visible attachments. Each lamp unit is highly adjustable and can be rotated 360°, and inclined approximately 45°.

Adding more dynamism to an original

Marbul suspension comes with a particularly thin, matte black cable and a fixed or adjustable sphere. Choose a gold, champagne or aluminium reflector to pimp your desired light effect. The adjustable version features a small cap that can be used to incline the sphere by approximately 45° to highlight specific elements in a room, and the cable itself can be rotated 360°.

more info? *supermodular.com/en/marbul*
supermodular.com/en/marbul-recessed
supermodular.com/en/marbul-suspension

Marbul 1x LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

Friends of hue | 230V | IP20 | GWT 960° | 1.34KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11500032	11500332
donkey grey struc	11500076	11500376
white struc	11500009	11500309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11500132	11500432
donkey grey struc	11500176	11500476
white struc	11500109	11500409

DALI	2700K / CRI90+	3000K / CRI90+
black struc	11500232	11500532
donkey grey struc	11500276	11500576
white struc	11500209	11500509

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000K / 25° alu	**718lm / 8.5W**

WARM DIM

Marbul 1x LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

230V | R.C | IP20 | GWT 960° | 1.34KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	11500632
donkey grey struc	11500676
white struc	11500609

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

REQUIRED PARTS

Marbul 2x LED GI



2X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

Friends of hue | 230V | IP20 | GWT 960° | 2.20KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11501032	11501332
donkey grey struc	11501076	11501376
white struc	11501009	11501309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11501132	11501432
donkey grey struc	11501176	11501476
white struc	11501109	11501409

DALI	2700K / CRI90+	3000K / CRI90+
black struc	11501232	11501532
donkey grey struc	11501276	11501576
white struc	11501209	11501509

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

2700K / 25° alu	**634lm / 15W**
3000K / 25° alu	**718lm / 15W**

Marbul 3x LED GI





3X LED ARRAY INCL. 4W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

Friends of hue | 230V | IP20 | GWT 960° | 3.35KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11502032	11502332
donkey grey struc	11502076	11502376
white struc	11502009	11502309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11502132	11502432
donkey grey struc	11502176	11502476
white struc	11502109	11502409

DALI	2700K / CRI90+	3000K / CRI90+
black struc	11502232	11502532
donkey grey struc	11502276	11502576
white struc	11502209	11502509

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES > SEE ABOVE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

2700K / 25° alu	**481lm / 15W**
3000K / 25° alu	**544lm / 15W**

Marbul recessed 115 1x LED GE



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.95KG

	2700K / CRI90+	3000K / CRI90+
black struc	**14222032**	**14222132**
donkey grey struc	**14222076**	**14222176**
white struc	**14222009**	**14222109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25° alu	634lm / 6W	**852lm / 8.9W**
3000K / 25° alu	718lm / 6W	**964lm / 8.9W**

WARM DIM

Marbul recessed 115 1x LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.95KG

	1800K - 3000K / CRI90+
black struc	**14222432**
donkey grey struc	**14222476**
white struc	**14222409**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 12W**

REQUIRED PARTS

Marbul recessed 115 2x LED GE



2X LED ARRAY INCL. 8.9W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
12291530	GYPKIT 310X212 – 2XØ108 R54X120

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.78KG

	2700K / CRI90+	3000K / CRI90+
black struc	**14222232**	**14222332**
donkey grey struc	**14222276**	**14222376**
white struc	**14222209**	**14222309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

	350mA	**500mA**
2700K / 25° alu	634lm / 6W	**852lm / 8.9W**
3000K / 25° alu	718lm / 6W	**964lm / 8.9W**

WARM DIM

Marbul recessed 115 2x LED warm dim GE



2X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
12291530	GYPKIT 310X212 – 2XØ108 R54X120

Friends of hue | III | 350mA | IP20 | GWT 960° | 1.78KG

	1800K - 3000K / CRI90+
black struc	**14222532**
donkey grey struc	**14222576**
white struc	**14222509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

@3000K / 25° alu	**955lm / 12W**

Marbul suspension LED GE



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.87KG

	2700K / CRI90+	3000K / CRI90+
black struc	**14236032**	**14236332**
donkey grey struc	**14236076**	**14236376**
white struc	**14236009**	**14236309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25° alu	**703lm / 9.3W**	964lm / 13.8W
3000K / 25° alu	**748lm / 9.3W**	1026lm / 13.8W

WARM DIM

Marbul suspension LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.84KG

	1800K - 3000K / CRI90+
black struc	**14236632**
donkey grey struc	**14236676**
white struc	**14236609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 12W**

REQUIRED PARTS

Marbul suspension LED GI



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | IP20 | GWT 960° | 1.25KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	14230032	14230332
donkey grey struc	14230076	14230376
white struc	14230009	14230309

DALI	2700K / CRI90+	3000K / CRI90+
black struc	14232032	14232332
donkey grey struc	14232076	14232376
white struc	14232009	14232309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	14231032	14231332
donkey grey struc	14231076	14231376
white struc	14231009	14231309

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**703lm / 11W**
3000K / 25° alu	**748lm / 11W**

WARM DIM

Marbul suspension LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

230V | R,C | IP20 | GWT 960° | 1.22KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	14236732
donkey grey struc	14236776
white struc	14236709

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

Marbul suspension adjustable LED GE



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.77KG

	2700K / CRI90+	3000K / CRI90+
black struc	**14237032**	**14237332**
donkey grey struc	**14237076**	**14237376**
white struc	**14237009**	**14237309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25° alu	**703lm / 9.3W**	964lm / 13.8W
3000K / 25° alu	**748lm / 9.3W**	1026lm / 13.8W

WARM DIM

Marbul suspension adjustable LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.74KG

	1800K - 3000K / CRI90+
black struc	**14239232**
donkey grey struc	**14239276**
white struc	**14239209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 12W**

REQUIRED PARTS

Marbul suspension adjustable LED GI



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | IP20 | GWT 960° | 1.15KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	14233032	14233332
donkey grey struc	14233076	14233376
white struc	14233009	14233309

DALI	2700K / CRI90+	3000K / CRI90+
black struc	14235032	14235332
donkey grey struc	14235076	14235376
white struc	14235009	14235309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	14234032	14234332
donkey grey struc	14234076	14234376
white struc	14234009	14234309

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**703lm / 11W**
3000K / 25° alu	**748lm / 11W**

WARM DIM

Marbul suspension adjustable LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST

230V | R,C | IP20 | GWT 960° | 1.12KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	14239332
donkey grey struc	14239376
white struc	14239309

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

MARCEL

MARCEL

MARCEL

Marcel meets every customer's requirements for a highly efficient retail lighting solution. Its ease-of-installation, adjustability and the endless possibilities procured by different LED sources and different lamp versions (1, 2 or 3 lamps) make Marcel an extremely versatile fixture.

Focus on the essentials

Marcel presents a stylish frame, fitted with adjustable lamp units. In the single lamp version, the frame is square shaped, while the two and three lamp versions have a rectangular shape. The refined, directional downlight will be used mainly in retail applications, as a functional lighting solution. It's perfect for situations that require both high efficiency and low consumption.

Plug-and-play installation

Marcel's installation is just as quick and easy as changing its lighting effect (by interchangeable reflectors or add-on anti glare, spread lens, etc.), thanks to our smart installation system. By simply tightening two screws, the installation flanges fold out and secure the fixture to the ceiling.

Only one light push

The right lighting mood is of the utmost importance in a shop. Marcel makes it easy to change the lighting effect to suit the circumstances and setting in your retail space. The brackets and unique tilting mechanism allow you to direct the light source the way you want, and you won't need a ladder; the tip of a broomstick will do the trick! Just touch the border of the lamp's housing and redirect the lamp as desired in one single action.

more info? *supermodular.com/en/marcel*

Marcel 1x LED GE



1X LED ARRAY INCL. 17.2W

Friends of hue | 500mA | IP20 | GWT 960° | 1.21KG

	2700K / CRI90+		
	15°	25°	40°
black struc	**14091032**	**14091132**	**14091232**
white struc	**14091009**	**14091109**	**14091209**
	3000K / CRI90+		
	15°	25°	40°
black struc	**14091332**	**14091432**	**14091532**
white struc	**14091309**	**14091409**	**14091509**
	4000K / CRI90+		
	15°	25°	40°
black struc	**14091632**	**14091732**	**14091832**
white struc	**14091609**	**14091709**	**14091809**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1335lm / 11.7W	**1811lm / 17.2W**	2380lm / 25W
3000K / 25°	1383lm / 11.7W	**1877lm / 17.2W**	2466lm / 25W
4000K / 25°	1496lm / 11.7W	**2029lm / 17.2W**	2667lm / 25W

Marcel 2x LED GE



2X LED ARRAY INCL. 17.2W

Friends of hue | 500mA | IP20 | GWT 960° | 2.12KG

	2700K / CRI90+		
	15°	25°	40°
black struc	**14092032**	**14092132**	**14092232**
white struc	**14092009**	**14092109**	**14092209**
	3000K / CRI90+		
	15°	25°	40°
black struc	**14092332**	**14092432**	**14092532**
white struc	**14092309**	**14092409**	**14092509**
	4000K / CRI90+		
	15°	25°	40°
black struc	**14092632**	**14092732**	**14092832**
white struc	**14092609**	**14092709**	**14092809**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	1335lm / 11.7W	**1811lm / 17.2W**	2380lm / 25W
3000K / 25°	1383lm / 11.7W	**1877lm / 17.2W**	2466lm / 25W
4000K / 25°	1496lm / 11.7W	**2029lm / 17.2W**	2667lm / 25W

Marcel 3x LED GE



3X LED ARRAY INCL. | 17.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

Friends of hue | III | 500mA | IP20 | GWT 960° | 3.17KG

	2700K / CRI90+		
	15°	25°	40°
black struc	**14093032**	**14093132**	**14093232**
white struc	**14093009**	**14093109**	**14093209**
	3000K / CRI90+		
	15°	25°	40°
black struc	**14093332**	**14093432**	**14093532**
white struc	**14093309**	**14093409**	**14093509**
	4000K / CRI90+		
	15°	25°	40°
black struc	**14093632**	**14093732**	**14093832**
white struc	**14093609**	**14093709**	**14093809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	1335lm / 11.7W	**1811lm / 17.2W**	2380lm / 25W
3000K / 25°	1383lm / 11.7W	**1877lm / 17.2W**	2466lm / 25W
4000K / 25°	1496lm / 11.7W	**2029lm / 17.2W**	2667lm / 25W

MEDARD 42 SEMI-RECESSED

MEDARD 42 RECESSED

MEDARD 70 STRETCHED SEMI-RECESSED 2X

MEDARD 70 RECESSED

MEDARD 70

MEDARD 70 STRETCHED

SEE ALSO

JACK - P385

TRACK 48V - P421
TRACK 230V - P476

MÉDARD

Design — Bleijh

It's the stick insect that inspired the Dutch design agency Bleijh for the creation of Médard. Highly flexible thanks to its orientable head, Médard can sit still as a standalone on a desk, or on the ceiling. In its miniature form, it looks graceful on its own, on a ceiling or as part of our Pista track or our redesigned Modupoint LED jack system. Médard even comes with a stretched neck supporting 1 or 2 light units.

Table, ceiling, wall or track?

First, it was one sleek design. Modularity and fun ensued. From a table lamp, to more subtle surface-mounted and recessed ceiling applications. Add lovely wall versions and a playful track variant, or plug it in our easy-to-install Modupoint ceiling base with or without extender sticks, and you've got yourself full-blown modularity.

Matching sizes, matching rings

Médard 42 is the minimalistic member of the family, gracing walls or ceilings as a standalone, or sliding playfully as a smaller spot for our Pista track (48V) and our redesigned Modupoint. Médard 70 is a solid eye-catcher as a track spot (230V). And of equal diameter, Médard ceiling beautifies spaces as a surface-mounted and recessed luminaire.

More lights, more spaces

Médard opens itself up to welcome more light. Médard stretched comes in two adjustable tube lengths: 300mm and 500mm and can support two light units. What's the opposite of stretched? Médard's distinctive and charming rounded edge is all you see with Médard recessed (ø42 and ø70). The matte black inner ring, same in all variants, combats glare and promotes a homogenous look.

more info? *supermodular.com/en/medard*
supermodular.com/en/medard-recessed

Médard 42 semi-recessed LED GE



1X LED ARRAY INCL. 11.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 700mA | IP20 | GWT 960° | 0.25KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13432032	13432132	13432232	13432332
white struc	13432009	13432109	13432209	13432309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA	**700mA**
2700K / 25°	509lm / 5.6W	702lm / 8.1W	**948lm / 11.5W**
3000K / 25°	509lm / 5.6W	702lm / 8.1W	**948lm / 11.5W**

WARM DIM

Médard 42 semi-recessed LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.25KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	13432432	13432532
white struc	13432409	13432509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**367lm / 6W**

Médard 70 semi-recessed LED GE



1X LED ARRAY INCL. 16.2W

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12736032	12736132	12736232	12736332
white struc	12736009	12736109	12736209	12736309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25°	936lm / 11W	**1285lm / 16.2W**
3000K / 25°	920lm / 11W	**1261lm / 16.2W**

WARM DIM

Médard 70 semi-recessed LED warm dim GE



1X LED ARRAY INCL. 12W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12734432	12734532
white struc	12734409	12734509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 12W**

Médard 70 ceiling LED GI



1X LED ARRAY INCL. 11W

230V R,C IP20 GWT 960° 0.94KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12732632	12732832	12734132	12734332
white struc	12732609	12732809	12734109	12734309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**936lm / 13W**
3000K / 25°	**920lm / 13W**

WARM DIM

Médard 70 ceiling LED warm dim GI



1X LED ARRAY INCL. 12W

230V R,C IP20 GWT 960° 0.96KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	12732332	12732432
white struc	12732309	12732409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 13.5W**

Médard 70 stretched 1x LED GI



1X LED ARRAY INCL. 11W

230V R,C IP20 GWT 960° 1.17KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11650032	11650132	11650232	11650332
white struc	11650009	11650109	11650209	11650309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**936lm / 13W**
3000K / 25°	**920lm / 13W**

WARM DIM

Médard 70 stretched 1x LED warm dim GI



1X LED ARRAY INCL. 12W

230V R,C IP20 GWT 960° 1.17KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	11650432	11650532
white struc	11650409	11650509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 13.5W**

Médard 70 stretched 2x LED GI



2X LED ARRAY INCL. | 11W

230V | R,C | IP20 | GWT 960° | 2.14KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11651032	11651132	11651232	11651332
white struc	11651009	11651109	11651209	11651309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**936lm / 26W**
3000K / 25°	**920lm / 26W**

WARM DIM

Médard 70 stretched 2x LED warm dim GI



2X LED ARRAY INCL. | 12W

230V | R,C | IP20 | GWT 960° | 2.14KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	11651432	11651532
white struc	11651409	11651509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 27W**

Médard 70 stretched semi-recessed 1x LED GE



1X LED ARRAY INCL. | 16.2W

Friends of hue | III | 350mA | IP20 | GWT 960° | 1.01KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11652032	11652132	11652232	11652332
white struc	11652009	11652109	11652209	11652309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	936lm / 11W	**1285lm / 16.2W**
3000K / 25°	920lm / 11W	**1261lm / 16.2W**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

WARM DIM

Médard 70 stretched semi-recessed 1x LED warm dim GE



1X LED ARRAY INCL. | 12W

Friends of hue | III | 350mA | IP20 | GWT 960° | 1.01KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	11652432	11652532
white struc	11652409	11652509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 12W**

Médard 70 stretched semi-recessed 2x LED GE



2X LED ARRAY INCL. | 16.2W

Friends of hue | III | 350mA | IP20 | GWT 960° | 1.88KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11653032	11653132	11653232	11653332
white struc	11653009	11653109	11653209	11653309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	936lm / 11W	**1285lm / 16.2W**
3000K / 25°	920lm / 11W	**1261lm / 16.2W**

WARM DIM

Médard 70 stretched semi-recessed 2x LED warm dim GE



2X LED ARRAY INCL. | 12W

Friends of hue | III | 350mA | IP20 | GWT 960° | 1.88KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	11653432	11653532
white struc	11653409	11653509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 24W**

Médard recessed 42 LED GE





1X LED MODULE INCL. 4.4W

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11550032	11550132	11550232	11550332
white struc	11550009	11550109	11550209	11550309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12293130	GYPKIT 100X120 - Ø40

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	259lm / 3W	**349lm / 4.3W**
3000K / 25°	259lm / 3W	**349lm / 4.3W**

WARM DIM

Médard recessed 42 LED warm dim GE





1X LED MODULE INCL. 6W

	1800K - 3000K / CRI90+	
	35°	40°
black struc	11550432	11550532
white struc	11550409	11550509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12293130	GYPKIT 100X120 - Ø40

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**341lm / 6W**

Médard recessed 70 LED GE





1X LED MODULE INCL. 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | 500mA | IP55 | GWT 960° | 0.26KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11551032	11551132	11551232	11551332
white struc	11551009	11551109	11551209	11551309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	430lm / 6.2W	**578lm / 9.2W**	742lm / 13.4W
3000K / 25°	447lm / 6.2W	**600lm / 9.2W**	772lm / 13.4W

WARM DIM

Médard recessed 70 LED warm dim GE



1X LED MODULE INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | 350mA | IP55 | GWT 960° | 0.26KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	11551432	11551532
white struc	11551409	11551509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**701lm / 12W**

Médard LED retrofit



1X LED GU10 INCL. | 5.5W

! CABLE (5M) INCLUDED
! ON/OFF SWITCH INCLUDED

230V | IP20 | GWT 960° | 2.75KG

	2700K / CRI80
	25°
black struc	12730032
white struc	12730009

MINUDE 45 ADJUSTABLE - ANODIZED SILVER BRONZE

MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE

MINUDE 45 SUSPENSION - ANODIZED CHAMPAGNE

MINUDE 45 SUSPENSION - ANODIZED BLACK

SEE ALSO

CEILING - P85

JACK - P391

TRACK 48V - P427

archiproducts DESIGN AWARDS WINNER 2019

GOOD DESIGN

MINUDE

Our miniature spot is an extremely simple cylinder-shaped light fixture with a lot to show. Endless applications, a variety of rich colours, phenomenal yogic flexibility. A deep-recessed light source for a glare-free light effect. To express a refined and minimalistic look & feel on walls or low ceiling executions, on high ceilings in its stand-alone suspended variant. Or go for more than one Minude, on our Pista track or Modupoint LED jack system, or combined with Kompas and Hoolahoop. This little spot will make a big impression.

Pure form, rich colours

The pure cylindrical shape with a thin, sharp edge and curved inner side hovers stylishly from a thin 2m matte black cable. Showing off its 6 rich colours – black ano, champagne ano, bronze ano, silver bronze ano – achieved by anodization, and two additional colours, powder painted black and white structure. All variants have a matte black back side.

Quality lens and light

Minude's light quality will not be outshined by its minimalist design, however. Its beautifully concentrated light beam projected from a deep-recessed LED light source, provides a pleasant light output. Its sophisticated lens technology is well protected by the inner edge snuggling right up to the glass lens.

more info? *supermodular.com/en/minude*

MINUDE 45 ADJUSTABLE - ANODIZED BRONZE

MINUDE 45 ADJUSTABLE - ANODIZED CHAMPAGNE

MINUDE 45 ADJUSTABLE - BLACK STRUC

Minude 45 adjustable semi-recessed 1x LED GE



1X LED ARRAY INCL. | 8.1W

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	**11461081**	**11461181**
ano bronze	**11461082**	**11461182**
ano champagne	**11461041**	**11461141**
ano silver bronze	**11461084**	**11461184**
black struc	**11461032**	**11461132**
white struc	**11461009**	**11461109**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12293130	GYPKIT 100X120 - Ø40

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	498lm / 5.6W	**686lm / 8.1W**
3000K / 30°	498lm / 5.6W	**686lm / 8.1W**

MINUDE 45 SUSPENSION - SILVER BRONZE

MINUDE 45 SUSPENSION - WHITE STRUCTURE

MINUDE 45 SUSPENSION - ANODIZED BRONZE

MINUDE 45 SUSPENSION - ANODIZED CHAMPAGNE

MINUDE 45 SUSPENSION - ANODIZED SILVER BRONZE

Minude 45 suspension LED GE



1X LED ARRAY INCL. 8.1W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.42KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	**11465081**	**11465181**
ano bronze	**11465082**	**11465182**
ano champagne	**11465041**	**11465141**
ano silver bronze	**11465084**	**11465184**
black struc	**11465032**	**11465132**
white struc	**11465009**	**11465109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	498lm / 5.6W	**686lm / 8.1W**
3000K / 30°	498lm / 5.6W	**686lm / 8.1W**

MINI MULTIPLE TRIMLESS WITH SMART KUP FRONTRING

MINI MULTIPLE 3X WITH M-LED 70

MINI MULTIPLE TRIMLESS 2X WITH M-LED 70

MINI MULTIPLE 4X WITH M-LED 70

MULTIPLE TRIMLESS 2X WITH M-LED 111

MULTIPLE 1X WITH M-LED 111

(MINI) MULTIPLE

More than twenty-five years after its initial launch, Multiple is still a much coveted luminaire series and the flagship solution in our architectural lighting portfolio.

Highly versatile

The technology is on full display and allows all Multiple luminaires to fit well into both a minimalist and an industrial-chic environment. The light source can be directed at any angle thanks to the gimbaled system.

The Multiple family consists of four models, with slight differences as to size and finish. All four models are available for LED, by combining the Multiple (trimless) and Mini multiple (trimless) with our M-LED 111 and M-LED 70 modules.

The LED series offers you an extensive range of lighting colours and three different beam angles.
Connect Mini multiple (trimless) for Smart rings with Smart by adding the frontrings to your recessed spot.

more info? *supermodular.com/en/mini-multiple*
supermodular.com/en/mini-multiple-trimless
supermodular.com/en/multiple
supermodular.com/en/multiple-trimless

WARM DIM

Mini multiple for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.67KG

alu - black	**13130005**
white struc	**13130009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

WARM DIM

Mini multiple for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.04KG

alu - black	**13130105**
white struc	**13130109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

M-LED

14070002	M-LED 70 2700K 15° GE BLACK MATT	**14070402**	M-LED 70 3000K 25° GE BLACK MATT	**14070802**	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	**14070409**	M-LED 70 3000K 25° GE WHITE STRUC	**14070809**	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	**14070502**	M-LED 70 3000K 40° GE BLACK MATT	**14070902**	M-LED 70 1800-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	**14070509**	M-LED 70 3000K 40° GE WHITE STRUC	**14070909**	M-LED 70 1800-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	**14070602**	M-LED 70 4000K 15° GE BLACK MATT	**14071002**	M-LED 70 1800-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	**14070609**	M-LED 70 4000K 15° GE WHITE STRUC	**14071009**	M-LED 70 1800-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	**14070702**	M-LED 70 4000K 25° GE BLACK MATT	**14071102**	M-LED 70 1800-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	**14070709**	M-LED 70 4000K 25° GE WHITE STRUC	**14071109**	M-LED 70 1800-3000K 40° GE WHITE STRUC

REQUIRED PARTS

WARM DIM

Mini multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

Friends of hue | 500mA | IP20 | GWT 960° | 1.43KG

alu - black	**13130205**
white struc	**13130209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

WARM DIM

Mini multiple for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

Friends of hue | 500mA | IP20 | GWT 960° | 1.72KG

alu - black	**13130305**
white struc	**13130309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

Mini multiple 1x LED retrofit



1X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 0.90KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430005
white struc	11430009

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple 2x LED retrofit



2X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 1.40KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430105
white struc	11430109

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple 3x LED retrofit



3X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 2.10KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430205
white struc	11430209

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple 4x LED retrofit



4X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 2.70KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430305
white struc	11430309

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple 1x MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 0.67KG

alu - black	**10370705**
white struc	**10370709**

INSTALLATION ACCESSORIES

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

Mini multiple 2x MR16 GE





2X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 1.14KG

alu - black	**10370805**
white struc	**10370809**

INSTALLATION ACCESSORIES

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

Mini multiple 3x MR16 GE



3X QR-CBC 51 | GU 5.3 | MAX. 50W

III	12V	IP20	GWT 960°	1.58KG		

alu - black	**10370905**
white struc	**10370909**

INSTALLATION ACCESSORIES

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

Mini multiple 4x MR16 GE



4X QR-CBC 51 | GU 5.3 | MAX. 50W

III	12V	IP20	GWT 960°	1.94KG		

alu - black	**10371005**
white struc	**10371009**

INSTALLATION ACCESSORIES

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

Mini multiple 1x GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.80KG

RESISTIVE DIMMABLE	
alu - black	**10351205**
white struc	**10351209**

Mini multiple 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.30KG

RESISTIVE DIMMABLE	
alu - black	**10351305**
white struc	**10351309**

Mini multiple 3x GU10



3X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.80KG

RESISTIVE DIMMABLE	
alu - black	**10351405**
white struc	**10351409**

Mini multiple 4x GU10



4X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

Friends of hue | 230V | * R | IP20 | GWT 960° | 2.30KG

RESISTIVE DIMMABLE	
alu - black	**10351505**
white struc	**10351509**

Mini multiple for Smart rings 1x LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.69KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	**12524005**	**12524105**	**12524205**
white struc	**12524009**	**12524109**	**12524209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

Mini multiple for Smart rings 2x LED GE



2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.14KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	**12525005**	**12525105**	**12525205**
white struc	**12525009**	**12525109**	**12525209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

SMART FRONTRINGS

12553002	SMART FLAT FRONTRING 25° BLACK	**12554102**	SMART CAKE FRONTRING 40° BLACK	**12555202**	SMART LOTIS FRONTRING 15° BLACK
12553009	SMART FLAT FRONTRING 25° WHITE STRUC	**12554109**	SMART CAKE FRONTRING 40° WHITE STRUC	**12555209**	SMART LOTIS FRONTRING 15° WHITE STRUC
12553102	SMART FLAT FRONTRING 40° BLACK	**12554202**	SMART CAKE FRONTRING 15° BLACK	**12556002**	SMART KUP FRONTRING 25° BLACK
12553109	SMART FLAT FRONTRING 40° WHITE STRUC	**12554209**	SMART CAKE FRONTRING 15° WHITE STRUC	**12556009**	SMART KUP FRONTRING 25° WHITE STRUC
12553202	SMART FLAT FRONTRING 15° BLACK	**12555002**	SMART LOTIS FRONTRING 25° BLACK	**12556102**	SMART KUP FRONTRING 40° BLACK
12553209	SMART FLAT FRONTRING 15° WHITE STRUC	**12555009**	SMART LOTIS FRONTRING 25° WHITE STRUC	**12556109**	SMART KUP FRONTRING 40° WHITE STRUC
12554002	SMART CAKE FRONTRING 25° BLACK	**12555102**	SMART LOTIS FRONTRING 40° BLACK	**12556202**	SMART KUP FRONTRING 15° BLACK
12554009	SMART CAKE FRONTRING 25° WHITE STRUC	**12555109**	SMART LOTIS FRONTRING 40° WHITE STRUC	**12556209**	SMART KUP FRONTRING 15° WHITE STRUC

REQUIRED PARTS

Mini multiple for Smart rings 3x LED GE



3X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

500mA | IP20 | GWT 960° | 1.59KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	**12526005**	**12526105**	**12526205**
white struc	**12526009**	**12526109**	**12526209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

Mini multiple for Smart rings 4x LED GE



4X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

500mA | IP20 | GWT 960° | 1.93KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	**12527005**	**12527105**	**12527205**
white struc	**12527009**	**12527109**	**12527209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

SMART FRONTRINGS

SMART FLAT FRONTRING


SMART CAKE FRONTRING


SMART KUP FRONTRING


SMART LOTIS FRONTRING

WARM DIM

Mini multiple trimless for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.64KG

black	**13131002**
white struc	**13131009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

WARM DIM

Mini multiple trimless for 2x LED GE





2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.90KG

black	**13131102**
white struc	**13131109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

M-LED

14070002	M-LED 70 2700K 15° GE BLACK MATT	**14070402**	M-LED 70 3000K 25° GE BLACK MATT	**14070802**	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	**14070409**	M-LED 70 3000K 25° GE WHITE STRUC	**14070809**	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	**14070502**	M-LED 70 3000K 40° GE BLACK MATT	**14070902**	M-LED 70 1800-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	**14070509**	M-LED 70 3000K 40° GE WHITE STRUC	**14070909**	M-LED 70 1800-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	**14070602**	M-LED 70 4000K 15° GE BLACK MATT	**14071002**	M-LED 70 1800-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	**14070609**	M-LED 70 4000K 15° GE WHITE STRUC	**14071009**	M-LED 70 1800-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	**14070702**	M-LED 70 4000K 25° GE BLACK MATT	**14071102**	M-LED 70 1800-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	**14070709**	M-LED 70 4000K 25° GE WHITE STRUC	**14071109**	M-LED 70 1800-3000K 40° GE WHITE STRUC

REQUIRED PARTS

WARM DIM

Mini multiple trimless for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.23KG

black	**13131202**
white struc	**13131209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

WARM DIM

Mini multiple trimless for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.53KG

black	**13131302**
white struc	**13131309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	**734lm / 9.2W**
3000K / 25°	605lm / 6.2W	**813lm / 9.2W**
4000K / 25°	649lm / 6.2W	**871lm / 9.2W**

Mini multiple trimless 1x LED retrofit



1X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 0.70KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440002
white struc	11440009

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple trimless 2x LED retrofit



2X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 1.20KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440102
white struc	11440109

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

REQUIRED PARTS

Mini multiple trimless 3x LED retrofit



3X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 1.80KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440202
white struc	11440209

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple trimless 4x LED retrofit



4X LED GU10 INCL. | 5.5W

Friends of hue | 230V | R,L | IP20 | GWT 960° | 2.30KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440302
white struc	11440309

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp)

2700K / 25°	**389lm / 5.5W**

Mini multiple trimless 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.72KG

black	**10380702**
white struc	**10380709**

INSTALLATION ACCESSORIES

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

Mini multiple trimless 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 1.01KG

black	**10380802**
white struc	**10380809**

INSTALLATION ACCESSORIES

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

Mini multiple trimless 3x MR16 GE



3X QR-CBC 51 | GU 5.3 | MAX. 50W

III	12V	IP20	GWT 960°	1.39KG	

black	**10382002**
white struc	**10382009**

INSTALLATION ACCESSORIES

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

Mini multiple trimless 4x MR16 GE





4X QR-CBC 51 | GU 5.3 | MAX. 50W

III	12V	IP20	GWT 960°	1.74KG	

black	**10381002**
white struc	**10381009**

INSTALLATION ACCESSORIES

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Mini multiple trimless 1x GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.60KG

RESISTIVE DIMMABLE	
black	**10381502**
white struc	**10381509**

Mini multiple trimless 2x GU10





2X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.10KG

RESISTIVE DIMMABLE	
black	**10381602**
white struc	**10381609**

REQUIRED PARTS

Mini multiple trimless 3x GU10



3X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

Friends of hue | 230V | R | IP20 | GWT 960° | 1.60KG

RESISTIVE DIMMABLE	
black	**10382202**
white struc	**10382209**

Mini multiple trimless 4x GU10



4X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Friends of hue | 230V | R | IP20 | GWT 960° | 2.10KG

RESISTIVE DIMMABLE	
black	**10381902**
white struc	**10381909**

Mini multiple trimless for Smart rings 1x LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.72KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	**12535002**	**12535102**	**12535202**
white struc	**12535009**	**12535109**	**12535209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

Mini multiple trimless for Smart rings 2x LED GE



2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.10KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	**12536002**	**12536102**	**12536202**
white struc	**12536009**	**12536109**	**12536209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

SMART FRONTRINGS

12553002	SMART FLAT FRONTRING 25° BLACK	**12554102**	SMART CAKE FRONTRING 40° BLACK	**12555202**	SMART LOTIS FRONTRING 15° BLACK
12553009	SMART FLAT FRONTRING 25° WHITE STRUC	**12554109**	SMART CAKE FRONTRING 40° WHITE STRUC	**12555209**	SMART LOTIS FRONTRING 15° WHITE STRUC
12553102	SMART FLAT FRONTRING 40° BLACK	**12554202**	SMART CAKE FRONTRING 15° BLACK	**12556002**	SMART KUP FRONTRING 25° BLACK
12553109	SMART FLAT FRONTRING 40° WHITE STRUC	**12554209**	SMART CAKE FRONTRING 15° WHITE STRUC	**12556009**	SMART KUP FRONTRING 25° WHITE STRUC
12553202	SMART FLAT FRONTRING 15° BLACK	**12555002**	SMART LOTIS FRONTRING 25° BLACK	**12556102**	SMART KUP FRONTRING 40° BLACK
12553209	SMART FLAT FRONTRING 15° WHITE STRUC	**12555009**	SMART LOTIS FRONTRING 25° WHITE STRUC	**12556109**	SMART KUP FRONTRING 40° WHITE STRUC
12554002	SMART CAKE FRONTRING 25° BLACK	**12555102**	SMART LOTIS FRONTRING 40° BLACK	**12556202**	SMART KUP FRONTRING 15° BLACK
12554009	SMART CAKE FRONTRING 25° WHITE STRUC	**12555109**	SMART LOTIS FRONTRING 40° WHITE STRUC	**12556209**	SMART KUP FRONTRING 15° WHITE STRUC

REQUIRED PARTS

Mini multiple trimless for Smart rings 3x LED GE



3X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

Friends of hue | 500mA | IP20 | GWT 960° | 1.39KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12537002	12537102	12537202
white struc	12537009	12537109	12537209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

Mini multiple trimless for Smart rings 4x LED GE



4X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Friends of hue | 500mA | IP20 | GWT 960° | 1.70KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12538002	12538102	12538202
white struc	12538009	12538109	12538209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	**707lm / 9.2W**
3000K / 25°	547lm / 6.2W	**735lm / 9.2W**
4000K / 25°	599lm / 6.2W	**753lm / 9.2W**

SMART FRONTRINGS

SMART FLAT FRONTRING

SMART CAKE FRONTRING

SMART KUP FRONTRING

SMART LOTIS FRONTRING

Multiple for 1x LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
10410130	GYPKIT 310X212X170X170

Friends of hue | 500mA | IP20 | GWT 960° | 1.14KG

alu - black	**13170005**
white struc	**13170009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

Multiple for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10390230	CONBOX 228X387X122X292
10410230	GYPKIT 385X257X325X170

Friends of hue | 500mA | IP20 | GWT 960° | 2.03KG

alu - black	**13170105**
white struc	**13170109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

REQUIRED PARTS

Multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10390330	CONBOX 228X532X122X292
10410330	GYPKIT 530X257X470X170

Friends of hue | III | 500mA | IP20 | GWT 960° | 2.90KG | ▲

alu - black	**13170205**
white struc	**13170209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	920lm / 11W	**1256lm / 16.25W**
3000K / 25°	904lm / 11W	**1233lm / 16.25W**
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**

Multiple for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10390430	CONBOX 382X387X122X446
10410430	GYPKIT 385X412X325X325

Friends of hue | III | 500mA | IP20 | GWT 960° | 3.80KG | ▲

alu - black	**13170305**
white struc	**13170309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	920lm / 11W	**1256lm / 16.25W**
3000K / 25°	904lm / 11W	**1233lm / 16.25W**
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**

Multiple 1x AR111 GE





1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
10410130	GYPKIT 310X212X170X170

III | 12V | IP20 | GWT 960° | 1.24KG

alu - black	**10350105**
white struc	**10350109**

Multiple 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10390230	CONBOX 228X387X122X292
10410230	GYPKIT 385X257X325X170

III | 12V | IP20 | GWT 960° | 2.13KG

alu - black	**10350205**
white struc	**10350209**

M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

Multiple 3x AR111 GE



3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10390330	CONBOX 228X532X122X292
10410330	GYPKIT 530X257X470X170

III | 12V | IP20 | GWT 960° | 3.00KG

alu - black	**10350305**
white struc	**10350309**

Multiple 4x AR111 GE



4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10390430	CONBOX 382X387X122X446
10410430	GYPKIT 385X412X325X325

III | 12V | IP20 | GWT 960° | 3.90KG

alu - black	**10350405**
white struc	**10350409**

Multiple trimless for 1x LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10430130	CONBOX 194X215X120X272
10450130	RECESSED FRAME MULTIPLE TRIMLESS 1X

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.55KG

black	**13171002**
white struc	**13171009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

Multiple trimless for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10430230	CONBOX 349X215X120X427
10450230	RECESSED FRAME MULTIPLE TRIMLESS 2X

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.60KG

black	**13171102**
white struc	**13171109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

REQUIRED PARTS

Multiple trimless for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430330	CONBOX 492X215X120X570
10450330	RECESSED FRAME MULTIPLE TRIMLESS 3X

Friends of hue | 500mA | IP20 | GWT 960° | 2.45KG

black	**13171202**
white struc	**13171209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	920lm / 11W	**1256lm / 16.25W**
3000K / 25°	904lm / 11W	**1233lm / 16.25W**
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**

Multiple trimless for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430430	CONBOX 349X370X120X427
10450430	RECESSED FRAME MULTIPLE TRIMLESS 4X

Friends of hue | 500mA | IP20 | GWT 960° | 2.85KG

black	**13171302**
white struc	**13171309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - value per lamp module)

	350mA	**500mA**
2700K / 25°	920lm / 11W	**1256lm / 16.25W**
3000K / 25°	904lm / 11W	**1233lm / 16.25W**
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**

Multiple trimless 1x AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10430130	CONBOX 194X215X120X272
10450130	RECESSED FRAME MULTIPLE TRIMLESS 1X

III | 12V | IP20 | GWT 960° | 0.75KG

black	**10360102**
white struc	**10360109**

Multiple trimless 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10430230	CONBOX 349X215X120X427
10450230	RECESSED FRAME MULTIPLE TRIMLESS 2X

III | 12V | IP20 | GWT 960° | 1.70KG

black	**10360202**
white struc	**10360209**

M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

Multiple trimless 3x AR111 GE



3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430330	CONBOX 492X215X120X570
10450330	RECESSED FRAME MULTIPLE TRIMLESS 3X

III | 12V | IP20 | GWT 960° | 2.65KG

black	**10360302**
white struc	**10360309**

Multiple trimless 4x AR111 GE



4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430430	CONBOX 349X370X120X427
10450430	RECESSED FRAME MULTIPLE TRIMLESS 4X

III | 12V | IP20 | GWT 960° | 3.05KG

white struc	**10360409**

NOMAD 4X

NOMAD 2X GI

NOMAD 4X GI

NOMAD

If you're in for industrial design with a retro touch, revisit Nomad. More precisely, Nomad LED.

Timeless passe-partout

Arguably Modulars flagship product, Nomad never settles. It is loyal, however. Sporting tiny drivers, and a LED unit that looks exactly like the luminaire's first halogen bulb, Nomad LED respects the original design to perfection. Available in fittings of 2x and 4x light units, in white structure, black or aluminium, with or without integrated gear. The sweetheart of architects is ready for your next project.

more info? *supermodular.com/en/nomad*

Nomad 2x LED AR111 GE



2X LED MODULE INCL. | 12W

* 250mA PER AR111 LED LAMP

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | * 500mA | IP20 | GWT 960° | 1.36KG

	2700K / CRI90+	
	20°	45°
alu	12352005	12352105
black	12352002	12352102
white struc	12352009	12352109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

2700K / 20°	**822lm / 12W**

Nomad 2x LED AR111 GI



2X LED MODULE INCL. | 12W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 1.69KG

1-10V	2700K / CRI90+	
	20°	45°
alu	12350005	12350105
black	12350002	12350102
white struc	12350009	12350109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

2700K / 20°	**822lm / 25W**

Nomad 2x for LED AR111 GI



2X LED AR111 (NOT INCL.)

! ADVISED TO USE **70008066** (2700K) / **70008067** (2000K-3000K)
OR ANY OTHER AR111 12V RETROFIT LED LAMP

230V | R,C | IP20 | GWT 960° | 1.22KG

TRAILING EDGE DIMMABLE	
alu	12352205
black	12352202
white struc	12352209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

	735lm / 15W

Nomad 4x LED AR111 GE



4X LED MODULE INCL. | 12W

* 250mA PER AR111 LED LAMP

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | * 1050mA | IP20 | GWT 960° | 2.47KG

	2700K / CRI90+	
	20°	45°
alu	12353005	12353105
black	12353002	12353102
white struc	12353009	12353109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

2700K / 20°	**822lm / 12W**

Nomad 4x LED AR111 GI



4X LED MODULE INCL. | 12W

CONNECTED > SEE GOODIES

Friends of hue | ⏚ | 230V | ◢ | IP20 | GWT 960° | 3.14KG

1-10V	2700K / CRI90+	
	20°	45°
alu	12351005	12351105
black	12351002	12351102
white struc	12351009	12351109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

2700K / 20°	**822lm / 48W**

Nomad 4x for LED AR111 GI



4X LED AR111 (NOT INCL.)

! ADVISED TO USE **70008066** (2700K) / **70008067** (2000K-3000K)
OR ANY OTHER AR111 12V RETROFIT LED LAMP

⏚ | 230V | ◢ R,C | IP20 | GWT 960° | 1.54KG

TRAILING EDGE DIMMABLE	
alu	12353205
black	12353202
white struc	12353209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen values per lamp module)

	735lm / 15W

Nomad 111 2x LED GE



2X LED ARRAY INCL. | 16.25W

! BASE FLANGE OPTIONAL

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.64KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12023005	12023105	12023205	12023305	12023405	12023505	12023605	12023705	12023805
black	12023002	12023102	12023202	12023302	12023402	12023502	12023602	12023702	12023802
white struc	12023009	12023109	12023209	12023309	12023409	12023509	12023609	12023709	12023809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

Nomad 111 4x LED GE



4X LED ARRAY INCL. | 16.25W

! BASE FLANGE OPTIONAL

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Friends of hue | III | 500mA | IP20 | GWT 960° | 3.10KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12024005	12024105	12024205	12024305	12024405	12024505	12024605	12024705	12024805
black	12024002	12024102	12024202	12024302	12024402	12024502	12024602	12024702	12024802
white struc	12024009	12024109	12024209	12024309	12024409	12024509	12024609	12024709	12024809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - values per lamp module)

	350mA	**500mA**	700mA
2700K / 25°	920lm / 11W	**1256lm / 16.25W**	1625lm / 23.6W
3000K / 25°	904lm / 11W	**1233lm / 16.25W**	1596lm / 23.6W
4000K / 25°	1053lm / 11W	**1437lm / 16.25W**	1860lm / 23.6W

Nomad 2x GU10



2X QPAR 16-20 | GU10 | 50-75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! BASE FLANGE OPTIONAL

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.64KG

RESISTIVE DIMMABLE	
alu	**10202105**
black	**10202102**

Nomad 4x GU10



4X QPAR 16-20 | GU10 | 50-75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! BASE FLANGE OPTIONAL

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.02KG

RESISTIVE DIMMABLE	
alu	**10202205**
black	**10202202**

Nomad 2x PAR30



2X QPAR 30 | E27 | MAX. 75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN PAR30 LAMP

! BASE FLANGE OPTIONAL

INSTALLATION ACCESSORIES	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

230V | R | IP20 | GWT 960° | 1.07KG

RESISTIVE DIMMABLE	
alu	**10201505**
white struc	**10201509**

Nomad 4x PAR30



4X QPAR 30 | E27 | MAX. 75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN PAR30 LAMP

! BASE FLANGE OPTIONAL

INSTALLATION ACCESSORIES	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

230V | R | IP20 | GWT 960° | 2.09KG

RESISTIVE DIMMABLE	
alu	**10201605**
white struc	**10201609**

Nomad 2x AR111 GE



III | 12V | IP20 | GWT 960° | 0.78KG

alu	**10200905**
black	**10200902**
white struc	**10200909**

2X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL
! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Nomad 4x AR111 GE



III | 12V | IP20 | GWT 960° | 1.24KG

alu	**10201005**
black	**10201002**
white struc	**10201009**

4X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL
! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

SEE ALSO

WALL - P539

NOMAD MINIMAL

Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the industrial look a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade.

more info? *supermodular.com/en/nomad-minimal*

Nomad minimal tall E27



1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! DISK OPTIONAL

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203605	NOMAD MINIMAL E27 DISK ALU
10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203837	MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203937	MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
alu	**10203505**

SHADE WHITE

SHADE BLACK

SHADE RED

SHADE BLACK / GOLD

ANIMAL SHADE ZEBRA

MINIMAL DISK

PLACEBO DOWN WITH GLASS TUBE 130MM DOWN - ANO BRONZE
PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BRONZE

PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - ANO BLACK
PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO BLACK

PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO CHAMPAGNE
PLACEBO DOULI - WHITE MATT

PLACEBO DOWN WITH GLASS TUBE 46MM DOWN - ANO SILVER BRONZE

SEE ALSO

CEILING - P85

TRACK 48V - P447

PLACEBO

Design — Jeffrey Huyghe

Born out of the mystic mind of Jeffrey Huyghe, Placebo quickly became a large product family. Placebo is shapes, sizes, up and down lighting, and stylish shades to dress it up. Also available as a pendant for our 48V track system Pista, and our ceiling bases Kompas and Hoolahoop, Placebo becomes a multitude of playful general lighting.

Playful Placebo effect

8 models to start from. Imagine a row or flock of changing Placebos, above a dining room table or a long counter space. Alternating between up and down lights, a tube shape or a ball shape. Go for Placebo with warm dim, tune down the intensity of your light and enjoy a change of colour temperature to a warmer, cosy light.

A feast of mix & match

All of Placebo's LED units are available in white and black structure, anodised champagne, bronze, silver bronze and black. Decide on a finish, then move on to choosing a tube or a ball shape, each in 2 sizes, with an up or down light effect. Add volume and presence to your Placebo expression with any of our 3 shades, Douli, Beanie and Sombrero. And watch the light effects they create!

Complexity in disguise

Deceptively simple in appearance, this pendant light hides intriguing features. How can both up and down lights look so identical? Hint: the up light reveals a small hole at the top of the glass. So why then, can't we see the cable through the glass? A 3-layered, hand blown glass does the trick.

more info? *supermodular.com/en/placebo*

PLACEBO DOWN WITH GLASS TUBE 46MM DOWN - BLACK STRUC
PLACEBO SOMBRERO - BLACK MATT

PLACEBO DOWN WITH GLASS BALL Ø90MM DOWN - ANO SILVER BRONZE

PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - BLACK STRUC
PLACEBO DOULI - BLACK MATT

PLACEBO DOWN WITH GLASS TUBE 130MM DOWN - BLACK STRUC
PLACEBO SOMBRERO - BRONZE

Placebo down LED GE



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

Friends of hue · III · 350mA · IP20 · GWT 950° · 0.32KG

	2700K / CRI90+	3000K / CRI90+
ano black	12622181	12622381
ano bronze	12622182	12622382
ano champagne	12622141	12622341
ano silver bronze	12622184	12622384
black struc	12622132	12622332
white struc	12622109	12622309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 6.3W**
3000K	**625lm / 6.3W**

WARM DIM

Placebo down LED warm dim GE



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

Friends of hue · III · 350mA · IP20 · GWT 650° · 0.32KG

	1800K - 3000K / CRI90+
ano black	12622581
ano bronze	12622582
ano champagne	12622541
ano silver bronze	12622584
black struc	12622532
white struc	12622509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 7.4W**

PLACEBO SHADES









BEANIE				DOULI				SOMBRERO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	**12628083**	**12628018**	**12628017**	**12629038**	**12629083**	**12629018**	**12629017**	**12627038**	**12627083**	**12627018**	**12627017**

REQUIRED PARTS

PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - BLACK STRUC
PLACEBO DOULI - BLACK MATT

PLACEBO DOWN WITH GLASS TUBE 130MM DOWN
PLACEBO BEANIE - WHITE MATT

PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN
PLACEBO SOMBRERO - CHAMPAGNE

PLACEBO DOWN WITH GLASS BALL Ø90MM DOWN - ANO CHAMPAGNE
PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - ANO CHAMPAGNE

Placebo down LED GI



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | IP20 | GWT 950° | 0.55KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
ano black	12621081	12621381
ano bronze	12621082	12621382
ano champagne	12621041	12621341
ano silver bronze	12621084	12621384
black struc	12621032	12621332
white struc	12621009	12621309

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	12621181	12621481
ano bronze	12621182	12621482
ano champagne	12621141	12621441
ano silver bronze	12621184	12621484
black struc	12621132	12621432
white struc	12621109	12621409

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
ano black	12621281	12621581
ano bronze	12621282	12621582
ano champagne	12621241	12621541
ano silver bronze	12621284	12621584
black struc	12621232	12621532
white struc	12621209	12621509

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 9W**
3000K	**625lm / 9W**

WARM DIM

Placebo down LED warm dim GI



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | R,C | IP20 | GWT 650° | 0.55KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
ano black	12621681
ano bronze	12621682
ano champagne	12621641
ano silver bronze	12621684
black struc	12621632
white struc	12621609

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 9W**

REQUIRED PARTS

PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO SILVER BRONZE
PLACEBO BEANIE - BLACK MATT

PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BLACK

PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO CHAMPAGNE
PLACEBO BEANIE - WHITE MATT

PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BRONZE
PLACEBO DOULI - BRONZE

Placebo up LED GE



1X LED MODULE INCL. | 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

Friends of hue | III | 350mA | IP20 | GWT 950° | 0.32KG

	2700K / CRI90+	3000K / CRI90+
ano black	**12622081**	**12622281**
ano bronze	**12622082**	**12622282**
ano champagne	**12622041**	**12622241**
ano silver bronze	**12622084**	**12622284**
black struc	**12622032**	**12622232**
white struc	**12622009**	**12622209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 6.3W**
3000K	**625lm / 6.3W**

WARM DIM

Placebo up LED warm dim GE



1X LED MODULE INCL. | 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

Friends of hue | III | 350mA | IP20 | GWT 650° | 0.32KG

	1800K - 3000K / CRI90+
ano black	**12622481**
ano bronze	**12622482**
ano champagne	**12622441**
ano silver bronze	**12622484**
black struc	**12622432**
white struc	**12622409**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 9W**

PLACEBO SHADES









BEANIE				DOULI				SOMBRERO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	**12628083**	**12628018**	**12628017**	**12629038**	**12629083**	**12629018**	**12629017**	**12627038**	**12627083**	**12627018**	**12627017**

REQUIRED PARTS

PLACEBO UP WITH GLASS TUBE 46MM UP - ANO BRONZE

PLACEBO UP WITH GLASS BALL Ø130MM UP - ANO BLACK
PLACEBO BEANIE - BLACK MATT

PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO BLACK
PLACEBO BEANIE - BRONZE

PLACEBO UP WITH GLASS TUBE 130MM UP - ANO CHAMPAGNE
PLACEBO DOULI - CHAMPAGNE

Placebo up LED GI



1X LED MODULE INCL. | 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | IP20 | GWT 950° | 0.55KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
ano black	12620081	12620381
ano bronze	12620082	12620382
ano champagne	12620041	12620341
ano silver bronze	12620084	12620384
black struc	12620032	12620332
white struc	12620009	12620309

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	12620181	12620481
ano bronze	12620182	12620482
ano champagne	12620141	12620441
ano silver bronze	12620184	12620484
black struc	12620132	12620432
white struc	12620109	12620409

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
ano black	12620281	12620581
ano bronze	12620282	12620582
ano champagne	12620241	12620541
ano silver bronze	12620284	12620584
black struc	12620232	12620532
white struc	12620209	12620509

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 9W**
3000K	**625lm / 9W**

WARM DIM

Placebo up LED warm dim GI



1X LED MODULE INCL. | 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST

Friends of hue | 230V | R.C | IP20 | GWT 650° | 0.55KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
ano black	12620681
ano bronze	12620682
ano champagne	12620641
ano silver bronze	12620684
black struc	12620632
white struc	12620609

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K	**365lm / 9W**

REQUIRED PARTS

PUPIL

PUPIL 2X
K72
K-SET

SEE ALSO

CEILING - P69

CEILING - P79

GOOD DESIGN

PUPIL

Design — Bleijh

Nothing short of the unexpected, Pupil is full of surprises and contradictions. Using nature as his muse, Dutch designer Basten Leijh created this organic, quirky shape: the downlighter that does the opposite. Nonconformity and functionality blend beautifully in this family, and there's even more to it than meets the eye.

A design that stands out

Small and curvy, the oval shape ends abruptly, cut off at an angle. An organic design inspired by the curious eyes of a crab, Pupil is not for a discreet expression. It demands attention. Unlike most recessed downlights, it playfully sticks out of the ceiling.

Straight that isn't straight

The asymmetry and adjustability of Pupil create optical puzzles that will make expressions have expressions. The light beam and the position of the housing simply can't agree. For a light beam pointing straight down, tilt the housing slightly up. For a 30° beam angle, point the housing straight down. Tilt the body 30°, and you have 60° light orientability for a wall-wash effect.

Fitting in

Just as this new design fits perfectly with the miniaturization trend, Pupil fits right in the palm of your hand. Pupil's playful design is additionally complemented by a brilliant show of modularity. It works wonders with our established, iconic K family, our first-ever adventure into technical architectural lighting. Thanks to K-set 72's openings, Pupil settles in snuggly inside as alternative to a K-72 spot. Or, a duo, trio or even a quartet of Pupils, all in one plate!

more info? *supermodular.com/en/pupil*

PUPIL WITH HONEYCOMB

PUPIL WITH SNOOT

Pupil 72 LED GE



1X LED ARRAY INCL. 6.4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue · III · 700mA · IP20 · GWT 960° · 0.26KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	**11490032**	**11490332**	**11490132**	**11490432**
white struc	**11490009**	**11490309**	**11490109**	**11490409**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA	**700mA**
2700K / 25°	275lm / 3W	370lm / 4.3W	**478lm / 6.4W**
3000K / 25°	275lm / 3W	370lm / 4.3W	**478lm / 6.4W**

WARM DIM

Pupil 72 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue · III · 350mA · IP20 · GWT 960° · 0.25KG

	1800K - 3000K / CRI90+	
	35°	40°
black struc	**11490232**	**11490532**
white struc	**11490209**	**11490509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**381lm / 6W**

K-SET 72

14042032	K-SET 72 1X BLACK STRUC
14042071	K-SET 72 1X DONKEY GREY STRUC
14042009	K-SET 72 1X WHITE STRUC
14042132	K-SET 72 2X BLACK STRUC
14042171	K-SET 72 2X DONKEY GREY STRUC
14042109	K-SET 72 2X WHITE STRUC
14042232	K-SET 72 3X BLACK STRUC
14042271	K-SET 72 3X DONKEY GREY STRUC
14042209	K-SET 72 3X WHITE STRUC
14042332	K-SET 72 4SQX BLACK STRUC
14042371	K-SET 72 4SQX DONKEY GREY STRUC
14042309	K-SET 72 4SQX WHITE STRUC

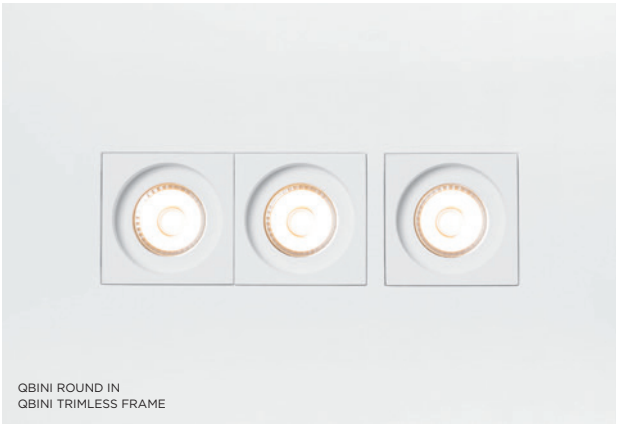

QBINI ROUND IN
QBINI TRIMLESS FRAME

QBINI ADJUSTABLE WITH SNOOT
QBINI FRAME

QBINI ASY
QBINI FRAME

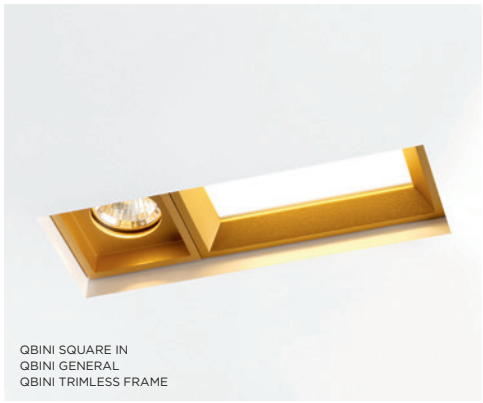

QBINI SQUARE IN
QBINI GENERAL
QBINI TRIMLESS FRAME

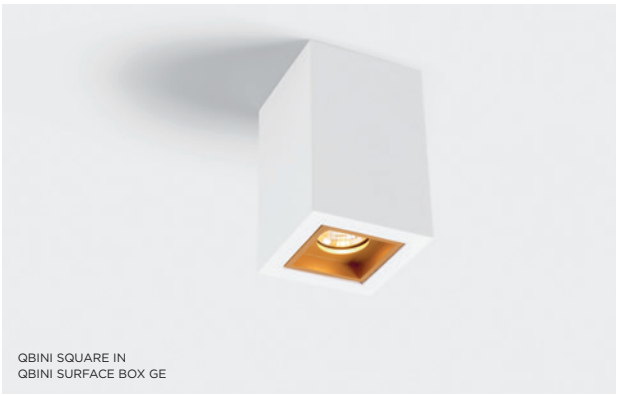

QBINI SQUARE IN
QBINI SURFACE BOX GE

QBINI ROUND IN
QBINI SURFACE BOX GE

QBINI GENERAL
QBINI SURFACE BOX GE

QBINI SQUARE IN
QBINI SURFACE BOX GI

QBINI

Design — Florent Coirier

A portmanteau of 'cubic' and 'mini', Qbini introduces modular, miniature, recessed and surface mounted LED lighting solutions to residential, hospitality and retail spaces. Available in many shapes, frames, colours and with accessories, Qbini combines choice with exclusive design and high-quality lighting technology.

Small in size, great in light quality

Our smallest recessed portfolio at 44mm square, Qbini makes installation simple, no screws required. Despite being a source of illumination, each Qbini unit has a tactile, precisely-machined appeal that fits in the palm of your hand.

Endless combinations

As a recessed application, Qbini can be combined with 2 different frames: with or without a trim. Both of them are available in 1x, 2x, 3x or 4x lamp configurations.
Its surface-mounted box (gear included or gear excluded) allows you to choose from all existing Qbini lights.
Mix, match and create!

Patented precision

Qbini's patented press-in, press-out technology makes it a breeze to install. The family's small size, cutting-edge design and dual positioning options (recessed or deep recessed) add a modern yet cosy touch to any intimate space.

more info? *supermodular.com/en/qbini*
supermodular.com/en/qbini-frame
supermodular.com/en/qbini-trimless-frame
supermodular.com/en/qbini-surface-box

Qbini asy LED GE





1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

500mA | IP55 | GWT 950° | 0.24KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11470032	11470332	11470132	11470432
gold	11470046	11470346	11470146	11470446
white struc	11470009	11470309	11470109	11470409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	317lm / 3W	**428lm / 4.3W**
3000K / 25°	317lm / 3W	**428lm / 4.3W**

WARM DIM

Qbini asy LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

250mA | IP55 | GWT 960° | 0.24KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	11470632	11470732
gold	11470646	11470746
white struc	11470609	11470709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**343lm / 4W**

REQUIRED PARTS

Qbini general downlight LED GE (2x)



1X LED LINE INCL. 6W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

500mA | IP54 | GWT 650° | 0.36KG

	2700K / CRI90+	3000K / CRI90+
black struc	11480032	11480132
gold	11480046	11480146
white struc	11480009	11480109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K	402lm / 4.2W	**560lm / 6W**
3000K	402lm / 4.2W	**560lm / 6W**

Qbini general downlight LED GE (4x)





1X LED LINE INCL. 12W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

500mA | IP54 | GWT 650° | 0.65KG

	2700K / CRI90+	3000K / CRI90+
black struc	11480332	11480432
gold	11480346	11480446
white struc	11480309	11480409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K	896lm 8.4W	**1247lm 12W**
3000K	896lm 8.4W	**1247lm 12W**

Qbini adjustable LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 500mA | IP20 | GWT 650° | 0.13KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14160132	14160232	14160432	14160532	14160732	14160832
gold	14160146	14160246	14160446	14160546	14160746	14160846
white struc	14160109	14160209	14160409	14160509	14160709	14160809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	301lm / 3W	**402lm / 4.3W**
3000K / 25°	325lm / 3W	**433lm / 4.3W**
4000K / 25°	330lm / 3W	**440lm / 4.3W**

WARM DIM

Qbini adjustable LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 250mA | IP20 | GWT 650° | 0.13KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14160332	14160632
gold	14160346	14160646
white struc	14160309	14160609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**304lm / 4W**

REQUIRED PARTS

Qbini round in LED GE





1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14101232	14101132	14102232	14102132	14103232	14103132
gold	14101246	14101146	14102246	14102146	14103246	14103146
white struc	14101209	14101109	14102209	14102109	14103209	14103109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	290lm / 3W	**387lm / 4.3W**
3000K / 25°	313lm / 3W	**417lm / 4.3W**
4000K / 25°	318lm / 3W	**424lm / 4.3W**

WARM DIM

Qbini round in LED warm dim GE





1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | III | 250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14104232	14104132
gold	14104246	14104146
white struc	14104209	14104109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**291lm / 4W**

Qbini round out LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14111232	14111132	14112232	14112132	14113232	14113132
gold	14111246	14111146	14112246	14112146	14113246	14113146
white struc	14111209	14111109	14112209	14112109	14113209	14113109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	257lm / 3W	**343lm / 4.3W**
3000K / 25°	277lm / 3W	**370lm / 4.3W**
4000K / 25°	282lm / 3W	**376lm / 4.3W**

WARM DIM

Qbini round out LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | III | 250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14114232	14114132
gold	14114246	14114146
white struc	14114209	14114109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**255lm / 4W**

REQUIRED PARTS

Qbini round tapered LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14141232	14141132	14142232	14142132	14143232	14143132
gold	14141246	14141146	14142246	14142146	14143246	14143146
white struc	14141209	14141109	14142209	14142109	14143209	14143109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	257lm 3W	**343lm 4.3W**
3000K / 25°	277lm 3W	**370lm 4.3W**
4000K / 25°	282lm 3W	**376lm 4.3W**

WARM DIM

Qbini round tapered LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14144232	14144132
gold	14144246	14144146
white struc	14144209	14144109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**255lm / 4W**

Qbini square in LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14121232	14121132	14122232	14122132	14123232	14123132
gold	14121246	14121146	14122246	14122146	14123246	14123146
white struc	14121209	14121109	14122209	14122109	14123209	14123109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	293lm / 3W	**391lm / 4.3W**
3000K / 25°	316lm / 3W	**421lm / 4.3W**
4000K / 25°	321lm / 3W	**428lm / 4.3W**

WARM DIM

Qbini square in LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14124232	14124132
gold	14124246	14124146
white struc	14124209	14124109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**295lm / 4W**

REQUIRED PARTS

Qbini square out LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14131232	14131132	14132232	14132132	14133232	14133132
gold	14131246	14131146	14132246	14132146	14133246	14133146
white struc	14131209	14131109	14132209	14132109	14133209	14133109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	268lm / 3W	**357lm / 4.3W**
3000K / 25°	288lm / 3W	**384lm / 4.3W**
4000K / 25°	293lm / 3W	**391lm / 4.3W**

WARM DIM

Qbini square out LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14134232	14134132
gold	14134246	14134146
white struc	14134209	14134109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**266lm / 4W**

Qbini square tapered LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 500mA | IP55 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14151232	14151132	14152232	14152132	14153232	14153132
gold	14151246	14151146	14152246	14152146	14153246	14153146
white struc	14151209	14151109	14152209	14152109	14153209	14153109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	268lm / 3W	**357lm / 4.3W**
3000K / 25°	288lm / 3W	**384lm / 4.3W**
4000K / 25°	293lm / 3W	**391lm / 4.3W**

WARM DIM

Qbini square tapered LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

QBINI (TRIMLESS) FRAME > SEE PAGE 235

QBINI SURFACE BOX > SEE PAGE 233, 235

OPTICAL ACCESSORIES

14191032	HONEYCOMB Ø26
14192032	SNOOT Ø26 BLACK
14193032	CROSSBLADE Ø26 BLACK

Friends of hue | 250mA | IP55 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	14154232	14154132
gold	14154246	14154146
white struc	14154209	14154109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**266lm / 4W**

REQUIRED PARTS

Qbini surface box 2x LED GI



LUMINAIRE NOT INCLUDED

Friends of hue | 230V | IP20 | GWT 960° | 0.66KG

TRAILING EDGE DIMMABLE	
black struc	13120232
white struc	13120209

DALI	
black struc	13120432
white struc	13120409

1-10V/PUSHDIM	
black struc	13120332
white struc	13120309

WARM DIM

Qbini surface box 2x LED warm dim GI





LUMINAIRE NOT INCLUDED

230V | R,C | IP20 | GWT 960° | 0.66KG

TRAILING EDGE DIMMABLE	
black struc	13120532
white struc	13120509

Qbini surface box 1x LED GE



LUMINAIRE NOT INCLUDED

black struc	13120032
white struc	13120009

Qbini surface box 2x LED GE



LUMINAIRE NOT INCLUDED

black struc	13120132
white struc	13120109

QBINI ROUND IN
QBINI BLIND COVER
QBINI TRIMLESS FRAME

QBINI SQUARE OUT
QBINI FRAME

QBINI SQUARE TAPERED
QBINI FRAME

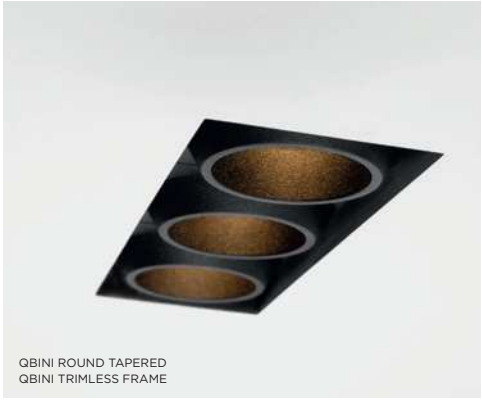

QBINI ROUND TAPERED
QBINI TRIMLESS FRAME

QBINI SQUARE IN
QBINI SURFACE BOX GI

QBINI ASY
QBINI SURFACE BOX GE

QBINI SQUARE TAPERED
QBINI SURFACE BOX GE

QBINI GENERAL
QBINI SURFACE BOX GI

QBINI SURFACE BOX



SURFACE BOX 1X LED GE

13120009 WHITE STRUC
13120032 BLACK STRUC



SURFACE BOX 2X LED GE

13120109 WHITE STRUC
13120132 BLACK STRUC



SURFACE BOX 2X LED GI

13120209 TRE DIM WHITE STRUC
13120232 TRE DIM BLACK STRUC
13120409 DALI WHITE STRUC
13120432 DALI BLACK STRUC
13120309 1-10V/PUSHDIM WHITE STRUC
13120332 1-10V/PUSHDIM BLACK STRUC
13120509 WARM DIM TRE DIM WHITE STRUC
13120532 WARM DIM TRE DIM BLACK STRUC

QBINI (TRIMLESS) FRAME



QBINI FRAME 1X

14171009 WHITE STRUC
14171032 BLACK STRUC
14171046 GOLD

12291630 GYPKIT 190X190X56X56
10889830 CONBOX 192X190X130



QBINI FRAME 2X

14172009 WHITE STRUC
14172032 BLACK STRUC
14172046 GOLD

12291730 GYPKIT 190X190X101X56
10889830 CONBOX 192X190X130



QBINI FRAME 3X

14173009 WHITE STRUC
14173032 BLACK STRUC
14173046 GOLD

12291830 GYPKIT 240X287X145X56
10400230 CONBOX 257X222X147



QBINI FRAME 4X

14174009 WHITE STRUC
14174032 BLACK STRUC
14174046 GOLD

12291930 GYPKIT 345X287X190X56
10400330 CONBOX 257X327X147



QBINI TRIMLESS FRAME 1X

14180009 WHITE
14180032 BLACK

12292030 GYPKIT 190X190 - Ø83
10889830 CONBOX 192X190X130



QBINI TRIMLESS FRAME 2X

14180109 WHITE
14180132 BLACK

12292130 GYPKIT 190X190 - R41.5X45
10889830 CONBOX 192X190X130



QBINI TRIMLESS FRAME 3X

14180209 WHITE
14180232 BLACK

12292230 GYPKIT 240X287 - R41.5X89
10400230 CONBOX 257X222X147



QBINI TRIMLESS FRAME 4X

14180309 WHITE
14180332 BLACK

12292330 GYPKIT 345X287 - R41.5X133
10400330 CONBOX 257X327X147

QBIN BLIND COVER



QBINI BLIND COVER

14261009 WHITE STRUC
14261032 BLACK STRUC
14261046 GOLD

REKTOR

REKTOR RECESSED

SEE ALSO

TRACK 230V - P479

REKTOR

Design — Couvreur-Devos

With a name derived from the Latin word for "ruler", the Rektor range of LED lighting has every quality of a leader. Winner of the 2014 Henry Van de Velde design award, Rektor showcases the distinguished effects of right angles and accented light direction.

Hidden ingenuity

The unique feature of Rektor is that all the technical workings are concealed within the fixture.
The innovative tilting technology allows you to rotate the LED head 360°, as well as adjust it upwards or downwards up to 90°. All without a single visible wire.

Rektor in many applications

Rektor comes available surface-mounted with a sleek driver box, or recessed, hiding the driver box completely in the ceiling or wall. Rektor's refined industrial, rectangular design is also an option for our 230V track system, making it an even more attractive and relevant choice for retail and hospitality spaces.

more info? *supermodular.com/en/rektor*
supermodular.com/en/rektor-recessed

Rektor LED GI



1X LED ARRAY INCL. | 16.25W

CONNECTED > SEE GOODIES

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	12826056	12826156	12828056	12828156
black struc - brushed alu	12826062	12826162	12828062	12828162
black struc - chrome	12826064	12826164	12828064	12828164
black struc - smoked bronze	12826067	12826167	12828067	12828167
white struc - brushed alu	12826061	12826161	12828061	12828161
white struc - chrome	12826063	12826163	12828063	12828163
white struc - smoked bronze	12826066	12826166	12828066	12828166
white struc - white struc	12826009	12826109	12828009	12828109

1-10V/PUSHDIM	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	12825056	12825156	12827056	12827156
black struc - brushed alu	12825062	12825162	12827062	12827162
black struc - chrome	12825064	12825164	12827064	12827164
black struc - smoked bronze	12825067	12825167	12827067	12827167
white struc - brushed alu	12825061	12825161	12827061	12827161
white struc - chrome	12825063	12825163	12827063	12827163
white struc - smoked bronze	12825066	12825166	12827066	12827166
white struc - white struc	12825009	12825109	12827009	12827109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

2700K / 25°	**1257lm / 19W**
3000K / 25°	**1233lm / 19W**

WARM DIM

Rektor LED warm dim GI



1X LED ARRAY INCL. | 12W

CONNECTED > SEE GOODIES

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc - black struc	12826256	12826356
black struc - brushed alu	12826262	12826362
black struc - chrome	12826264	12826364
black struc - smoked bronze	12826267	12826367
complete white struc	12826209	12826309
white struc - brushed alu	12826261	12826361
white struc - chrome	12826263	12826363
white struc - smoked bronze	12826266	12826366

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

@3000K / 25°	**881lm / 13.5W**

Rektor 2x LED GI



2X LED ARRAY INCL. 11W

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	14246056	14246156	14248056	14248156
black struc - brushed alu	14246062	14246162	14248062	14248162
black struc - chrome	14246064	14246164	14248064	14248164
black struc - smoked bronze	14246067	14246167	14248067	14248167
white struc - brushed alu	14246061	14246161	14248061	14248161
white struc - chrome	14246063	14246163	14248063	14248163
white struc - smoked bronze	14246066	14246166	14248066	14248166
white struc - white struc	14246009	14246109	14248009	14248109

1-10V/PUSHDIM	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	14245056	14245156	14247056	14247156
black struc - brushed alu	14245062	14245162	14247062	14247162
black struc - chrome	14245064	14245164	14247064	14247164
black struc - smoked bronze	14245067	14245167	14247067	14247167
white struc - brushed alu	14245061	14245161	14247061	14247161
white struc - chrome	14245063	14245163	14247063	14247163
white struc - smoked bronze	14245066	14245166	14247066	14247166
white struc - white struc	14245009	14245109	14247009	14247109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc - lumen values per lamp module)

2700K / 25°	**916lm / 25.7W**
3000K / 25°	**900lm / 25.7W**

CONNECTED > SEE GOODIES

WARM DIM

Rektor 2x LED warm dim GI



2X LED ARRAY INCL. 12W

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc - black struc	14249056	14249156
black struc - brushed alu	14249062	14249162
black struc - chrome	14249064	14249164
black struc - smoked bronze	14249067	14249167
complete white struc	14249009	14249109
white struc - brushed alu	14249061	14249161
white struc - chrome	14249063	14249163
white struc - smoked bronze	14249066	14249166

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc - lumen values per lamp module)

@3000K / 25°	**881lm / 27W**

CONNECTED > SEE GOODIES

Rektor recessed LED GE



1X LED ARRAY INCL. | 16.25W

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.74KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	**12821032**	**12821132**	**12822032**	**12822132**
white struc	**12821009**	**12821109**	**12822009**	**12822109**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	916lm / 11W	**1257lm / 16.25W**
3000K / 25°	900lm / 11W	**1234lm / 16.25W**

WARM DIM

Rektor recessed LED warm dim GE



1X LED ARRAY INCL. 12W

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.74KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12821232	12821332
white struc	12821209	12821309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**881lm / 12W**

SCOTTY

Design — Couvreur-Devos

Anyone who hears Scotty, will immediately think of the phrase 'Beam me up'. This luminaire certainly lives up to its name. The powerful beam of LED light simply reels you in to admire the architectural design. The light shines straight downwards, which prevents it from shining directly into your eyes. As a result of its refined design, Scotty will blend seamlessly with the rest of your interior. Don't forget to discover its travel companion Spock.

more info? *supermodular.com/en/scotty*

Scotty 270 LED GE



1X LED DISC INCL.

! FOR TRIMLESS INSTALLATION: MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES OUTLET

11799530	CONBOX 375X335X111 PLASTER FINISH TRIMLESS
11799730	CONBOX 375X335X125 CONCRETE FINISH TRIMLESS
11799430	RECESSED RING Ø288 H125

500mA | IP20 | GWT 960° | 1.60KG

	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	-	**11790532**	-	-
white struc	**11790409**	**11790509**	**11790009**	-

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	888lm / 14.2W	**1144lm / 21W**
3000K / 30°	933lm / 14.2W	**1201lm / 21W**

SEMIH 86

SEMIH 61 WITH GOLD REFLECTOR

SEMIH 61 WITH LENS

SEE ALSO

TRACK 230 - P483

GOOD DESIGN

SEMIH

Design — Jeffrey Huyghe

Inspired by the yin-yang symbol, a sinuous 2mm S-shaped line divides Semih in two equal, complementary parts: the hard, solid part mounted to the ceiling and the soft, round lamp housing emitting light. Semih is exceptionally easy to install, thanks to strong mounting magnets. Available in two sizes, Semih is an award-winning luminaire with positive, directed energy.

Flexibility par excellence

Semih's flexibility is an integral part of its design. Closed, it's a sober downlighter with an air of mystery. As the bottom part slowly twists open, it reveals a soft light that flows with movement illuminating the surroundings. Turn it horizontally up to 355°, and tilt it vertically up to 70° on either side.

Two sizes, many spaces

Semih comes in two sizes, ø86 and ø61. The original Semih, whose size and performing light were originally designed for multifunctionality in retail and hospitality, offers various types of light accents. Semih 61's application opens itself further to residential settings and small boutiques, where more subtle lighting is suitable. Semih 61 also fits on our 230V track rail system.

Installation made easy

Installing Semih is a breeze, requiring no visible screws. Just mount the ceiling panel to the ceiling and let the powerful magnets do their job. The reflectors are also clicked on a magnetic inner panel, facilitating replacement. What's more, as all the gear is integrated into the fixture, Semih can easily be connected to 230V standard wiring during renovation works.

more info? *supermodular.com/en/semih*
supermodular.com/en/semih-61

Semih 61 ceiling LED GI



1X LED MODULE INCL. 8.1W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR OR LENS

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10218030	MAGNETIC REFLECTOR Ø57 LED 15° ALU
10218130	MAGNETIC REFLECTOR Ø57 LED 25° ALU
10218230	MAGNETIC REFLECTOR Ø57 LED 40° ALU
10218630	MAGNETIC REFLECTOR Ø57 LED 40° CHAMPAGNE
10218430	MAGNETIC REFLECTOR Ø57 LED 40° GOLD
10217003	LENS Ø57 LED 30°
10213802	SNOOT Ø57 BLACK (ONLY IN COMBINATION WITH LENS)

Friends of hue | 230V | IP20 | GWT 960° | 0.58KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	13440032	13440132
white struc	13440009	13440109

1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13440232	13440332
white struc	13440209	13440309

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	13440432	13440532
white struc	13440409	13440509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**704lm / 11W**
3000K / 25° alu	**704lm / 11W**
3000K / 25° lens	**658lm / 11W**

WARM DIM

Semih 61 ceiling LED warm dim GI



1X LED MODULE INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

OPTICAL ACCESSORIES

10218730	MAGNETIC REFLECTOR Ø57 LED WARM DIM 25° ALU
10218830	MAGNETIC REFLECTOR Ø57 LED WARM DIM 40° ALU
10219230	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° CHAMPAGNE
10219030	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° GOLD

230V | R,C | IP20 | GWT 960° | 0.59KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	13440632
white struc	13440609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**928lm / 15W**

REQUIRED PARTS

Semih 86 LED GI



1X LED ARRAY INCL. 16.2W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 1.28KG

TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13180032	13180132	13180232	13180332	13180432	13180532
white struc	13180009	13180109	13180209	13180309	13180409	13180509

DALI	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13182032	13182132	13182232	13182332	13182432	13182532
white struc	13182009	13182109	13182209	13182309	13182409	13182509

1-10V/PUSHDIM	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13181032	13181132	13181232	13181332	13181432	13181532
white struc	13181009	13181109	13181209	13181309	13181409	13181509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**1448lm / 19W**
3000K / 25°	**1520lm / 19W**

WARM DIM

Semih 86 LED warm dim GI



1X LED ARRAY INCL. 12W

230V | R,C | IP20 | GWT 960° | 1.28KG

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
	25°
black struc	13180632
white struc	13180609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**757lm / 13.5W**

SHELLBY 176 TRIMLESS

SHELLBY 184

SHELLBY

Design — Jeffrey Huyghe

Shellby for general lighting and Shellby for creating mood. A clash of functions, yet the exceptional coexistence of purpose. Sun or moon? Definitely both. Powerful from above, it indisputably lights and energizes daily activities. Softer and a little to the side, it inspires calm and warmth. Shellby's playful and asymmetrical design lets you experiment with aesthetic effects that will charm the entire room.

General light and mood

Our Shellby is quite unique. It offers general lighting by day, and turns into a lovely mood-maker by night. Dim it, with or without integrated warm dim, on ceilings or on walls, it's your light story to tell.

Many Shellbies

Express your space with more than one Shellby. Its asymmetrical, deep-recessed design and seemingly floating sphere add to its playfulness, and enable you to create all kinds of artistic patterns and configurations.

A personal touch of colour

Shellby skin is a decorative inlay made to easily click in Shellby's inner cup. Add a warm, cozy touch to your space by choosing from 4 anodized colours: silver bronze, bronze, champagne and gold. And for a seashell look, experiment with our new pearly white colour. As the light is on, pearly white gives a neutral white look & feel. Off, its unique finish will change to shades of purple, blue, green, and more, as you walk around the luminaire.

more info? *supermodular.com/en/shellby*

SHELLBY 184
SHELLBY SKIN ANO SILVER BRONZE

SHELLBY 184

SHELLBY SKIN PEARLY WHITE
SHELLBY SKIN ANO SILVER BRONZE
SHELLBY SKIN ANO CHAMPAGNE
SHELLBY SKIN ANO GOLD
SHELLBY SKIN ANO BRONZE

Shellby 184 LED GE





1X LED ARRAY INCL. 8.5W

Friends of hue | 500mA | IP55 | GWT 960° | 0.86KG

	2700K / CRI90+	3000K / CRI90+
black struc	12180032	12180132
white struc	12180009	12180109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030	CONBOX 280X350X100X380
12293030	GYPSUM FIBREBOARD 290X280

OPTICAL ACCESSORIES

12183041	SHELLBY SKIN ANO CHAMPAGNE
12183042	SHELLBY SKIN ANO GOLD
12183082	SHELLBY SKIN ANO BRONZE
12183084	SHELLBY SKIN ANO SILVER BRONZE
12183092	SHELLBY SKIN PEARLY WHITE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K	375lm / 5.7W	**505lm / 8.5W**	655lm / 12.4W
3000K	383lm / 5.7W	**516lm / 8.5W**	668lm / 12.4W

WARM DIM

Shellby 184 LED warm dim GE





1X LED ARRAY INCL. 12W

Friends of hue | 350mA | IP55 | GWT 960° | 0.86KG

	1800K - 3000K / CRI90+
black struc	12180232
white struc	12180209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030	CONBOX 280X350X100X380
12293030	GYPSUM FIBREBOARD 290X280

OPTICAL ACCESSORIES

12183041	SHELLBY SKIN ANO CHAMPAGNE
12183042	SHELLBY SKIN ANO GOLD
12183082	SHELLBY SKIN ANO BRONZE
12183084	SHELLBY SKIN ANO SILVER BRONZE
12183092	SHELLBY SKIN PEARLY WHITE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K	**508lm / 12W**

SHELLBY 176 TRIMLESS

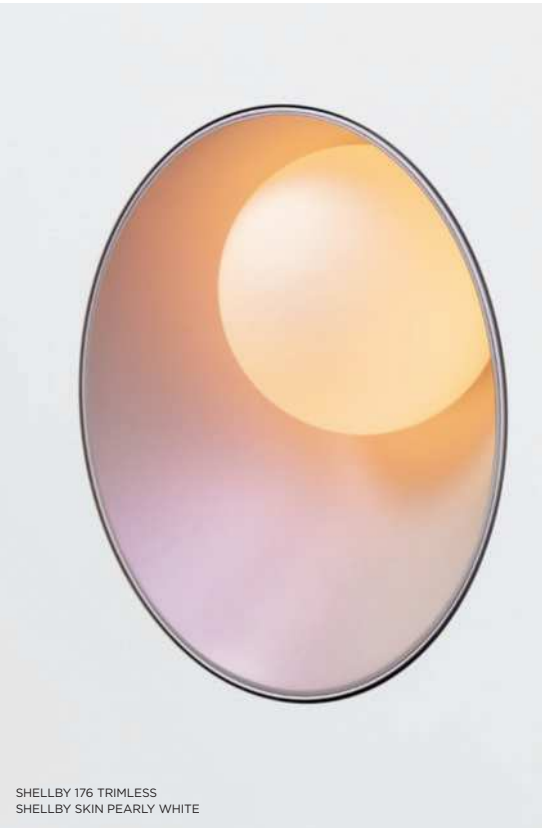

SHELLBY 176 TRIMLESS
SHELLBY SKIN PEARLY WHITE

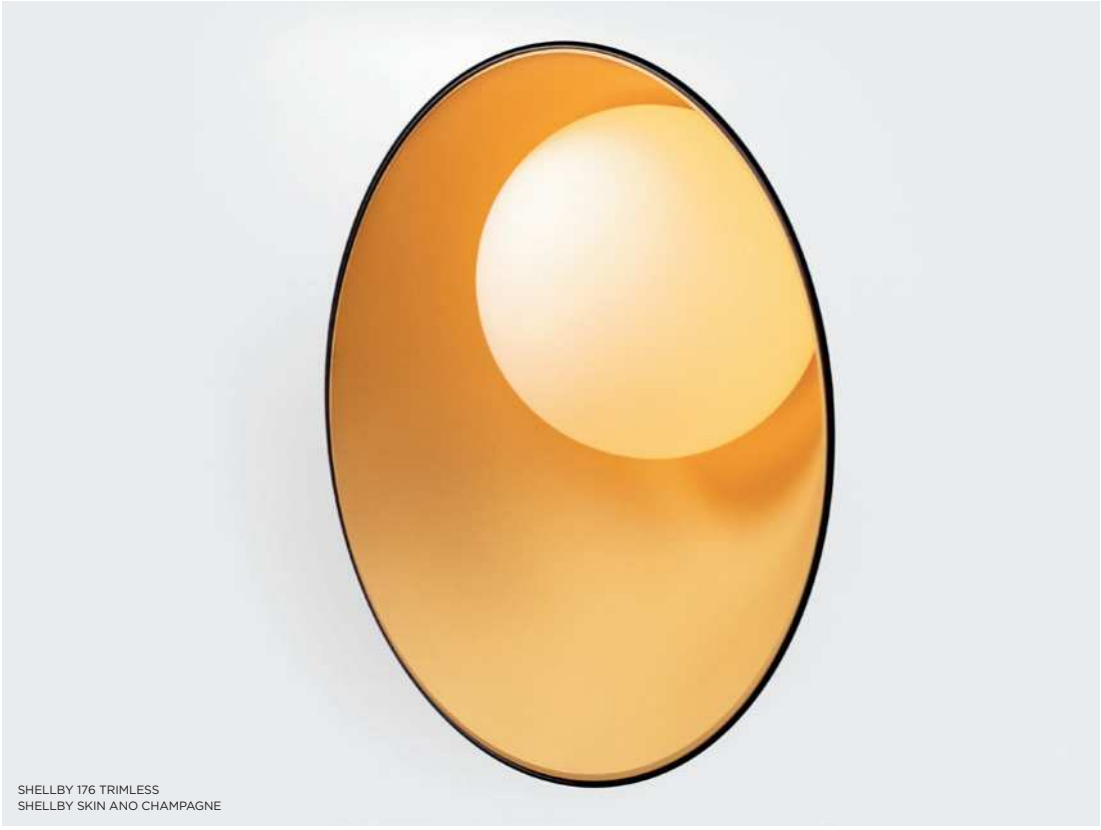

SHELLBY 176 TRIMLESS
SHELLBY SKIN ANO CHAMPAGNE

Shellby 176 trimless LED GE





1X LED ARRAY INCL. 8.5W

	2700K / CRI90+	3000K / CRI90+
black struc	12181032	12181132
white struc	12181009	12181109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

NSTALLATION ACCESSORIES > SEE PAGE 255

12182030	CONBOX 280X350X100X380
12292930	GYPKITTRIMLESS 290X280 - Ø177
12182130	CONCRETE KIT 290X280 - Ø177
12293030	GYPSUM FIBREBOARD 290X280
12182230	RECESSED RING Ø177
12182330	CONCRETE RING Ø177 STAND CONCRETE BOXES

OPTICAL ACCESSORIES

12183041	SHELLBY SKIN ANO CHAMPAGNE
12183042	SHELLBY SKIN ANO GOLD
12183082	SHELLBY SKIN ANO BRONZE
12183084	SHELLBY SKIN ANO SILVER BRONZE
12183092	SHELLBY SKIN PEARLY WHITE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K	375lm / 5.7W	**505lm / 8.5W**	655lm / 12.4W
3000K	383lm / 5.7W	**516lm / 8.5W**	668lm / 12.4W

WARM DIM

Shellby 176 trimless LED warm dim GE





1X LED ARRAY INCL. 12W

	1800K - 3000K / CRI90+
black struc	12181232
white struc	12181209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030	CONBOX 280X350X100X380
12292930	GYPKITTRIMLESS 290X280 - Ø177
12182130	CONCRETE KIT 290X280 - Ø177
12293030	GYPSUM FIBREBOARD 290X280
12182230	RECESSED RING Ø177
12182330	CONCRETE RING Ø177 STAND CONCRETE BOXES

OPTIONAL ACCESSORIES > SEE ABOVE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K	**508lm / 12W**

REQUIRED PARTS BASED ON CEILING TYPE

SHELLBY 176 TRIMLESS

SHELLBY 184
SHELLBY SKIN ANO BRONZE

INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

SHELLBY 176	**PLASTERED** FINISH
	SHELLBY 176
	12182230 RECESSED RING Ø177
	 ø 200 h 100

INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SHELLBY 176	**EXPOSED CONCRETE** FINISH
	SHELLBY 176
	12182330 CONCRETE RING Ø177 STAND CONCRETE BOXES
	 ø 200 h 100

INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

SHELLBY 176/184	**12182030** CONBOX 280x350x100x380 	+	**PLASTERED** FINISH		**EXPOSED CONCRETE** FINISH
			SHELLBY 176/184	**SHELLBY 176**	**SHELLBY 176**
			12293030 GYPSUM FIBREBOARD 290x280 	**12292930** GYPKIT TRIMLESS 290X280 - Ø177 	**12182130** CONCRETE KIT 290x280 - Ø177 

SLIDE

Slide is one of Modular L.I.'s icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a softer and smooth lighting experience.

Sliding beam of light

Slide owes its popularity to its deeply embedded light source. It is available in donkey grey structure with a black inner body or in an entirely white structure version.

more info? *supermodular.com/en/slide*

Slide IP55 LED GE





1X LED ARRAY INCL. 9.2W

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.30KG

	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc - black	**10486174**	**10486374**
white struc	**10486109**	**10486309**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	387lm / 6.2W	**498lm / 9.2W**
3000K / 25°	410lm / 6.2W	**551lm / 9.2W**

Slide IP55 LED RG



1X LED ARRAY INCL. 9.2W

230V | R,C | IP55 | GWT 960° | 0.40KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc - black	**10486574**	**10486774**
white struc	**10486509**	**10486709**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**498lm / 12W**
3000K / 25°	**551lm / 12W**

SMART CAKE 82

SMART KUP 115

SMART LOTIS 115

SMART CAKE 82 ADJUSTABLE

SMART KUP 82 ADJUSTABLE

SMART LOTIS 82 ADJUSTABLE

SMART
CAKE/KUP/LOTIS

Designers can stay up all night trying all sorts of things with Smart, our most versatile range of architectural lighting. Mix and match, from a mosaic of shapes, sizes, colours and mounting options, and create a playful installation while maintaining a consistent look and feel. The Smart choice for any application.

3 designs that multiply

Smart's 3 designs are a party for designers. Double the fun, Lotis, Cake and Kup come in fixed and adjustable versions. Adding colour to fun, all variations come in black structure, white structure and a warm, golden finish, and can further be combined with all Smart accessories.

Limitless combinations

Play with shapes and depth. Smart mask is the opportunity to play with round lights in a square or rectangular shape. Smart box adds dimension by protruding from the ceiling, hugging any of the 3 designs. Smart tubed, suspended, surface-mounted on wall or ceiling, gives depths to the circular design, emitting down/up light. Smart tubed 82 easily slides in our 230V track rail.

Join the ball

Smart ball flaunts a bubbly, spherical shape, in two sizes: Smart ball 82 and Smart ball 115. In white or back structure, it hangs gracefully from a thin matte black suspension cable. As with the other accessories, combine Smart ball with a differently coloured light in any of the 3 designs, for a little contrast and fun. Smart is also warm-dim compatible.

more info? *supermodular.com/en/smart-cake*
supermodular.com/en/smart-kup
supermodular.com/en/smart-lotis

Smart cake 48 + IP55 LED GE





1X LED ARRAY INCL. | 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.11KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12872132**	**12872032**	**12872232**
gold	**12872146**	**12872046**	**12872246**
white struc	**12872109**	**12872009**	**12872209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25°	**152lm / 3W**	206lm / 4.3W
3000K / 25°	**152lm / 3W**	206lm / 4.3W
4000K / 25°	**164lm / 3W**	222lm / 4.3W

Smart cake 48 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.13KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12870132**	**12870032**	**12870232**
gold	**12870146**	**12870046**	**12870246**
white struc	**12870109**	**12870009**	**12870209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	71lm / 1W	**101lm / 1.5W**
3000K / 25°	75lm / 1W	**106lm / 1.5W**
4000K / 25°	83lm / 1W	**117lm / 1.5W**

Smart cake 48 IP55 LED GE





1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.14KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12871132**	**12871032**	**12871232**
gold	**12871146**	**12871046**	**12871246**
white struc	**12871109**	**12871009**	**12871209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	67lm / 1W	**94lm / 1.5W**
3000K / 25°	71lm / 1W	**99lm / 1.5W**
4000K / 25°	78lm / 1W	**110lm / 1.5W**

WARM DIM

Smart cake 48 IP55 LED warm dim GE





1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 250mA | IP55 | GWT 960° | 0.11KG

	1800K - 3000K / CRI90+
	25°
black struc	**12871332**
gold	**12871346**
white struc	**12871309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**121lm / 4W**

Smart cake 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

	2700K / CRI90+		
	15°	25°	40°
black struc	12411632	12411032	12411232
gold	12411646	12411046	12411246
white struc	12411609	12411009	12411209
	3000K / CRI90+		
	15°	25°	40°
black struc	12411732	12411432	12411532
gold	12411746	12411446	12411546
white struc	12411709	12411409	12411509
	4000K / CRI90+		
	15°	25°	40°
black struc	12411832	12411132	12411332
gold	12411846	12411146	12411346
white struc	12411809	12411109	12411309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	513lm / 6.2W	**689lm / 9.2W**	885lm / 13.4W
3000K / 25°	533lm / 6.2W	**716lm / 9.2W**	920lm / 13.4W
4000K / 25°	583lm / 6.2W	**733lm / 9.2W**	943lm / 13.4W

WARM DIM

Smart cake 82 LED warm dim GE



1X LED ARRAY INCL. 6W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12413132	12413232
gold	12413146	12413246
white struc	12413109	12413209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**452lm / 6W**

Smart cake 82 IP55 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.36KG

	2700K / CRI90+		
	15°	25°	40°
black struc	12412632	12412032	12412132
gold	12412646	12412046	12412146
white struc	12412609	12412009	12412109
	3000K / CRI90+		
	15°	25°	40°
black struc	12412732	12412332	12412432
gold	12412746	12412346	12412446
white struc	12412709	12412309	12412409
	4000K / CRI90+		
	15°	25°	40°
black struc	12412832	12412532	12412232
gold	12412846	12412546	12412246
white struc	12412809	12412509	12412209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

/LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	444lm / 6.2W	**596lm / 9.2W**	766lm / 13.4W
3000K / 25°	462lm / 6.2W	**619lm 9.2W**	797lm / 13.4W
4000K / 25°	505lm / 6.2W	**635lm / 9.2W**	816lm / 13.4W

WARM DIM

Smart cake 82 IP55 LED warm dim GE



1X LED ARRAY INCL. 6W

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.36KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12414132	12414232
gold	12414146	12414246
white struc	12414109	12414209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**400lm / 6W**

Smart cake 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

Friends of hue · 350mA · IP20 · GWT 960° · 0.65KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13320132	13320232	13321132	13321232	13322132	13322232
gold	13320146	13320246	13321146	13321246	13322146	13322246
white struc	13320109	13320209	13321109	13321209	13322109	13322209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	420lm / 6.3W	**546lm / 9.2W**
3000K / 25°	442lm / 6.3W	**574lm / 9.2W**
4000K / 25°	471lm / 6.3W	**612lm / 9.2W**

WARM DIM

Smart cake 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

Friends of hue · 350mA · IP20 · GWT 960° · 0.65KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	13323132	13323232
gold	13323146	13323246
white struc	13323109	13323209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**414lm / 6W**

Smart cake 82 GU10 GE for tube/box



1X LED GU10 EXCL. INCL.

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.14KG

black struc	**12420232**
gold	**12420246**
white struc	**12420209**

Smart cake 82 GU10



1X LED GU10 INCL. | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

RESISTIVE DIMMABLE	
black struc	**12420132**
gold	**12420146**
white struc	**12420109**

Smart cake 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

III	
12V	
IP20	
GWT 960°	
0.10KG	

black struc	**12420032**
white struc	**12420009**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

Smart cake 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP20 | GWT 960° | 0.52KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12741232	12741032	12741332	12740032
gold	12741246	12741046	12741346	12740046
white struc	12741209	12741009	12741309	12740009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12741432	12741532	12741632	12740132
gold	12741446	12741546	12741646	12740146
white struc	12741409	12741509	12741609	12740109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12741732	12741132	12741832	12740232
gold	12741746	12741146	12741846	12740246
white struc	12741709	12741109	12741809	12740209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1019lm / 11W	**1397lm / 16.25W**	1858lm / 23.6W
3000K / 25°	1000lm / 11W	**1372lm / 16.25W**	1825lm / 23.6W
4000K / 25°	1166lm / 11W	**1599lm / 16.25W**	2127lm / 23.6W

Smart cake 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP54 | GWT 960° | 0.53KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12742232	12742032	12742332	12740332
gold	12742246	12742046	12742346	12740346
white struc	12742209	12742009	12742309	12740309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12742432	12742532	12742632	12740432
gold	12742446	12742546	12742646	12740446
white struc	12742409	12742509	12742609	12740409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12742732	12742132	12742832	12740532
gold	12742746	12742146	12742846	12740546
white struc	12742709	12742109	12742809	12740509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	983lm / 11W	**1348lm / 16.25W**	1793lm / 23.6W
3000K / 25°	965lm / 11W	**1323lm / 16.25W**	1760lm / 23.6W
4000K / 25°	1125lm / 11W	**1543lm / 16.25W**	2052lm / 23.6W

Smart cake 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	12743032	12743532	12743132
gold	12743046	12743546	12743146
white struc	12743009	12743509	12743109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 85°	694lm / 11W	**952lm / 16.25W**	1266lm / 23.6W
3000K / 85°	682lm / 11W	**934lm / 16.25W**	1243lm / 23.6W
4000K / 85°	794lm / 11W	**1089lm / 16.25W**	1449lm / 23.6W

Smart cake 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

	2700K / CRI90+		
	15°	25°	40°
black struc	12771232	12771032	12771332
gold	12771246	12771046	12771346
white struc	12771209	12771009	12771309
	3000K / CRI90+		
	15°	25°	40°
black struc	12771432	12771532	12771632
gold	12771446	12771546	12771646
white struc	12771409	12771509	12771609
	4000K / CRI90+		
	15°	25°	40°
black struc	12771732	12771132	12771832
gold	12771746	12771146	12771846
white struc	12771709	12771109	12771809

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	471lm / 6.2W	**632lm / 9.2W**	812lm / 13.4W
3000K / 25°	489lm / 6.2W	**657lm / 9.2W**	844lm / 13.4W
4000K / 25°	535lm / 6.2W	**673lm / 9.2W**	865lm / 13.4W

WARM DIM

Smart cake 115 adjustable LED warm dim GE





1X LED ARRAY INCL. | 12W

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.49KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12773132	12773232
gold	12773146	12773246
white struc	12773109	12773209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**766lm / 12W**

Smart cake 115 adjustable GU10





1X LED GU10 INCL. | GU10 | MAX. 50W

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.46KG

RESISTIVE DIMMABLE	
black struc	12772032
gold	12772046
white struc	12772009

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart cake 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | 1200mA | IP55 | GWT 960° | 0.98KG

	2700K / CRI90+		
	15°	25°	40°
black struc	**13004032**	**13004332**	**13004632**
white struc	**13004009**	**13004309**	**13004609**
	3000K / CRI90+		
	15°	25°	40°
black struc	**13004132**	**13004432**	**13004732**
white struc	**13004109**	**13004409**	**13004709**
	4000K / CRI90+		
	15°	25°	40°
black struc	**13004232**	**13004532**	**13004832**
white struc	**13004209**	**13004509**	**13004809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 25°	1702lm / 16W	2318lm / 23.5W	2877lm / 30.8W	3327lm / 36.3W	**3737lm / 42W**	4303lm / 49.7W
3000K / 25°	1765lm / 16W	2404lm / 23.5W	2983lm / 30.8W	3450lm / 36.3W	**3876lm / 42W**	4462lm / 49.7W
4000K / 25°	1908lm / 16W	2598lm / 23.5W	3225lm / 30.8W	3730lm / 36.3W	**4189lm / 42W**	4823lm / 49.7W

Smart cake 160 diffuse IP55 LED GE



1X LED ARRAY INCL. | 42W

! 3500K ON REQUEST

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	75°	75°	75°
black struc	**13005032**	**13005132**	**13005232**
white struc	**13005009**	**13005109**	**13005209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 75°	1385lm / 16W	1886lm / 23.5W	2341lm / 30.8W	2707lm / 36.3W	**3040lm / 42W**	3500lm / 49.7W
3000K / 75°	1436lm / 16W	1955lm / 23.5W	2427lm / 30.8W	2807lm / 36.3W	**3153lm / 42W**	3630lm / 49.7W
4000K / 75°	1552lm / 16W	2114lm / 23.5W	2624lm / 30.8W	3034lm / 36.3W	**3408lm / 42W**	3924lm / 49.7W

DRIVER > SEE PRODUCT PAGE ON WEBSITE
SMART COMBINATIONS > SEE PAGES 320-329
CONNECTED > SEE GOODIES

Smart kup 48 + IP55 LED GE



1X LED ARRAY INCL. | 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12882132**	**12882032**	**12882232**
gold	**12882146**	**12882046**	**12882246**
white struc	**12882109**	**12882009**	**12882209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25°	**231lm / 3W**	312lm / 4.3W
3000K / 25°	**231lm / 3W**	312lm / 4.3W
4000K / 25°	**249lm / 3W**	336lm / 4.3W

Smart kup 48 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12880132**	**12880032**	**12880232**
gold	**12880146**	**12880046**	**12880246**
white struc	**12880109**	**12880009**	**12880209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	84lm / 1W	**119lm / 1.5W**
3000K / 25°	89lm / 1W	**125lm / 1.5W**
4000K / 25°	98lm / 1W	**138lm / 1.5W**

Smart kup 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

Friends of hue | 500mA | IP55 | GWT 960° | 0.13KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12881132	12881032	12881232
gold	12881146	12881046	12881246
white struc	12881109	12881009	12881209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25°	81lm / 1W	**114lm / 1.5W**
3000K / 25°	85lm / 1W	**120lm / 1.5W**
4000K / 25°	94lm / 1W	**132lm / 1.5W**

WARM DIM

Smart kup 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

Friends of hue | 250mA | IP55 | GWT 960° | 0.12KG

	1800K - 3000K / CRI90+
	25°
black struc	12881332
gold	12881346
white struc	12881309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**184lm / 4W**

Smart kup 82 LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

	2700K / CRI90+		
	15°	25°	40°
black struc	12471632	12471032	12471232
gold	12471646	12471046	12471246
white struc	12471609	12471009	12471209
	3000K / CRI90+		
	15°	25°	40°
black struc	12471732	12471432	12471532
gold	12471746	12471446	12471546
white struc	12471709	12471409	12471509
	4000K / CRI90+		
	15°	25°	40°
black struc	12471832	12471132	12471332
gold	12471846	12471146	12471346
white struc	12471809	12471109	12471309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	554lm / 6.2W	**744lm / 9.2W**	956lm / 13.4W
3000K / 25°	576lm / .2W	**773lm / 9.2W**	994lm / 13.4W
4000K / 25°	630lm / 6.2W	**792lm / 9.2W**	1018lm / 13.4W

WARM DIM

Smart kup 82 LED warm dim GE





1X LED ARRAY INCL. 6W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12473132	12473232
gold	12473146	12473246
white struc	12473109	12473209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**485lm / 6W**

Smart kup 82 IP55 LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.36KG

	2700K / CRI90+		
	15°	25°	40°
black struc	12472632	12472032	12472132
gold	12472646	12472046	12472146
white struc	12472609	12472009	12472109
	3000K / CRI90+		
	15°	25°	40°
black struc	12472732	12472332	12472432
gold	12472746	12472346	12472446
white struc	12472709	12472309	12472409
	4000K / CRI90+		
	15°	25°	40°
black struc	12472832	12472532	12472232
gold	12472846	12472546	12472246
white struc	12472809	12472509	12472209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	529lm/ 6.2W	**710lm / 9.2W**	912lm / 13.4W
3000K / 25°	550lm/ 6.2W	**738lm / 9.2W**	949lm / 13.4W
4000K / 25°	601lm / 6.2W	**756lm / 9.2W**	972lm / 13.4W

WARM DIM

Smart kup 82 IP55 LED warm dim GE





1X LED ARRAY INCL. 6W

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.36KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12474132	12474232
gold	12474146	12474246
white struc	12474109	12474209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**444lm / 6W**

Smart kup 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

350mA | IP20 | GWT 960° | 0.65KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13330132	13330232	13331132	13331232	13332132	13332232
gold	13330146	13330246	13331146	13331246	13332146	13332246
white struc	13330109	13330209	13331109	13331209	13332109	13332209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	525lm / 6.3W	**682lm / 9.2W**
3000K / 25°	552lm / 6.3W	**717lm / 9.2W**
4000K / 25°	589lm / 6.3W	**765lm / 9.2W**

WARM DIM

Smart kup 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

350mA | IP20 | GWT 960° | 0.65KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	13333132	13333232
gold	13333146	13333246
white struc	13333109	13333209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**498lm / 6W**

Smart kup 82 GU10 GE for tube/box





1X LED GU10 EXCL. INCL.

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.14KG

black struc	**12480232**
gold	**12480246**
white struc	**12480209**

Smart kup 82 GU10





1X LED GU10 INCL. | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

RESISTIVE DIMMABLE	
black struc	**12480132**
gold	**12480146**
white struc	**12480109**

Smart kup 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP20 | GWT 960° | 0.46KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12761232	12761032	12761332	12760032
gold	12761246	12761046	12761346	12760046
white struc	12761209	12761009	12761309	12760009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12761432	12761532	12761632	12760132
gold	12761446	12761546	12761646	12760146
white struc	12761409	12761509	12761609	12760109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12761732	12761132	12761832	12760232
gold	12761746	12761146	12761846	12760246
white struc	12761709	12761109	12761809	12760209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1065lm / 11W	**1461lm / 16.25W**	1943lm / 23.6W
3000K / 25°	1046lm / 11W	**1434lm / 16.25W**	1908lm / 23.6W
4000K / 25°	1219lm / 11W	**1672lm / 16.25W**	2224lm / 23.6W

Smart kup 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP54 | GWT 960° | 0.49KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12762232	12762032	12762332	12760332
gold	12762246	12762046	12762346	12760346
white struc	12762209	12762009	12762309	12760309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12762432	12762532	12762632	12760432
gold	12762446	12762546	12762646	12760446
white struc	12762409	12762509	12762609	12760409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12762732	12762132	12762832	12760532
gold	12762746	12762146	12762846	12760546
white struc	12762709	12762109	12762809	12760509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1029lm / 11W	**1412lm / 16.25W**	1878lm / 23.6W
3000K / 25°	1011lm / 11W	**1386lm / 16.25W**	1844lm / 23.6W
4000K / 25°	1178lm / 11W	**1616lm / 16.25W**	2150lm / 23.6W

Smart kup 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.48KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	12763032	12763532	12763132
gold	12763046	12763546	12763146
white struc	12763009	12763509	12763109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 85°	811lm / 11W	**1113lm / 16.25W**	1480lm / 23.6W
3000K / 85°	797lm / 11W	**1092lm / 16.25W**	1453lm / 23.6W
4000K / 85°	928lm / 11W	**1273lm / 16.25W**	1694lm / 23.6W

Smart kup 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.43KG

	2700K / CRI90+		
	15°	25°	40°
black struc	12791232	12791032	12791332
gold	12791246	12791046	12791346
white struc	12791209	12791009	12791309
	3000K / CRI90+		
	15°	25°	40°
black struc	12791432	12791532	12791632
gold	12791446	12791546	12791646
white struc	12791409	12791509	12791609
	4000K / CRI90+		
	15°	25°	40°
black struc	12791732	12791132	12791832
gold	12791746	12791146	12791846
white struc	12791709	12791109	12791809

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	554lm / 6.2W	**744lm / 9.2W**	956lm / 13.4W
3000K / 25°	576lm / 6.2W	**773lm / 9.2W**	994lm / 13.4W
4000K / 25°	630lm/ 6.2W	**792lm / 9.2W**	1018lm / 13.4W

WARM DIM

Smart kup 115 adjustable LED warm dim GE





1X LED ARRAY INCL. | 12W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12793132	12793232
gold	12793146	12793246
white struc	12793109	12793209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**903lm / 12W**

Smart kup 115 adjustable GU10





1X LED GU10 INCL. | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

RESISTIVE DIMMABLE	
black struc	12792032
gold	12792046
white struc	12792009

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart kup 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13024032**	**13024332**	**13024632**	**13026032**
white struc	**13024009**	**13024309**	**13024609**	**13026009**
	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13024132**	**13024432**	**13024732**	**13026132**
white struc	**13024109**	**13024409**	**13024709**	**13026109**
	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13024232**	**13024532**	**13024832**	**13026232**
white struc	**13024209**	**13024509**	**13024809**	**13026209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 25°	1801lm / 16W	2453lm / 23.5W	3044lm / 30.8W	3521lm / 36.3W	**3955lm / 42W**	4553lm / 49.7W
3000K / 25°	1868lm / 16W	2543lm / 23.5W	3157lm / 30.8W	3651lm / 36.3W	**4101lm / 42W**	4721lm / 49.7W
4000K / 25°	2019lm / 16W	2749lm / 23.5W	3413lm / 30.8W	3947lm / 36.3W	**4433lm / 42W**	5104lm / 49.7W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Smart kup 160 diffuse IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	80°	80°	80°
black struc	**13025032**	**13025132**	**13025232**
white struc	**13025009**	**13025109**	**13025209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 80°	1494lm / 16W	2034lm / 23.5W	2525lm / 30.8W	2920lm / 36.3W	**3280lm / 42W**	3776lm / 49.7W
3000K / 80°	1549lm / 16W	2110lm / 23.5W	2618lm / 30.8W	3028lm / 36.3W	**3401lm / 42W**	3916lm / 49.7W
4000K / 80°	1675lm / 16W	2280lm / 23.5W	2830lm / 30.8W	3273lm / 36.3W	**3676lm / 42W**	4233lm / 49.7W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Smart asy lotis 48 + IP55 LED GE





1X LED ARRAY INCL. 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.11KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12892132**	**12892032**	**12892232**
gold	**12892146**	**12892046**	**12892246**
white struc	**12892109**	**12892009**	**12892209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	**206lm / 3W**	279lm / 4.3W
3000K / 25°	**206lm / 3W**	279lm / 4.3W
4000K / 25°	**222lm / 3W**	300lm / 4.3W

Smart asy lotis 48 LED GE





1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.10KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12890132**	**12890032**	**12890232**
gold	**12890146**	**12890046**	**12890246**
white struc	**12890109**	**12890009**	**12890209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	82lm / 1W	**116lm / 1.5W**
3000K / 25°	87lm / 1W	**122lm / 1.5W**
4000K / 25°	96lm / 1W	**135lm / 1.5W**

Smart asy lotis 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.11KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12891132**	**12891032**	**12891232**
gold	**12891146**	**12891046**	**12891246**
white struc	**12891109**	**12891009**	**12891209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	78lm / 1W	**110lm / 1.5W**
3000K / 25°	83lm / 1W	**116lm / 1.5W**
4000K / 25°	91lm / 1W	**128lm / 1.5W**

WARM DIM

Smart asy lotis 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 250mA | IP55 | GWT 960° | 0.11KG

	1800K - 3000K / CRI90+
	25°
black struc	**12891332**
gold	**12891346**
white struc	**12891309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**160lm / 4W**

Smart lotis 48 + IP55 LED GE





1X LED ARRAY INCL. | 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12862132**	**12862032**	**12862232**
gold	**12862146**	**12862046**	**12862246**
white struc	**12862109**	**12862009**	**12862209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	500mA
2700K / 25°	**224lm / 3W**	303lm / 4.3W
3000K / 25°	**224lm / 3W**	303lm / 4.3W
4000K / 25°	**241lm / 3W**	326lm / 4.3W

Smart lotis 48 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12860132**	**12860032**	**12860232**
gold	**12860146**	**12860046**	**12860246**
white struc	**12860109**	**12860009**	**12860209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	84lm / 1W	**119lm / 1.5W**
3000K / 25°	89lm / 1W	**125lm / 1.5W**
4000K / 25°	98lm / 1W	**138lm / 1.5W**

Smart lotis 48 IP55 LED GE





1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.13KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12861132**	**12861032**	**12861232**
gold	**12861146**	**12861046**	**12861246**
white struc	**12861109**	**12861009**	**12861209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	81lm / 1W	**114lm / 1.5W**
3000K / 25°	85lm / 1W	**120lm / 1.5W**
4000K / 25°	94lm / 1W	**132lm / 1.5W**

WARM DIM

Smart lotis 48 IP55 LED warm dim GE





1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Friends of hue | III | 250mA | IP55 | GWT 960° | 0.12KG

	1800K - 3000K / CRI90+
	25°
black struc	**12861332**
gold	**12861346**
white struc	**12861309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**180lm / 4W**

Smart lotis 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

	2700K / CRI90+		
	15°	25°	40°
black struc	12441632	12441032	12441232
gold	12441646	12441046	12441246
white struc	12441609	12441009	12441209
	3000K / CRI90+		
	15°	25°	40°
black struc	12441732	12441432	12441532
gold	12441746	12441446	12441546
white struc	12441709	12441409	12441509
	4000K / CRI90+		
	15°	25°	40°
black struc	12441832	12441132	12441332
gold	12441846	12441146	12441346
white struc	12441809	12441109	12441309

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	554lm / 6.2W	**744lm / 9.2W**	956lm / 13.4W
3000K / 25°	576lm / 6.2W	**773lm / 9.2W**	994lm / 13.4W
4000K / 25°	630lm / 6.2W	**792lm / 9.2W**	1018lm / 13.4W

WARM DIM

Smart lotis 82 LED warm dim GE



1X LED ARRAY INCL. 6W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12443132	12443232
gold	12443146	12443246
white struc	12443109	12443209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**485lm / 6W**

Smart lotis 82 IP55 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.36KG

	2700K / CRI90+		
	15°	25°	40°
black struc	12442632	12442032	12442132
gold	12442646	12442046	12442146
white struc	12442609	12442009	12442109
	3000K / CRI90+		
	15°	25°	40°
black struc	12442732	12442332	12442432
gold	12442746	12442346	12442446
white struc	12442709	12442309	12442409
	4000K / CRI90+		
	15°	25°	40°
black struc	12442832	12442532	12442232
gold	12442846	12442546	12442246
white struc	12442809	12442509	12442209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	529lm / 6.2W	**710lm / 9.2W**	912lm / 13.4W
3000K / 25°	550lm / 6.2W	**738lm / 9.2W**	949lm / 13.4W
4000K / 25°	601lm / 6.2W	**756lm / 9.2W**	972lm / 13.4W

WARM DIM

Smart lotis 82 IP55 LED warm dim GE



1X LED ARRAY INCL. 6W

Friends of hue | III | 350mA | IP55 | GWT 960° | 0.36KG

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12444132	12444232
gold	12444146	12444246
white struc	12444109	12444209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**444lm / 6W**

Smart lotis 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

Friends of hue · III · 350mA · IP20 · GWT 960° · 0.65KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13310132	13310232	13311132	13311232	13312132	13312232
gold	13310146	13310246	13311146	13311246	13312146	13312246
white struc	13310109	13310209	13311109	13311209	13312109	13312209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	525lm / 6.3W	**682lm / 9.2W**
3000K / 25°	552lm / 6.3W	**717lm / 9.2W**
4000K / 25°	589lm / 6.3W	**765lm / 9.2W**

WARM DIM

Smart lotis 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76
12500230	SMART RECESSED RING 82

Friends of hue · III · 350mA · IP20 · GWT 960° · 0.65KG

	1800K - 3000K / CRI90+	
	35°	45°
black struc	13313132	13313232
gold	13313146	13313246
white struc	13313109	13313209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

1800K - 3000K / 35°	**498lm / 6W**

Smart lotis 82 GU10 GE for tube/box



1X LED GU10 EXCL. INCL.

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.14KG

black struc	12450232
gold	12450246
white struc	12450209

Smart lotis 82 GU10



1X LED GU10 INCL. | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

RESISTIVE DIMMABLE	
black struc	12450132
gold	12450146
white struc	12450109

Smart lotis 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

III	
12V	
IP20	
GWT 960°	
0.10KG	

black struc	**12450032**

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70 R35-88
12500230	SMART RECESSED RING 82

Smart lotis 115 LED GE





1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP20 | GWT 960° | 0.46KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12751232	12751032	12751332	12750032
gold	12751246	12751046	12751346	12750046
white struc	12751209	12751009	12751309	12750009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12751432	12751532	12751632	12750132
gold	12751446	12751546	12751646	12750146
white struc	12751409	12751509	12751609	12750109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12751732	12751132	12751832	12750232
gold	12751746	12751146	12751846	12750246
white struc	12751709	12751109	12751809	12750209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1065lm / 11W	**1461lm / 16.25W**	1943lm / 23.6W
3000K / 25°	1046lm / 11W	**1434lm / 16.25W**	1908lm / 23.6W
4000K / 25°	1219lm / 11W	**1672lm / 16.25W**	2224lm / 23.6W

Smart lotis 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

Friends of hue | 500mA | IP54 | GWT 960° | 0.48KG

	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12752232	12752032	12752332	12750332
gold	12752246	12752046	12752346	12750346
white struc	12752209	12752009	12752309	12750309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12752432	12752532	12752632	12750432
gold	12752446	12752546	12752646	12750446
white struc	12752409	12752509	12752609	12750409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12752732	12752132	12752832	12750532
gold	12752746	12752146	12752846	12750546
white struc	12752709	12752109	12752809	12750509

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	1029lm / 11W	**1412lm / 16.25W**	1878lm / 23.6W
3000K / 25°	1011lm / 11W	**1386lm / 16.25W**	1844lm / 23.6W
4000K / 25°	1178lm / 11W	**1616lm / 16.25W**	2150lm / 23.6W

Smart lotis 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

500mA | IP54 | GWT 960° | 0.47KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	**12753032**	**12753532**	**12753132**
gold	**12753046**	**12753546**	**12753146**
white struc	**12753009**	**12753509**	**12753109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 85°	816lm / 11W	**1119lm / 16.25W**	1489lm / 23.6W
3000K / 85°	801lm / 11W	**1099lm / 16.25W**	1462lm / 23.6W
4000K / 85°	934lm / 11W	**1281lm / 16.25W**	1704lm / 23.6W

Smart lotis 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

500mA | IP20 | GWT 960° | 0.43KG

	2700K / CRI90+		
	15°	25°	40°
black struc	**12781232**	**12781032**	**12781332**
gold	**12781246**	**12781046**	**12781346**
white struc	**12781209**	**12781009**	**12781309**
	3000K / CRI90+		
	15°	25°	40°
black struc	**12781432**	**12781532**	**12781632**
gold	**12781446**	**12781546**	**12781646**
white struc	**12781409**	**12781509**	**12781609**
	4000K / CRI90+		
	15°	25°	40°
black struc	**12781732**	**12781132**	**12781832**
gold	**12781746**	**12781146**	**12781846**
white struc	**12781709**	**12781109**	**12781809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	554lm / 6.2W	**744lm / 9.2W**	956lm / 13.4W
3000K / 25°	576lm / 6.2W	**773lm / 9.2W**	994lm / 13.4W
4000K / 25°	630lm / 6.2W	**792lm / 9.2W**	1018lm / 13.4W

WARM DIM

Smart lotis 115 adjustable LED warm dim GE





1X LED ARRAY INCL. | 12W

	1800K - 3000K / CRI90+	
	25°	40°
black struc	12783132	12783232
gold	12783146	12783246
white struc	12783109	12783209

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**903lm / 12W**

Smart lotis 115 adjustable GU10





1X LED GU10 INCL. | GU10 | MAX. 50W

RESISTIVE DIMMABLE	
black struc	12782032
gold	12782046
white struc	12782009

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart lotis 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | 1200mA | IP55 | GWT 960° | 0.88KG

	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13014032**	**13014332**	**13014632**	**13016032**
white struc	**13014009**	**13014309**	**13014609**	**13016009**
	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13014132**	**13014432**	**13014732**	**13016132**
white struc	**13014109**	**13014409**	**13014709**	**13016109**
	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13014232**	**13014532**	**13014832**	**13016232**
white struc	**13014209**	**13014509**	**13014809**	**13016209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 25°	1801lm / 16W	2453lm / 23.5W	3044lm / 30.8W	3521lm / 36.3W	**3955lm / 42W**	4553lm / 49.7W
3000K / 25°	1868lm / 16W	2543lm / 23.5W	3157lm / 30.8W	3651lm / 36.3W	**4101lm / 42W**	4721lm / 49.7W
4000K / 25°	2019lm / 16W	2749lm / 23.5W	3413lm / 30.8W	3947lm / 36.3W	**4433lm / 42W**	5104lm / 49.7W

Smart lotis 160 diffuse IP55 LED GE



1X LED ARRAY INCL. | 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

Friends of hue | III | 1200mA | IP55 | GWT 960° | 0.88KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	80°	80°	80°
black struc	**13015032**	**13015132**	**13015232**
white struc	**13015009**	**13015109**	**13015209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
2700K / 80°	1494lm / 16W	2034lm / 23.5W	2525lm / 30.8W	2920lm / 36.3W	**3280lm / 42W**	3776lm / 49.7W
3000K / 80°	1549lm / 16W	2110lm / 23.5W	2618lm / 30.8W	3028lm / 36.3W	**3401lm / 42W**	3916lm / 49.7W
4000K / 80°	1675lm / 16W	2280lm / 23.5W	2830lm / 30.8W	3273lm / 36.3W	**3676lm / 42W**	4233lm / 49.7W

SMART MASK 48
SMART LOTIS 48

SMART MASK 115
SMART CAKE 115

SMART MASK 115
SMART KUP ADJUSTABLE 115

SEE ALSO

CEILING - P259

SMART ACCESSORIES

—

MASK

Although most spotlights are round, there is an increasing demand for a rectangular or square accent on the ceiling. The Smart mask, which consists of a square or rectangle with one or two recesses for the spotlights, responds perfectly to this trend. Smart masks are available in black, white or gold.

more info? *supermodular.com/en/smart-mask*

Smart mask 48 1x



LUMINAIRE NOT INCL.

0.07KG

black struc	13350032
gold	13350046
white struc	13350009

Smart mask 48 2x



LUMINAIRE NOT INCL.

0.12KG

black struc	13350132
gold	13350146
white struc	13350109

Smart mask 82 1x





LUMINAIRE NOT INCL.

0.10KG

black struc	12500032
gold	12500046
white struc	12500009

Smart mask 82 2x



LUMINAIRE NOT INCL.

0.15KG

black struc	12500132
gold	12500146
white struc	12500109

Smart mask 115 1x





LUMINAIRE NOT INCL.

0.10KG

black struc	12810032
gold	12810046
white struc	12810009

Smart mask 115 2x



LUMINAIRE NOT INCL.

0.15KG

black struc	12810132
gold	12810146
white struc	12810109

Smart mask 160 1x



LUMINAIRE NOT INCL.

0.17KG

black struc	13040032
white struc	13040009

SMART BALL SUSPENSION 82 GI - WHITE STRUC
SMART KUP - GOLD

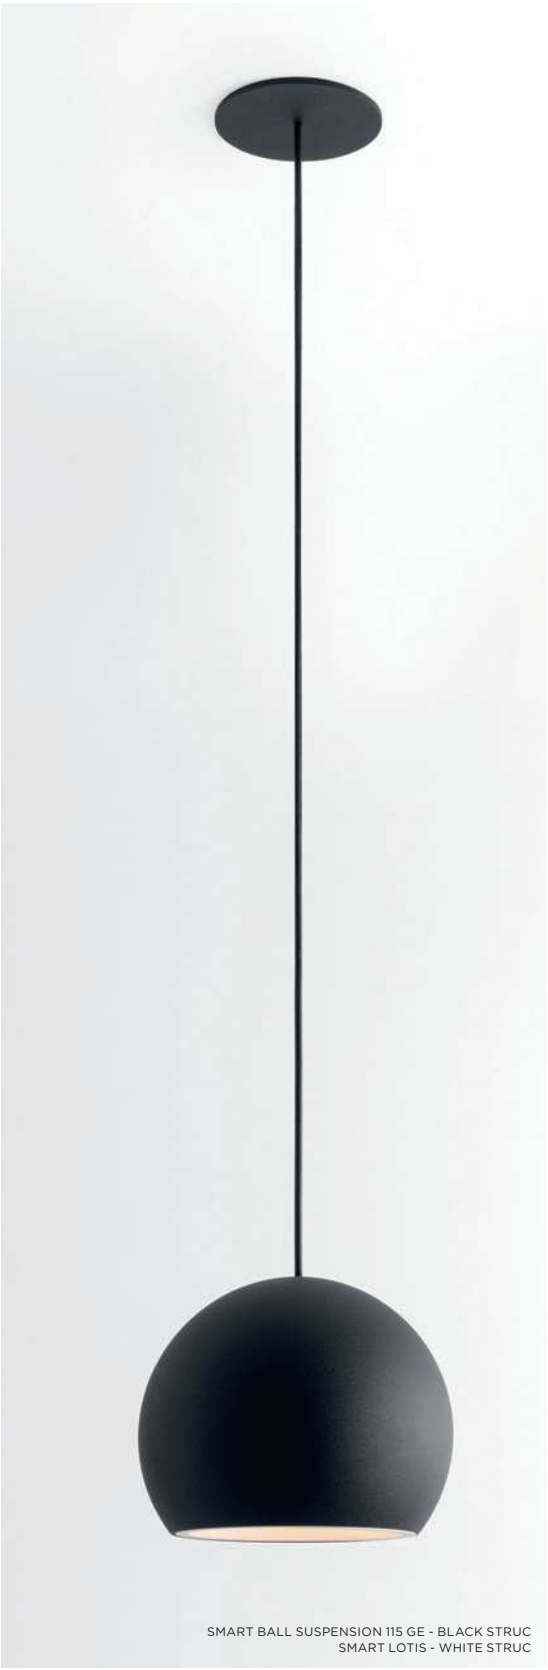

SMART BALL SUSPENSION 115 GE - BLACK STRUC
SMART LOTIS - WHITE STRUC

SEE ALSO

CEILING - P85

CEILING - P259

SMART ACCESSORIES

—

BALL SUSPENSION

Our Smart family dares to do a lot. Forms, sizes, colours, lighting options. We can now confidently say, it also got balls. Smart balls. Adding to the established versatility of this popular family, this new suspended accessory is compatible with any of the existing Smart designs. The Smart choice for residential, hospitality and boutique applications. Combine Smart ball with Kompas and Hoolahoop and create your own unique chandelier.

What the sphere holds

Our new accessory flaunts a bubbly, spherical shape, available in two sizes: Smart ball 82 and Smart ball 115. In white or black structure, it hangs gracefully from a thin matte black suspension cable. Smart ball is sold as an empty accessory and can be combined with a differently-coloured light. Leaving designers with the delightful choice of which colour to pick for Kup, Lotis, or Cake: white structure or black structure, or a rich, golden finish.

Conspicuous vs subtle

With its gear integrated, Smart ball offers Tre dim, 1-10V/ Pushdim and DALI systems. It can be surface-mounted on the ceiling with the support of a graceful cylinder shape of matching colour. The gear excluded version proposes a more minimalistic expression with nothing but a thin, round ceiling plate to show. It can be combined with warm dim technology.

more info? *supermodular.com/en/smart-ball*

Smart ball suspension 82 GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

black struc	**11570032**
white struc	**11570009**

Smart ball suspension 82 GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

TRAILING EDGE DIMMABLE	
black struc	**11570132**
white struc	**11570109**

DALI	
black struc	**11570332**
white struc	**11570309**

1-10V/PUSHDIM	
black struc	**11570232**
white struc	**11570209**

WARM DIM

Smart ball suspension 82 warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**11570432**
white struc	**11570409**

Smart ball suspension 115 GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

Friends of hue | IP20 | GWT 960° | 1.04KG

black struc	**11571032**
white struc	**11571009**

Smart ball suspension 115 GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

Friends of hue | 230V | IP20 | GWT 960° | 1.60KG

TRAILING EDGE DIMMABLE	
black struc	**11571132**
white struc	**11571109**

DALI	
black struc	**11571332**
white struc	**11571309**

1-10V/PUSHDIM	
black struc	**11571232**
white struc	**11571209**

WARM DIM

Smart ball suspension 115 warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | R,C | IP20 | GWT 960° | 1.30KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**11571432**
white struc	**11571409**

SMART SURFACE BOX
SMART MASK
SMART LOTIS 82 WARM DIM

SMART SURFACE BOX
SMART MASK
SMART KUP 115 ADJUSTABLE

SEE ALSO

CEILING - P259

SMART ACCESSORIES

SURFACE BOX

If you cannot recess spotlights into the ceiling but would love 'to go Smart', use the Smart surface box – a square or rectangular box mounted on the ceiling that houses one or two spotlights. To accommodate the larger Smart 115 directional spotlights, we also offer a larger Smart surface box.

more info? *supermodular.com/en/smart-surface-box*

Smart surface box 82 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK

12500009	SMART MASK 82 1X - WHITE STRUC
12500032	SMART MASK 82 1X - BLACK STRUC
12500046	SMART MASK 82 1X - GOLD

IP20 | 0.70KG

black struc	**12516032**
white struc	**12516009**

Smart surface box 82 1x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | IP20 | 0.60KG

TRAILING EDGE DIMMABLE	
black struc	**12514032**
white struc	**12514009**

DALI	
black struc	**12514232**
white struc	**12514209**

1-10V/PUSHDIM	
black struc	**12514132**
white struc	**12514109**

WARM DIM

Smart surface box 82 1x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | R.C | IP20 | GWT 960° | 0.65KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12514332**
white struc	**12514309**

Smart surface box 82 2x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK

12500109	SMART MASK 82 2X - WHITE STRUC
12500132	SMART MASK 82 2X - BLACK STRUC
12500146	SMART MASK 82 2X - GOLD

IP20 | 0.50KG

black struc	**12516132**
white struc	**12516109**

Smart surface box 82 2x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | IP20 | GWT 960° | 0.76KG

TRAILING EDGE DIMMABLE	
black struc	**12515032**
white struc	**12515009**

DALI	
black struc	**12515232**
white struc	**12515209**

1-10V/PUSHDIM	
black struc	**12515132**
white struc	**12515109**

WARM DIM

Smart surface box 82 2x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | R,C | IP20 | GWT 960° | 0.95KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12515332**
white struc	**12515309**

REQUIRED PARTS

Smart surface box 115 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK

12810009	SMART MASK 115 1X - WHITE STRUC
12810032	SMART MASK 115 1X - BLACK STRUC
12810046	SMART MASK 115 1X - GOLD

IP20 | 0.90KG

black struc	**12802032**
white struc	**12802009**

Smart surface box 115 1x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | IP20 | 1.20KG

TRAILING EDGE DIMMABLE	
black struc	**12800032**
white struc	**12800009**

DALI	
black struc	**12800232**
white struc	**12800209**

1-10V/PUSHDIM	
black struc	**12800132**
white struc	**12800109**

WARM DIM

Smart surface box 115 1x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | R,C | IP20 | GWT 960° | 1.12KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12800332**
white struc	**12800309**

Smart surface box 115 2x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK

12810109	SMART MASK 115 2X - WHITE STRUC
12810132	SMART MASK 115 2X - BLACK STRUC
12810146	SMART MASK 115 2X - GOLD

IP20 | 1.30KG

black struc	**12802132**
white struc	**12802109**

Smart surface box 115 2x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | IP20 | 1.60KG

TRAILING EDGE DIMMABLE	
black struc	**12801032**
white struc	**12801009**

DALI	
black struc	**12801232**
white struc	**12801209**

1-10V/PUSHDIM	
black struc	**12801132**
white struc	**12801109**

WARM DIM

Smart surface box 115 2x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

230V | R,C | IP20 | GWT 960° | 1.78KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12801332**
white struc	**12801309**

REQUIRED PARTS

SMART SURFACE TUBED 82 XL
SMART LOTIS 82

SMART SURFACE TUBED 115
SMART CAKE ADJUSTABLE 115

SMART TUBED SUSPENSION 82 LARGE GI
SMART KUP 82

SMART TUBED SUSPENSION 115 GE
SMART KUP 115

SEE ALSO

CEILING - P85

CEILING - P259

WALL - P549

SMART ACCESSORIES

—

SURFACE TUBED

TUBED SUSPENSION

You'd rather install a cylindrical than a square or rectangular surface box? The Smart surface tubed is available in a small (86 mm), large (130 mm) and x-large (190 mm) version. What's more, the large and x-large models also come in suspended versions. Combine the sizes and models to make playful creations on the ceiling. In combination with our Kompas and Hoolahoop ceiling bases, Smart tubed suspension is part of your own unique chandelier.

more info? *supermodular.com/en/smart-surface-tubed*

Smart surface tubed 48 1x LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 48 LED IP55

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

IP54* | GWT 960° | 0.14KG

black struc	**12900032**
white struc	**12900009**

Smart surface tubed 82 small LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 LED IP55

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

IP54* | GWT 960° | 0.23KG

alu brushed	**12841024**
black struc	**12841032**
white struc	**12841009**

Smart surface tubed 82 large LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 LED IP55

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

IP54* | GWT 960° | 0.67KG

alu brushed	**12845024**
black struc	**12845032**
white struc	**12845009**

Smart surface tubed 82 X-large LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 LED IP55
(1) WHEN USED WITH SMART 82 GU10 FOR TUBE
(2) WHEN USED WITH SMART 82 LED GE

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

Friends of hue | (1) | III (2) | IP20* | GWT 960° | 1.10KG

black struc	**12843332**
white struc	**12843309**

Smart surface tubed 82 large LED GI



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 LED IP55

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | IP54* | GWT 960° | 0.75KG

alu brushed	**12844024**
black struc	**12844032**
white struc	**12844009**

WARM DIM

Smart surface tubed 82 large LED warm dim GI





LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 IP55 LED WARM DIM

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | R,C | IP55* | GWT 960° | 0.68KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12844132**
white struc	**12844109**

Smart surface tubed 82 X-large LED GI



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 LED IP55

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

Friends of hue | 230V | IP54* | GWT 960° | 1.28KG

TRAILING EDGE DIMMABLE	
black struc	12843032
brushed alu	12843024
white struc	12843009

DALI	
black struc	12843232
brushed alu	12843224
white struc	12843209

1-10V/PUSHDIM	
black struc	12843132
brushed alu	12843124
white struc	12843109

WARM DIM

Smart surface tubed 82 X-large LED warm dim GI



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 82 IP55 LED WARM DIM

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | R,C | IP55* | GWT 960° | 1.15KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12843432
white struc	12843409

Smart surface tubed 115 LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 115 LED IP54

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

black struc	**13140432**
white struc	**13140409**

Smart surface tubed 115 LED GI



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 115 LED IP54

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

TRAILING EDGE DIMMABLE	
black struc	**13140132**
brushed alu	**13140124**
white struc	**13140109**

DALI	
black struc	**13140332**
brushed alu	**13140324**
white struc	**13140309**

1-10V/PUSHDIM	
black struc	**13140232**
brushed alu	**13140224**
white struc	**13140209**

WARM DIM

Smart surface tubed 115 LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**13140532**
white struc	**13140509**

Smart tubed suspension 48 LED GE



LUMINAIRE NOT INCL.

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

IP20 | GWT 960° | 0.23KG

black struc	**12902132**
white struc	**12902109**

Smart tubed suspension 48 LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | R,C | IP20 | GWT 960° | 0.53KG

TRAILING EDGE DIMMABLE	
black struc	**12902032**
white struc	**12902009**

Smart tubed suspension 82 large LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

IP20 | GWT 960° | 0.65KG

black struc	**12842832**
white struc	**12842809**

Smart tubed suspension 82 X-large LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

Friends of hue | IP20 | GWT 960° | 1.50KG

black struc	12842932
white struc	12842909

Smart tubed suspension 82 large LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

230V | IP20 | GWT 960° | 1.01KG

black struc	12842032
brushed alu	12842024
white struc	12842009

WARM DIM

Smart tubed suspension 82 large LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

230V | R.C | IP20 | GWT 960° | 0.98KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12842132
white struc	12842109

Smart tubed suspension 82 X-large LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

TRAILING EDGE DIMMABLE	
black struc	12842232
brushed alu	12842224
white struc	12842209

DALI	
black struc	12842432
brushed alu	12842424
white struc	12842409

1-10V/PUSHDIM	
black struc	12842332
brushed alu	12842324
white struc	12842309

SMART COMBINATIONS > SEE PAGES 320-329

WARM DIM

Smart tubed suspension 82 X-large LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12841932
white struc	12841909

Smart tubed suspension 115 LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE

black struc	13141432
white struc	13141409

Smart tubed suspension 115 LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

Friends of hue | 230V | IP20 | GWT 960° | 1.55KG

TRAILING EDGE DIMMABLE	
black struc	13141132
brushed alu	13141124
white struc	13141109

DALI	
black struc	13141332
brushed alu	13141324
white struc	13141309

1-10V/PUSHDIM	
black struc	13141232
brushed alu	13141224
white struc	13141209

WARM DIM

Smart tubed suspension 115 LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM
! 350MA DRIVER INCLUDED

230V | R,C | IP20 | GWT 960° | 1.55KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	13141532
white struc	13141509

Smart combinations & accessories

SMART 48/48+ - MASK, SURFACE TUBED, TUBED SUSPENSION & TUBED WALL

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X 	SURFACE TUBED Ø48	TUBED SUSPENSION Ø48 GE 	TUBED SUSPENSION Ø48 GI 	TUBED WALL Ø48 GE 1X/2X 
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55[2]	LED	●	●	●	●	
				LED warm dim		●	●		●
Smart asy lotis	○ ● ●	fix	IP20 IP55	LED					
				LED warm dim					

SMART MASK 48

1x	black struc	**13350032**
	gold	**13350046**
	white struc	**13350009**
2x	black struc	**13350132**
	gold	**13350146**
	white struc	**13350109**

SMART SURFACE TUBED 48

black struc	**12900032**
white struc	**12900009**

SMART TUBED SUSPENSION 48

	GE	GI TRAILING EDGE DIMMABLE
black struc	**12902132**	**12902032**
white struc	**12902109**	**12902009**

SMART TUBED WALL 48

1x LED	black struc	**12901032**
	white struc	**12901009**
2x LED	black struc	**12901132**
	white struc	**12901109**

[2] Combination with Smart surface tubed and Smart tubed wall is IP54, combination with Smart tubed suspension is IP20

SMART 48/48+ - SURFACE TUBED TRACK 48V, TUBED SUSPENSION TRACK 48V

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED TRACK 48V Ø48 GI 1X/2X	TUBED SUSPENSION TRACK 48V Ø48 GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	Ⓜ	Ⓜ
				LED warm dim		
Smart asy lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		





SMART SURFACE TUBED 48 TRACK 48V GI

		1-10V	DALI
1x LED	black struc	**12904032**	**12904132**
	white struc	**12904009**	**12904109**
2x LED	black struc	**12904232**	**12904332**
	white struc	**12904209**	**12904309**

SMART TUBED SUSPENSION 48 TRACK 48V GI

	1-10V	DALI
black struc	**12903032**	**12903132**
white struc	**12903009**	**12903109**

Smart combinations & accessories

SMART 82 - MASK & SURFACE BOX

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X	SURFACE BOX GE 1X/2X	SURFACE BOX GI 1X/2X
							 WARM DIM
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55[2]	LED	Ⓜ	Ⓜ	Ⓜ
				LED warm dim		Ⓜ		Ⓜ
			IP20	GU10				
				GU10 for tube/box [1]		Ⓜ		
		adj.	IP20	LED		Ⓜ	Ⓜ	
				LED warm dim		Ⓜ		Ⓜ

SMART MASK 82

1x	black struc	**12500032**
	gold	**12500046**
	white struc	**12500009**
2x	black struc	**12500132**
	gold	**12500146**
	white struc	**12500109**

SMART SURFACE BOX 82

		GE	GI (500MA)			GI (350MA)
			TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM
1x LED	black struc	**12516032**	**12514032**	**12514132**	**12514232**	**12514332**
	white struc	**12516009**	**12514009**	**12514109**	**12514209**	**12514309**
2x LED	black struc	**12516132**	**12515032**	**12515132**	**12515232**	**12515332**
	white struc	**12516109**	**12515009**	**12515109**	**12515209**	**12515309**

! DO NOT FORGET TO ORDER SMART MASK

[1] When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000621) fit in Smart tubes and boxes
[2] Combination with Smart surface tubed and Smart tubed wall is IP54, combination with Smart tubed suspension is IP20

SMART 82 - SURFACE TUBED

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED Ø82 S GE	SURFACE TUBED Ø82 L GE	SURFACE TUBED Ø82 XL GE	SURFACE TUBED Ø82 L GI		SURFACE TUBED Ø82 XL GI	
									WARM DIM		WARM DIM
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55[2]	LED	●	●	●	●		●	
				LED warm dim	●	●	●		●		●
			IP20	GU10							
				GU10 for tube/box [1]		●	●				
		adj.	IP20	LED	●	●	●	●		●	
				LED warm dim	●	●	●		●		●

SMART SURFACE TUBED 82

	GE			GI (500MA)				GI (350MA)	
	SMALL	LARGE	X-LARGE	LARGE	X-LARGE			LARGE	X-LARGE
				NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM	TRAILING EDGE DIMMABLE WARM DIM
black struc	**12841032**	**12845032**	**12843332**	**12844032**	**12843032**	**12843132**	**12843232**	**12844132**	**12843432**
brushed alu	**12841024**	**12845024**		**12844024**	**12843024**	**12843124**	**12843224**		
white struc	**12841009**	**12845009**	**12843309**	**12844009**	**12843009**	**12843109**	**12843209**	**12844109**	**12843409**

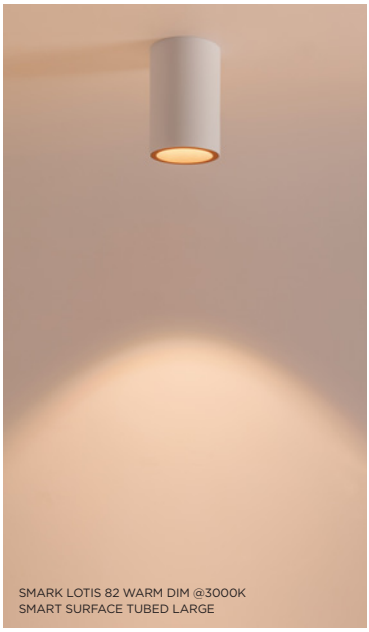

SMARK LOTIS 82 WARM DIM @3000K
SMART SURFACE TUBED LARGE

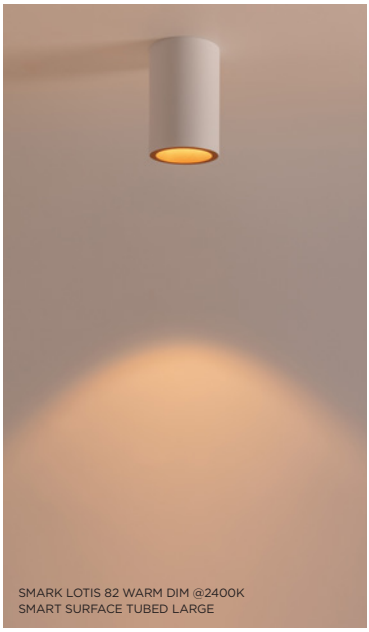

SMARK LOTIS 82 WARM DIM @2400K
SMART SURFACE TUBED LARGE

SMARK LOTIS 82 WARM DIM @1800K
SMART SURFACE TUBED LARGE

Smart combinations & accessories

SMART 82 - TUBED SUSPENSION

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION Ø82 L GE 	TUBED SUSPENSION Ø82 XL GE 	TUBED SUSPENSION Ø82 L GI  WARM DIM		TUBED SUSPENSION Ø82 XL GI  WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	M	M	M		M	
				LED warm dim	M	M		M		M
				GU10						
				GU10 for tube/box (1)						
		adj.	IP20	LED	M	M	M		M	
				LED warm dim	M	M		M		M

SMART TUBED SUSPENSION 82

	GE		GI (500MA)				GI (350MA)	
	LARGE	X-LARGE	LARGE	X-LARGE			LARGE	X-LARGE
			NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM	TRAILING EDGE DIMMABLE WARM DIM
black struc	12842832	12842932	12842032	12842232	12842332	12842432	12842132	12841932
brushed alu			12842024	12842224	12842324	12842424		
white struc	12842809	12842909	12842009	12842209	12842309	12842409	12842109	12841909

SMART 82 - TUBED SUSPENSION TRACK

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION TRACK Ø82 L GI 	TUBED SUSPENSION TRACK Ø82 XL GI 
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	M	M
				LED warm dim		
				GU10		
				GU10 for tube/box (1)		
		adj.	IP20	LED	M	M
				LED warm dim		

SMART TUBED SUSPENSION TRACK 82

	LARGE	X-LARGE	
	TRAILING EDGE DIMMABLE	TRAILING EDGE DIMMABLE	DALI
black struc	12842532	12842632	12842732
brushed alu	12842524	12842624	12842724
white struc	12842509	12842609	12842709

(1) When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000621) fit in Smart tubes and boxes

SMART 82 - TUBED WALL

DESIGN	COLOUR	FIX/ ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø82 S GE	TUBED WALL Ø82 L GE	TUBED WALL Ø82 XL GE	TUBED WALL Ø82 L GI		TUBED WALL Ø82 XL GI	
									WARM DIM		WARM DIM
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	✓	✓	✓	✓		✓	
				LED warm dim	✓	✓	✓		✓		✓
				GU10							
				GU10 for tube/box [1]		✓	✓				
		adj.	IP20	LED	✓	✓	✓	✓		✓	
				LED warm dim	✓	✓	✓		✓		✓

SMART TUBED WALL 82

		GE			GI (500MA)				GI (350MA)	
		SMALL	LARGE	X-LARGE	LARGE	X-LARGE			LARGE	X-LARGE
					NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/ PUSHDIM	DALI	TRAILING EDGE DIMMABLE	
									WARM DIM	WARM DIM
1x LED	black struc	12846632	12846432	12846032	12846532	12846132	12846232	12846332	12846832	12846932
	white struc	12846609	12846409	12846009	12846509	12846109	12846209	12846309	12846809	12846909
2x LED	black struc			12846732						
	white struc			12846709						

[1] When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000621) fit in Smart tubes

Smart combinations & accessories

SMART 82 - BALL SUSPENSION

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	BALL SUSPENSION Ø82 GE 	BALL SUSPENSION Ø82 GI  WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55[2]	LED	Ⓜ	Ⓜ	
				LED warm dim	Ⓜ		Ⓜ
			IP20	GU10			
				GU10 for tube/box [1]			
		adj.	IP20	LED	Ⓜ	Ⓜ	
				LED warm dim	Ⓜ		Ⓜ

SMART BALL SUSPENSION 82

	GE	GI (500MA)			GI (350MA)
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM
black struc	**11570032**	**11570132**	**11570232**	**11570332**	**11570432**
white struc	**11570009**	**11570109**	**11570209**	**11570309**	**11570409**

[2] Only combination with Smart surface tubed is IP54

SMART 115 - MASK & SURFACE BOX

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X	SURFACE BOX GE 1X/2X	SURFACE BOX GI 1X/2X	
								WARM DIM
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP54[2]	LED				
		adj.	IP20	LED				
				LED warm dim				
				GU10				

SMART MASK 115

1x	black struc	**12810032**
	gold	**12810046**
	white struc	**12810009**
2x	black struc	**12810132**
	gold	**12810146**
	white struc	**12810109**

SMART SURFACE BOX 115

		GE	GI (500MA)			GI (350MA)
			TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM
1x LED	black struc	**12802032**	**12800032**	**12800132**	**12800232**	**12800332**
	white struc	**12802009**	**12800009**	**12800109**	**12800209**	**12800309**
2x LED	black struc	**12802132**	**12801032**	**12801132**	**12801232**	**12801332**
	white struc	**12802109**	**12801009**	**12801109**	**12801209**	**12801309**

! DO NOT FORGET TO ORDER SMART MASK

Smart combinations & accessories

SMART 115 - SURFACE TUBED

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED Ø115 GE	SURFACE TUBED Ø115 GI WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP54[2]	LED	M	M	
		adj.	IP20	LED	M	M	
				LED warm dim	M		M
				GU10			

SMART SURFACE TUBED 115

	GE	GI (500MA)			TRAILING EDGE DIMMABLE WARM DIM
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	
black struc	13140432	13140132	13140232	13140332	13140532
brushed alu		13140124	13140224	13140324	
white struc	13140409	13140109	13140209	13140309	13140509

SMART 115 - TUBED SUSPENSION

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION Ø115 GE 	TUBED SUSPENSION Ø115 GI  WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP54[2]	LED	M	M	
		adj.	IP20	LED	M	M	
				LED warm dim	M		M
				GU10			

SMART TUBED SUSPENSION 115

	GE	GI (500MA)			TRAILING EDGE DIMMABLE WARM DIM
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	
black struc	13141432	13141132	13141232	13141332	13141532
brushed alu		13141124	13141224	13141324	
white struc	13141409	13141109	13141209	13141309	13141509

[2] Only combination with Smart surface tubed is IP54

SMART 115 - BALL SUSPENSION

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	BALL SUSPENSION Ø115 GE	BALL SUSPENSION Ø115 GI  WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP54[2]	LED	M	M	
		adj.	IP20	LED	M	M	
				LED warm dim	M		M
				GU10			

SMART BALL SUSPENSION 115

	GE	GI (500MA)			
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM
black struc	**11571032**	**11571132**	**11571232**	**11571332**	**11571432**
white struc	**11571009**	**11571109**	**11571209**	**11571309**	**11571409**

SMART 160 - MASK

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X 
Smart cake Smart kup Smart lotis	○ ●	fix	IP54	LED	M

SMART MASK 160

black struc	**13040032**
white struc	**13040009**

SEE ALSO

TRACK 230V - P496

STOVE

Design — Couvreur-Devos

A luminaire that is both sleek and playful. Its name wasn't chosen randomly: from below, you can clearly see the outline of a stove, with the asymmetric foot as the flue.

Heart-warming geometry

Stove is the result of pure geometry and has been perfected down to the smallest detail. The unusual thing about Stove is the two pivot points, which make this spotlight a particularly versatile and highly directional light source.

more info? *supermodular.com/en/stove*

Stove LED GE



1X LED ARRAY INCL. 16.2W

! CAN BE USED WITH GEAR ACCESS COVER PLATE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11932009	GEAR ACCESS COVERPLATE (CUTOUT SIZE Ø127 H130)
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

OPTICAL ACCESSORIES

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

	2700K / CRI90+
	25°
black struc	**11870132**
white struc	**11870109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	940lm / 11W	**1290lm / 16.2W**

Stove LED GI



1X LED ARRAY INCL. 11W

INSTALLATION ACCESSORIES

10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

OPTICAL ACCESSORIES

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

TRAILING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc	**11873132**
white struc	**11873109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**940lm / 13.5W**

TETRIX ADJUSTABLE - FLANGE

TETRIX STRAIGHT (GU10) - TRIMLESS

TETRIX OBLIQUE - FLANGE

TETRIX PINHOLE (GU10) - TRIMLESS

TETRIX CONE - FLANGE

TETRIX CONE - TRIMLESS
SNOOT

TETRIX ADJUSTABLE - FLANGE
HONEYCOMB

TETRIX STRAIGHT - TRIMLESS
LIGHT CONE Ø64

TETRIX OBLIQUE - FLANGE
LIGHT CONE Ø44

TETRIX

We had a bit of a game in mind when we designed our recessed spot, Tetrix. Playing with pieces, fitting them together in all kinds of intricate ways. Easy to play with, and for everyone. Tetrix invites you to give it your personal touch with design options and accessories. It's versatile, fits everywhere, and is a breeze to install.

It all fits together

Tetrix is a new family of recessed downlighters with many possibilities. Compose your Tetrix with a choice of design, installation and accessory. Create your personal style and combination by simply playing with everything. All components can be clicked into another interchangeably.

Plenty of playful

Tetrix offers a choice of lighting accessories (black structure only), adding visual comfort, aesthetics, fun and individuality to each design. Try honeycomb and snoot, already part of our Qbini family, or our light cones in two sizes.

Connected, easy install, everywhere

Turn Tetrix (gear excluded) into a smart lighting solution by linking a remote driver of your choice with a Hue or Casambi module. Tetrix's installation is easy peasy, with a recessed ring of adjustable height, or an installation ring with flange. An IP55 rating for all LED dedicated designs, including the adjustable version, and an option for using a GU10 socket, truly makes Tetrix for everywhere.

more info? *supermodular.com/en/tetrix*

TETRIX STRAIGHT - FLANGE

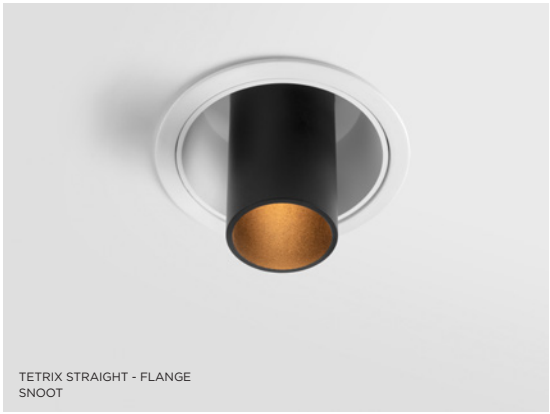

TETRIX STRAIGHT - FLANGE
SNOOT

TETRIX STRAIGHT - FLANGE
HONEYCOMB

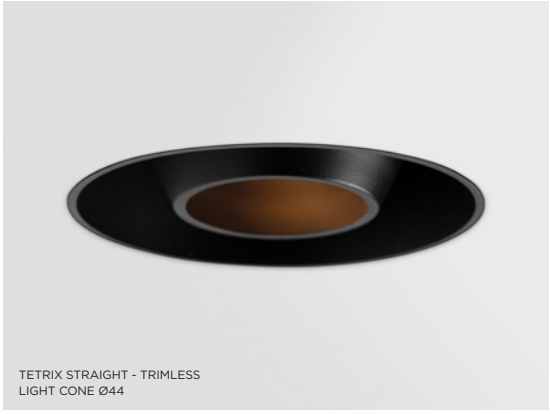

TETRIX STRAIGHT - TRIMLESS
LIGHT CONE Ø44

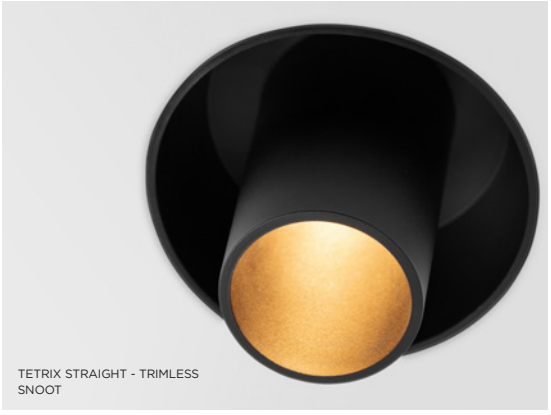

TETRIX STRAIGHT - TRIMLESS
SNOOT

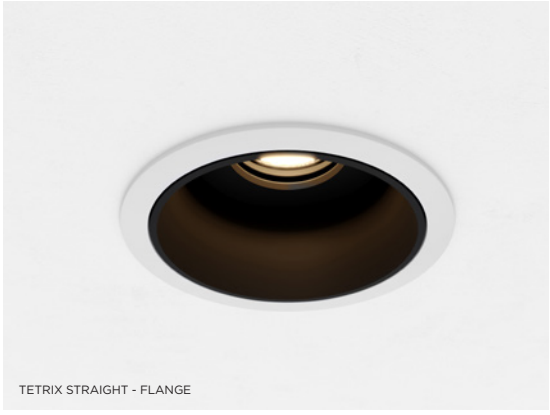

TETRIX STRAIGHT - FLANGE

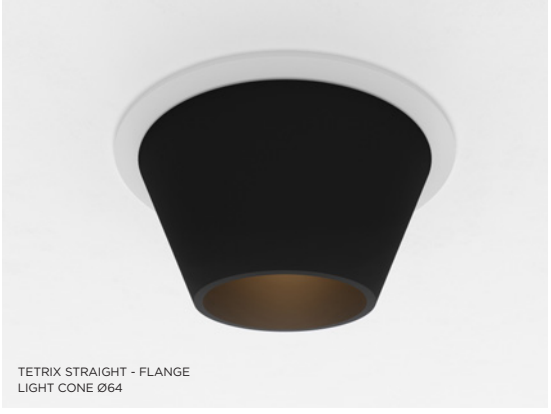

TETRIX STRAIGHT - FLANGE
LIGHT CONE Ø64

TETRIX STRAIGHT - FLANGE
LIGHT CONE Ø44

Tetrix Straight 62 IP55 LED GE



1X LED ARRAY INCL. 7.2W

Friends of hue | 500mA | IP55 | GWT 850° | 0.15KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black matt	13511083	13511183	13511283	13511383	13511483	13511583
white matt	13511038	13511138	13511238	13511338	13511438	13511538

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515332	LC Ø64MM BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION

(white matt)

	350mA	**500mA**
2700K / 25°	472lm 5W	**635lm 7.2W**
3000K / 25°	506lm 5W	**635lm 7.2W**
4000K / 25°	541lm 5W	**635lm 7.2W**

INSTALLATION ACCESSORIES

FRAME ROUND



ø 68 h 110

RECESSED RING Ø62

ø 89 h 110

GYPKIT TRIMLESS 150X150 - Ø62

CONBOX 140X250X100X210



GYPSUM FIBREBOARD 150X150



CONCRETE KIT 150X150



CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES

GYPKIT TRIMLESS 300X150 - 2X Ø62



CONBOX 140X400X100X210



GYPSUM FIBREBOARD 300X150



REQUIRED PARTS

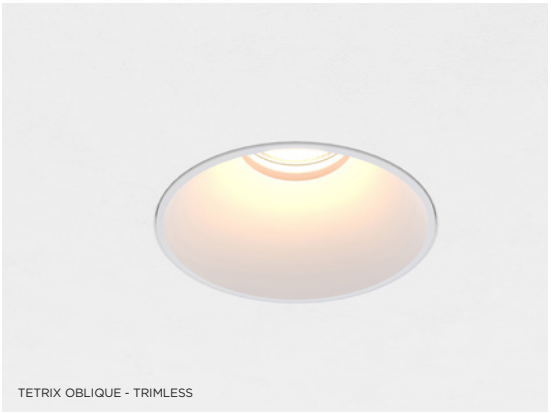

TETRIX OBLIQUE - TRIMLESS

TETRIX OBLIQUE - FLANGE
HONEYCOMB

TETRIX OBLIQUE - TRIMLESS
LIGHT CONE Ø44

TETRIX OBLIQUE - TRIMLESS
LIGHT CONE Ø44

TETRIX OBLIQUE - FLANGE
LIGHT CONE Ø44

TETRIX OBLIQUE - TRIMLESS
HONEYCOMB

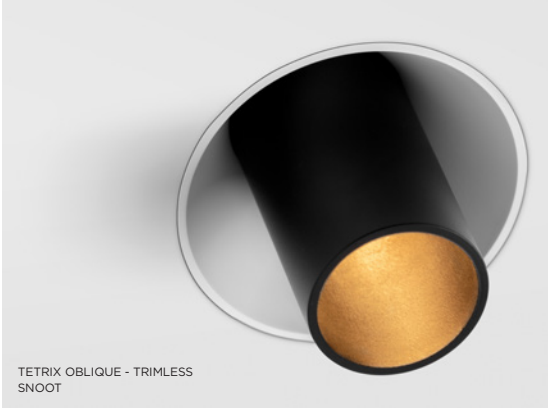

TETRIX OBLIQUE - TRIMLESS
SNOOT

TETRIX OBLIQUE - FLANGE

Tetrix Oblique 62 IP55 LED GE





1X LED ARRAY INCL. | 7.2W

Friends of hue | 500mA | IP55 | GWT 850° | 0.15KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black matt	13512083	13512183	13512283	13512383	13512483	13512583
white matt	13512038	13512138	13512238	13512338	13512438	13512538

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt)

	350mA	**500mA**
2700K / 25°	477lm 5W	**642lm 7.2W**
3000K / 25°	511lm 5W	**642lm 7.2W**
4000K / 25°	547lm 5W	**642lm 7.2W**

TETRIX - OPTICAL ACCESSOIRIES

DESIGN	TETRIX STRAIGHT 62	TETRIX OBLIQUE 62	TETRIX CONE 90	TETRIX ADJUSTABLE 62	TETRIX PINHOLE 62
HONEYCOMB Ø33	●	●	●	●	
SNOOT Ø32 	●	●	●	●	
LIGHT CONE Ø44	●	●	●		
LIGHT CONE Ø64 	●				

REQUIRED PARTS

TETRIX CONE - FLANGE

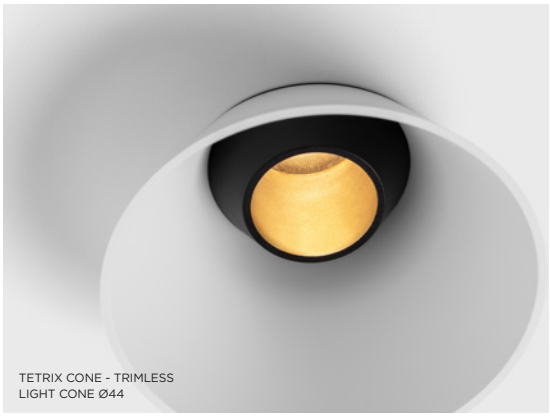

TETRIX CONE - TRIMLESS
LIGHT CONE Ø44

TETRIX CONE - TRIMLESS
LIGHT CONE Ø44

TETRIX CONE - TRIMLESS
SNOOT

TETRIX CONE - TRIMLESS
LIGHT CONE Ø44

TETRIX CONE - TRIMLESS
HONEYCOMB

TETRIX CONE - FLANGE
LIGHT CONE Ø44

TETRIX CONE - TRIMLESS
SNOOT

Tetrix Cone 90 IP55 LED GE





1X LED ARRAY INCL. | 7.2W

Friends of hue | 500mA | IP55 | GWT 850° | 0.19KG

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black matt	**13513083**	**13513183**	**13513283**	**13513383**	**13513483**	**13513583**
white matt	**13513038**	**13513138**	**13513238**	**13513338**	**13513438**	**13513538**

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt)

	350mA	**500mA**
2700K / 25°	477lm 5W	**642lm 7.2W**
3000K / 25°	511lm 5W	**642lm 7.2W**
4000K / 25°	547lm 5W	**642lm 7.2W**

REQUIRED PARTS

TETRIX ADJUSTABLE - FLANGE

TETRIX ADJUSTABLE - FLANGE
HONEYCOMB

TETRIX ADJUSTABLE - FLANGE
SNOOT

TETRIX ADJUSTABLE - TRIMLESS

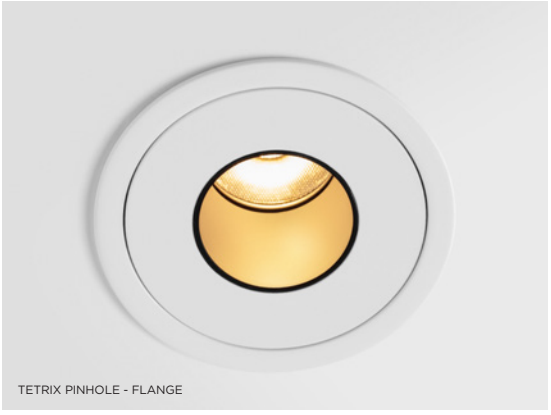

TETRIX PINHOLE - FLANGE

TETRIX PINHOLE - FLANGE

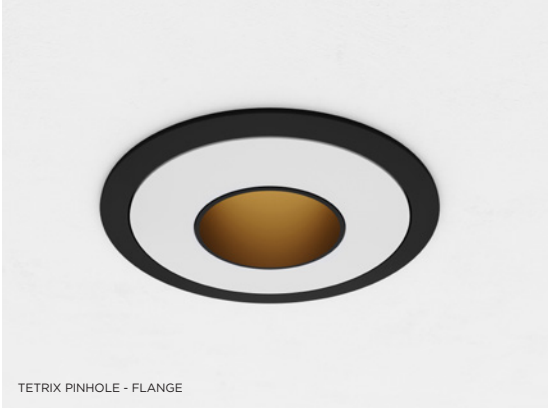

TETRIX PINHOLE - FLANGE

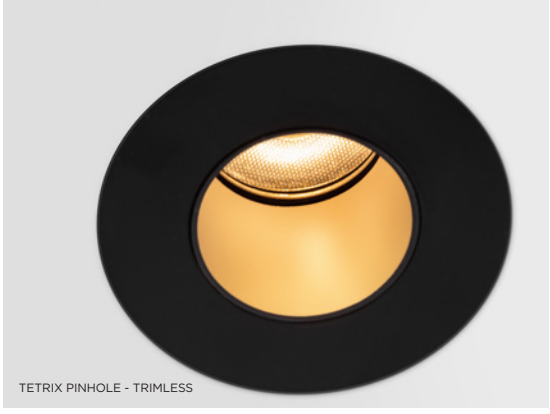

TETRIX PINHOLE - TRIMLESS

Tetrix Adjustable 62 IP55 LED GE



1X LED ARRAY INCL. 7.2W

	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black matt	13514083	13514183	13514283	13514383	13514483	13514583
white matt	13514038	13514138	13514238	13514338	13514438	13514538

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt)

	350mA	**500mA**
2700K / 25°	491lm 5W	**660lm 7.2W**
3000K / 25°	526lm 5W	**660lm 7.2W**
4000K / 25°	563lm 5W	**660lm 7.2W**

Tetrix Pinhole 62 IP55 LED GE





1X LED ARRAY INCL. 7.2W

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black matt	13516083	13516283	13516483
white matt	13516038	13516238	13516438

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE ABOVE

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt)

	350mA	**500mA**
2700K / 25°	343lm 5W	**461lm 7.2W**
3000K / 25°	367lm 5W	**497lm 7.2W**
4000K / 25°	393lm 5W	**527lm 7.2W**

REQUIRED PARTS

Tetrix Straight 62 GU10 for LED



1X LED GU10 (NOT INCL.) | GU10

230V | IP20 | GWT 850° | 0.08KG

black matt	13511683
white matt	13511638

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515332	LC Ø64MM BLACK STRUC

Tetrix Oblique 62 GU10 for LED





1X LED GU10 (NOT INCL.) | GU10

230V | IP20 | GWT 850° | 0.08KG

black matt	13512683
white matt	13512638

INSTALLATION ACCESSORIES > SEE ABOVE

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

Tetrix Cone 90 GU10 for LED



1X LED GU10 (NOT INCL.) | GU10

230V | IP20 | GWT 850° | 0.09KG

black matt	13513683
white matt	13513638

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

Tetrix Pinhole 62 GU10 for LED





1X LED GU10 (NOT INCL.) | GU10

230V | IP20 | GWT 850° | 0.08KG

black matt	13516583
white matt	13516538

INSTALLATION ACCESSORIES > SEE ABOVE

REQUIRED PARTS

Tetrix Straight 62 LED Hue retrofit



1X LED GU10 INCL. | GU10 | 5.2W

HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
	45°	35°
black matt	13511883	13511783
white matt	13511838	13511738

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKIT TRIMLESS 150X150 - Ø62
12293330	GYPKIT TRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515332	LC Ø64MM BLACK STRUC

Tetrix Oblique 62 LED Hue retrofit





1X LED GU10 INCL. | GU10 | 5.2W

HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
	45°	35°
black matt	13512883	13512783
white matt	13512838	13512738

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE ABOVE

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

Tetrix Cone 90 LED Hue retrofit



1X LED GU10 INCL. | GU10 | 5.2W

Friends of hue | 230V | IP20 | GWT 850° | 0.14KG

HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
	45°	35°
black matt	13513883	13513783
white matt	13513838	13513738

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKIT TRIMLESS 150X150 - Ø62
12293330	GYPKIT TRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150

OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC

Tetrix Pinhole 62 LED Hue retrofit





1X LED GU10 INCL. | GU10 | 5.2W

Friends of hue | 230V | IP20 | GWT 850° | 0.13KG

HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
	45°	35°
black matt	13516783	13516683
white matt	13516738	13516638

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE ABOVE

REQUIRED PARTS

THIMBLE 74 - ANODIZED SILVER BRONZE

THIMBLE 70 TRIMLESS ADJUSTABLE - GOLD

THIMBLE

Design — Jeffrey Huyghe

Thimble evokes minimalism, surprise and technology all at once. Subtle curves, slightly revealing colours, high-quality lens and LED. Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlight will bring pure form, definition and quality light to any space without stealing all the attention.

Bare essentials reveal a sophisticated design

Thimble's composition emphasizes that elegance lies in pure form. A minimalistic, curved design, with a deep-recessed and glare-free light source. Thimble's clean, ultra-thin flange or trimless execution will go unseen in the quietest of spaces.

A low-key execution with a little more

For light expressions that should be discreet but show that little extra, designers can find the perfect compromise with Thimble's long list of anodized colours. This desired, enhancing effect can be created on any ceiling application.

more info? *supermodular.com/en/thimble*

Thimble 74 IP55 LED GE





1X LED ARRAY INCL. 8.1W

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11620081	11620181
ano bronze	11620082	11620182
ano champagne	11620041	11620141
ano gold	11620042	11620142
ano silver bronze	11620084	11620184
black struc	11620032	11620132
white struc	11620009	11620109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	483lm / 5.6W	**667lm / 8.1W**
3000K / 30°	483lm / 5.6W	**667lm / 8.1W**

INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

SINGLE THIMBLE	**PLASTERED** FINISH
	THIMBLE 70 TRIMLESS
	11624330 RECESSED RING Ø70 70 ø 111
	ø 95 h 110

INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SINGLE THIMBLE	**EXPOSED CONCRETE** FINISH
	THIMBLE 74 THIMBLE 70 TRIMLESS
	11624430 CONCRETE RING Ø70 FOR STANDARD CONCRETE BOXES 53 17 ø 111
	ø 86 h 110

REQUIRED PARTS BASED ON CEILING TYPE

Thimble 70 trimless IP55 LED GE



1X LED ARRAY INCL. | 8.1W

! INSTALLATION ACCESSORIES RQUIRED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292430	GYPKIT TRIMLESS 150X150 - Ø70
12292530	GYPKIT TRIMLESS 300X150 - 2X Ø70
11624230	CONCRETE KIT 150X150 - Ø70
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150
11624330	RECESSED RING Ø70
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES

Friends of hue | III | 500mA | IP55 | GWT 960° | 0.25KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	**11622081**	**11622181**
ano bronze	**11622082**	**11622182**
ano champagne	**11622041**	**11622141**
ano gold	**11622042**	**11622142**
ano silver bronze	**11622084**	**11622184**
black struc	**11622032**	**11622132**
white struc	**11622009**	**11622109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	483lm / 5.6W	**667lm / 8.1W**
3000K / 30°	483lm / 5.6W	**667lm / 8.1W**

INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, …)

			PLASTERED FINISH		**EXPOSED CONCRETE** FINISH
			THIMBLE 74	THIMBLE 70 TRIMLESS	THIMBLE 74 THIMBLE 70 TRIMLESS
SINGLE THIMBLE	**11624030** CONBOX 140X250X100X210	+	**12292630** GYPSUM FIBREBOARD 150X150	**12292430** GYPKIT TRIMLESS 150X150 - Ø70	**11624230** CONCRETE KIT 150X150 - Ø70
DOUBLE THIMBLE	**11624130** CONBOX 140X400X100X210	+	**12292730** GYPSUM FIBREBOARD 300X150	**12292530** GYPKIT TRIMLESS 300X150 - 2X Ø70	

Thimble 74 adjustable LED GE





1X LED ARRAY INCL. | 8.1W

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11621081	11621181
ano bronze	11621082	11621182
ano champagne	11621041	11621141
ano gold	11621042	11621142
ano silver bronze	11621084	11621184
black struc	11621032	11621132
white struc	11621009	11621109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	483lm / 5.6W	**667lm / 8.1W**
3000K / 30°	483lm / 5.6W	**667lm / 8.1W**

INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

SINGLE THIMBLE	**PLASTERED** FINISH
	THIMBLE 70 TRIMLESS
	11624330 RECESSED RING Ø70

INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SINGLE THIMBLE	**EXPOSED CONCRETE** FINISH
	THIMBLE 74 THIMBLE 70 TRIMLESS
	11624430 CONCRETE RING Ø70 FOR STANDARD CONCRETE BOXES

REQUIRED PARTS BASED ON CEILING TYPE

Thimble 70 trimless adjustable LED GE



1X LED ARRAY INCL. 8.1W

! INSTALLATION ACCESSORIES RQUIRED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292430	GYPKIT TRIMLESS 150X150 - Ø70
12292530	GYPKIT TRIMLESS 300X150 - 2X Ø70
11624230	CONCRETE KIT 150X150 - Ø70
12292630	GYPSUM FIBREBOARD 150X150
12292730	GYPSUM FIBREBOARD 300X150
11624330	RECESSED RING Ø70
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.20KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	**11623081**	**11623181**
ano bronze	**11623082**	**11623182**
ano champagne	**11623041**	**11623141**
ano gold	**11623042**	**11623142**
ano silver bronze	**11623084**	**11623184**
black struc	**11623032**	**11623132**
white struc	**11623009**	**11623109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 30°	483lm / 5.6W	**667lm / 8.1W**
3000K / 30°	483lm / 5.6W	**667lm / 8.1W**

INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, …)

			PLASTERED FINISH		**EXPOSED CONCRETE** FINISH
SINGLE THIMBLE	**11624030** CONBOX 140X250X100X210	+	THIMBLE 74	THIMBLE 70 TRIMLESS	THIMBLE 74 THIMBLE 70 TRIMLESS
			**12292630** GYPSUM FIBREBOARD 150X150	**12292430** GYPKIT TRIMLESS 150X150 - Ø70	**11624230** CONCRETE KIT 150X150 - Ø70
					
DOUBLE THIMBLE	**11624130** CONBOX 140X400X100X210	+	**PLASTERED** FINISH		
			THIMBLE 74	THIMBLE 70 TRIMLESS	
			**12292730** GYPSUM FIBREBOARD 300X150	**12292530** GYPKIT TRIMLESS 300X150 - 2X Ø70	
					

TULIP BLOOM

TULIP BLOOM
TULIP BLOSSOM

TULIP BLOOM
TULIP BLOSSOM

SEE ALSO

CEILING - P85

TRACK 230V - P499

TULIP

Design — Studio Kees

An architectural pendant light that comes in two complementary shapes, Blossom and Bloom. Also available with a track adapter to combine with a 230V track rail, and designed to fit E27 light bulbs, Tulip is truly accessible. Combine Tulip with the ceiling bases Kompas and Hoolahoop and create your own unique chandelier. A complementary design that displays both cosy mood light and general light. Full of grace and elegance, Tulip is the couple no one can miss.

Designed for each other

Elegant, balanced, made to fit together, Blossom and Bloom. Look closely at the clever design, and you'll notice that the top part of the body is identical in both. From the center line and down, the angles of the cups are complementary. A smooth parallel line emerges between the shapes and enhances the architectural quality of Tulip's design.

Black, white, golden inside

Tulip invites you to play with its colours. A couple in black or white structure. Experiment with many in one colour or mix them with both. Designers can add a third colour, a stunning gold finish on the inside. An irresistible glow will create a soft, warm ambience with each Tulip.

Flowers easy to handle

With its E27 socket, Tulip can be paired with LED retrofit bulbs. Go a step further and opt for connected-ready Hue bulbs that enable tunable white, coloured lights, warm dim and lots more. Bright and cool, warmer and ambient. Hue's a natural match to Tulip, as it reflects the rhythms of a flower's reaction to sunlight: open by day, closing at night. And thanks to Tulip's chalice, the bulb remains unseen, leaving its design uninterrupted.

more info? *supermodular.com/en/tulip*

TULIP BLOSSOM (POWERFEED SURFACE)

TULIP BLOSSOM (POWERFEED RECESSED)

TULIP BLOSSOM - BLACK STRUC/GOLD

TULIP BLOSSOM - WHITE STRUC/GOLD

Tulip blossom (power feed surface) E27



LAMP EXCL. | E27 | MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.49KG

black struc	**12660132**
black struc - gold	**12660191**
white struc	**12660109**
white struc - gold	**12660189**

Tulip blossom (power feed recessed) E27



LAMP EXCL. | E27 | MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.48KG

black struc	**12661132**
black struc - gold	**12661191**
white struc	**12661109**
white struc - gold	**12661189**

TULIP BLOOM (POWERFEED SURFACE)

TULIP BLOOM (POWERFEED RECESSED)

TULIP BLOOM - WHITE STRUC/GOLD

TULIP BLOOM - BLACK STRUC/GOLD

Tulip bloom (power feed surface) E27



LAMP EXCL. | E27 | MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.50KG

black struc	**12660032**
black struc - gold	**12660091**
white struc	**12660009**
white struc - gold	**12660089**

Tulip bloom (power feed recessed) E27



LAMP EXCL. | E27 | MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 0.49KG

black struc	**12661032**
black struc - gold	**12661091**
white struc	**12661009**
white struc - gold	**12661089**

UNITED 2X LED
UNITED COVER

UNITED ASY

UNITED

Design — Couvreur-Devos

Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED-equipped luminaire is anything but ordinary, with a u-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including the ends.

Sleek wall washer

While both sides of the classic United luminaire are even, United asy features an asymmetric housing that enables its use as a wall-washer fixture illuminating a bookshelf, a piece of art, etc. Both United and United asy are available in 2 lengths (1274mm and 974mm).

Uniform or contrasting?

You can add an extra cover in white or black, for a uniform or contrasting look across the components of the luminaire. On top of that, adding the cover makes it possible to suspend the luminaire.

more info? *supermodular.com/en/united*

United (974mm) 1x LED GI



3X LEDLINE INCL. 4.5W

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13393002**	**13394002**
white struc	**13393009**	**13394009**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13393102**	**13394102**
white struc	**13393109**	**13394109**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13393202**	**13394202**
white struc	**13393209**	**13394209**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13395009	UNITED COVER (974MM) 1X WHITE STRUC
13395032	UNITED COVER (974MM) 1X BLACK STRUC
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1103lm / 17W**
3000K	**1183lm / 17W**

United (974mm) 2x LED GI



6X LEDLINE INCL. 4.5W

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13393302**	**13394302**
white struc	**13393309**	**13394309**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13393402**	**13394402**
white struc	**13393409**	**13394409**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13393502**	**13394502**
white struc	**13393509**	**13394509**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13395109	UNITED COVER (974MM) 2X WHITE STRUC
13395132	UNITED COVER (974MM) 2X BLACK STRUC
11065209	TWIN SUSPENSION KIT 4M 3X 0.75 (2 CABLES) - WHITE STRUC
11065232	TWIN SUSPENSION KIT 4M 3X0,75 [2 CABLES] BLACK STRUC
11065409	TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] WHITE STRUC
11065432	TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1948lm / 31W**
3000K	**2089lm / 31W**

United (1274mm) 1x LED GI



4X LEDLINE INCL. 4.5W

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13390002**	**13391002**
white struc	**13390009**	**13391009**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13390102**	**13391102**
white struc	**13390109**	**13391109**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13390202**	**13391202**
white struc	**13390209**	**13391209**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13392009	UNITED COVER (1274MM) 1X WHITE STRUC
13392032	UNITED COVER (1274MM) 1X BLACK STRUC
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1470lm / 22W**
3000K	**1576lm / 22W**

United (1274mm) 2x LED GI



8X LEDLINE INCL. 4.5W

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13390302**	**13391302**
white struc	**13390309**	**13391309**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13390402**	**13391402**
white struc	**13390409**	**13391409**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13390502**	**13391502**
white struc	**13390509**	**13391509**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13392109	UNITED COVER (1274MM) 2X WHITE STRUC
13392132	UNITED COVER (1274MM) 2X BLACK STRUC
11065209	TWIN SUSPENSION KIT 4M 3X 0.75 (2 CABLES) - WHITE STRUC
11065232	TWIN SUSPENSION KIT 4M 3X0,75 [2 CABLES] BLACK STRUC
11065409	TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] WHITE STRUC
11065432	TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**2596lm / 39W**
3000K	**2784lm / 39W**

United asy (974mm) 1x LED GI



3X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13403009	UNITED ASY COVER (974MM) 1X WHITE STRUC
13403032	UNITED ASY COVER (974MM) 1X BLACK STRUC

Friends of hue | 230V | IP20 | GWT 960° | 1.61KG

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13402002**	**13402302**
white struc	**13402009**	**13402309**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13402102**	**13402402**
white struc	**13402109**	**13402409**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13402202**	**13402502**
white struc	**13402209**	**13402509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1123lm / 17W**
3000K	**1204lm / 17W**

United asy (1274mm) 1x LED GI



4X LEDLINE INCL. | 4.5W

NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	**13400002**	**13400302**
white struc	**13400009**	**13400309**

1-10V	2700K / CRI90+	3000K / CRI90+
black	**13400102**	**13400402**
white struc	**13400109**	**13400409**

DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	**13400202**	**13400502**
white struc	**13400209**	**13400509**

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13401009	UNITED ASY COVER (1274MM) 1X WHITE STRUC
13401032	UNITED ASY COVER (1274MM) 1X BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1497lm / 22W**
3000K	**1605lm / 22W**

VAEDER

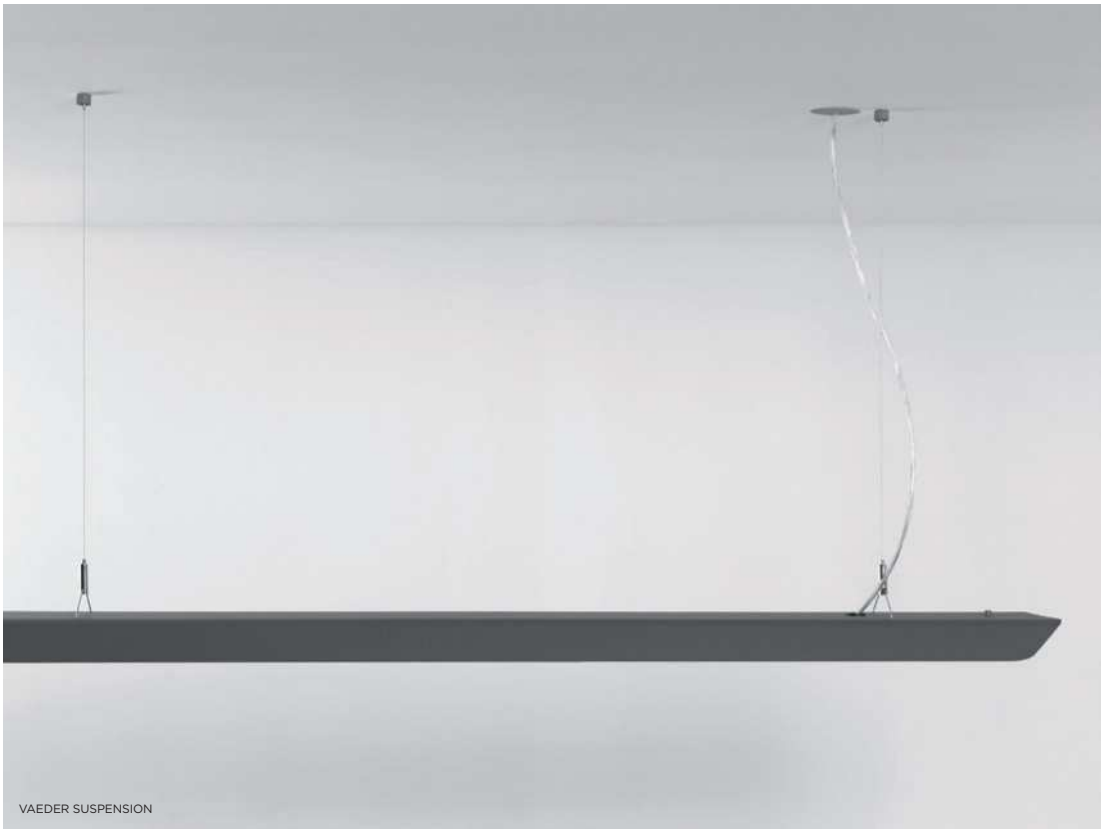

VAEDER SUSPENSION

VAEDER

Design — Gerd Couckhuyt

With a name derived from the English evade, it is clear from the start that Vaeder will be miles ahead of anything average. This fixture feels equally comfortable in an energy-conscious, ergonomic office environment, and in a home office. Its characteristic honeycomb structure in combination with a wafer-thin diffuser, minimizes glare, whilst its ground-breaking LED technology results in an energy-efficient and high-performing luminaire.

Otherworldly

Vaeder is offered as surface mounted or suspended. For surface mounting, it is positioned at a small distance from the ceiling (6 mm), which gives it a lighter look, as if floating against the ceiling. In its pendant version, Vaeder's soft curves create a futuristic fixture that appears to be hovering from another dimension. The fixture's suspension height can be modified using an adjuster system.

UGR16

Because of its unique design consisting of one LED source and three optical components, this luminaire provides bright and glare-free light with an optimal UGR value of 16. This makes Vaeder a perfect LED alternative to office luminaires with the traditional fluorescent T5/T8 lamps. With optimal results on light distribution, visual comfort and efficacy, this luminaire fully meets the EN 12464-1 office standard.

more info? *supermodular.com/en/vaeder*

Vaeder LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 650° | 4.20KG

DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	14080048	14080148	14080248
black struc - white	14080072	14080172	14080272
donkey grey struc - black	14080075	14080175	14080275
donkey grey struc - white	14080074	14080174	14080274
white struc - black	14080029	14080129	14080229
white struc - white	14080073	14080173	14080273

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

2700K / 65°	**2303lm / 36W**
3000K / 65°	**2245lm / 36W**
4000K / 65°	**2669lm / 36W**

Vaeder suspension (power feed surface) LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 650° | 4.70KG

DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	14081048	14081148	14081348
black struc - white	14081072	14081172	14081372
donkey grey struc - black	14081075	14081175	14081375
donkey grey struc - white	14081074	14081174	14081374
white struc - black	14081029	14081129	14081329
white struc - white	14081073	14081173	14081373

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

2700K / 65°	**2303lm / 36W**
3000K / 65°	**2245lm / 36W**
4000K / 65°	**2669lm / 36W**

Vaeder suspension (power feed recessed) LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 650° | 4.80KG

DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	**14081548**	**14081248**	**14081448**
black struc - white	**14081572**	**14081272**	**14081472**
donkey grey struc - black	**14081575**	**14081275**	**14081475**
donkey grey struc - white	**14081574**	**14081274**	**14081474**
white struc - black	**14081529**	**14081229**	**14081429**
white struc - white	**14081573**	**14081273**	**14081473**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

2700K / 65°	**2303lm / 36W**
3000K / 65°	**2245lm / 36W**
4000K / 65°	**2669lm / 36W**

WINK 82 WITH FLANGE

WINK 115

WINK

Design — Couvreur-Devos

Wink may be recessed, and therefore discreet, but its technical ingenuity is nothing short of remarkable. So is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out.

Down to the last detail

There's also Wink 82, and a Wink accessory: Wink flange. Compatible with all Wink lamps, Wink flange adds an extra accent in the form of a low ring around the spot, rather than a completely seamless installation. Its precision-designed conical shape complements the spot, enabling it to have a quiet conversation with the ceiling. Because of this accessory, Wink can now be also installed in concrete ceilings.

Refined finishing

Wink generates a symmetrical downwards facing beam of light. Asy Wink, however, emits light asymmetrically. While both look the same, they create a completely different light effect. The asymmetrical light allows you to really emphasise objects on the wall.

Unique light effect

With its symmetric or asymmetric lighting experience, Wink is perfect for any residential or hospitality project. Its uniform design allows you to combine both versions, in order to create different lighting effects in the same room. Have a go with this versatile lighting solution.

more info? *supermodular.com/en/wink*

Wink asy 82 LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES





14203009	WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
14203030	RECESSED RING Ø110 (FALSE CEILINGS)
14203032	WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)

500mA | IP54 | GWT 960° | 0.29KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**14201032**	**14201132**	**14201232**	**14201332**	**14201432**	**14201532**
white struc	**14201009**	**14201109**	**14201209**	**14201309**	**14201409**	**14201509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	520lm / 6.2W	**698lm / 9.2W**
3000K / 25°	541lm / 6.2W	**726lm / 9.2W**

Wink asy 82 LED spreadlight GE





1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

14203009	WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
14203030	RECESSED RING Ø110 (FALSE CEILINGS)
14203032	WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)

500mA | IP54 | GWT 960° | 0.29KG

	2700K / CRI90+	3000K / CRI90+
black struc	**14202032**	**14202132**
white struc	**14202009**	**14202109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K	432lm / 6.2W	**580lm / 9.2W**
3000K	449lm / 6.2W	**603lm / 9.2W**

REQUIRED PARTS BASED ON CEILING TYPE

Wink 82 LED GE



1X LED ARRAY INCL. | 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

14203009	WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
14203030	RECESSED RING Ø110 (FALSE CEILINGS)
14203032	WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)

Friends of hue | 500mA | IP54 | GWT 960° | 0.26KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**14200032**	**14200132**	**14200232**	**14200332**	**14200432**	**14200532**
white struc	**14200009**	**14200109**	**14200209**	**14200309**	**14200409**	**14200509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	493lm / 6.2W	**662lm / 9.2W**
3000K / 25°	512lm / 6.2W	**688lm / 9.2W**

Wink asy 115 LED GE



1X LED ARRAY INCL. 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES





13073009	WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
13073032	WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)
14204030	RECESSED RING Ø146 (FALSE CEILINGS)

500mA | IP54 | GWT 960° | 0.87KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13071032**	**13071332**	**13071632**	**13071132**	**13071432**	**13071732**
white struc	**13071009**	**13071309**	**13071609**	**13071109**	**13071409**	**13071709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	776lm / 11W	**1023lm / 16.2W**	1283lm / 23.4W
3000K / 25°	893lm / 11W	**1177lm / 16.2W**	1477lm / 23.4W

Wink asy 115 LED spreadlight GE





1X LED ARRAY INCL. 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13073009	WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
13073032	WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)
14204030	RECESSED RING Ø146 (FALSE CEILINGS)

500mA | IP54 | GWT 960° | 0.86KG

	2700K / CRI90+	3000K / CRI90+
black struc	**13071932**	**13072032**
white struc	**13071909**	**13072009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K	805lm / 11W	**1061lm / 16.2W**	1331lm / 23.4W
3000K	791lm / 11W	**1042lm / 16.2W**	1307lm / 23.4W

REQUIRED PARTS BASED ON CEILING TYPE

Wink 115 LED GE



1X LED ARRAY INCL. | 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

13073009	WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
13073032	WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)
14204030	RECESSED RING Ø146 (FALSE CEILINGS)

Friends of hue | 500mA | IP54 | GWT 960° | 0.86KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13070032**	**13070332**	**13070632**	**13070132**	**13070432**	**13070732**
white struc	**13070009**	**13070309**	**13070609**	**13070109**	**13070409**	**13070709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	833lm / 11W	**1142lm / 16.2W**	1520lm / 23.4W
3000K / 25°	952lm / 11W	**1306lm / 16.2W**	1738lm / 23.4W

02

JACK

02

LED

MARBULITO[1]
381

MARBULITO SUSPENSION[1]
383

MÉDARD[1]
387

MINUDE[1]
393

MINUDE SUSPENSION[1]
395

[1] to be combined with Ceiling base jack or Modupoint LED

JACK

12V

DEFINITIF
405

MARBULITO JACK
CEILING BASE FOR 2X JACK

MARBULITO JACK SUSPENSION
CEILING BASE FOR 2X JACK

MARBULITO JACK
MODUPOINT LED DEEP RECESSED 1X
MODUPOINT STICK 20CM

SEE ALSO

TRACK 48V - P417

MARBULITO

As a luminaire component for our newly redesigned Modupoint LED, Marbulito makes a big entrance. Suspended from a long cable, or plugged into the ceiling base – recessed or surface mounted – with a short or longer extender stick. In black or in white structure. You'll be seeing Marbulitos in all kinds of spaces.

A play of shapes

Originally designed to reflect miniaturization trends with our Pista track, Marbulito is ideal to play with shapes. Or is it balls? Try 2 or 3 eyes in the ceiling, at all kinds of heights and angles. Deciding won't be so easy.

more info? *supermodular.com/en/marbulito-jack*

MARBULITO JACK
MODUPOINT LED TRIMLESS

MARBULITO JACK
MODUPOINT LED DEEP RECESSED TRIMLESS 2X

MARBULITO JACK
MODUPOINT LED

MARBULITO JACK
CEILING BASE Ø200 FOR 3X JACK

MARBULITO JACK
CEILING BASE FOR 3X JACK

MARBULITO JACK
MODUPOINT LED STICK 20CM

Marbulito jack LED GE



1X LED ARRAY INCL. | 4.4W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.10KG

	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	**13423032**	**13423132**
white struc	**13423009**	**13423109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 28°	**322lm / 4.4W**
3000K / 28°	**322lm / 4.4W**

CEILING BASE JACK > MORE INFO SEE PAGE 987

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
				
TRAILING EDGE DIMMABLE (500mA driver)	black struc	**13492032**	**13490032**	**13491032**
	white struc	**13492009**	**13490009**	**13491009**
1-10V (500mA driver)	black struc	**13492232**	**13490232**	**13491232**
	white struc	**13492209**	**13490209**	**13491209**
DALI/PUSHDIM (500mA driver)	black struc	**13492432**	**13490432**	**13491432**
	white struc	**13492409**	**13490409**	**13491409**
CASAMBI (500mA driver)	black struc	**13495032**	**13493032**	**13494032**
	white struc	**13495009**	**13493009**	**13494009**

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
							
GEAR EXCLUDED (driver - see product page on website)	black struc	**13240532**	**13240732**	**13240632**	**13240832**	**13240332**	
	white struc	**13240509**	**13240709**	**13240609**	**13240809**	**13240309**	
	n/a						**13240400**

REQUIRED PARTS

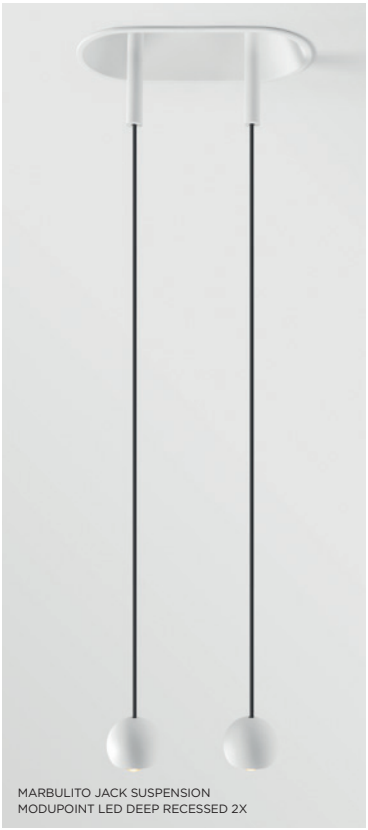

MARBULITO JACK SUSPENSION
MODUPOINT LED DEEP RECESSED 2X

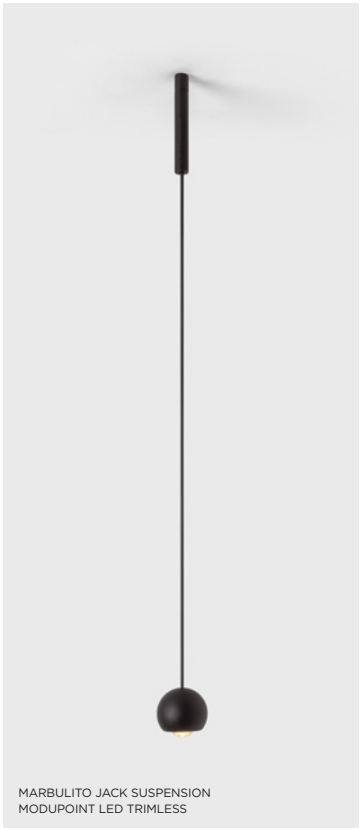

MARBULITO JACK SUSPENSION
MODUPOINT LED TRIMLESS

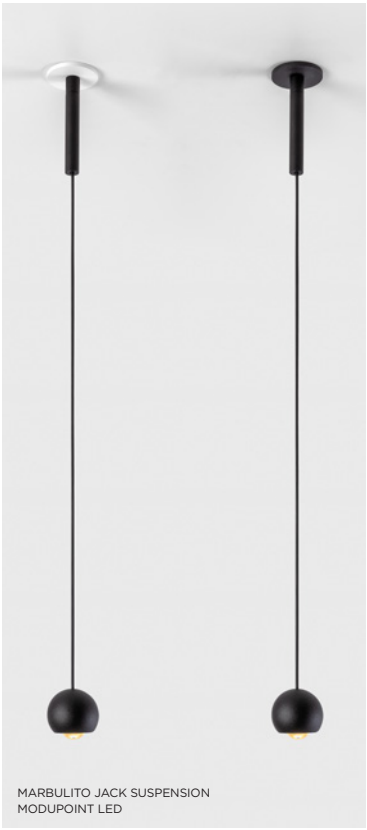

MARBULITO JACK SUSPENSION
MODUPOINT LED

MARBULITO JACK SUSPENSION
CEILING BASE Ø200 FOR 3X JACK

MARBULITO JACK SUSPENSION
CEILING BASE FOR 3X JACK

Marbulito jack suspension LED GE



1X LED ARRAY INCL. 4.4W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

Friends of hue | 500mA | IP20 | GWT 960° | 0.22KG

	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13424032	13424132
white struc	13424009	13424109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 28°	322lm / 4.4W
3000K / 28°	322lm / 4.4W

CEILING BASE JACK > MORE INFO SEE PAGE 987

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
				
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
							
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400

REQUIRED PARTS

MEDARD 42 JACK
MODUPOINT LED

MEDARD 42 JACK
MODUPOINT LED TRIMLESS
MODUPOINT LED STICK 30CM

MEDARD 42 JACK
MODUPOINT LED DEEP RECESSED 2X
MODUPOINT LED STICK 30CM

MEDARD 42 JACK
CEILING BASE Ø200 FOR 3X JACK
MODUPOINT LED STICK 20/30CM

SEE ALSO

CEILING - P151

TRACK 48V - P421
TRACK 230V - P476

MÉDARD

Design — Bleijh

It's the stick insect that inspired the Dutch design agency Bleijh for the creation of Médard. Highly flexible thanks to its orientable head, Médard can sit still as a standalone on a desk, or on the ceiling. In its miniature form, it looks graceful on its own, on a ceiling or as part of our Pista track or with a jack, on our redesigned Modupoint LED jack system.

Médard for everywhere

First, it was one sleek design. Modularity and fun ensued. From a table lamp, to more subtle surface mounted and recessed ceiling applications. Add lovely wall versions and a playful track variant, or plug it in our easy-to-install Modulpoint LED ceiling base – recessed or surface mounted – with or without extender sticks, and you've got yourself full-blown modularity.

Matching sizes, matching rings

Médard jack is but one member of the family. There are others, gracing walls or ceilings, standalone, or sliding playfully as smaller spots for our Pista track (48V). Médard 70 is a solid eyecatcher as a track spot (230V). And of equal diameter, Médard ceiling beautifies spaces as a surface-mounted and recessed luminaire.

more info? *supermodular.com/en/medard-jack*

MEDARD 42 JACK
MODUPOINT LED DEEP RECESSED TRIMLESS 1X
MODUPOINT LED STICK 20CM

MEDARD 42 JACK
MODUPOINT LED DEEP RECESSED TRIMLESS 2X
MODUPOINT LED STICK 10/20CM

MEDARD 42 JACK
CEILING BASE FOR 3X JACK
MODUPOINT LED STICK 10CM

Médard 42 jack LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

Friends of hue | 500mA | IP20 | GWT 960° | 0.19KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13434032	13434132	13434232	13434332
white struc	13434009	13434109	13434209	13434309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**657lm 8.5W**
3000K / 25°	**671lm 8.5W**

CEILING BASE JACK > MORE INFO SEE PAGE 987

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
				
TRAILING EDGE DIMMABLE (500mA driver)	black struc	**13492032**	**13490032**	**13491032**
	white struc	**13492009**	**13490009**	**13491009**
1-10V (500mA driver)	black struc	**13492232**	**13490232**	**13491232**
	white struc	**13492209**	**13490209**	**13491209**
DALI/PUSHDIM (500mA driver)	black struc	**13492432**	**13490432**	**13491432**
	white struc	**13492409**	**13490409**	**13491409**
CASAMBI (500mA driver)	black struc	**13495032**	**13493032**	**13494032**
	white struc	**13495009**	**13493009**	**13494009**

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
							
GEAR EXCLUDED (driver - see product page on website)	black struc	**13240532**	**13240732**	**13240632**	**13240832**	**13240332**	
	white struc	**13240509**	**13240709**	**13240609**	**13240809**	**13240309**	
	n/a						**13240400**

REQUIRED PARTS

MEDARD 42 JACK
CEILING BASE FOR 3X JACK

MEDARD 42 JACK
CEILING BASE FOR 2X JACK

WARM DIM

Médard 42 jack LED warm dim GE



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.19KG

	1800K - 3000K / CRI90+	
	35°	40°
black struc	13434432	13434532
white struc	13434409	13434509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**367lm / 6W**

CEILING BASE JACK / MODUPOINT LED

		CEILING BASE Ø200 GI FOR 3X JACK		CEILING BASE 320X58 GI FOR 2X JACK		CEILING BASE 420X58 GI FOR 3X JACK	
			WARM DIM		WARM DIM		WARM DIM
TRAILING EDGE DIMMABLE (500mA driver) (warm dim: 350mA driver)	black struc	13492032	13492132	13490032	13490132	13491032	13491132
	white struc	13492009	13492109	13490009	13490109	13491009	13491109
1-10V (500mA driver) (warm dim: 350mA driver)	black struc	13492232	13492332	13490232	13490332	13491232	13491332
	white struc	13492209	13492309	13490209	13490309	13491209	13491309
DALI/PUSHDIM (500mA driver) (warm dim: 350mA driver)	black struc	13492432	13492532	13490432	13490532	13491432	13491532
	white struc	13492409	13462509	13490409	13490509	13491409	13491509
CASAMBI (500mA driver) (warm dim: 350mA driver)	black struc	13495032	13495132	13493032	13493132	13494032	13494132
	white struc	13495009	13495109	13493009	13493109	13494009	13494109

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400

REQUIRED PARTS

MINUDE 45 ADJUSTABLE JACK - ANO BLACK STRUC
MODUPOINT LED TRIMLESS

MINUDE 45 ADJUSTABLE JACK - ANO BRONZE
MODUPOINT LED
MODUPOINT LED STICK 20CM

MINUDE 45 SUSPENSION JACK - ANO SILVER BRONZE
CEILING BASE FOR 3X JACK

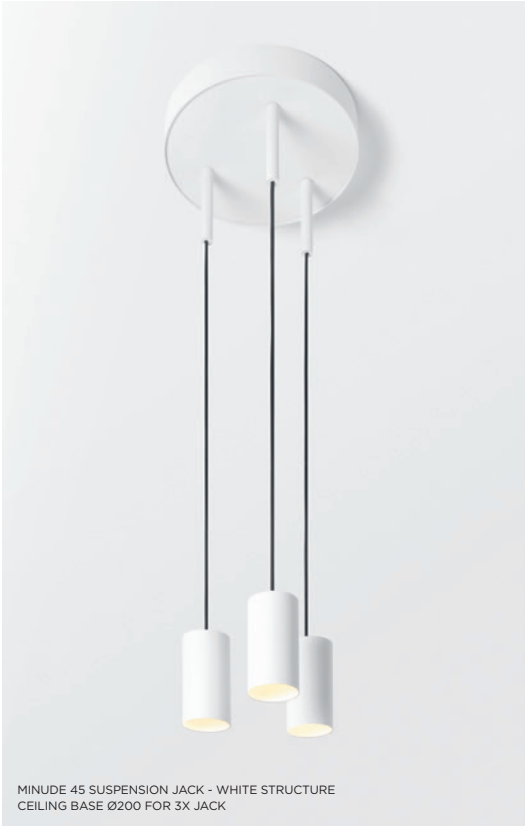

MINUDE 45 SUSPENSION JACK - WHITE STRUCTURE
CEILING BASE Ø200 FOR 3X JACK

SEE ALSO

CEILING - P85

CEILING - P163

TRACK 48V - P427

archiproducts DESIGN AWARDS WINNER 2019

GOOD DESIGN

MINUDE

Our miniature spot is an extremely simple cylinder-shaped light fixture with a lot to show. Endless applications, a variety of rich colours, phenomenal yogic flexibility. A deep-recessed light source for a glare-free light effect. To express a refined and minimalistic look & feel on walls or low ceilings. On high ceiling in its stand-alone suspended variant, as part of our Modupoint LED jack system or combined with Kompas and Hoolahoop.

Minude, more than one

Don't be afraid to go for more than one Minude, on our Pista track or Modupoint LED system, as spot lights or suspended. With Modupoint, there's the option of having Minude hugging the ceiling base – recessed or surface mounted, hanging gracefully as a pendant light, or at different heights using extender sticks.

Pure form, rich colours

Minude is a pure cylindrical shape with a thin, sharp edge and curved inner side. Showing off its 6 rich colours – black ano, champagne ano, bronze ano, silver bronze ano – achieved by anodization, and two additional colours, powder painted black and white structure. All variants have a matte black back side.

Quality lens and light

Minude's light quality will not be outshined by its minimalist design, however. Its beautifully concentrated light beam projected from a deep-recessed LED light source, provides a pleasant light output. Its sophisticated lens technology is well protected by the inner edge snuggling right up to the glass lens.

more info? *supermodular.com/en/minude-jack*

MINUDE 45 ADJUSTABLE JACK - ANO CHAMPAGNE
MODUPOINT LED DEEP RECESSED 1X
MODUPOINT LED STICK 20CM

MINUDE 45 ADJUSTABLE JACK - WHITE STRUC
MODUPOINT LED DEEP RECESSED 1X

MINUDE 45 ADJUSTABLE JACK - ANO BLACK
MODUPOINT LED DEEP RECESSED TRIMLESS 2X

MINUDE 45 ADJUSTABLE JACK - ANO SILVER BRONZE
CEILING BASE FOR 2X JACK

MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE
CEILING BASE Ø200 FOR 3X JACK

MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE
CEILING BASE FOR 3X JACK

MINUDE 45 ADJUSTABLE JACK - BLACK STRUCTURE
CEILING BASE FOR 2X JACK
MODUPOINT LED STICK 20CM

Minude 45 adjustable jack LED GE



1X LED ARRAY INCL. | 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

Friends of hue | 500mA | IP20 | GWT 960° | 0.24KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11463081	11463181
ano bronze	11463082	11463182
ano champagne	11463041	11463141
ano silver bronze	11463084	11463184
black struc	11463032	11463132
white struc	11463009	11463109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 30°	**598lm / 8.1W**
3000K / 30°	**610lm / 8.1W**

CEILING BASE JACK > MORE INFO SEE PAGE 987

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
				
TRAILING EDGE DIMMABLE (500mA driver)	black struc	**13492032**	**13490032**	**13491032**
	white struc	**13492009**	**13490009**	**13491009**
1-10V (500mA driver)	black struc	**13492232**	**13490232**	**13491232**
	white struc	**13492209**	**13490209**	**13491209**
DALI/PUSHDIM (500mA driver)	black struc	**13492432**	**13490432**	**13491432**
	white struc	**13492409**	**13490409**	**13491409**
CASAMBI (500mA driver)	black struc	**13495032**	**13493032**	**13494032**
	white struc	**13495009**	**13493009**	**13494009**

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
							
GEAR EXCLUDED (driver - see product page on website)	black struc	**13240532**	**13240732**	**13240632**	**13240832**	**13240332**	
	white struc	**13240509**	**13240709**	**13240609**	**13240809**	**13240309**	
	n/a						**13240400**

REQUIRED PARTS

MINUDE 45 SUSPENSION JACK - ANO CHAMPAGNE
MODUPOINT LED DEEP RECESSED TRIMLESS 2X

MINUDE 45 SUSPENSION JACK - ANO SILVER BRONZE
MODUPOINT LED TRIMLESS

MINUDE 45 SUSPENSION JACK - ANO SILVER BRONZE
CEILING BASE Ø200 FOR 3X JACK

MINUDE 45 SUSPENSION JACK - ANO CHAMPAGNE
CEILING BASE FOR 2X JACK

Minude 45 suspension jack LED GE



1X LED ARRAY INCL. | 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

Friends of hue | 500mA | IP20 | GWT 960° | 0.36KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11464081	11464181
ano bronze	11464082	11464182
ano champagne	11464041	11464141
ano silver bronze	11464084	11464184
black struc	11464032	11464132
white struc	11464009	11464109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 30°	**598lm / 8.1W**
3000K / 30°	**610lm / 8.1W**

CEILING BASE JACK > MORE INFO SEE PAGE 987

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
				
TRAILING EDGE DIMMABLE (500mA driver)	black struc	**13492032**	**13490032**	**13491032**
	white struc	**13492009**	**13490009**	**13491009**
1-10V (500mA driver)	black struc	**13492232**	**13490232**	**13491232**
	white struc	**13492209**	**13490209**	**13491209**
DALI/PUSHDIM (500mA driver)	black struc	**13492432**	**13490432**	**13491432**
	white struc	**13492409**	**13490409**	**13491409**
CASAMBI (500mA driver)	black struc	**13495032**	**13493032**	**13494032**
	white struc	**13495009**	**13493009**	**13494009**

MODUPOINT LED > MORE INFO SEE PAGE 987

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
							
GEAR EXCLUDED (driver - see product page on website)	black struc	**13240532**	**13240732**	**13240632**	**13240832**	**13240332**	
	white struc	**13240509**	**13240709**	**13240609**	**13240809**	**13240309**	
	n/a						**13240400**

REQUIRED PARTS

CEILING BASE Ø200 FOR 3X JACK

CEILING BASE FOR 2X JACK

CEILING BASE FOR 2X JACK

MODUPOINT LED

MODUPOINT LED DEEP RECESSED 1X

MODUPOINT LED TRIMLESS

MODUPOINT LED DEEP RECESSED TRIMLESS 2X

JACK ACCESSORIES

—

MODUPOINT LED

CEILING BASE JACK

MODUPOINT LED STICK

A contemporary version of our iconic Modulpoint, our new Modupoint LED is a modular lighting system with a wide range of ceiling bases, mounting options and miniature spot designs. It is an attractive solution for adding a minimalist style to both renovation and newly built projects.

Recessed or surface-mounted?

Modupoint's original recessed mounting option is for extreme minimalists, even more so if you go for a trimless look. A tiny jack inviting you to plug in any of our miniature designs. Now, a new, deep-recessed cove-like base, trim or trimless, offers even more fun options for adding a little mystery to your expression. For more challenging renovation projects, try one of our surface-mounted ceiling bases with 2 or 3 jacks.

A feast of miniature lighting

Once you choose your Modupoint mounting option, it's up to you to choose from a party of miniature jack spots. Start playing and mixing to get your selection just right. Marbulito, Médard or Minude against the wall or ceiling will offer a dramatic flair, while the suspended jack variants will create a more private area. Add more layers of light by using different sized extender sticks on our miniature spots.

Connected-ready, ready for life

Now, with so many lights, heights, colours and styles, we couldn't skip the option of adding a dimming system. Modupoint's ceiling bases can be fitted with different dimming protocols: Tre dim, 1-10V, DALI and Casambi, a powerful connected system that gives users the option to control smart lighting and transforms Modupoint LED into a true light for life.

more info? *supermodular.com/en/ceiling-base-jack*
supermodular.com/en/modupoint-led

Modupoint LED ø90 deep recessed 1x



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

III | IP20 | GWT 950° | 0.23KG | ▲

black struc	**13240532**
white struc	**13240509**

Modupoint LED ø90 deep recessed 2x



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

III | IP20 | GWT 960° | 0.34KG | ▲

black struc	**13240732**
white struc	**13240709**

Modupoint LED ø82 deep recessed trimless 1x



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210 [1]
12293430	GYPKIT TRIMLESS 150X150 - Ø82
13240930	CONCRETE KIT 150X150 - Ø82
13241030	RECESSED RING Ø82
13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

[1] can be used with Gypkit Trimless and Concrete Kit

IP20 | GWT 960° | 0.17KG

black struc	**13240632**
white struc	**13240609**

Modupoint LED ø82 deep recessed trimless 2x



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

11624130	CONBOX 140X400X100X210 [1]
12293530	GYPKIT TRIMLESS 300X150 - Ø82 2X
13241230	CONCRETE KIT 300X150 - Ø82 2X
13241130	RECESSED RING Ø82 2X
13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

[1] can be used with Gypkit Trimless and Concrete Kit

IP20 | GWT 960° | 0.29KG

black struc	**13240832**
white struc	**13240809**

Modupoint LED



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

III | IP20 | GWT 960° | 0.04KG

black struc	**13240332**
white struc	**13240309**

Modupoint LED trimless





LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

III | IP20 | GWT 950° | 0.09KG

n/a	**13240400**

Modupoint LED stick 10cm/20cm/30cm



! STICKS CAN BE COMBINED TO MAX. LENGTH OF 1200MM
! TO BE COMBINED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395

III | IP20 | 0.03KG (1) | 0.05KG (2) | 0.08KG (3) | ▲

	10CM(1)	20CM(2)	30CM(3)
black struc	**13240032**	**13240132**	**13240232**
white struc	**13240009**	**13240109**	**13240209**

WARM DIM

Ceiling base ø200 GI for 3x jack



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! 500mA DRIVER INCLUDED ('WARM DIM 350mA)

TRAILING EDGE DIMMABLE		WARM DIM *
black struc	13492032	13492132
white struc	13492009	13492109

1-10V		WARM DIM *
black struc	13492232	13492332
white struc	13492209	13492309

DALI/PUSHDIM		WARM DIM *
black struc	13492432	13492532
white struc	13492409	13492509

CASAMBI		WARM DIM *
black struc	13495032	13495132
white struc	13495009	13495109

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

WARM DIM

Ceiling base 320x58 GI for 2x jack



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! 500mA DRIVER INCLUDED ('WARM DIM 350mA)

TRAILING EDGE DIMMABLE		WARM DIM *
black struc	13490032	13490132
white struc	13490009	13490109

1-10V		WARM DIM *
black struc	13490232	13490332
white struc	13490209	13490309

DALI/PUSHDIM		WARM DIM *
black struc	13490432	13490532
white struc	13490409	13490509

CASAMBI		WARM DIM *
black struc	13493032	13493132
white struc	13493009	13493109

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC
13496009	BACKPLATE 352X90 WHITE STRUC

WARM DIM

Ceiling base 420x58 GI for 3x jack



LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395
! 500mA DRIVER INCLUDED ('WARM DIM 350mA)

TRAILING EDGE DIMMABLE		WARM DIM *
black struc	13491032	13491132
white struc	13491009	13491109

1-10V		WARM DIM *
black struc	13491232	13491332
white struc	13491209	13491309

DALI/PUSHDIM		WARM DIM *
black struc	13491432	13491532
white struc	13491409	13491509

CASAMBI		WARM DIM *
black struc	13494032	13494132
white struc	13494009	13494109

INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC
13496109	BACKPLATE 452X90 WHITE STRUC

Modupoint LED stick 10cm/20cm/30cm



! STICKS CAN BE COMBINED TO MAX. LENGTH OF 1200MM
! TO BE COMBINED WITH JACK LED FIXTURES:
MARBULITO > SEE PAGES 378-383
MÉDARD > SEE PAGES 384-389
MINUDE > SEE PAGES 390-395

	10CM(1)	20CM(2)	30CM(3)
black struc	13240032	13240132	13240232
white struc	13240009	13240109	13240209

CEILING BASE BACKPLATE









DEFINITIF

Over the years, Modular L.I. has developed extremely modular luminaires, and Definitif is one of them. Definitif stick connects to Supermodupoint and is actually no more than a stylish bar, which is available in three lengths.

more info? *supermodular.com/en/definitif*

Definitif MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

! TO BE INSTALLED WITH DEFINITIF STICK AND SUPERMODUPOINT (NOT INCLUDED)

ACCESSORIES





10040205	DEFINITIF STICK 10CM GE ALU
10040202	DEFINITIF STICK 10CM GE BLACK
10040201	DEFINITIF STICK 10CM GE WHITE STRUC
10040305	DEFINITIF STICK 20CM GE ALU
10040302	DEFINITIF STICK 20CM GE BLACK
10040301	DEFINITIF STICK 20CM GE WHITE STRUC
10040405	DEFINITIF STICK 30CM GE ALU
10040402	DEFINITIF STICK 30CM GE BLACK
10040401	DEFINITIF STICK 30CM GE WHITE STRUC
10000005	SUPERMODUPOINT EQ GE ALU
10000002	SUPERMODUPOINT EQ GE BLACK
10000001	SUPERMODUPOINT EQ GE WHITE STRUC

III | 12V | IP20 | GWT 960° | 0.07KG

alu	**10050105**
black	**10050102**
white struc	**10050101**

REQUIRED PARTS

03

TRACK

03

48V magnetic

MARBUL
412

MARBUL SUSPENSION
413

MARBULITO
418

MARBULITO SUSPENSION
419

MEDARD 42
423

MINUDE
429

MINUDE SUSPENSION
431

PISTA LINEAR
434

PISTA LINEAR FLAPS
440

PISTA LINEAR SPOTS
445

PLACEBO
449

SMART SURFACE TUBED 48[1]
454

SMART TUBED SUSPENSION 48[1]
455

[1] to be combined with Smart Cake / Smart Kup / Smart Lotis

TRACK

230V

CHARLATAN
464

KANON
468

MARBUL
473

MARBUL SUSPENSION
474



MEDARD 70
477

REKTOR
481



SEMIH 61
484

SINGLE ROUND
487

SINGLE SQUARE
489

SMART TUBED SUSPENSION 82[1]
492



SPEKTRA
495

STOVE
497

TULIP
501

[1] to be combined with Smart Cake / Smart Kup / Smart Lotis

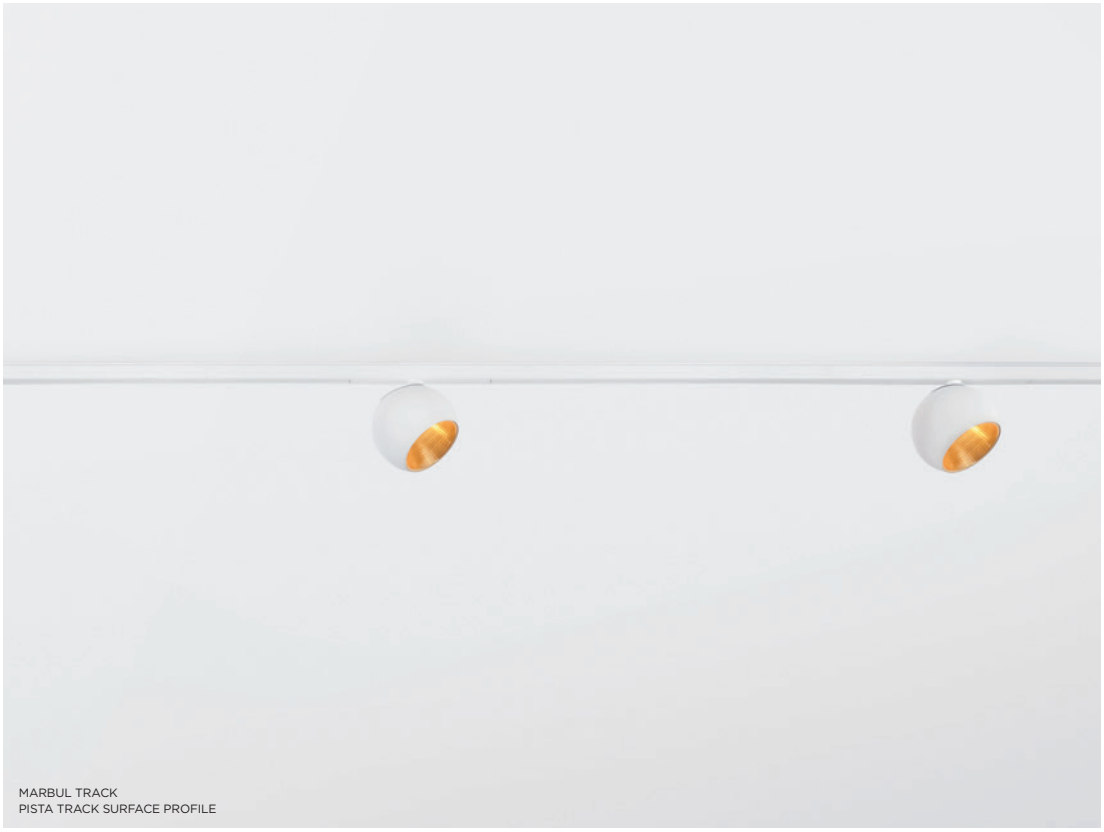

MARBUL TRACK
PISTA TRACK SURFACE PROFILE

MARBUL TRACK
MARBUL SUSPENSION ADJUSTABLE TRACK
PISTA TRACK SURFACE PROFILE

SEE ALSO

CEILING - P85

CEILING - P137

TRACK 230V - P471

HENRY VAN DE VELDE AWARDS 19 WINNER

GOOD DESIGN

MARBUL

Design — Jeffrey Huyghe

We haven't lost our Marbuls. In fact, we found new ways of expressing them. Following the ceiling surface-mounted and recessed, suspended, adjustable variants - find Marbul in the ceiling section - Marbul for Pista enters the scene. With its bigger volume, Marbul enhances the presence of our slender 48V track system. And get excited. This new Pista companion comes as an adjustable spot directly on the track, and in suspended, non-adjustable and adjustable versions, all with a range of coloured reflectors.
Curious about our other track systems? Try Marbul for our 230V track and extend your projects into retail and hospitality spaces

more info? *supermodular.com/en/pista-marbul*

Marbul track 48V 1x LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 960° | 0.84KG

1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13482032	13482132
white struc	13482009	13482109

DALI	2700K / CRI90+	3000K / CRI90+
black struc	13482332	13482432
white struc	13482309	13482409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000K / 25° alu	**718lm / 8.5W**

WARM DIM

Marbul track 48V 1x LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 960° | 0.84KG

1-10V	1800K - 3000K / CRI90+
black struc	13482232
white struc	13482209

DALI	1800K - 3000K / CRI90+
black struc	13482532
white struc	13482509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

Marbul suspension track 48V LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.85KG

1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13480032	13480132
white struc	13480009	13480109

DALI	2700K / CRI90+	3000K / CRI90+
black struc	13480332	13480432
white struc	13480309	13480409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000K / 25° alu	**718lm / 8.5W**

WARM DIM

Marbul suspension track 48V LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.85KG

1-10V	1800K - 3000K / CRI90+
black struc	13480232
white struc	13480209

DALI	1800K - 3000K / CRI90+
black struc	13480532
white struc	13480509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

REQUIRED PARTS

MARBUL SUSPENSION ADJUSTABLE TRACK
PISTA TRACK SURFACE PROFILE

Marbul suspension adjustable track 48V LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.84KG

1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13481032	13481132
white struc	13481009	13481109

DALI	2700K / CRI90+	3000K / CRI90+
black struc	13481332	13481432
white struc	13481309	13481409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000K / 25° alu	**718lm / 8.5W**

WARM DIM

Marbul suspension adjustable track 48V warm dim LED GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR
! LONGER SUSPENSION CABLE ON REQUEST
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.84KG

1-10V	1800K - 3000K / CRI90+
black struc	13481232
white struc	13481209

DALI	1800K - 3000K / CRI90+
black struc	13481532
white struc	13481509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**955lm / 15W**

REQUIRED PARTS

MARBULITO TRACK
PISTA TRACK LINEAR LED
PISTA TRACK RECESSED TRIMLESS PROFILE

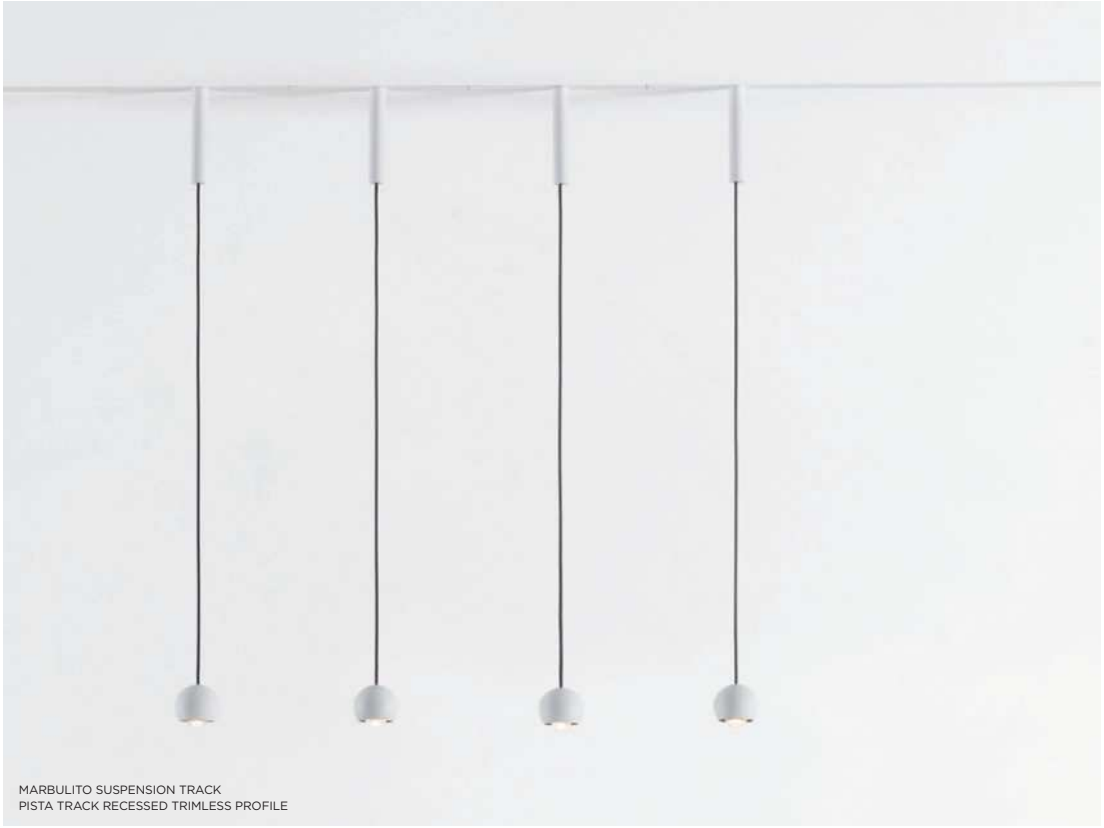

MARBULITO SUSPENSION TRACK
PISTA TRACK RECESSED TRIMLESS PROFILE

SEE ALSO

JACK - P379

MARBULITO

Designed specifically for Pista's magnetic track rails, Marbulito takes accent lighting to the next level. With a diameter of 41mm, Marbulito is a perfect match for the thin and slim look of Pista. Thanks to its 2m cable, Marbulito suspended can be used for elegant executions on high ceilings.

More modularity with Modupoint

Because of its popularity, Marbulito can also be spotted on our redesigned Modupoint LED system. Plug a unit directly into the ceiling base, or with extender sticks, or try out the suspended variant. Don't miss it in the jack section. In any case, keep experimenting, there's more to love about this little stunner.

more info? *supermodular.com/en/pista-marbulito*

Marbulito track 48V 1x LED GI



1X LED ARRAY INCL. 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 960° | 0.20KG

1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13420032	13420432
white struc	13420009	13420409

DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13420132	13420532
white struc	13420109	13420509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 28°	**332lm / 6.5W**
3000K / 28°	**332lm / 6.5W**

Marbulito track 48V 2x LED GI



2X LED ARRAY INCL. 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 960° | 0.19KG

1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13421032	13421432
white struc	13421009	13421409

DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13421132	13421532
white struc	13421109	13421509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen output per lamp module)

2700K / 28°	**332lm / 10.5W**
3000K / 28°	**332lm / 10.5W**

Marbulito suspension track 48V 1xLED



1X LED ARRAY INCL. | 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.35KG

1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	**13422032**	**13422432**
white struc	**13422009**	**13422409**

DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	**13422132**	**13422532**
white struc	**13422109**	**13422509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 28°	**332lm / 6.5W**
3000K / 28°	**332lm / 6.5W**

MEDARD 42 TRACK
PISTA TRACK LINEAR LED
PISTA TRACK UP/DOWN PROFILE

MEDARD 42 TRACK 2X
PISTA TRACK LINEAR LED
PISTA TRACK SURFACE PROFILE

SEE ALSO

CEILING - P151

JACK - P385

TRACK 230V - P476

MÉDARD 42

Design — Bleijh

First, it was one sleek design inspired by the stick insect, modularity and fun ensued. From a table lamp to more subtle surface-mounted and recessed ceiling applications. From lovely wall versions to playful track rail variants. Médard 42 is ready to slide on our 48V track rail.

One design, fun with track rails

Play with the designs you love. Click in our miniaturised design, Médard 42, on our magnetic Pista track and slide it where you need it. Thanks to Médard's impressive flexibility — due to its orientable head — designers can create special accents in the room, wherever they please. Add in more of the Médard family to create further accents while keeping a sophisticated, uniform expression.

Médard for Modupoint LED

If you love Médard, and are open to something other than a track, check out Médard for Modupoint LED. A plug & play version for our redesigned Modupoint ceiling base, Médard can be clicked-in directly into the base, or extended with extender sticks.

more info? *supermodular.com/en/pista-medard-42*

MEDARD 42 TRACK
PISTA TRACK LINEAR LED
PISTA TRACK RECESSED TRIMLESS PROFILE

MEDARD 42 TRACK
PISTA TRACK LINEAR LED
PISTA TRACK UP/DOWN PROFILE

Médard 42 track 48V 1x LED GI



1X LED ARRAY INCL. 8.1W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 960° | 0.20KG

1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13430032	13430232	13430432	13430632
white struc	13430009	13430209	13430409	13430609

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13430132	13430332	13430532	13430732
white struc	13430109	13430309	13430509	13430709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**702lm / 10.5W**
3000K / 25°	**702lm / 10.5W**

WARM DIM

Médard 42 track 48V 1x LED warm dim GI



1X LED ARRAY INCL. 6W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 960° | 0.20KG

1-10V	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433032	13433132
white struc	13433009	13433109

DALI	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433432	13433532
white struc	13433409	13433509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 35°	**367lm / 8W**

REQUIRED PARTS

MEDARD 42 TRACK 2X
PISTA TRACK UP/DOWN PROFILE

MEDARD 42 TRACK 2X
PISTA TRACK RECESSED FLANGE PROFILE

Médard 42 track 48V 2x LED GI



2X LED ARRAY INCL. 8.1W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.36KG

1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13431032	13431232	13431432	13431632
white struc	13431009	13431209	13431409	13431609

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13431132	13431332	13431532	13431732
white struc	13431109	13431309	13431509	13431709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen output per lamp module)

2700K / 25°	**702lm / 18.5W**
3000K / 25°	**702lm / 18.5W**

WARM DIM

Médard 42 track 48V 2x LED warm dim GI



2X LED ARRAY INCL. 6W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.36KG

1-10V	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433232	13433332
white struc	13433209	13433309

DALI	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433632	13433732
white struc	13433609	13433709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen output per lamp module)

@3000K / 35°	**367lm / 14W**

REQUIRED PARTS

MINUDE 45 ADJUSTABLE TRACK 2X
PISTA TRACK LINEAR LED
PISTA TRACK RECESSED TRIMLESS PROFILE

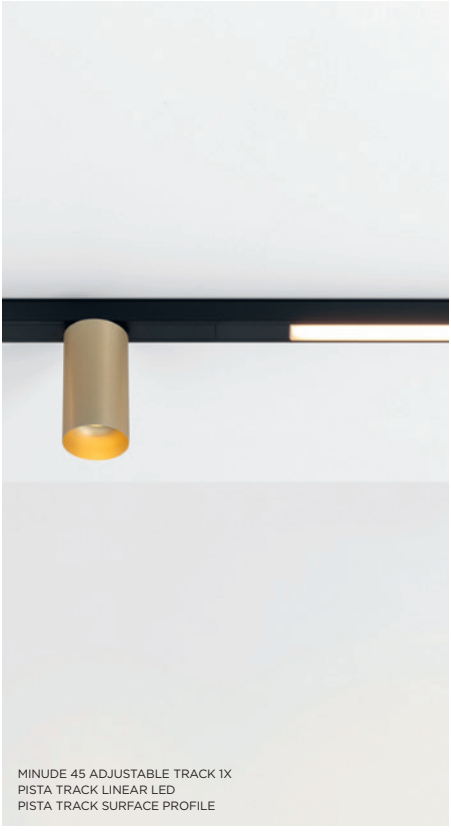

MINUDE 45 ADJUSTABLE TRACK 1X
PISTA TRACK LINEAR LED
PISTA TRACK SURFACE PROFILE

MINUDE 45 ADJUSTABLE TRACK 2X
MINUDE 45 SUSPENSION TRACK
PISTA TRACK RECESSED FLANGE PROFILE

SEE ALSO

CEILING - P85

CEILING - P163

JACK - P391

archiproducts DESIGN AWARDS WINNER 2019

GOOD DESIGN

MINUDE

With our miniaturized spotlight, you'll simply need our Pista track rail system for your endless choices. Minude as a 48V track spot, or Minude as an intimate 48V suspended track spot. And a trail of Minudes on single and multiple rails, anywhere along the way. Also available in a semi-recessed application for walls and ceilings, and as a stand-alone pendant or combined with our Kompas ceiling base.

Minude for Modupoint LED

If you love Minude, and are open to something other than a track, check out Minude for Modupoint LED. A plug & play version for our redesigned Modupoint ceiling base, Minude can be clicked-in directly into the base, or extended with extender sticks, or even as a suspended variant.

more info? *supermodular.com/en/pista-minude*

MINUDE 45 ADJUSTABLE TRACK
PISTA TRACK LINEAR LED
PISTA TRACK UP/DOWN PROFILE

MINUDE 45 ADJUSTABLE TRACK 2X
PISTA TRACK RECESSED FLANGE PROFILE

Minude 45 adjustable track 48V 1x LED GI



1X LED ARRAY INCL. 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 960° | 0.38KG

1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460081	11460281
ano bronze	11460082	11460282
ano champagne	11460041	11460241
ano silver bronze	11460084	11460284
black struc	11460032	11460232
white struc	11460009	11460209

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460181	11460381
ano bronze	11460182	11460382
ano champagne	11460141	11460341
ano silver bronze	11460184	11460384
black struc	11460132	11460332
white struc	11460109	11460309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 30°	**686lm / 10.5W**
3000K / 30°	**686lm / 10.5W**

Minude 45 adjustable track 48V 2x LED GI



2X LED ARRAY INCL. 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 960° | 0.57KG

1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460481	11460681
ano bronze	11460482	11460682
ano champagne	11460441	11460641
ano silver bronze	11460484	11460684
black struc	11460432	11460632
white struc	11460409	11460609

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460581	11460781
ano bronze	11460582	11460782
ano champagne	11460541	11460741
ano silver bronze	11460584	11460784
black struc	11460532	11460732
white struc	11460509	11460709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - lumen output per lamp module)

2700K / 30°	**686lm / 18.5W**
3000K / 30°	**686lm / 18.5W**

REQUIRED PARTS

MINUDE 45 SUSPENSION TRACK
PISTA TRACK SURFACE PROFILE

Minude 45 suspension track 48V 1x LED GI



1X LED ARRAY INCL. | 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.
ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 960° | 0.50KG

1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11462081	11462281
ano bronze	11462082	11462282
ano champagne	11462041	11462241
ano silver bronze	11462084	11462284
black struc	11462032	11462232
white struc	11462009	11462209

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11462181	11462381
ano bronze	11462182	11462382
ano champagne	11462141	11462341
ano silver bronze	11462184	11462384
black struc	11462132	11462332
white struc	11462109	11462309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 30°	**686lm / 10.5W**
3000K / 30°	**686lm / 10.5W**

REQUIRED PARTS

PISTA TRACK LINEAR LED
PISTA TRACK UP/DOWN PROFILE

PISTA TRACK LINEAR LED
PISTA TRACK UP/DOWN PROFILE

PISTA TRACK LINEAR LED
PISTA TRACK SURFACE PROFILE

PISTA LINEAR

Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. But Pista isn't just about miniaturization, it's also about personalization.

Create unique configurations

Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities really are endless. Even after installation, you can change the lighting configuration thanks to the magnetic track rails. Two LED linear modules, two entirely different effects. The first, beautifully functional with powerful lumen packages (1000 lm/m). The second, Night Light is pure design, for more ambient and intimate lighting.

more info? *supermodular.com/en/pista*

Pista track 48V LED linear (500mm) GI



1X LED-STRIP INCL. | 8.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 650° | 0.26KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412032	13412532
white struc	13412009	13412509

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413032	13413532
white struc	13413009	13413509

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414032	13414532
white struc	13414009	13414509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**493lm / 8.5W**
3000K	**517m / 8.5W**

Pista track 48V LED linear (1000mm) GI



1X LED-STRIP INCL. | 17W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 650° | 0.47KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412132	13412632
white struc	13412109	13412609

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413132	13413632
white struc	13413109	13413609

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414132	13414632
white struc	13414109	13414609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**985lm / 17W**
3000K	**1033lm / 17W**

Pista track 48V LED linear (1500mm) GI



1X LED-STRIP INCL. | 25.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 650° | 0.69KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412232	13412732
white struc	13412209	13412709

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413232	13413732
white struc	13413209	13413709

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414232	13414732
white struc	13414209	13414709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1478lm / 25.5W**
3000K	**1550m / 25.5W**

Pista track 48V LED linear (2000mm) GI



1X LED-STRIP INCL. | 34W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 650° | 0.90KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	**13412332**	**13412832**
white struc	**13412309**	**13412809**

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	**13413332**	**13413832**
white struc	**13413309**	**13413809**

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	**13414332**	**13414832**
white struc	**13414309**	**13414809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1970lm / 34W**
3000K	**2067m / 34W**

Pista track 48V LED linear (2500mm) GI



1X LED-STRIP INCL. | 42.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 650° | 1.13KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	**13412432**	**13412932**
white struc	**13412409**	**13412909**

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	**13413432**	**13413932**
white struc	**13413409**	**13413909**

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	**13414432**	**13414932**
white struc	**13414409**	**13414909**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**2463lm / 42.5W**
3000K	**2583m / 42.5W**

Pista track 48V LED linear night light (500mm) GI



1X LED-STRIP INCL. | 8.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 650° | 0.26KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415032	13415532

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416032	13416532

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417032	13417532

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

2700K	**81lm / 8.5W**
3000K	**84lm / 8.5W**

Pista track 48V LED linear night light (1000mm) GI



1X LED-STRIP INCL. | 17W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 650° | 0.47KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415132	13415632

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416132	13416632

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417132	13417632

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

2700K	**161lm / 17W**
3000K	**169lm / 17W**

Pista track 48V LED linear night light (1500mm) GI



1X LED-STRIP INCL. | 25.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V | IP20 | GWT 650° | 0.69KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415232	13415732

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416232	13416732

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417232	13417732

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

2700K	**242lm / 25.5W**
3000K	**253lm / 25.5W**

Pista track 48V LED linear night light (2000mm) GI



1X LED-STRIP INCL. | 34W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 650° | 0.90KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415332	13415832

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416332	13416832

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417332	13417832

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

2700K	322lm / 34W
3000K	338lm / 34W

Pista track 48V LED linear night light (2500mm) GI



1X LED-STRIP INCL. | 42.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | III | 48V | IP20 | GWT 650° | 1.13KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415432	13415932

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416432	13416932

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417432	13417932

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

2700K	403lm / 42.5W
3000K	422lm / 42.5W

PISTA TRACK LINEAR LED FLAPS
PISTA TRACK SURFACE PROFILE

PISTA TRACK LINEAR LED FLAPS
PISTA TRACK UP/DOWN PROFILE

PISTA TRACK LINEAR LED FLAPS
PISTA TRACK SURFACE PROFILE

PISTA LINEAR FLAPS

The two thin, elegant flaps on both sides of Pista's linear module make it obviously beneficial. The module shows off an interesting esthetical value and has the functional feature of reducing glare. Additionally, the flaps have the visual effect of extending the slim track profile. This gives designers endless options to create interesting light patterns.
Available in 5 different sizes, in black and white structure.

more info? *supermodular.com/en/pista-linear-flaps*

Pista track 48V LED linear flaps GI (500mm)



X LED-STRIP INCL. 8.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V IP20 GWT 960° 0.25KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452032	13452532
white struc	13452009	13452509

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450032	13450532
white struc	13450009	13450509

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451032	13451532
white struc	13451009	13451509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**608lm / 8.5W**
3000K	**637lm / 8.5W**

Pista track 48V LED linear flaps GI (1000mm)



X LED-STRIP INCL. 17W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V IP20 GWT 960° 0.48KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452132	13452632
white struc	13452109	13452609

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450132	13450632
white struc	13450109	13450609

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451132	13451632
white struc	13451109	13451609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1214lm / 17W**
3000K	**1274lm / 17W**

Pista track 48V LED linear flaps GI (1500mm)



X LED-STRIP INCL. 25.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

48V IP20 GWT 960° 0.70KG

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452232	13452732
white struc	13452209	13452709

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450232	13450732
white struc	13450209	13450709

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451232	13451732
white struc	13451209	13451709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**1822lm / 25.5W**
3000K	**1911lm / 25.5W**

Pista track 48V LED linear flaps GI (2000mm)



X LED-STRIP INCL. 34W

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452332	13452832
white struc	13452309	13452809

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450332	13450832
white struc	13450309	13450809

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451332	13451832
white struc	13451309	13451809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**2429lm / 34W**
3000K	**2548lm / 34W**

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Pista track 48V LED linear flaps GI (2500mm)



X LED-STRIP INCL. 42.5W

NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452432	13452932
white struc	13452409	13452909

1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450432	13450932
white struc	13450409	13450909

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451432	13451932
white struc	13451409	13451909

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**3037lm / 42.5W**
3000K	**3185lm / 42.5W**

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

PISTA TRACK LINEAR SPOTS 8X
PISTA TRACK SURFACE PROFILE

PISTA TRACK LINEAR SPOTS 8X
PISTA TRACK RECESSED TRIMLESS PROFILE

PISTA TRACK LINEAR SPOTS 16X
PISTA TRACK LINEAR LED
PISTA TRACK RECESSED FLANGE PROFILE

PISTA LINEAR SPOTS

When you look up to see what's giving small, charming light bursts underneath our slim rail, you'll see it: a trail of tiny but powerful LED spots. As they are fully integrated in the profile, nothing sticks out beneath. Available in units of 8x and 16x, in black and white structure, the spots enable designers to create accents using a linear module, and still enjoy Pista's streamlined design. Choose between 2 beam angles, medium or flood, and 1-10V or DALI dimming systems.

16 linear spots

Pista's popular linear spots just got longer - from 8x to 16x - and more powerful. With 1800 lm, and a UGR below 19, this makes Pista an original and elegant choice for office applications. Only style - and nothing else - sticks out with this charming trail of accent lights; Pista keeps its streamlined shape. A perfect luminaire for highlighting objects or the architectural features of a space.

more info? *supermodular.com/en/pista-linear-spots*

PISTA TRACK LINEAR SPOTS 8X
PISTA TRACK LINEAR LED FLAPS
PISTA TRACK SURFACE PROFILE

PISTA TRACK LINEAR SPOTS 16X
PISTA TRACK RECESSED FLANGE PROFILE

Pista track 48V LED linear spots (8x) GI



1X LED LINE INCL. 8W

1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13461032	13461132	13461232	13461332
white struc	13461009	13461109	13461209	13461309

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13461432	13461532	13461632	13461732
white struc	13461409	13461509	13461609	13461709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**744lm / 9W**
3000K / 25°	**796lm / 9W**

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

Pista track 48V LED linear spots (16x) GI



1X LED LINE INCL. 19W

1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13460032	13460132	13460232	13460332
white struc	13460009	13460109	13460209	13460309

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13460432	13460532	13460632	13460732
white struc	13460409	13460509	13460609	13460709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**1516lm / 19W**
3000K / 25°	**1623lm / 19W**

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 456-461

REQUIRED PARTS

PLACEBO DOWN WITH GLASS TUBE 46MM DOWN
PLACEBO SOMBRERO - BLACK MATT
PISTA TRACK SURFACE PROFILE

PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO BRONZE
PISTA TRACK SUSPENDED PROFILE

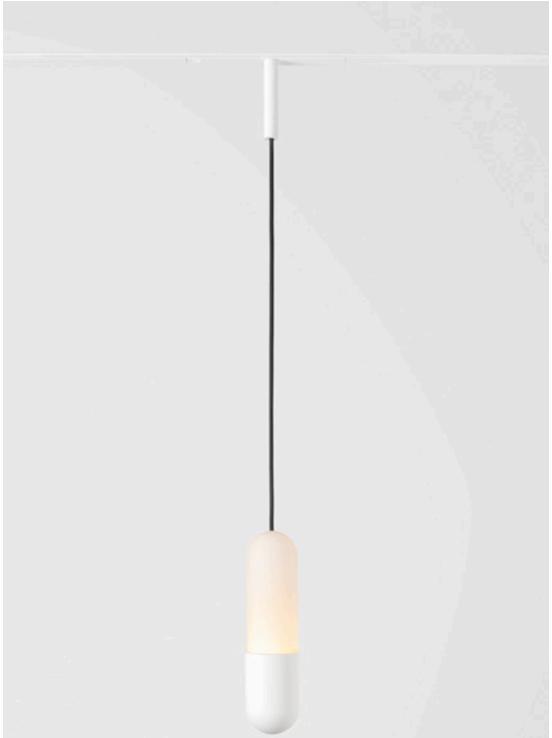

PLACEBO UP WITH GLASS TUBE 130MM UP - WHITE STRUC
PISTA TRACK RECESSED FLANGE PROFILE

PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN
PLACEBO BEANIE - BLACK MATT
PISTA TRACK RECESSED FLANGE PROFILE

SEE ALSO

CEILING - P85

CEILING - P209

PLACEBO

Design — Jeffrey Huyghe

Placebo joins Pista, our 48V track rail family to add lots of playful shapes with volume. Placebo is already a very large product family available with a ball and cylindrical glass bulb, different sizes, up and down lighting, and stylish shade accessories to dress it up. So many fun light effects to try out in residential, hospitality and retail spaces.

A track of mix & match

All of Placebo's LED units slide in wonderfully on our Pista track. In white and black structure, anodised champagne, bronze, silver bronze and black. Decide on a finish, then move on to choosing a tube or a ball shape, each in 2 sizes, with an up or down light effect. Add volume and presence to your Placebo expression with any of our 3 shades, Douli, Beanie and Sombrero. And watch the light effects they create!

Playful Placebo effect

8 models to start from. Imagine a row or flock of changing Placebos, above a dining room table or a long counter space. Alternating between up and down lights, a tube shape or a ball shape. Go for Placebo with warm dim, tune down the intensity of your light and enjoy a change of colour temperature to a warmer, cosy light.

more info? *supermodular.com/en/pista-placebo*

PLACEBO DOWN WITH GLASS BALL Ø90MM DOWN - ANO SILVER BRONZE
PISTA TRACK RECESSED TRIMLESS PROFILE

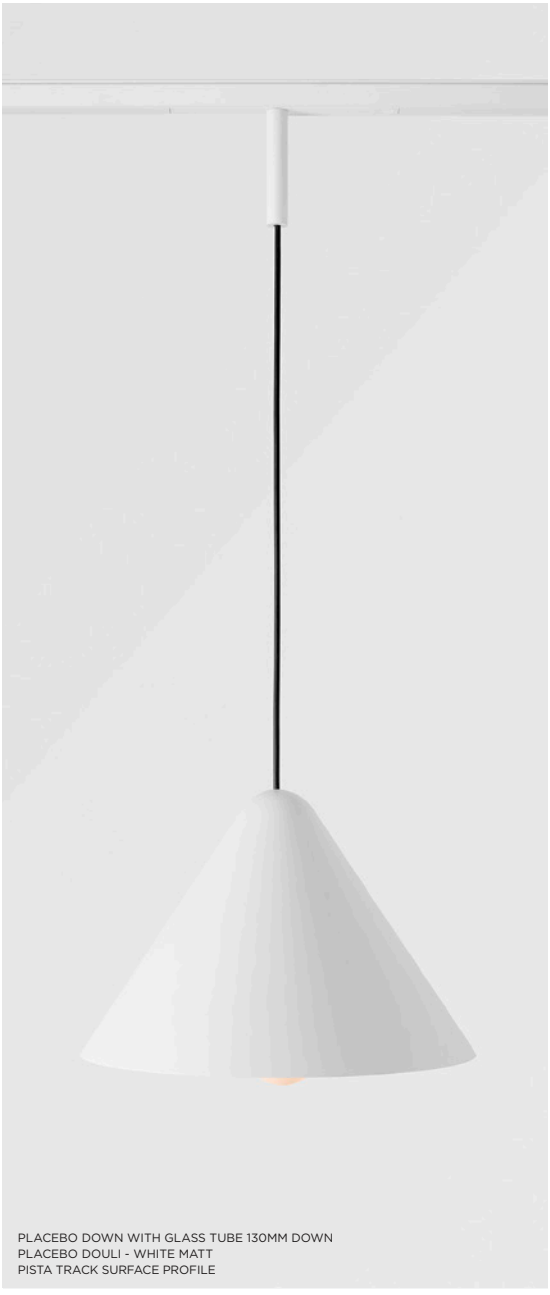

PLACEBO DOWN WITH GLASS TUBE 130MM DOWN
PLACEBO DOULI - WHITE MATT
PISTA TRACK SURFACE PROFILE

PLACEBO SHADES

											
BEANIE				DOULI				SOMBRERO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	**12628083**	**12628018**	**12628017**	**12629038**	**12629083**	**12629018**	**12629017**	**12627038**	**12627083**	**12627018**	**12627017**

Placebo down track 48V LED GI



1X LED MODULE INCL. | 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED); LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER. ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 650° | 0.36KG

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	13540181	13540381
ano bronze	13540182	13540382
ano champagne	13540141	13540341
ano silver bronze	13540184	13540384
black struc	13540132	13540332
white struc	13540109	13540309

DALI	2700K / CRI90+	3000K / CRI90+
ano black	13540781	13540981
ano bronze	13540782	13540982
ano champagne	13540741	13540941
ano silver bronze	13540784	13540984
black struc	13540732	13540932
white struc	13540709	13540909

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 7.1W**
3000K	**625lm / 7.1W**

WARM DIM

Placebo down track 48V LED warm dim GI



1X LED MODULE INCL. | 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED); LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER. ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 650° | 0.36KG

1-10V	1800K - 3000K / CRI90+
ano black	13540581
ano bronze	13540582
ano champagne	13540541
ano silver bronze	13540584
black struc	13540532
white struc	13540509

DALI	1800K - 3000K / CRI90+
ano black	13541181
ano bronze	13541182
ano champagne	13541141
ano silver bronze	13541184
black struc	13541132
white struc	13541109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K / glass ball ø155	**365lm / 8.4W**

REQUIRED PARTS

PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO SILVER BRONZE
PLACEBO BEANIE - BRONZE

PLACEBO UP WITH GLASS TUBE 130MM UP - ANO CHAMPAGNE
PLACEBO DOULI - CHAMPAGNE

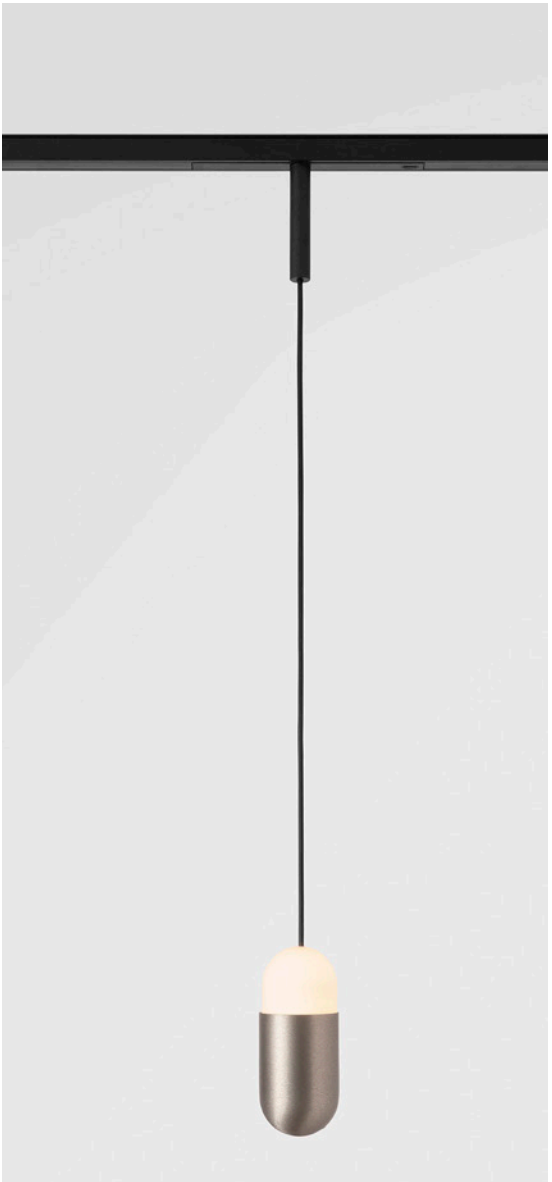

PLACEBO UP WITH GLASS TUBE 46MM UP - ANO SILVER BRONZE
PISTA TRACK SURFACE PROFILE

PLACEBO SHADES







BEANIE				DOULI				SOMBRERO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	**12628083**	**12628018**	**12628017**	**12629038**	**12629083**	**12629018**	**12629017**	**12627038**	**12627083**	**12627018**	**12627017**

Placebo up track 48V LED GI



1X LED MODULE INCL. | 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED); LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER. ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 650° | 0.36KG

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	13540081	13540281
ano bronze	13540082	13540282
ano champagne	13540041	13540241
ano silver bronze	13540084	13540284
black struc	13540032	13540232
white struc	13540009	13540209

DALI	2700K / CRI90+	3000K / CRI90+
ano black	13540681	13540881
ano bronze	13540682	13540882
ano champagne	13540641	13540841
ano silver bronze	13540684	13540884
black struc	13540632	13540832
white struc	13540609	13540809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

2700K	**608lm / 7.1W**
3000K	**625lm / 7.1W**

WARM DIM

Placebo up track 48V LED warm dim GI



1X LED MODULE INCL. | 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED); LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
! LONGER SUSPENSION CABLE ON REQUEST
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER. ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 456-461

Friends of hue | 48V | IP20 | GWT 650° | 0.36KG

1-10V	1800K - 3000K / CRI90+
ano black	13540481
ano bronze	13540482
ano champagne	13540441
ano silver bronze	13540484
black struc	13540432
white struc	13540409

DALI	1800K - 3000K / CRI90+
ano black	13541081
ano bronze	13541082
ano champagne	13541041
ano silver bronze	13541084
black struc	13541032
white struc	13541009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(glass ball ø155)

@3000K / glass ball ø155	**365lm / 8.4W**

SMART SURFACE TUBED 48 TRACK
SMART CAKE 48

SMART SURFACE TUBED 48 TRACK
SMART KUP 48

SMART TUBED SUSPENSION48 TRACK
SMART LOTIS 48

SEE ALSO

CEILING - P259

SMART ACCESSORIES

—

SURFACE TUBED 48

TUBED SUSPENSION 48

Smart surface tubed 48 is ready to roll with a 48V track adapter on the Pista rail track. If you want to play with layers of light on the same track, or create a cosier atmosphere for an area of the track, why not add a few Smart tubed suspension 48?

more info? *supermodular.com/en/pista-smart-surface-tubed*

Smart surface tubed 48 track 48V 1x LED GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 48 (+)

TRACK 48V COMPONENTS > SEE PAGES 456-461

III | 48V | IP20 | GWT 960° | 0.33KG

1-10V	
black struc	**12904032**
white struc	**12904009**

DALI	
black struc	**12904132**
white struc	**12904109**

Smart surface tubed 48 track 48V 2x LED GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 48 (+)

TRACK 48V COMPONENTS > SEE PAGES 456-461

III | 48V | IP20 | GWT 960° | 0.44KG

1-10V	
black struc	**12904232**
white struc	**12904209**

DALI	
black struc	**12904332**
white struc	**12904309**

Smart tubed suspension 48 track 48V 1x LED GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 48 (+)

TRACK 48V COMPONENTS > SEE PAGES 456-461

III | 48V | IP20 | GWT 960° | 0.39KG

1-10V	
black struc	12903032
white struc	12903009

DALI	
black struc	12903132
white struc	12903109

Smart combinations & accessories

SMART 48/48+ - SURFACE TUBED TRACK 48V, TUBED SUSPENSION TRACK 48V

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED TRACK 48V Ø48 GI 1X/2X	TUBED SUSPENSION TRACK 48V Ø48 GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	Ⓜ	Ⓜ
				LED warm dim		
Smart asy lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		

PISTA TRACK LINEAR LED
UP/DOWN SUSPENSION CABLE

FLEXIBLE CONNECTION

TWIN SUSPENSION CABLE
TWIN BRACKET

BRACKET INCL. SAFETY CABLE FOR CLIMATE CONTROL CEILINGS

PISTA TRACK LINEAR LED
SURFACE MOUNTED LED GEAR

MEDARD 42 TRACK
POWER FEED CABLE + CONNECTION BOX

TRACK 48V COMPONENTS

—

PROFILE

SUSPENSION

POWER FEED

ENDPLATE & COVER

CONNECTION

LED GEAR

more info? *supermodular.com/en/pista-track-48v*

Our favourite 48V track is offering quite a few novelties that will open up even more options for designing your lighting concepts for office spaces, hospitality, retail and residential environments. An easy installation option, an uplight family member, click-in brackets for climate control ceilings. So many options are coming your way.

Easy installation

It's easier and faster than ever to install Pista recessed. It now comes with a version that includes a flange. No need to have a perfect, seamless plasterwork all around, the flange will cover the edges. And no worries, it's compatible with all of Pista's existing LED modules and fixtures. We even designed new 90° and 180° connections to fit!

Up/Down

Pista suspended includes the option of having light on the top side of its track rail. Try accent and general light upwards, down or both, general light with general light, or accents all over. All of Pista's exciting family can be used to create endless possibilities. A plus with Médard spot: click it in the upward track and make it shine downwards, thanks to its flexibility.

Functional lighting concept

A new Pista addition that works especially well for offices. Pista bracket makes it possible for Pista track profiles to be installed on climate control ceilings. This makes our 48V sweetheart a unique and functional linear lighting concept, adding design value, distinction and playfulness to your office lighting design.

Track components - 48V

TRACK 48V

PROFILE









13410009	PISTA TRACK 48V SURFACE PROFILE 1M WHITE STRUC **(1)**
13410032	PISTA TRACK 48V SURFACE PROFILE 1M BLACK STRUC **(1)**
13410109	PISTA TRACK 48V SURFACE PROFILE 2M WHITE STRUC **(1)**
13410132	PISTA TRACK 48V SURFACE PROFILE 2M BLACK STRUC **(1)**
13410209	PISTA TRACK 48V SURFACE PROFILE 3M WHITE STRUC **(1)**
13410232	PISTA TRACK 48V SURFACE PROFILE 3M BLACK STRUC **(1)**
12360009	PISTA TRACK 48V UP/DOWN PROFILE 1M WHITE STRUC **(2)**
12360032	PISTA TRACK 48V UP/DOWN PROFILE 1M BLACK STRUC **(2)**
12360109	PISTA TRACK 48V UP/DOWN PROFILE 2M WHITE STRUC **(2)**
12360132	PISTA TRACK 48V UP/DOWN PROFILE 2M BLACK STRUC **(2)**
12360209	PISTA TRACK 48V UP/DOWN PROFILE 3M WHITE STRUC **(2)**
12360232	PISTA TRACK 48V UP/DOWN PROFILE 3M BLACK STRUC **(2)**
13410302	PISTA TRACK 48V RECESSED TRIMLESS PROFILE 1M BLACK **(3)**
13410402	PISTA TRACK 48V RECESSED TRIMLESS PROFILE 2M BLACK **(3)**
13410502	PISTA TRACK 48V RECESSED TRIMLESS PROFILE 3M BLACK **(3)**
13419109	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 1M WHITE STRUC **(4)**
13419132	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 1M BLACK STRUC **(4)**
13419209	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 2M WHITE STRUC **(4)**
13419232	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 2M BLACK STRUC **(4)**
13419309	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 3M WHITE STRUC **(4)**
13419332	PISTA TRACK 48V RECESSED (FLANGE) PROFILE 3M BLACK STRUC **(4)**

SUSPENSION









13411409	PISTA TRACK 48V SUSPENSION CABLE 4M WHITE STRUC **(5)**
13411432	PISTA TRACK 48V SUSPENSION CABLE 4M BLACK STRUC **(5)**
13411709	PISTA TRACK 48V TWIN SUSPENSION CABLE 4M WHITE STRUC **(6)**
13411732	PISTA TRACK 48V TWIN SUSPENSION CABLE 4M BLACK STRUC **(6)**
13411809	PISTA TRACK 48V TWIN BRACKET WHITE STRUC **(7)**
13411832	PISTA TRACK 48V TWIN BRACKET BLACK STRUC **(7)**
12360709	PISTA TRACK 48V UP/DOWN SUSPENSION CABLE 4M WHITE STRUC **(8)**
12360732	PISTA TRACK 48V UP/DOWN SUSPENSION CABLE 4M BLACK STRUC **(8)**

TRACK 48V

POWER FEED







13410809	PISTA TRACK 48V POWER FEED LEFT WHITE STRUC **(9)**
13410832	PISTA TRACK 48V POWER FEED LEFT BLACK STRUC **(9)**
13410909	PISTA TRACK 48V POWER FEED RIGHT WHITE STRUC **(10)**
13410932	PISTA TRACK 48V POWER FEED RIGHT BLACK STRUC **(10)**
13411509	PISTA TRACK 48V POWER FEED CABLE 2M 4X1.5MM² + CONNECTION BOX WHITE STRUC **(11)**
13411532	PISTA TRACK 48V POWER FEED CABLE 2M 4X1.5MM² + CONNECTION BOX BLACK STRUC **(11)**

ENDPLATE









13411009	PISTA TRACK 48V SURFACE ENDPLATE WHITE STRUC **(12)**
13411032	PISTA TRACK 48V SURFACE ENDPLATE BLACK STRUC **(12)**
12360609	PISTA TRACK 48V UP/DOWN ENDPLATES (2) WHITE STRUC **(13)**
12360632	PISTA TRACK 48V UP/DOWN ENDPLATES (2) BLACK STRUC **(13)**
13411132	PISTA TRACK 48V RECESSED ENDPLATE BLACK STRUC **(14)**
13419409	PISTA TRACK 48V RECESSED (FLANGE) ENDPLATES (2) WHITE STRUC **(15)**
13419432	PISTA TRACK 48V RECESSED (FLANGE) ENDPLATES (2) BLACK STRUC **(15)**

COVER



13410609	PISTA TRACK 48V COVER 1M WHITE STRUC **(16)**
13410632	PISTA TRACK 48V COVER 1M BLACK STRUC **(16)**
13410709	PISTA TRACK 48V COVER 2M WHITE STRUC **(16)**
13410732	PISTA TRACK 48V COVER 2M BLACK STRUC **(16)**

Track components - 48V

TRACK 48V

CONNECTION



















13418332	PISTA TRACK 48V ELECTRICAL/MECHANICAL CONNECTION FLEXIBLE BLACK STRUC **(17)**
13418309	PISTA TRACK 48V ELECTRICAL/MECHANICAL CONNECTION FLEXIBLE WHITE STRUC **(17)**
13411309	PISTA TRACK 48V ELECTRICAL (SURFACE) CONNECTION 180° WHITE STRUC **(18)**
13411332	PISTA TRACK 48V ELECTRICAL (SURFACE) CONNECTION 180° BLACK STRUC **(18)**
13419009	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 180° WHITE STRUC **(19)**
13419032	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 180° BLACK STRUC **(19)**
12360532	PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 180° BLACK STRUC **(20)**
12360509	PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 180° WHITE STRUC **(20)**
13419732	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED) CONNECTION 180° BLACK STRUC **(21)**
13419709	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED) CONNECTION 180° WHITE STRUC **(21)**
13418132	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° INSIDE BLACK STRUC **(22)**
13418109	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° INSIDE WHITE STRUC **(22)**
13418232	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° OUTSIDE BLACK STRUC **(22)**
13418209	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° OUTSIDE WHITE STRUC **(22)**
13418632	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° INSIDE BLACK STRUC **(23)**
13418609	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° INSIDE WHITE STRUC **(23)**
13418732	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° OUTSIDE BLACK STRUC **(23)**
13418709	PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° OUTSIDE WHITE STRUC **(23)**
12360332	PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 90° BLACK STRUC **(24)**
12360309	PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 90° WHITE STRUC **(24)**
13419532	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° INSIDE BLACK STRUC **(25)**
13419509	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° INSIDE WHITE STRUC **(25)**
13419632	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° OUTSIDE BLACK STRUC **(25)**
13419609	PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° OUTSIDE WHITE STRUC **(25)**

EXTRA





13410001	PISTA BRACKET FOR CLIMATE CONTROL CEILINGS (10 PIECES) **(28)**
13410003	PISTA BRACKET INCL. SAFETY CABLE FOR CLIMATE CONTROL CEILINGS (10 PIECES) **(29)**

TRACK 48V

SURFACE MOUNTED LED GEAR





13418432	PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SURFACE INSTALLATION) BLACK STRUC **(26)**
13418409	PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SURFACE INSTALLATION) WHITE STRUC **(26)**
13418532	PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SUSPENDED INSTALLATION) BLACK STRUC **(27)**
13418509	PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SUSPENDED INSTALLATION) WHITE STRUC **(27)**
13418832	PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SURFACE INSTALLATION) BLACK STRUC **(26)**
13418809	PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SURFACE INSTALLATION) WHITE STRUC **(26)**
13418932	PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SUSPENDED INSTALLATION) BLACK STRUC **(27)**
13418909	PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SUSPENDED INSTALLATION) WHITE STRUC **(27)**

REMOTE LED GEAR (MORE INFO SEE PAGE 651)



















12407530	LED gear 48V 120W - DIN RAIL **(28)**
12408430	LED gear 48V 240W - DIN RAIL **(29)**
13550730	LED gear 48V 50-150W **(30)**
13550630	LED gear 48V 70W **(31)**
12408730	LED gear 48V 75W **(32)**
13550230	LED gear 48V 100W **(33)**
12408630	LED gear 48V 120W **(34)**
13550330	LED gear 48V 150W **(33)**
12408930	LED gear 48V 240W **(35)**
12409030	LED gear 48V 320W **(36)**

CASAMBI DIM MODULE (MORE INFO SEE PAGE 635)



13470232	CASAMBI TRACK 48V DIM MODULE BLACK STRUC
13470209	CASAMBI TRACK 48V DIM MODULE WHITE STRUC
13470302	CASAMBI TRACK 48V REMOTE DIM MODULE

CHARLATAN TRACK 100
CHARLATAN TRACK 85
CHARLATAN TRACK 65

CHARLATAN TRACK 100

CHARLATAN

A trackspot for our 230V track rail, Charlatan is a light to keep close. Its pure, unpretentious and timeless design makes Charlatan an easy choice for several kinds of spaces. Thin, adjustable bracket, flexibility of 360° horizontal and 90° vertical, deeper recessed positioning of reflector for visual comfort, there's no compromise on quality or technology. Choose between 3 diameter sizes, 3 beam angles, 4 colour temperatures, 3 lumen packages and 2 dimming systems, and let the show begin.

more info? *supermodular.com/en/charlatan*

Charlatan track 65 LED GI



1X LED ARRAY INCL. | 13.8W

! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10210001	REFLECTOR Ø65 15°
10210002	REFLECTOR Ø65 25°
10210003	REFLECTOR Ø65 40°

230V | IP20 | GWT 960° | 0.60KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13110032**	**13110132**	**13110232**	**13110332**
white struc	**13110009**	**13110109**	**13110209**	**13110309**

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13110432**	**13110532**	**13110632**	**13110732**
white struc	**13110409**	**13110509**	**13110609**	**13110709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**1246lm / 17W**
3000K / 25° alu	**1329lm / 17W**
3500K / 25° alu	**1384lm / 17W**
4000K / 25° alu	**1433lm / 17W**

REFLECTOR Ø65
REFLECTOR Ø85
REFLECTOR Ø100

Charlatan track 85 LED GI



1X LED ARRAY INCL. 23.8W

! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10210004	REFLECTOR Ø85 15°
10210005	REFLECTOR Ø85 25°
10210006	REFLECTOR Ø85 40°

230V | IP20 | GWT 960° | 0.93KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13111032**	**13111132**	**13111232**	**13111332**
white struc	**13111009**	**13111109**	**13111209**	**13111309**

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13111432**	**13111532**	**13111632**	**13111732**
white struc	**13111409**	**13111509**	**13111609**	**13111709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**2306lm / 27.5W**
3000K / 25° alu	**2543lm / 27.5W**
3500K / 25° alu	**2687lm / 27.5W**
4000K / 25° alu	**2652lm / 27.5W**

Charlatan track 100 LED GI



1X LED ARRAY INCL. 30.5W

! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10210007	REFLECTOR Ø100 15°
10210008	REFLECTOR Ø100 25°
10210009	REFLECTOR Ø100 40°

230V | IP20 | GWT 960° | 1.22KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13112032**	**13112132**	**13112232**	**13112332**
white struc	**13112009**	**13112109**	**13112209**	**13112309**

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	**13112432**	**13112532**	**13112632**	**13112732**
white struc	**13112409**	**13112509**	**13112609**	**13112709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**3111lm / 34.5W**
3000K / 25° alu	**3409lm / 34.5W**
3500K / 25° alu	**3512lm / 34.5W**
4000K / 25° alu	**3666lm / 34.5W**

KANON 110 TRACK

KANON 138 TRACK

KANON

Design — Couvreur-Devos

Interior designers in search of spotlight track lighting that combines exceptional brightness with great design are now armed with Modular L.I.'s Kanon. The most powerful spotlight in our portfolio (up to 5000 lumens), Kanon fires light, while looking sleek and elegant, with all wiring and cables hidden. Designed for retail environments, it is a surefire guarantee that your merchandise will be illuminated in style..

Refined and stylish

Kanon is a simple, versatile spotlight with a refined fixture hardly ever found in track lighting. While all the wiring and gear – even screws – are smartly hidden, the outer bracket is neatly shaped to follow the lines of the housing.

Striking performance

Kanon is an energy-efficient LED fixture, available in two levels of luminous efficacy: Kanon 110 delivers up to 3500 lumens, while its bigger brother Kanon 138 reaches up to 5000 lumen, which makes it the most powerful spotlight in our family. Thanks to this brightness, Kanon 138 is an ideal choice for showrooms or shops with a high ceiling.

Smartly lockable

Versatile as it is, Kanon easily rotates 365° and has an inclination of 90°. Rather maintain it in a fixed position? The Kanon spotlight is lockable, with invisible screws, as befits its sleek, neat design.

more info? *supermodular.com/en/kanon*

Kanon track 110 LED GI



1X LED ARRAY INCL. | 40W

230V | IP20 | GWT 960° | 2.27KG

TRAILING EDGE DIMMABLE	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13150032**	**13150132**	**13150232**	**13150332**
white struc	**13150009**	**13150109**	**13150209**	**13150309**
TRAILING EDGE DIMMABLE	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13150432**	**13150532**	**13150632**	**13150732**
white struc	**13150409**	**13150509**	**13150609**	**13150709**
TRAILING EDGE DIMMABLE	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13150832**	**13150932**	**13151032**	**13151132**
white struc	**13150809**	**13150909**	**13151009**	**13151109**

DALI	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13152032**	**13152132**	**13152232**	**13152332**
white struc	**13152009**	**13152109**	**13152209**	**13152309**
DALI	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13152432**	**13152532**	**13152632**	**13152732**
white struc	**13152409**	**13152509**	**13152609**	**13152709**
DALI	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13152832**	**13152932**	**13153032**	**13153132**
white struc	**13152809**	**13152909**	**13153009**	**13153109**

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10216700	TRANSPARANT GLASS Ø77
10216703	SPREADLENS Ø77
10217002	CROSS BLADE Ø80 BLACK
10216430	REFLECTOR Ø80 H39 LED SPOT
10216530	REFLECTOR Ø80 H39 LED MEDIUM
10216630	REFLECTOR Ø80 H39 LED FLOOD
10216730	REFLECTOR LED Ø80 WIDE FLOOD H39

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)
(1) DALI
(2) TRAILING EDGE

2700K / 25°	**3107lm / (1)42.3W / (2)45.5W**
3000K / 25°	**3222lm / (1)42.3W / (2)45.5W**
4000K / 25°	**3483lm / (1)42.3W / (2)45.5W**

Kanon track 138 LED GI



1X LED ARRAY INCL. | 49.7W

230V | IP20 | GWT 960° | 2.78KG

TRAILING EDGE DIMMABLE	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13160032**	**13160132**	**13160232**	**13160332**
white struc	**13160009**	**13160109**	**13160209**	**13160309**
TRAILING EDGE DIMMABLE	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13160432**	**13160532**	**13160632**	**13160732**
white struc	**13160409**	**13160509**	**13160609**	**13160709**
TRAILING EDGE DIMMABLE	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13160832**	**13160932**	**13161032**	**13161132**
white struc	**13160809**	**13160909**	**13161009**	**13161109**

DALI	2700K / CRI90+			
	15°	25°	40°	60°
black struc	**13162032**	**13162132**	**13162232**	**13162332**
white struc	**13162009**	**13162109**	**13162209**	**13162309**
DALI	3000K / CRI90+			
	15°	25°	40°	60°
black struc	**13162432**	**13162532**	**13162632**	**13162732**
white struc	**13162409**	**13162509**	**13162609**	**13162709**
DALI	4000K / CRI90+			
	15°	25°	40°	60°
black struc	**13162832**	**13162932**	**13163032**	**13163132**
white struc	**13162809**	**13162909**	**13163009**	**13163109**

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10216800	TRANSPARANT GLASS Ø107
10216803	SPREADLENS Ø107
10216030	REFLECTOR Ø111 LED SPOT
10216130	REFLECTOR Ø111 LED MEDIUM
10216230	REFLECTOR Ø111 LED FLOOD
10216330	REFLECTOR Ø111 LED WIDE FLOOD

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)
(1) DALI
(2) TRAILING EDGE

2700K / 25°	**4786lm / (1)53.6W / (2)56W**
3000K / 25°	**4963lm / (1)53.6W / (2)56W**
4000K / 25°	**5365lm / (1)53.6W / (2)56W**

MARBUL TRACK

MARBUL SUSPENSION ADJUSTABLE TRACK

MARBUL SUSPENSION TRACK

SEE ALSO

CEILING - P85

CEILING - P137

TRACK 48V - P411

MARBUL

Design — Jeffrey Huyghe

Marbul is an ideal choice for both residential and hospitality projects. A round, organic design, direct light with a simple twist of the lamp units, each with its own dedicated LED module. The elegant wall and ceiling luminaire – find Marbul in the ceiling and 48V track sections – presents a new family member. With Marbul now also available for our 230V track, the family is getting happier and bubblier.

More choices for retail and hospitality

230V tracks are a top pick for retail and hospitality spaces because of their flexibility and versatility. Adding Marbul's soft, organic shape to your track will give a different style and feel to your expression. A welcome feature will also be Marbul's compatibility with DALI and Casambi systems, bringing smart lighting to your project.

more info? *supermodular.com/en/marbul-track*

MARBUL TRACK

MARBUL TRACK

Marbul track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.24KG

DALI	2700K / CRI90+	3000K / CRI90+
black struc	**13500032**	**13500132**
white struc	**13500009**	**13500109**

CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	**13500632**	**13500732**
white struc	**13500609**	**13500709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000 K/ 25° alu	**718lm / 8.5W**

WARM DIM

Marbul track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.24KG

DALI	1800K - 3000K / CRI90+
black struc	**13500232**
white struc	**13500209**

CASAMBI	1800K - 3000K / CRI90+
black struc	**13500832**
white struc	**13500809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@ 3000K / 25° alu	**955lm / 14.5W**

Marbul suspension track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.32KG

DALI	2700K / CRI90+	3000K / CRI90+
black struc	**13501032**	**13501132**
white struc	**13501009**	**13501109**

CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	**13501732**	**13501632**
white struc	**13501709**	**13501609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000 K/ 25° alu	**718lm / 8.5W**

WARM DIM

Marbul suspension track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.32KG

DALI	1800K - 3000K / CRI90+
black struc	**13501232**
white struc	**13501209**

CASAMBI	1800K - 3000K / CRI90+
black struc	**13501832**
white struc	**13501809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@ 3000K / 25° alu	**955lm / 14.5W**

Marbul suspension adjustable track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.27KG

DALI	2700K / CRI90+	3000K / CRI90+
black struc	**13502032**	**13502132**
white struc	**13502009**	**13502109**

CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	**13502732**	**13502632**
white struc	**13502709**	**13502609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**634lm / 8.5W**
3000 K / 25° alu	**718lm / 8.5W**

WARM DIM

Marbul suspension adjustable track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 1.27KG

DALI	1800K - 3000K / CRI90+
black struc	**13502232**
white struc	**13502209**

CASAMBI	1800K - 3000K / CRI90+
black struc	**13502832**
white struc	**13502809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@ 3000K / 25° alu	**955lm / 14.5W**

SEE ALSO

CEILING - P151

JACK - P385

TRACK 48V - P421

MÉDARD 70

Design — Bleijh

First, it was one sleek design inspired by the stick insect, modularity and fun ensued. From a table lamp to more subtle recessed ceiling applications. From lovely surface-mounted versions to playful track rail variants. Get ready to slide on our 230V track rail with Médard 70.

One design, fun with track rails

Play with the designs you love. Position our original eyecatcher, Médard 70 on our 230V track, and slide in as many as you need, where you need them. Thanks to Médard's impressive flexibility — due to its orientable head — designers can create special accents in the room, wherever they please. Add in more of the Médard family to create further accents while keeping a sophisticated, uniform expression.

more info? *supermodular.com/en/medard-track*

Médard 70 track LED GI



1X LED ARRAY INCL. | 11W

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12733632	12733832	12735132	12735332
white struc	12733609	12733809	12735109	12735309

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12737032	12737132	12737232	12737432
white struc	12737009	12737109	12737209	12737409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**936lm / 13W**
3000K / 25°	**920lm / 13W**

TRACK COMPONENTS > SEE PAGES 502-505

WARM DIM

Médard 70 track LED warm dim GI



1X LED ARRAY INCL. | 12W

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	12733332	12733432
white struc	12733309	12733409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**802lm / 13.5W**

TRACK COMPONENTS > SEE PAGES 502-505

REKTOR TRACK

REKTOR TRACK

SEE ALSO

CEILING - P237

REKTOR

Design — Couvreur-Devos

With a name derived from the Latin word for "ruler", the Rektor family has every quality of a leader. Winner of the 2014 Henry Van de Velde design award, Rektor showcases the distinguished effects of right angles and accented light direction.

Right on track, and ceiling

Rektor's refined industrial, rectangular design works wonders on our 230V track system, making it an attractive and relevant choice for retail and hospitality spaces. Rektor can also be mounted directly on the ceiling surface-mounted, or recessed, hiding the driver box completely – find Rektor in the ceiling section.

more info? *supermodular.com/en/rektor-track*

REKTOR TRACK

REKTOR TRACK

Rektor track 1x LED GI



1X LED ARRAY INCL. | 11W

DALI	2700K / CRI90+		3000K / CRI90+	
	MEDIUM	FLOOD	MEDIUM	FLOOD
black struc	14270032	14270132	14270232	14270332
white struc	14270009	14270109	14270209	14270309

CASAMBI	2700K / CRI90+		3000K / CRI90+	
	MEDIUM	FLOOD	MEDIUM	FLOOD
black struc	14270632	14270732	14270832	14270932
white struc	14270609	14270709	14270809	14270909

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**916lm / 14W**
3000K / 25°	**900lm / 14W**

TRACK COMPONENTS > SEE PAGES 502-505

WARM DIM

Rektor track 1x LED warm dim GI



1X LED ARRAY INCL. | 12W

DALI	1800K - 3000K / CRI90+	
	MEDIUM	FLOOD
black struc	14270432	14270532
white struc	14270409	14270509

CASAMBI	1800K - 3000K / CRI90+	
	MEDIUM	FLOOD
black struc	14271032	14271132
white struc	14271009	14271109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**881lm / 14.5W**

TRACK COMPONENTS > SEE PAGES 502-505

SEMIH 61 TRACK WITH CHAMPAGNE REFLECTOR

SEMIH 61 TRACK WITH LENS

SEE ALSO

CEILING - P245

SEMIH 61

Design — Jeffrey Huyghe

Semih 61's application on our 230V track rail is ideal for residential and hospitality settings and small boutiques, where flexible and subtle lighting is suitable. Play with the small but powerful luminaires to create accents on special items or corners, and adapt the light's position as you please. Ceiling versions can easily complete the overall expression with clean and easy execution, thanks to powerful magnetic plates in the ceiling.

more info? *supermodular.com/en/semih-61*

Semih 61 track LED GI



1X LED MODULE INCL. 8.1W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR OR LENS

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10218030	MAGNETIC REFLECTOR Ø57 LED 15° ALU
10218130	MAGNETIC REFLECTOR Ø57 LED 25° ALU
10218230	MAGNETIC REFLECTOR Ø57 LED 40° ALU
10218630	MAGNETIC REFLECTOR Ø57 LED 40° CHAMPAGNE
10218430	MAGNETIC REFLECTOR Ø57 LED 40° GOLD
10217003	LENS Ø57 LED 30°
10213802	SNOOT Ø57 BLACK (ONLY IN COMBINATION WITH LENS)

230V | IP20 | GWT 960° | 0.75KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	**13441032**	**13441132**
white struc	**13441009**	**13441109**

DALI	2700K / CRI90+	3000K / CRI90+
black struc	**13441432**	**13441532**
white struc	**13441409**	**13441509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25° alu	**704lm / 11W**
3000K / 25° alu	**704lm / 11W**
3000K / 25° lens	**658lm / 11W**

WARM DIM

Semih 61 track LED warm dim GI



1X LED MODULE INCL. | 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

10218730	MAGNETIC REFLECTOR Ø57 LED WARM DIM 25° ALU
10218830	MAGNETIC REFLECTOR Ø57 LED WARM DIM 40° ALU
10219230	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° CHAMPAGNE
10219030	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° GOLD

III | 230V | R.C | IP20 | GWT 960° | 0.70KG | ▲

TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	**13441632**
white struc	**13441609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25° alu	**928lm / 15W**

SINGLE ROUND

Playing with square-angled and round shapes, Single round combines the best of both worlds. The M-LED 111 module fits well in an aluminium cylinder. The single connection with the hinge contributes to a highly directional fixture. A great solution for use in specific retail projects thanks to the high performance and energy-efficient LED engine.

more info? *supermodular.com/en/single-rround*

Single round LED GI





1X LED ARRAY INCL. 25W

TRACK COMPONENTS > SEE PAGES 502-505

230V | R.C | IP20 | GWT 960° | 1.77KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	13031032	13031332	13031632
white struc	13031009	13031309	13031609
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	13031132	13031432	13031732
white struc	13031109	13031409	13031709
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	13031232	13031532	13031832
white struc	13031209	13031509	13031809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**1913lm / 28.5W**
3000K / 25°	**1982lm / 28.5W**
4000K / 25°	**2143lm / 28.5W**

SINGLE SQUARE

Single square likes to show off with its discreet hinge points and square corners. The built-in hinging mechanism makes this fixture a versatile and highly directional spotlight. A perfect fit for our 230V track rail system.

more info? *supermodular.com/en/single-square*

Single square LED GI



1X LED ARRAY INCL. | 25W

TRACK COMPONENTS > SEE PAGES 502-505

230V | R.C | IP20 | GWT 960° | 1.57KG

TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	11402032	11402332	11402632
white struc	11402009	11402309	11402609
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	11402132	11402432	11402732
white struc	11402109	11402409	11402709
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	11402232	11402532	11402832
white struc	11402209	11402509	11402809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**1913lm / 28.5W**
3000K / 25°	**1982lm / 28.5W**
4000K / 25°	**2143lm / 28.5W**

SMART LOTIS
SMART TUBED SUSPENSION TRACK 82 L

SMART LOTIS
SMART TUBED SUSPENSION TRACK 82 XL

SEE ALSO

CEILING - P259

SMART ACCESSORIES

TUBED SUSPENSION 82

Smart tubed suspension 82 is ready to roll with a track adaptor for our 230V track rail system. Try it out in large spaces, or on high ceilings and light up the night. And go further, combine it with other Smart family members for ceiling and wall applications.

more info? *supermodular.com/en/smart-surface-tubed*

Smart tubed suspension track 82 L LED GI



LUMINAIRE NOT INCL.

230V | R.C | IP20 | GWT 960° | 1.01KG

TRAILING EDGE DIMMABLE	
black struc	12842532
brushed alu	12842524
white struc	12842509

SMART COMBINATIONS > SEE RIGHT PAGE

TRACK COMPONENTS > SEE PAGES 502-505

Smart tubed suspension track 82 XL LED GI



LUMINAIRE NOT INCL.

230V | IP20 | GWT 960° | 1.68KG

TRAILING EDGE DIMMABLE	
black struc	12842632
brushed alu	12842624
white struc	12842609

DALI	
black struc	12842732
brushed alu	12842724
white struc	12842709

SMART COMBINATIONS > SEE RIGHT PAGE

TRACK COMPONENTS > SEE PAGES 502-505

Smart combinations & accessories

SMART 82 - TUBED SUSPENSION TRACK						
DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION TRACK Ø82 L GI 	TUBED SUSPENSION TRACK Ø82 XL GI 
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	M	M
				LED warm dim		
				GU10		
				GU10 for tube/box		
		adj.	IP20	LED	M	M
				LED warm dim		

SPEKTRA

Design — Florent Coirier

"We believe in objects with meaning, so that they give meaning to everyday lives," says French designer Florent Coirier. Inspired by this belief, Coirier designed Spektra: a very precise Modular L.I. trackspot for retail environments. Spektra has an adjustable zoom lens. Users can easily adjust the beam angle and change the inclination of the luminaire, ensuring that it only highlights targeted areas. The light quality is excellent (CRI 90+), mimicking natural light; just what retailers need to put their products in the spotlight.

more info? *supermodular.com/en/spektra*

Spektra track LED 15° - 55° GI



1X LED ARRAY INCL. | 26.8W

TRACK COMPONENTS > SEE PAGES 502-505

230V | IP20 | GWT 960° | 2.67KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	15°-55°	15°-55°
black struc	13261032	13261132
white struc	13261009	13261109

DALI	2700K / CRI90+	3000K / CRI90+
	15°-55°	15°-55°
black struc	13262032	13262132
white struc	13262009	13262109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 20°	**1928lm / 30W**
3000K / 20°	**2043lm / 30W**

SEE ALSO

CEILING - P330

STOVE

Design — Couvreur-Devos

A 230V track luminaire that is both sleek and playful. The unusual thing about Stove is the two pivot points, which make this spotlight a particularly versatile and highly directional light source. Slide it along where you need it, to create those special accents.
And why not combine with Stove ceiling for a uniform look?

more info? *supermodular.com/en/stove*

Stove track LED GI



1X LED ARRAY INCL. | 11W

	230V		IP20	GWT 960°	1.36KG	

TRAILING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc	**11877132**
white struc	**11877109**

DALI	2700K / CRI90+	4000K / CRI90+
	25°	25°
black struc	**11878132**	**11878432**
white struc	**11878109**	**11878409**

TRACK COMPONENTS > SEE PAGES 502-505

OPTICAL ACCESSORIES

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**940lm / 13.5W**
4000K / 25°	**1076lm / 13.5W**

TULIP BLOSSOM TRACK
TRACK SURFACE PROFILE

TULIP BLOSSOM TRACK
TRACK RECESSED PROFILE

TULIP BLOOM TRACK
TRACK SURFACE PROFILE

TULIP BLOOM TRACK
TRACK RECESSED PROFILE

SEE ALSO

CEILING - P85

CEILING - P353

TULIP

Design — Studio Kees

An architectural pendant light that comes in two complementary shapes, Blossom and Bloom. Available with a track adapter to combine with a 230V track rail, and designed to fit E27 light bulbs, Tulip is truly accessible. Tulip boasts a complementary design, and displays both cosy mood light and general light. Full of grace and elegance, Tulip is the couple no one can miss.

Tracking Tulip

This track 230V feature of Tulip's makes it very interesting for hospitality, retail and even residential projects, where changing the position of lights occurs more often. No need to change or add an electrical connection. This addition is a simple, easy and budget-friendly solution for spaces with limited electrical points.

more info? *supermodular.com/en/tulip*

TULIP BLOOM TRACK
TRACK SUSPENDED PROFILE

Tulip blossom track E27



LAMP EXCL. | E27 | MAX. 35W

Friends of hue | 230V | IP20 | GWT 960° | 0.62KG

black struc	**12662132**
black struc - gold	**12662191**
white struc	**12662109**
white struc - gold	**12662189**

CONNECTED > SEE GOODIES

TRACK COMPONENTS > SEE PAGES 502-505

Tulip bloom track E27



LAMP EXCL. | E27 | MAX. 35W

Friends of hue | 230V | IP20 | GWT 960° | 0.63KG

black struc	**12662032**
black struc - gold	**12662091**
white struc	**12662009**
white struc - gold	**12662089**

CONNECTED > SEE GOODIES

TRACK COMPONENTS > SEE PAGES 502-505

Track components - 230V













































TRACK 230V - SURFACE

11242201	PROFILE 1M WHITE SHINY **(1)**
11242202	PROFILE 1M BLACK **(1)**
11240101	PROFILE 2M WHITE SHINY **(2)**
11240102	PROFILE 2M BLACK **(2)**
11240501	POWER FEED RIGHT WHITE SHINY **(3)**
11240502	POWER FEED RIGHT BLACK **(3)**
11240601	POWER FEED LEFT WHITE SHINY **(4)**
11240602	POWER FEED LEFT BLACK **(4)**
11240701	CONNECTOR 180° WHITE SHINY **(5)**
11240702	CONNECTOR 180° BLACK **(5)**
11240801	CONNECTOR 90° INSIDE WHITE SHINY **(6)**
11240802	CONNECTOR 90° INSIDE BLACK **(6)**
11240901	CONNECTOR 90° OUTSIDE WHITE SHINY **(7)**
11240902	CONNECTOR 90° OUTSIDE BLACK **(7)**

11241001	CONNECTOR T RIGHT WHITE SHINY **(8)**
11241002	CONNECTOR T RIGHT BLACK **(8)**
11241101	CONNECTOR T LEFT WHITE SHINY **(9)**
11241102	CONNECTOR T LEFT BLACK **(9)**
11241201	CONNECTOR X WHITE SHINY **(10)**
11241202	CONNECTOR X BLACK **(10)**
11241301	CONNECTOR FLEXIBLE WHITE SHINY **(11)**
11241302	CONNECTOR FLEXIBLE BLACK **(11)**
11241401	ENDPLATE WHITE SHINY **(12)**
11241402	ENDPLATE BLACK **(12)**
11241501	CONNECTOR INTERNAL WHITE SHINY **(13)**
11241502	CONNECTOR INTERNAL BLACK **(13)**
11241801	SUSPENSION KIT 3M WHITE SHINY **(14)**
11241802	SUSPENSION KIT 3M BLACK **(14)**

TRACK 230V - RECESSED

11242401	PROFILE 1M WHITE SHINY **(1)**
11242402	PROFILE 1M BLACK **(1)**
11240301	PROFILE 2M WHITE SHINY **(2)**
11240302	PROFILE 2M BLACK **(2)**
11241601	POWER FEED RIGHT WHITE SHINY **(3)**
11241602	POWER FEED RIGHT BLACK **(3)**
11241701	POWER FEED LEFT WHITE SHINY **(3)**
11241702	POWER FEED LEFT BLACK **(3)**
11242001	CONNECTOR 90° INSIDE WHITE SHINY **(4)**
11242002	CONNECTOR 90° INSIDE BLACK **(4)**

11242101	CONNECTOR 90° OUTSIDE WHITE SHINY **(5)**
11242102	CONNECTOR 90° OUTSIDE BLACK **(5)**
11241401	ENDPLATE WHITE SHINY **(6)**
11241402	ENDPLATE BLACK **(6)**
11241501	CONNECTOR INTERNAL WHITE SHINY **(7)**
11241502	CONNECTOR INTERNAL BLACK **(7)**
11241930	MOUNTING BRACKET **(8)**

Dali track components - 230V







































DALI TRACK 230V - SURFACE

14212201	PROFILE 1M DALI WHITE SHINY **(1)**
14212202	PROFILE 1M DALI BLACK **(1)**
14210101	PROFILE 2M DALI WHITE SHINY **(1)**
14210102	PROFILE 2M DALI BLACK **(1)**
14210501	POWER FEED RIGHT DALI WHITE **(2)**
14210502	POWER FEED RIGHT DALI BLACK **(2)**
14210601	POWER FEED LEFT DALI WHITE **(3)**
14210602	POWER FEED LEFT DALI BLACK **(3)**
14211501	CONNECTOR INTERNAL DALI WHITE **(4)**
14211502	CONNECTOR INTERNAL DALI BLACK **(4)**

14210701	CONNECTOR 180° DALI WHITE **(5)**
14210702	CONNECTOR 180° DALI BLACK **(5)**
14210801	CONNECTOR 90° INSIDE DALI WHITE **(6)**
14210802	CONNECTOR 90° INSIDE DALI BLACK **(6)**
14210901	CONNECTOR 90° OUTSIDE DALI WHITE **(7)**
14210902	CONNECTOR 90° OUTSIDE DALI BLACK **(7)**
14211401	ENDPLATE DALI WHITE SHINY **(8)**
14211402	ENDPLATE DALI BLACK **(8)**
14211809	SUSPENSION KIT 4M DALI WHITE STRUC **(9)**
14211832	SUSPENSION KIT 4M DALI BLACK STRUC **(9)**

DALI TRACK 230V - RECESSED

14212401	PROFILE 1M DALI WHITE SHINY **(1)**
14212402	PROFILE 1M DALI BLACK **(1)**
14210301	PROFILE 2M DALI WHITE SHINY **(1)**
14210302	PROFILE 2M DALI BLACK **(1)**
14210501	POWER FEED RIGHT DALI WHITE **(2)**
14210502	POWER FEED RIGHT DALI BLACK **(2)**
14210601	POWER FEED LEFT DALI WHITE **(3)**
14210602	POWER FEED LEFT DALI BLACK **(3)**
14211501	CONNECTOR INTERNAL DALI WHITE **(4)**
14211502	CONNECTOR INTERNAL DALI BLACK **(4)**
14210401	COVERPLATE 90° DALI WHITE **(5)**
14210402	COVERPLATE 90° DALI BLACK **(5)**

14210201	COVERPLATE 180° DALI WHITE **(6)**
14210202	COVERPLATE 180° DALI BLACK **(6)**
14210801	CONNECTOR 90° INSIDE DALI WHITE **(7)**
14210802	CONNECTOR 90° INSIDE DALI BLACK **(7)**
14210901	CONNECTOR 90° OUTSIDE DALI WHITE **(8)**
14210902	CONNECTOR 90° OUTSIDE DALI BLACK **(8)**
14211401	ENDPLATE DALI WHITE **(9)**
14211402	ENDPLATE DALI BLACK **(9)**
11241930	MOUNTING BRACKET **(10)**

04

WALL

04

WALL

BOLD
513

DENT
516

DOZE
520



DUELL
525

HOLLOW
530

LOTIS TUBED
534



NOMAD LINESTRA
537



NOMAD MINIMAL
540

NUDE
544

NUKAV
547

SMART TUBED WALL*
550

SPLIT
558

SPOCK
561



SULFER
564



SULFER UPLIGHT
569

TRAPZ
573

*to be combined with Smart Cake / Smart Kup / Smart Lotis

BOLD

BOLD

GERMAN DESIGN AWARD WINNER 2020

BOLD

Design — Studio Kees

It doesn't take gaudy or pretentious to attract attention. Strong lines, oblique angles, an element of motion and a hidden source of light make Bold a true statement. Bold was designed in close collaboration with the Rotterdam-based design Studio Kees.

A paradox in luminaires

Inspired by the works of Escher as well as some of the most fearless architectural feats of modern times, Bold manipulates perspective to blend in and stand out at the same time. A Bold fixture is the epitome of daring while playing in harmony with the other stylistic elements of your residential or hospitality space.

Audacious from every angle

Bold can be mounted to a wall in a vertical or horizontal position and flipped around 180°, even after installing the wall plate. The shape and light effect also change, depending on perspective. The single light source is artistically hidden, and points to the wall on which the frame is installed.

No visible screws

Installation is a simple process. Thanks to a flush-fitted magnetic cover plate, fixation of the screws can be done inside the fixture. No screws will be visible. Thin design gap visible along one side.

more info? *supermodular.com/en/bold*

Bold LED GI



1X LED ARRAY INCL. | 9.5W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 950° | 1.50KG

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	14251032	14251232
white struc	14251009	14251209

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	14251132	14251332
white struc	14251109	14251309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	745lm / 11W
3000K	818lm / 11W

DENT MEDIUM

DENT SMALL
DENT MEDIUM
DENT LARGE

DENT

Design — Jeffrey Huyghe

This is the luminaire with a playful personality. Looking one way, and then another. Its design is enigmatic, as is the light it provides. And then there's what can be done with it, and where. Alone on a residential wall, it's minimalistic and beautiful. Together in a large public space, they become an artful lightscape with puzzling lines and angular paths.

A twofold design, one art installation

Dent is an excellent candidate for an art installation that demands minimalist beauty, originality and function. One, two, or even several units of different shapes and colours can be combined in wildly fun patterns and landscapes that enhance the mathematical cleverness and playfulness of the design.

Endless applications, endless play

Dent is an ultra-thin (25mm) wall fixture that fits in a number of residential and hospitality environments. Narrow hallways, large spaces, cozy spaces, walls of any dimension. Our minimalist fixture with an edge is ready to for a game.

Playful modularity for more than light

Dent comes in three sizes. Small is a square, medium and large are rectangular. Create mind-boggling artistic landscapes with this geometrical design. Squares, rectangles, bigger rectangles, lines.
As the name suggests, Dent's body is slightly indented, adding depth to any configuration

more info? *supermodular.com/en/dent*

Dent small LED GE



2X LED LINE INCL. 3.9W

! CAN BE INSTALLED ON SINGLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 350mA | IP20 | GWT 650° | 0.32KG

	2700K / CRI90+	3000K / CRI90+
black struc	11610032	11610132
white struc	11610009	11610109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**373lm / 7.8W**
3000K	**413lm / 7.8W**

Dent medium LED GE



2X LED LINE INCL. 8.8W

! CAN BE INSTALLED ON SINGLE AND DOUBLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 350mA | IP20 | GWT 650° | 0.67KG

	2700K / CRI90+	3000K / CRI90+
black struc	11611032	11611132
white struc	11611009	11611109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**666lm / 17.6W**
3000K	**729lm / 17.6W**

Dent large LED GE



4X LED LINE INCL. | 4.4W

! CAN BE INSTALLED ON SINGLE AND DOUBLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

Friends of hue | III | 350mA | IP20 | GWT 650° | 1.60KG

	2700K / CRI90+	3000K / CRI90+
black struc	**11612032**	**11612132**
white struc	**11612009**	**11612109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**764lm / 17.6W**
3000K	**833lm / 17.6W**

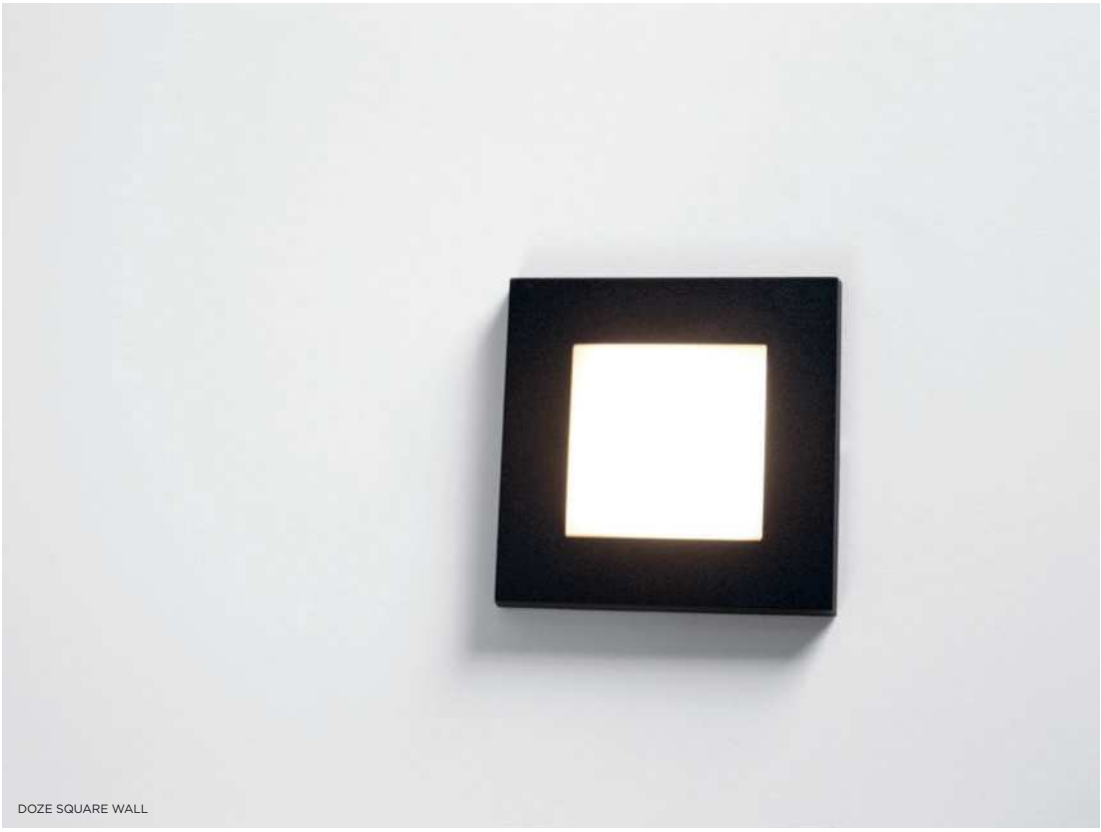

DOZE SQUARE WALL

DOZE ROUND WALL

DOZE

Doze, a box of light. Our luminaire is available in a round or square version and has a sturdy rim in white or black with a polycarbonate diffuser. The nice thing is that Doze fits perfectly into a standard electrical junction box (supplied with the luminaire), which is found in every (new) building. A performant alternative for a standard recessed spot. Perfect for illuminating a hallway or staircase.

more info? *supermodular.com/en/doze*

Doze 80 wall LED



1X HIGH POWER LED INCL. | 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

230V | R,C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	**12330032**
white struc	**12330009**

INSTALLATION ACCESSORIES

12339930	CONBOX Ø130 H135

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**194lm / 4.5W**

Doze square wall LED



1X HIGH POWER LED INCL. | 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

230V | R.C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	12330132
white struc	12330109

INSTALLATION ACCESSORIES

12339930	CONBOX Ø130 H135

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**194lm / 4.5W**

DUELL WALL - ANO CHAMPAGNE - CHAMPAGNE

DUELL WALL - ANO SILVER BRONZE - CHAMPAGNE

DUELL WALL - ANO BLACK - ALU

DUELL WALL - ANO BRONZE - BLACK

SEE ALSO

CEILING - P33

EXTERIOR - P580

DUELL

With its gentle curves, Duell gives every room a softer touch. As a wall luminaire, Duell creates a wide fan of light on the wall, both upwards and downwards. The double-walled housing allows you to play with colour, bringing a more authentic feel into the room.

Anodised colours and splendid light effect

Duell will never go unnoticed, in fact, make it more visible with a flavourful range of anodised colours. On the outside, you'll enjoy extra choices of anodised black, bronze, silver bronze and champagne, while the inside is available in black, champagne and aluminium. In any of its colour choices, Duell will effortlessly give an architectural, high-end touch to your expression.

Party between families

Duell's colours and style is also a breeze to match with other like-colours families such as Trapz, Nude on the wall, and Minude, Thimble, Shellby and Placebo everywhere.

more info? *supermodular.com/en/duell*

DUELL WALL - ANO BRONZE - ALU

DUELL WALL - ANO CHAMPAGNE - CHAMPAGNE

Duell wall LED 900lm GI



2X LED ARRAY INCL. 6.2W

NOT DIMMABLE	2700K / CRI90+
cacao bronze - black	11074568
metallic blue - alu	11074569
silky grey - champagne	11074559

TRAILING EDGE DIMMABLE	2700K / CRI90+
ano black - alu	11074998
ano black - black	11074903
ano black - champagne	11074908
ano bronze - alu	11074999
ano bronze - black	11074910
ano bronze - champagne	11074911
ano champagne - black	11074996
ano champagne - champagne	11074997
ano silver bronze - black	11074912
ano silver bronze - champagne	11074995
black struc - gold	11074991
white struc - champagne	11074939

1-10V/PUSHDIM	2700K / CRI90+
ano black - alu	11074698
ano black - black	11074603
ano black - champagne	11074608
ano bronze - alu	11074699
ano bronze - black	11074610
ano bronze - champagne	11074611
ano champagne - black	11074696
ano champagne - champagne	11074697
ano silver bronze - black	11074612
ano silver bronze - champagne	11074695
black struc - gold	11074632
cacao bronze - black	11074668
metallic blue - alu	11074669
silky grey - champagne	11074659
white struc - champagne	11074609

DALI	2700K / CRI90+
ano black - alu	11074898
ano black - black	11074803
ano black - champagne	11074808
ano bronze - alu	11074899
ano bronze - black	11074810
ano bronze - champagne	11074811
ano champagne - black	11074896
ano champagne - champagne	11074897
ano silver bronze - black	11074812
ano silver bronze - champagne	11074895
black struc - gold	11074832
cacao bronze - black	11074868
metallic blue - alu	11074869
silky grey - champagne	11074859
white struc - champagne	11074809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - champagne)

2700K	**763lm / 14W**

CONNECTED > SEE GOODIES

DUELL WALL - BLACK STRUC - GOLD

DUELL WALL - WHITE STRUC - CHAMPAGNE

Duell wall IP44 LED GI



2X HIGH POWER LED INCL. | 2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP44 | GWT 960° | 0.85KG

	3000K / CRI90+	4000K / CRI90+
black struc - gold	11071132	11071232
white struc - champagne	11071109	11071209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - champagne interior)

3000K	**148lm / 6W**
4000K	**164lm / 6W**

Duell wall LED 500lm



2X LED ARRAY 230V INCL. | 4.5W

230V | R,C | IP20 | GWT 960° | 1.10KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
metallic blue - alu	11074769
silky grey - champagne	11074759

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - champagne interior)

2700K	**574lm / 9W**

Duell wall 1x R7s



1X QT-DE | R7S | MAX. 150W

230V | R | IP20 | GWT 960° | 0.85KG

RESISTIVE DIMMABLE	
black struc - gold	11070632

HOLLOW 115 TRIMLESS

HOLLOW 125

HOLLOW 115 TRIMLESS

HOLLOW

Design — James van Vossel

For designer James van Vossel, it was time to rethink pure, simple forms. That's when the tube came in. Lit or dark, open or closed. Hollow is the luminaire that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality. It's the light companion you were waiting for.

Design that pops

One design, invisible and visible. It can hide, be one with the environment, showing nothing but glowing cavities. It can stick out playfully, casting light in an ocean of space. Hollow is a surprise and won't be revealed until you touch.

Present, not present

Rediscover light with Hollow's marvellous, unusual adjustability. Hollow's smooth rotation system slides open to let you choose a 90°, 60° or 45° angle, or anything else in between. Powerful beam, soft glow, discreet light.

Colours to caress

Experiment with colours and use the cup's inner glow as an additional light source. Gold for a warm, cosy mood maker. White, for a decisive indirect light effect. Black, for a stronger presence, but with softer, indirect light.

more info? *supermodular.com/en/hollow*

Hollow 125 LED GE



1X LED ARRAY INCL. 8.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE RIGHT PAGE

10889830	CONBOX 192X190X130X256
12292830	GYPSUM FIBREBOARD 190X190

500mA | IP20 | GWT 960° | 0.27KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	**12171056**	**12171156**
black struc - gold	**12171032**	**12171132**
black struc - white struc	**12171047**	**12171147**
gold - gold	**12171087**	**12171187**
white struc - white struc	**12171009**	**12171109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

	350mA	**500mA**
2700K / 30°	346lm / 5.7W	**467lm / 8.5W**
3000K / 30°	353lm / 5.7W	**476lm / 8.5W**

REQUIRED PARTS

Hollow 115 trimless LED GE



1X LED ARRAY INCL. | 8.5W

! MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

10889830	CONBOX 192X190X130X256
14204030	RECESSED RING Ø146
12292830	GYPSUM FIBREBOARD 190X190

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.27KG

	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	**12170056**	**12170156**
black struc - gold	**12170032**	**12170132**
black struc - white struc	**12170047**	**12170147**
gold - gold	**12170087**	**12170187**
white struc - white struc	**12170009**	**12170109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white struc)

	350mA	**500mA**
2700K / 30°	346lm / 5.7W	**467lm / 8.5W**
3000K / 30°	353lm / 5.7W	**476lm / 8.5W**

INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

HOLLOW 115	**PLASTERED** FINISH
	HOLLOW 115 TRIMLESS
	14204030 - RECESSED RING Ø146 

INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

HOLLOW 115 / 125	**10889830** CONBOX 190X192X130X256 	+	**PLASTERED** FINISH	
			HOLLOW 115 TRIMLESS	HOLLOW 125
			12292830 GYPSUM FIBREBOARD 190X190  + **14204030 -** RECESSED RING Ø146 	**12292830** GYPSUM FIBREBOARD 190X190 

LOTIS TUBED WALL

SEE ALSO

CEILING - P133



EXTERIOR - P602

LOTIS TUBED

Lotis tubed wall is the wall-mounted version of the standard Lotis recessed spot, covered in a coloured cylinder. Lotis tubed wall is available in 2 different heights: 190mm and 275mm. Combining both versions creates depth in your rooms and spices up your interior. Lotis tubed wall also allows you to play with colour: go for contrast between black, white and gold or choose a more uniform look instead.

more info? *supermodular.com/en/lotis-tubed*

Lotis tubed wall 1x LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W

230V | R,L | IP20 | GWT 960° | 0.90KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	**11458832**
black struc - white struc	**11458837**
white struc - black	**11458829**
white struc - gold	**11458889**
white struc - white struc	**11458809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**346lm / 5.5W**

Lotis tubed wall 1x GU10





1X QPAR 16 | GU10 | MAX. 35W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.80KG

RESISTIVE DIMMABLE	
black struc - gold	**10883832**
black struc - white struc	**10883837**
white struc - black	**10883829**
white struc - gold	**10883889**
white struc - white struc	**10883809**

Lotis tubed wall 2x LED retrofit



2X LED GU10 INCL. | GU10 | 5.5W

230V | R,L | IP20 | GWT 960° | 1.30KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11458932
black struc - white struc	11458937
white struc - black	11458929
white struc - gold	11458989
white struc - white struc	11458909

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**692lm / 5.5W**

Lotis tubed wall 2x GU10



2X QPAR 16 | GU10 | MAX. 35W

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.10KG

RESISTIVE DIMMABLE	
black struc - gold	10883732
black struc - white struc	10883737
white struc - black	10883729
white struc - gold	10883789
white struc - white struc	10883709

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

NOMAD LINESTRA

Nomad linestra is yet another classic. The symmetrical luminaire, with its visible wiring and bare strip light, reduces lighting to its essence. It is ideal for use above a mirror, where the diffuse light will showcase you at your best.

more info? *supermodular.com/en/nomad-linestra*

Nomad linestra short S14d



1X L S14D | MAX. 60W

* ONLY WHEN COMBINED WITH INCANDESCENT BULB

! CAN BE USED WITH 70008058 - LINESTRA LED TUBE 300MM 2700K (NOT DIMMABLE)

230V | * R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
alu	**10203105**
white struc	**10203109**

NOMAD MINIMAL ULTRA SHORT

NOMAD MINIMAL SHORT

SEE ALSO

CEILING - P206

NOMAD MINIMAL

Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the industrial look a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade. Available in two sizes, four colours and one animal print.

more info? *supermodular.com/en/nomad-minimal*

Nomad minimal short E27





1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! DISK OPTIONAL

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203837	MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203937	MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.53KG

RESISTIVE DIMMABLE	
alu	**10203305**

SHADE WHITE

SHADE BLACK

SHADE RED

SHADE BLACK / GOLD

ANIMAL SHADE ZEBRA

MINIMAL DISK

Nomad minimal ultra short E27





1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! SHADE ONLY POSSIBLE WHEN MOUNTED ON CEILING
! DISK OPTIONAL

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203837	MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203937	MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.35KG

RESISTIVE DIMMABLE	
alu	**10203405**

NUDE 2X - ANO BRONZE

NUDE 2X - ANO BLACK

NUDE 2X - ANO SILVER BRONZE

NUDE 1X - ANO CHAMPAGNE

NUDE 1X - ANO BRONZE

SEE ALSO

EXTERIOR - P611

NUDE

Design — Joël Claisse

Nude's pure geometrical lines are ideal for highlighting architectural features. Nude is stripped down to the essence of a luminaire. Its light source is recessed in the slender cylinder so much that it is practically invisible.
This wall luminaire is available as downlight, or with both up and downlight.

Dress up Nude with colours

With an extended range of brushed aluminium colours, Nude will be a lovely colourful-yet-minimalist companion to any of our families with matching colours, like Shellby, Thimble, Minude or Placebo. Enjoy our extra choices of anodised black, bronze, silver bronze and champagne.

more info? *supermodular.com/en/nude*

Nude wall 1x LED retrofit



1X LED PAR20 INCL. | 5.5W

230V | R,L | IP20 | GWT 960° | 0.66KG

LEADING EDGE DIMMABLE	2700K / CRI80
	25°
ano black	10922181
ano bronze	10922182
ano silver bronze	10922184
ano champagne	10922141
brushed alu	10922124
white struc	10922109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**430m / 5.5W**

Nude wall 1x PAR20



1X QPAR 20 | E27 | MAX. 50W

230V | R | IP20 | GWT 960° | 0.35KG

RESISTIVE DIMMABLE	
ano black	10920781
ano bronze	10920782
ano silver bronze	10920784
ano champagne	10920741
brushed alu	10920724
white struc	10920709

Nude wall 2x LED retrofit



2X LED PAR20 INCL. | 5.5W

230V | R,L | IP20 | GWT 960° | 1.10KG

LEADING EDGE DIMMABLE	2700K / CRI80
	25°
ano black	10922281
ano bronze	10922282
ano silver bronze	10922284
ano champagne	10922241
brushed alu	10922224
white struc	10922209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**860m / 5.5W**

Nude wall 2x PAR20



2X QPAR 20 | E27 | MAX. 50W

230V | R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
ano black	10920881
ano bronze	10920882
ano silver bronze	10920884
ano champagne	10920841
brushed alu	10920824
white struc	10920809

NUKAV

Design — Couvreur-Devos

Nukav, which means edgy, is an orientation lighting fixture. In the literal sense, edgy is also the characteristic feature of this sleek square missing a corner. The light is recessed a little deeper in the corner, making the oblique polycarbonate panel illuminate. The luminaire can be positioned in any direction for a playful effect.

more info? *supermodular.com/en/nukav*

Nukav LED



1X HIGH POWER LED 230V INCL. | 4.5W

230V | R.C | IP20 | GWT 650° | 0.20KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	12300032
white struc	12300009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**69lm / 4.5W**

SMART TUBED WALL 82

SMART TUBED WALL 48

SMART TUBED WALL 82 LARGE

SEE ALSO

CEILING - P259

SMART ACCESSORIES

TUBED WALL

Beautifully designed and customisable to any smaller venue, there is a Smart luminaire for anybody interested in adding an element of elegance to their space. With Smart tubed wall, illumination can now come from above and/or below, for truly beautiful and unique effects.

Endless combinations

Compatible with 48 and 82mm round spots, Smart tubed units direct light up and down or simply down parallel to a wall, depending on the tube size. The units come in black or white structures and can be fitted with Smart Cake, Smart Kup and Smart Lotis spots in white, black or gold. Both the adjustable and the fixed versions can be combined in the Smart tubed. Gear can be included or excluded.

more info? *supermodular.com/en/smart-tubed-wall*

Smart tubed wall 48 1x LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 48 LED IP55

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 512

Friends of hue | IP55* | GWT 960° | 0.16KG

black struc	**12901032**
white struc	**12901009**

Smart tubed wall 48 2x LED GE



LUMINAIRE NOT INCL.

* ONLY WHEN COMBINED WITH SMART 48 LED IP55

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 512

Friends of hue | IP55* | GWT 960° | 0.20KG

black struc	**12901132**
white struc	**12901109**

Smart tubed wall 82 small 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513

Friends of hue | IP20 | GWT 960° | 0.54KG

black struc	**12846632**
white struc	**12846609**

Smart tubed wall 82 large 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513

Friends of hue · IP20 · GWT 960° · 0.61KG

black struc	**12846432**
white struc	**12846409**

Smart tubed wall 82 X-large 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513

Friends of hue · IP20 · GWT 960° · 1.50KG

black struc	**12846032**
white struc	**12846009**

Smart tubed wall 82 X-large 2x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513

Friends of hue · IP20 · GWT 960° · 0.80KG

black struc	**12846732**
white struc	**12846709**

Smart tubed wall 82 large 1x LED GI



LUMINAIRE NOT INCL.

! 500MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513

	230V	IP20	GWT 960°	0.73KG
black struc		**12846532**		
white struc		**12846509**		

WARM DIM

Smart tubed wall 82 large 1x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513

	230V	R,C	IP20	GWT 960°	0.73KG
TRAILING EDGE DIMMABLE		1800K - 3000K			
black struc		**12846832**			
white struc		**12846809**			

Smart tubed wall 82 X-large 1x LED GI



LUMINAIRE NOT INCL.

! 500MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513

	230V	IP20	GWT 960°	1.16KG
TRAILING EDGE DIMMABLE				
black struc		**12846132**		
white struc		**12846109**		
DALI				
black struc		**12846332**		
white struc		**12846309**		
1-10V/PUSHDIM				
black struc		**12846232**		
white struc		**12846209**		

WARM DIM

Smart tubed wall 82 X-large 1x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513

230V | R.C | IP20 | GWT 960° | 1.15KG

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	**12846932**
white struc	**12846909**

Smart combinations & accessories

SMART 48/48+ - TUBED WALL					
DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø48 GE 1X/2X 
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55	LED	M
				LED warm dim	M
Smart asy lotis	○ ● ●	fix	IP20 IP55	LED	
				LED warm dim	

SMART TUBED WALL 48

1x LED	black struc	**12901032**
	white struc	**12901009**
2x LED	black struc	**12901132**
	white struc	**12901109**

SMART 82 - TUBED WALL

DESIGN	COLOUR	FIX/ ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø82 S GE	TUBED WALL Ø82 L GE	TUBED WALL Ø82 XL GE	TUBED WALL Ø82 L GI		TUBED WALL Ø82 XL GI	
									WARM DIM		WARM DIM
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	●	●	●	●		●	
				LED warm dim	●	●	●		●		●
				GU10							
				GU10 for tube/box (1)		●	●				
		adj.	IP20	LED	●	●	●	●		●	
				LED warm dim	●	●	●		●		●

SMART TUBED WALL 82

		GE			GI (500MA)				GI (350MA)	
		SMALL	LARGE	X-LARGE	LARGE	X-LARGE			LARGE	X-LARGE
					NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/ PUSHDIM	DALI	TRAILING EDGE DIMMABLE	
									WARM DIM	WARM DIM
1x LED	black struc	12846632	12846432	12846032	12846532	12846132	12846232	12846332	12846832	12846932
	white struc	12846609	12846409	12846009	12846509	12846109	12846209	12846309	12846809	12846909
2x LED	black struc			12846732						
	white struc			12846709						

(1) When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000621) fit in Smart tubes

SMARK KUP 82 WARM DIM @3000K
SMART TUBED WALL LARGE

SMARK KUP 82 WARM DIM @2400K
SMART TUBED WALL LARGE

SMARK KUP 82 WARM DIM @1800K
SMART TUBED WALL LARGE

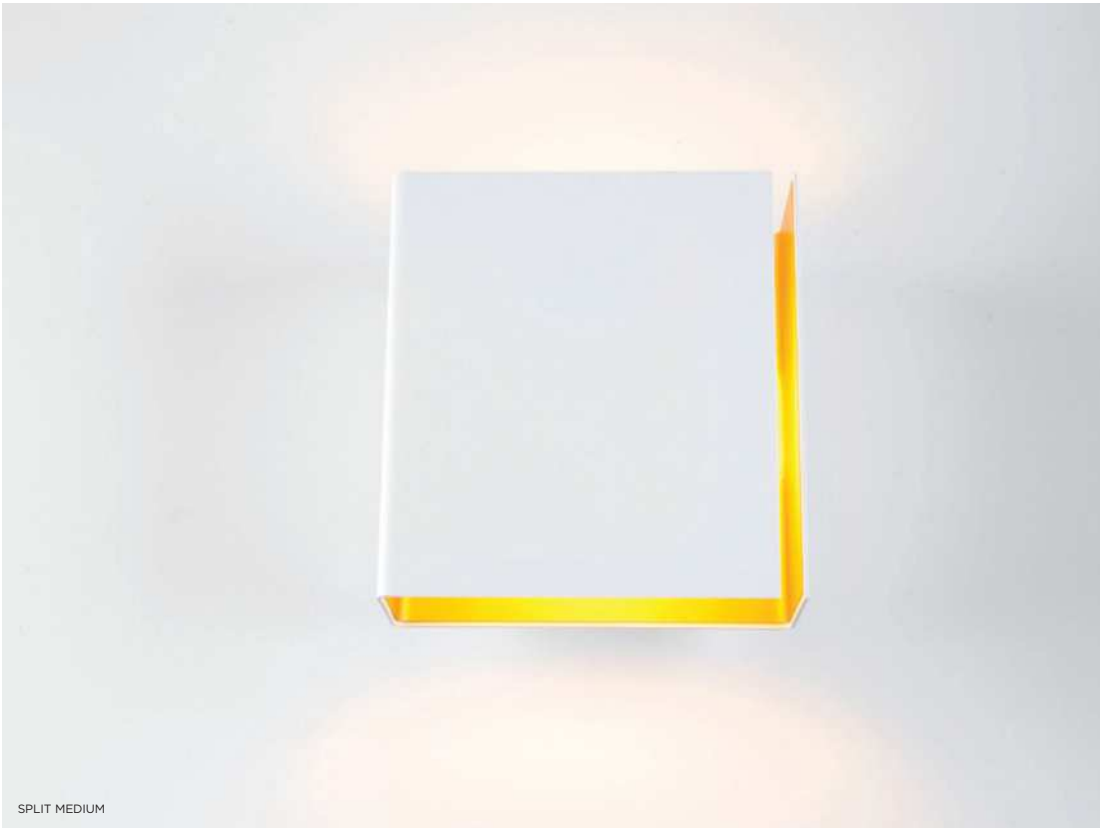

SPLIT MEDIUM

SPLIT LARGE

SPLIT

Design — Couvreur-Devos

Split is the result of improved folding techniques. It is a wall-mounted up- and downlight, which consists of a single folded plate with a thin slit from which the light radiates. Split's asymmetrical design makes it ideal for areas that can benefit from mood lighting, such as living rooms, bedrooms or hallways. Available in a white or black structure, and a white, black or gold interior, ideal for a warm, glowing light.

more info? *supermodular.com/en/split*

Split small LED



1X LED ARRAY 230V INCL. 4.5W

230V | R,C | IP20 | GWT 960° | 1.05KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12600032
black struc - white struc	12600037
white struc- black	12600029
white struc - gold	12600089

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - gold)

2700K	**58lm /4.5W**

Split medium LED



2X LED ARRAY 230V INCL. 4.5W

230V | R,C | IP20 | GWT 960° | 1.90KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12602132
black struc - white struc	12602137
white struc- black	12602129
white struc - gold	12602189

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - gold)

2700K	**312lm / 9W**

Split large LED





2X LED ARRAY 230V INCL. | 4.5W

230V | R,C | IP20 | GWT 960° | 2.50KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12604132
black struc - white struc	12604137
white struc- black	12604129
white struc - gold	12604189

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - gold)

2700K	**288lm / 9W**

SPOCK

Design — Couvreur-Devos

Spock is part of an extraterrestrial population at Modular L.I., united by a powerful, ultra-thin LED lighting disc. Spock conceals all its ingenious workings in one slender housing. Here, the design reinforces its functionality. A unique tilting system makes the lighting disc highly directional. Be creative with Spock by placing it in a straight line or by putting it in a more playful setting. Spock is available in different beam angles and different colour temperatures.

more info? *supermodular.com/en/spock*

Spock wall LED GI



1X LED DISC INCL. | 14.2W

CONNECTED > SEE GOODIES

Friends of hue | 230V | IP20 | GWT 960° | 2.20KG

NOT DIMMABLE	2700K / CRI80	3000K / CRI80
	55°	55°
black struc	**11394232**	-
white struc	-	**11391209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K / 30°	**933lm / 17W**

SULFER

SULFER

SEE ALSO



EXTERIOR - P616

SULFER

Design — Jeffrey Huyghe

Sulfer is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in or outside (IP54) homes, hotels, restaurants, etc. By default, Sulfer diffuses a wide beam (flood), yet the fixture comes with optional, additional beam angle plates (medium and small) to let you customize the beam. Since the diffuser is recessed into the casing, Sulfer shines indirect light, ensuring you will never be blinded by its beam.

more info? *supermodular.com/en/sulfer*

Sulfer LED GI



2X LED ARRAY INCL. 3W

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	13270032	13270132
white struc	13270009	13270109

OPTICAL ACCESSORIES

13271009	SMALL BEAM APERTURE PLATES WHITE STRUC
13271032	SMALL BEAM APERTURE PLATES BLACK STRUC
13271109	MEDIUM BEAM APERTURE PLATES WHITE STRUC
13271132	MEDIUM BEAM APERTURE PLATES BLACK STRUC

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**400lm / 8W**
3000K	**413lm / 8W**

Sulfer LED IP54 GI



2X LED MODULE INCL. | 3W

! OUTDOOR USE: NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

OPTICAL ACCESSORIES

13271209	SMAL BEAM APERTURE PLATES IP WHITE STRUCT
13271232	SMAL BEAM APERTURE PLATES IP BLACK STRUCT
13271309	MEDIUM BEAM APERTURE PLATES IP WHITE STRUCT
13271332	MEDIUM BEAM APERTURE PLATES IP BLACK STRUCT

230V | IP54 | GWT 960°

	3000K / CRI90+
black struc	**13270232**
white struc	**13270209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**290lm / 8W**

SULFER UPLIGHT

SULFER UPLIGHT

SULFER UPLIGHT

A member of our minimalist Sulfer family, Sulfer uplight brings you the indirect uplight you've been waiting for. A wall-mounted luminaire, Sulfer uplight is installed perpendicular to the wall. Its powerful LED provides a generous, indirect flood beam upward and reflects off the wall, as well as off the ceiling, offering a secondary, softer and wider light beam.

Minimalist & sophisticated

Choose Sulfer uplight for an expression requiring a minimalist wall-mounted uplight that also provides choices in lumen packages, dimming or smart lighting solutions with Casambi-ready gear. A pure geometrical shape, Sulfer uplight, like its other family member Sulfer, encompasses the accessibility of a passe-partout luminaire.

Uniform, ambient light

In large spaces Sulfer uplight brings the benefits of a powerful but indirect LED light, without the discomfort of glare. Try it in offices, in combination with a profile, and create uniform light levels for more visual comfort. Alternatively, experiment in hospitality or wellness spaces, where you'd like a soft ambient light around you, by dimming down Sulfer uplight.

more info? *supermodular.com/en/sulfer-uplight*

SULFER UPLIGHT

Sulfer uplight LED GI



1X LED INCL. | 41.8W

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	**13272332**	**13272432**	**13272532**
white struc	**13272309**	**13272409**	**13272509**

1-10V/DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	**13272032**	**13272132**	**13272232**
white struc	**13272009**	**13272109**	**13272209**

CASAMBI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	**13272632**	**13272732**	**13272832**
white struc	**13272609**	**13272709**	**13272809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**4270lm / 47W**
3000K	**4679lm / 47W**
4000K	**5032lm / 47W**

TRAPZ - ANO BLACK - ALU

TRAPZ - ANO CHAMPAGNE - BLACK

TRAPZ - ANO BRONZE - ALU

TRAPZ - ANO SILVER BRONZE - CHAMPAGNE

TRAPZ

With their indirect lighting and subtle shadow effects, wall fixtures are undoubtedly atmosphere creators. Trapz, our organic interpretation inspired by a trapezium, is no different. The flattened cylinder has been finished with two oblique openings, which allow you to see the contrasting interior of the luminaire, and at the same time, create an unusual chiaroscuro effect.

Rich colours in many places

A list of high-end spaces can benefit from our Trapz, thanks to a refined, angular design and the warm mood that its anodised colours can create. On the outside, you'll enjoy extra choices of anodised black, bronze, silver bronze and champagne, while the inside is available is black, champagne and aluminium. Try matching Trapz with Duell and Nude on the wall, and Minude, Thimble, Shellby and Placebo.

more info? *supermodular.com/en/trapz*

TRAPZ - ANO BLACK - BLACK

TRAPZ - ANO CHAMPAGNE - CHAMPAGNE - ALU

Trapz LED 900lm GI



2X LED ARRAY INCL. | 5W

TRAILING EDGE DIMMABLE	2700K / CRI90+
ano black - alu	12590298
ano black - black	12590203
ano black - champagne	12590208
ano bronze - alu	12590299
ano bronze - black	12590210
ano bronze - champagne	12590211
ano champagne - black	12590296
ano champagne - champagne	12590297
ano silver bronze - black	12590212
ano silver bronze - champagne	12590295
black struc - gold	12590291
white struc - champagne	12590239

DALI	2700K / CRI90+
ano black - alu	12592098
ano black - black	12592003
ano black - champagne	12592008
ano bronze - alu	12592099
ano bronze - black	12592010
ano bronze - champagne	12592011
ano champagne - black	12592096
ano champagne - champagne	12592097
ano silver bronze - black	12592012
ano silver bronze - champagne	12592095
black struc - gold	12592091
white struc - champagne	12592039

1-10V/PUSHDIM	2700K / CRI90+
ano black - alu	12591098
ano black - black	12591003
ano black - champagne	12591008
ano bronze - alu	12591099
ano bronze - black	12591010
ano bronze - champagne	12591011
ano champagne - black	12591096
ano champagne - champagne	12591097
ano silver bronze - black	12591012
ano silver bronze - champagne	12591095
black struc - gold	12591091
white struc - champagne	12591039

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - champagne)

2700K	**746lm / 12W**

CONNECTED > SEE GOODIES

TRAPZ - BLACK STRUC - GOLD

TRAPZ - SILKY GREY - CHAMPAGNE

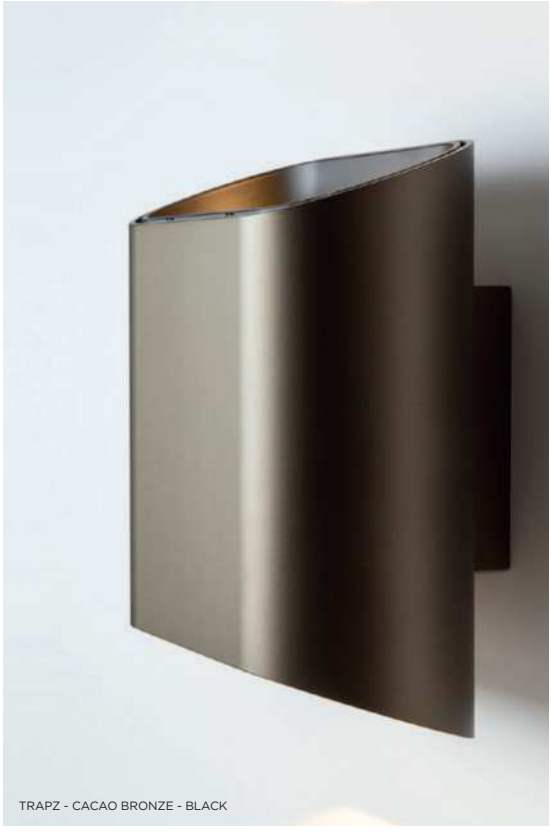

TRAPZ - CACAO BRONZE - BLACK

Trapz LED 500lm GI



2X LED ARRAY INCL. | 4.5W

230V | R.C | IP20 | GWT 960° | 1.20KG

TRAILING EDGE DIMMABLE	2700K / CRI90+
metallic blue - alu	**12590169**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - champagne)

2700K	**587lm / 9W**

05

EXTERIOR

05

floor



FALL
583

GEORGE
585

HIPY
588

JULIEN ROUND
595

JULIEN SQUARE
597

KABAZ
601

LOWIEZE
608

SKIFV
615

EXTERIOR

wall

DUELL
581

JULIEN ROUND
595

JULIEN SQUARE
597

KABAZ
600

LOWIE
605

NUDE
612



SULFER
617

surface

LOTIS TUBED
603

SEE ALSO

CEILING - P33

WALL - P523

DUELL

With its perfectly fitted glazing on top and bottom this version of Duell is fitted to be used in moisty rooms such as bathrooms or even terraces. Connect indoor with your outdoor. The IP version allows you to achieve complete continuity in your home, right through to the bathroom or terrace.

more info? *supermodular.com/en/duell*

Duell wall IP44 LED GI



2X HIGH POWER LED INCL. | 2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP44 | GWT 960° | 0.85KG

	3000K / CRI90+	4000K / CRI90+
black struc - gold	**11071132**	**11071232**
white struc - champagne	**11071109**	**11071209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

3000K	**148lm / 6W**
4000K	**164lm / 6W**

FALL

In Belgium, Modular L.I.'s birthplace, the prevailing wind forces trees to grow at odd angles alongside canals. A powerful image, which inspired the design of Fall, although with more minimalist lines. This exterior fixture stands at a 10° incline and therefore seems to be bending slightly in the wind. The semi-transparent polycarbonate ensures diffused light. Available in 3 sizes and 2 colours. A ground stake is available for installation in soft ground.

more info? *supermodular.com/en/fall*

Fall 1.2 IP54 LED GI



1X LED-STRIP 24V INCL. | 9.8W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 2.60KG

	3000K / CRI90+
black struc	11180732
white struc	11180709

INSTALLATION ACCESSORIES

11189102	EARTHPIN H350 WITH SQUARE PLATE 100X100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**196lm / 12.1W**

Fall 1.1 IP54 LED GI



1X LED-STRIP 24V INCL. | 16.8W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 3.60KG

	3000K / CRI90+
black struc	11180832

INSTALLATION ACCESSORIES

11189102	EARTHPIN H350 WITH SQUARE PLATE 100X100

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**335lm / 20.6W**

GEORGE

Design — Rotorgroup

Outdoor butler George creates an atmospheric, indirect light, which emanates from the upper housing and glides along the inside. And despite its robust cylinder shape, there is something light about George. This is because of the recessed base, which makes George look like it is floating. Finally, George does not mind the rain: thanks to the rounded top, water simply flows down this clever fixture.

more info? *supermodular.com/en/george*

George IP54 GU10



1X QPAR 16 | GU10 | MAX. 35W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES

11189802 EARTHPIN H350

230V | R | IP54 | GWT 960° | 3.60KG

RESISTIVE DIMMABLE	
anthracite gray structure (cream white structure)	**12710071**
black structure (cream white structure)	**12710061**

HIPY 70 ANTI GLARE ROUND

HIPY 110 SQUARE

HIPY

Our popular floor spot Hipy continues to shine with its trailblazing personality. In two sizes, 70 and 110, and in round and square shapes. We've added a warmer colour temperature (2700K) to the range. Designers can create a welcoming path from the outside to the inside –or vice versa– and keep a consistent light effect. Thanks to the CCT, Hipy is also accessible to designers for an indoor floor expression.

more info? *supermodular.com/en/hipy*

Hipy 70 IP67 LED GE





1X LED ARRAY INCL. 3W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379630	RENOVATION CONBOX Ø73 H151
12379830	CONBOX 145X75X123

Friends of hue | III | 350mA | IP65 IP67 | GWT 960° | 0.27KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12374705**	**12374305**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

2700K / 40°	**272lm / 3W**
3000K / 40°	**262lm / 3W**

Hipy 70 anti glare IP67 LED GE





1X LED ARRAY INCL. 3W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379630	RENOVATION CONBOX Ø73 H151
12379830	CONBOX 145X75X123

Friends of hue | III | 350mA | IP65 IP67 | GWT 960° | 0.27KG

	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	**12374605**	**12374205**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

2700K / 25°	**128lm / 3W**
3000K / 25°	**130lm / 3W**

Hipy square 70x70 IP67 LED GE





1X LED ARRAY INCL. 3.1W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379730	RENOVATION CONBOX 75X73X151
12379930	CONBOX 145X75X95

Friends of hue | III | 350mA | IP65 IP67 | GWT 960° | 0.28KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12374505**	**12374105**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

2700K / 40°	**272lm / 3W**
3000K / 40°	**262lm / 3W**

Hipy square 70x70 anti glare IP67 LED GE





1X LED ARRAY INCL. 3.1W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379730	RENOVATION CONBOX 75X73X151
12379930	CONBOX 145X75X95

Friends of hue | III | 350mA | IP65 IP67 | GWT 960° | 0.28KG

	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	**12374405**	**12374005**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

2700K / 25°	**128lm / 3W**
3000K / 25°	**130lm / 3W**

Hipy 110 IP67 LED GE





1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830	CONBOX Ø114 H165

Friends of hue | 500mA | IP65 IP67 | GWT 960° | 0.63KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12345505**	**12345405**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 40°	392lm / 6.2W	**526lm / 9.2W**	676lm / 13.4W
3000K / 40°	408lm / 6.2W	**547lm / 9.2W**	703lm / 13.4W

Hipy 110 anti glare IP67 LED GE





1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830	CONBOX Ø114 H165

Friends of hue | 500mA | IP65 IP67 | GWT 960° | 0.63KG

	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	**12345105**	**12345005**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 25°	218lm / 6.2W	**293lm / 9.2W**	376lm / 13.4W
3000K / 25°	227lm / 6.2W	**304lm / 9.2W**	391lm / 13.4W

Hipy 110 asy IP67 LED GE





1X LED ARRAY INCL. | 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830	CONBOX Ø114 H165

Friends of hue | 500mA | IP65 IP67 | GWT 960° | 0.68KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12345305**	**12345205**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 40°	248lm / 6.2W	**333lm / 9.2W**	428lm / 13.4W
3000K / 40°	258lm / 6.2W	**346lm / 9.2W**	445lm / 13.4W

Hipy square 110x110 IP67 LED GE





1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349930	CONBOX 115X115X150X251

Friends of hue | 500mA | IP65 IP67 | GWT 960° | 0.64KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12346505**	**12346405**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 40°	392lm / 6.2W	**526lm / 9.2W**	676lm / 13.4W
3000K / 40°	408lm / 6.2W	**547lm / 9.2W**	703lm / 13.4W

Hipy square 110x110 anti glare IP67 LED GE





1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349930	CONBOX 115X115X150X251

Friends of hue | 500mA | IP65 IP67 | GWT 960° | 0.64KG

	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	**12346105**	**12346005**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 25°	218lm / 6.2W	**293lm / 9.2W**	376lm / 13.4W
3000K / 25°	227lm / 6.2W	**304lm / 9.2W**	391lm / 13.4W

Hipy square 110x110 asy IP67 LED GE





1X LED ARRAY INCL. | 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349930	CONBOX 115X115X150X251

500mA | IP65 IP67 | GWT 960° | 0.69KG

	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	**12346305**	**12346205**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**	700mA
2700K / 40°	248lm / 6.2W	**333lm / 9.2W**	428lm / 13.4W
3000K / 40°	258lm / 6.2W	**346lm / 9.2W**	445lm / 13.4W

JULIEN ROUND

Julien round highlights garden features and is perfect for the task at hand. The round version is less prominent than its square counterpart. Julien's ground stake is suitable for soft ground and Julien round foot, with its fixed mounting plate, is ideal as a wall fixture.

more info? *supermodular.com/en/julien-round*

Julien round foot IP54 LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.30KG

	3000K / CRI90+
	25°
black struc	10731208

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

3000K / 25°	**159lm / 6W**

Julien round IP54 LED GE



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

350mA | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
	25°
black struc	10731308

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

3000K / 25°	**159lm / 4W**

JULIEN SQUARE

Every garden has a feature that deserves to be in the spotlight. So why not rely on glamorous lighting to do so? Julien is perfect for the task at hand with an IP rate of 54, its adjustable length and tilting head. Julien's ground stake is suited for softer ground and Julien foot, with its fixed mounting plate, can be mounted on walls or hard surfaces.

more info? *supermodular.com/en/julien-square*

Julien square foot IP54 LED GI





1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.30KG

	3000K / CRI90+
	25°
black struc	**10732208**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

3000K / 25°	**143lm / 6W**

Julien square IP54 LED GE



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

350mA | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
	25°
black struc	**10732308**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(black struc)

3000K / 25°	**143lm / 4W**

KABAZ

Kabaz has one sole purpose: to make your garden a wonderful place to hang out. Available as standard in white matte polycarbonate for a sleek lounge look.
Add a Maroc plate for an oriental look or a Louvre for a sexy touch. The useful handle and 5m cable allow you to place Kabaz —'handbag' in West-Flemish — wherever you like. Also available for wall mounting.

more info? *supermodular.com/en/kabaz*

Kabaz wall IP44 E27



1X TC-TSE | E27 | MAX. 23W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

230V | IP44 | GWT 960° | 8.40KG

black struc	**11130132**
desert	**11130133**
khaki	**11130122**
white struc	**11130109**

Kabaz wall IP44 LED



1X LED E27 INCL. | E27 | 12W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

230V | R,L | IP44 | GWT 960° | 8.60KG

LEADING EDGE DIMMABLE	2700K / CRI80
black struc	**11130732**
desert	**11130733**
khaki	**11130722**
white struc	**11130709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**504lm / 12W**

Kabaz floor IP44 E27



1X TC-TSE | E27 | MAX. 23W

! CABLE (5M) INCLUDED
! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

230V | IP44 | GWT 960° | 6.60KG

black struc	**11130232**
desert	**11130233**
khaki	**11130222**
white struc	**11130209**

Kabaz floor IP44 LED



1X LED E27 INCL. | E27 | 12W

! CABLE (5M) INCLUDED
! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

230V | R,L | IP44 | GWT 960° | 6.80KG

LEADING EDGE DIMMABLE	2700K / CRI80
black struc	**11130832**
desert	**11130833**
khaki	**11130822**
white struc	**11130809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	**504lm / 12W**

SEE ALSO

CEILING - P133

WALL - P533

LOTIS TUBED

Lotis tubed (IP44) is designated for use in bathrooms and outdoor spaces. The ceiling-mounted version contains an extra protection glass to prevent moisture from entering the fixture. The spotlight allows you to play with colour: go for contrast between black, white and gold or choose a more uniform look instead.

more info? *supermodular.com/en/lotis-tubed*

Lotis tubed surface IP44 LED retrofit



1X LED GU10 INCL. | 5.5W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | R,L | IP44 | GWT 960° | 0.60KG

LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11450332
black struc - white struc	11450337
white struc - black	11450329
white struc - gold	11450389
white struc - white struc	11450309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K / 25°	**346lm / 5.5W**

LOWIE

Lowie is the noble member of a highly versatile outdoor family (IP54). Together with Lowieze, they will turn your garden into a theatre performance, putting specific areas under the spotlight. Lowie, for wall mounting, is a perfect example of form blending with function. The cylindrical light units can rotate fully around the body, which is also a cylinder, and can therefore be used as uplights or downlights independent of each other. Available with one or two light units.

more info? *supermodular.com/en/lowie*

Lowie IP54 1x LED GI





1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.20KG

	3000K / CRI90+
	40°
black struc	**12670308**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 5W**

Lowie IP54 2x LED GI





2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.60KG

	3000K / CRI90+
	40°
black struc	**12670408**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 9W**

LOWIEZE

Lowieze is a highly versatile outdoor luminaire and comes in two sizes. The smaller size is perfect for lighting a pathway. The bigger version is more suitable for highlighting garden features. Form blends in perfectly with function. The cylindrical light units can rotate fully around the body, also a cylinder, and can therefore be used as uplights or downlights independent of each other. Available with one or two light units.

more info? *supermodular.com/en/lowieze*

Lowieze low IP54 1x LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.70KG

	3000K / CRI90+
	40°
black struc	**12671308**

INSTALLATION ACCESSORIES

11189802	EARTHPIN H350

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 5W**

Lowieze low IP54 2x LED GI



2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 2.08KG

	3000K / CRI90+
	40°
black struc	**12671408**

INSTALLATION ACCESSORIES

11189802	EARTHPIN H350

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 9W**

Lowieze high IP54 1x LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 1.90KG

	3000K / CRI90+
	40°
black struc	**12672308**

INSTALLATION ACCESSORIES

11189802	EARTHPIN H350

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 5W**

Lowieze high IP54 2x LED GI



2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 2.30KG

	3000K / CRI90+
	40°
black struc	**12672408**

INSTALLATION ACCESSORIES

11189802	EARTHPIN H350

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm / 9W**

SEE ALSO

WALL - P543

NUDE

Nude's IP55 version can be wall mounted at the entrance of a residence, highlighting the wall, at the entrance to a shop or on the terrace of your favourite bar. Both downlight and up- and downlight versions are available.
A choice of colours: black, white or alu structure.

more info? *supermodular.com/en/nude*

Nude wall IP55 1x LED GI



1X LED ARRAY INCL. 6.2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP55 | GWT 960° | 1.49KG

	3000K / CRI90+
	40°
alu struc	10923024
black struc	10923032
white struc	10923009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K / 40°	**321lm / 8W**

Nude wall IP55 2x LED GI



2X LED ARRAY INCL. 6.2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP55 | GWT 960° | 1.77KG

	3000K / CRI90+
	40°
alu struc	**10923124**
black struc	**10923132**
white struc	**10923109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K / 40°	**642lm / 13W**

SKIFV

Just like people, gnomes have also changed their architectural tastes in recent years. If you choose Skifv for your garden or outdoor project, you might well attract some unusual creatures. This LED fixture is available in a black or white structure and in two sizes. Mount Skifv on the wall or use it on a hard surface.

more info? *supermodular.com/en/skifv*

Skifv high IP54 LED GI



6X HIGH POWER LED INCL. | 1W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

230V | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
white struc	**11210609**

INSTALLATION ACCESSORIES

11189802	EARTHPIN H350

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**346lm / 6W**

SEE ALSO

WALL - P563

SULFER

Design — Jeffrey Huyghe

Sulfer (IP54) is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in or outside homes, hotels, restaurants, or other exterior hospitality spaces.

more info? *supermodular.com/en/sulfer*

Sulfer LED IP54 GI



2X LED MODULE INCL. | 3W

! OUTDOOR USE: NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

OPTICAL ACCESSORIES

13271209	SMAL BEAM APERTURE PLATES IP WHITE STRUC
13271232	SMAL BEAM APERTURE PLATES IP BLACK STRUC
13271309	MEDIUM BEAM APERTURE PLATES IP WHITE STRUC
13271332	MEDIUM BEAM APERTURE PLATES IP BLACK STRUC

230V | IP54 | GWT 960°

	3000K / CRI90+
black struc	**13270232**
white struc	**13270209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**290lm / 8W**

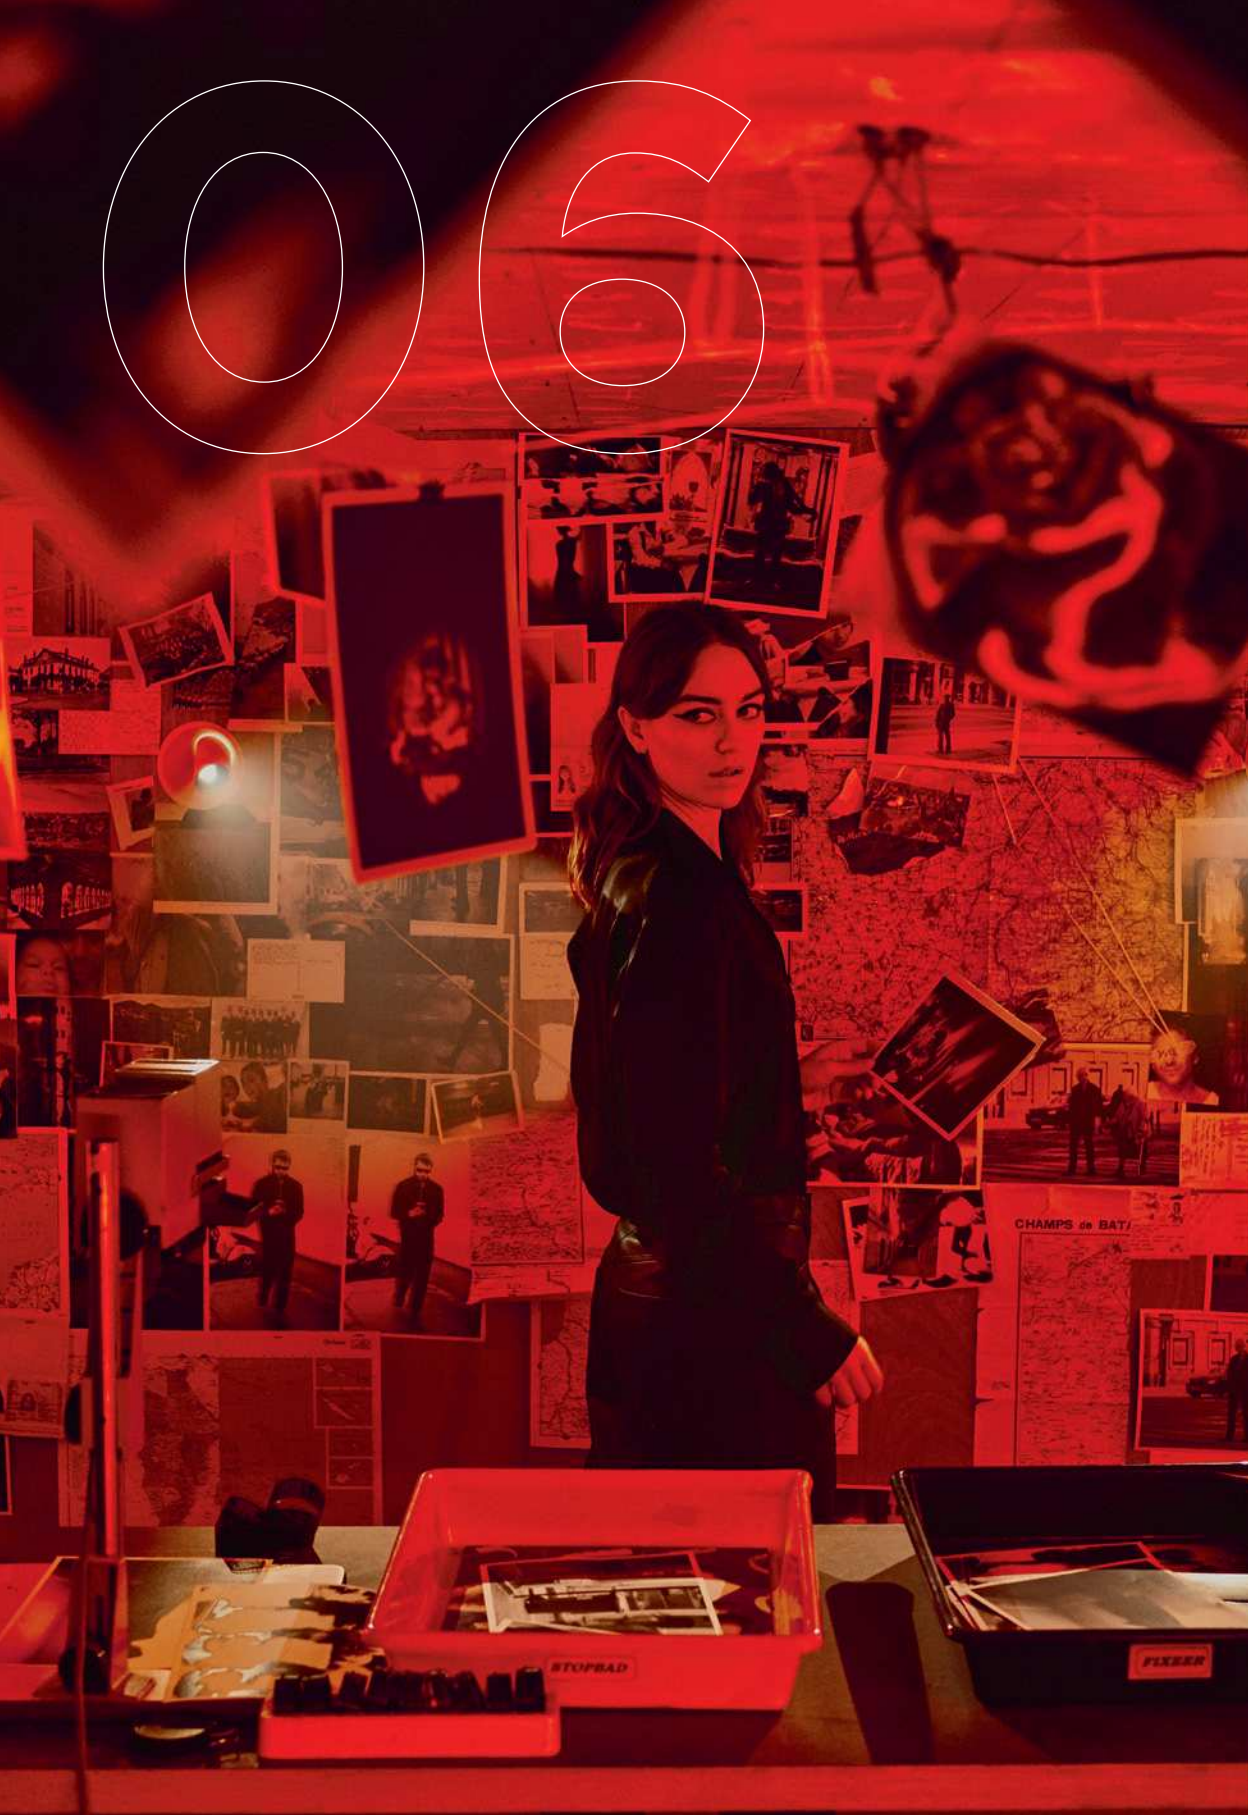
06
CHAMPS de BAT/
STOPBAD
FIXEER

PROFILES

06

PROFILES



COMO CORNER
623



DRUPL
629



MP78
635

SLD25
639

SLD35
643



SLD50
647

SLD75
657

COMO CORNER CURVED

COMO CORNER STRAIGHT

COMO CORNER

Design — Dirk Wynants

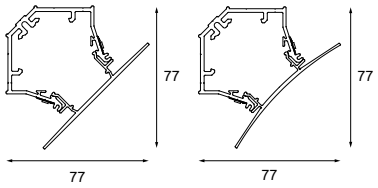

Especially conceived for renovation projects and a vibrant desire to keep installation simple, Como Corner bears no resemblance to anything in our profile families. Designer Dirk Wynants created this linear lighting solution with soft, indirect light, and an extremely subtle expression, with the purpose of confirming that challenging spaces can have beautiful light too.

So simple, so easy

This surface-mounted linear lighting solution poses no challenge to install on the wall or ceiling, where electrical outlets are limited, and where ceiling height is within easy reach. A simple aluminium extrusion fixed to the surface, 1 or 2 quality LED strips and a cover, custom-cut up to a maximum length of 4 meters.

Corners of light

Como Corner can emit light from 1 or 2 sides. Place it horizontally between the ceiling and wall, and it offers the options of indirect light on the ceiling, a wall-wash effect, or both. Or try it again horizontally, but at any level, to show up and/or down light. Position Como Corner vertically in the corner, where two walls meet, for a lighted corner space.

Welcome visual comfort

Our connected-ready profile is a new development in visual comfort. Its integrated Casambi module makes Como Corner's light a contributor to a person's well-being. Light levels to match time of day, light uniformity and indirect light (thus no glare), all contribute to Como Corner's inevitable popularity.

more info? *supermodular.com/en/como-corner*

COMO CORNER
PRIVATE RESIDENCE, AMSTERDAM (NL)

COMO CORNER
PRIVATE RESIDENCE, NICE (FR)

COMO CORNER
PRIVATE RESIDENCE, VIENNA (AT)

COMO CORNER
PRIVATE RESIDENCE, NICE (FR)

DRUPL 70 SHARP COVER

DRUPL 70 FLANGE STRAIGHT COVER

DRUPL 70 UPLIGHT

DRUPL

CURVED COVER

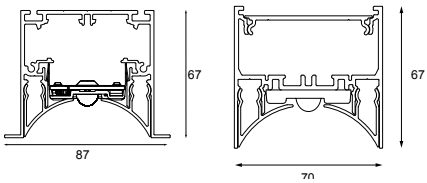

SHARP COVER

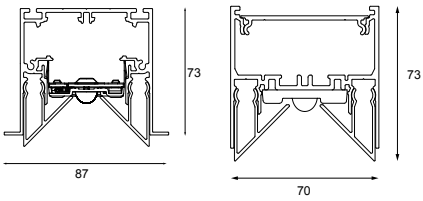

STRAIGHT COVER

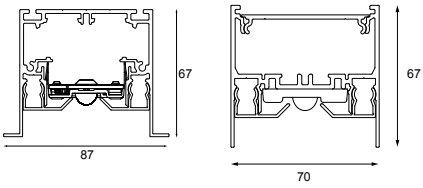

more info? *supermodular.com/en/drupl-70-curved*
supermodular.com/en/drupl-70-sharp
supermodular.com/en/drupl-70-straight
configurator.supermodular.com

Inspired by the effects of sunlight through droplets of water, Drupl is the perfect solution for office-compliant continuous lighting. This luminaire's high-quality light and anti-glare features are key to comfort and productivity in professional settings. Create a uniform light expression in your space with general light down and soft light up.

Cutting-edge optical lighting

Drupl combines the benefits of unique optical lenses that cover highly-performant LEDs. Our luminaire produces light at a quality of CRI90 or greater, with elegant design that will transform any professional space. Available in a wide range of colours and shapes.

Colour your temp

So that you can bring the most beautiful, natural and highest quality light into your space, Drupl features Fortimo LED Lines that come in 3 colour temperatures: 2700K, 3000K and 4000K. Add ambient light to your design with Drupl's uplight.

Light that thinks

Using a DALI-based lighting control system, Drupl offers smart profile lighting solutions that incorporate 3 types of miniature sensors: motion, daylight and infrared.
For maximum comfort, and energy savings of up to 75%.

DRUPL
URBAN INDUSTRIAL, AMSTERDAM (NL)
HEYLIGERS DESIGN + PROJECTS
(IMAGE WOUTER VAN DER SAR)

DRUPL, UNITED
GBL, KORTRIJK (BE)
GBL STUDIO
(IMAGE BEELDCOLLECTIEF)

DRUPL
PRIVATE RESIDENCE, ANTWERPEN (BE)

DRUPL
PRIVATE RESIDENCE, ZOTTEGEM (BE)

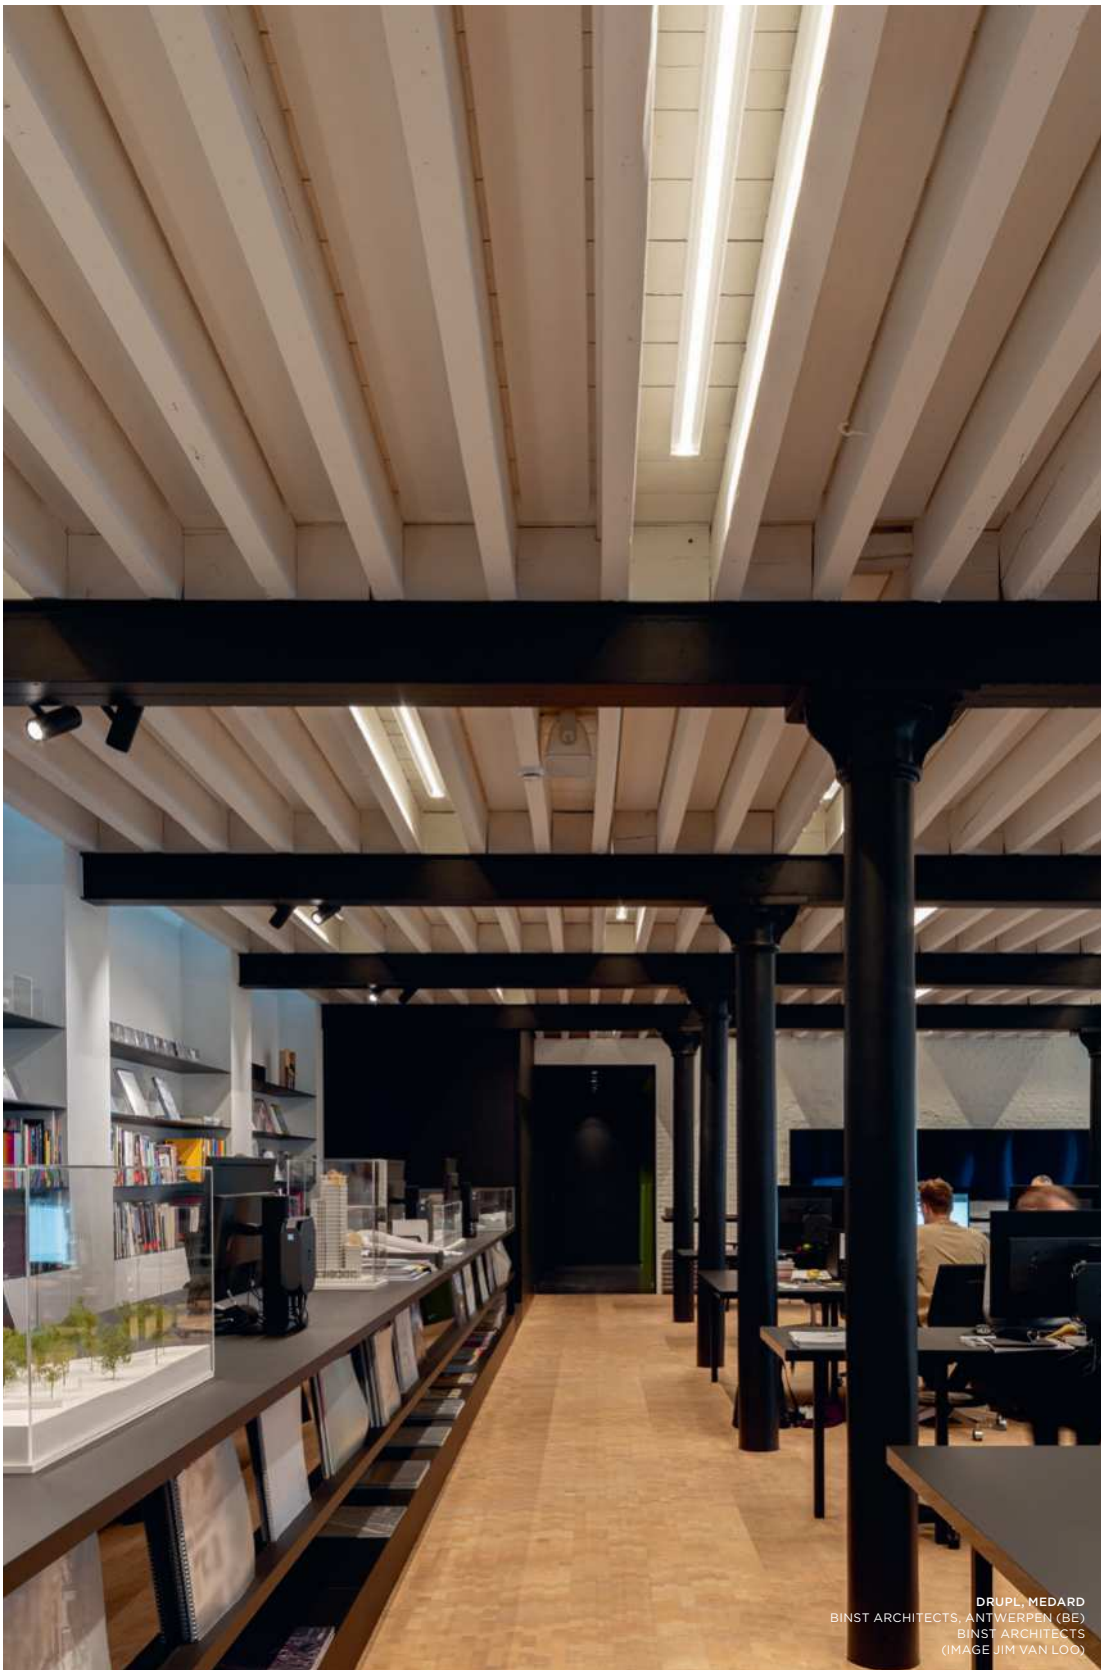

DRUPL, MEDARD
BINST ARCHITECTS, ANTWERPEN (BE)
BINST ARCHITECTS
(IMAGE JIM VAN LOO)

MP78 LED & LEDLINE

MP78 LEDLINE

MP78 REKTOR LED & LEDLINE

MP78



MP78 is one of the thinnest profiles on the market. In combination with LED lines, LED spotlights or the directional spotlight Rektor, MP78 is your ideal ally for any project in which you wish to provide both basic and accent lighting with a single fixture.

Versatile lighting

MP78 is a LED designated profile. For general lighting, use LED lines. For accent lighting, LED spotlights are available in warm or neutral white, in single or double lamp modules. With its sleek looks, the Rektor directional surface-mounted spotlight is a perfect match for MP78 and makes the profile particularly versatile.

Ingenious and sleek

Its 78mm width and 36mm height make MP78 a very slim fixture. An ingenious detail is that the heat is automatically conducted away by the aluminium housing. The standard finishes are white or black structure.
You can also create your own colour combinations by choosing a base plate and top plate in different colours. MP78 can be either surface mounted or suspended.

more info? *supermodular.com/en/mp78*
configurator.supermodular.com

MP78
OFFICES BRECHT (BE)
BHOOM
(IMAGE LENZER)

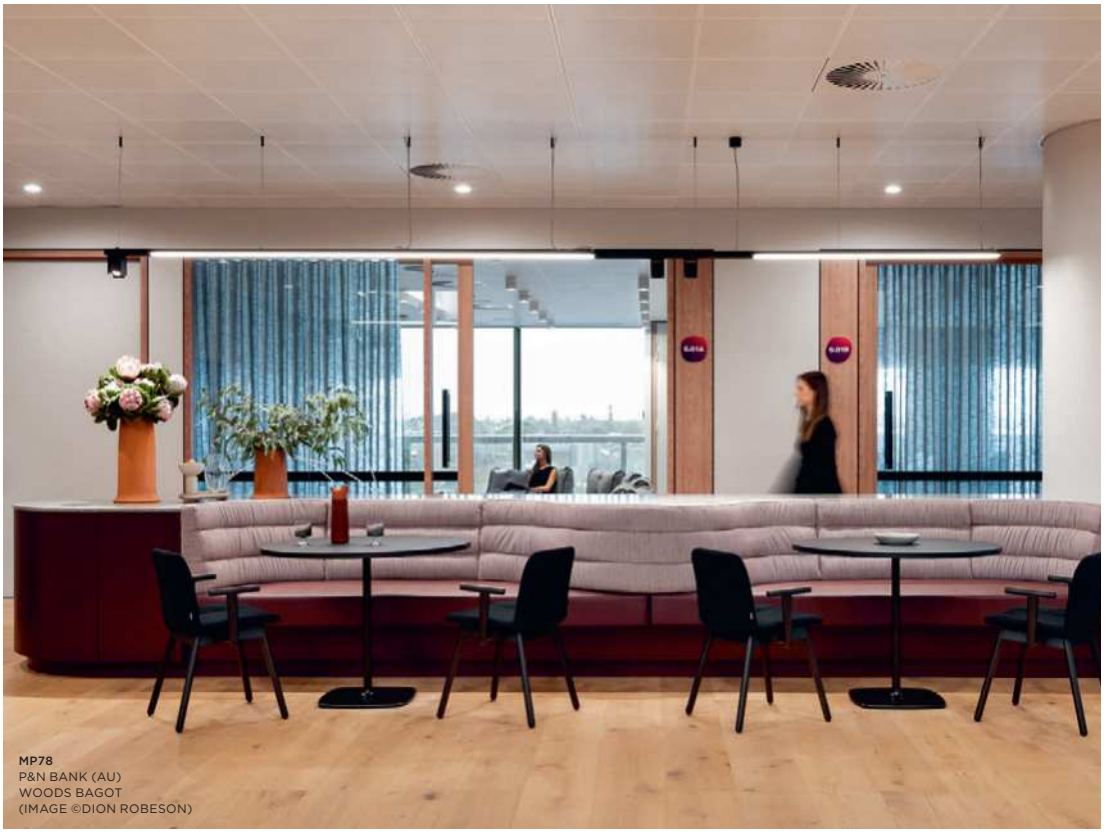

MP78
P&N BANK (AU)
WOODS BAGOT
(IMAGE ©DION ROBESON)

MP78
PRIVATE RESIDENCE, CHAAM (NL)
DOEN
(IMAGE JORIS LUIJK)

SLD25 - ANO SILVER BRONZE

SLD25 - ANO BRONZE

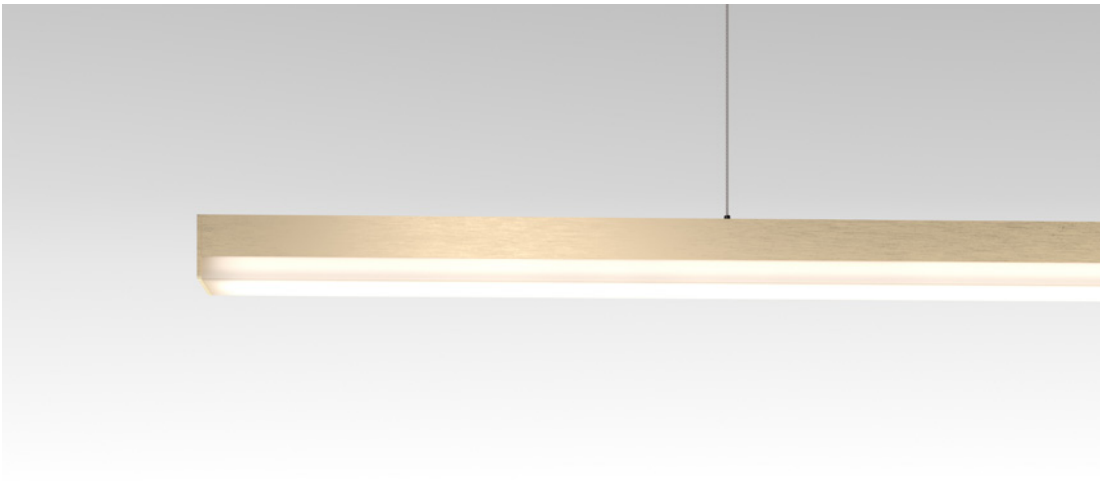

SLD25 - ANO CHAMPAGE

SLD25



Light lines make fantastic architectural features. At just 26.5 mm wide, SLD25, formerly SL nano, is our narrowest U-profile. SLD25 poly out, available with a PMMA diffuser on the outside, guarantees a light-filling effect in any room. Available with LEDs. Suitable for surface mounting on the wall or ceiling, also works wonders as a suspended luminaire.

Dress up with colours

SLD25's slender frame can make quite an impression with its anodised colour finishes. Champagne, bronze and silver bronze will make hospitality and residential spaces look absolutely ravishing.

more info? *supermodular.com/en/sld25*
configurator.supermodular.com

SLD25
PRIVATE RESIDENCE, LILLE (FR)

SLD25
PRIVATE RESIDENCE, BERGEN (NO)

SLD35 - ANO SILVER BRONZE

SLD35 - ANO CHAMPAGNE

SLD35 - ANO BRONZE

SLD35



Light lines are a beautiful way to highlight the architectural elements of a space. SLD35, formerly SL micro, can easily be your luminaire of choice for this effect. In fact, so can our entire SLD family. Available in ceiling mounted, suspended and recessed versions. SLD35's IP44 version enables you to extend your light lines into an outdoor space or the bathroom.

Colours to impress

SLD35's frame is the second thinnest of the family. Let it make an impression with its anodised colour finishes. Champagne, bronze and silver bronze will make hospitality and residential spaces look absolutely stunning.

more info? *supermodular.com/en/sld35*
configurator.supermodular.com

SLD35
HOTEL, BRUSSELS (BE)

SLD35
PRIVATE RESIDENCE, BERGEN (NO)

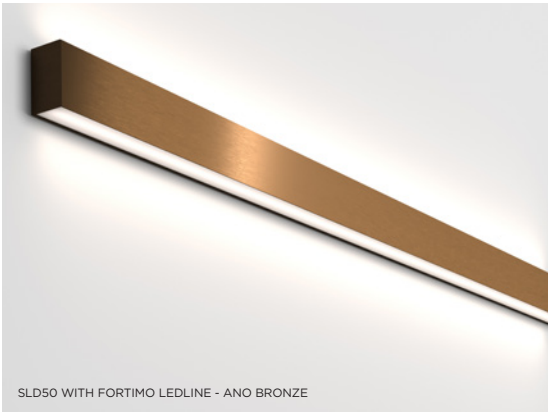

SLD50 WITH FORTIMO LEDLINE - ANO BRONZE

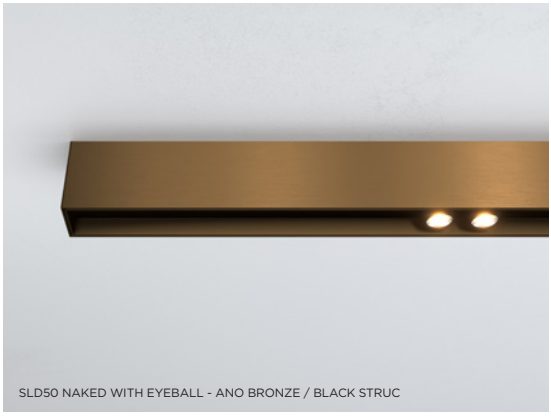

SLD50 NAKED WITH EYEBALL - ANO BRONZE / BLACK STRUC

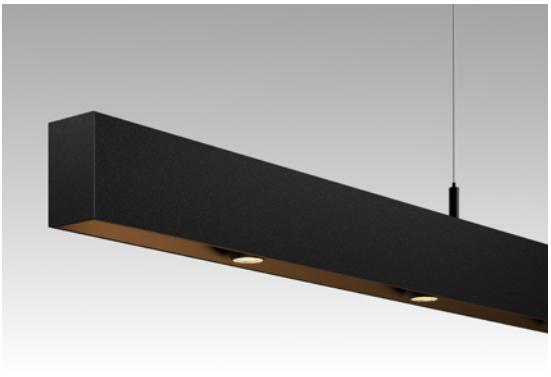

SLD50 NAKED WITH EYEBALL - BLACK STRUC / BRONZE

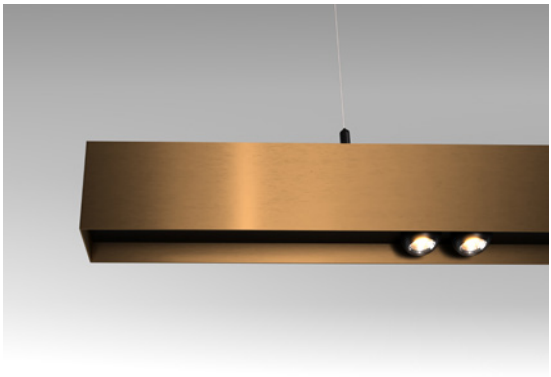

SLD50 HIGH WITH EYEBALL - ANO BRONZE / BLACK STRUC

SLD50 WITH FORTIMO LEDLINE - ANO CHAMPAGNE

SLD50 WITH FORTIMO LEDLINE - ANO SILVER BRONZE

SLD50 HIGH WITH FORTIMO LEDLINE - ANO SILVER BRONZE

SLD50

POLY OUT



POLY IN



NAKED



HIGH



more info? *supermodular.com/en/sld50-naked*
supermodular.com/en/sld50-office-compliant
supermodular.com/en/sld50-poly-in
supermodular.com/en/sld50-poly-out
supermodular.com/en/sld50-high
configurator.supermodular.com

A member of our popular SLD family, SLD50 is a thin, attractive (50 mm wide) variant. To complement its linear light, designers can incorporate Modular L.I.'s Eyeball, a small yet highly powerful, adjustable spot that can be rotated 360° and adjusted 30° in both directions. Its sleek design makes SLD50 a perfect solution for offices. Its luscious colours, champagne, gold, bronze and silver bronze will not go unnoticed in residential and hospitality environments.

The sexiest member of our gang

With SLD50 naked you can think up your own configuration: different outer and inner profiles in different colour combinations, 4 possible mountings, the naked linear LED tubes that come in 3 different lengths and the option to add 1 or 2 accent lights, in the form of our naked Eyeball luminaires. Office, residential and hospitality settings won't get enough of our warm colour options for the inner profiles (champagne, gold, bronze and silver bronze).

Always aim high

If more powerful light combined with the same brilliant esthetics of SLD50 naked is your desire, SLD50 high fulfills it. Perfect for a space in which users require an extra degree of visual comfort. Its deep recessed light units provide powerful luminance, the perfect fit for an office looking to add architectural feel to its ambiance. Available in SLD50 colours, trimless, in a surface mounted, suspended and recessed version, and with flange, for the recessed version only.

SLD50 @5000K

SLD50 @3500K

SLD50 @2700K

SLD50 @2400K

SLD50 HIGH
PRIVATE RESIDENCE, MUNICH (DE)

SLD50 NAKED
OFFICE, AMSTERDAM (NL)

SLD50 HIGH
PRIVATE RESIDENCE, VIENNA (AT)

SLD50 HIGH
PRIVATE RESIDENCE, BUDAPEST (HU)

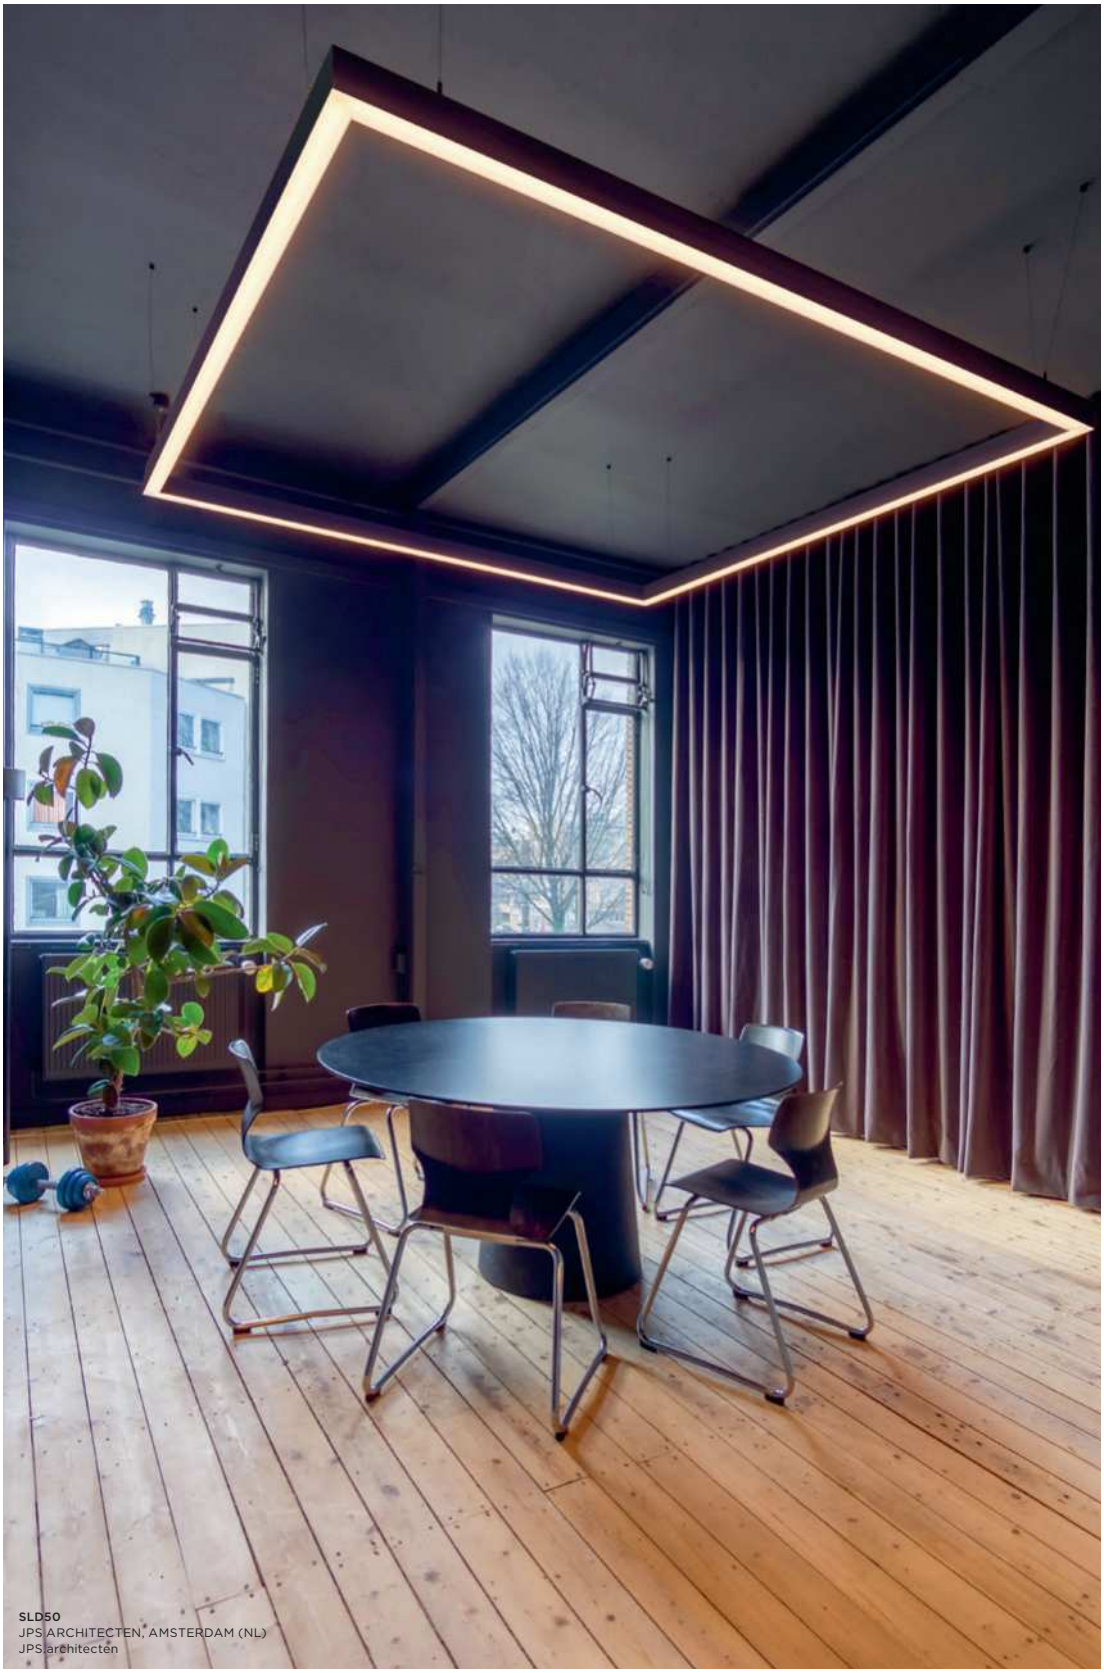

SLD50
JPS ARCHITECTEN, AMSTERDAM (NL)
JPS architecten

SLD50 HIGH
SHOWROOM, AMSTERDAM (NL)

SLD50 NAKED
SHOWROOM, AMSTERDAM (NL)

SLD50 HIGH
MELBOURNE (AU)

SLD50 NAKED
PRIVATE RESIDENCE, ROTTERDAM (NL)
DOEN
(IMAGE NICOLINE RODENBURG)

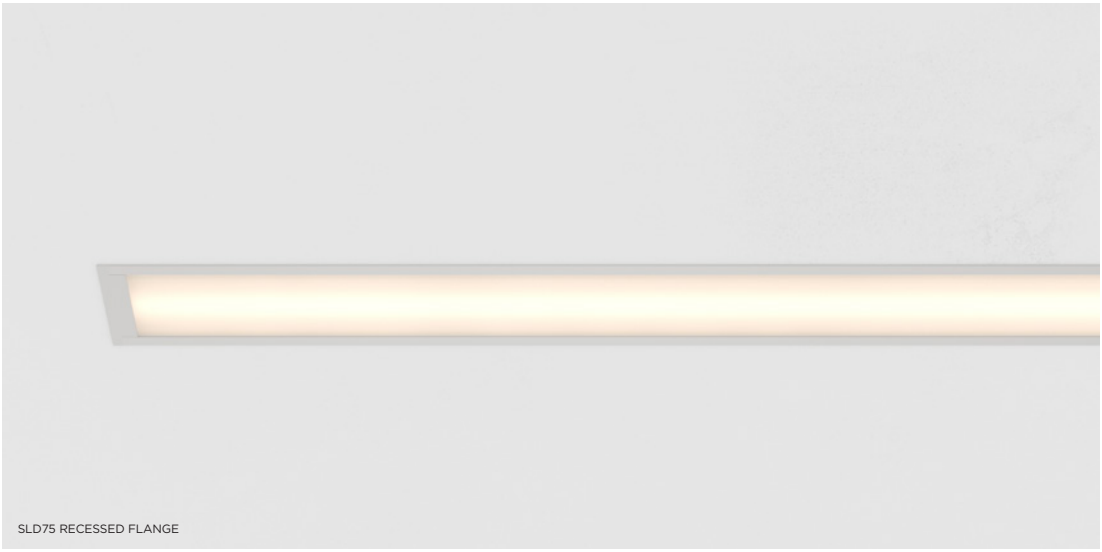

SLD75 RECESSED FLANGE

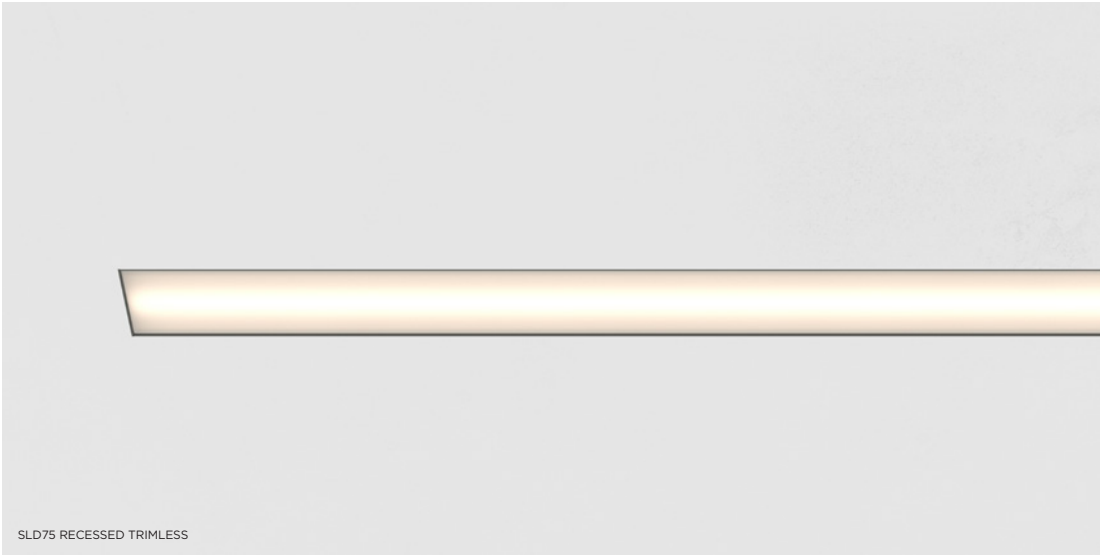

SLD75 RECESSED TRIMLESS

SLD75 SURFACE

SLD75





A LED dedicated version of our famous SL75 lighting cove, SLD75 is a completely customisable solution, guaranteeing the perfect size for your setting. With a low UGR, our LED module, combined with different lenses – prismatic polycarbonate diffuser or PMMA diffuser – brings you the ideal solution for office lighting.
SLD75 fitted with standard poly lenses is perfect for general lighting and even comes standard with pre-set dimming.

more info? *supermodular.com/en/sld75*
configurator.supermodular.com

SLD75
ORSI, MELLE (BE)
VK ARCHITECTS & ENGINEERS

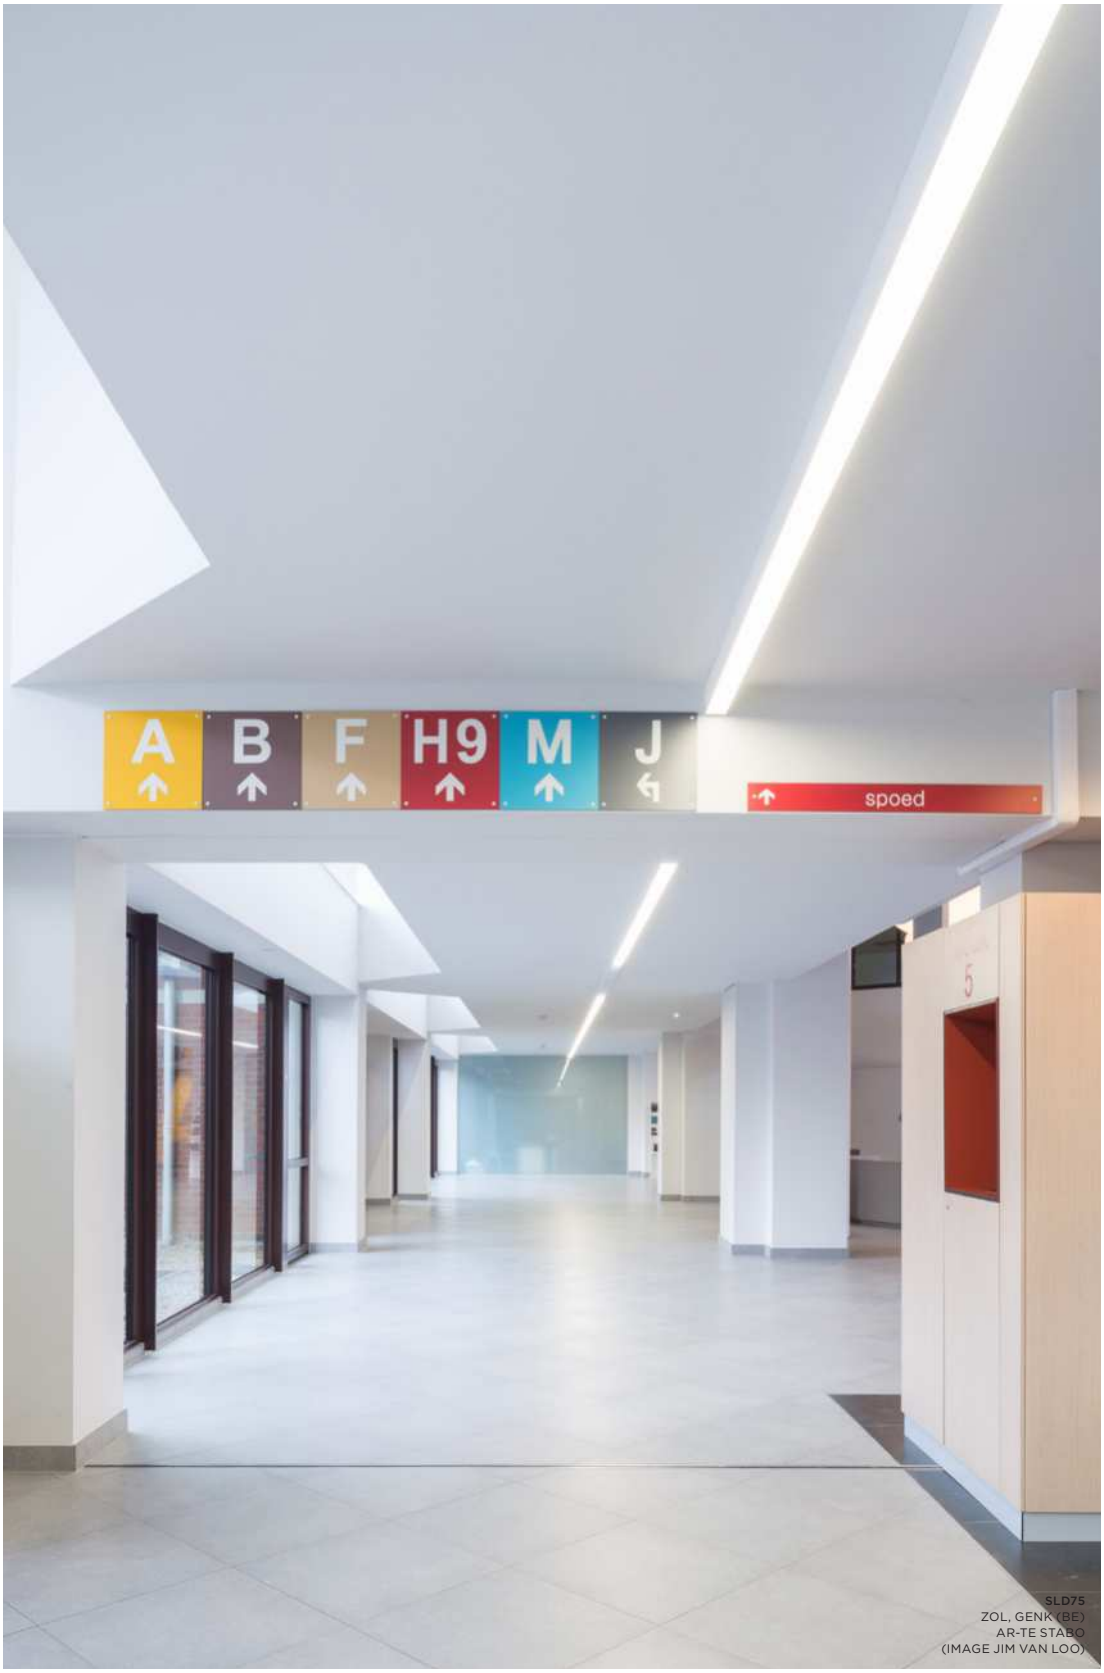

SLD75
ZOL, GENK (BE)
AR-TE STABO
(IMAGE JIM VAN LOO)

07

GOODIES

663 — CONNECTED LIGHTING

674 — M-LED
679 — LED-STRIP 24V

680 — DRIVER SPECS. - CONSTANT CURRENT
688 — DRIVER SPECS. - CONSTANT CURRENT DEEP DIM
689 — DRIVER SPECS. - CONSTANT VOLTAGE 48V
690 — DRIVER SPECS. - CONSTANT VOLTAGE 24V

692 — BACK-UP UNITS

694 — WIRING DIAGRAMS
698 — WIRING DIAGRAMS - PISTA TRACK 48V

SHELLBY
PRIVATE RESIDENCE, LISBON (PT)

CONNECTED LIGHTING

Powered by — Hue & Casambi

A simple click, touch, swipe, sound, or even physical presence, is all it takes to control light in a space and adapt it to an activity or to create mood. With the use of smart devices, bring safety and comfort to a space, and let there be light. Turning lights on/off, or dimming them. Adjusting intensity, setting up light routines and in/out modes with an easy setup and features. Using remote control from anywhere, anytime. Yes to all.

No need to look further for who can help you with which. Modular Lighting Instruments is your lighting partner in projects that incorporate Hue and Casambi combined, or separately.

Turn light into an experience with Hue

Designed with consumers and smart home devices in mind, Hue will give touch of a finger a whole new meaning. One touch or voice command is all it takes to bring interactivity into your lighting plan with the Friends of Hue ecosystem.

Control light as you wish with Casambi

Casambi fits in commercial applications, residential spaces, hospitality, office and retail environments. With a portfolio dedicated to smart lighting, Casambi is designed for ultimate control of your entire lighting network.

Choosing a connected technology

What do you have in mind?
Here are a few tips to help you decide what you need.

Friends of hue

CASAMBI

1	2	3	4	5
MODULAR LUMINAIRE	MODULAR LUMINAIRE	MODULAR LUMINAIRE	MODULAR LUMINAIRE	48V TRACK
+	+	+	+	+
	1-10V LED GEAR	1-10V/DALI/TRE LED GEAR	CASAMBI-READY LED GEAR	48V DALI LED GEAR
+	+	+		+
HUE BULB	HUE DIM CIRCUIT MODULE	CASAMBI 1-10V/DALI/TRE DIM MODULE		CASAMBI TRACK 48V DIM MODULE
+	+			
HUE BRIDGE	HUE BRIDGE			

Creating a smart room (1)

Your project is a room with installed luminaires (with GU10 or E27 sockets) without the possibility to change wiring in order to dim your lights. Hue offers connected-ready bulbs, compatible with Bluetooth and Wifi, which you can simply screw in existing luminaires. Just install the app - and create a connection with Hue Bridge if you want to connect via Wifi - and voila. Many of our loved residential luminaires such as Smart, Lotis, Nomad, Duell, and our latest, Tulip, can be retrofitted to incorporate smart lighting.

Wanting more than just light (2)

You're looking to integrate wireless control of lighting in a space, but also want to include more in your wireless system. Hue offers an entire ecosystem. In addition to wireless lighting control, voice, thermostats, blinds and sound control will make your Hue experience even more complete.

Working with LED luminaires already connected to LED drivers (2 & 3)

You want to upgrade a home with the power of connected lighting. Install a Tre, 1-10V or Dali dim module, between the 230V power network and the LED driver and control connected lights with the Casambi app. In case a 1-10V driver is already being used, you can also opt to add a Hue Bridge and a Hue 1-10V dim circuit module to control all lights with the Hue app.

Working on a larger, multi-brand project (3)

Renovation work is already completed, LED luminaires and 1-10V/Dali/Tre LED gears of different brands have already been installed. Now you want to add smart lighting. Thanks to its compatibility with other brands, all you need to do is choose the suitable Casambi dim module (1-10V/Dali/Tre dim), and download the Casambi app. Connected!

Building from scratch (4)

As construction work on an office space or residential project is being done, you get to choose everything. Casambi-compatible LED luminaires or profiles, Casambi-ready gears and that's all. There's no need for extra Casambi modules and the solution is cost effective. Download the app and control as many as 250 luminaires from anywhere in the building.

Looking to add a 48V track (5)

Our 48V Pista system is ready for Casambi. Linear lighting and spots all in one. Just 3 wires per track system and the Casambi 48V track dim module. In combination with Dali fixtures, this allows you to dim all fixtures together or separately. Choose accent lights such as Minude, Marbulito, Médard and Smart tubed, or linear modules to provide your clients with ultimate control of lighting. Lights can easily be adjusted to only use Pista's uplight by night, making a warm, cozy ambience even in large spaces.

Connected lighting - components

CONNECTED LIGHTING

HUE





13190130	HUE DIM CIRCUIT MODULE 150-300W 0/1-10V **(1)**	
70000616	HUE BRIDGE EU **(2)**	
70000617	HUE BRIDGE UK **(2)**	
70008054	HUE MOTION SENSOR **(3)**	
70000191	HUE OUTDOOR MOTION SENSOR **(4)**	
70000152	HUE DIMMER SWITCH EU **(5)**	
70000154	NIKO PURE SWITCH FOR HUE - WHITE STEEL **(6)**	
70000155	NIKO PURE SWITCH FOR HUE - BLACK STEEL **(7)**	
70000213	HUE SMART BUTTON **(8)**	
70000214	HUE WALL SWITCH MODULE **(9)**	
70000184	HUE WHITE AMBIANCE 8.5W A60 E27 **(10)**	
70000185	HUE WHITE 9W A60 E27 **(10)**	
70000169	HUE WHITE AND COLOR AMBIANCE 9W A60 E27 **(10)**	
70000611	HUE WARM WHITE 9.5W A60 E27 EU **(10)**	
70000188	HUE WHITE FILAMENT 7W ST64 E27 **(12)**	
70000189	HUE WHITE FILAMENT 7W A60 E27 **(13)**	
70000190	HUE WHITE FILAMENT 7W G93 E27 **(14)**	
70000186	HUE WHITE 5.2W GU10 **(11)**	
70000168	HUE WHITE AMBIANCE 5W GU10 **(11)**	
70000187	HUE WHITE AND COLOR AMBIANCE 5.7W GU10 **(11)**	
70000196	HUE WHITE AND COLOR AMBIANCE OUTDOOR LEDSTRIP - 2M **(15)**	
70000193	HUE WHITE AND COLOR AMBIANCE OUTDOOR LEDSTRIP - 5M **(16)**	
70000194	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 2M **(17)**	
70000195	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 1M EXTENT **(18)**	

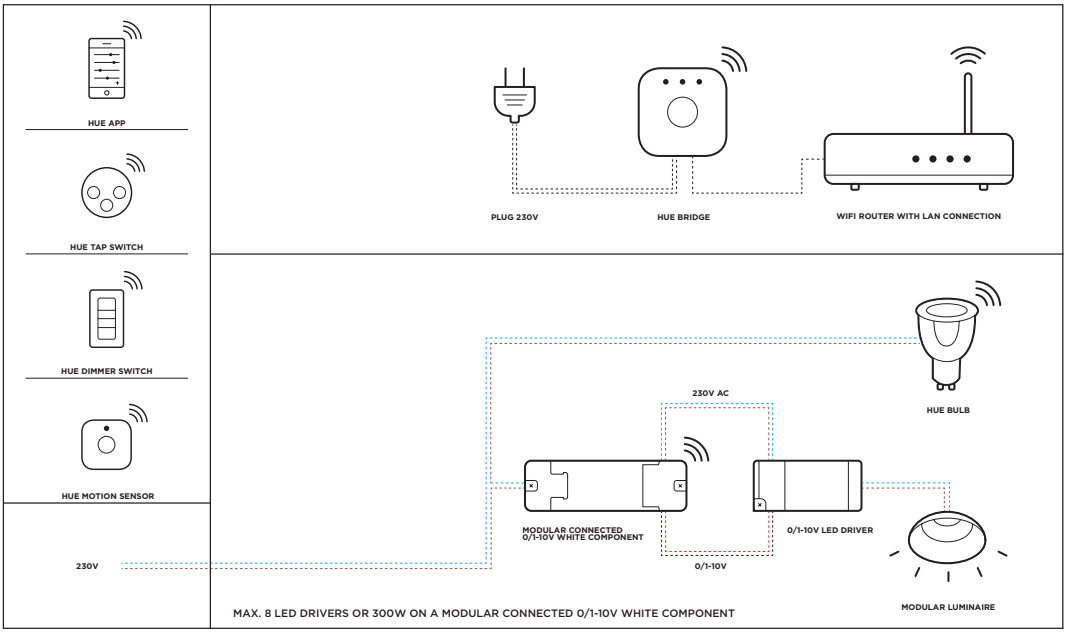
WIRELESS CONTROLS
HUE APP
HUE TAP SWITCH
HUE DIMMER SWITCH
HUE MOTION SENSOR
CONVENTIONAL CONTROLS
230V
PLUG 230V
HUE BRIDGE
WIFI ROUTER WITH LAN CONNECTION
CONVENTIONAL CONTROLS
HUE BULB
230V AC
MODULAR CONNECTED 0/1-10V WHITE COMPONENT
0/1-10V LED DRIVER
0/1-10V
MODULAR LUMINAIRE
MAX. 8 LED DRIVERS OR 300W ON A MODULAR CONNECTED 0/1-10V WHITE COMPONENT

Connected lighting - components

CONNECTED LIGHTING

CASAMBI







13470100	CASAMBI DIM MODULE 1-10V **(1)**	
13470101	CASAMBI DIM MODULE TRE DIM **(2)**	
13470102	CASAMBI DIM MODULE DALI **(1)**	
13470109	CASAMBI SWITCH WHITE **(3)**	
13470030	CASAMBI LED GEAR 300-1050MA 16-38W **(4)**	
13470130	CASAMBI LED GEAR 350-1050MA 25-60W **(5)**	
13470209	CASAMBI TRACK 48V DIM MODULE WHITE STRUC **(6)**	
13470232	CASAMBI TRACK 48V DIM MODULE BLACK STRUC **(6)**	
13470302	CASAMBI TRACK 48V REMOTE DIM MODULE **(7)**	

WIRELESS CONTROLS

CASAMBI APP

CASAMBI SWITCH

CONVENTIONAL CONTROLS

TRAILING EDGE DIMMABLE (GI FIXTURES)

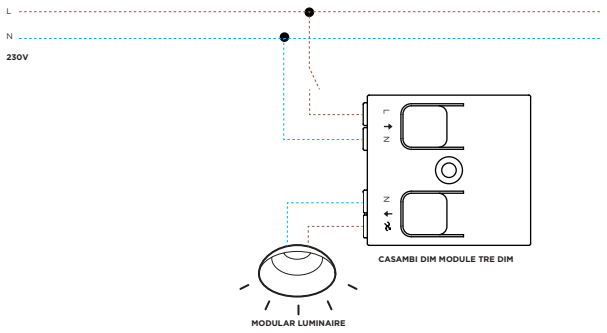

TRAILING EDGE DIMMABLE (GE FIXTURES)

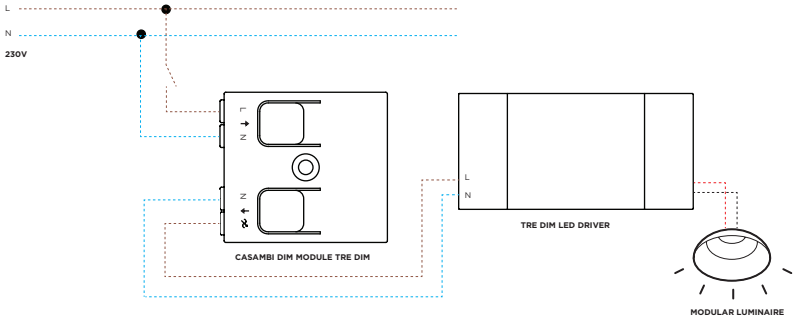

CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

0/1-10V DIMMABLE

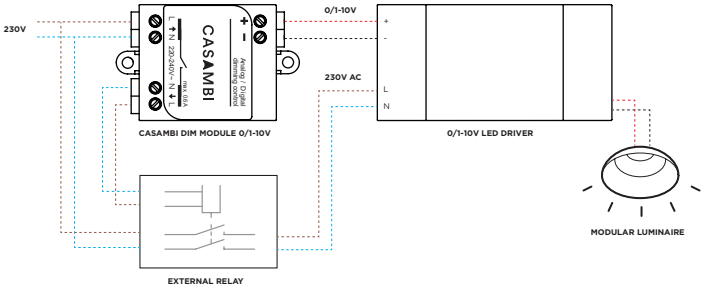

CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

DALI DIMMABLE

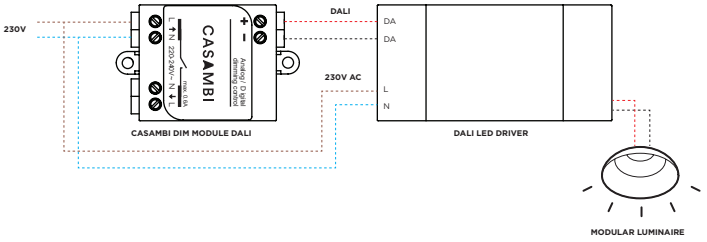

CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

Connected lighting - product specifications

HUE DEVICES			
Description	**HUE DIM CIRCUIT MODULE 150-300W 0/1-10V**	**HUE BRIDGE - EU**	**HUE BRIDGE - UK**
Article number	13190130	70000616	70000617
Power supply	198-253V AC / 50-60Hz	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz
Power consumption	0.3W (stand-by)	3W	3W
Protection level	IP20	IP20	IP20
Lifetime	50000 hours	30000 hours	30000 hours
Dimensions	127mm x 46mm x 32mm	88 mm x 88 mm x 26 mm	88 mm x 88 mm x 26 mm
Weight	0,09kg		
Range	12m		
Features	• connect up to 8 1-10V drivers (max. 300W)	• connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls	• connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls

HUE OPTIONAL CONTROLS			
Description	**HUE DIMMER SWITCH**	**HUE MOTION SENSOR**	**HUE OUTDOOR MOTION SENSOR**
Article number	70000152	70008054	70000191
Power supply	battery powered	battery powered	battery powered (2x AA)
Protection level	IP20	IP42	IP54
Lifetime	50000 clicks		
Dimensions	115mm x 70mm x 14mm (wall plate) 92mm x 35m x 11mm (remote)	55mm x 55mm x 29mm	76mm x 76mm x 56mm
Range	12m (depending on local circum-stances)	5m (100-degree detection angle)	5m (100-degree detection angle)
Features	• connect up to 12 dimmer switches to the bridge	• connect up to 12 motion sensors to the bridge	• connect up to 12 motion sensors to the bridge

Description	**HUE SMART BUTTON**	**HUE WALL SWITCH MODULE**	**NIKO PURE SWITCH FOR HUE**
Article number	70000213	70000214	70000154 - white steel 70000155 - black steel
Power supply	battery powered	battery powered	kinetic energy provided by your button touch
Protection level	IP44	IP20	IP20
Lifetime	50000 clicks		50000 clicks
Dimensions	76mm x 76mm	43mm x 38mm	85mm x 85mm
Range	12m (depending on local circumstances)	12m (depending on local circumstances)	15-30m (depending on local circumstances)
Features	• connect up to 12 dimmer switches to the bridge	• connect up to 12 dimmer switches to the bridge	• connect up to 25 switches to the bridge • 4 configurable buttons • wall mountable

Connected lighting - product specifications

HUE BULBS

Description	HUE WARM WHITE A60 E27	HUE WHITE A60 E27	HUE WHITE AMBIANCE A60 E27	HUE WHITE AND COLOR AMBIANCE A60 E27
Article number	70000611	70000185	70000184	70000169
Socket	E27	E27	E27	E27
CCT (min - max.)	2700K	2700K	2200K-6500K	2000-6500K
CRI	CRI 80+	CRI 80+	CRI 80+	CRI 80+
Power supply	100–240 V AC / 50–60Hz	220V-240V	220V-240V	220–240V
Power consumption	9.5W	9W	8.5W	9W
Output (min - max.)	806lm	806lm	806lm @ 4000K	806lm @4000K
Dimmable / not dimmable	dimmable	dimmable	dimmable	dimmable
Communication protocol	Wifi	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20	IP20
Lifetime	25000 hours	25000 hours	25000 hours	25000 hours

Description	HUE WHITE FILAMENT 7W ST64 E27	HUE WHITE FILAMENT 7W A60 E27	HUE WHITE FILAMENT 7W G93 E27
Article number	70000188	70000189	70000190
Socket	E27	E27	E27
CCT (min - max.)	2700K	2700K	2700K
CRI	CRI 80+	CRI 80+	CRI 80+
Power supply	220V-240V	220V-240V	220V-240V
Power consumption	7W	7W	7W
Output (min - max.)	550lm	550lm	550lm
Dimmable / not dimmable	dimmable	dimmable	dimmable
Communication protocol	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20
Lifetime	15000 hours	15000 hours	15000 hours

Description	HUE WHITE GU10	HUE WHITE AMBIANCE GU10	HUE WHITE AND COLOR AMBIANCE GU10
Article number	70000186	70000168	70000187
Socket	GU10	GU10	GU10
CCT (min - max.)	2700K	2200-6500K	2000K-6500K
CRI	CRI 80+	CRI 80+	CRI 80+
Power supply	220V-240V	220V-240V	220V-240V
Power consumption	5.2W	5W	5.7W
Output (min - max.)	400lm	129-292lm	350lm @ 4000K
Dimmable / not dimmable	dimmable	dimmable	dimmable
Communication protocol	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20
Lifetime	15000 hours	15000 hours	15000 hours

Connected lighting - product specifications

HUE LED STRIPS				
Description	**HUE WHITE AND COLOR AMBIANCE OUTDOOR LED STRIP - 2M**	**HUE WHITE AND COLOR AMBIANCE OUTDOOR LED STRIP - 5M**	**HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 2M**	**HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 1M EXTENT**
Article number	70000196	70000193	70000194	70000195
CCT (min - max.)	2000K-6500K	2000K-6500K	2000K-6500K	2000K-6500K
CRI	CRI 80+	CRI 80+	CRI 80+	CRI 80+
Power supply	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz
Power consumption	19W	37,5W	20W	11,5W
Output (min - max.)	850lm	1650lm	1600lm	950lm
Dimmable / not dimmable	dimmable	dimmable	dimmable	dimmable
Communication protocol	Wifi	Wifi	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP67	IP67	IP20	IP20
Lifetime	25000 hours	25000 hours	25000 hours	25000 hours
Features			including power adapter	

Connected lighting - product specifications

CASAMBI DEVICES				
Description	**CASAMBI DIM MODULE 1-10V**	**CASAMBI DIM MODULE DALI**	**CASAMBI DIM MODULE TRE DIM**	**CASAMBI TRACK 48V DIM MODULE**
Article number	13470100	13470102	13470101	13470232 - black struc 13470209 - white struc
Power supply	220-240 VAC 50 Hz	220-240 VAC 50 Hz	85-240 VAC 50-60 Hz	24-50 Vdc
Power consumption	1.2W	1.2W	0.3W	5W
Protection level	IP20	IP20	IP20	IP20
Lifetime	50000 hours	50000 hours	50000 hours	
Weight	0,05kg	0,05kg	0,01kg	0.058kg
Dimensions	56.5mm x 35.8mm x 22.3mm	56.5mm x 35.8mm x 22.3mm	40.4mm x 36.3mm x 14mm	142.6mm x 58.1mm
Features	connect max. 1 driver	connect max. 1 driver	connect max. 1 driver	connect up to 64 dali 48V track fixtures
Communication protocol	Bluetooth	Bluetooth	Bluetooth	Bluetooth

CASAMBI OPTIONAL CONTROLS	
Description	**CASAMBI SWITCH WHITE**
Article number	713470109
Power supply	battery powered (1x CR2430)
Protection level	IP20
Dimensions	90mm x 90mm x 12 mm
Range	up to 50m in open air
Features	battery lifetime 2-5 years (depending on usage)

CASAMBI LED GEAR		
Description	**CASAMBI LED GEAR 300-1050MA 16-38W**	**CASAMBI LED GEAR 350-1050MA 25-60W**
Article number	13470030	13470130
Power supply	220-240 VAC 50-60 Hz	220-240 VAC 50-60 Hz
Power consumption	16-38W	25-60W
Protection level	IP20	IP20
Weight	0.139kg	0.215kg
Dimensions	146.5mm x 44mm x 30mm	124mm x 79mm x 22mm
Communication protocol	Bluetooth	Bluetooth

M-LED

M-LED 50

M-LED 70

M-LED 111

M-LED 111 GE



1X LED ARRAY INCL. 16.25W

! CAN BE COMBINED WITH BOLSTER RECESSED, HALOSCAN 179, LOTIS AND MULTIPLE (TRIMLESS)

Friends of hue | III | 500mA 32V DC | IP20 | GWT 960° | 0.75KG

	2700K / CRI90+		
	15°	25°	40°
black matt	**11298002**	**11298102**	**11298202**
brushed alu	**11298024**	**11298124**	**11298224**
white struc	**11298009**	**11298109**	**11298209**
	3000K / CRI90+		
	15°	25°	40°
black matt	**11298302**	**11298402**	**11298502**
brushed alu	**11298324**	**11298424**	**11298524**
white struc	**11298309**	**11298409**	**11298509**
	4000K / CRI90+		
	15°	25°	40°
black matt	**11298602**	**11298702**	**11298802**
brushed alu	**11298624**	**11298724**	**11298824**
white struc	**11298609**	**11298709**	**11298809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W

M-LED 70 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.18KG

	2700K / CRI90+		
	15°	25°	40°
black	14070002	14070102	14070202
white struc	14070009	14070109	14070209
	3000K / CRI90+		
	15°	25°	40°
black	14070302	14070402	14070502
white struc	14070309	14070409	14070509
	4000K / CRI90+		
	15°	25°	40°
black	14070602	14070702	14070802
white struc	14070609	14070709	14070809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**
2700K / 25°	519lm 6.2W	**667lm 9.2W**
3000K / 25°	550lm 6.2W	**739lm 9.2W**
4000K / 25°	590lm 6.2W	**792lm 9.2W**

WARM DIM

M-LED 70 warm dim GE



1X LED ARRAY INCL. 6W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.21KG

	1800K - 3000K / CRI90+		
	20°	25°	40°
black	14070902	14071002	14071102
white struc	14070909	14071009	14071109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

@3000K / 25°	**456lm / 6W**

M-LED 50 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE

Friends of hue | 500mA | IP20 | 0.14KG

	2700K / CRI90+					
	15°		25°		40°	
alu	14060005		14060105		14060205	
	3000K / CRI90+					
	15°		25°		40°	
alu	14060305		14060405		14060505	
	3500K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°
alu	14060605	14060705	14060805	14060905	14061005	14061105

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

	350mA	**500mA**
2700K / 25°	519lm 6.2W	**667lm 9.2W**
3000K / 25°	550lm 6.2W	**739lm 9.2W**
3500K / 25°	571lm 6.2W	**768lm 9.2W**
4000K / 25°	590lm 6.2W	**792lm 9.2W**

WARM DIM

M-LED 50 warm dim GE



1 X LED ARRAY INCL. 6W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE

Friends of hue | 350mA | IP20 | GWT 960° | 0.14KG

	1800K - 3000K / CRI90+		
	15°	25°	40°
alu	14061205	14061305	14061405

LUMINAIRE OUTPUT & POWER CONSUMPTION
(alu)

@3000K / 25°	**461lm / 6W**

LED SPOTS & TUBES

LED SPOTS & TUBES



Description	PH MAS LEDSP EXPERTCOLOR MV 3.9-35W GU10 927 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 3.9-35W GU10 927 36° (1)	PH MAS LEDSP EXPERCOLOR MV 3.9-35W GU10 930 25° (1)
Article number	70008052	70008059	70008063
Socket	GU10	GU10	GU10
Lumen output	265lm	265lm	280lm
Beam angle	25°	36°	25°
CCT	2700K	2700K	3000K
CRI	97	97	97
Dimmable	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers
Power	3.9W (35W)	3.9W (35W)	3.9W (35W)
Power supply	220V-240V	220V-240V	220V-240V
Lifetime	40000 hours	40000 hours	40000 hours

Description	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 927 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 927 36° (1)	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 930 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 5,5-50W GU10 930 36° (1)
Article number	70008048	70008049	70008050	70008053
Socket	GU10	GU10	GU10	GU10
Lumen output	355lm	355lm	375lm	375lm
Beam angle	25°	36°	25°	36°
CCT	2700K	2700K	3000K	3000K
CRI	97	97	97	97
Dimmable	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers
Power	5.5W (50W)	5.5W (50W)	5.5W (50W)	5.5W (50W)
Power supply	220V-240V	220V-240V	220V-240V	220V-240V
Lifetime	40000 hours	40000 hours	40000 hours	40000 hours

Description	VL LED AR111 12V 12W 2700K MEDIUM (2)	VL LED AR111 12V 12W 2000-3000K MEDIUM (2)	PH LEDTUBE 3W 300MM S14D 2700K NOT DIMMABLE (3)	OS LEDINESTRA 7W/827 FR S14D 500MM (4)
Article number	70008066	70008067	70008058	70005798
Socket	QR-LP 111	QR-LP 111	S14d	S14d
Lumen output	900lm	628lm	250lm	470lm
Beam angle	24°	24°	140°	200°
CCT	2700K	2000-3000K	2700K	2700K
CRI	92	95	82	80+
Dimmable	yes	yes	not dimmable	yes
Power	12W (75W)	12W (75W)	3W (35W)	7W (40W)
Power supply	12V AC	12V AC	220V-240V	220V-240V
Lifetime	30000 hours	30000 hours	15000 hours	25000 hours

LED-STRIP 24V

LED-STRIP 5M 24V GE



	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	**93000515**	**93000516**	**93000517**	**93000007**	**93000008**	**93000009**

LED-STRIP IP44 5M 24V GE



	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	**93000016**	**93000017**	**93000018**	**93000026**	**93000027**	**93000028**

LED-STRIP IP44 3M 24V GE



	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	**93000032**	**93000033**	**93000034**	**93000035**	**93000036**	**93000037**

Driver specs. - constant current

	 IP20	
Reference	**13550130**	**13550030**
Dimensions (LxWxH)	115x34x19	115x34x19
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +50°C
Power factor (max)	0.8	0.88
Dimming	-	-
Max drivers on MCB 16A type B*	27	27
Output	**350mA** / 15W 2-41.5V DC	**500mA** / 12W 2-24V DC

	IP20
Reference	**12408830**
Dimensions (LxWxH)	ø42x20
Input	220-240V 50/60Hz
Ambient temperature	-20°C to +60°C
Power factor (max)	>0.92
Dimming	-
Max drivers on MCB 16A type B*	75
Output	**350mA** / 14W 21-40V DC

	 IP20				
Reference	**12403430**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	-				
Max drivers on MCB 16A type B*	15				
Output	**350mA** / 25W 1-74V DC	**500mA** / 35W 1-72V DC	**700mA** / 50W 1-71V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting (check on driver)					

	 IP20 R, C		
Reference	**12407230**	**12404830**	**12404930**
Dimensions (LxWxH)	102x38x21	102x38x21	102x38x21
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.96	0.96	0.96
Dimming	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)
Max drivers on MCB 16A type B*	50	50	50
Output	**250mA** / 3-7W 14-28V DC	**350mA** / 4-10W 12-28V DC	**500mA** / 5-10W 10-20V DC

***** FOR OTHER TYPES OF MCB, SEE TABLE PAGE 650

Driver specs. - constant current

	 IP20 R, C		
Reference	**12404230**	**12404330**	**12408530**
Dimensions (LxWxH)	111x52x22	111x52x22	111x52x22
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.95	0.95	0.95
Dimming	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)
Max drivers on MCB 16A type B*	50	50	50
Output	**350mA** / 8-18W 25-51V DC	**500mA** / 8-20W 16-40V DC	**700mA** / 8-20W 16-28V DC

	 IP20 PUSH R, C		
Reference	**12400330**		
Dimensions (LxWxH)	166x46x34		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +45°C		
Power factor (max)	0.97		
Dimming	TRAILING EDGE/LEADING EDGE/PUSH DIM (PWM)		
Max drivers on MCB 16A type B*	50		
Output	**350mA** / 17W 1-47V DC	**500mA** / 24W 1-47V DC	**700mA** / 32W 1-46V DC
DIP-switch setting (check on driver)			

	 IP20 R, C PUSH		
Reference	**12405730**		
Dimensions (LxWxH)	163x83x35		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.88		
Dimming	MAINS/PUSH (PWM)		
Max drivers on MCB 16A type B*	30		
Output	**1050mA** / 1-455W 2-43V DC	**1200mA** / 1-50W 2-42V DC	**1400mA** / 1-50W 2-36V DC
DIP-switch setting (check on driver)			

	 IP20 1-10V		
Reference	**12409130**		
Dimensions (LxWxH)	135x30x20		
Input	100-240V 50/60Hz		
Ambient temperature	-30°C to +50°C		
Power factor (max)	0.85		
Dimming	1-10V (PWM)		
Max drivers on MCB 16A type B*	100		
Output	**350mA** / 8.4W 10-24V DC	**500mA** / 12W 10-24V DC	**700mA** / 12W 10-17V DC
DIP-switch setting (check on driver)			

Driver specs. - constant current

	 IP20 0/1-10V PUSH				
Reference	**12407730**				
Dimensions (LxWxH)	111x52x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	50				
Output	**250mA** / 13W 20-53V DC	**350mA** / 18W 15-50V DC	**500mA** / 20W 5-40V DC	**700mA** / 20W 3-29V DC	**900mA** / 20W 3-23V DC
DIP-switch setting (check on driver)					

	 IP20 0/1-10V PUSH				
Reference	**12408030**				
Dimensions (LxWxH)	111x52x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	50				
Output	**250mA** / 13W 20-53V DC	**350mA** / 18W 15-50V DC	**500mA** / 20W 5-40V DC	**700mA** / 20W 3-29V DC	**900mA** / 20W 3-23V DC
DIP-switch setting (check on driver)					

	 IP20 0/1-10V PUSH				
Reference	**12408230**				
Dimensions (LxWxH)	103x67x21				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (push dim: optional sync cable 12400100) (AM)				
Max drivers on MCB 16A type B*	15				
Output	**250mA** / 13W 15-53V DC	**350mA** / 18W 10-53V DC	**500mA** / 25W 2-50V DC	**700mA** / 32W 2-46V DC	**900mA** / 20W 2-22V DC
DIP-switch setting (check on driver)					

	 IP20 1-10V PUSH				
Reference	**12405430**				
Dimensions (LxWxH)	103x67x21				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (PWM)				
Max drivers on MCB 16A type B*	50				
Output	**250mA** / 13W 15-53V DC	**350mA** / 18W 10-53V DC	**500mA** / 25W 2-50V DC	**700mA** / 32W 2-46V DC	**900mA** / 20W 2-22V DC
DIP-switch setting (check on driver)					

***** FOR OTHER TYPES OF MCB, SEE TABLE PAGE 650

Driver specs. - constant current

	 IP20 1-10V				
Reference	**12407130**				
Dimensions (LxWxH)	146.5x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +40°C				
Power factor (max)	0.95				
Dimming	1-10V (AM)				
Max drivers on MCB 16A type B*	50				
Output	**350mA** / 1-18W 10-54V DC	**500mA** / 1-27W 10-54V DC	**700mA** / 1-36W 10-51V DC	**900mA** / 1-36W 10-40V DC	**1050mA** / 1-36W 10-35V DC
DIP-switch setting (check on driver)					

	 PR IP20 1-10V PUSH				
Reference	**12406630**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	15				
Output	**350mA** / 25W 2-74V DC	**500mA** / 35W 2-72V DC	**700mA** / 50W 2-72V DC	**900mA** / 60W 2-66V DC	**1050mA** / 60W 2-57V DC
DIP-switch setting (check on driver)					

	 PR IP20 1-10V PUSH				
Reference	**12406730**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	15				
Output	**350mA** / 25W 2-74V DC	**500mA** / 35W 2-72V DC	**700mA** / 50W 2-72V DC	**900mA** / 60W 2-66V DC	**1050mA** / 60W 2-57V DC
DIP-switch setting (check on driver)					

	 PR IP20 1-10V DALI PUSH				
Reference	**12406830**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/DALI/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	30				
Output	**350mA** / 25W 2-74V DC	**500mA** / 35W 2-72V DC	**700mA** / 50W 2-72V DC	**900mA** / 60W 2-66V DC	**1050mA** / 60W 2-57V DC
DIP-switch setting (check on driver)					

Driver specs. - constant current

	 PR IP20 0/1-10V DALI PUSH			
Reference	**12407830**			
Dimensions (LxWxH)	124x79x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	0/1-10V/PUSH/DALI (AM+PWM)			
Max drivers on MCB 16A type B*	30			
Output	**250mA** / 28W 20-112V DC	**350mA** / 39W 20-112V DC	**500mA** / 56W 2-112V DC	**700mA** / 60W 2-86V DC
DIP-switch setting (check on driver)				

	 IP20 DALI2			
Reference	**12409230**	**12409330**	**12409430**	**12409530**
Dimensions (LxWxH)	145x31x21	145x31x21	145x31x21	145x31x21
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C
Power factor (max)	0.94	0.94	0.94	0.94
Dimming	DALI2 (AM)	DALI2 (AM)	DALI2 (AM)	DALI2 (AM)
Max drivers on MCB 16A type B*	130	130	130	130
Output	**250mA** / 10W 5-42V DC	**350mA** / 10W 4-30V DC	**500mA** / 10W 10-20V DC	**700mA** / 10W 2.5-14V DC

	 IP20 1-10V DALI PUSH				
Reference	**12406530**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	DALI/1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	30				
Output	**350mA** / 25W 2-74V DC	**500mA** / 35W 2-72V DC	**700mA** / 50W 2-72V DC	**900mA** / 60W 2-66V DC	**1050mA** / 60W 2-57V DC
DIP-switch setting (check on driver)					

* FOR OTHER TYPES OF MCB, SEE TABLE PAGE 650

Driver specs. - constant current

	 PR IP20 1-10V DALI PUSH			
Reference	**12404030**			
Dimensions (LxWxH)	129x76x30			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100) (PWM)			
Max drivers on MCB 16A type B*	15			
Output	**1050mA** / 45W 1-44V DC	**1200mA** / 52W 1-44V DC	**1400mA** / 55W 1-39V DC	**1600mA** / 55W 1-35V DC
DIP-switch setting (check on driver)				

	 PR IP20 0/1-10V DALI2 PUSH			
Reference	**12408330**			
Dimensions (LxWxH)	124x79x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	0/1-10V/DALI2/PUSH (push dim: optional sync cable 12400100) (AM)			
Max drivers on MCB 16A type B*	15			
Output	**250mA** / 28W 20-112V DC	**350mA** / 39W 20-112V DC	**500mA** / 56W 2-112V DC	**700mA** / 60W 2-86V DC
DIP-switch setting (check on driver)				

	 IP20 DALI			
Reference	**12407630**			
Dimensions (LxWxH)	111x52x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +45°C			
Power factor (max)	0.92			
Dimming	DALI (AM+PWM)			
Max drivers on MCB 16A type B*	50			
Output	**250mA** / 20W 15-49V DC	**350mA** / 17W 2-49V DC	**500mA** / 20W 2-40V DC	**700mA** / 20W 2-28V DC
DIP-switch setting (check on driver)				

	 IP20 DALI2			
Reference	**12407930**			
Dimensions (LxWxH)	111x52x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +45°C			
Power factor (max)	0.92			
Dimming	DALI2 (AM)			
Max drivers on MCB 16A type B*	50			
Output	**250mA** / 20W 15-49V DC	**350mA** / 17W 2-49V DC	**500mA** / 20W 2-40V DC	**700mA** / 20W 2-28V DC
DIP-switch setting (check on driver)				

Driver specs. - constant current

	 IP20 DALI			
Reference	**12403230**			
Dimensions (LxWxH)	103x67x21			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.98			
Dimming	DALI (PWM)			
Max drivers on MCB 16A type B*	50			
Output	**250mA** / 12W 10-48V DC	**350mA** / 17W 5-48V DC	**500mA** / 24W 5-48V DC	**700mA** / 32W 3-46V DC
DIP-switch setting (check on driver)				

	 IP20 DALI2			
Reference	**12408130**			
Dimensions (LxWxH)	103x67x21			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	DALI2 (AM)			
Max drivers on MCB 16A type B*	50			
Output	**250mA** / 12W 10-48V DC	**350mA** / 17W 5-48V DC	**500mA** / 24W 5-48V DC	**700mA** / 32W 3-46V DC
DIP-switch setting (check on driver)				

	 IP20 DALI2				
Reference	**12405630**				
Dimensions (LxWxH)	146.5x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.9				
Dimming	DALI2 (AM)				
Max drivers on MCB 16A type B*	50				
Output	**350mA** / 1-18.5W 10-54V DC	**500mA** / 1-27W 10-54V DC	**700mA** / 1-38W 10-54V DC	**900mA** / 1-38W 10-43V DC	**1050mA** / 1-38W 10-36V DC
DIP-switch setting (check on driver)					

	 IP20 1-10V DALI PUSH				
Reference	**12404730**				
Dimensions (LxWxH)	169x83x35				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.98				
Dimming	DALI/1-10V/PUSH (PWM) (push dim: optional sync cable 12400100)				
Max drivers on MCB 16A type B*	30				
Output	**350mA** / 25W 1-71V DC	**500mA** / 35W 1-70V DC	**700mA** / 50W 1-70V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting (check on driver)					

* FOR OTHER TYPES OF MCB, SEE TABLE PAGE 650

Driver specs. - constant current

	 IP20 PUSH				
Reference	**13470030**				
Dimensions (LxWxH)	147x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.9				
Dimming	Casambi (AM)				
Max drivers on MCB 16A type B*	50				
Output	**350mA** / 18W 10-54V DC	**500mA** / 27W 10-54V DC	**700mA** / 38W 10-51V DC	**900mA** / 38W 10-42V DC	**1050mA** / 38W 10-36V DC
DIP-switch setting (check on driver)					

	 IP20 PUSH				
Reference	**13470130**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.92				
Dimming	Casambi (AM)				
Max drivers on MCB 16A type B*	30				
Output	**350mA** / 25W 2-74V DC	**500mA** / 35W 2-72V DC	**700mA** / 50W 2-72V DC	**900mA** / 60W 2-66V DC	**1050mA** / 60W 2-57V DC
DIP-switch setting (check on driver)					

Driver specs. - constant current | deep dim

	 IP20 DEEP							
	20W							
Reference	11631230	11630030	11630130	11630230	11631330	11630330	11630430	11630530
Dimensions (LxWxH)	160.5x42x31							
Input	198-264V 50/60Hz							
Ambient temperature	-20°C to +50°C							
Power factor (max)	>0.95							
Dim	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	0/1-10V (AM+PWM)	0/1-10V (AM+PWM)	0/1-10V (AM+PWM)	0/1-10V (AM+PWM)
Max drivers on MCB 16A type B*	106	106	106	106	106	106	106	106
Output voltage / Power range	250mA/20W 2-40V DC	350mA/20W 2-40V DC	500mA/20W 2-40V DC	700mA/20W 2-40V DC	250mA/20W 2-40V DC	350mA/20W 2-40V DC	500mA/20W 2-40V DC	700mA/20W 2-40V DC

! DRIVER WITH 2X LED OUTPUT	 IP20 DEEP					
	50W					
Reference	11630630	11630730	11630830	11630930	11631030	11631130
Dimensions (LxWxH)	153x76.2x30.1					
Input	120-255V 50/60Hz					
Ambient temperature	-20°C to +50°C					
Power factor (max)	>0.9					
Dim	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	0/1-10V (AM+PWM)	0/1-10V (AM+PWM)	0/1-10V (AM+PWM)
Max drivers on MCB 16A type B*	22	22	22	22	22	22
Output voltage / Power range	350mA/50W 1.5-55V DC	500mA/50W 1.5-55V DC	700mA/50W 1.5-55V DC	350mA/50W 1.5-55V DC	500mA/50W 1.5-55V DC	700mA/50W 1.5-55V DC

CONVERSION TABLE FOR MAX. QUANTITIES OF DRIVERS ON OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	MAX. CURRENT	RELATIVE NUMBER OF DRIVERS
B	25A	156%
B	20A	125%
B	16A	100%
B	10A	63%
C	25A	260%
C	20A	208%
C	16A	170%
C	10A	104%

Driver specs. - constant voltage 48V

				
Reference	**12407530**	**12408430**	**13550730**	**13550630**
Dimensions (LxWxH)	125x63.5x123.6	125x83x126	240x60x49	225x60x36
Input	90-264V 50/60Hz	90-264V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +45°C	-40°C to +45°C
Power factor (max)	0.70	0.70	0.98	0.97
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	8	8	8	15
Output voltage / Power range	48V / 0-120W (DIN RAIL)	48V / 0-240W (DIN RAIL)	48V / 50-150W	48V / 0-70W

				
Reference	**12408730**	**13550230**	**12408630**	**13550330**
Dimensions (LxWxH)	180x52x30	350x30x18	300x40x30	350x30x18
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-15°C to +45°C	-25°C to +45°C	-15°C to +45°C	-25°C to +45°C
Power factor (max)	0.95	0.95	0.95	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	15	10	15	8
Output voltage / Power range	48V / 0-75W	48V / 0-100W	48V / 0-120W	48V / 0-150W

		
Reference	**12408930**	**12409030**
Dimensions (LxWxH)	244x68x39	252x90x44
Input	90-305V 50/60Hz	90-305V 50/60Hz
Ambient temperature	-40°C to +90°C	-40°C to +90°C
Power factor (max)	0.95	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	2	1
Output voltage / Power range	48V / 0-240W	48V / 0-320W

Driver specs. - constant voltage 24V

	 IP20	 IP66	 IP20
Reference	**12405830**	**12401830**	**12405930**
Dimensions (LxWxH)	146x55x19	241x43x30	300x40x30
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-30°C to +60°C	-25°C to +45°C
Power factor (max)	0.55	0.97	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	27	6	11
Output voltage / Power range	24V / 0-20W	24V / 0-100W	24V / 0-120W

	 IP20	 1-10V IP20	 1-10V IP67
Reference	**12405030**	**12402030**	**12402130**
Dimensions (LxWxH)	240x60x49	146x55x19	250x50x34
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-40°C to +45°C	-25°C to +50°C	-25°C to +55°C
Power factor (max)	0.97	0.95	0.9
Dim	NOT DIMMABLE	1-10V	1-10V
Max drivers on MCB 16A type B*	8	27	10
Output voltage / Power range	24V / 0-150W	24V / 0-25W	24V / 28-80W

	 1-10V IP67
Reference	**12402230**
Dimensions (LxWxH)	250x60x39
Input	220-240V 50/60Hz
Ambient temperature	-25°C to +55°C
Power factor (max)	0.9
Dim	1-10V
Max drivers on MCB 16A type B*	10
Output voltage / Power range	24V / 60-120W

	 PUSH IP20	 1-10V PUSH IP20
Reference	**12406030**	**12406130**
Dimensions (LxWxH)	166x46x34	240x60x49
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-25°C to +50°C
Power factor (max)	0.6	0.98
Dim	PUSHDIM	1-10V / PUSHDIM
Max drivers on MCB 16A type B*	27	8
Output voltage / Power range	24V / 0-22W	24V / 0-120W

***** FOR OTHER TYPES OF MCB, SEE TABLE PAGE 650

		
Reference	**12403930**	**12405230**
Dimensions (LxWxH)	110x52x20	295x43x30
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.92	0.93
Dim	DALI	PUSHDIM / DALI / DSI
Max drivers on MCB 16A type B*	50	9
Output voltage / Power range	24V / 0-16W	24V / 0-100W
DIP-switch setting (check on driver)		

Reference	**12406430**
Dimensions (LxWxH)	325x43x30
Input	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C
Power factor (max)	0.94
Dim	PUSHDIM / DALI / DSI
Max drivers on MCB 16A type B*	6
Output voltage / Power range	24V / 0-150W

Back-up unit (1 hour - 3 hours)

	 IP20	 IP20
Reference	**12400010**	**12400110**
Dimensions (LxWxH)	unit 166x46x34 / battery pack 135x45x23	unit 166x46x34 / 2x battery pack 212x40x33
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	0°C to 50°C	0°C to 50°C
Emergency operating time	1 hour	3 hours
Charge time	24 hours	24 hours
Output	100-400mA 9-58V	100-400mA 9-58V
DIP-switch setting		

Wiring diagrams

Non-maintained (emergency only)

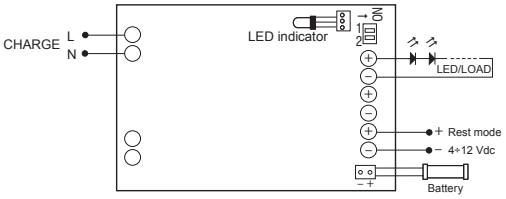

Maintained with external electronic driver

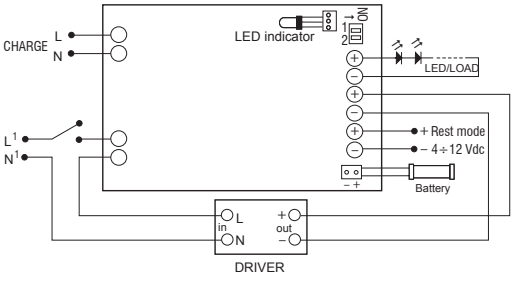

Remarks

- Respect polarity for installation of battery and LED luminaire.
- Keep batteries away from heat source.
- Do not connect any external battery charger!
- In order to check the correct functionality, we recommend a charging time of about 30 hours.
- It is advisable to effect every 3 months at least one discharge and charge cycle in order to assure the maximum efficiency.
- Replace the batteries every 4 years or after 500 charge/discharge cycles.
- Please check wire diagrams before installing.

	Typical drive current	Emergency light output compared to light output at typical current
Chapeau 206 LED GE	350mA	50%
Dent large LED GE	350mA	30%
Dent medium LED GE	350mA	30%
Dent small LED GE	350mA	75%
Duell recessed 1x LED GE	500mA	72%
Duell recessed 2x LED GE	500mA	72%
Extruded suspended LED GE	500mA	75%
Extruded suspended warm dim LED GE	350mA	100%
Hipy 110 IP67 LED GE	500mA	72%
Hipy 70 IP67 LED GE	350mA	100%
Hollow 115 Trimless LED GE	500mA	72%
Hollow 125 LED GE	500mA	72%
Julien IP54 LED GE	500mA	100%
K120 adjustable LED GE	500mA	36%
K72 IP54 LED GE	500mA	72%
K77 adjustable LED GE	500mA	72%
Lotis 82 (concrete) LED GE	500mA	72%
Lotis 86 IP55 LED GE	500mA	72%
Lotis 97 (concrete) adjustable LED GE	500mA	72%
Lotis square (IP55) LED GE	500mA	72%
Marbul recessed 1x LED GE	500mA	72%
Marbul recessed warm dim 1x LED GE	350mA	51%
Marbul recessed 2x LED GE	500mA	72%
Marbul recessed warm dim 2x LED GE	350mA	51%
Marbul suspension (adjustable) LED GE	500mA	72%
Marbul suspension (adjustable) warm dim LED GE	350mA	51%
Marbulito jack LED GE	500mA	75%
Marbulito suspension jack LED GE	500mA	75%
Marcel 1x LED GE	500mA	36%
Marcel 2x LED GE	500mA	36%
Marcel 3x LED GE	500mA	36%
Médard 42 jack LED GE	700mA	50%
Médard 42 jack warm dim LED GE	350mA	100%
Médard 42 recessed LED GE	500mA	75%
Médard 42 recessed warm dim LED GE	350mA	100%
Médard 42 semi-recessed LED GE	700mA	50%
Médard 42 semi-recessed warm dim LED GE	350mA	100%
Médard 70 recessed LED GE	500mA	72%
Médard 70 recessed WarmDim LED GE	350mA	51%
Médard 70 semi-recessed LED GE	500mA	38%
Médard 70 semi-recessed warm dim LED GE	350mA	51%
Médard 70 stretched semi-recessed 1X LED GE	500mA	38%
Médard 70 stretched semi-recessed warm dim 1X LED GE	350mA	51%
Médard 70 stretched semi-recessed 2X LED GE	500mA	38%
Médard 70 stretched semi-recessed warm dim 2X LED GE	350mA	51%
Mini-multiple 1x LED GE	500mA	72%
Mini-multiple 2x LED GE	500mA	72%
Mini-multiple 3x LED GE	500mA	72%
Mini-multiple 4x LED GE	500mA	72%

	Typical drive current	Emergency light output compared to light output at typical current
Minude 45 adjustable jack LED GE	500mA	72%
Minude 45 adjustable semi-recessed LED GE	500mA	72%
Minude 45 suspension LED GE	500mA	72%
Minude 45 suspension jack LED GE	500mA	72%
M-LED 50 GE	500mA	72%
M-LED 50 warm dim GE	350mA	100%
M-LED 70 GE	500mA	72%
M-LED 70 warm dim GE	350mA	100%
M-LED 111 GE	500mA	38%
Nomad 111 2x LED GE	500mA	38%
Nomad 111 4x LED GE	500mA	38%
Nomad 2x LED AR 111	500mA	33%
Nomad 4x LED AR 111	1000mA	17%
Placebo up/down LED GE	350mA	100%
Placebo up/down LED warm dim GE	350mA	100%
Pupil LED GE	700mA	54%
Pupil warm dim LED GE	350mA	100%
Qbini fix/adjustable/asy 1x LED GE	500mA	75%
Qbini fix/adjustable/asy 2x LED GE	500mA	75%
Qbini fix/adjustable/asy 3x LED GE	500mA	50%
Qbini fix/adjustable/asy 4x LED GE	500mA	35%
Qbini fix/adjustable/asy trimless 1x LED GE	500mA	75%
Qbini fix/adjustable/asy trimless 2x LED GE	500mA	75%
Qbini fix/adjustable/asy trimless 3x LED GE	500mA	50%
Qbini fix/adjustable/asy trimless 4x LED GE	500mA	35%
Qbini general 2X LED GE	500mA	100%
Qbini general 4X LED GE	500mA	55%
Rektor recessed LED GE	500mA	35%
Rektor recessed warm dim LED GE	350mA	51%
Scotty 270 LED GE	500mA	29%
Shellby 176 trimless LED GE	500mA	72%
Shellby 176 trimless warm dim GE	350mA	51%
Shellby 184 trimless LED GE	500mA	72%
Shellby 184 trimless warm dim GE	350mA	51%
Slide IP54 LED GE	500mA	72%
Smart Cake / Kup / Lotis / (asy) 48 (IP54) LED GE	500mA	75%
Smart Cake / Kup / Lotis /+ (asy) 48 (IP54) LED GE	500mA	75%
Smart Cake / Kup / Lotis 082 (IP54) LED GE	500mA	72%
Smart Cake / Kup / Lotis 082 adjustable LED GE	500mA	72%
Smart Cake / Kup / Lotis 082 (IP54) (adjustable) WarmDim LED GE	350mA	100%
Smart Cake / Kup / Lotis 115 (diffuse) (IP54) LED GE	500mA	35%
Smart Cake / Kup / Lotis 115 adjustable LED GE	500mA	72%
Smart Cake / Kup / Lotis 115 adjustable warm dim LED GE	350mA	51%
Smart Cake/ Kup / Lotis 160 (diffuse) (IP54) LED GE	900mA	25%
Stove LED GE	350mA	50%
Tetrix LED GE frame round	500mA	75%
Tetrix LED GE trimless	500mA	75%
Thimble 70 trimless (adjustable) LED GE	500mA	72%
Thimble 74 (adjustable) LED GE	500mA	72%
Wink 82 LED GE	500mA	72%
Wink 115 LED GE	500mA	35%

UNIT DOES NOT FIT THROUGH CUTOUT HOLE OF FIXTURE

DEPENDING MOUNTING ACCESSORY UNIT MAY NOT FIT THROUGH CUTOUT HOLE

* WHEN USING ONLY ONE LAMP UNIT PER EMERGENCY UNIT

** MINIMUM 4 LUMINAIRES IN SERIES

Wiring diagrams

MAINS

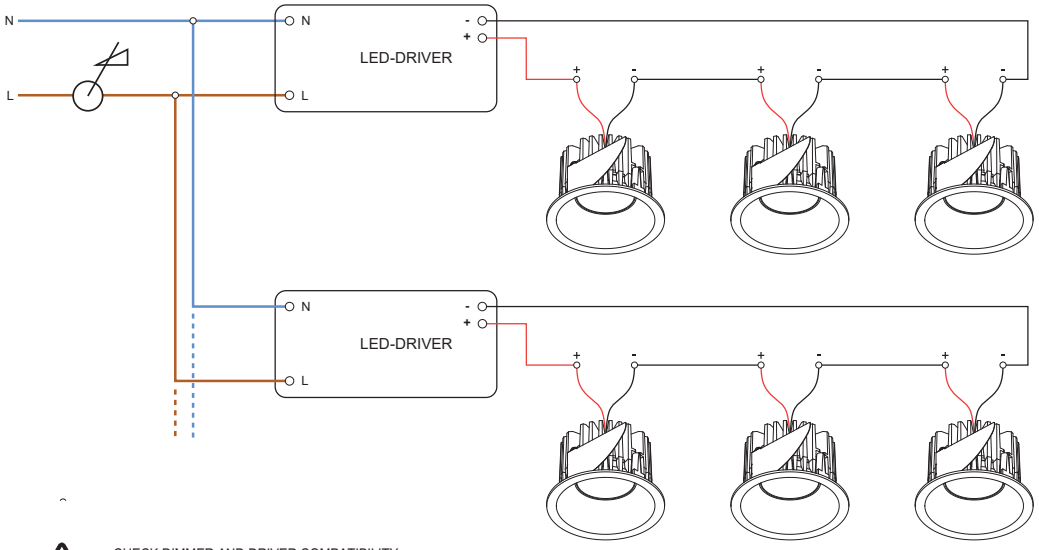

- CHECK DIMMER AND DRIVER COMPATIBILITY
- USE A TRAILING EDGE DIMMER FOR OPTIMAL DIMMING PERFORMANCE

1-10V

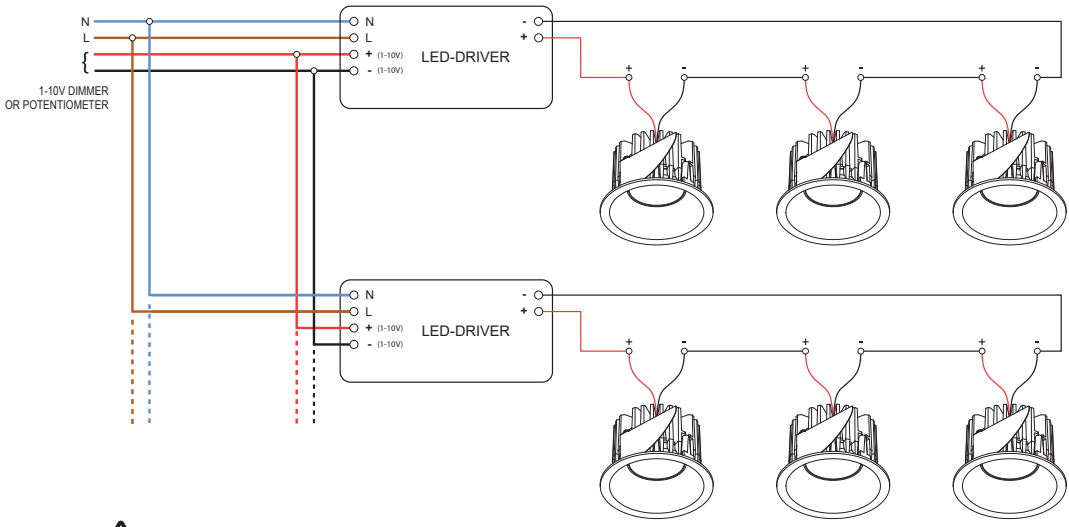

ALWAYS RESPECT POLARITY OF 1-10V SIGNAL

DALI

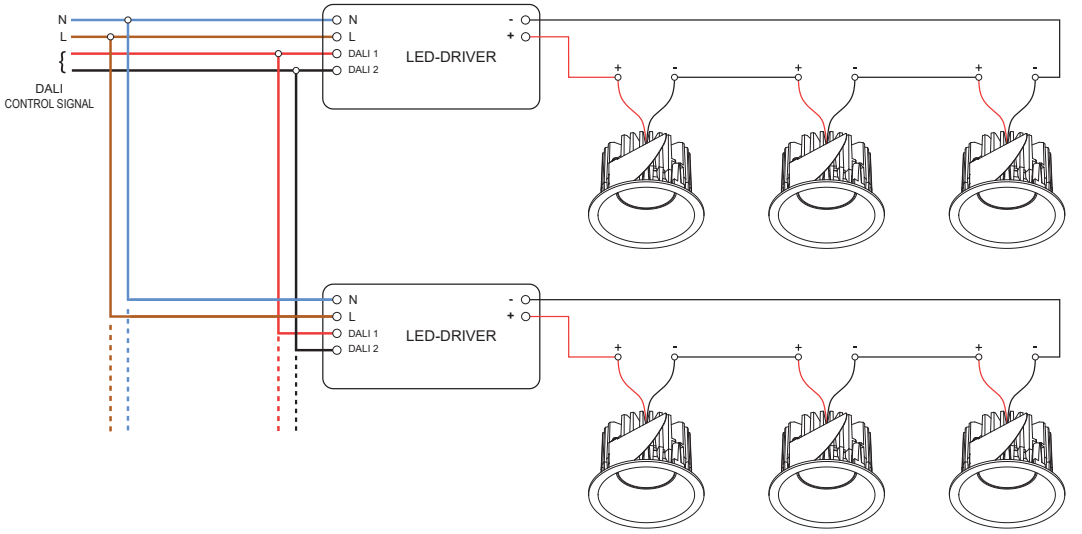

LED DRIVER WITH 1X LED OUTPUT / 2X LED OUTPUT

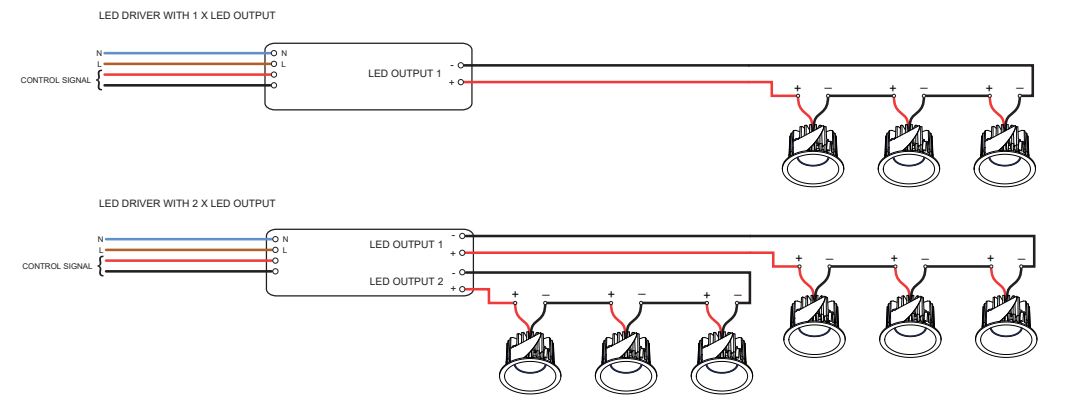

Wiring diagrams

PUSHDIM - SINGLE DIM CHANNEL

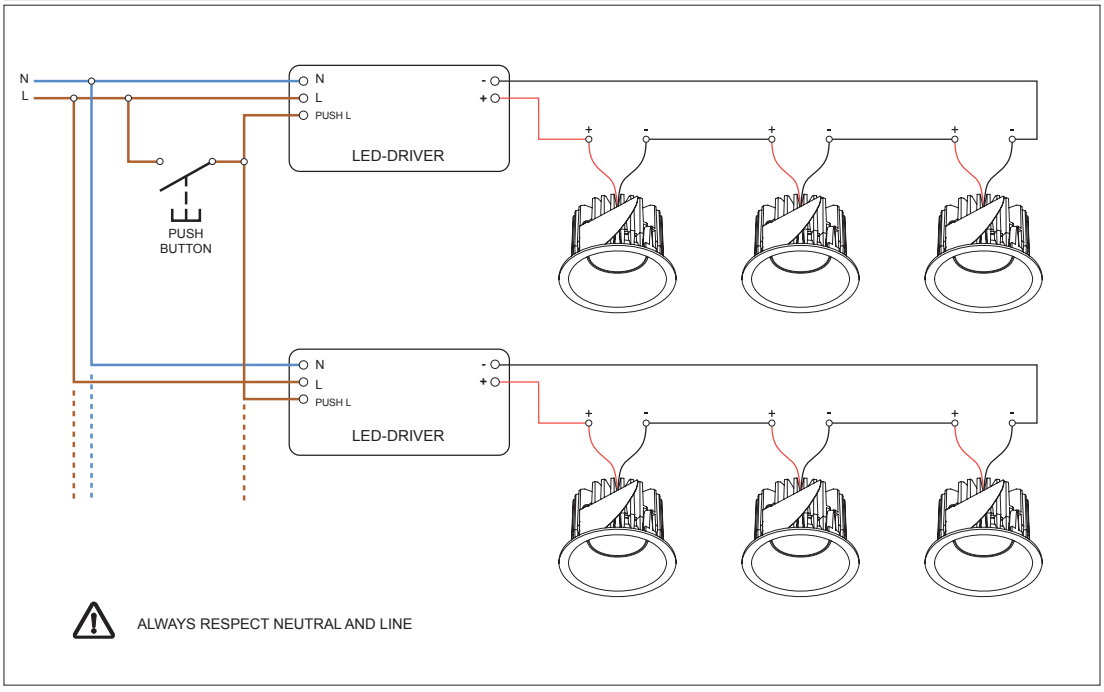

PUSHDIM - DOUBLE DIM CHANNEL

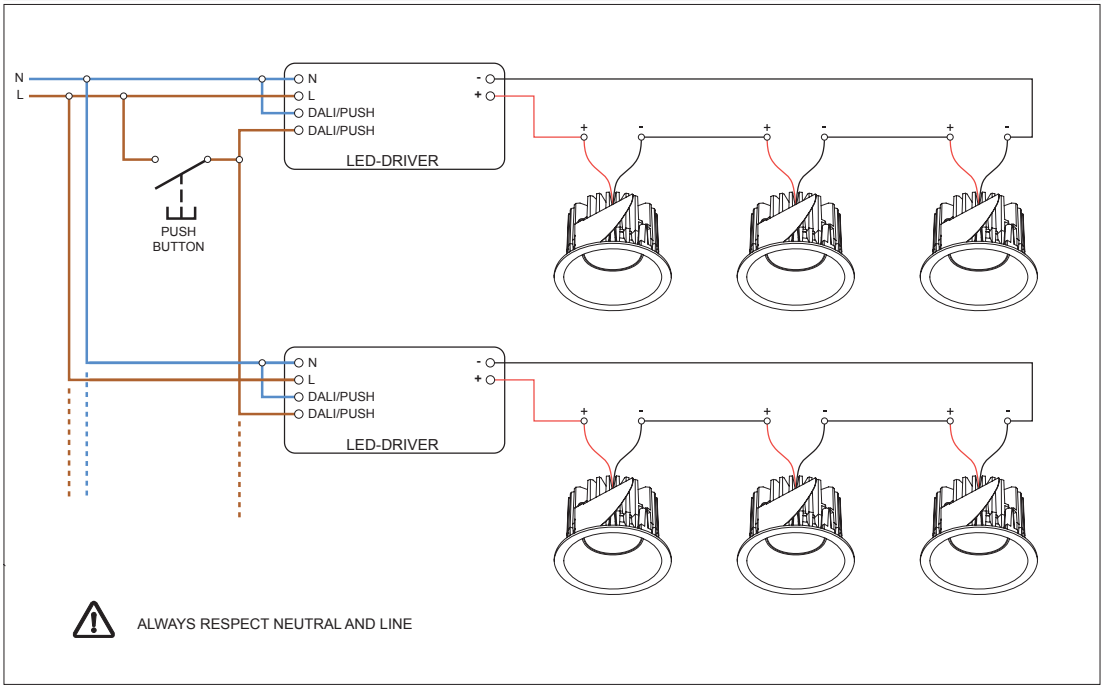

PUSHDIM - MASTER SLAVE WITH SYNCHRONISATION CABLE

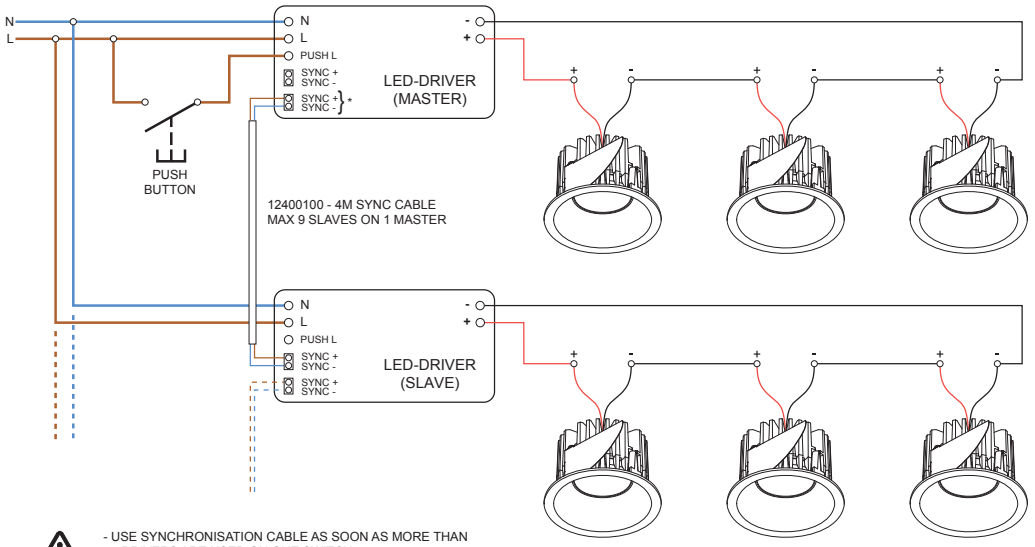

- USE SYNCHRONISATION CABLE AS SOON AS MORE THAN 4 DRIVERS ARE USED ON ONE SWITCH
- ALWAYS RESPECT NEUTRAL AND LINE
- DO NOT CONNECT 'PUSH L' ON SLAVE DRIVER(S)
- TOTAL PUSH DIM CABLE LENGTH MAX. 15 METER

* ALWAYS USE SECOND SYNC CLAMP ON MASTER AS SHOWN ON DIAGRAM

Wiring diagrams - Pista track 48V

HUE 1-10V

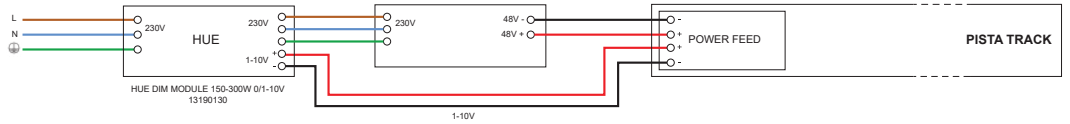

MAX. 8 PISTA LUMINAIRES OR 300V ON A SINGLE HUE 1-10V MODULE

1-10V

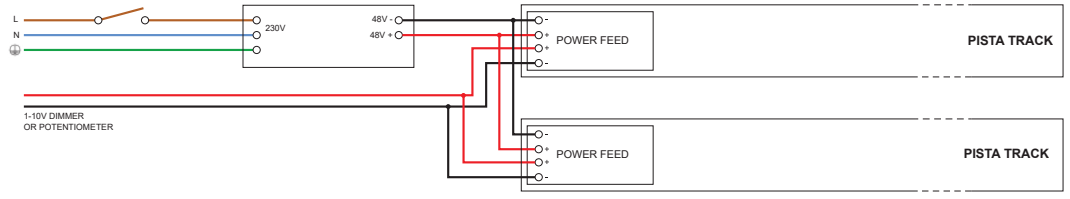

ALWAYS RESPECT POLARITY OF 1-10V SIGNAL

DALI

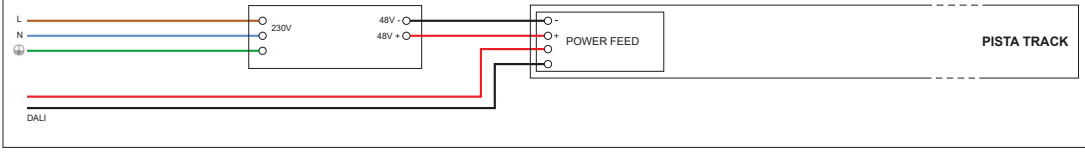

CASAMBI DALI REMOTE DIM

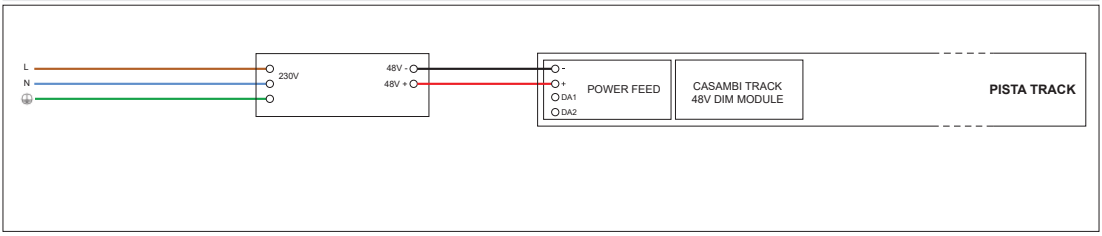

Photo credits

Studio photography by
BOA

Campaign photography by
Jan Opdekamp

Campaign ‘reportage’ photography by
Thomas Sweertvaegher

My Modular - my.supermodular.com

My Modular is a single sign-on digital platform, offering easy access to Modular's image library, profile configurator and to a large variety of product information.

To enjoy the benefits of My Modular, go to my.supermodular.com and complete your registration.

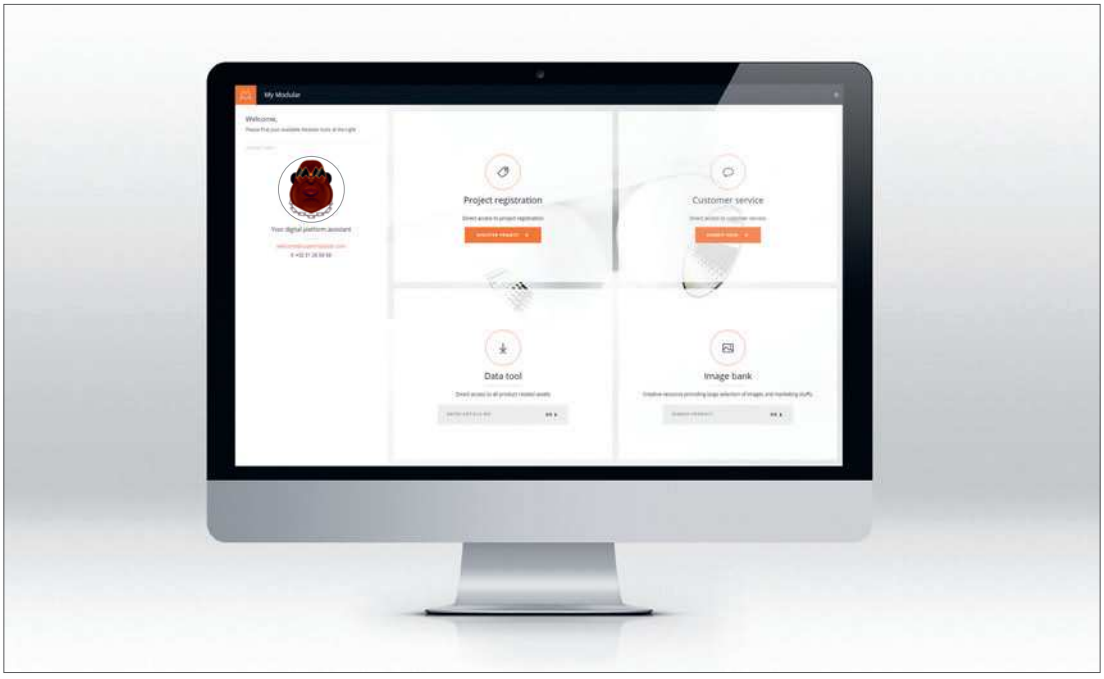

MODULAR LIGHTING INSTRUMENTS — HEADQUARTERS

Armoedestraat 71
8800 Roeselare
Belgium
t +32 51 26 56 56
welcome@supermodular.com – www.supermodular.com

SALES NETWORK

For an updated list please visit **www.supermodular.com/en/company/dealers**

LEGEND

ceiling application
surface / suspended / recessed

wall application
surface / recessed

floor application
surface / recessed

weight in kg

cutout size round / square

adjustability

dimmable / not dimmable

universally dimmable

trailing edge dimmable

leading edge dimmable

resistive load dimmable

fixture class 1

fixture class 2

fixture class 3

wall mounting

ceiling mounting

floor mounting

ceiling + wall mounting

floor + wall mounting

IP67 — protection level

GWT — glow wire test

GE — gear excluded

GI — gear included

RG — remote gear included

connected lighting compatible
info.supermodular.com/en/connected-lighting

connected lighting compatible
info.supermodular.com/en/connected-lighting

OUTLET — contact our customer service for discounted pricing and stock availability

© 2022 Modular Lighting Instruments - all rights reserved (edition 02/2022)

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice.
Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the workbook and the legend.
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Modular L.I.
You can obtain a copy of these conditions on demand.

For latest information and specifications of the full Modular L.I. range visit **www.supermodular.com**

NOTES

Get inspired. Follow us.

@SUPERMODULAR

We love to share our love for light and beauty.
Join us on Instagram or Pinterest and stay inspired.

MODULAR
LIGHTING —
INSTRUMENTS

www.supermodular.com