



[trizo]<sup>21</sup>®

---

Handmade in Belgium

TRIZO21 TRANSLATES LIGHT INTO SHAPES

TO CREATE AN ATMOSPHERE, A CONCEPT, A PROJECT, A...

AUSTERE-  
CHANDELIER p.6



AUSTERE-  
ELEMENTS p.12



AUSTERE-T p.18



AUSTERE-W p.26



CODE p.34



CODE WALL p.34



IZOR SU p.40



IZOR W/C p.40



LIPPS W/C p.44



MINI-PI IN p.46



AUSTERE-F p.18



AUSTERE-S p.22



BOULY p.28



BY-O p.32



CRI-ATE SU p.38



CRI-ATE W/C p.38



KY-O p.42



LIPPS SU p.44



MINI-PI UP p.50



NAGA p.52



I-TRO

p.54



N-TRO

p.56



R RANGE IN

p.64



R RANGE UP

p.74



SCAR-LITE

p.92



SIRENS SU

p.96



TIZOR W/C

p.100



WY-O

p.102



PIN-IN

p.58



PIN-UP

p.62



SCAR-LED

p.84



SCAR-LED  
TABLE

p.90



SIRENS W/C

p.96



TIZOR SU

p.100





**AUSTERE**-CHANDELIER 2YV6 5503

# AUSTERE - CHANDELIER

---

Hans Verstuyft



## **AUSTERE**-CHANDELIER 1YV3 2003

---

CE  IP40 

3 x LED array (included) 6,2W  
warm white : 2700K - 3 x 490lm - CRI >90

more information see: [www.trizo21.com](http://www.trizo21.com)







**AUSTERE-CHANDELIER 1XV4 7003**



**AUSTERE-CHANDELIER 3YV9 2773**



**AUSTERE-CHANDELIER 1XV4 7003**

# AUSTERE - ELEMENTS

---

Hans Verstuylt



## AUSTERE-ELEMENTS

---


CE  IP40  eco

LED array (included) 6,2W per light element  
warm white : 2700K - 490lm - CRI >90

more information see: [www.trizo21.com](http://www.trizo21.com)





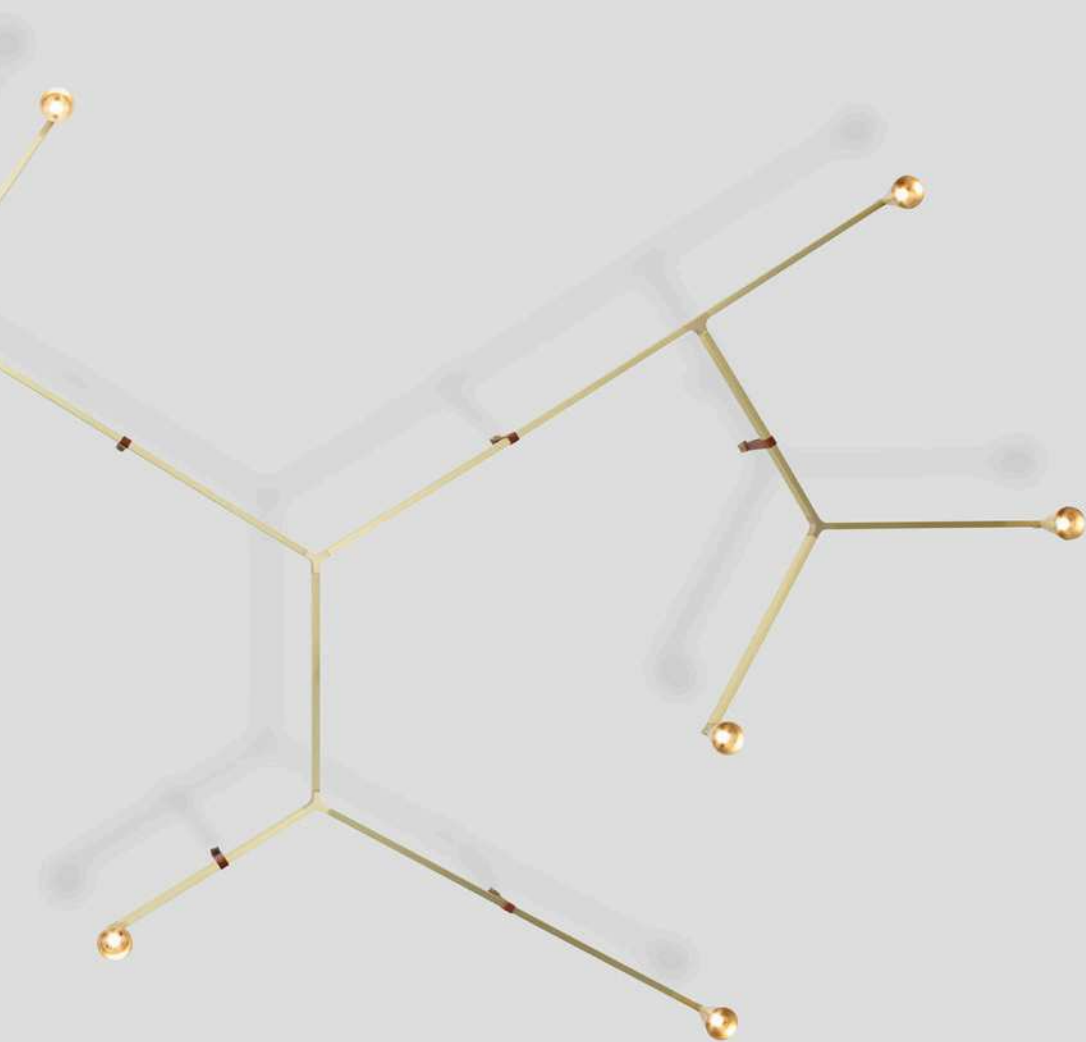





**AUSTERE-ELEMENTS**



**AUSTERE-ELEMENTS**

# AUSTERE



Hans Verstuyft



## AUSTERE-F

CE IP40 eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90



## AUSTERE-T

CE IP40 eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90





**AUSTERE-F**




**AUSTERE-T**



Kitchen - Multiform  
Photo - Joachim Wichmann  
Stylist - Birgit Tarp

# AUSTERE


Hans Verstuyft

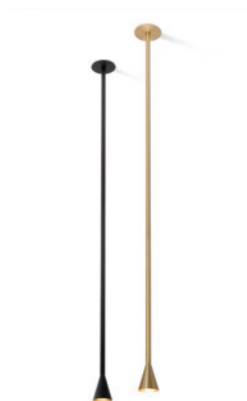

## **AUSTERE-S** 1000 built-in



350mA - driver excluded  
1 x LED array (included) 6,2W  
warm white : 2700K - 490lm - CRI >90  
available for false and concrete ceiling  
IP44 on demand

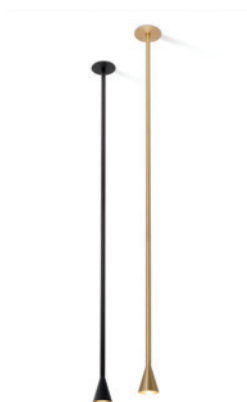

## **AUSTERE-SD** 1000 built-in



230V - driver included (to build in, not dimmable)  
1 x LED array (included) 6,2W - 350mA  
warm white : 2700K - 490lm - CRI >90  
available for false and concrete ceiling  
IP44 on demand



# AUSTERE

Hans Verstuyft



## **AUSTERE-S 1000 + CABLE built-in**



350mA - driver excluded  
1 x LED array (included) 6,2W  
warm white : 2700K - 490lm - CRI >90  
available for false and concrete ceiling  
IP44 on demand



## **AUSTERE-SD 1000 + CABLE built-in**



230V - driver included (to build in, not dimmable)  
1 x LED array (included) 6,2W - 350mA  
warm white : 2700K - 490lm - CRI >90  
available for false and concrete ceiling  
IP44 on demand



**AUSTERE-S 1000 + CABLE built-in / MINI-PI 1 IN / BOULY 16 built-in**



# AUSTERE

---

Hans Verstuylt



## **AUSTERE-W**

---

CE  IP40  eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90

# BOULY

---

Bruno Van Meenen



## **BOULY 16D SILVER**



230V - driver included (to build in, not dimmable)  
1 x LED array (included) 11W  
warm white : 2700K - 1035lm - CRI >90  
available for false and concrete ceiling



## **BOULY 16D GOLD**



230V - driver included (to build in, not dimmable)  
1 x LED array (included) 11W  
warm white : 2700K - 1035lm - CRI >90  
available for false and concrete ceiling



## **BOULY 4D**



230V - driver included (to build in, not dimmable)  
4 x power LED (included) 1.2W  
cold white : 6000K - 440lm - CRI >75  
warm white : 2850K - 360lm - CRI >93  
available for false and concrete ceiling





# BOULY OUTDOOR

---

Bruno Van Meenen



## **BOULY 16D OUT SILVER**



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



## **BOULY 16D OUT GOLD**



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



## **BOULY 4D OUT**



230V - driver included (to build in, not dimmable)

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93

available for false and concrete ceiling





## **BY-O** 24 DME

CE  IP30 

230V - driver included (not dimmable)

24 x SMD LED (included), 6,2W

warm white : 2850K - 460lm - CRI >90



## **BY-O** 48 GL

CE  IP50 

24Vdc - driver excluded

48 x SMD LED (included), 12W

warm white : 2850K - 920lm - CRI >90



## **BY-O** 60 DGL

CE  IP50 

230V - driver included (not dimmable)

60 x SMD LED (included), 15W

warm white : 2850K - 1140lm - CRI >90



**BY-O** 48 DGL



# CODE

---

Bruno Van Meenen



## **CODE 1 IN**

CE  IP20

230V - GU10 - 1 x QPAR16 max. 35W or LED

12V - GU5.3 - transformer excluded

1 x QR-CBC51 (alu reflector) max. 35W



## **CODE 2 OUT**

CE  IP55

230V - GU10 - 2 x QPAR16 max. 35W or LED

12V - GU5.3 - transformer excluded

2 x QR-CBC51 (alu reflector) max. 35W



## **CODE WALL IN**

CE  IP40

230V - G9 - 1 x QT14 max. 60W

12V - GY6.35 - transformer excluded

1 x QT12 max. 50W

# CODE LED

---

Bruno Van Meenen



## **CODE 1 IN LED**

CE  IP40 

230V - driver included

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93



## **CODE 2 IN LED**

CE  IP40 

230V - driver included

8 x power LED (included) 1.2W

cold white : 6000K - 880lm - CRI >75

warm white : 2850K - 720lm - CRI >93



## **CODE WALL OUT LED**

CE  IP55 

350mA - driver excluded

1 lighting side : 4 x power LED (included) 1.2W

2 lighting sides : 8 x power LED (included) 1.2W

cold white : 6000K - 440lm/880lm - CRI >75

warm white : 2850K - 360lm/720lm - CRI >93






**CRI-ATE GT-H / R51 UP LED**

# CRI-ATE

---

Bruno Van Meenen



## **CRI-ATE** 122 GT2-H

CE  IP20  eco

230V - gear included

G5 - 2 x T5 28W/54W

transformer included

G53 - 2 x QR111 max. 50W or R111 LED



## **CRI-ATE** GT1-W/C

CE  IP40  eco

230V - G5 - gear included - 2 x T5

G53 - transformer included

1 x QR111 max. 50W or LED





## IZOR 14 GT3-H

CE IP20 

230V - gear included

2G11 - 1 x TC-L 24W

transformer included

G53 - 2 x QR111 max. 50W or R111 LED



## IZOR 42 GT-W/C

CE IP20 

230V - gear included

2G11 - 3 x TC-L 24W

transformer included

G53 - 3 x QR111 max. 50W or R111 LED



**IZOR** GT-WC





## KY-O 30 GL

CE IP50 eco

24Vdc - driver excluded

30 x SMD LED (included), 7.5W

warm white : 2850K - 570lm - CRI >90



## KY-O 60 ME

CE IP30 eco

24Vdc - driver excluded

60 x SMD LED (included), 15W

warm white : 2850K - 1140lm - CRI >90



## LIPPS SU



230V - dimmable driver included (1-10V or pushdim or TRIAC)  
 Ø 200 - LED array (included) 6,2W - 1 x 500lm - 700mA  
 Ø 300 - LED array (included) 9W - 3 x 250lm - 350mA  
 Ø 600 - LED array (included) 36,2W - 8 x 375lm - 500mA  
 warm white : 2700K - CRI >90



## LIPPS W/C



230V - dimmable driver included (1-10V or pushdim or TRIAC)  
 Ø 200 - LED array (included) 6,2W - 1 x 500lm - 700mA  
 Ø 300 - LED array (included) 9W - 3 x 250lm - 350mA  
 Ø 600 - LED array (included) 36,2W - 8 x 375lm - 500mA  
 warm white : 2700K - CRI >90



# MINI-PI

---

Bruno Van Meenen



## MINI-PI 1 IN



350mA - driver excluded

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93



## MINI-PI 2 IN



350mA - driver excluded

8 x power LED (included) 1.2W

cold white : 6000K - 880lm - CRI >75

warm white : 2850K - 720lm - CRI >93




**MINI-PI 1 IN**





**MINI-PI** T IN

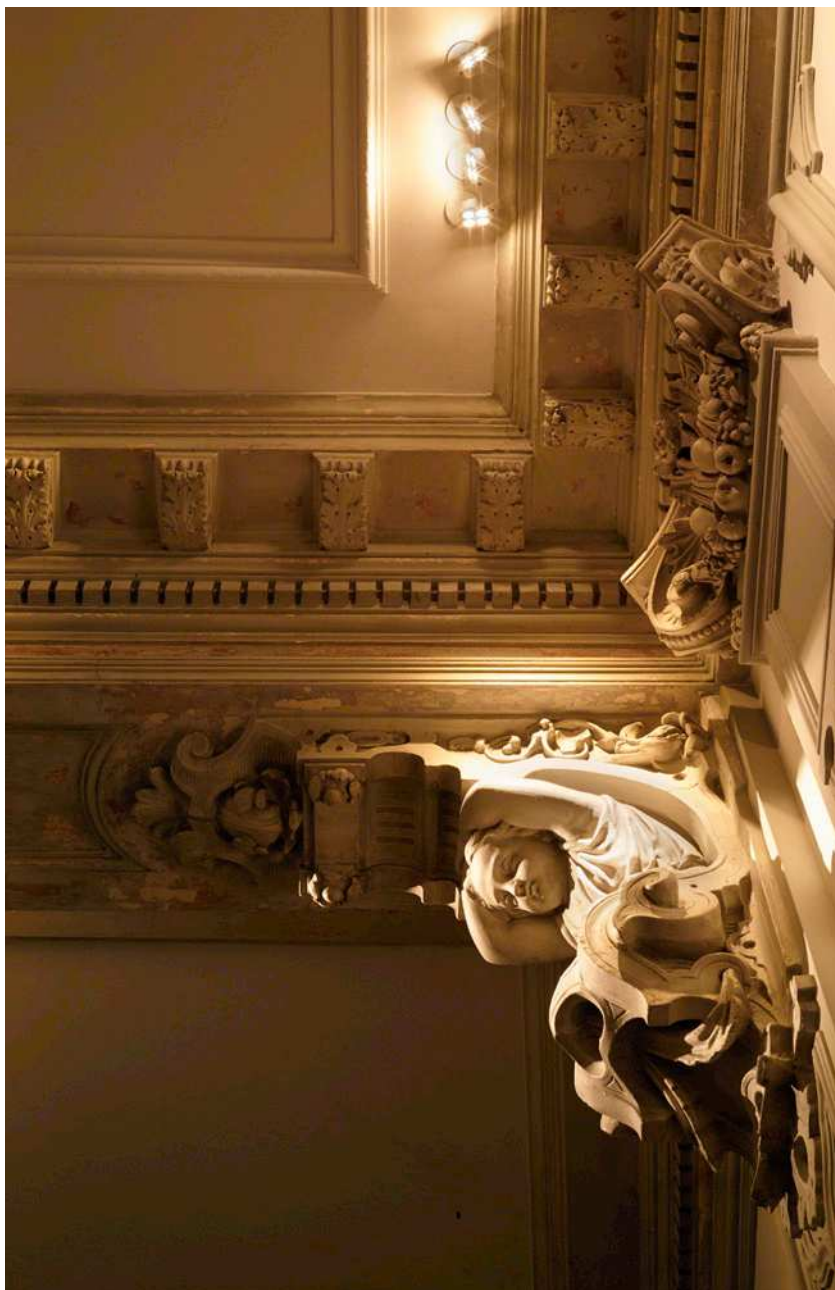

MINI-PI 1 IN



# MINI-PI

---

Bruno Van Meenen



## **MINI-PI 1 UP**

CE  IP40 

230V - driver included (not dimmable)

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93



## **MINI-PI 2 UP**

CE  IP40 

230V - driver included (not dimmable)

8 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93

# NAGA

---

Bruno Van Meenen



## **NAGA**

---

CE  IP20  eco

230V - GU10 LED






# I-TRO

---

Bruno Van Meenen

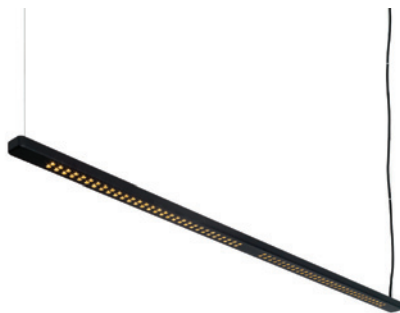

## **I-TRO** D+B

---



100-240V - driver included (dimmable 1-10V)

1 lighting side : 120 x SMD LED (included) - 2280lm - 30W

2 lighting sides : 240 x SMD LED (included) - 4560lm - 60W

warm white : 2850K - CRI >90





# N-TRO

---

Bruno Van Meenen



## **N-TRO** D+B

---

CE  IP30 

100-240V - driver included (dimnable 1-10V)

240 x SMD LED (included), 60W

warm white : 2850K - 4560lm - CRI >90

# PIN-IN

---

Bruno Van Meenen



## **PIN-IN 1**

---

CE  IP20

12V - G53 - transformer excluded

1 x QR111 max. 75W or LED



## **PIN-IN 2**

---

CE  IP20

12V - G53 - transformer excluded

2 x QR111 max. 75W or LED











# PIN-UP

---

Bruno Van Meenen



## **PIN-UP 1 ROUND**

---

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED



## **PIN-UP 1 SQUARE**

---

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED



## **PIN-UP 2**

---

CE  IP20

230V - G53 - transformer included

2 x QR111 max. 50W or LED



# R RANGE IN

---

Bruno Van Meenen



## R51 IN

CE   IP20

230V - GU10 - 1 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer excluded

1 x QR-CBC51 (alu reflector) max. 50W or LED



## R52 IN

CE   IP20

230V - GU10 - 2 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer excluded

2 x QR-CBC51 (alu reflector) max. 50W or LED



## R54 IN

CE   IP20

230V - GU10 - 4 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer excluded

4 x QR-CBC51 (alu reflector) max. 50W or LED





**R54** IN



**R51 IN / R52 IN**



# R RANGE IN LED

---

Bruno Van Meenen



## R51 IN LED

---



350mA - driver excluded

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93



## R52 IN LED

---



350mA - driver excluded

8 x power LED (included) 1.2W

cold white : 6000K - 880lm - CRI >75

warm white : 2850K - 720lm - CRI >93



## R54 IN LED

---



350mA - driver excluded

16 x power LED (included) 1.2W

cold white : 6000K - 1760lm - CRI >75

warm white : 2850K - 1440lm - CRI >93

# R RANGE IN

---

Bruno Van Meenen



## **R07** IN

CE  IP20

12V - BA15d - transformer excluded

1 x QR70 max. 50W or LED




## **R70** IN

CE  IP20

12V - BA15d - transformer excluded

2 x QR70 max. 50W or LED

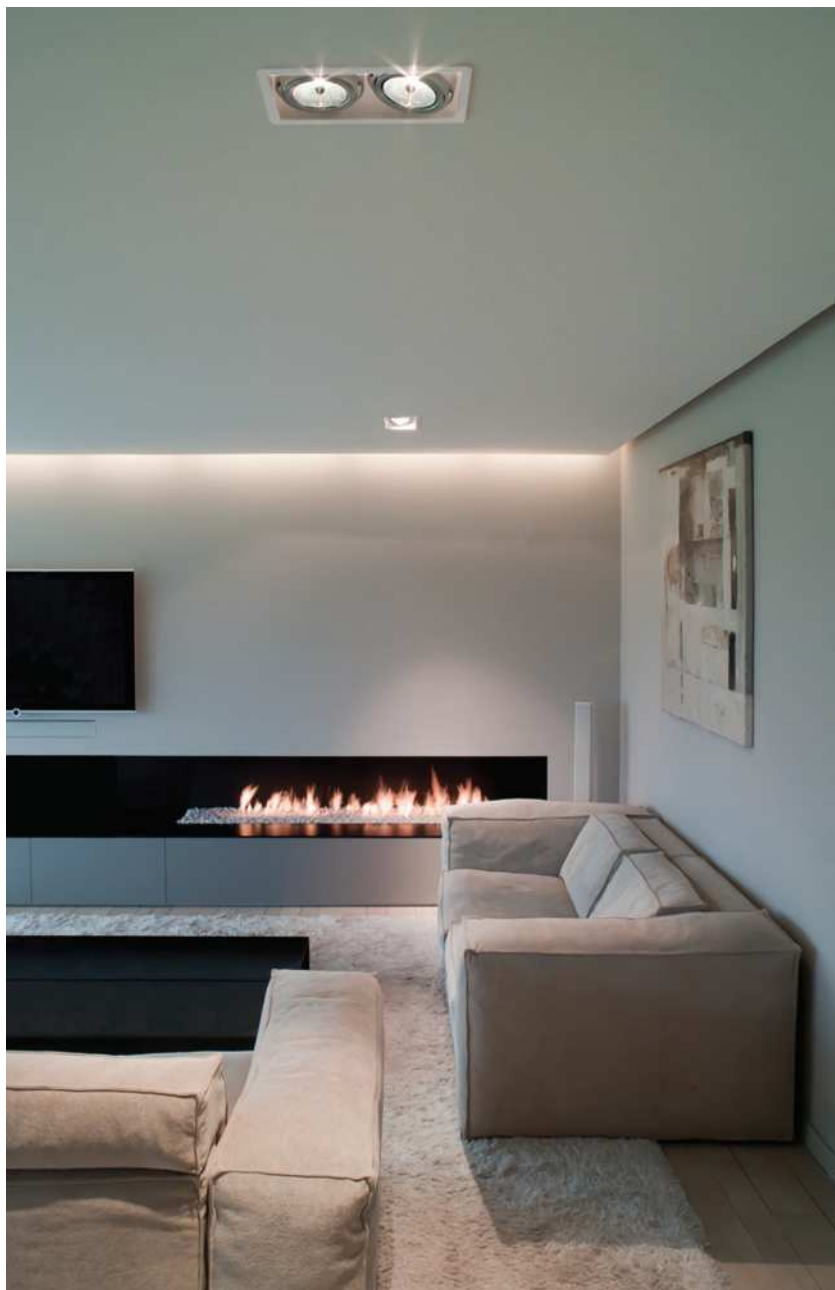

**R111** IN





# R RANGE IN

---

Bruno Van Meenen



## **R110** IN

---

CE  IP20

12V - G53 - transformer excluded

1 x QR111 max. 75W or LED



## **R111** IN

---

CE  IP20

12V - G53 - transformer excluded

2 x QR111 max. 75W or LED

# R RANGE UP

---

Bruno Van Meenen



## **R51** UP

CE  **IP20**

230V - GU10 - 1 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

1 x QR-CBC51 (alu reflector) max. 35W or LED



## **R52** UP

CE  **IP20**

230V - GU10 - 2 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

2 x QR-CBC51 (alu reflector) max. 35W or LED



## **R54** UP

CE  **IP20**

230V - GU10 - 4 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

4 x QR-CBC51 (alu reflector) max. 35W or LED



**R07 UP**



**R51 UP LED / R52 UP LED**

# R RANGE UP LED

---

Bruno Van Meenen



## **R51** UP LED

CE  IP40 

230V - driver included (not dimmable)

4 x power LED (included) 1.2W

cold white : 6000K - 440lm - CRI >75

warm white : 2850K - 360lm - CRI >93



## **R52** UP LED

CE  IP40 

230V - driver included (not dimmable)

8 x power LED (included) 1.2W

cold white : 6000K - 880lm - CRI >75

warm white : 2850K - 720lm - CRI >93



## **R54** UP LED

CE  IP40 

230V - driver included (not dimmable)

16 x power LED (included) 1.2W

cold white : 6000K - 1760lm - CRI >75

warm white : 2850K - 1440lm - CRI >93

# R RANGE UP

---

Bruno Van Meenen



## **R07** UP

---

CE  IP20

230V - BA15d - transformer included

1 x QR70 max. 50W or LED



## **R70** UP

---

CE  IP20

230V - BA15d - transformer included

2 x QR70 max. 50W or LED



**R70** UP





**R111** UP

# R RANGE UP

---

Bruno Van Meenen



## **R110** UP

---

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED



## **R111** UP

---

CE  IP20

230V - G53 - transformer included

2 x QR111 max. 50W or LED





# SCAR-LED

---

Bruno Van Meenen



## **SCAR-LED** 1F built-in 45

CE  IP40 

350mA - driver excluded

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93



## **SCAR-LED** 1FD built-in 60

CE  IP40 

230V - driver included (to build in)

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93



## **SCAR-LED** 1FDS built-in 60


CE  IP40 

230V - driver included (to build in)

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93

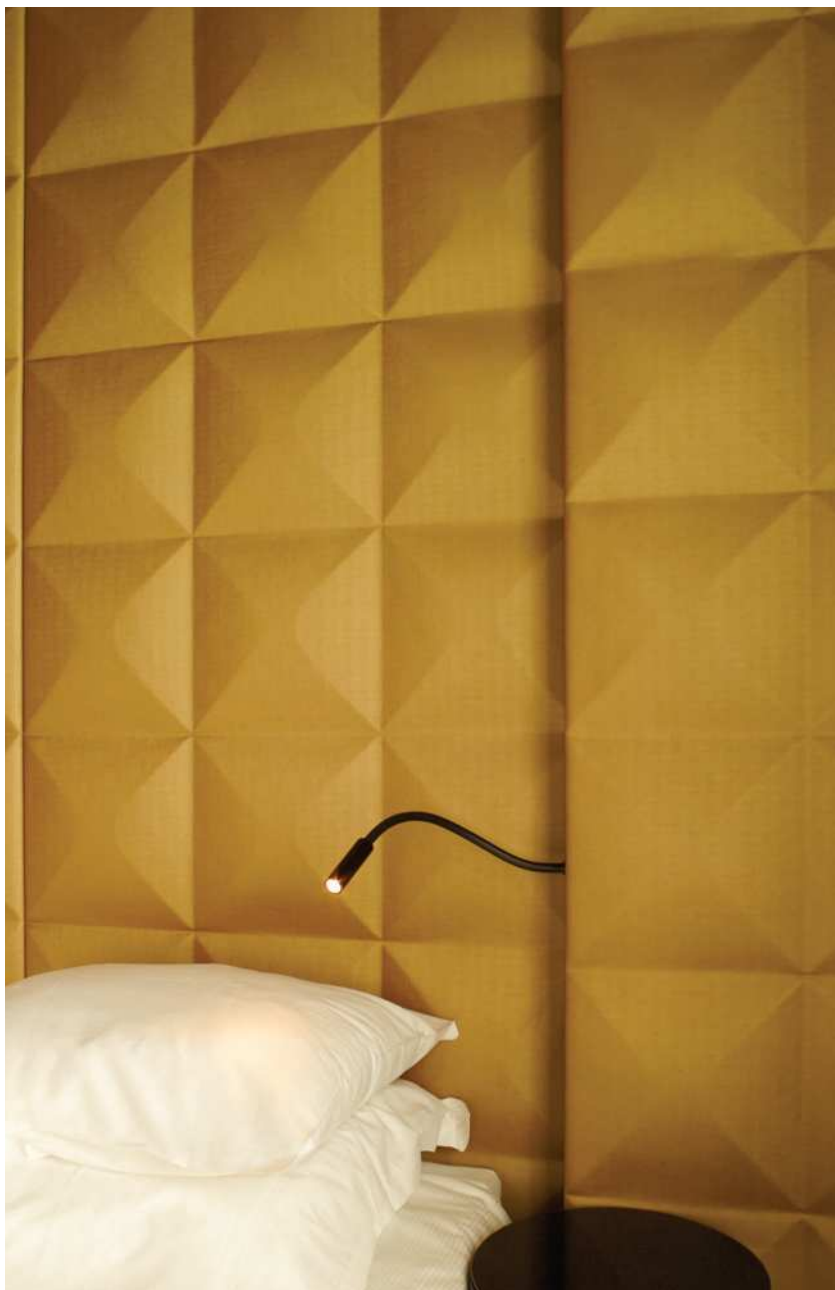

**SCAR-LED** 1FD built-in 60





**SCAR-LED** 1FDS





# SCAR-LED

---

Bruno Van Meenen



## SCAR-LED 1FD

---

CE  IP40 

230V - driver included (not dimmable)

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93



## SCAR-LED 1FDS

---

CE  IP40 

230V - driver included (not dimmable)

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93





# SCAR-LED

---

Bruno Van Meenen



## SCAR-LED TABLE

CE IP40 eco

230V - driver included & switch on cable

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93



## SCAR-LED TABLE built-in

CE IP40 eco

230V - driver included & switch on cable

1 x power LED (included) 1.2W

cold white : 6000K - 110lm - CRI >75

warm white : 2850K - 90lm - CRI >93

# SCAR-LITE

---

Bruno Van Meenen



## SCAR-LITE

CE  IP40 

230V - driver included  
1 x 2W powerLED - 700mA  
warm white : 2700K - CRI >90

more information see: [www.trizo21.com](http://www.trizo21.com)



## SCAR-LITE USB

CE  IP40 

230V - driver included (not dimmable)  
USB charger incl. - compatible with iPad/iPhone  
and other USB chargeable devices  
1 x 2W powerLED - 700mA  
warm white : 2700K - CRI >90

more information see: [www.trizo21.com](http://www.trizo21.com)





**SCAR-LITE** USB



**SCAR-LITE**





# SIRENS



Olga Bielawska



## **SIRENS** SU

CE  IP50  eco

230V

E27 - energy saving bulbs (LED or fluo)



## **SIRENS** W/C

CE  IP50  eco

230V

E27 - energy saving bulbs (LED or fluo)





# TIZOR

Bruno Van Meenen



## **TIZOR 2400-H**

CE IP40 eco

230V - gear included

G5 - 4 x T5 28W/54W

G5 - 6 x T5 28W/54W



## **TIZOR 1200 GT1-W/C**

CE IP40 eco

230V - G5 - gear included

2/4 x T5 28W/54W

G53 - transformer included

3 x QR111 max. 50W or LED



**KWA-ADJU 2T / TIZOR 1200 GT1-W/C**





## WY-O GL

CE  IP50 

24Vdc - driver excluded

1 lighting side : 36 x SMD LED (included) - 685lm - 9W

2 lighting sides : 72 x SMD LED (included) - 1370lm - 18W

warm white : 2850K - CRI >90



## WY-O DME

CE  IP30 

230V - driver included (not dimmable)

1 lighting side : 36 x SMD LED (included) - 685lm - 9W

2 lighting sides : 72 x SMD LED (included) - 1370lm - 18W

warm white : 2850K - CRI >90





