



FROM
BELGIUM
WITH
LOVE



WEVER & DUCRÉ
LIGHTING

**LIFE IS
TOO SHORT
FOR BORING
LIGHTING**



WEVER & DUCRÉ
LIGHTING

ROOMOR

p. 23 – 41



CEILING
p. 25



CEILING
p. 27



SUSPENDED
p. 29



WALL
p. 31



WALL
p. 35



TABLE
p. 39



FLOOR
p. 41

WIRO

p. 43 – 73



CONE
p. 46



WIRO
p. 47



DIAMOND
p. 53



INDUSTRY
p. 61



GLOBE
p. 61



WALL
p. 67



TABLE
p. 71



FLOOR
p. 73

MIRRO

p. 75 – 87



CEILING
p. 77



SUSPENDED
p. 79



WALL
p. 81



WALL
p. 81



TABLE
p. 85



FLOOR
p. 87

DRO

p. 89 – 101



CEILING
p. 89



SUSPENDED
p. 91



WALL
p. 93



WALL
p. 93



TABLE
p. 97



TABLE
p. 99



FLOOR
p. 101



FLOOR
p. 101

ROCK

p. 103 – 113



SUSPENDED
p. 103



TABLE
p. 109



FLOOR
p. 109



NAKED
p. 113

REVER

p. 115 – 133



SUSPENDED
p. 117



WALL
p. 119



TABLE
p. 123



TABLE
p. 127



FLOOR
p. 131

J.J.W.

p. 135 – 147



CEILING
p. 137



SUSPENDED
p. 139



SUSPENDED
p. 141



WALL
p. 143

CEILING RECESSED p. 149 — 229								
								
DEEP PETIT p. 153	DEEP p. 155	DEEP AD. PETIT p. 159	DEEP ADJUST p. 161	DEEP ASYM p. 167	DEEP IP44 p. 169	DEEP 2.0 p. 171	DEEPER p. 173	
								
DEEPER IP44 p. 175	RONY p. 179	RON p. 181	RINI IP44 p. 185	RINI SNEAK IP44 p. 187	PYRAMID p. 189	PLANO PETIT p. 191	PLANO p. 193	STRANGE PETIT p. 197
								
STRANGE p. 199	LUNA ROUND IP44 p. 201	LUNA SQUARE IP44 p. 203	LITO p. 205	SNEAK TRIM p. 207	SNEAK TRIMLESS p. 209	HIDE p. 211	CITY IP44 p. 215	CORY p. 217
							CEILING SURFACE p. 231 — 305	
CORO p. 219	MIRBI IP44 p. 221	MIRBI IP44 p. 221	SPYDER p. 223	SPINEO p. 225	NOP PETIT p. 227	NOP p. 229	ROOMOR p. 25	
								
ROOMOR p. 27	MIRRO p. 77	DRO p. 89	J.J.W. p. 137	VENN p. 233	BEBOW p. 235	SOLID p. 239	SIRRA p. 243	SIRRO p. 245
								
BOX p. 249	DOCUS p. 255	HEXO p. 259	RAY p. 265	ROB IP44 p. 269	ROBY IP44 p. 271	TOWNA IP44 p. 273	CORY p. 275	CORO p. 277
								
MIRBI IP44 p. 279	MIRBI IP44 p. 279	PLUXO p. 281	SARA p. 283	SARA p. 285	TORCO p. 287	SQUBE p. 289	SQUBE p. 295	ELLO p. 303

CEILING SUSPENDED p. 307 — 379								
								
ROOMOR p. 29	CONE p. 46	WIRO p. 47	DIAMOND p. 53	INDUSTRY p. 61	GLOBE p. 61	MIRRO p. 79	DRO p. 91	
								
ROCK p. 103	REVER p. 117	J.J.W. p. 139	WETRO p. 309	DINOR p. 313	DINOR p. 313	DINOR p. 313	SHIEK p. 315	SHIEK p. 317
								
BISHOP p. 325	BEBOW p. 333	VENN p. 337	GIGANT p. 339	CYCLONE p. 343	BOX p. 347	DOCUS p. 349	HEXO p. 351	RAY p. 355
								
CORK p. 357	BOX p. 363	DOCUS p. 365	HEXO p. 367	RAY p. 369	CORK p. 371	CONE p. 373	SELO p. 375	ELLO p. 379
WALL RECESSED p. 381 — 395								
								
SMILE IN p. 383	LITO p. 385	EYE p. 387	THEMIS p. 389	STRANGE p. 391	STRIPE p. 393	ORIS p. 395		
								
ROOMOR p. 35	WIRO p. 67	MIRRO p. 81	DRO p. 93	REVER p. 119	J.J.W. p. 143	VENN p. 399	SMILE ON p. 403	
								MORE ON THE NEXT PAGE
SMILE p. 405	BENTO p. 407	BENTA p. 409	MOON p. 411	LEENS p. 413	MIRBI LONG IP44 p. 415	MIRBA IP44 p. 417	CENTRAL p. 419	

									
STATION p. 421	TRAIN p. 423	BOX MINI p. 427	BOX p. 429	DOCUS MINI p. 433	HEXO MINI p. 435	RAY MINI p. 437	RAY p. 439	INCH p. 443	
					TABLE				
MILES p. 445	MILES p. 445	MILES p. 449	LIGHTDROP IP44 p. 451	ARZY p. 453			ROOMOR p. 39	WIRO p. 71	MIRRO p. 85
					FLOOR SURFACE				
DRO p. 97	DRO p. 99	ROCK p. 109	REVER p. 123	REVER p. 127			ROOMOR p. 41	WIRO p. 73	MIRRO p. 87
									
DRO p. 101	DRO p. 101	ROCK p. 109	NAKED p. 113	REVER p. 131					

CEILING RECESSED p. 457 – 459	 INTRA p. 459	CEILING SURFACE p. 461 – 475	 BLAS p. 463	 BLAS p. 463	 BOX p. 465	 RAY p. 469	 TUBE p. 471	 TUBE CARRÉ p. 473
 ROB p. 475	WALL RECESSED p. 477 – 485	 SMILE IN p. 479	 SMILE IN p. 479	 ORIS p. 481	 ORIS p. 481	 ATIM p. 483	 ATIM CARRÉ p. 485	
WALL SURFACE p. 487 – 527	 SMILE ON p. 489	 SMILE ON p. 489	 SMILE p. 491	 TAPE p. 493	 TUBE p. 495	 TUBE CARRÉ p. 499	 TUBE CARRÉ p. 501	 GETTON p. 503
 CENTRAL p. 505	 STATION p. 507	 TRAIN p. 509	 TRAIN NARROW p. 513	 BOX p. 515	 BOXX p. 519	 RAY p. 521	 PALOS p. 523	 PALOS p. 525
 X-BEAM p. 527	FLOOR RECESSED p. 529 – 539	 CARD p. 531	 MAP p. 533	 MAP ASYM p. 535	 CHART p. 537	 CHART ASYM p. 539	FLOOR SURFACE p. 541 – 569	 COSTA p. 543
 COSTA p. 545	 TAPE p. 549	 PACE p. 551	 GETTON p. 553	 LINUS p. 555	 EDGE p. 557	 PALLUZ C p. 559	 SMILE p. 561	 FIFTY FIFTY p. 563
 SWAY p. 565	 PALOS p. 567	 PALOS p. 569	FLOOR PROJECTOR p. 571 – 579	 STIPO p. 573	 STAKE p. 575	 STAKE FOLD p. 577	 X-BEAM p. 579	

FROM BELGIUM WITH LOVE

LIGHT UP YOUR LIFE

Delicious fries prepared with love – that's what Belgium is famous for, right? Not exactly. For a while now, Belgium has also become known for trendy lights that not only look great, but also have compelling inner values. State-of-the-art LEDs that feel equally at home in a cosy attic apartment or in the hippest club in the city. Because they save space, preserve resources, and offer a higher quality of life. And that is exactly what we at Wever & Ducré want. Where do we get our inspiration? From people like you, who share our passion for beautiful things and who pay as much attention to great design as to high-quality products. Sounds good? Then keep reading. The newest highlights are waiting for you.

WIR BRINGEN SIE ZUM STRAHLEN

Köstliche und mit viel Liebe zubereitete Pommes – dafür ist Belgien berühmt. Stimmt's? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten, die nicht nur toll aussehen, sondern auch mit inneren Werten punkten. LEDs der jüngsten Generation, die sich in einer kleinen Dachgeschoßwohnung ebenso wohlfühlen wie im angesagtesten Club der Stadt. Denn sie sparen Platz, schonen die Ressourcen und sorgen so ganz einfach für mehr Lebensqualität. Und genau das ist es auch, was wir von Wever & Ducré möchten. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebensoviel Wert legen wie auf eine hochwertige Verarbeitung. Klingt interessant? Dann blättern Sie doch einfach weiter. Die neuesten Hotspots warten schon auf Sie.



JUST COME OVER

HOMETOWN GLORY KORTRIJK

The moving boxes are unpacked, all the luminaires are mounted, and the coffee machine is running. The only thing still missing is you. Where? At our new headquarters in Kortrijk, of course, which are now open and ready for your visit. So save the address and head right over. This is the place where you can experience the latest collections up close and personal. And not just in our brand new showroom – you'll also find them in the best restaurants, cafés, and bars in town. No wonder the Broel Towers are trembling. After all, Kortrijk's famous attraction is now facing some fierce competition. The latest Wever & Ducré lighting trends easily outshine even the most beautiful medieval façade.

Die Umzugskartons sind ausgepackt, alle Leuchten montiert und die Kaffeemaschine läuft. Das Einzige, was jetzt noch fehlt, sind Sie. Wo? Natürlich in unserem neuen Headquarтер in Kortrijk, das ab sofort für Sie geöffnet hat. Also gleich Adresse speichern und losfahren. Schließlich kann man die aktuellen Kollektionen hier hautnah erleben. Und das nicht nur in unserem nagelneuen Showroom – sondern auch in den besten Restaurants, Cafés und Bars der Stadt. Tja, kein Wunder, dass die Broeltürme zittern. Schließlich bekommen die berühmten Sehenswürdigkeiten jetzt mächtig Konkurrenz. Und zwar von den neuesten Wever & Ducré-Leuchtentrends, die selbst die schönste mittelalterliche Fassade locker überstrahlen.



SHOWROOM

WEVER&DUCRÉ
SHOWROOM
Spinnerijstraat 99/03
8500 Kortrijk
+32 56 49 28 00

REFERENCES

PARKHOTEL
HOTEL
Stationsplein 2
8500 Kortrijk
+32 56 22 03 03

BUDA KITCHEN
RESTAURANT
Budastraat 30
8500 Kortrijk
+32 56 32 13 98

**HUIS VAN DE
GROOTJUFFROUW**
BAR
Begijnhof 36
8500 Kortrijk
+32 49 87 61 624

BEUDAERT
RESTAURANT
Sint-Maartenskerkhof 8
8500 Kortrijk
+32 56 32 82 70



EXPLORE KORTRIJK
weverducre.com/kortrijk



THE WAY OF LIGHT

UP AND DOWN AND STRAIGHT AHEAD

“Light permeates everything in a way that is ethereal and invisible,” says Steffen Seeger, surveying his well-lit studio in Berlin. The artist from Berlin, best known for his multiple line drawings, was immediately intrigued by the idea of rendering this intangible aspect visually. So we invited him to Kortrijk to create a mural for us. Flowing, intuitively arranged lines that emanate like rays and waves form an energy field on the wall. “I wanted to capture the universal and all-enlivening energy of light with this landscape of overlapping oscillations,” says the artist. The image thereby leaves ample room for interpretation. There’s no better way to put light in the limelight.

HOCH, RUNTER UND GERADEAUS

„Licht durchströmt alles auf eine feinstoffliche und unsichtbare Weise“, sagt Steffen Seeger und blickt sich dabei in seinem hellen Studio in Berlin um. Die Idee, diesen nicht greifbaren Aspekt zu visualisieren, hat den Berliner Künstler, der mit seinen Multiple-Line-Drawings bekannt wurde, deshalb sofort fasziniert. Also haben wir ihn nach Kortrijk eingeladen, um für uns ein Mural zu gestalten. Fließende, intuitiv gesetzte Linien, die sich strahlen- und wellenförmig ausbreiten, haben auf der Wand ein Energiefeld geformt. „Mit dieser Landschaft aus sich überlagernden Schwingungen wollte ich die universelle und alles belebende Energie des Lichts einfangen“, sagt der Künstler. Damit lässt das Bild viel Raum für Deutungen offen. Schöner kann man Licht nicht in Szene setzen.



“The power of
intuition leads to
enlightenment.”

STEFFEN SEEGER



SIGNED, SEALED, AND DELIVERED

YOU'VE BEEN EXPECTING ME



... SO WHAT NOW?


Now that you've fallen head over heels in love with one of our luminaires, there's only one last thing you want – and that's to have it as soon as possible. We understand that all too well. That's why we do everything we can to ensure that your new treasure arrives in record time. Here's an example. If we receive an order by 2:30 pm, we can ship it the very next day, since we have nearly all our luminaires in stock. That way, nothing stands in the way of your first evening together.

... UND AB DIE POST

Sie haben sich Hals über Kopf in eine unserer Leuchten verliebt und möchten jetzt nur noch eines: sie so schnell wie möglich bei sich haben? Verstehen wir gut. Deshalb tun wir alles, um Ihren neuen Liebling im Rekordtempo zu Ihnen zu bringen. Kleines Beispiel gefällig? Erreicht uns eine Bestellung bis 14:30 Uhr, können wir sie – da wir fast alle unsere Leuchten lagernd haben – gleich am nächsten Tag versenden. So steht dem ersten gemeinsamen Abend nichts mehr im Wege.

“When I see something beautiful, I simply have to have it.”

YVES MARGINET
SALES AREA MANAGER

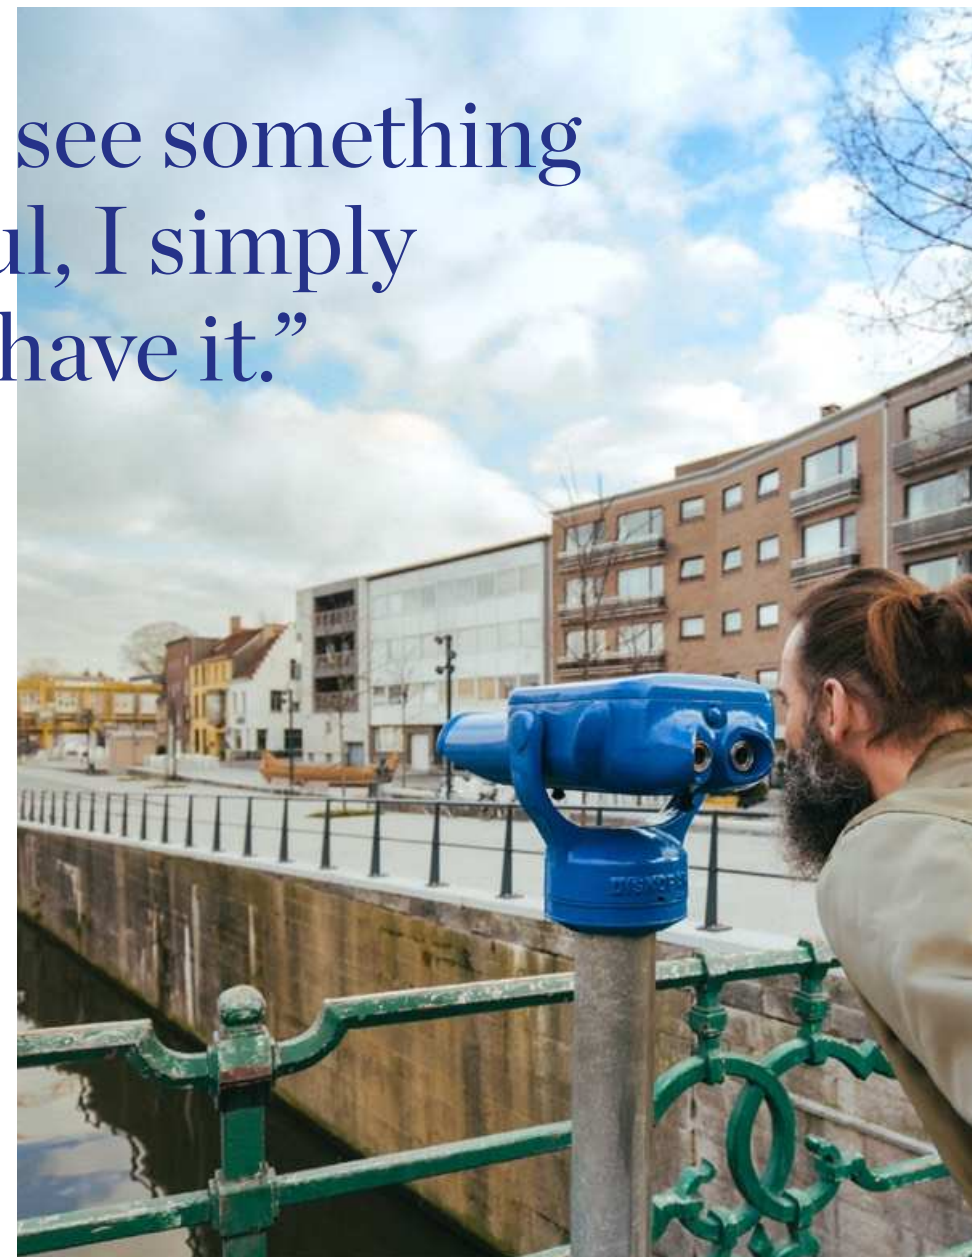

FROM DUSK TILL DAWN

RIGHT ATMOSPHERE AND MOOD



TURN IT HOWEVER YOU WANT

You can now set the right light for any mood with a simple twist. Do you want a chipper morning at 3000 K, or a romantic evening with a candlelight atmosphere at 1800 K? Either way, we have it covered! And the best thing is, the Ambient White Dim is available for nearly all of our lights. So you don't have to compromise on design. All you need is a three-wire cable, a phase cut dimmer, and one of our lights. Keep shining!

DREHN SIE'S, WIE SIE'S MÖCHTEN

Ab sofort können Sie im Handumdrehen genau die Lichtstimmung zaubern, die Ihnen gefällt. Ein munterer Morgen bei 3000 K oder lieber ein romantischer Abend mit Candlelight-Stimmung bei 1800 K? Kein Problem. Und das Beste: Das Ambient White Dim ist für fast alle unsere Leuchten erhältlich. Damit sind Ihnen in puncto Design keine Grenzen gesetzt. Alles, was Sie brauchen, sind ein 3-poliges Kabel, ein Phasenabschnittsdimmer und eine unserer Leuchten. Also keep shining!


GET YOURSELF

IN THE MOOD FOR

2700 K for
lunch

3000 K for
breakfast

1800 K for
dinner

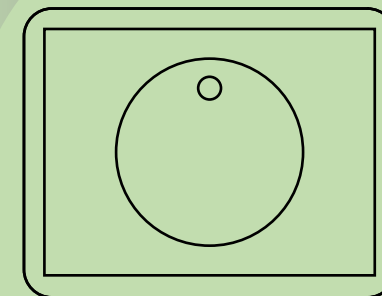

3000 K to 1800 K in
less than a second

IN

DOOR

DESIGNER FAMILIES

p. 23 — 147



**ROOMOR
CEILING 1.0**
p. 25



**ROOMOR
CEILING 2.0**
p. 27



**ROOMOR
SUSPENDED**
p. 29



**ROOMOR
WALL**
p. 31



**ROOMOR
TABLE**
p. 39



**ROOMOR
FLOOR**
p. 41



**WIRO
SUSPENSION
SYSTEM**
p. 45



**WIRO
WALL**
p. 67



**WIRO
TABLE**
p. 71



**WIRO
FLOOR**
p. 73



**ROCK
SUSPENDED**
p. 103



**ROCK
FLOOR**
p. 109



**ROCK
NAKED**
p. 113



**MIRRO
CEILING**
p. 77




**MIRRO
SUSPENDED**
p. 79



**MIRRO
WALL**
p. 81



**MIRRO
TABLE**
p. 85



**MIRRO
FLOOR**
p. 87



**REVER
SUSPENDED**
p. 117



**REVER
WALL**
p. 119



**REVER
TABLE**
p. 123



**REVER
DINING**
p. 127



**REVER
FLOOR**
p. 131



**DRO
CEILING**
p. 89



**DRO
SUSPENDED**
p. 91



**DRO
WALL**
p. 93



**DRO
TABLE**
p. 97



**DRO
TABLE**
p. 99



**DRO
FLOOR**
p. 101



**J.J.W.
SURFACE**
p. 137



**J.J.W.
SUSPENDED**
p. 139



**J.J.W.
WALL**
p. 143

A TRUE ALL-ROUNDER

ROOMOR HAS IT




MIX AND MATCH
weverducre.com/roomor



It's safe to believe the rumours: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire to a discreet table lamp that can be used to create exceptional design accents at the office and beyond. And because ROOMOR is entirely adaptable to its surroundings when it comes to materials, all of the shade designs are offered in either brushed aluminium or finely textured felt. Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe, mit der sich nicht nur im Büro schöne Design-Akzente setzen lassen. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen entweder in gebürstetem Aluminium oder in fein strukturiertem Filz erhältlich. Flexibler geht's nicht.

MIX AND MATCH

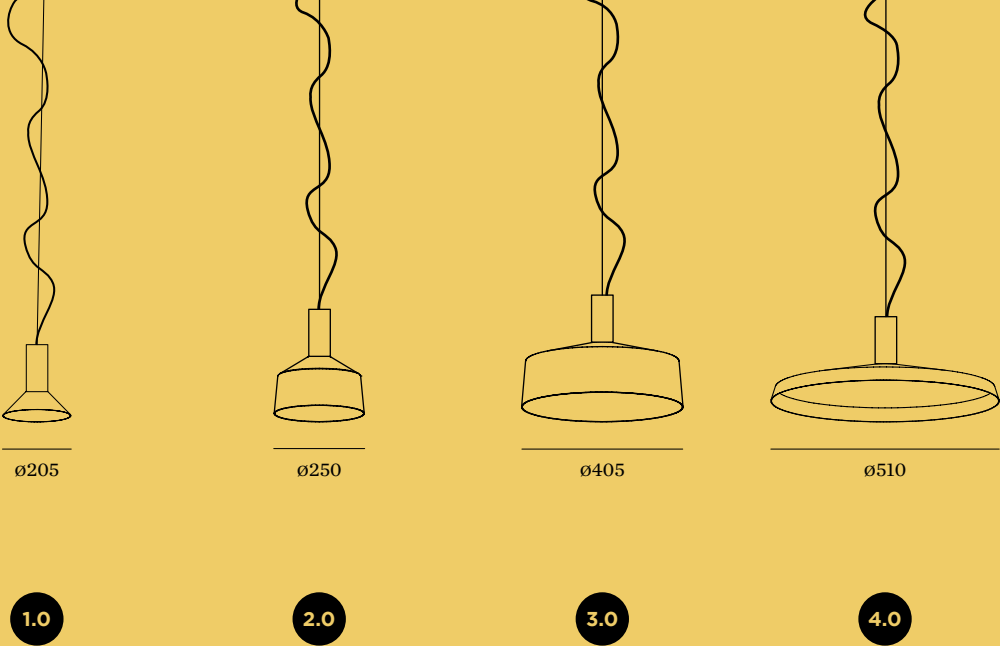



MATERIAL	ALUMINIUM	FELT	ALUMINIUM	FELT	ALUMINIUM	FELT	ALUMINIUM	FELT
CEILING								
1.0 PAR16								
1.0 E27								
2.0 PAR16								
2.0 E27								
SUSPENDED								
1.0 PAR16								
1.0 E27								
WALL								
1.0								
2.0								
3.0								
4.0								
5.0								
TABLE								
1.0								
2.0								
FLOOR								
1.0								



CAFÉ AMSTERDAM | NETHERLANDS



1.0



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.0 E27

QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.10kg IP20 45°/45°

1.10kg IP20 45°/45°

mounting only

mounting only

CODE
168120B

CODE
1681E0B

OPTIONAL

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593

extension tube

CODE
0.5m 90019192
1.0m 90019191

OPTIONAL

QA60 LED E27 9W dim

CODE
2800K | 810lm 9003E148

more lamps and specs on page 594

extension tube

CODE
0.5m 90019192
1.0m 90019191

OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1

shade 2.0

	CODE
	B2
	K2
felt	F2

shade 3.0

	CODE
	B3
	K3
felt	F3

shade 4.0

	CODE
	B4
	K4
felt	F4


no shade

	CODE
	00

overview on page 23



back




2.0 PAR16
2x PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.75kg IP20 45°/45°

mounting only
CODE
169120B

OPTIONAL
PAR16 LED GU10 7W phase-cut dim
2700K | 360lm
CODE
901228B3
more lamps and specs on page 593

extension tube
CODE
0.5m 90019192
1.0m 90019191



2.0 E27
2x QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.75kg IP20 45°/45°

mounting only
CODE
1691E0B

OPTIONAL
QA60 LED E27 9W dim
2800K | 810lm
CODE
9003E148
more lamps and specs on page 594

extension tube
CODE
0.5m 90019192
1.0m 90019191

OPTIONAL

shade 1.0 | 2 shades included
CODE
B1
K1
felt F1

shade 2.0 | 2 shades included
CODE
B2
K2
felt F2

shade 3.0 | 2 shades included
CODE
B3
K3
felt F3

shade 4.0 | 2 shades included
CODE
B4
K4
felt F4

no shade
CODE
00

overview on page 23



2.0




1.0



3.0



4.0



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body
shade in felt grey max. 15W

0.80kg IP20 0,9~D

mounting only

	CODE
	248120B
	248120R
	248120G

6.0m suspension on page 607

OPTIONAL

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 593

1.0 E27

QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body
shade in felt grey max. 15W

0.80kg IP20 0,9~D

mounting only

	CODE
	2481E0B
	2481E0R
	2481E0G

6.0m suspension on page 607

OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148

more lamps and specs on page 594

OPTIONAL

shade 1.0	CODE
	B1
	K1
	R1
	G1
	F1


shade 2.0	CODE
	B2
	K2
	R2
	G2
	F2

shade 3.0	CODE
	B3
	K3
	R3
	G3
	F3

shade 4.0	CODE
	B4
	K4
	R4
	G4
	F4

no shade	CODE
	00

overview on page 23

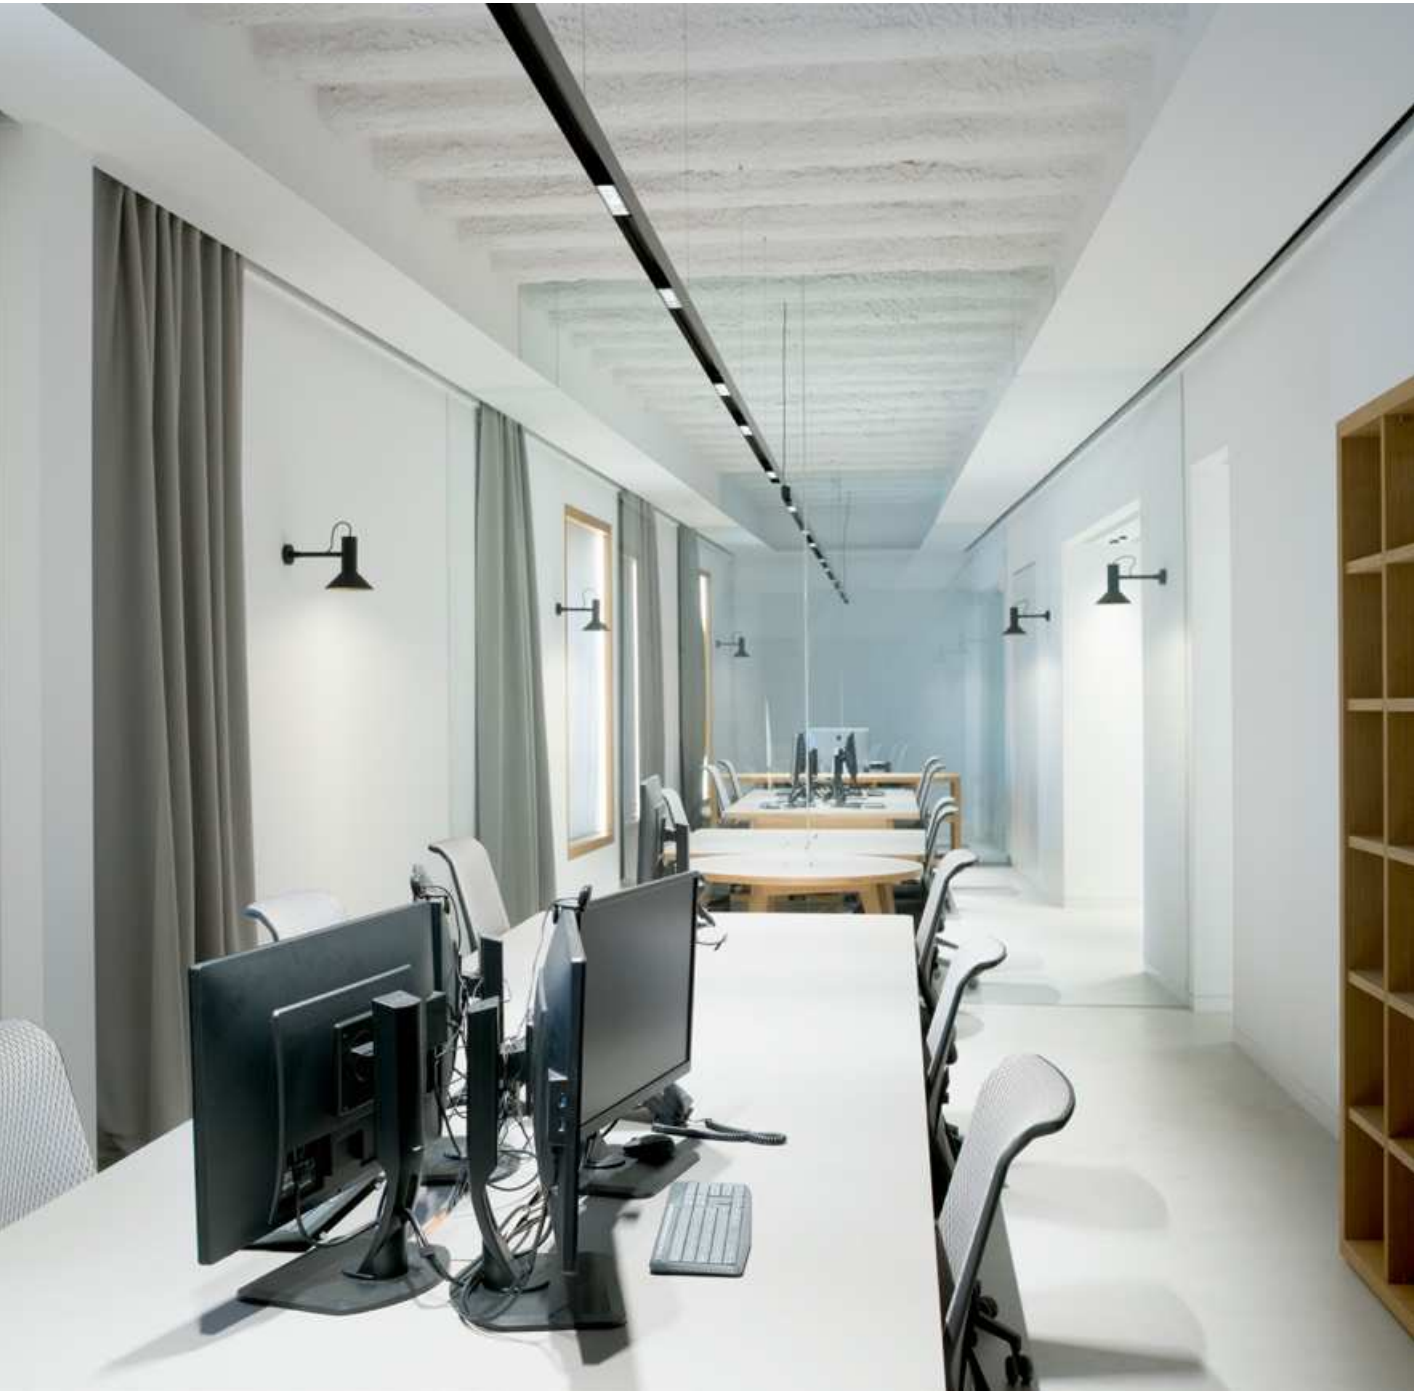



2.0



1.0

ROOMOR

WALL SURFACE



1.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
shade in felt grey max. 15W

0.90kg IP20 45°/45°

mounting only

CODE
338120B
338120R
338120G

OPTIONAL

shade 1.0

CODE
B1
K1
R1
G1
F1 felt

no shade

CODE
00

overview on page 23

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228W3
901228B3

more lamps and specs on page 593

2.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
shade in felt grey max. 15W

1.10kg IP20 45°/45°

mounting only

CODE
338220B

OPTIONAL

shade 1.0

CODE
B1
K1
F1 felt

shade 2.0

CODE
B2
K2
F2 felt

no shade

CODE
00


overview on page 23

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593






3.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable with plug
shade in felt grey max. 15W

0.85kg IP20 45°/45° 30°/30°


mounting
cable plug with hand switch

CODE
339120B



cable base round

339220B



OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1


no shade

CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593




4.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable with plug
shade in felt grey max. 15W

1.30kg IP20 45°/45° 30°/30°


mounting
cable plug with floor switch

CODE
339520B



cable base round

339620B



OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1


no shade

CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593




5.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable with plug
shade in felt grey max. 15W

1.45kg IP20 45°/45° 30°/30°


mounting
cable plug with hand switch

CODE
340120B



cable base round

340220B



OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1

no shade

CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593

OPTIONAL

shade 2.0 for wall 4.0

	CODE
	B2
	K2
felt	F2

shade 3.0 for wall 4.0

	CODE
	B3
	K3
felt	F3

shade 4.0 for wall 4.0


	CODE
	B4
	K4
felt	F4

overview on page 23





HOTEL ROTTERDAM | NETHERLANDS

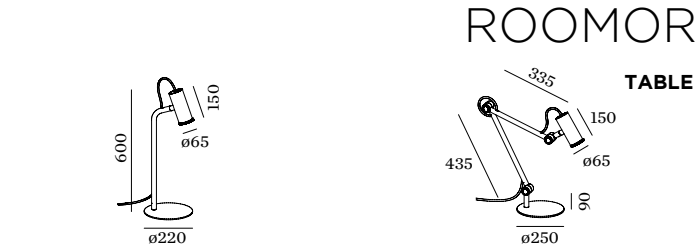


1.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch
shade in felt grey max. 15W

3.40kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	637120B
	637120R
	637120G



OPTIONAL

shade 1.0


	CODE
	B1
	K1
	R1
	G1
	F1

no shade

	CODE
	00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3




2.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch
shade in felt grey max. 15W

4.50kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	639120B



OPTIONAL

shade 1.0

	CODE
	B1
	K1
	F1

no shade

	CODE
	00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm



	CODE
	901228B3

more lamps and specs on page 593



HOTEL ROTTERDAM | NETHERLANDS

ROOMOR
FLOOR SURFACE

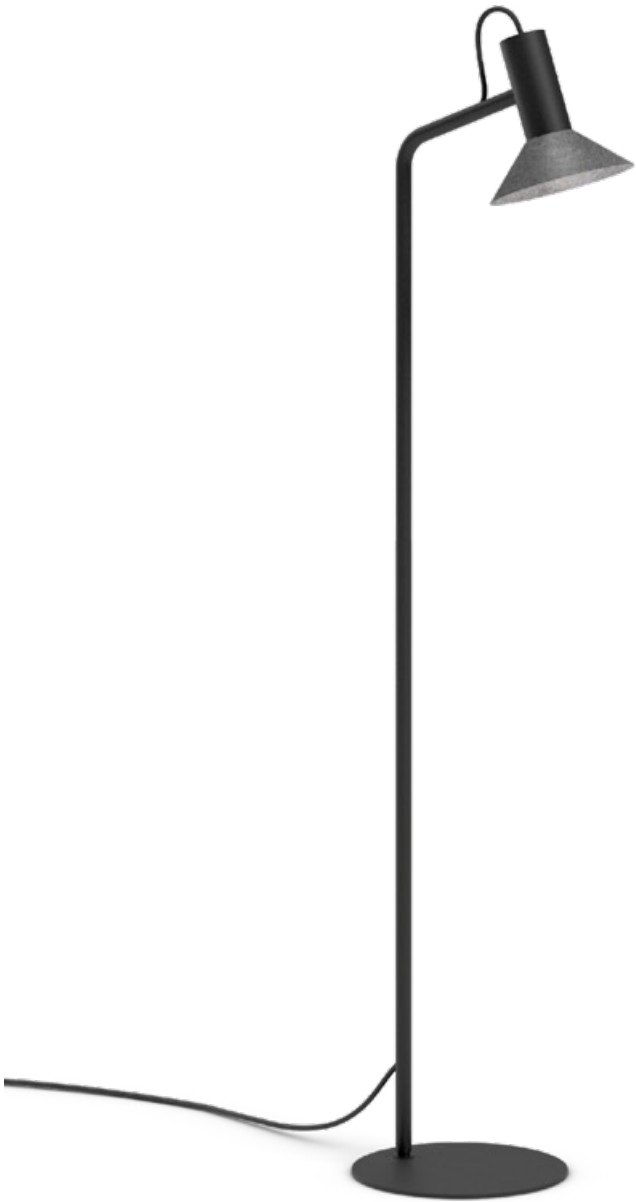


1.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. black cable plug with switch
shade in felt grey max. 15W

5.60kg IP20 45°/45° 30°/30°

mounting
cable plug with floor switch

CODE
638120B_



OPTIONAL

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593

OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1

shade 2.0

	CODE
	B2
	K2
felt	F2

no shade

	CODE
	00


overview on page 23



DESIGNER

“Design is good if it brings something new and timeless to the world.”

BERND STEINHUBER

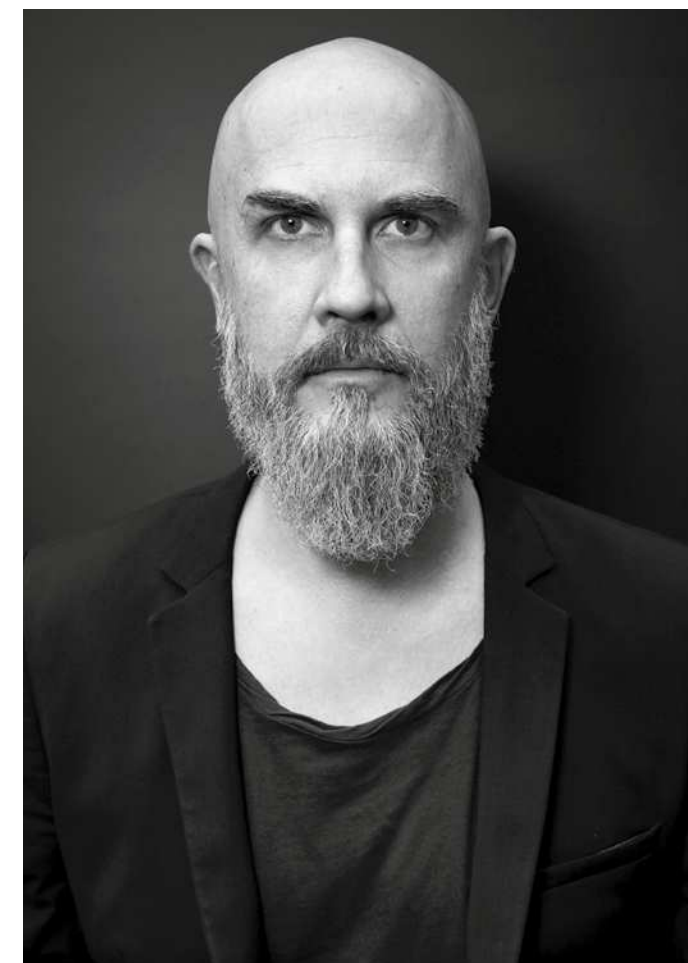


And with WIRO, Bernd Steinhuber has accomplished exactly that. What inspires the Austrian designer the most? Plainly said: Everything. Therefore, his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open ...

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open!



PRIVATE RESIDENCE GERMANY





PLUG + PLAY

connector set for one lamp
incl. cable plug with dimmer
shade not included

CODE
90015165

cable plug with dimmer




DECENTER 1.0

connector set for one lamp
round ceiling base
shade not included

CODE
90052050

6.0m suspension on page 607




DECENTER 2.0

connector set for two lamps
round ceiling base
shade not included

CODE
90052055

6.0m suspension on page 607



DECENTER 3.0

connector set for three lamps
round ceiling base
shade not included

CODE
90052060

6.0m suspension on page 607



SUSPENSION

connector set for one lamp
round ceiling base | shade not included


with steel wire | 2.6m
CODE
90015175

with steel wire | 6.0m
90015176

no steel wire | 2.6m
90015171

no steel wire | 6.0m
90015172





1.0 CONE

- E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

1.00kg 0.9m IP20

shade only	CODE
	245100V0
	245100B0

OPTIONAL


T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	
2200K 50lm	9003E106

QA60 LED E27 6W	
2200K 450lm	9003E109

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594



2.0 WIRO

- QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

0.35kg 0.9m IP20

shade only	CODE
	209600V0
	209600B0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594



1.8 WIRO

- QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.15kg 0.9m IP20

shade only	CODE
	209200V0
	209200B0

OPTIONAL


QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124

T32-180 carbon filament E27 15W	CODE
2200K 50lm	9003E106

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594



3.8 WIRO

- QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.35kg 0.9m IP20

shade only	CODE
	209300V0
	209300B0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594

WIRO

SHADES WITHOUT STEEL WIRE

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | no steel wire | 2.6m

	CODE
	90015171

Suspension | connector set for one lamp | round ceiling base | no steel wire | 6.0m

	CODE
	90015172

more information on page 45






RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO

SHADES WITH STEEL WIRE



6.1 WIRO

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg 0.9m IP20

shade only

	CODE
	209400V0
	209400B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

ST64 carbon filament E27 15W

	CODE
2200K 50lm	9003E105

more lamps and specs on page 594



6.5 WIRO

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.85kg 0.9m IP20

shade only

	CODE
	209500V0
	209500B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 594

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176


more information on page 45





WIRO

SHADES WITH STEEL WIRE



1.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered


shade only

	CODE
	229100P0
	229100B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	



1.1 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

shade only

	CODE
	244100P0
	244100B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176

more information on page 45



AIRBASE HOTEL | STUDIO WG3 & ZT GELDNER | CHRISTINA ZETTL GRAZ | AUSTRIA






RESIDENCE CYPRES | LIGNE V KNOCKE | BELGIUM



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



2.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

5.70kg 50x50x50cm IP20


shade only

	CODE
	229200P0
	229200B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	



3.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

6.50kg 50x50x50cm IP20


shade only

	CODE
	229300P0
	229300B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	



4.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

6.00kg 50x50x50cm IP20

shade only

	CODE
	229400P0
	229400B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	

WIRO
SHADES WITH STEEL WIRE

ALWAYS USE

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m


	CODE
	90015176

more information on page 45



back





1.0 INDUSTRY

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

3.00kg 3.00kg 3.00kg IP20

shade only

	CODE
	230100T0
	230100B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135


T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

more lamps and specs on page 596



2.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.80kg 3.80kg 3.80kg IP20

shade only

	CODE
	228200B0

OPTIONAL


QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

more lamps and specs on page 594



3.0 GLOBE

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.30kg 2.30kg 2.30kg IP20

shade only

	CODE
	228300W0
	228300B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

ST64 LED E27 6W

	CODE
2200K 450lm	9003E110

more lamps and specs on page 594

WIRO
SHADES WITH STEEL WIRE

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m


	CODE
	90015176

more information on page 45



WIRO

SHADES WITH STEEL WIRE

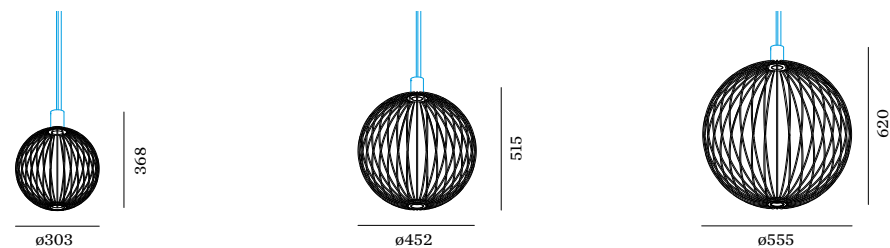

4.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.30kg 0,9~1 IP20

shade only

	CODE
	243100W0
	243100V0
	243100B0

OPTIONAL

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	CODE
2200K 50lm	9003E106
more lamps and specs on page 596	

5.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg 0,9~1 IP20

shade only

	CODE
	243200W0
	243200V0
	243200B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	

6.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

3.30kg 0,9~1 IP20

shade only

	CODE
	243300W0
	243300V0
	243300B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127
more lamps and specs on page 596	

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m


	CODE
	90015176

more information on page 45



WIRO

SHADES WITH STEEL WIRE



2.0 INDUSTRY

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

4.50kg 0.9m IP20

shade only

	CODE
	230200O0
	230200B0

OPTIONAL


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E107

more lamps and specs on page 596



1.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.20kg 0.9m IP20

shade only

	CODE
	228100W0
	228100R0
	228100B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

QA60 LED E27 6W dim

	CODE
2200K 450lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 596

ALWAYS USE

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176


more information on page 45



PRIVATE RESIDENCE GERMANY



WIRO
WALL SURFACE



1.0 CONE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

1.45kg IP20

CODE	
	3341E8VB0
	3341E8BB0

OPTIONAL

T30-225 LED E27 6W


CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	
2200K 50lm	9003E106

QA60 LED E27 6W	
2200K 450lm	9003E109

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594




1.1 CONE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

1.65kg IP20

CODE	
	3342E8VB0
	3342E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 50lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	
2200K 50lm	9003E106


QA60 LED E27 6W	
2200K 450lm	9003E109

QA60 carbon filament E27 15W	
2200K 50lm	9003E124

more lamps and specs on page 594



WIRO
WALL SURFACE




1.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.45kg IP20

CODE	
	3351E8PBO
	3351E8BB0




1.1 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

2.45kg IP20

CODE	
	3352E8PBO
	3352E8BB0

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596



1.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

1.95kg IP20

CODE	
	3353E8WBO
	3353E8VBO
	3353E8BB0

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596




1.1 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

1.95kg IP20

CODE	
	3354E8WBO
	3354E8VBO
	3354E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W


2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596



WIRO

TABLE

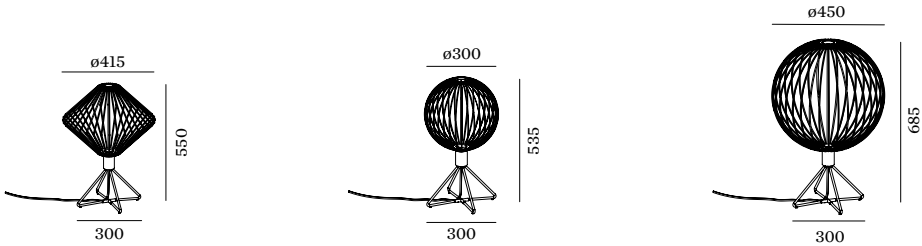


1.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

2.90kg IP20

CODE	
	6603E8PB0
	6603E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K | 50lm 9003E106

more lamps and specs on page 596


1.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

2.20kg IP20

CODE	
	6601E8WB0
	6601E8VB0
	6601E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K | 50lm 9003E106

more lamps and specs on page 596


2.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

3.20kg IP20

CODE	
	6602E8WB0
	6602E8VB0
	6602E8BB0

cable plug with dimmer



OPTIONAL

T30-300 LED E27 6W



CODE	
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

2200K | 50lm 9003E127

more lamps and specs on page 596



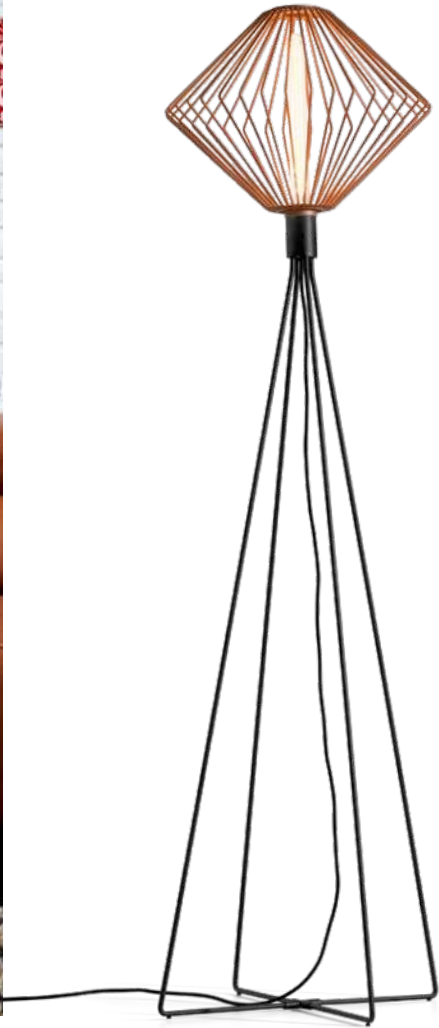


DIAMOND 1.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

5.40kg IP20

CODE	
	6614E8PB0
	6614E8BB0

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596




GLOBE 1.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

6.10kg IP20

CODE	
	6611E8WB0
	6611E8VB0
	6611E8BB0

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E130
2700K 500lm	9003E136

T32-300 carbon filament E27 15W

2200K 50lm	9003E107
--------------	----------

more lamps and specs on page 596




GLOBE 2.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

6.70kg IP20

CODE	
	6612E8WB0
	6612E8VB0
	6612E8BB0

cable plug with dimmer



OPTIONAL

T30-300 LED E27 6W

CODE	
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

2200K 50lm	9003E127
--------------	----------

more lamps and specs on page 596



DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIA SU & MARTIN LESJAK, 13&9 DESIGN

Anastasia Su and Martin Lesjak from the studio 13&9 are completely focused on “transferring the creative energy of a brand to the product itself”. This approach is also reflected in the three collections that the Austrian design team has created exclusively for Wever & Ducré.

First and foremost: the natural shale veneer of ROCK with its expressive character and varying degrees of transparency, which makes every luminaire completely unique. And DRO, for which the two designers have succeeded in permanently capturing the fleeting beauty of a dewdrop. “We dealt intensively with the so-called hydrophobic effect when designing this luminaire,” explains Anastasia Su. “It causes water to bead off or adhere to the surface, thus creating nestling or upright shapes – an aesthetic that made a special impression on us.” Besides finding inspiration in nature, 13&9 also draws upon an abundance of other creative realms such as art, fashion, and architecture – a transdisciplinary approach that is articulated so eloquently in the MIRRO collection designed by Sabrina Stadlober. Both the beholder and the surroundings can be mirrored simultaneously in the reflective metallic surface of the luminaires. A masterful technique that 13&9 employs to create an intense connection between user and product. And that is exactly what makes all of the pieces designed by 13&9 so fascinating.

Anastasia Su und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in den insgesamt drei Kollektionen wider, die das österreichische Designteam exklusiv für Wever & Ducré entworfen hat. Allen voran: die charakterstarke ROCK, deren unterschiedlich transparentes Schieferfurnier jede Leuchte zu einem absoluten Unikat macht. Aber auch die DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasia Su. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“

Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch-reflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.




HAVE A LOOK
weverducre.com/dro





MORE INFOS
weverducre.com/mirro


CURIOUS?
weverducre.com/rock


back



MIRRO
CEILING SURFACE



1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

0.70kg ± IP20

	CODE
	6321E8GB0
	6321E8NB0

2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

1.00kg ± IP20

	CODE
	6322E8GB0
	6322E8NB0

3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

2.10kg ± IP20

	CODE
	6323E8GB0
	6323E8NB0

OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140

OPTIONAL




G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149



1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

0.70kg IP20

2.5m

	CODE
	6341E8GB0
	6341E8NB0

6.0m

	CODE
	6344E8GB0
	6344E8NB0

OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140

2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

1.00kg IP20

2.5m

	CODE
	6342E8GB0
	6342E8NB0

6.0m

	CODE
	6345E8GB0
	6345E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149

3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

2.10kg IP20

2.5m

	CODE
	6343E8GB0
	6343E8NB0

6.0m

	CODE
	6346E8GB0
	6346E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149

MIRRO
CEILING SUSPENDED



HOTEL NEW YORK | USA




1.0 EXTENDED

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with dimmer

0.70kg IP20

	CODE
	6331E8GB0
	6331E8NB0

cable plug with dimmer



OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140

1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

0.70kg IP20

	CODE
	6321E8GB0
	6321E8NB0

OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140

2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

1.00kg IP20

	CODE
	6322E8GB0
	6322E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149

3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

2.10kg IP20

	CODE
	6323E8GB0
	6323E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149

MIRRO
WALL SURFACE




back





HOTEL NEW YORK | USA

MIRRO
TABLE




1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with dimmer

1.30kg IP20

	CODE
	6301E8GB0
	6301E8NB0

cable plug with dimmer



OPTIONAL

	CODE
gold mirror	9003E139
silver mirror	9003E140




back



MIRRO

FLOOR SURFACE




2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with floor switch

3.30kg IP20

	CODE
	6311E8GB0
	6311E8NB0


cable plug with floor switch



OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149




3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with floor switch

3.70kg IP20

	CODE
	6312E8GB0
	6312E8NB0

cable plug with floor switch




OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149






DRO
CEILING SURFACE



BROWN OPAL GLASS
ON



BROWN OPAL GLASS
OFF



1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP20

	CODE
	1721G0WB0
	1721G0YB0

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP20

	CODE
	1722C0WB0
	1722C0YB0

3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

2.70kg IP20

	CODE
	1723E0WB0
	1723E0YB0

OPTIONAL

QT14 LED opal 2.6W

	CODE
2700K 170lm	9019G706
more lamps and specs on page 595	

OPTIONAL

C35 LED E14 6W opal dim

	CODE
2700K 470lm	9003C101
more lamps and specs on page 595	

OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148
more lamps and specs on page 594	




DRO
CEILING SUSPENDED

1.0 LED QT14 max. 3W G9 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium + steel powder coated black textile cable 0.70kg IP20 CODE 2521G0WB0 2521G0YB0	2.0 LED C35 max. 6W E14 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium + steel powder coated black textile cable 1.30kg IP20 CODE 2522C0WB0 2522C0YB0	3.0 QA60 max. 12W E27 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium + steel powder coated black textile cable 2.70kg IP20 CODE 2523E0WB0 2523E0YB0	4.0 QA60 max. 15W E27 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium + steel powder coated black textile cable 4.10kg IP20 CODE 2524E0WB0 2524E0YB0
OPTIONAL QT14 LED opal 2.6W CODE 2700K 170lm 9019G706 more lamps and specs on page 595	OPTIONAL C35 LED E14 6W opal dim CODE 2700K 470lm 9003C101 more lamps and specs on page 595	OPTIONAL QA60 LED E27 9W dim CODE 2800K 810lm 9003E148 more lamps and specs on page 594	OPTIONAL QA60 LED E27 13W dim CODE 2700K 1520lm 9003E131 more lamps and specs on page 594



DRO
WALL SURFACE




1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP44

CODE
3431GOWO
3431GOYO




2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP44

CODE
3432COWO
3432COYO




1.0 COMP

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable | incl. cable
plug with dimmer

2.50kg IP20

CODE
3441GOWBO
3441GOYBO

cable plug with dimmer



OPTIONAL

QT14 LED opal 2.6W

CODE
2700K 170lm
9019G706
more lamps and specs on page 595

OPTIONAL

C35 LED E14 6W opal dim

CODE
2700K 470lm
9003C101
more lamps and specs on page 595

OPTIONAL

QT14 LED opal 2.6W

CODE
2700K 170lm
9019G706
more lamps and specs on page 595






PRIVATE RESIDENCE NETHERLANDS



DRO

TABLE | FLOOR SURFACE




1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
hand switch

0.75kg IP20

CODE
6421G0WB0
6421G0YB0

cable plug with switch




OPTIONAL

QT14 LED opal 2.6W

CODE
2700K | 170lm 9019G706

more lamps and specs on page 595




2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
dimmer

1.30kg IP20

CODE
6422C0WB0
6422C0YB0

cable plug with dimmer




OPTIONAL

C35 LED E14 6W opal dim

CODE
2700K | 470lm 9003C101

more lamps and specs on page 595




3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
dimmer

2.30kg IP20

CODE
6423E0WB0
6423E0YB0

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim


CODE
2800K | 810lm 9003E148

more lamps and specs on page 594



PRIVATE RESIDENCE GERMANY

DRO
TABLE




2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black textile
cable | incl. cable plug with
dimmer

2.30kg IP20

CODE
6432COWB0
6432C0YB0

cable plug with dimmer




OPTIONAL

C35 LED E14 6W opal dim

CODE
2700K | 470lm 9003C101

more lamps and specs on page 595




3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black textile
cable | incl. cable plug with
dimmer

3.30kg IP20

CODE
6433EOWB0
6433E0YB0

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim


CODE
2800K | 810lm 9003E148

more lamps and specs on page 594






PRIVATE RESIDENCE NETHERLANDS

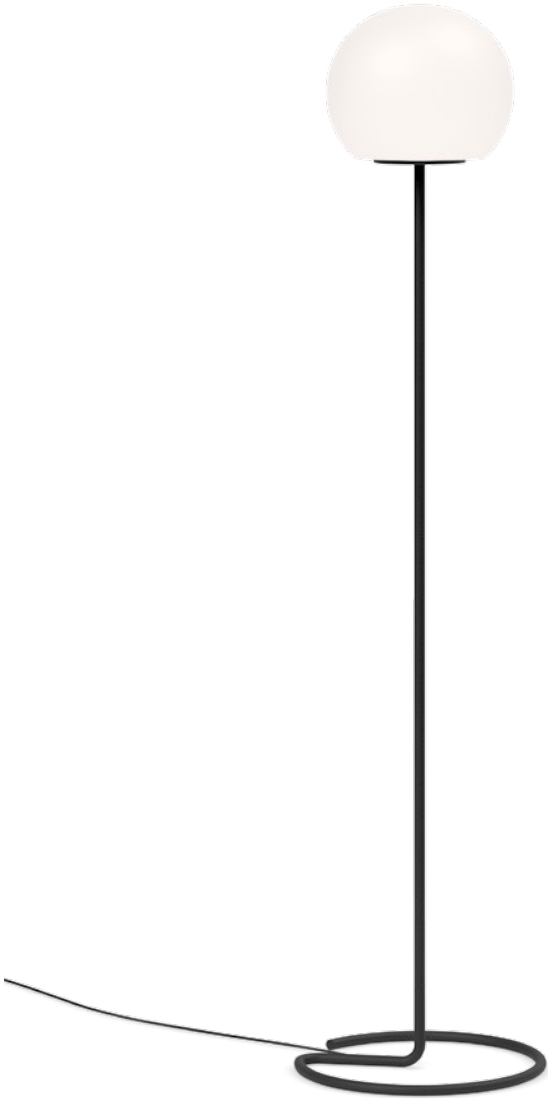

DRO
FLOOR SURFACE




3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black
textile cable | incl. cable plug with
dimmer

5.00kg IP20

CODE	
6442E0WB0	
6442E0YB0	

cable plug with dimmer




OPTIONAL

QA60 LED E27 9W dim

CODE	
2800K 810lm	9003E148

more lamps and specs on page 594




1.0 COMP

3x LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black
textile cable | incl. cable plug with
dimmer

4.60kg IP20

CODE	
6443G0WB0	
6443G0YB0	

cable plug with dimmer



OPTIONAL

QT14 LED opal 2.6W


CODE	
2700K 170lm	9019G706

more lamps and specs on page 595



ROCK COLLECTION

CEILING SUSPENDED



3.0

QA60 max.100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered

⏻ ⏸ ⏹ ⏺ -0,9+D

370mm	CODE
	2201E8W0
	2201E8D0

560mm	CODE
	2203E8W0
	2203E8D0


740mm	CODE
	2205E8W0
	2205E8D0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137
more lamps and specs on page 595	



4.0

QA60 max.100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered

⏻ ⏸ ⏹ ⏺ 3.5-5.5kg IP20 -0,9+D

370mm	CODE
	2202E8W0
	2202E8D0

560mm	CODE
	2204E8W0
	2204E8D0


740mm	CODE
	2206E8W0
	2206E8D0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137
more lamps and specs on page 595	

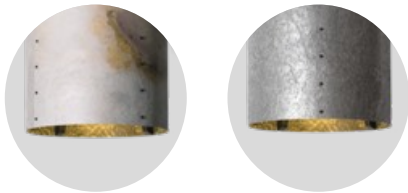


Stone is a pure natural product, there may be deviations from the pictures in shape and colour.



CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA



PRO MEDICO | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA

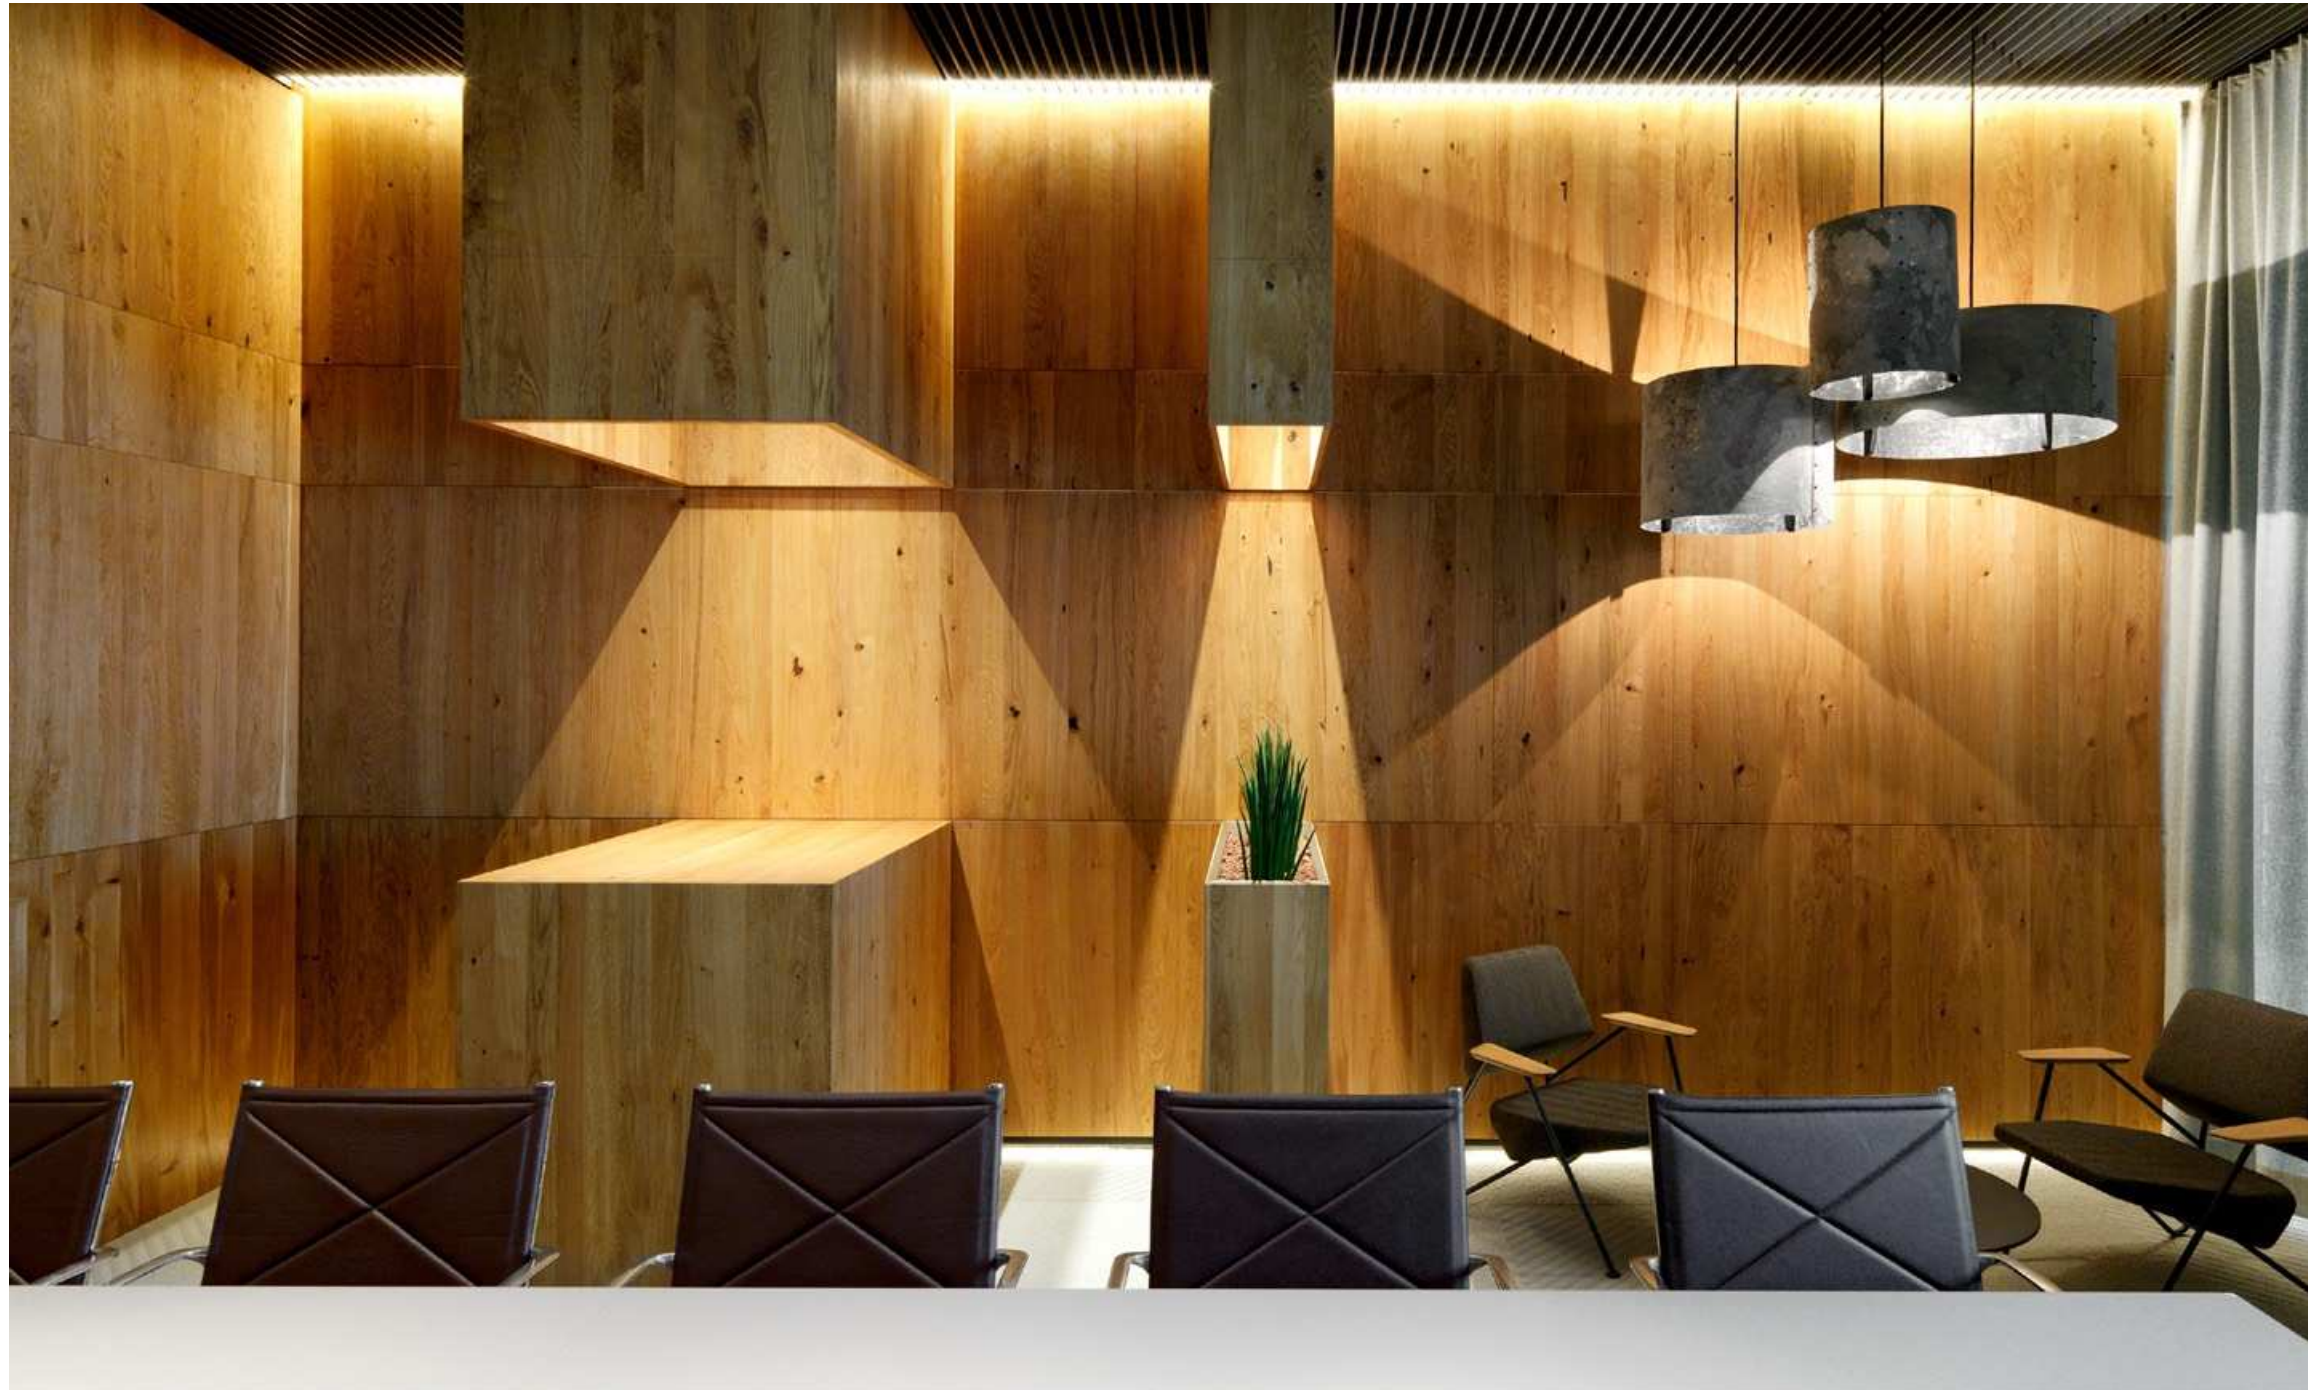




Stone is a pure natural product, there may be deviations from the pictures in shape and colour.

ROCK COLLECTION

FLOOR SURFACE



6.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

6.00kg IP20 0,9

CODE	
2221E8W0	
2221E8D0	


OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137
more lamps and specs on page 595	



7.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

3.50kg IP20 0,9

CODE	
2222E8W0	
2222E8D0	


OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137
more lamps and specs on page 595	



8.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

3.50kg IP20 0,9

CODE	
2241E8W0	
2241E8D0	

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137
more lamps and specs on page 595	




HAIRDRESSER ZEITGEIST | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA
back




PRIVATE RESIDENCE AUSTRIA

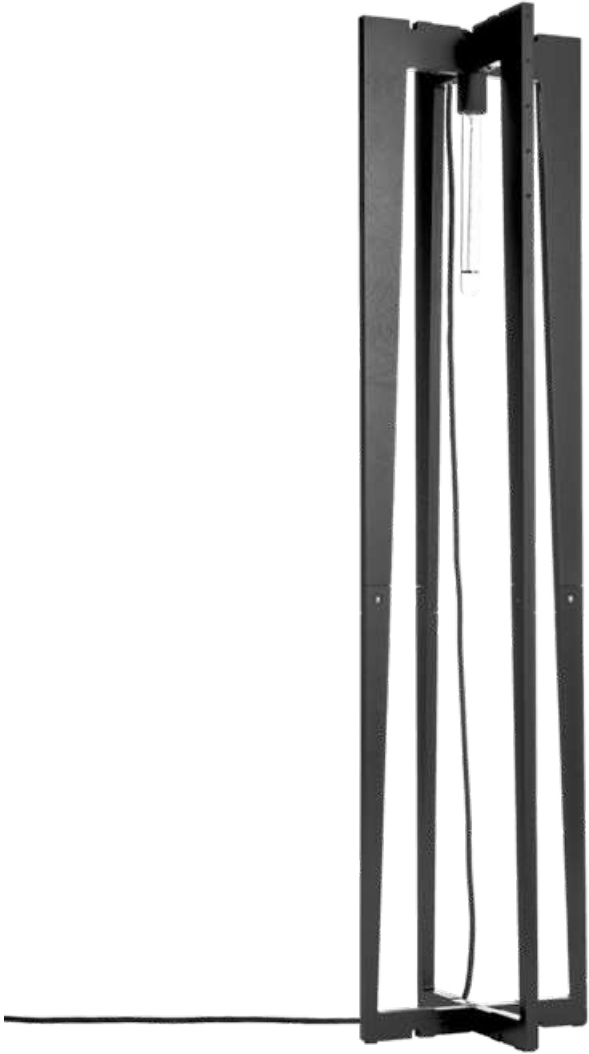

ROCK COLLECTION

FLOOR SURFACE



1.0 NAKED

E27 max.100W
220-240VAC | 50-60Hz
MDF lacquered



CODE
2223E800

OPTIONAL

T32-300 carbon filament E27 15W
CODE
2200K | 50lm 9003E127
more lamps and specs on page 596



DESIGNER

Designing luminaires is a very niche art.

MARCELLO ZILIANI



MORE INFOS

weverducre.com/rever


Wever & Ducré teamed up with renowned designer Marcello Ziliani, who created an eclectic collection of luminaires. The lapels of men's jackets served as a model for the diffusers' shape. The lamp body is composed of a single piece of injection-moulded polycarbonate. Inspired by delicate linens, the surface texture is achieved by a complex, cutting-edge laser technology. Available in a variety of colours and metal finishes, REVER provides every room with an elegant yet warm atmosphere.

In Zusammenarbeit mit dem renommierten italienischen Designer Marcello Ziliani realisierte Wever & Ducré eine eklektische Leuchterserie, die gekonnt zeitloses Design mit Funktionalität verbindet. Modernste Lasertechnologien verleihen der Oberfläche ihre zarte, von Leinen inspirierte Struktur. Der elegante Leuchtenkörper erinnert an ein Herrenanzugrevers. Klingt gut? Dann freut es Sie sicher auch zu hören, dass die REVER-Kollektion in ihrer Vielzahl an Farb- und Oberflächen-Kombinationen perfekt in jede Lobby passt. Und natürlich auch in jedes Hotelzimmer.






PRIVATE RESIDENCE GERMANY



REVER
CEILING SUSPENDED



1.0

LED QA60 max. 15W | E27
metalized or painted ABS
polycarbonate | hanging in
both ways

IP20 3.5kg

lamp body

	CODE
	6521ETG
	6521ESG
	6521ECW
	6521EAY
	6521EHR

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

cable colour


	CODE
	W
	B

6m cable available on request

OPTIONAL

QA60 LED E27 13W dim

	CODE
2700K 1520lm	9003E131



1.0

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate

IP20 1kg

lamp body

	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_

tray colours


	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W dim

	CODE
2700K 470lm	9003C101

REVER
WALL SURFACE



1.1

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate | incl. cable plug
and dimmer


IP20

lamp body

	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_

tray colours

	CODE
	C_
	N_
	G_
	P_
	W_
	B_



Cable Plug Colours
cable plug with dimmer

	CODE
	_W
	_B




PRIVATE RESIDENCE GERMANY



REVER

WALL SURFACE



2.0

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate

IP20 0.7kg

lamp body

	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_


mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W dim

	CODE
2700K 470lm	9003C101



2.1

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate | incl. cable plug
and dimmer


IP20 0.8kg

lamp body

	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_

mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_



Cable Plug Colours
cable plug with dimmer

	CODE
	_W
	_B



PRIVATE RESIDENCE GERMANY




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



REVER

TABLE



1.0

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black
cable

IP20 1.5kg


lamp body

	CODE
	6501ETG_
	6501ESG_
	6501ECW_
	6501EAY_
	6501EHR_

tray colours

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



2.0

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. black cable

IP20 1.1kg 12


lamp body

	CODE
	6502ETG_
	6502ESG_
	6502ECW_
	6502EAY_
	6502EHR_

mounting detail

	CODE
	C

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148






PRIVATE RESIDENCE AUSTRIA



As awarded by
The Chicago Athenaeum:
Museum of Architecture
and Design

REVER DINING

TABLE



1.0

LED 2.5W | 160 lm | 2700 K | touch dim | magnetic pole with optional base | rechargeable li-ion battery incl. 1.5m usb charging cable | lights up to 8 hours powder coated zink alloy | PMMA

IP23 0.8kg

lamp body

	CODE
	655184C2
	655184N2
	655184G2
	655184P2
	655184W2
	655184B2

OPTIONAL

multiple charging tray | up to 4 fixtures


	CODE
	90018007

ALWAYS USE

Magnetic flat plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth powder coated steel

plate colours

	CODE
	90019163
	90019164



ALWAYS USE

Single metal charging tray with magnetic fix to add to REVER DINING plated or powder coated steel

tray colours

	CODE
	90019171
	90019172
	90019173
	90019174
	90019165
	90019166






RESTAURANT FREIGEIST BRAUQUARTIER | FIPE ARCHITECTURE ZT KG & HERZBLUTDESIGN GMBH GRAZ | AUSTRIA



REVER

FLOOR SURFACE



1.0 XS

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable

IP20 4.7kg


lamp body

	CODE
	6531ETG_
	6531ESG_
	6531ECW_
	6531EAY_
	6531EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



1.0 S

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable

IP20 5kg


lamp body

	CODE
	6532ETG_
	6532ESG_
	6532ECW_
	6532EAY_
	6532EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



1.0 M

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable

IP20 5.3kg


lamp body

	CODE
	6533ETG_
	6533ESG_
	6533ECW_
	6533EAY_
	6533EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

cable plug with dimmer




OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



PRIVATE RESIDENCE GERMANY




2.0 M

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable


IP20 5.7kg

lamp body	
	CODE
	6541ETG
	6541ESG
	6541ECW
	6541EAY
	6541EHR

mounting detail	
	CODE
	C
	N
	G
	P
	W
	B



OPTIONAL	
QA60 LED E27 9W dim	
	CODE
2800K 810lm	9003E148




1.0 L

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable


IP20 5.4kg

lamp body	
	CODE
	6534ETG
	6534ESG
	6534ECW
	6534EAY
	6534EHR

mounting detail	
	CODE
	C
	N
	G
	P
	W
	B



OPTIONAL	
QA60 LED E27 9W dim	
	CODE
2800K 810lm	9003E148




2.0 L

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black cable

IP20 5.8kg

lamp body	
	CODE
	6542ETG
	6542ESG
	6542ECW
	6542EAY
	6542EHR

mounting detail	
	CODE
	C
	N
	G
	P
	W
	B



OPTIONAL	
QA60 LED E27 9W dim	
	CODE
2800K 810lm	9003E148



J.J.W. 042



J.J.W. 05



J.J.W. 02




CURIOUS?

weverducre.com/jjw

DESIGNER

You can learn new things from old ones.


JULES WABBES

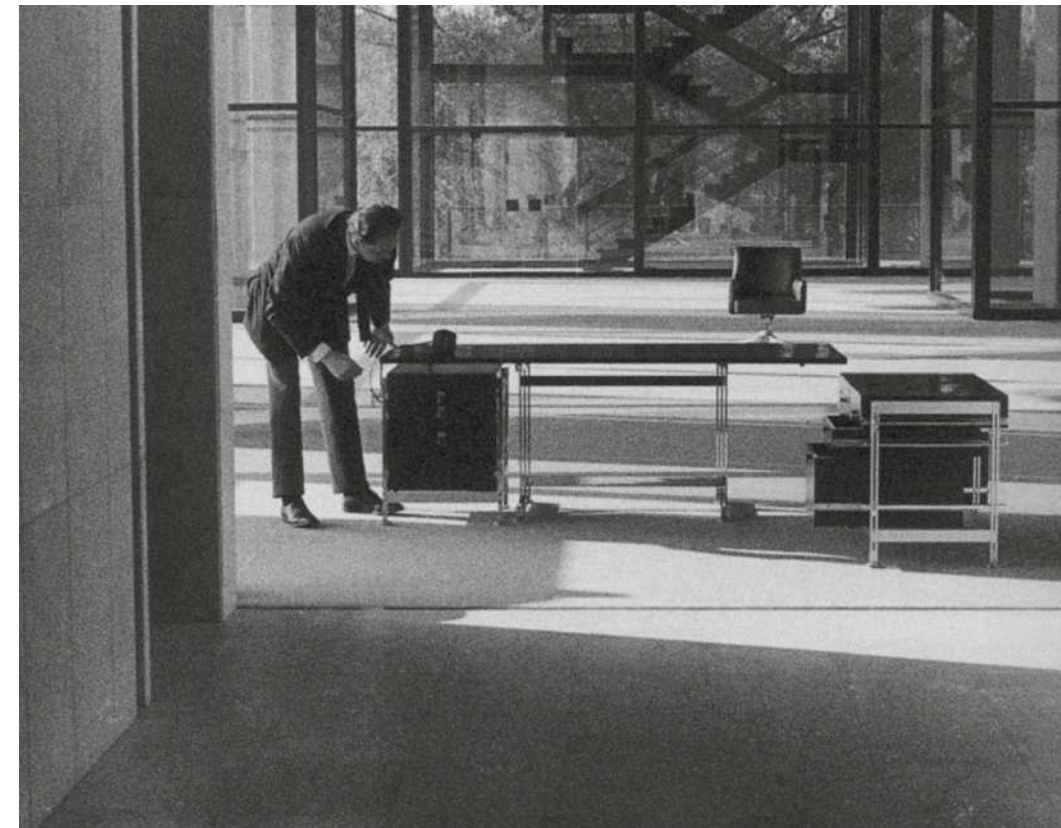

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, © Wabbes Sofam, Brussels, 2017.

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs even today. A primary example: The chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.



J.J.W.
CEILING SURFACE

03

3x QA60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

☑ ⏰ ⚡ ⚙️

CODE	
2051E8S0	
2051E8G0	


OPTIONAL

CODE	
QA60 LED E27 6W dim	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



LE TOISON D'OR | UNSTUDIO / JASPERS-EYERS ARCHITECTS BRUSSEL | BELGIUM



04

6x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.50kg IP20 $\pm 0,9^\circ$


CODE	
	2052E8S0
	2052E8G0

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



042

6x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.10kg IP20 $\pm 0,9^\circ$

CODE	
	2056E8S0
	2056E8G0

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138


more lamps and specs on page 595



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



J.J.W.
CEILING SUSPENDED



05

3x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

⏏ ⏰ ⏻ ⏪ ⏩ ⏴ ⏵

CODE	
	2053E8S0
	2053E8G0



OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595

back

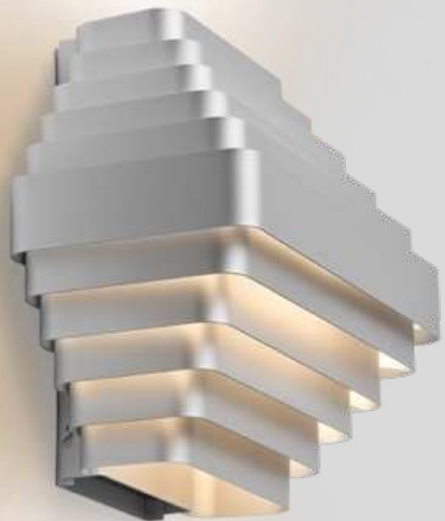

01

2x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

2.92kg IP20 0,9m

CODE	
	2054E8S0
	2054E8G0

OPTIONAL


CODE	
QA60 LED E27 6W dim	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



BAR CHINASKI | ARCHITECT GÖCKMANN & KLEESPIES FRANKFURT AM MAIN | GERMANY

J.J.W.
WALL SURFACE



02

QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered



CODE	
	2055E8S0
	2055E8G0

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



back



CEILING RECESSED

p. 151 — 229



DEEP
p. 153



DEEP ADJUST
p. 159



DEEP ASYM
p. 167



DEEP IP44
p. 169



DEEP 2.0
p. 171



DEEPER
p. 173



DEEPER IP44
p. 175



RONY
p. 179



RON
p. 181




RINI IP44
p. 185



RINI SNEAK IP44
p. 187



PYRAMID
p. 189



SNEAK TRIMLESS
p. 209



HIDE
p. 211



CITY IP44
p. 215



CORY
p. 217



CORO
p. 219



PLANO
p. 191



STRANGE
p. 197




LUNA ROUND IP44
p. 201



LUNA SQUARE IP44
p. 203



LITO
p. 205



SNEAK TRIM
p. 207



MIRBI IP44 1.0
p. 221



MIRBI IP44 2.0
p. 221



SPYDER
p. 223



SPINEO
p. 225



NOP
p. 227



back

HOW DEEP IS YOUR DEEP?



HAVE A LOOK

weverducre.com/deep




THE ALL-ROUNDER

The recessed luminaires in our DEEP series prefer a more understated approach. They prefer to stay out of sight, hidden deep in the ceiling. Their narrow edge makes that possible, allowing them to blend seamlessly with it. This trimless effect makes these space-saving multi-talents particularly popular. Thanks to the recessed installation in a round ceiling cut-out, the visible support is concealed. The result is a particularly attractive, sophisticated look which reduces glare to a minimum. All with minimal effort. Because DEEP is extremely easy to mount and – in contrast to conventional recessed luminaires – also creates a lot of fantastic effects. That's its speciality. With its three different beam options – BASIC, ADJUST, and ASYM – both individual objects and entire walls can be accentuated.

EINE FÜR ALLES


Die Einbauleuchten unserer DEEP-Serie mögen's lieber dezent. Deshalb verstecken sie sich gerne tief in der Decke. Möglich macht's ihr schmaler Rand, der sie nahtlos mit ihr verschmelzen lässt. Dieser Trimless-Effekt macht die platzsparenden Alleskönner natürlich ganz besonders beliebt. Denn durch den in einen runden Deckenausschnitt zurückversetzten Einbau verschwindet die sichtbare Halterung. So wird eine besonders schöne, wertige Optik erzielt und die Blendwirkung auf ein Minimum reduziert. Und das mit minimalem Aufwand. Denn DEEP lässt sich super-easy montieren und sorgt – im Gegensatz zu herkömmlichen Einbauleuchten – auch für viele tolle Effekte. Dafür ist sie nämlich Spezialistin. Denn durch ihre 3 unterschiedlichen Abstrahlvarianten – BASIC, ADJUST und ASYM – lassen sich nicht nur einzelne Objekte, sondern auch ganze Wände toll akzentuieren.



PETIT

may be small, but it has a lot to offer. After all, it can be used as a fixed or as a pivoting spotlight. Very smart.


ist zwar klein, hat aber einiges zu bieten. Denn sie kann als fixer oder schwenkbarer Spot eingesetzt werden. Echt clever.



BASIC

is a classic downlight whose light beam is directed straight downwards. Perfect for corridors or large ceilings.


ist ein klassisches Downlight, dessen Lichtstrahl gerade nach unten verläuft. Perfekt für den Flur oder großflächige Decken.



LED111

provides a great deal of light but has a very shallow installation depth. This translates into bright, friendly rooms with a glare-free light source.


spendet viel Licht, hat aber eine sehr geringe Einbautiefe. Das heißt: helle, freundliche Räume mit blendfreier Lichtquelle.



ADJUST

unlike BASIC, can be pivoted. This makes it easy to put individual objects in the right light.


ist im Unterschied zu BASIC schwenkbar. So können einzelne Objekte ganz einfach ins rechte Licht gerückt werden.



ASYM

is the artist among the recessed luminaires. It can be used to highlight surface structures on the wall.


ist der Künstler unter den Einbauleuchten. Mit ihm lassen sich Oberflächenstrukturen an der Wand gekonnt hervorheben.



IP44

loves the water. That's because water can't do it any harm. So it is the perfect choice for providing brilliant illumination in the bathroom.


liebt Wasser. Und zwar, weil es ihr nichts anhaben kann. Also passt sie gut ins Bad, wo sie für eine brillante Ausleuchtung sorgt.



TWO LAMPS ADJUST

creates a magnificent ceiling visual. For elongated rooms, the light point can be reduced to a single source and lengthened.

kreiert ein tolles Deckenbild. Bei länglichen Räumen kann der Lichtpunkt auf eine Quelle reduziert und langgezogen werden.



DEEPER

eliminates glare and provides optimum illumination for individual seating areas. Perfect for use in bars and restaurants.

blendet nicht und leuchtet einzelne Sitzbereiche optimal aus. Denn sie ist tief in der Decke versenkt. Perfekt für den Bar- und Restaurantbereich.



DENTAL OFFICE CURIOSA | CANDICE BRUNY LYON | FRANCE



DEEP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.04kg IP20 0.3° 34°

68 60 4-25

CODE	
153161W	
153161S	
153161B	


Light Colour Selection			
	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
fits into Kaiser ThermoX® 9320-11



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.31kg IP20 0.3-1° 36°

76 90 4-30

	CODE
	112161W
	112161S
	112161B

blade springs 78

	CODE
	112161W_C
	112161B_C

Light Colour Selection

	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
4000K	580/790 >90	6
1800-2850K 16V 330/450 >95		9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.25kg IP20 0.9-1°

76 90 4-30

	CODE
	112110W0
	112110S0
	112110B0

blade springs 78

	CODE
	112110W0C
	112110B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



p. 587



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.29kg IP20 0.9-1°

76 105 4-30

	CODE
	112120W0
	112120S0
	112120B0

blade springs 78

	CODE
	112120W0C
	112120B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593






PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM



DEEP ADJUST petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.05kg IP20 0.3m 34°

68 35°/35° 355° 60 4-25

CODE	
	153361W_
	153361G_
	153361Q_
	153361B_

blade springs 70

CODE	
	153361W_C
	153361B_C

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
fits into Kaiser ThermoX® 9320-11



back



RESTAURANT BABAR | H & B ARCHITECTS MOESKROEN | BELGIUM



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 35°/35° 355° 90 4-30

	CODE
	112361W
	112361S
	112361G
	112361Q
	112361B

blade springs 89

	CODE
	112361W_C
	112361B_C

Light Colour Selection


	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
4000K	580/790 >90	6
1800-2850K 16V 330/450 >95		9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 35°/35° 355° 90 4-30

	CODE
	112310W0
	112310S0
	112310G0
	112310Q0
	112310B0

blade springs 89

	CODE
	112310W0C
	112310B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 35°/35° 355° 105 4-30

	CODE
	112320W0
	112320S0
	112320G0
	112320Q0
	112320B0

blade springs 89

	CODE
	112320W0C
	112320B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9


more lamps and specs on page 593





DEEP ADJUST

CEILING RECESSED



1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3-1° 38°

177 35°/35° 355° 100 4-30

	CODE
112568W	
112568B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3-1° 30°

177 35°/35° 355° 100 4-30

	CODE
112578W	
112578B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4

1.0 QR111

QR111 max.75W | G53
12V | excl. power supply
aluminium powder coated

0.41kg IP20 0.9-1°

177 35°/35° 355° 100 4-30

	CODE
112530W0	
112530B0	

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591




DEEP ASYM

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.25kg IP20 35°/35° 355° 100 4-30

87 35°/35° 355° 100 4-30

	CODE
112461W	112461W
112461S	112461S
112461G	112461G
112461B	112461B

Light Colour Selection

	LUMEN CRI	CODE
2700K	450/610 >90	3
3000K	470/640 >90	5
1800-2850K	16V 290/390 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.19kg IP20 35°/35° 355° 90 4-30

87 35°/35° 355° 90 4-30

	CODE
112410W0	112410W0
112410S0	112410S0
112410G0	112410G0
112410B0	112410B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.23kg IP20 35°/35° 355° 115 4-30

87 35°/35° 355° 115 4-30

	CODE
112420W0	112420W0
112420S0	112420S0
112420G0	112420G0
112420B0	112420B0

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



PRIVATE RESIDENCE | ARCHITECT REFUGE FRANCE



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.32kg | IP44 | 0.3+D | 36°

87 | 90 | 4-30

CODE	
	112661W_
	112661B_

blade springs | 89

CODE	
	112661W_C
	112661B_C

Light Colour Selection


	LUMEN CRI	CODE
2700K	470/630 >90	3
3000K	490/660 >90	5
1800-2850K 16V 300/400 >95		9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.26kg | IP44 | 0.9+D

87 | 90 | 4-30

CODE	
	112610W0
	112610B0

blade springs | 89

CODE	
	112610W0C
	112610B0C


ALWAYS USE

power supply

CODE	
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

DEEP IP44
CEILING RECESSED



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.30kg | IP44 | 0.9+D

87 | 105 | 4-30

CODE	
	112620W0
	112620B0

blade springs | 89

CODE	
	112620W0C
	112620B0C

OPTIONAL



PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



PRIVATE RESIDENCE | ROACH YOUNG STUDIO UNITED KINGDOM



DEEP 2.0

CEILING RECESSED



p. 587

2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.61kg IP20 0,3° 36°

87x176 35°/35° 355° 90 4-30

	CODE
	112761W
	112761B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x520/710	>90	3
3000K	2x540/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg IP20 0,9°

87x176 35°/35° 355° 105 4-30

	CODE
	112720W0
	112720B0

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



back



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg IP20 360° 36°

76 95 4-30

	CODE
152161W	152161W
152161S	152161S
152161Q	152161Q
152161B	152161B

Light Colour Selection


	LUMEN CRI	CODE
2700K	440/590 >90	3
3000K	450/620 >90	5
1800-2850K 16V	280/370 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg IP20 90°

76 100 4-30

	CODE
152110W0	152110W0
152110S0	152110S0
152110Q0	152110Q0
152110B0	152110B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904


more specs on page 591

DEEPER

CEILING RECESSED



p. 587



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg IP20 90°

76 115 4-30

	CODE
152120W0	152120W0
152120S0	152120S0
152120Q0	152120Q0
152120B0	152120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




DEEPER IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg | IP44 | 36°

76 | 95 | 4-30

	CODE
	152261W
	152261B

Light Colour Selection

	LUMEN CRI	CODE
2700K	440/590 >90	3
3000K	450/620 >90	5
1800-2850K 16V	280/370 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg | IP44

76 | 100 | 4-30

	CODE
	152210W0
	152210B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg | IP44

76 | 115 | 4-30

	CODE
	152220W0
	152220B0


OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 35°/35° 355° 90° 4-40

	CODE
	110161W_
	110161B_

blade springs

	CODE
	110161W_C
	110161B_C

Light Colour Selection

	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K 16V 330/450 >95		9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.28kg IP20 35°/35° 355° 75° 4-40

	CODE
	110110W0
	110110B0

blade springs

	CODE
	110110W0C
	110110B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.32kg IP20 35°/35° 355° 100° 4-40

	CODE
	110120W0
	110120B0

blade springs


	CODE
	110120W0C
	110120B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
round cut-out for mounting

0.36kg IP20 36°

102 35°/35° 355° 90 4-40

	CODE
	111161W
	111161B

blade springs

	CODE
	111161W_C
	111161B_C

Light Colour Selection


	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K 16V	330/450 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut-out for mounting

0.30kg IP20

102 35°/35° 355° 75 4-40

	CODE
	111110W0
	111110B0

blade springs

	CODE
	111110W0C
	111110B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

RON
CEILING RECESSED



p. 587



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut-out for mounting

0.34kg IP20

102 35°/35° 355° 100 4-40

	CODE
	111120W0
	111120B0

blade springs

	CODE
	111120W0C
	111120B0C

OPTIONAL





PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



PRIVATE RESIDENCE | SIGGA ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TECLUX OY + SIGGE / ANTTI KORPI FINLAND



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.73kg IP20 0,3° 36°

102x210 35°/35° 355° 90 4-40

	CODE
	111261W_
	111261B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	2x520/710 >90	3
3000K	2x540/740 >90	5
1800-2850K	2x330/450 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP20 0,9°

102x210 35°/35° 355° 100 4-40

	CODE
	111220W0
	111220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

3.0 LED

3xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

1.08kg IP20 0,3° 36°

102x320 35°/35° 355° 90 4-40

	CODE
	111361W_
	111361B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	3x520/710 >90	3
3000K	3x540/740 >90	5
1800-2850K	3x330/450 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

3.0 PAR16

3xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.02kg IP20 0,9°

102x320 35°/35° 355° 100 4-40

	CODE
	111320W0
	111320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

RON
CEILING RECESSED



p. 587





RINI IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.16 kg | IP44 | 0.3-1° | 36°

76 | 60 | 4-30

CODE		
	154161W	
	154161B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	470/640 >90	3
3000K	490/660 >90	5
1800-2850K 16V 300/400 >95		9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.10 kg | IP44 | 0.9-1°

76 | 70 | 4-30

CODE	
	154110W0
	154110B0

ALWAYS USE

power supply

CODE	
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.14 kg | IP44 | 0.9-1°

76 | 95 | 4-30

CODE	
	154120W0
	154120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593






RINI SNEAK IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.18 kg | IP44 | 0,3° | 6 | 36°

76 | 46 | 4-30

	CODE
	154261W_
	154261B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	460/620	>90	3
3000K	480/640	>90	5
1800-2850K	16V 290/390	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.12 kg | IP44 | 0,9° | 6

76 | 55 | 4-30

	CODE
	154210W0
	154210B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.16 kg | IP44 | 0,9° | 6

76 | 80 | 4-30

	CODE
	154220W0
	154220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593






PRIVATE RESIDENCE | CASA LLAMP | MALLORCA PRIME SPAIN

PYRAMID

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.28kg IP20 35°/35° 355° 90 4-30

CODE
113161W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	490/660	>90	3
3000K	500/680	>90	5
1800-2850K	310/410	>95	9

ALWAYS USE

power supply

CODE
350mA 10W 90223401
500mA 10W 90214404
500mA 15W dim 90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.26kg IP20 35°/35° 355° 115 4-30

CODE
113120W0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 593

2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.50kg IP20 35°/35° 355° 90 4-30

CODE
113261W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x490/660	>90	3
3000K	2x500/680	>90	5
1800-2850K	2x310/410	>95	9

ALWAYS USE

power supply

CODE
350mA 10W 90223401
500mA 10W 90214404
500mA 15W dim 90224501

more power supplies on page 588

2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.46kg IP20 35°/35° 355° 115 4-30



CODE
113220W0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 593



1.0 LED

 LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

 0.08kg  IP20  34°

 54x59  25°/25°  355°  65  2-22

CODE		
	162161W	
	162161Q	
	162161B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588



2.0 LED

 2xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

 0.15kg  IP20  34°

 54x110  25°/25°  355°  65  2-22

CODE		
	162261W	
	162261Q	
	162261B	

Light Colour Selection


	LUMEN	CRI	CODE
2700K	2x580	>90	3
3000K	2x610	>90	5
1800-2700K 15V	2x360	>95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588



3.0 LED

 3xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

 0.22kg  IP20  34°

 54x162  25°/25°  355°  65  2-22

CODE		
	162361W	
	162361Q	
	162361B	

Light Colour Selection


	LUMEN	CRI	CODE
2700K	3x580	>90	3
3000K	3x610	>90	5
1800-2700K 15V	3x360	>95	9

ALWAYS USE





power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588



p. 587



1.0 LED

 LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

 0.26kg  IP20  36°

 74x78  35°/35°  355°  95  2-18

	CODE
	118161W
	118161S
	118161Q
	118161B

Light Colour Selection

	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K	330/450 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

OPTIONAL

	CODE
plasterkit	90017104

1.0 PAR16

 PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 0.24kg  IP20  36°

 74x78  35°/35°  355°  120  2-18

	CODE
	118120W0
	118120S0
	118120Q0
	118120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

	CODE
plasterkit	90017104

2.0 LED

 2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

 0.48kg  IP20  36°

 74x148  35°/35°  355°  95  2-18

	CODE
	118261W
	118261S
	118261Q
	118261B

Light Colour Selection

	LUMEN CRI	CODE
2700K	2x520/710 >90	3
3000K	2x540/740 >90	5
1800-2850K	2x330/450 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501


more power supplies on page 588

OPTIONAL

	CODE
plasterkit	90017105

PLANO

CEILING RECESSED



2.0 PAR16

 2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 0.44kg  IP20  36°

 74x148  35°/35°  355°  120  2-18

	CODE
	118220W0
	118220S0
	118220Q0
	118220B0

OPTIONAL




PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

	CODE
plasterkit	90017105



1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3° 38°

141x145 35°/35° 355° 90° 2-18

	CODE
	118368W
	118368S
	118368B

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

OPTIONAL

	CODE
plasterkit	90017106

1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3° 30°

141x145 35°/35° 355° 90° 2-18

	CODE
	118378W
	118378S
	118378B

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4

OPTIONAL

	CODE
plasterkit	90017106

1.0 QR111

QR111 max.75W | G53
12V | excl. power supply
aluminium powder coated

0.41kg IP20 0.9°

141x145 35°/35° 355° 90° 2-18

	CODE
	118330W0
	118330S0
	118330B0

ALWAYS USE




power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

OPTIONAL

	CODE
plasterkit	90017106



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.07kg IP20 31°

25°/25° 355° 47

	CODE
	163161W
	163161B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

plastic plasterkit 65x65 10 or 13

	CODE
	90017200
	90017201

aluminium plasterkit 64x64 7-17

	90017202
--	----------

power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

2.0 LED

2xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.13kg IP20 31°

25°/25° 355° 47

	CODE
	163261W
	163261B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x580	>90	3
3000K	2x610	>90	5
1800-2700K 15V	2x360	>95	9

ALWAYS USE

plastic plasterkit 67x118 10 or 13

	CODE
	90017203
	90017204

aluminium plasterkit 64x115 7-17

	90017205
--	----------

power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

3.0 LED

3xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.19kg IP20 31°

25°/25° 355° 47

	CODE
	163361W
	163361B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x580	>90	3
3000K	3x610	>90	5
1800-2700K 15V	3x360	>95	9

ALWAYS USE

plastic plasterkit 68x168 10 or 13

	CODE
	90017206
	90017207


aluminium plasterkit 64x167 7-17

	90017208
--	----------


power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

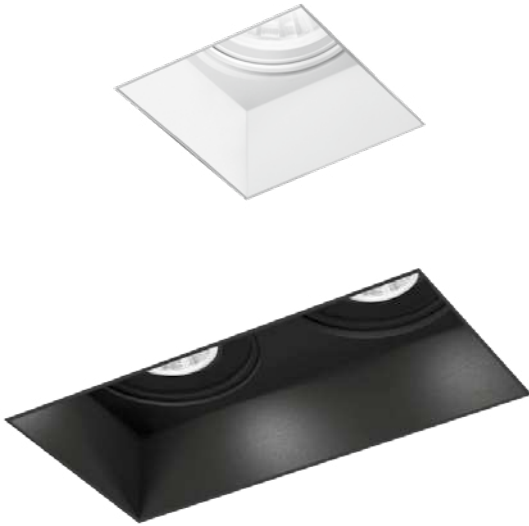

p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.43kg IP20 35°/35° 355° 95

86x86 35°/35° 355° 95

	CODE
	131161W
	131161B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	500/680	>90	3
3000K	520/710	>90	5
1800-2850K	320/430	>95	9

ALWAYS USE

plastic plasterkit 10 or 13

	CODE
	90017122
	90017116


aluminium plasterkit 4-25

	90017120
--	----------

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 35°/35° 120

86x86 35°/35° 355° 120

	CODE
	131120W0
	131120B0

ALWAYS USE

plastic plasterkit 10 or 13

	CODE
	90017122
	90017116

aluminium plasterkit 4-25


	90017120
--	----------

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.74kg IP20 35°/35° 95

86x156 35°/35° 355° 95

	CODE
	131261W
	131261B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x500/680	>90	3
3000K	2x520/710	>90	5
1800-2850K	2x320/430	>95	9

ALWAYS USE

plastic plasterkit 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 4-25

	90017121
--	----------


power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

STRANGE

CEILING RECESSED



2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.70kg IP20 35°/35° 120

86x156 35°/35° 355° 120

	CODE
	131220W0
	131220B0

ALWAYS USE

plastic plasterkit 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 4-25

	90017121
--	----------

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



LUNA ROUND IP44

CEILING RECESSED



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal cover | polyamide| PMMA

0.18kg | IP44 | 76 | 50 | 2-25

3000K | >90 CRI | 350lm


	CODE
	114388W5
	114388M5
	114388B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.19kg | IP44 | 80 | 100 | 2-25

	CODE
	114381W
	114381M
	114381B

Light Colour Selection

	LUMEN CRI	CODE
2700K	370/500 >90	3
3000K	390/520 >90	5
1800-2850K 16V	230/320 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass | polyamide

0.24kg | IP44 | 80 | 120 | 2-25

	CODE
	114120W0
	114120M0
	114120B0


OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

	CODE
recessed housing	90012026
plasterkit	90017101



1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.28kg | IP44 | 80 | 100 | 2-25

	CODE
	114110W0
	114110M0
	114110B0

ALWAYS USE



power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal cover | polyamide | PMMA

0.19kg | IP44 | 0.3m | P

72x72 | 50 | 2-25

3000K | >90 CRI | 350lm


	CODE
	114488W5
	114488M5
	114488B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.20kg | IP44 | 0.3m | G

76x76 | 100 | 2-25

	CODE
	114481W
	114481M
	114481B

Light Colour Selection

	LUMEN CRI	CODE
2700K	370/500 >90	3
3000K	390/520 >90	5
1800-2850K 16V 230/320 >95		9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501


more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102

LUNA SQUARE IP44

CEILING RECESSED



1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass | polyamide

0.26kg | IP44 | 0.9m | G

76x76 | 120 | 2-25

	CODE
	114220W0
	114220M0
	114220B0


OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

	CODE
recessed housing	90012026
plasterkit	90017102



1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.28kg | IP44 | 0.9m | G

76x76 | 100 | 2-25

	CODE
	114210W0
	114210M0
	114210B0

ALWAYS USE



power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102



1.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

2.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201



more power supplies on page 588

LITO

CEILING RECESSED



p. 385



1.0 LED

LED LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 0.3° 28°

74x78 35°/35° 355° 95 2-18

	CODE
	155351W_
	155351B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	390/520	>90	3
3000K	400/540	>90	5
1800-2850K	240/330	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 LED

LED 2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 0.3° 28°

74x148 35°/35° 355° 95 2-18

	CODE
	155451W_
	155451B_

Light Colour Selection


	LUMEN	CRI	CODE
2700K	2x390/520	>90	3
3000K	2x400/540	>90	5
1800-2850K	2x240/330	>95	9

ALWAYS USE

power supply



	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588







PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

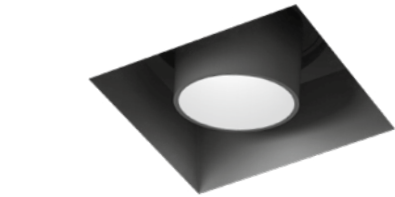

SNEAK TRIMLESS

CEILING RECESSED



1.0 LED

LED LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 35°/35° 355° 95°

86x86 35°/35° 355° 95°

CODE	
155151W	
155151B	

Light Colour Selection

LUMEN	CRI	CODE
2700K	390/520 >90	3
3000K	400/540 >90	5
1800-2850K	240/330 >95	9

ALWAYS USE

plastic plasterkit 10 or 13

CODE	
90017122	
90017116	

aluminium plasterkit 4-25

	90017120
--	----------

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 LED

LED 2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 35°/35° 355° 95°

86x156 35°/35° 355° 95°

CODE	
155251W	
155251B	

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x390/520 >90	3
3000K	2x400/540 >90	5
1800-2850K	2x240/330 >95	9

ALWAYS USE

plastic plasterkit 10 or 13

CODE	
90017123	
90017117	



aluminium plasterkit 4-25

	90017121
--	----------

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.43kg IP20 0.3° 36°

45/45° 10° 125 4-25

	CODE
	117161W
	117161S
	117161B

Light Colour Selection

	LUMEN CRI	CODE
2700K	540/730 >90	3
3000K	560/710 >90	5
1800-2850K 16V 340/460 >95		9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 0.9°

45/45° 13° 125 4-25

	CODE
	117120W0
	117120S0
	117120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

ALWAYS USE

recessed housing + plasterkit

one lamp | 111x111x117mm

115x115 125 4-25

	CODE
	90012009
	90012017

two lamps | 208x111x117mm

212x115 125 4-25

	CODE
	90012010
	90012018

three lamps | 302x111x117mm

306x115 125 4-25

	CODE
	90012011
	90012019

four lamps | 398x111x117mm

402x115 125 4-25

	CODE
	90012012
	90012020


more information on page 601

HIDE

CEILING RECESSED



p. 587



back

HIDDEN CHAMPIONS

FLAT'N'FANCY

Sleek built-in luminaires like CITY, RINI, LITO and LUNA are subtle, elegant and let every room shine in the brightest light. No wonder the space-saving allrounders are among the most popular lighting choices these days. Nevertheless: There are some requirements you'll need to consider when mounting recessed luminaires. Especially low ceilings in modern living spaces or too little space in the suspended ceilings can be really tricky – and every centimetre counts! The solution: extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specifically designed for low ceilings with low installation depths and are not only true spacesavers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten wie CITY, RINI, LITO und LUNA halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

mounting depth
4-6 cm




CITY IP44

UPDATE

CEILING RECESSED

LOW



1.6

LED 13W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover


0.64 kg IP44 0.3 P

202 50 4-30

CODE
115184W

Light Colour Selection

LUMEN	CRI	CODE
2700K	770 >90	3
3000K	840 >90	5



2.6

LED 18W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover


1.05 kg IP44 0.3 P

297 50 4-30

CODE
115284W

Light Colour Selection

LUMEN	CRI	CODE
2700K	1160 >90	3
3000K	1260 >90	5



3.5

LED 32W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

1.70 kg IP44 0.3 P

387 50 4-30

CODE
115384W

Light Colour Selection

LUMEN	CRI	CODE
2700K	1730 >90	3
3000K	1850 >90	5








HOTEL LAGUNA PARK BIBIONE | ITALY



CORY
CEILING RECESSED



p. 275

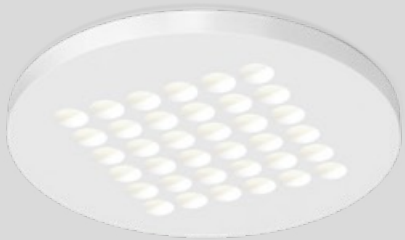

1.3

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.47kg IP20 3~0.3~D

68 70 4-40

3000K | >85 CRI | 930lm

CODE
126274W4

1.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.52kg IP20 3~0.3~D

68 70 4-40

3000K | >85 CRI | 1550lm

CODE
126374W4

3000K | >85 CRI | 1500lm | IP44 | no dim
CODE
147373W4

1.9

LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.63kg IP20 3~0.3~D

68 70 4-40

3000K | >85 CRI | 1820lm

CODE
126474W4

2.6

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.99kg IP20 3~0.3~D

86 70 4-40

3000K | >85 CRI | 2130lm

CODE
126674W4










OFFICE | J.CON BÜHL | GERMANY



CORO
CEILING RECESSED



p. 277

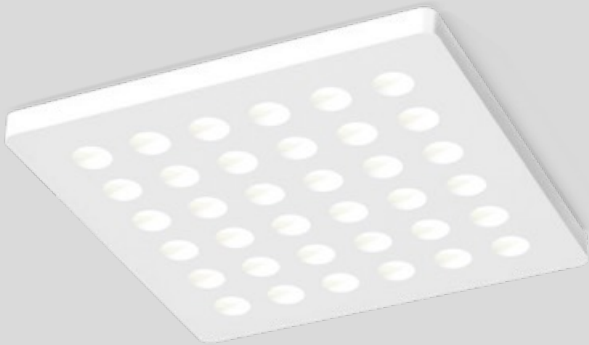

1.1

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.37kg IP20 3~0,3~D

68 70 4-40

3000K | >85 CRI | 783lm

CODE
127374W4

1.3

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.43kg IP20 3~0,3~D

68 70 4-40

3000K | >85 CRI | 1550lm

CODE
127474W4

3000K | >85 CRI | 1500lm | IP44 | no dim
CODE
148473W4

2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.79kg IP20 3~0,3~D

86 70 4-40

3000K | >85 CRI | 2130lm

CODE
127774W4

2.5


LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

1.21kg IP20 3~0,3~D

86 70 4-40

3000K | >85 CRI | 2810lm





CODE
127874W4





MIRBI IP44 2019

CEILING RECESSED



1.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.24kg IP44 0.3-1 P

76 50 2-25

3000K | >90 CRI | 440lm

	CODE
	11458805

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

2.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.26kg IP44 0.3-1 P

72x72 50 2-25

3000K | >90 CRI | 440lm

	CODE
	11468805

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

3.0

LED 20W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

2.00kg IP44 0.3-1 P

230x230 50 2-25

3000K | >90 CRI | 1200lm

	CODE
	11478805

OPTIONAL

	CODE
recessed housing	90012045
plasterkit	90017124

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



available from autumn 2019





SPYDER

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | steel powder coated

1.10kg IP20 0.3-0.9 36°

145 85° 355° 90 4-25

CODE	
124161W	
124161E	

Light Colour Selection

	LUMEN CRI	CODE
2700K	480/650 >90	3
3000K	500/680 >90	5
1800-2850K 16V	310/410 >95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium | steel powder coated

1.10kg IP20 0.9-0.9

145 85° 355° 90 4-25

CODE	
124120W0	
124120E0	

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



1.0 LED

LED AC MOD 8W | 220-240V
COB 3-step | incl. PS | phase cut dim
aluminium powder coated

0.20kg IP20 36°

80 28°/28° 355° 70 4-18

wire springs

	CODE
	160168W_
	160168B_

blade springs

	CODE
	160168W_C
	160168B_C

Light Colour Selection

	LUMEN CRI	CODE
2700K	480 >90	3
3000K	500 >90	5

fits into Kaiser ThermoX® 9320-21



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
matt chrome

0.14kg IP20 0,9+D

80 35°/35° 355° 70 4-18

wire springs

	CODE
	160110W0
	160110B0

blade springs

	CODE
	160110W0C
	160110B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591


fits into Kaiser ThermoX® 9320-21

SPINEO

CEILING RECESSED



p. 587



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
matt chrome

0.18kg IP20 0,9+D

80 35°/35° 355° 70 4-18

wire springs

	CODE
	160120W0
	160120B0

blade springs

	CODE
	160120W0C
	160120B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

fits into Kaiser ThermoX® 9320-21




PRIVATE RESIDENCE BELGIUM



NOP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated
round cut out for mounting

0.18kg IP20 3~0.3~1 A 34°
68 35°/35° 355° 60 4-15

CODE	
	130561W_
	130561S_
	130561B_

blade springs

CODE	
	130561W_C
	130561S_C
	130561B_C





Light Colour Selection			
	LUMEN	CRI	CODE
2700K	560	>90	3
3000K	580	>90	5
1800-2700K 15V	350	>95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
fits into Kaiser ThermoX® 9320-11



1.0 LED

 LED AC MOD 8W | 220-240V
COB 3-step | incl. PS | phase cut dim
aluminium powder coated
round cut out for mounting

 0.26kg  IP20  30°-36°

 82  30°/30°  355°  95  4-32

	CODE
	130468W_
	130468S_
	130468B_

blade springs  86

	CODE
	130468W_C
	130468S_C
	130468B_C

Light Colour Selection

	LUMEN CRI	CODE
2700K	480 >90	3
3000K	500 >90	5

fits into Kaiser ThermoX® 9320-21

1.0 MR16

 QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut out for mounting

 0.11kg  IP20  35°-36°

 82  35°/35°  76  4-32

	CODE
	130410W0
	130410S0
	130410B0

blade springs  86

	CODE
	130410W0C
	130410S0C
	130410B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

fits into Kaiser ThermoX® 9320-21

1.0 PAR16

 PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut out for mounting

 0.14kg  IP20  35°-36°

 82  35°/35°  83  4-32

	CODE
	130420W0
	130420S0
	130420B0

blade springs  86

	CODE
	130420W0C
	130420S0C
	130420B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

fits into Kaiser ThermoX® 9320-21

NOP

CEILING RECESSED



p. 587




back

CEILING SURFACE

p. 233 — 305



Explore our Designer
Families from p. 23 -147



VENN
p. 233



BEBOW
p. 235



SOLID
p. 239



SIRRA
p. 243



SIRRO
p. 245



BOX
p. 249



DOCUS
p. 255



HEXO
p. 259



RAY
p. 265



ROB IP44
p. 269



ROBY IP44
p. 271



TOWNA IP44
p. 273



SARA ON TRACK
p. 285



TORCO ON TRACK
p. 287




CORY
p. 275



CORO
p. 277



MIRBI IP44 1.0
p. 279



MIRBI IP44 3.0
p. 279



PLUXO ON TRACK
p. 281




SARA ON BASE
p. 283






SQUBE ON BASE
p. 289



SQUBE ON TRACK
p. 295

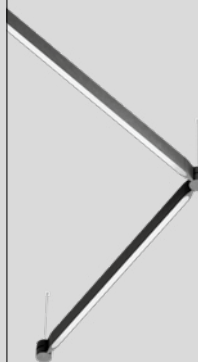

ELLO SYSTEM
p. 303

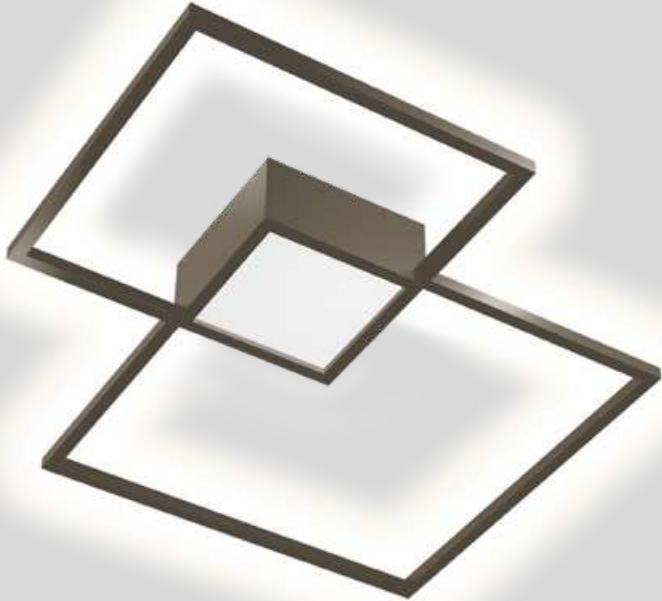

1.0

 LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect light

   2.50kg  IP20   

	CODE
	149184W_
	149184Q_
	149184B_

DALI

	CODE
	149185W_
	149185Q_
	149185B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4

2.0

 LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | dir./indir. light

   2.50kg  IP20  

	CODE
	149284W_
	149284Q_
	149284B_

DALI


	CODE
	149285W_
	149285Q_
	149285B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM




1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg IP20

3000K | >90 CRI | 1820lm

CODE
132184W5
132184B5



2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg IP20

3000K | >90 CRI | 2650lm

CODE
132164W5
132164B5



BEBOW

UPDATE

CEILING SURFACE

mm

mm

p. 335

353

1446

270

180

1446

270

127

629

353

128

353

1446

270

180

1446

270

127

629

353

128

3.0

LED 35W | 220-240VAC | 50-60Hz

PCB 3-step | incl. PS | phase-cut dim

opal cover | two circuits

aluminium powder coated

opal PMMA cover

8.00kg

IP20

±0.3°

3000K | >90 CRI | 1910lm

CODE

132284W5

132284B5

4.0

LED 48W | 220-240VAC | 50-60Hz

PCB 3-step | incl. PS | phase-cut dim

opal cover + 2x spot | two circuits

aluminium powder coated

opal PMMA cover

8.30kg

IP20

±0.3°

3000K | >90 CRI | 2350lm

CODE


132264W5

132264B5


back

WEVER & DUCRÉ 236 – 237

DESIGNED BY S&R CORNELISSEN

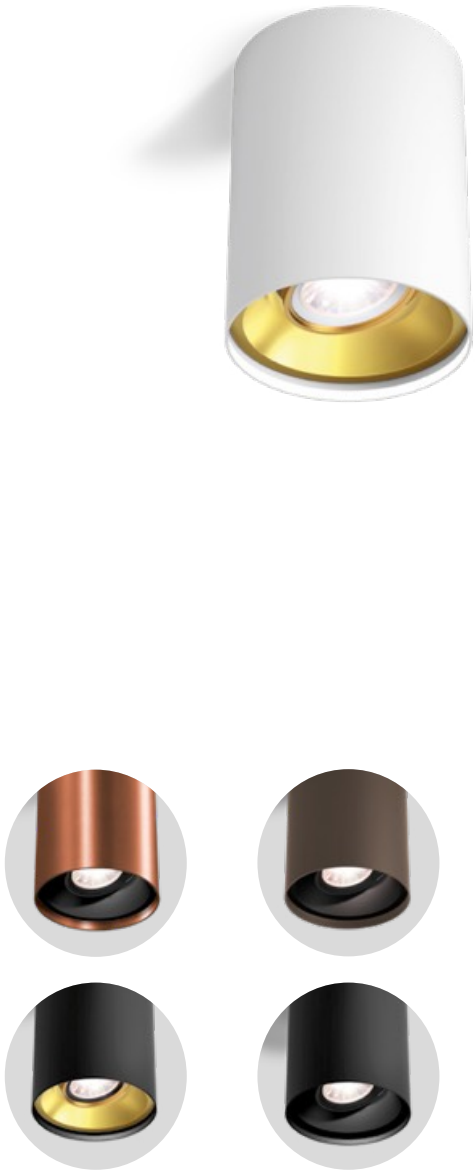

SOLID
CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.65kg IP20 36°

25°/25° 355°

	CODE
	133164W
	133164J
	133164K
	133164P
	133164Q
	133164B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	470	>90	5
1800-2850K	410	>95	9



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.61kg IP20 36°

25°/25° 355°

	CODE
	133120W0
	133120J0
	133120K0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA




OFFICE AVENUE ANTWERPEN | BELGIUM
back

WEVER & DUCRÉ 240 – 241



PRIVATE RESIDENCE BELGIUM



1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.86kg IP20 36°


35°/35° 355°

CODE	
	134164W
	134164E
	134164F
	134164B

Light Colour Selection

LUMEN CRI			CODE
2700K	590	>90	3
3000K	640	>90	5
1800-2850K 16V	440	>95	9

SIRRA
CEILING SURFACE



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.74kg IP20 36°

35°/35° 355°

CODE	
	134120W0
	134120E0
	134120F0
	134120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



back





FAIR BOOTH | BIS BEURS | GINO VANHOUTTE GENT | BELGIUM

SIRRO

CEILING SURFACE



p. 587



1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.85kg IP20 35°/35° 355°

35°/35° 355°

	CODE
139164W	
139164E	
139164F	
139164B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	640	>90	5
1800-2850K 16V	440	>95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.81kg IP20 35°/35° 355°

35°/35° 355°


	CODE
139120W0	
139120E0	
139120F0	
139120B0	

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





SIRRO
CEILING SURFACE



2.0 LED


2xLED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

1.57kg IP20 35°/35° 355°

	CODE
	139264W
	139264E
	139264F
	139264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x590	>90	3
3000K	2x640	>90	5
1800-2850K 16V	2x440	>95	9



2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 35°/35° 355°


	CODE
	139220W0
	139220E0
	139220F0
	139220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



3.0 LED


3xLED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

2.21kg IP20 35°/35° 355°

	CODE
	139364W
	139364E
	139364F
	139364B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x590	>90	3
3000K	3x640	>90	5
1800-2850K 16V	3x440	>95	9



3.0 PAR16

3xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 35°/35° 355°




	CODE
	139320W0
	139320E0
	139320F0
	139320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



1.0 LED

 LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.74kg  IP20  $\approx 0,3 \cdot D$  $\approx 32^\circ$

	CODE
	146164W_
	146164L_
	146164G_
	146164Q_
	146164P_
	146164B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

1.0 PAR16

 PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

  0.66kg  IP20  $\approx 0,9 \cdot D$

	CODE
	146120W0
	146120L0
	146120G0
	146120Q0
	146120P0
	146120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

BOX

CEILING SURFACE



p. 347



p. 429



p. 465



p. 515

OPTIONAL

single inner reflector max. 10W

	CODE
	911211W1
	911211G1
	911211B1



single inner cover max. 10W



	CODE
	911011W1
	911011G1
	911011B1







PRIVATE RESIDENCE BELGIUM



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.08kg IP20 32°

	CODE
	146264W
	146264L
	146264G
	146264Q
	146264P
	146264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x580	>80	2
3000K	2x610	>80	4
1800-2850K	2x390	>95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.13kg IP20

	CODE
	146220W0
	146220L0
	146220G0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9


more lamps and specs on page 593

BOX
CEILING SURFACE

OPTIONAL

double inner reflector max. 10W

	CODE
	911251W1
	911251G1
	911251B1





single inner cover max. 10W
2 pieces needed

	CODE
	911011W1
	911011G1
	911011B1





SHOP | ZANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.63kg IP20 0.3+D P 32°

CODE	
	146364W
	146364L
	146364G
	146364P
	146364B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.55kg IP20 0.9+D

CODE	
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

DOCUS

CEILING SURFACE



p. 349

OPTIONAL



single inner cover max. 10W

CODE	
	911021W1
	911021G1
	911021B1





HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE



2.0 LED

2xLED8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.92kg IP20 $\pm$ 0.3° 32°

CODE	
	146464W
	146464L
	146464G
	146464P
	146464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x580	>80	2
3000K	2x610	>80	4
1800-2850K	2x390	>95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.01kg IP20 $\pm$ 0.9°

CODE	
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

DOCUS

CEILING SURFACE

OPTIONAL



single inner cover max. 10W
2 pieces needed

CODE	
	911021W1
	911021G1
	911021B1





PRIVATE RESIDENCE | CANDICE BRUNY FRANCE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.72kg IP20 300lm 32°

CODE	
146564W	
146564G	
146564Q	
146564P	
146564B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.63kg IP20 300lm 32°

CODE	
146520W0	
146520G0	
146520Q0	
146520P0	
146520B0	

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

HEXO

CEILING SURFACE






p. 351

OPTIONAL

single inner cover max. 10W

CODE	
911031W1	
911031G1	
911031B1	



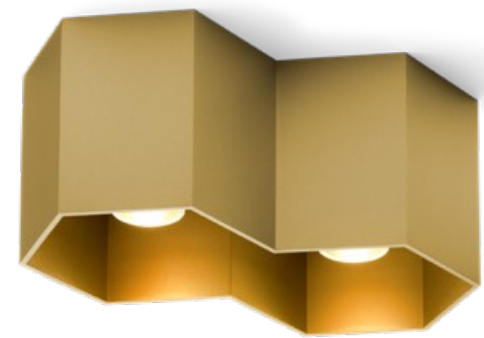

2.0 LED

 2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  1.13kg  IP20  $\pm 0,3^\circ$  $\pm 32^\circ$

CODE	
	146664W
	146664G
	146664Q
	146664P
	146664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x580	>80	2
3000K	2x610	>80	4
1800-2850K	2x390	>95	9

2.0 PAR16

 2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

  1.19kg  IP20  $\pm 0,9^\circ$

CODE	
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



HEXO

CEILING SURFACE

OPTIONAL

single inner cover max. 10W
2 pieces needed



CODE	
	911031W1
	911031G1
	911031B1







HOTEL MÜHLE | ARCHITECT DI RAINER SCHÖPF OBERGURGL | AUSTRIA



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.70kg IP20 32°

	CODE
	146764W
	146764L
	146764G
	146764Q
	146764P
	146764B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.61kg IP20 32°

	CODE
	146720W0
	146720L0
	146720G0
	146720Q0
	146720P0
	146720B0

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

RAY

CEILING SURFACE



p. 355 p. 439 p. 469 p. 521

OPTIONAL

single inner cover max. 10W





	CODE
	911041W1
	911041G1
	911041B1







PRIVATE RESIDENCE BELGIUM

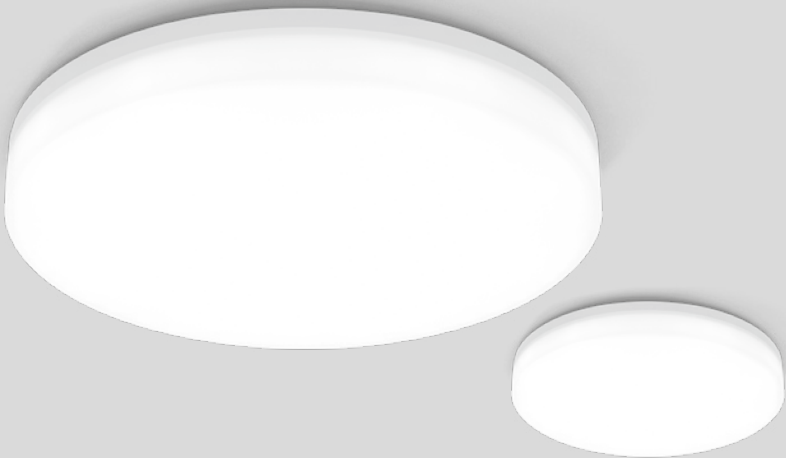

ROB IP44

UPDATE

CEILING SURFACE

p. 475

1.6

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.70kg

2700K | >90 CRI | 860lm
CODE
 701184W3

3000K | >90 CRI | 950lm
CODE
 701184W5

OPTIONAL

dimmer
CODE
for switch 90019017
for din rail 90019018

more specs on page 591

2.6

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.20kg

2700K | >90 CRI | 1250lm
CODE
 701284W3

3000K | >90 CRI | 1380lm
CODE
 701284W5

OPTIONAL

dimmer
CODE
for switch 90019017
for din rail 90019018

more specs on page 591

3.5

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.90kg

2700K | >90 CRI | 1820lm
CODE
 701384W3

3000K | >90 CRI | 1950lm
CODE
 701384W5

OPTIONAL

dimmer
CODE
for switch 90019017
for din rail 90019018

more specs on page 591



ROBY IP44

UPDATE

CEILING SURFACE

ø160

60

1.6

LED 13W | 220-240VAC | 50-60Hz

AC PCB 3-step low flicker

phase-cut dim | aluminium

powder coated brushed | opal

PMMA cover

1.00kg

IP44

±0,3

2700K | >90 CRI | 750lm

CODE

135184W3

135184B3

3000K | >90 CRI | 820lm

CODE

135184W5

135184B5

OPTIONAL

dimmer

CODE

90019017

90019018

for switch

for din rail

more specs on page 591

ø260

60

2.6

LED 18W | 220-240VAC | 50-60Hz

AC PCB 3-step low flicker

phase-cut dim | aluminium

powder coated brushed | opal

PMMA cover

1.55kg

IP44

±0,3

2700K | >90 CRI | 1130lm

CODE

135284W3

135284B3

3000K | >90 CRI | 1250lm

CODE

135284W5

135284B5

OPTIONAL

dimmer

CODE

90019017

90019018

for switch

for din rail

more specs on page 591

ø350

60

3.5

LED 32W | 220-240VAC | 50-60Hz

AC PCB 3-step low flicker

phase-cut dim | aluminium

powder coated brushed | opal

PMMA cover

2.45kg

IP44

±0,3

2700K | >90 CRI | 1680lm

CODE

135384W3

135384B3

3000K | >90 CRI | 1800lm

CODE

135384W5

135384B5

OPTIONAL

dimmer

CODE

90019017

90019018

for switch

for din rail

more specs on page 591

back

WEVER & DUCRÉ 270 – 271




FORUM 1



TOWNA IP44 2019

CEILING SURFACE



1.0

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim| steel wet painted
opal PMMA cover

1.15kg IP44 0.3

	CODE
	178184W
	178184J
	178184P
	178184K
	178184Z
	178184B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	850	>90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



2.0

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim| steel wet painted
opal PMMA cover

1.90kg IP44 0.3

	CODE
	178284W
	178284J
	178284P
	178284K
	178284Z
	178284B

Light Colour Selection


	LUMEN	CRI	CODE
2700K	1090	>90	3
3000K	1210	>90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



3.0

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim| steel wet painted
opal PMMA cover

3.00kg IP44 0.3

	CODE
	178384W
	178384J
	178384P
	178384K
	178384Z
	178384B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	1550	>90	3
3000K	1660	>90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591




RATHAUS MEDIATHEK TALVOGTEI | ARCHITECT LICHTRAUM RUSCHMANN & STEIN | LIGHTING DESIGN LICHTRAUM KIRCHZARTEN | GERMANY



CORY
CEILING SURFACE



p. 217



1.3


LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.47kg IP20 3~0,3~D

3000K | >85 CRI | 930lm

CODE

136173W4



1.6


LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.52kg IP20 3~0,3~D

3000K | >85 CRI | 1160lm

CODE

136273W4



1.9


LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.63kg IP20 3~0,3~D

3000K | >85 CRI | 1820lm

CODE

136374W4



2.6


LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.99kg IP20 3~0,3~D





3000K | >85 CRI | 2130lm

CODE

136574W4



back



1.1

 LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

 0.37kg  IP20  $\pm 0.3^\circ$

3000K | >85 CRI | 930lm

CODE

137173W4

1.3

 LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

 0.43kg  IP20  $\pm 0.3^\circ$

3000K | >85 CRI | 1340lm

CODE

137273W4

2.0

 LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

 1.59kg  IP20  $\pm 0.3^\circ$

3000K | >85 CRI | 2130lm

CODE

137674W4

2.5

 LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

 1.79kg  IP20  $\pm 0.3^\circ$

3000K | >85 CRI | 2810lm

CODE

137774W4



PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM

available from autumn 2019

MIRBI IP44 2019




CEILING SURFACE



p. 221



p. 415

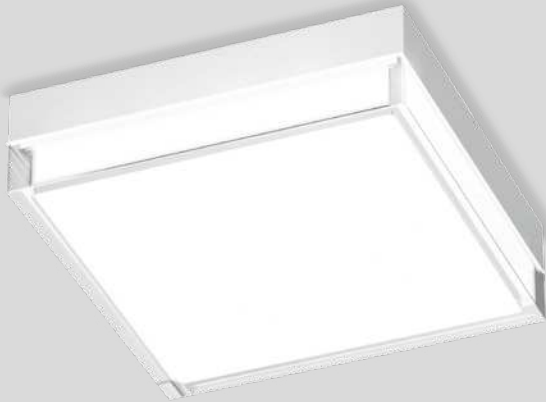

1.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

1.10 kg IP44 3000K | >90 CRI | 440lm

CODE
175188W5

2.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

1.10 kg IP44 3000K | >90 CRI | 440lm

CODE
175288W5

3.0

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

2.60 kg IP44 3000K | >90 CRI | 1200lm

CODE
175388W5



back



PLUXO on track

CEILING SURFACE

1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.93kg IP20 0.3° 38°
45°/45° 45°/45°

CODE		
	143668W	
	143668B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

more 1-phase track accessories on page 603

2.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.96kg IP20 0.3° 38°
45°/45° 45°/45°

CODE		
	143968W	
	143968B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	710 >90	3
3000K	730 >90	5
1800-2850K	830 >80	9

more 3-phase track accessories on page 605

2.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.96kg IP20 0.3° 30°
45°/45° 45°/45°

CODE		
	143978W	
	143978B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4


more 3-phase track accessories on page 605

back

WEVER & DUCRÉ 280 – 281



SAFARI STUDIOS | STEVEN VANDENBORRE KORTRIJK | BELGIUM



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.23kg IP20 90°

90°

CODE	
157220W0	
157220G0	
157220B0	

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





RESTAURANT GASTROBAR GUST | INTERIOR DESIGN FREDERIC HOOFT KORTRIJK | BELGIUM



SARA on track

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.24kg IP20 34°

90° 355°

	CODE
	157164W
	157164G
	157164B

Light Colour Selection

	LUMEN CRI	CODE
2700K	500 >80	2
3000K	530 >80	4

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591
more 1-phase track accessories on
page 603

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC
aluminium powder coated
incl. 1-phase track adapter

0.16kg IP20 34°

90° 355°

	CODE
	157120W0
	157120G0
	157120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593
more 1-phase track accessories on
page 603




CAFÉ ARHUS | INTERIEURCONCEPT: INSIDE ROESELARE | BELGIUM



TORCO on track

CEILING SURFACE



1.0 LED

LED 15W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.29kg IP20 40°

90° 355°

CODE	
158168W	
158168B	

Light Colour Selection		
	LUMEN CRI	CODE
2700K	950 >80	2
3000K	1050 >80	4

OPTIONAL

CODE	
dimmer	
for switch	90019017
for din rail	90019018

more specs on page 591
more 3-phase track accessories on
page 605





CHIP SHOP BARAQUE FRITURE | DESIGN AND INTERIOR TRUE AGENCY ANTWERPEN | BELGIUM



SQUBE on base

CEILING SURFACE



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.43kg IP20 36°

90°

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.43kg IP20 90°

	CODE
144264W	
144264B	

Light Colour Selection

	LUMEN CRI	CODE
2700K	350 >80	2
3000K	380 >80	4
1800-3000K	350 >80	9

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

CODE

144220W	
144220B	

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE


2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



SQUBE on base

CEILING SURFACE



2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.44kg IP20 0.3-1 24°

90°

CODE	
	144464W
	144464B

Light Colour Selection

	LUMEN CRI	CODE
2700K	780 >80	2
3000K	810 >80	4
1800-3000K	850 >80	9

OPTIONAL

dimmer

CODE	
for switch	90019017
for din rail	90019018

more specs on page 591



SQUBE on base

CEILING SURFACE

#2 PAR16

2xPAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.43kg IP20 ±0.9°

90° 355°

	CODE
	144520W0
	144520B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

#3 PAR16

3xPAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.43kg IP20 ±0.9°

90° 355°

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



WINE AND TAPAS BAR BOBO & CO DESTELBERGEN | BELGIUM

SQUBE on track

**CEILING SURFACE
1-PHASE TRACK**

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.36kg IP20 0.3m 36°

90° 355°

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 1-phase track adapter

0.32kg IP20 0.9m 36°

90° 355°

	CODE
	144164W
	144164B

Light Colour Selection

	LUMEN CRI	CODE
2700K	350 >80	2
3000K	380 >80	4
1800-3000K	350 >80	9

more 1-phase track accessories on page 603

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

	CODE
PAR16 LED GU10 7W phase-cut dim	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

more 1-phase track accessories on page 603

back

WEVER & DUCRÉ 294 — 295



SQUBE on track

**CEILING SURFACE
3-PHASE TRACK**

ø55
143
90

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 3-phase track adapter

0.32kg IP20 0.9-1° 36°
90° 355°

	CODE
	144720W0
	144720B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593
more 3-phase track accessories on page 605

ø65
116
135
90

2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.40kg IP20 0.3-1° 24°
90° 355°

	CODE
	144364W
	144364B

Light Colour Selection

	LUMEN CRI	CODE
2700K	780 >80	2
3000K	810 >80	4
1800-3000K	850 >80	9

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591
more 3-phase track accessories on page 605

ø80
140
162
110

3.0 LED

LED 20W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.75kg IP20 0.3-1° 31°
90° 355°

	CODE
	144564W
	144564B

Light Colour Selection

	LUMEN CRI	CODE
2700K	1250 >90	3
3000K	1360 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591
more 3-phase track accessories on page 605

back

WEVER & DUCRÉ 296 — 297





BAR BERNARD | MARIE LECLUYSE INTERIEURARCHITECTUUR POPERINGE | BELGIUM





OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design




ELLO SYSTEM UPDATE

CEILING SURFACE



p. 379



1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

1.70kg IP20 0.3m P

3000K >90 CRI 981lm	CODE
	500184W5
	500184B5

DALI 3000K >90 CRI 981lm	CODE
	500185W5
	500185B5

ALWAYS USE

connector point	CODE
	900190W1
	900190B1

OPTIONAL	CODE
suspension cable 2.0m	90015102

power feeder for suspension	
	90018001
	90018000



CEILING SUSPENDED

p. 309 – 379



Explore our Designer
Families from p. 23 -147




WETRO
p. 309



DINOR 1.0
p. 313



DINOR 2.0
p. 313



DINOR 3.0
p. 313



SHIEK 2.0
p. 315



SHIEK 3.0
p. 317




BISHOP
p. 325



BEBOW
p. 333



VENN
p. 337



GIGANT
p. 339



CORK
p. 357



BOX MULTI
p. 363



DOCUS MULTI
p. 365



HEXO MULTI
p. 367



CYCLONE
p. 343



BOX
p. 347



DOCUS
p. 349



HEXO
p. 351



RAY
p. 355



RAY MULTI
p. 369



CORK MULTI
p. 371



CONE
p. 373



SELO
p. 375



ELLO
p. 379



back



WETRO

UPDATE

CEILING SUSPENDED

1.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
artisanal hand-blown glass

0.56 kg IP20 3~0,3~D

1800-2850K | >90 CRI | 340lm

CODE

236189P9

236189B9

2.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
artisanal hand-blown glass

0.97 kg IP20 3~0,3~D

1800-2850K | >90 CRI | 340lm

CODE

236289P9

236289B9

3.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
artisanal hand-blown glass

1.69 kg IP20 3~0,3~D

1800-2850K | >90 CRI | 340lm

CODE

236389P9

236389B9

ALWAYS USE

single ceiling base

CODE

90052022

90052021

multi- and other suspension options
on page 608

ALWAYS USE

single ceiling base

CODE

90052022

90052021

multi- and other suspension options
on page 608

ALWAYS USE

single ceiling base

CODE

90052022

90052021

multi- and other suspension options
on page 608

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY 3HDRAFT

back


WEVER & DUCRÉ 308 – 309



OFFICE | RAIFFEISENBANK SALZKAMMERGUT | AUSTRIA



SHOP SLOTS SPIERE-HELKIJN | BELGIUM



1.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

0.9 kg IP20 $\approx 0,3 \times D$

1800-2850K | >90 CRI | 510lm


CODE	
	255189RW9
	255189GW9
	255189OK9
	255189OB9

ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608



2.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

1.3 kg IP20 $\approx 0,3 \times D$

1800-2850K | >90 CRI | 510lm


CODE	
	255289RW9
	255289GW9
	255289OK9
	255289OB9

ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608



3.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

2.3 kg IP20 $\approx 0,3 \times D$

1800-2850K | >90 CRI | 510lm

CODE	
	255389RW9
	255389GW9
	255389OK9
	255389OB9



ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608

available from autumn 2019



SHIEK

UPDATE

CEILING SUSPENDED

1.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.36 kg IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237189W9
	237189J9
	237189P9
	237189K9
	237189Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608

2.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.47 kg IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237289W9
	237289J9
	237289P9
	237289K9
	237289Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608



PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM



reddot award 2017
winner




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY 3HDRAFT

SHIEK

UPDATE

CEILING SUSPENDED



3.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.60 kg IP20 0,3+

1800-2850K | >90 CRI | 510lm

CODE	
	237389W9
	237389J9
	237389P9
	237389K9
	237389Z9

ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608





4.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.70 kg IP20 $\approx 0,3 \cdot D$

1800-2850K | >90 CRI | 510lm

	CODE
	237489W9
	237489J9
	237489P9
	237489K9
	237489Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
on page 608

cable ring for 3 lamps

	CODE
	90059123
	90059121

cable ring for 4 lamps


	CODE
	90059124
	90059122

cable ring for multi suspension only
white cable on request

SHIEK

UPDATE

CEILING SUSPENDED



5.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.80 kg IP20 $\approx 0,3 \cdot D$

1800-2850K | >90 CRI | 510lm

	CODE
	237589W9
	237589J9
	237589P9
	237589K9
	237589Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
on page 608

cable ring for 3 lamps

	CODE
	90059123
	90059121

cable ring for 4 lamps

	CODE
	90059124
	90059122

cable ring for multi suspension only
white cable on request



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



reddot award 2017
winner




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY 3HDRAFT

SHIEK

CEILING SUSPENDED




3.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.6kg IP20

CODE
2343E8W0
2343E8J0
2343E8P0
2343E8K0
2343E8Z0




4.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.7kg IP20

CODE
2344E8W0
2344E8J0
2344E8P0
2344E8K0
2344E8Z0



5.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.8kg IP20

CODE
2345E8W0
2345E8J0
2345E8P0
2345E8K0
2345E8Z0

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608
more lamps and specs on page 594

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

cable ring for 3 lamps

CODE
90059123
90059121

cable ring for 4 lamps

CODE
90059124
90059122

cable ring for multi suspension only
more lamps and specs on page 594

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

cable ring for 3 lamps

CODE
90059123
90059121

cable ring for 4 lamps

CODE
90059124
90059122


cable ring for multi suspension only
more lamps and specs on page 594





SHOP | ZICCAT CIOCCOLATERIA | ENRICO GIURBINO & FABIO VIVIANI TORINO | ITALY









PRIVATE RESIDENCE AUSTRIA




OFFICE EASI | AXIOME ARCHITECTURE NIJVEL | BELGIUM



BEBOW
CEILING SUSPENDED



p. 235




1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg IP20

3000K | >90 CRI | 1820lm

CODE
132384W5
132384B5



2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg IP20

3000K | >90 CRI | 2650lm

CODE
132364W5
132364B5




DESIGNED BY S&R CORNELISSEN






LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover



	CODE
	132484W5
	132484B5



LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits
aluminium powder coated
opal PMMA cover




CODE	
	132464W5
	132464B5





OFFICE | BOARDROOM GREENHOUSE | INTERVEST OFFICES & WAREHOUSES ANTWERPEN | BELGIUM

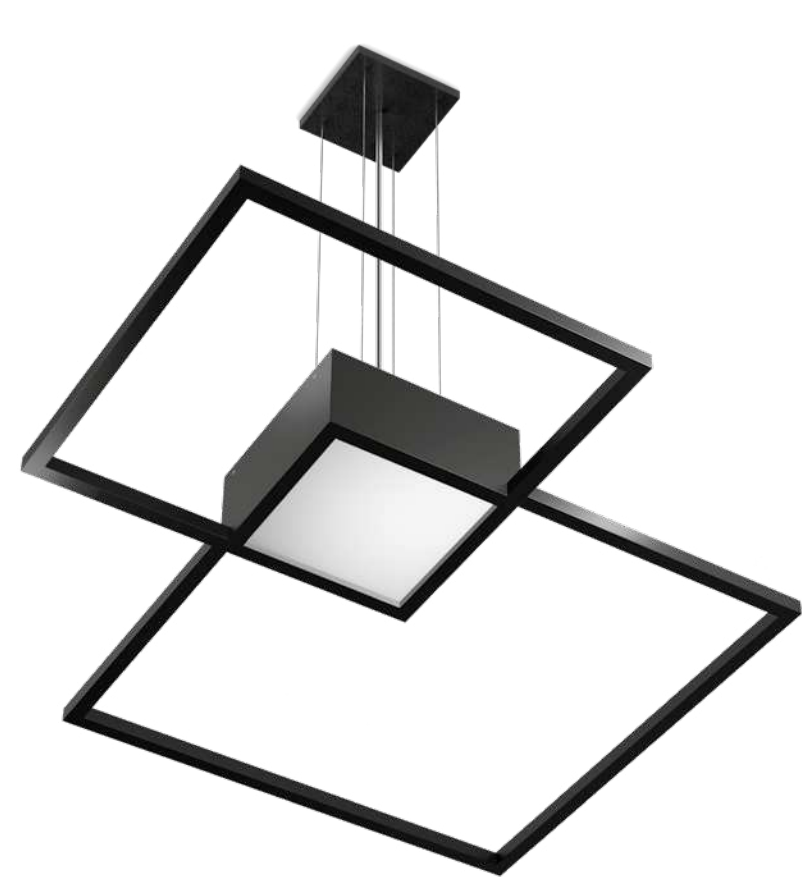

DESIGNED BY S&R CORNELISSEN



VENN


UPDATE

CEILING SUSPENDED

p. 233

p. 399

p. 399



3.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | direct/indirect

2.90kg IP20 0,3-1

CODE	
	149384W
	149384Q
	149384B

DALI	
	149385W
	149385Q
	149385B

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



GIGANT

CEILING SUSPENDED

10.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | DALI switch dim
opal LLDPE body | steel

8.80kg IP20 84°

CODE		
213185W		

Light Colour Selection

	LUMEN CRI	CODE
3000K	5000 >85	4
4000K	5300 >85	6

16.0

LED 83W | 220-240VAC | 50-60Hz
PCB 3-step | DALI switch dim
opal LLDPE body | steel

15.30kg IP20 84°

CODE		
213285W		

Light Colour Selection

	LUMEN CRI	CODE
3000K	9900 >85	4
4000K	10400 >85	6

OPTIONAL

	CODE
suspension set 4.0m	90015114

the used material applies to UL 94 HB standard and glow wire test 630°
longer suspension on request

OPTIONAL

	CODE
suspension set 4.0m	90015114

the used material applies to UL 94 HB standard and glow wire test 630°
longer suspension on request

DESIGNED BY S&R CORNELISSEN

WEVER & DUCRÉ 338 — 339



OFFICE ZUIDERPOORT GENT | BELGIUM




OFFICE | DENTSU AEGIS NETWORK | TRZOP ARCHITEKCI | PLUSLIGHTING WARSAW | POLAND



OFFICE | MICROSOFT | CONCEPT & DESIGN: PROCOS GROUP BRUSSELS | BELGIUM



CYCLONE
CEILING SUSPENDED



17.0

LED 70W | 220-240VAC
50-60Hz | PCB 3-step | DALI dim
aluminium powder coated
opal LLDPE body

8.80kg IP20 8~0.3~ P

3000K | >80 CRI | 7000lm

CODE
219185W4

the used material applies to UL 94 HB
standard and glow wire test 630°

DESIGNED BY S&R CORNELISSEN







GAPSITE HOTEL | KADLETZ ARCHITEKTUR GRAZ | AUSTRIA



- 


p. 249
- 

p. 429
- 

p. 465
- 

p. 515

BOX
CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.69 | 0.86kg IP20 360°

2.0	CODE
200mm	
	207164W
	207164L
	207164P
	207164B

3.0	CODE
300mm	
	207264W
	207264L
	207264P
	207264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62 | 0.79kg IP20 360°

2.0	CODE
200mm	
	207120W0
	207120L0
	207120P0
	207120B0


3.0	CODE
300mm	
	207220W0
	207220L0
	207220P0
	207220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



DOCUS

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69 | 0.85kg IP20 36°

2.0


200mm	CODE
	207564W
	207564L
	207564G
	207564P
	207564B

3.0

300mm	CODE
	207664W
	207664L
	207664G
	207664P
	207664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62 | 0.75kg IP20 36°

2.0

200mm	CODE
	207520W0
	207520L0
	207520G0
	207520P0
	207520B0

3.0

300mm	CODE
	207620W0
	207620L0
	207620G0
	207620P0
	207620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




Café Arhus | Interieurconcept: Inside Roeselare | Belgium



p. 259

HEXO
CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.66 | 0.82kg IP20 36°

2.0	CODE
200mm	
	207364G
	207364Q
	207364P
	207364B

3.0	CODE
300mm	
	207464G
	207464Q
	207464P
	207464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58 | 0.74kg IP20 36°

2.0	CODE
200mm	
	207320G0
	207320Q0
	207320P0
	207320B0

3.0	CODE
300mm	
	207420G0
	207420Q0
	207420P0
	207420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




back





RESTAURANT BILIARDO 65 | ARCHITECT FABIO CIOFFI NOLA - NAPOLI | ITALY

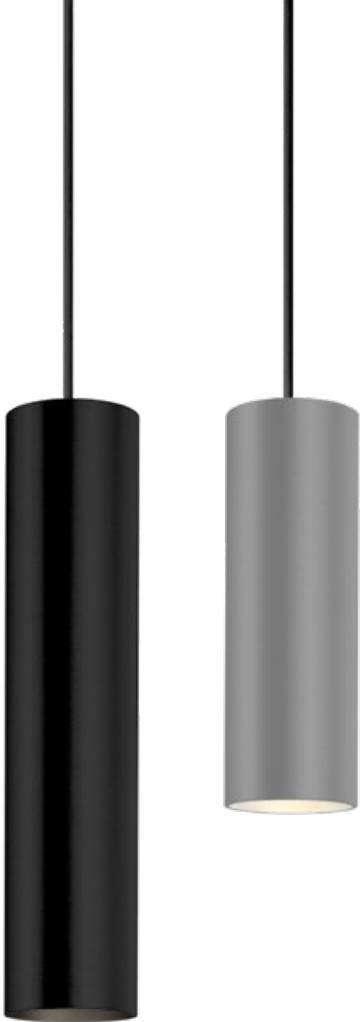

- 

p. 265
- 


p. 439
- 

p. 469
- 

p. 521

RAY

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.62 | 0.76kg IP20 0.3-0.3-36°

2.0	CODE
200mm	
	207764W
	207764L
	207764G
	207764P
	207764B

3.0	CODE
300mm	
	207864W
	207864L
	207864G
	207864P
	207864B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54 | 0.68kg IP20 0.9-0.9

2.0	CODE
200mm	
	207720W0
	207720L0
	207720G0
	207720P0
	207720B0

3.0	CODE
300mm	
	207820W0
	207820L0
	207820G0
	207820P0
	207820B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




RESTAURANT LE NOIR BONNET | AXIOME ARCHITECTURE SIRAUT | BELGIUM



CORK

CEILING SUSPENDED



1.0

LED 1.5W | 120-240VAC | 50-60Hz
PCB 3-step | incl. power supply
aluminium powder coated
fits bottles inner ø16,5 - 19,5 mm
and max. 1kg

0.24kg IP20 0.3m 36°

	CODE
	210163W
	210163B

Light Colour Selection		
	LUMEN CRI	CODE
2200K	120 >80	1
2700K	180 >80	2

OPTIONAL		CODE
bottle 1		
75/174 glass		90019013
bottle 2		
87/323 glass		90019014





MULTI SUSPENSION

LET'S HANG OUT TOGETHER

RAY transforms every ceiling into a dance floor where it's at its best when swinging together with other Wever & Ducré luminaires. The trick: Up to eight luminaires can be suspended as a multi-baldachin in a round design and as many as five in a straight design. And all this from a single light outlet above which they can be individually arranged. As a straight line or in the shape of a spider's web, loosely suspended cables become a design element in their own right. Thus, not only the dining area, but also the room itself can be skilfully put into the spotlight. Which of our luminaires are best suited for the multi-baldachin team? In addition to WETRO and DOCUS, BOX, HEXO, SELO, and SHIEK also make for outstanding combination options. Try it out for yourself.

RAY verwandelt jede Decke in eine Tanzfläche, auf der sie am liebsten gemeinsam mit anderen Wever & Ducré-Leuchten swingt. Der Trick: Bis zu 8 Leuchten lassen sich als Multibaldachin in runder und bis zu 5 in gerader Form abhängen. Und das alles von einem einzigen Lichtauslass aus, über dem sie sich ganz individuell arrangieren lassen. Schnurgerade oder in Spinnennetzform, bei der die locker durchhängenden Kabel zu einem eigenen Design-Element werden. So wird nicht nur der Essbereich, sondern auch der Raum selbst gekonnt in Szene gesetzt. Welche unserer Leuchten ins Multibaldachin-Team passen? Neben WETRO und DOCUS sind auch BOX, HEXO, SELO oder SHIEK absolute Kombinationsgenies. Also gleich ausprobieren.





2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 36°

2.0	
200mm	CODE
	227164W
	227164L
	227164P
	227164B

3.0	
300mm	CODE
	227264W
	227264L
	227264P
	227264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20

2.0	
200mm	CODE
	227120W0
	227120L0
	227120P0
	227120B0

3.0	
300mm	CODE
	227220W0
	227220L0
	227220P0
	227220B0

OPTIONAL

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

BOX MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010




1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 609

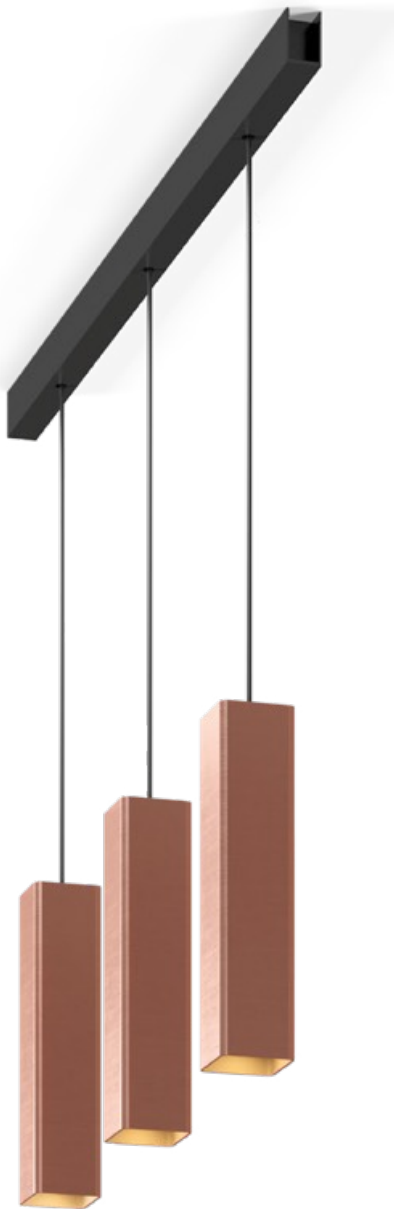

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 36°

2.0	CODE
200mm	227564W
	227564L
	227564G
	227564P
	227564B

3.0	CODE
300mm	227664W
	227664L
	227664G
	227664P
	227664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 36°

2.0	CODE
200mm	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0	CODE
300mm	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

DOCUS MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

CODE
90052005
90052006

extra set standard connectors for
5 to 8 lamps

CODE
90052007
90052008

multiple suspension ceiling base long
600mm | 2 lamps

CODE
90052007
90052008

900mm | 3 lamps

CODE
90052009
90052010



1200mm | 4 lamps

CODE
90052011
90052012

1500mm | 5 lamps

CODE
90052013
90052014

more options and information
on page 609

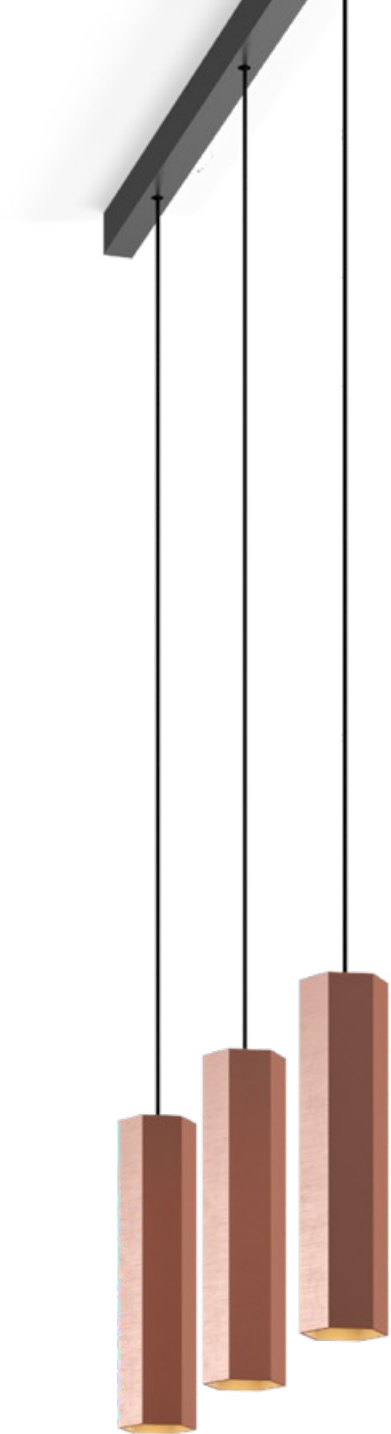

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.66kg IP20 0.3° 36°

2.0	CODE
200mm	
	227364G
	227364Q
	227364P
	227364B

3.0	CODE
300mm	
	227464G
	227464Q
	227464P
	227464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58kg IP20 0.9°

2.0	CODE
200mm	
	227320G0
	227320Q0
	227320P0
	227320B0

3.0	CODE
300mm	
	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

HEXO MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90052007
	90052008

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012


1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 609



TEA ROOM HUIS VAN DE GROOTJUFFROUW-KOFFIEQUEEN KORTRIJK | BELGIUM



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.62kg IP20 0.3-1.0 36°

2.0	CODE
200mm	227764W
	227764L
	227764G
	227764P
	227764B

3.0	CODE
300mm	227864W
	227864L
	227864G
	227864P
	227864B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54kg IP20 0.9-1.0

2.0	CODE
200mm	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0	CODE
300mm	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

RAY MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

	CODE
extra set standard connectors for 5 to 8 lamps	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm 3 lamps	CODE
	90052009
	90052010


1200mm 4 lamps	CODE
	90052011
	90052012

1500mm 5 lamps	CODE
	90052013
	90052014

more options and information
on page 609



BRASSERIE GRAND CRU | ARCHITECT ABOUT-S BRUGGE | BELGIUM



1.0

LED 1,5W | 120-240VAC | 50-60Hz
PCB 3-step | excl. power supply
aluminium powder coated
fits bottles inner ø16,5 - 19,5 mm

0.24kg IP20 0.3 36°

	CODE
	210263W
	210263B

Light Colour Selection

	LUMEN CRI	CODE
2200K	120 >80	1
2700K	180 >80	2

OPTIONAL

	CODE
bottle 1	
75/174 glass	90019013
bottle 2	
87/323 glass	90019014

CORK MULTI
CEILING SUSPENDED

ALWAYS USE

suspension base round for
3 to 8 lamps | incl. power supply

	CODE
	90052015
	90052016

suspension base long
600mm | 2 lamps | incl. power supply

	CODE
	90052017
	90052018


900mm | 3 lamps | incl. power supply

	CODE
	90052019
	90052020

more options and information
on page 609




HOTEL LILLA ROBERTS | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

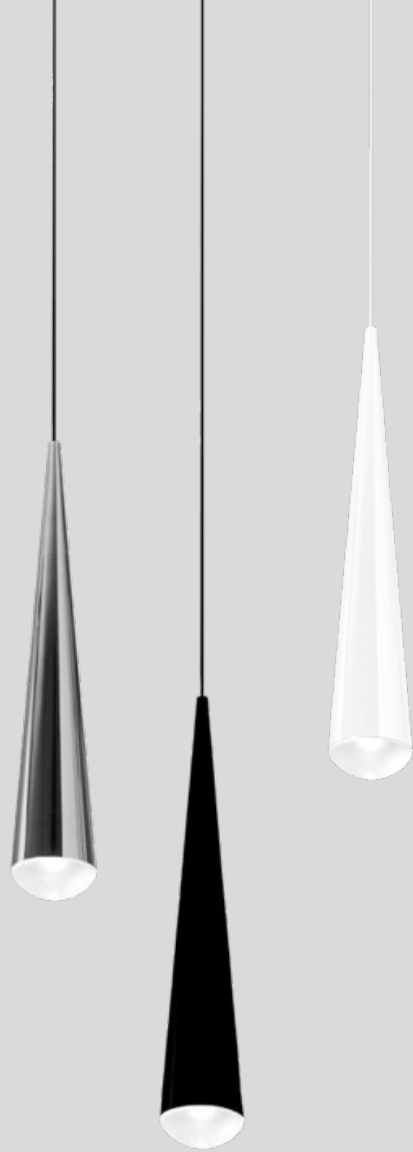

CONE

CEILING SUSPENDED



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
chrome plated | glass

0.55kg IP20 0.3m 36°




CODE
200184W2
200184C2
200184B2



DAS KOCHKABINETT GRAZ | AUSTRIA

SELO

CEILING SUSPENDED



1.0

 LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

  0.80 kg  IP20  3-0,3°

1800-2850K | >90 CRI | 510lm

CODE

235189W9

ALWAYS USE

single ceiling base

 90052022

 90052021

white cable on request

multi- and other suspension options

on page 608

2.0

 LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

  0.96 kg  IP20  3-0,3°

1800-2850K | >90 CRI | 510lm

CODE

235289W9

ALWAYS USE

single ceiling base

 90052022

 90052021

white cable on request

multi- and other suspension options

on page 608

3.0

 LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

  0.80 kg  IP20  3-0,3°

1800-2850K | >90 CRI | 510lm

CODE

235389W9

ALWAYS USE

single ceiling base

 90052022

 90052021

white cable on request

multi- and other suspension options

on page 608

 back

WEVER & DUCRÉ 374 — 375





PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM



reddot award 2015
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN




ELLO

UPDATE

CEILING SUSPENDED

p. 303



13.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

2.00kg IP20 0,3°

3000K | >90 CRI | 981lm

CODE	
	500284W5
	500284B5

DALI | 3000K | >90 CRI | 981lm

CODE	
	500285W5
	500285B5



back

WALL RECESSED

p. 383 — 395



SMILE IN
p. 383



LITO
p. 385



EYE
p. 387



THEMIS
p. 389




STRANGE
p. 391



STRIPE
p. 393



ORIS
p. 395







SMILE IN

WALL RECESSED



p. 479



1.0

LED LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

   0.39kg  IP20  

 86  40  4-40

3000K | >80 CRI | 230/320lm

	CODE
	326151W4
	702151L4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012030

2.0

LED LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

   0.42kg  IP20  

 86  40  4-40

3000K | >80 CRI | 230/320lm

	CODE
	326251W4
	703151L4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012030




LITO

WALL RECESSED



p. 205



1.0

 LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

   0.09kg  IP20   

 70x70  35  12-18

3000K | >80 CRI | 160/210lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

2.0

 LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

   0.09kg  IP20  

 70x70  35  12-18

3000K | >80 CRI | 160/210lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119



EYE

WALL RECESSED

16

52

16

52

1.0

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.06kg

IP20

≈0,3+D

⌚ 46

 30

 2-18

3000K | >80 CRI | 90/150lm

CODE

302151W4

302151L4

ALWAYS USE

power supply

CODE

350mA | 6W

90213202

700mA | 6W

90215203

more power supplies on page 588

OPTIONAL

CODE

recessed housing

90012025

2.0

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.07kg

IP20

≈0,3+D

⌚ 46

 30

 2-18

3000K | >80 CRI | 90/150lm

CODE

302251W4

302251L4

ALWAYS USE

power supply

CODE

350mA | 6W

90213202

700mA | 6W

90215203

more power supplies on page 588

OPTIONAL

CODE

recessed housing

90012025


back

WEVER & DUCRÉ

386 — 387



HOTEL CLARION AIRPORT | INTERIOR ARCHITECT PUROPLAN OY HELSINKI | FINLAND



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20

70x158 50 2-18

CODE	
323271W	
323271X	
323271S	
323271K	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

CODE	
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

CODE	
recessed housing	90012032
plasterkit	90017111



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20

70x258 50 2-18

CODE	
323371W	
323371X	
323371S	
323371K	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

CODE	
500mA 6W	90214201
700mA 6W	90215203


more power supplies on page 588

OPTIONAL

CODE	
recessed housing	90012033
plasterkit	90017112

THEMIS

WALL RECESSED



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20

70x458 50 2-18

CODE	
323671W	
323671X	
323671S	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

CODE	
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

CODE	
recessed housing	90012036
plasterkit	90017115




PRIVATE RESIDENCE | VIVERE LICHT ROBERT STEINBÖCK AUSTRIA



STRANGE

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20 0.3m

170x86 55 2-25

	CODE
	320271W
	320271S

Light Colour Selection


	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20 0.3m

270x86 55 2-25

	CODE
	320371W
	320371S

Light Colour Selection


	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20 0.3m

470x86 55 2-25

	CODE
	320671W
	320671S

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



PRIVATE RESIDENCE | ARCHITECT KILLIAN GARTNER | INTERIOR & LIGHT DESIGN ROOMS ATELIER AUSTRIA



STRIPE
WALL RECESSED



0.4

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.09kg IP20 0.3m

25x56 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305151W4
	305151L4
	305151B4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	
plasterkit	90012037



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.10kg IP20 0.3m

25x56 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305251W4
	305251L4
	305251B4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	
plasterkit	90012037



2.2

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.27kg IP20 0.3m

25x170 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305351W4
	305351L4
	305351B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203


more power supplies on page 588

OPTIONAL

	CODE
recessed housing	
plasterkit	90012038



ORIS
WALL RECESSED



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP20 0.3+

47x182 40 4-40

3000K | >80 CRI | 90/150lm

CODE
327161W4

ALWAYS USE


power supply

CODE
350mA 6W 90213202
500mA 6W 90214201
700mA 6W 90215203

more power supplies on page 588

OPTIONAL

CODE
recessed housing plasterkit 90012039
concrete housing 90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 0.3+

112x117 40 4-40

3000K | >80 CRI | 180/300lm

CODE
327261W4

ALWAYS USE


power supply

CODE
350mA 6W 90213202
500mA 6W 90214201
700mA 6W 90215203

more power supplies on page 588

OPTIONAL

CODE
recessed housing plasterkit 90012041
concrete housing 90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP20 0.3+

112x185 40 4-40

3000K | >80 CRI | 180/300lm

CODE
327361W4

ALWAYS USE

power supply

CODE
350mA 6W 90213202
500mA 6W 90214201
700mA 6W 90215203

more power supplies on page 588

OPTIONAL


CODE
recessed housing plasterkit 90012043
concrete housing 90012042

WALL SURFACE

p. 399 — 453



Explore our Designer
Families from p. 23 -147



VENN
p. 399



SMILE ON
p. 403



SMILE
p. 405



BENTO
p. 407



BOX MINI
p. 427



BOX
p. 429



BENTA
p. 409



MOON
p. 411



LEENS
p. 413



MIRBI LONG IP44
p. 415



DOCUS MINI
p. 433



HEXO MINI
p. 435



RAY MINI
p. 437



RAY
p. 439



MIRBA IP44
p. 417



CENTRAL
p. 419



STATION
p. 421



TRAIN
p. 423



INCH
p. 443




MILES
p. 445



LIGHTDROP IP44
p. 451



ARZY
p. 453



back





SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN

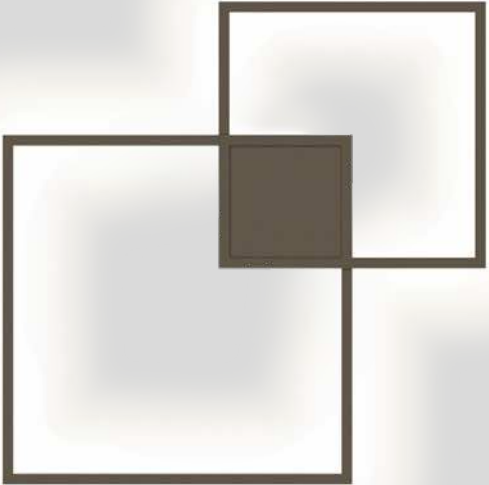

1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect

2.50kg IP20 0.3m

	CODE
White	149184W
Black	149184Q
Black	149184B

DALI

	CODE
White	149185W
Black	149185Q
Black	149185B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | direct/indirect

2.50kg IP20 0.3m

	CODE
White	149284W
Black	149284Q
Black	149284B

DALI

	CODE
White	149285W
Black	149285Q
Black	149285B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



back

VENN

UPDATE

WALL SURFACE

p. 233

p. 337







SHOWROOM PATRICK PONSEELE ANZEGEM | BELGIUM

SMILE ON

WALL SURFACE



p. 489



1.0

 LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.43kg  IP65/IP20   

3000K | >90 CRI | 370lm

	CODE
	702258W5
	702258L5

2.0

 LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.65kg  IP65/IP20  



3000K | >90 CRI | 370lm

	CODE
	703258W5
	703258L5



SMILE

WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.02kg IP65/IP20 0.3

3000K | >80 CRI | 360lm

CODE

703354W4

703354L4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.87kg IP65/IP20 0.3

3000K | >80 CRI | 360lm

CODE

703454W4

703454L4






PRIVATE RESIDENCE GERMANY

BENTO

UPDATE

WALL SURFACE

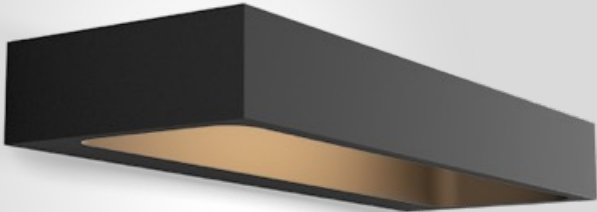

1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg IP20

3000K | >90 CRI | 310lm

CODE

	309274W5
	309274B5

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.48kg IP20

3000K | >90 CRI | 310lm




CODE

	309374W5
	309374B5



PRIVATE RESIDENCE AUSTRIA

BENTA UPDATE
WALL SURFACE

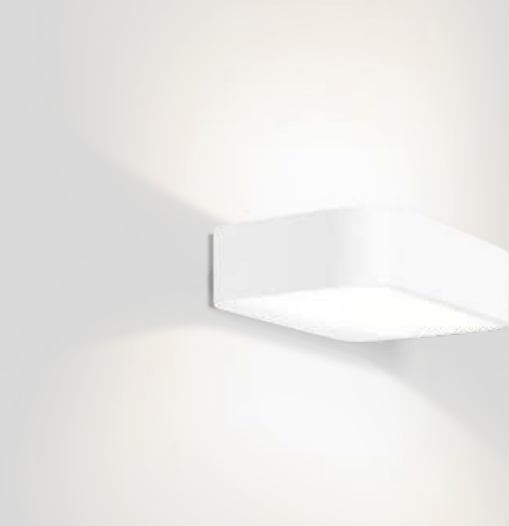

1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg IP20 $\pm$ 0.3° P

3000K | >90 CRI | 310lm

	CODE
	310174W5
	310174B5

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.25kg IP20 $\pm$ 0.3° P

3000K | >90 CRI | 310lm

	CODE
	310274W5
	310274B5




PRIVATE RESIDENCE SWITZERLAND

MOON

UPDATE

WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.57kg IP20 0.3m P



3000K | >90 CRI | 310lm

CODE

308174W5



PRIVATE RESIDENCE FINLAND



1.0

LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.1kg IP20 8-0,3-1 6

3000K | >90 CRI | 300lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

2xLED 2W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.90kg IP20 8-0,3-1 6





3000K | >90 CRI | 2x150lm

	CODE
	311274W5
	311274L5
	311274B5



MIRBI long IP44 2019

WALL SURFACE



1.0

LED 6W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

0.72kg IP44

CODE
329184W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	H 300 / L 190	>90	3
3000K	H 330 / L 210	>90	5

2.0

LED 12W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

1.53kg IP44

CODE
329284W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	H 550 / L 320	>90	3
3000K	H 620 / L 365	>90	5

3.0

LED 18W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

2.25kg IP44

CODE
329384W

Light Colour Selection





	LUMEN	CRI	CODE
2700K	H 750 / L 550	>90	3
3000K	H 840 / L 610	>90	5

available from autumn 2019



MIRBA IP44

WALL SURFACE

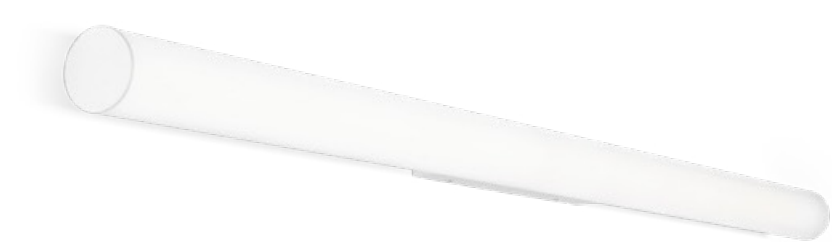

1.0 LED

LED 9W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.51kg IP44

CODE
328184W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 320 / H 560	>90	3
3000K	L 360 / H 620	>90	5

2.0 LED

LED 12W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.65kg IP44

CODE
328284W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 530 / H 820	>90	3
3000K	L 590 / H 900	>90	5

3.0 LED

LED 18W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.69kg IP44

CODE
328384W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 610 / H 1050	>90	3
3000K	L 680 / H 1150	>90	5






CENTRAL

WALL SURFACE



p. 505



1.0

 LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  1.00kg  IP20  3-0.3+D 

3000K | >90 CRI | 520lm

CODE

313574W5

313574L5

2.0

 2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.94kg  IP20  3-0.3+D 

3000K | >90 CRI | 2x260lm

CODE

313674W5

313674L5





STATION

WALL SURFACE



p. 507



1.0

 LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.86kg  IP20   

3000K | >90 CRI | 520lm

CODE

314574W5

314574L5

2.0

 2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

  0.80kg  IP20  

3000K | >90 CRI | 2x260lm

CODE

314674W5

314674L5




TRAIN

WALL SURFACE



509



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

 0.24kg IP20 $\pm 0,3$

3000K | >90 CRI | 420lm

CODE

719668W5

719668L5

2.0

LED 2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


  0.35kg  IP20  $\pm 0,3$ 

3000K | >90 CRI | 2x280lm

ODE

19768W5

19768L5



UNIVERSAL STARS

SIMPLE FORMALITY

Even if maths wasn't your favourite subject: You'll love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. That makes them ideal for virtually any space. No matter if they sparkle from the ceiling or shine from the walls. The sleek, narrow luminaires are available in six great colours, as well as in many different versions. Also for use outdoors. They'll elicit an admiring "wow" from your dear friends and relatives right in the entrance area. Who would have thought that geometry could be so enthralling?




HAVE A LOOK


weverducre.com/universalstars



BOX



DOCUS






HEXO



RAY

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in sechs tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?

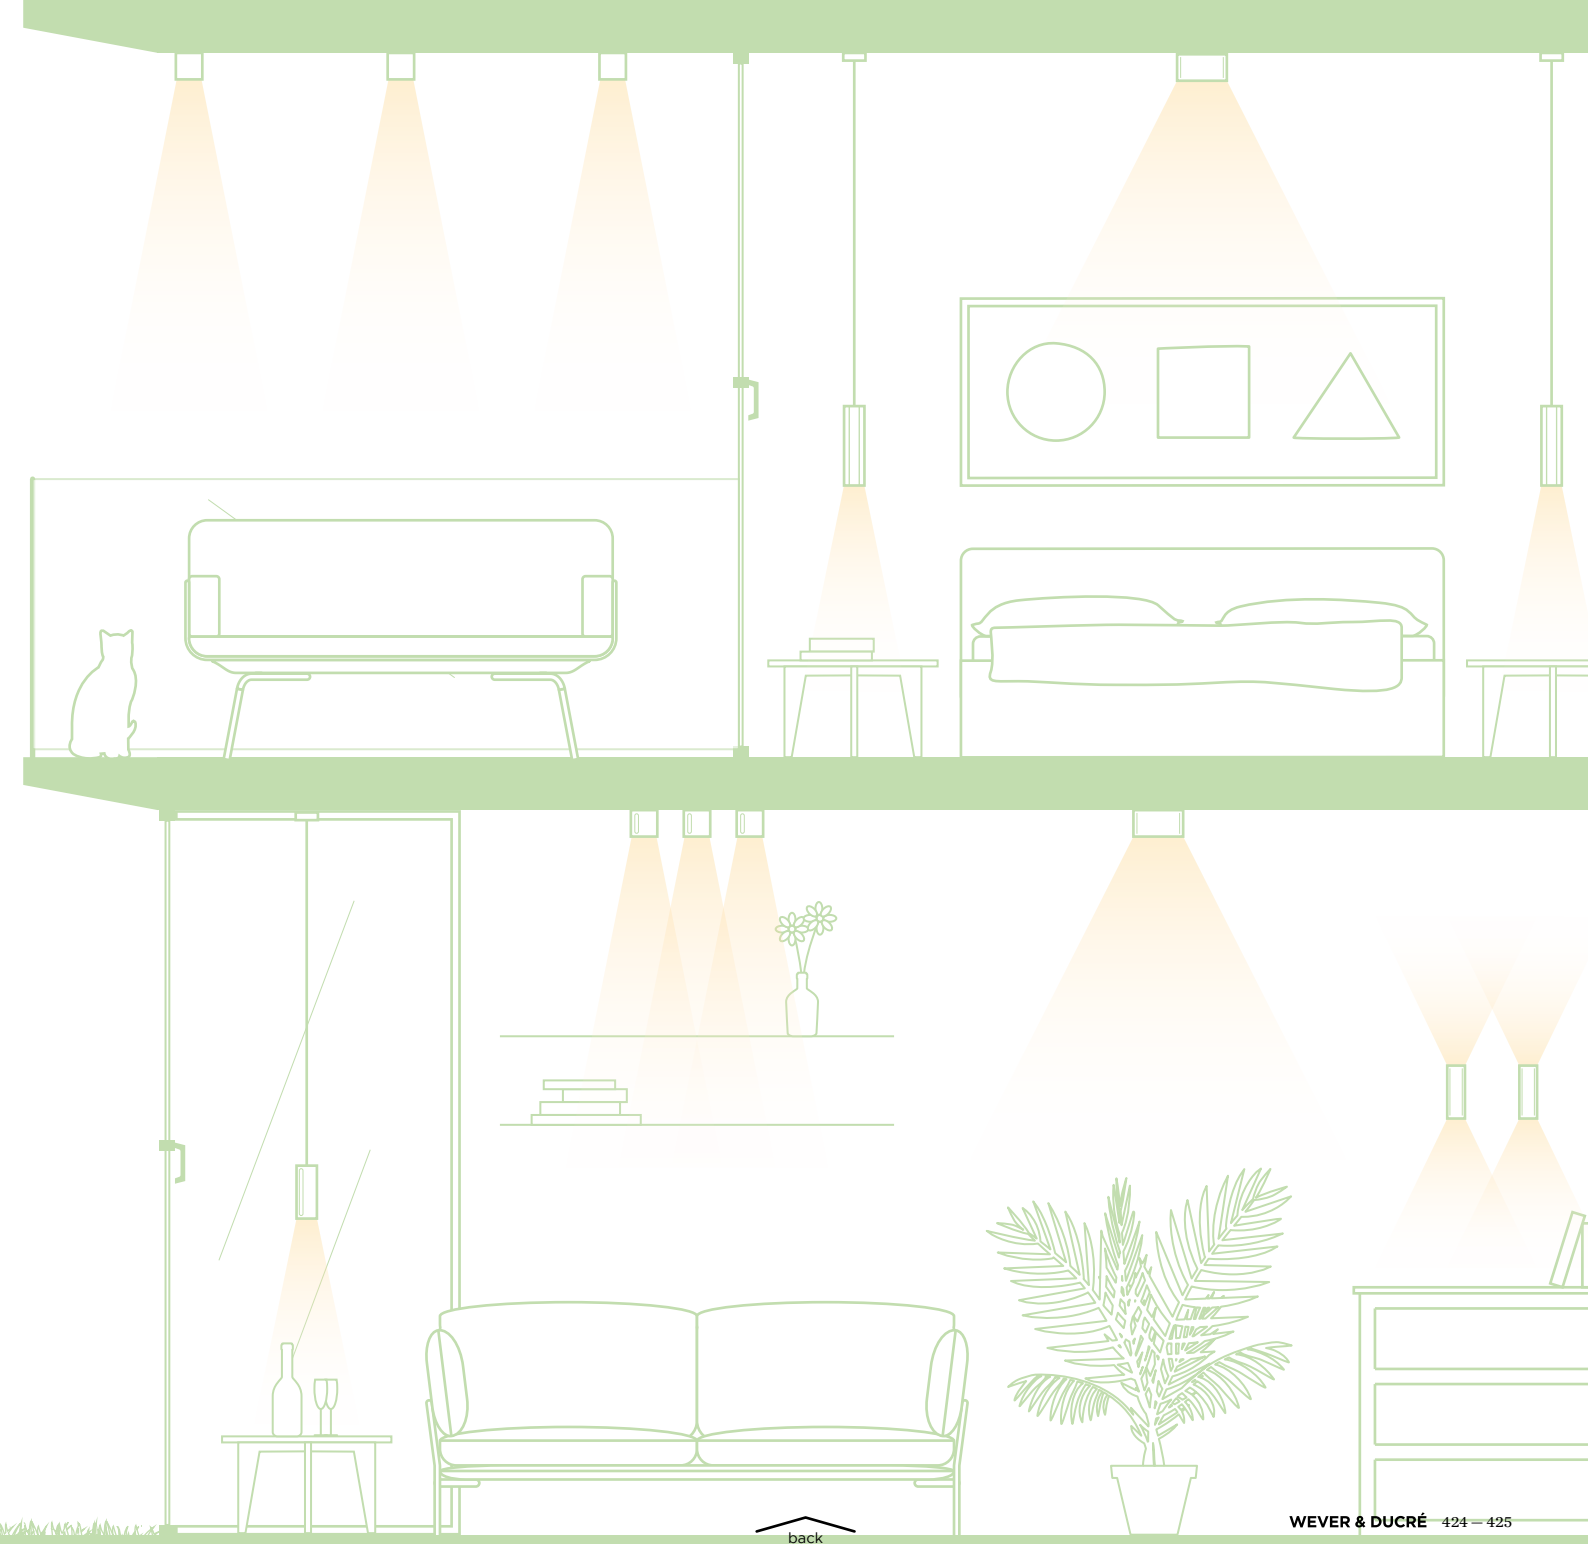

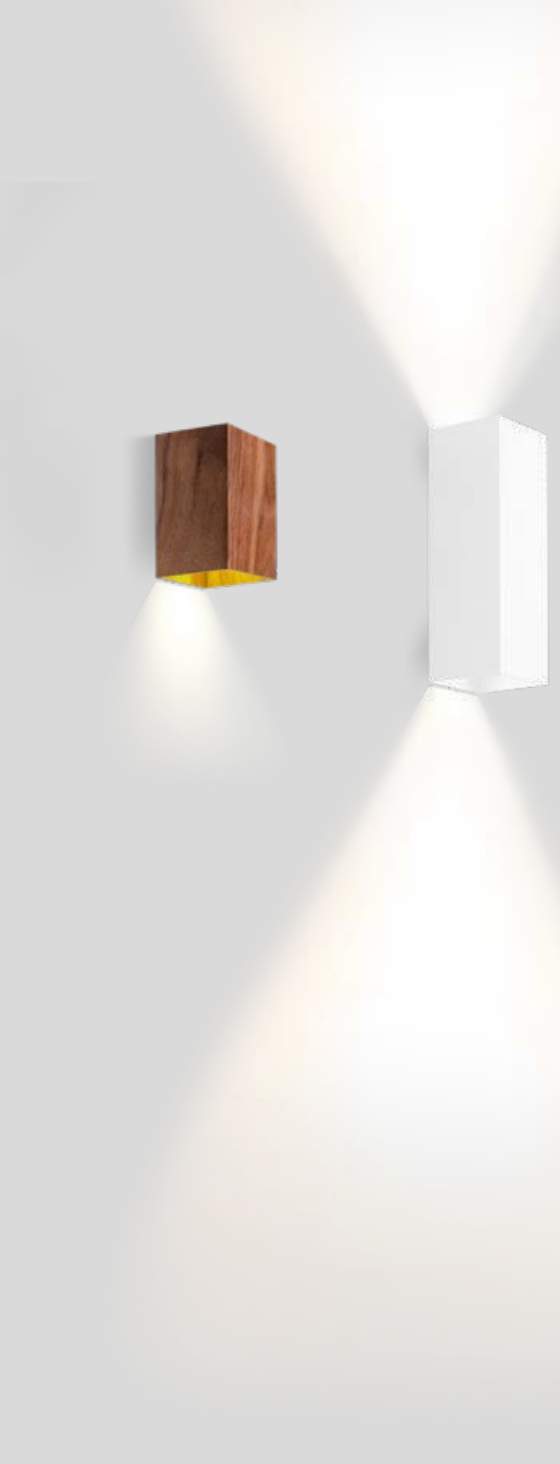

1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

wood	CODE
	300120WN0

aluminium	CODE
	300120W0
	300120L0
	300120P0
	300120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.44kg IP20

wood	CODE
	301120WN0

aluminium	CODE
	301120W0
	301120L0
	301120P0
	301120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



RESTAURANT GUST | INTERIOR DESIGN FREDERIC HOOFT KORTRIJK | BELGIUM



BOX

WALL SURFACE

p. 249

p. 347

p. 465

p. 515

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.60kg

IP20

±0,3°

wood

CODE

331168WN

aluminium

CODE

331168W

331168L

331168G

331168Q

331168P

331168B

Light Colour Selection

LUMEN | CRI

CODE

2700K

400 | >80

2

3000K

440 | >80

4

1800-2850K

400 | >80

9

OPTIONAL

QT14 LED 3W

CODE

2700K | 200lm

9019G705

3000K | 300lm

9019G703

flaps for adjustable beam angle

CODE

900401W0

1.0 QT14

QT14 max.75W | G9
220-240VAC | 50-60Hz
aluminium powder coated brushed

0.66kg

IP20

±0,9°

wood

CODE

3211G0WN0

aluminium

CODE

3211G0W0

3211G0L0

3211G0G0

3211G0Q0

3211G0P0

3211G0B0

Light Colour Selection

LUMEN | CRI

CODE

2700K

2x200 | >80

2

3000K

2x220 | >80

4

1800-2850K

2x200 | >80

9

OPTIONAL

flaps for adjustable beam angle

CODE

900401W0

2.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.67kg

IP20

±0,3°

wood

CODE

331148WN

aluminium

CODE

331148W

331148L

331148G

331148Q

331148P

331148B

Light Colour Selection

LUMEN | CRI

CODE

2700K

2x200 | >80

2

3000K

2x220 | >80

4

1800-2850K

2x200 | >80

9

OPTIONAL

flaps for adjustable beam angle

CODE

900401W0

3.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.86kg

IP20

±0,3°

wood

CODE

331248WN

aluminium

CODE

331248W

331248L

331248G

331248Q

331248P

331248B

Light Colour Selection

LUMEN | CRI

CODE

2700K

2x200 | >80

2

3000K

2x220 | >80

4

1800-2850K

2x200 | >80

9

OPTIONAL

flaps for adjustable beam angle

CODE

900401W0

back

WEVER & DUCRÉ 428 – 429










RAY mini
WALL SURFACE



1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.21kg IP20 0,9-1,1

wood

CODE	
	300220WN0

aluminium


CODE	
	300220W0
	300220L0
	300220P0
	300220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.36kg IP20 0,9-1,1

wood

CODE	
	301220WN0

aluminium


CODE	
	301220W0
	301220L0
	301220P0
	301220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



1.0 LED


LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.62kg IP20 0.3°

CODE	
	332168W
	332168L
	332168G
	332168Q
	332168P
	332168B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4
1800-2850K	400	>80	9



1.0 QT14

QT14 max.75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 0.9°


CODE	
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0Q0
	3221G0P0
	3221G0B0

OPTIONAL

QT14 LED 3W	
	CODE
2700K 200lm	9019G705
3000K 300lm	9019G703

flaps for adjustable beam angle

	CODE
	900401W0



2.0 LED


2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.69kg IP20 0.3°

CODE	
	332148W
	332148L
	332148G
	332148Q
	332148P
	332148B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4
1800-2850K	2x200	>80	9



3.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.85kg IP20 0.3°

CODE	
	332248W
	332248L
	332248G
	332248Q
	332248P
	332248B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4
1800-2850K	2x200	>80	9

RAY


WALL SURFACE







INCH
WALL SURFACE



1.5

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.49kg IP20

3000K | >80 CRI | 480lm

	CODE
	312164W4
	312164B4

2.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.40kg IP20

3000K | >80 CRI | 480lm

	CODE
	312264W4
	312264B4

5.4

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.65kg IP20

3000K | >80 CRI | 480lm

	CODE
	312364W4
	312364B4



2.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.03kg IP20 ~0,3+D

3000K | >90 CRI | 430lm
marble | wood

	CODE
	317474MW5
	317474WN5
	317474MB5

	CODE
	317474W5
	317474G5
	317474Q5
	317474P5
	317474B5



2.0 ROUND


LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

0.77kg IP20 ~0,3+D

3000K | >90 CRI | 430lm
marble | wood

	CODE
	317574MW5
	317574WN5
	317574MB5

	CODE
	317574W5
	317574G5
	317574Q5
	317574P5
	317574B5



3.0 CARRÉ


LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.63kg IP20 ~0,3+D

3000K | >90 CRI | 430lm
marble | wood

	CODE
	317674MW5
	317674WN5
	317674MB5

	CODE
	317674W5
	317674G5
	317674Q5
	317674P5
	317674B5



3.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.09kg IP20 ~0,3+D

3000K | >90 CRI | 430lm
marble | wood

	CODE
	317774MW5
	317774WN5
	317774MB5

	CODE
	317774W5
	317774G5
	317774Q5
	317774P5
	317774B5







PRIVATE RESIDENCE UKRAINE

MILES

UPDATE

WALL SURFACE



9.0

LED 30W | 220-240VAC | 50-60Hz
PCBA 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.13kg IP20 0.3m

3000K | >80 CRI | 1600lm
marble | wood

CODE	
	317274MW4
	317274WN4
	317274MB4

3000K | >80 CRI | 1600lm | aluminium

CODE	
	317274W4
	317274L4
	317274G4
	317274B4

12.0

LED 38W | 220-240VAC | 50-60Hz
PCBA 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.62kg IP20 0.3m

3000K | >80 CRI | 2200lm
marble | wood

CODE	
	317374MW4
	317374WN4
	317374MB4


3000K | >80 CRI | 2200lm | aluminium

CODE	
	317374W4
	317374L4
	317374G4
	317374B4



LIGHTDROP IP44

WALL SURFACE



1.2

QT14 max.40W | G9
220-240VAC | 50-60Hz
powder coated | chrome plated

0.41kg IP44 16

CODE	
	3071V0W0
	3071V0C0
	3071V0B0

OPTIONAL

CODE	
QT14 LED 3W	
2700K 200lm	9019G705


DESIGNED BY STUDIO MANGO





FELIX HOTEL | SPACE CONTROL DESIGN MASCOT | AUSTRALIA

ARZY
WALL SURFACE



1.0
LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | powder coated
chrome

1.56kg IP20 0.3m

CODE	
	325163W4
	325163C4
	325163B4



reddot design award
winner 2010

DESIGNED BY FRANK JANSSENS



OUT


DOOR

CEILING RECESSED

p. 458 — 459



INTRA
p. 459





back



PRIVATE RESIDENCE | ARCHITECT KILLIAN GARTNER | INTERIOR & LIGHT DESIGN ROOMS ATELIER AUSTRIA

INTRA

OUTDOOR
CEILING RECESSED



1.0 OPAL

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal glass | polyamide

0.15kg IP65 3000K 38°

76 70 2-25

3000K | >90 CRI | 350lm | opal glass

CODE	
	733168W5
	733168I5
	733168D5
	733168B5

2.0 SPOT

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
clear lens | polyamide

0.15kg IP65 3000K 38°

76 70 2-25

3000K | >80 CRI | 590lm | lens

CODE	
	733158W4
	733158I4
	733158D4
	733158B4



back

CEILING SURFACE

p. 463 — 475



BLAS 1.0
p. 463



BLAS 2.0
p. 463



BOX
p. 465



RAY
p. 469



TUBE CEILING
p. 471



TUBE CARRÉ CEILING
p. 473





ROB
p. 475


back



PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

BLAS
OUTDOOR
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | glass

1 kg IP65 3+0,3+1 6

3000K | >80 CRI | 640lm

CODE
736187W4
736187D4
736187B4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | glass



1.3 kg IP65 3+0,3+1 6

3000K | >80 CRI | 640lm

CODE
736287W4
736287D4
736287B4



BOX
OUTDOOR
CEILING SURFACE



OPTIONAL

single inner reflector

CODE
911211W1
911211Q1
911211D1
911211B1

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.67kg IP65 0.3-1.0 32°

CODE
735164W
735164Q
735164D
735164B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9



inner cover


CODE
911011W1
911011Q1
911011D1
911011B1







SHOP PHILMODE | ARCHITECT ERIC FRANSSENS BEAUFAYS | BELGIUM



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


0.63kg IP65 0.3° 32°

	CODE
	735364W _
	735364D _
	735364B _

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

RAY
OUTDOOR
CEILING SURFACE





OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041B1





1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.53kg IP65 38°

3000K | >80 CRI | 440lm

	CODE
734164W4	
734164D4	
734164B4	

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.60kg IP65 0.9°

	CODE
734120W0	
734120D0	
734120B0	

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim



	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



TUBE CARRÉ CEILING

OUTDOOR
CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.64kg IP65 0.3~1.0 38°

3000K | >90 CRI | 380lm

	CODE
3000K	734264W5
3000K	734264D5
3000K	734264B5

1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP65 0.9~1.0

	CODE
3000K	734220W0
3000K	734220D0
3000K	734220B0

OPTIONAL




PAR16 LED GU10 6W
phase-cut dim

	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



back



1.6

 LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

  0.70kg  IP44  $\pm 0.3^\circ$ 

2700K | >90 CRI | 860lm

	CODE
	701184W3

3000K | >90 CRI | 950lm

	CODE
	701184W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

2.6

 LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

  1.20kg  IP44  $\pm 0.3^\circ$ 

2700K | >90 CRI | 1250lm

	CODE
	701284W3

3000K | >90 CRI | 1380lm

	CODE
	701284W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

3.5

 LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

  1.90kg  IP44  $\pm 0.3^\circ$ 

2700K | >90 CRI | 1820lm

	CODE
	701384W3

3000K | >90 CRI | 1950lm

	CODE
	701384W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

ROB 

OUTDOOR
CEILING SURFACE



p. 269

WALL RECESSED

p. 479 — 485



SMILE IN 1.0
p. 479



SMILE IN 2.0
p. 479



ORIS 2.0
p. 481



ORIS 0.7
p. 481



ATIM
p. 483



ATIM CARRÉ
p. 485







SMILE IN

OUTDOOR
WALL RECESSED



p. 383



1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP65 0.3m

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	702151W4
	702151D4

ALWAYS USE

power supply IP67

	CODE
350mA 7W	90213301
500mA 7W	90214301

more power supplies on page 590

OPTIONAL

	CODE
recessed housing	90012030

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 0.3m

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	703151W4
	703151D4

ALWAYS USE

power supply IP67

	CODE
350mA 7W	90213301
500mA 7W	90214301

more power supplies on page 590


OPTIONAL

	CODE
recessed housing	90012030



ORIS

OUTDOOR
WALL RECESSED



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP65 0,3+D

47x182 40 4-40

3000K | >80 CRI | 90/150lm

	CODE
	709161W4
	709161D4

ALWAYS USE


power supply IP66

	CODE
350mA 3W	90213101
700mA 3W	90215101

more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012039
concrete housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP65 0,3+D

112x117 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	709261W4
	709261D4

ALWAYS USE


power supply IP66

	CODE
350mA 3W	90213101
700mA 6W	90215301

more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012041
concrete housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 0,3+D

112x185 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	709361W4
	709361D4

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101
700mA 6W	90215301


more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012043
concrete housing	90012042



ATIM
OUTDOOR
WALL RECESSED



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
stainless steel | satinated glass

0.85kg IP65 0.3-16


82x193 95

3000K | >80 CRI | 380lm

CODE
710184I4

OPTIONAL


CODE
louvre long 90019106





ATIM CARRÉ

OUTDOOR
WALL RECESSED



2.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
stainless steel | satinated glass

0.65kg IP65 0.3m 16

108x108 86

3000K | >80 CRI | 380lm

CODE
710284I4

OPTIONAL

CODE
louvre carré 90019105

WALL SURFACE


p. 489 — 527




SMILE ON 1.0
p. 489



SMILE ON 2.0
p. 489




SMILE
p. 491



TAPE
p. 493




TUBE
p. 495



TUBE CARRÉ 1.0
p. 499



TUBE CARRÉ 2.0
p. 501



GETTON
p. 503



BOX
p. 515




BOXX
p. 519



RAY
p. 521



CENTRAL
p. 505



STATION
p. 507




TRAIN
p. 509



TRAIN NARROW
p. 513



PALOS 1.0
p. 523



PALOS 2.0
p. 525



X-BEAM
p. 527



PRIVATE RESIDENCE SWEDEN



SMILE ON

OUTDOOR
WALL SURFACE



p. 403



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.43kg IP65 0.3°

3000K | >90 CRI | 370lm

	CODE
	702258W5
	702258D5

2.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.65kg IP65 0.3°

3000K | >90 CRI | 370lm

	CODE
	703258W5
	703258D5



back



PRIVATE RESIDENCE | SALENS ARCHITECTEN BELGIUM

SMILE


OUTDOOR
WALL SURFACE



p. 405



p. 561



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.02kg IP65 0.3m

3000K | >80 CRI | 360lm

CODE

	703354W4
	703354D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.87kg IP65 0.3m


3000K | >80 CRI | 360lm

CODE

	703454W4
	703454D4



back

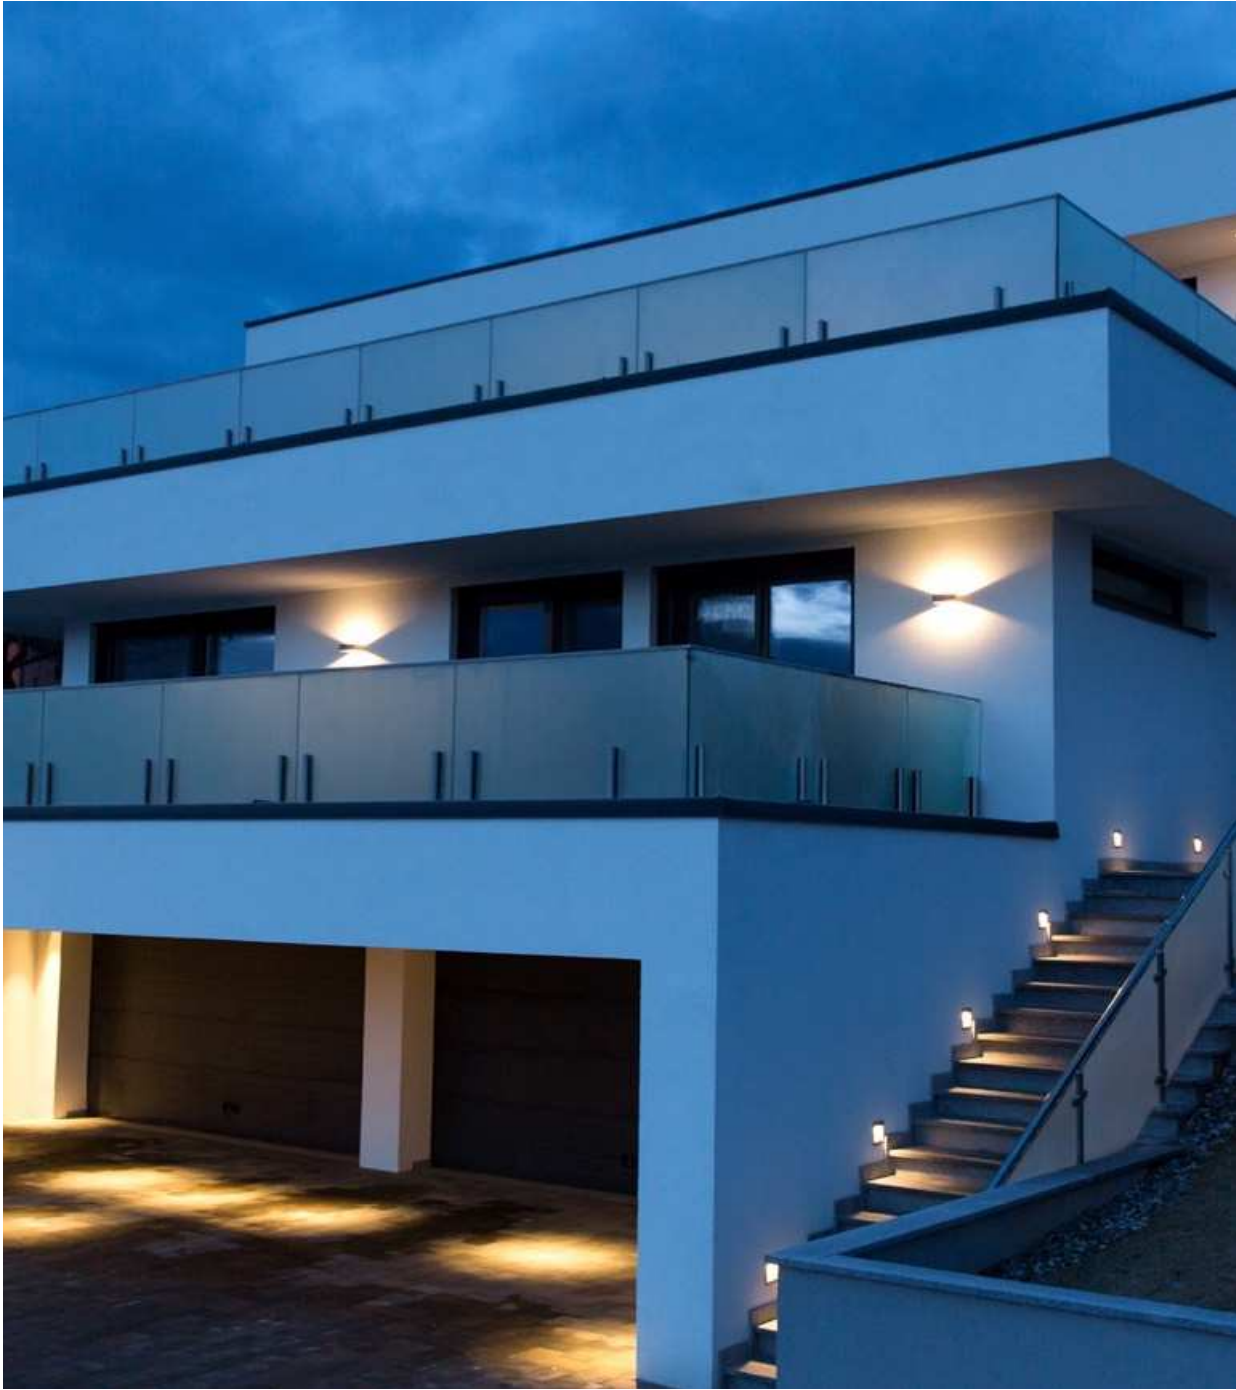

PRIVATE RESIDENCE | HERZBLUT DESIGN AUSTRIA

TAPE

OUTDOOR
WALL SURFACE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg IP65 30°

3000K | >90 CRI | 420lm

CODE

722174W5

722174D5



back

WEVER & DUCRÉ 492 — 493



TUBE

OUTDOOR
WALL SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.45kg IP65 0.3m 38°

3000K | >90 CRI | 390lm

	CODE
White	711164W5
Grey	711164D5
Black	711164B5

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.52kg IP65 0.9m

	CODE
White	711120W0
Grey	711120D0
Black	711120B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim

	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9



more lamps and specs on page 593



PRIVATE RESIDENCE LITHUNIA

TUBE

OUTDOOR
WALL SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg IP65 38°

3000K | >90 CRI | 2x390lm

	CODE
	711264W5
	711264D5
	711264B5

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.90kg IP65

	CODE
	711220W0
	711220D0
	711220B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim


	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593





PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TECLUX OY + SIGGE / ANTTI KORPI FINLAND




1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.66kg IP65 38°

3000K | >90 CRI | 390lm

	CODE
	744164W5
	744164D5
	744164B5



1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.71kg IP65

	CODE
	744120W0
	744120D0
	744120B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim

	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9



more lamps and specs on page 593



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

OUTDOOR
WALL SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1kg IP65 0.3m 38°

3000K | >90 CRI | 2x390lm

	CODE
White	744264W5
Dark Grey	744264D5
Black	744264B5

2.0 PAR16

2xPAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.05kg IP65 0.9m

	CODE
White	744220W0
Dark Grey	744220D0
Black	744220B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim

	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9


more lamps and specs on page 593



back



PRIVATE RESIDENCE AUSTRIA





GETTON

OUTDOOR
WALL SURFACE



p. 553



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal glass

0.83kg IP65 0.3m G

3000K | >80 CRI | 665lm

	CODE
	717474W4
	717474D4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more details on page 610

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
clear glass

0.83kg IP65 0.3m G

3000K | >80 CRI | 720lm

	CODE
	717374W4
	717374D4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more details on page 610





PRIVATE RESIDENCE UNITED KINGDOM

CENTRAL

OUTDOOR
WALL SURFACE



p. 419



1.0

 LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

  0.91kg  IP65  3~0,3~D 

3000K | >90 CRI | 520lm

	CODE
	313774W5
	313774D5
	313774B5

2.0

 2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

  0.91kg  IP65  3~0,3~D 

3000K | >90 CRI | 2x260lm

	CODE
	313874W5
	313874D5
	313874B5



back






PRIVATE RESIDENCE AUSTRIA

STATION

OUTDOOR
WALL SURFACE



p. 421



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.86kg IP65

3000K | >90 CRI | 520lm

	CODE
	314774W5
	314774D5
	314774B5

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65

3000K | >90 CRI | 2x260lm

	CODE
	314874W5
	314874D5
	314874B5




PRIVATE RESIDENCE | MOVING HOUSE | PILZARCHITEKTUR AUSTRIA

TRAIN

OUTDOOR
WALL SURFACE



p. 423



1.0

 LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

  0.24kg  IP65  3+ 

3000K | >90 CRI | 420lm

	CODE
	719868W5
	719868D5
	719868B5

2.0

 2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

  0.35kg  IP65  3+ 


3000K | >90 CRI | 2x280lm

	CODE
	719968W5
	719968D5
	719968B5



PRIVATE RESIDENCE CZECH REPUBLIC




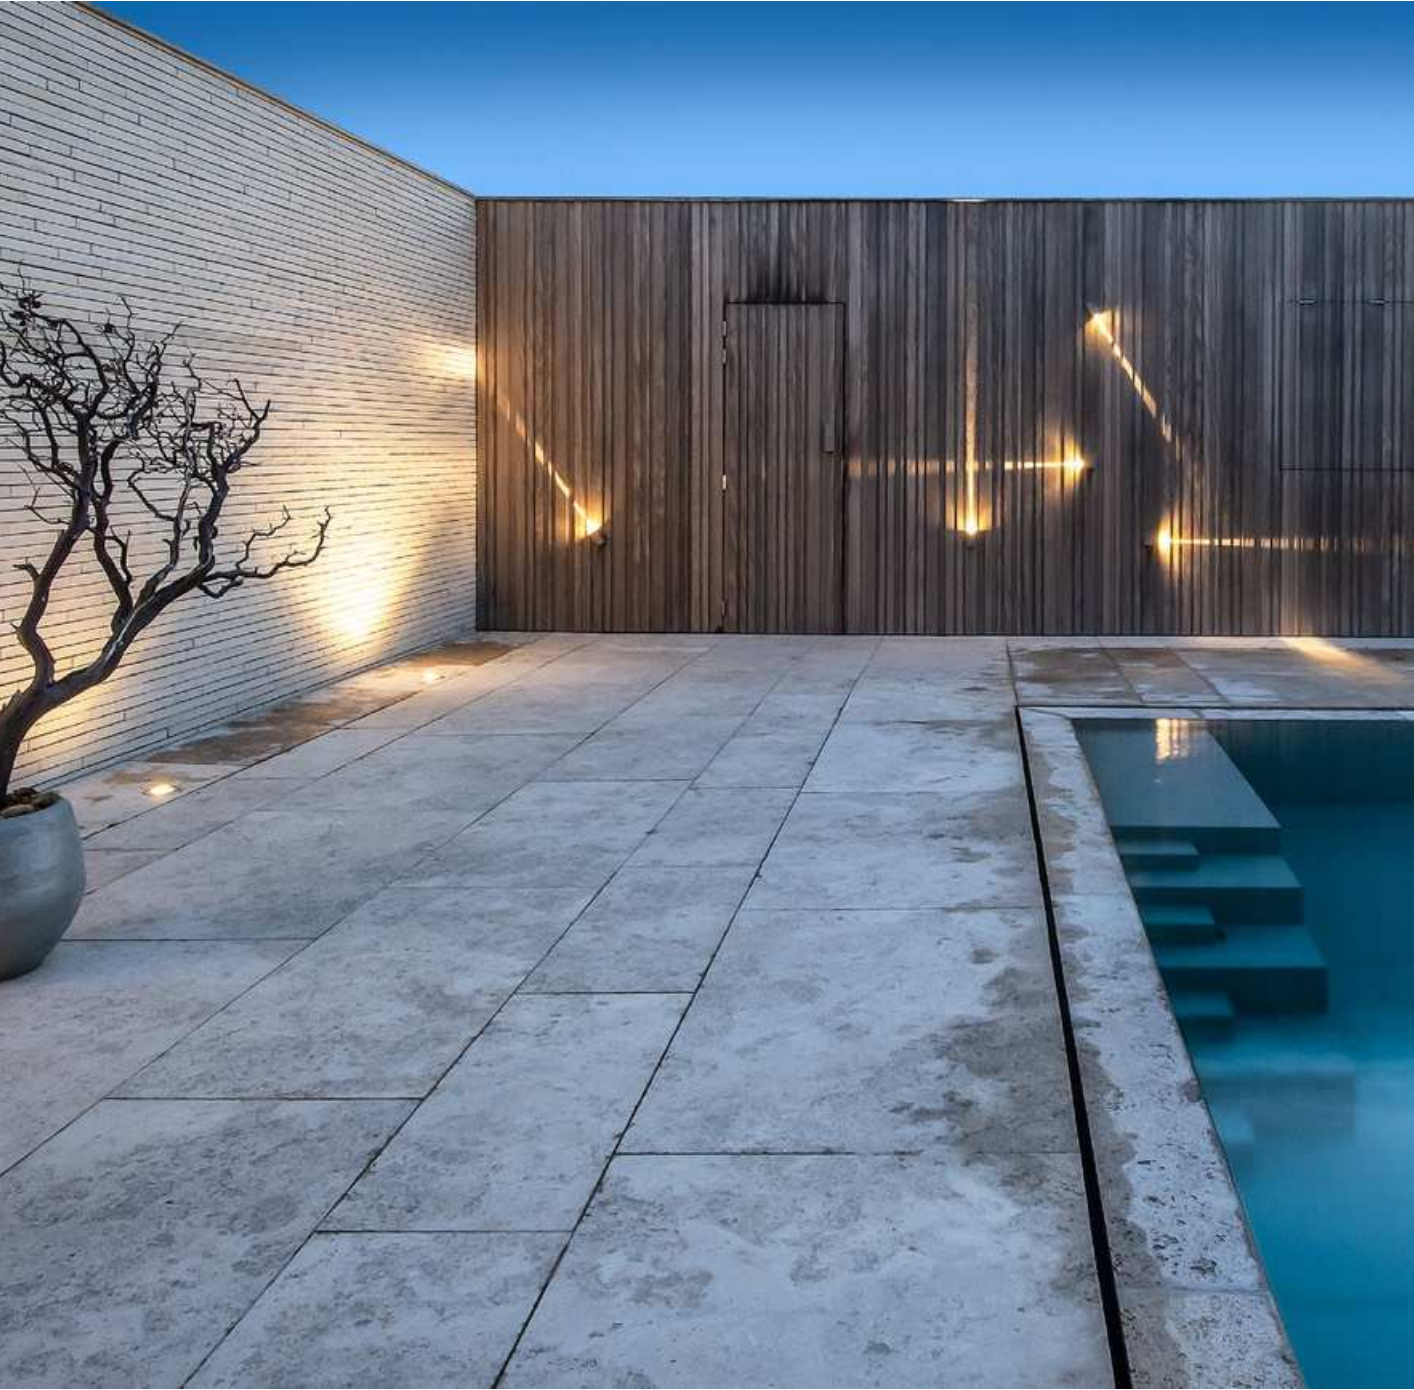

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

TRAIN NARROW

OUTDOOR
WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.24kg IP65 0.3m

3000K | >80 CRI | 420lm
narrow up or narrow down

CODE
719143D4

2.0

2xLED 3W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.35kg IP65 0.3m

3000K | >80 CRI | 2x250lm
narrow up/narrow down

CODE
719243D4





3000K | >80 CRI | 2x250lm
narrow up/flood down

CODE
719253D4



BOX

OUTDOOR WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.60kg IP65 0.3

	CODE
	740168W
	740168Q
	740168D
	740168B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

2.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.66kg IP65 0.3

	CODE
	740148W
	740148Q
	740148D
	740148B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.67kg IP65 0.3

	CODE
	740268W
	740268Q
	740268D
	740268B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

4.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.86kg IP65 0.3

	CODE
	740248W
	740248Q
	740248D
	740248B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4






PRIVATE RESIDENCE | ARCHITECT REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE



1.0

2x 2xLED 3W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
phase-cut dim | aluminium powder
coated | incl. flaps for adjustable
beam angle

0.93kg IP65 0.3


CODE	
	739148W
	739148D
	739148B

Light Colour Selection		
	LUMEN CRI	CODE
2700K	2x400 >80	2
3000K	2x440 >80	4





PRIVATE RESIDENCE | ARCHITECT DOMINIQUE VANDE KERCKHOVE BELGIUM




1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65 0.3

	CODE
	741168W
	741168D
	741168B

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4




2.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65 0.3

	CODE
	741148W
	741148D
	741148B

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4




3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65 0.3

	CODE
	741268W
	741268D
	741268B

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



4.0


2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65 0.3

	CODE
	741248W
	741248D
	741248B

Light Colour Selection			
	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

RAY
OUTDOOR
WALL SURFACE






PALOS UPDATE

OUTDOOR
WALL SURFACE



p. 567



1.0

 LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

   1.55kg  IP65  0-10V 

3000K | >90 CRI | 520lm

CODE	
	716174W5
	716174D5
	716174A5




PRIVATE RESIDENCE | DEJAEGER INTERIEURARCHITECTEN BELGIUM

PALOS

UPDATE

OUTDOOR
WALL SURFACE

p. 569



2.0

2xLED8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.86kg ⊕ IP65 ⚙️+0,3-1⌚



3000K | >90 CRI | 2x520lm

CODE

716274W5



716274D5

716274A5

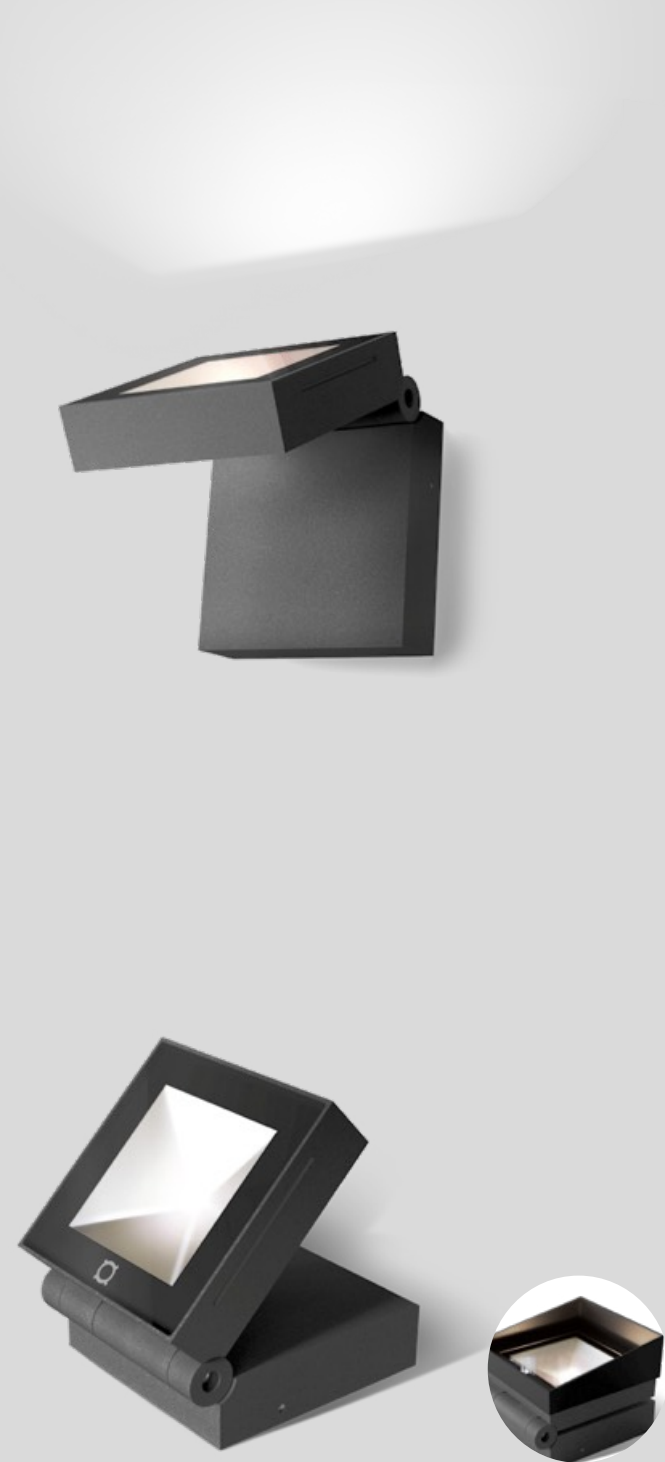

X-BEAM

OUTDOOR
WALL SURFACE



1.0

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

✉ 1.28kg IP65
S+0,3+D 6 120°

0/110°

3000K | >80 CRI | 1040lm

CODE

700364D4

OPTIONAL

CODE

snoot 90019023

2.0

LED 16W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

✉ 1.28kg IP65
S+0,3+D 6 9x 12°

0/110°

3000K | >80 CRI | 895lm

CODE

700354D4

OPTIONAL

CODE

snoot 90019023

FLOOR RECESSED

p. 531 — 539



CARD
p. 531



MAP
p. 533




MAP ASYM
p. 535



CHART
p. 537



CHART ASYM
p. 539






back




CARD

OUTDOOR
FLOOR RECESSED



0.1

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated




3000K | >80 CRI | 50lm

	CODE
	750161I4

0.2

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated



3000K | >80 CRI | 50lm

	CODE
	750261I4

0.3

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated



3000K | >80 CRI | 50lm

	CODE
	750361I4

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101

ALWAYS USE

power supply IP66


	CODE
350mA 3W	90213101





MAP

OUTDOOR
FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass
aluminium powder coated




41 100

3000K | >80 CRI | 220lm

CODE
751163I4


OPTIONAL

recessed housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated




78 135

3000K | >80 CRI | 470lm

CODE
751264I4

OPTIONAL

recessed housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated




110 120

3000K | >80 CRI | 750lm

CODE
751364I4

OPTIONAL

recessed housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated



150 185

3000K | >80 CRI | 950lm

CODE
751464I4

OPTIONAL


recessed housing 90012204



PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.06kg IP67 IK08 0.3m


110 160

3000K | >80 CRI | 450lm
asymmetric reflector

CODE
75155714

OPTIONAL

CODE
recessed housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.72kg IP67 IK09 0.3m

150 185

3000K | >80 CRI | 550lm
asymmetric reflector

CODE
75165714

OPTIONAL


CODE
recessed housing 90012204





CHART

OUTDOOR
FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass
aluminium powder coated

0.39kg IP67 IK08 38°


45 118

3000K | >80 CRI | 220lm

CODE
752163I4

OPTIONAL

CODE
recessed housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

0.70kg IP67 IK08 38°


78 135

3000K | >80 CRI | 470lm

CODE
752264I4

OPTIONAL

CODE
recessed housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.05kg IP67 IK08 38°


110 175

3000K | >80 CRI | 750lm

CODE
752364I4

OPTIONAL

CODE
recessed housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.05kg IP67 IK09 38°

150 185

3000K | >80 CRI | 950lm

CODE
752464I4



OPTIONAL

CODE
recessed housing 90012204



CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
stainless steel | glass

1.10kg IP67 IK08 0.3m

110 160

3000K | >80 CRI | 450lm
asymmetric reflector

CODE
75255714

OPTIONAL

CODE
recessed housing 90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
stainless steel | glass

1.83kg IP67 IK09 0.3m

150 185

3000K | >80 CRI | 550lm
asymmetric reflector

CODE
75265714

OPTIONAL

CODE
recessed housing 90012204



FLOOR SURFACE

p. 543 — 569



COSTA 1.0
p. 543



COSTA 2.0
p. 545



TAPE
p. 549



PACE
p. 551



SMILE
p. 561



FIFTY FIFTY
p. 563



GETTON
p. 553



LINUS
p. 555



EDGE
p. 557



PALLUZ C
p. 559



SWAY
p. 565




PALOS 1.0
p. 567



PALOS 2.0
p. 569

 back

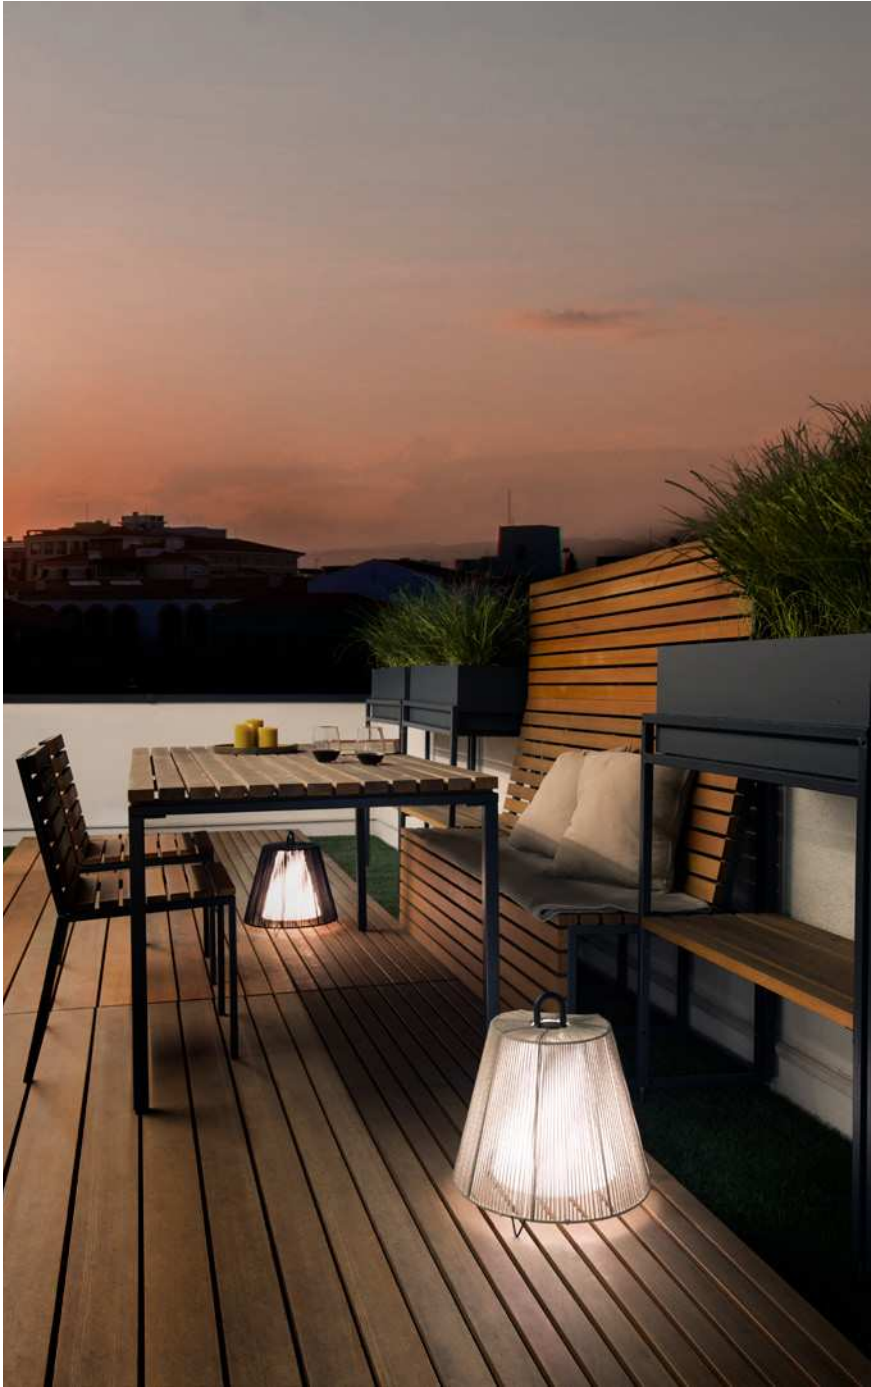


PRIVATE RESIDENCE AUSTRIA



COSTA



OUTDOOR
FLOOR SURFACE



1.0 LED

2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

0.90kg IP65

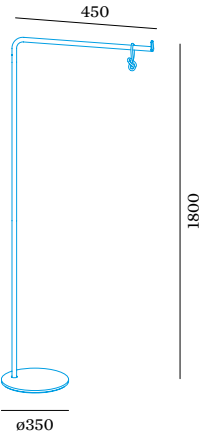

handle colour

	CODE
	865186YE9
	865186OR9
	865186SB9
	865186B9

OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

OPTIONAL


pole

	CODE
	90056001






HOTEL YURBBAN BARCELONA | SPAIN

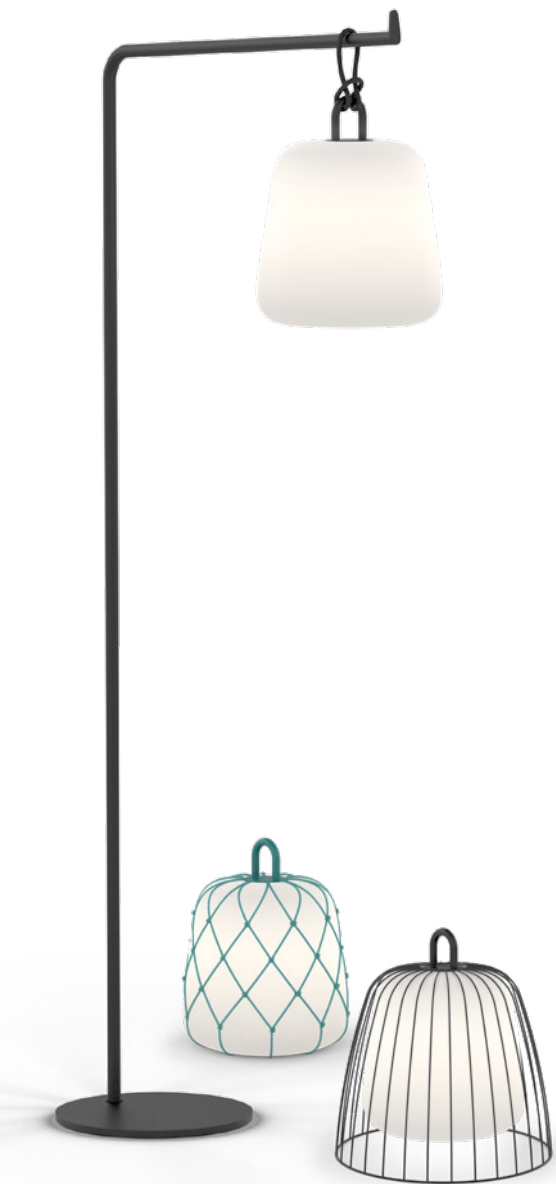

COSTA

OUTDOOR
FLOOR SURFACE




2.0 LED

 2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

   1.10kg  IP65

handle colour


	CODE
	865286YE9
	865286OR9
	865286SB9
	865286OB9



OPTIONAL

2.0 rope


	CODE
	90057192
	90057191
	90057193
	90057190



OPTIONAL

2.1 cage

	CODE
	90057182
	90057181
	90057183
	90057180

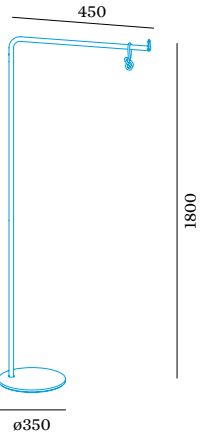



OPTIONAL

pole

	CODE
	90056001





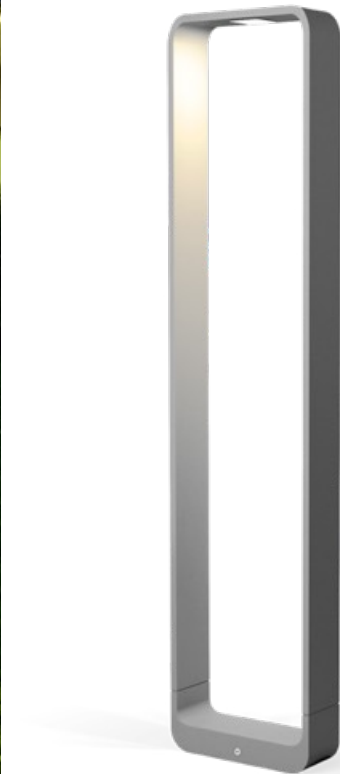

4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.92kg IP65

3000K | >90 CRI | 420lm

	CODE
	722274W5
	722274D5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


2.60kg IP65

3000K | >90 CRI | 420lm

	CODE
	722374W5
	722374D5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


3.10kg IP65

3000K | >90 CRI | 420lm

	CODE
	722474W5
	722474D5

OPTIONAL

	CODE
ground spike	90013102



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.00kg IP65 $\approx 0,3 \cdot D$

3000K | >90 CRI | 420lm

CODE
723174W5
723174D5
723174B5

OPTIONAL

CODE
ground spike 90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.33kg IP65 $\approx 0,3 \cdot D$

3000K | >90 CRI | 420lm

CODE
723274W5
723274D5
723274B5

OPTIONAL

CODE
ground spike 90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.61kg IP65 $\approx 0,3 \cdot D$

3000K | >90 CRI | 420lm

CODE
723374W5
723374D5
723374B5


OPTIONAL

CODE
ground spike 90013102




GETTON

OUTDOOR
FLOOR SURFACE



p. 503



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65 0.3m

3000K | >80 CRI | 665lm | opal glass


CODE
717574D4

ALWAYS USE

	CODE
base 400	910052D0
base 600	910054D0
base 800	910058D0

OPTIONAL

	CODE
ground spike	90013101



2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65 0.3m

3000K | >80 CRI | 720lm | clear glass

CODE
717674D4

ALWAYS USE

	CODE
base 400	910052D0
base 600	910054D0
base 800	910058D0

OPTIONAL

	CODE
ground spike	90013101



PRIVATE RESIDENCE | ARCHITECT ING. ARCH. ADRIAN MOROCZ BRATISLAVA



LINUS

UPDATE

OUTDOOR
FLOOR SURFACE

7070250150350550110110

1.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.95kg

IP65

±0.3°

Ⓜ

3000K | >80 CRI | 320lm

CODE

726173D4

726173Y4

726173A4

ALWAYS USE

base 150

CODE

910024D0

910024Y0

910024A0

base 350

CODE

910026D0

910026Y0

910026A0

base 550

CODE

910028D0

910028Y0

910028A0

OPTIONAL

CODE

90013103

90013302

7070250150350550110110

2.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.99kg

IP65

±0.3°

Ⓜ

3000K | >80 CRI | 300lm | opal glass

CODE

726273D4

726273Y4

726273A4

ALWAYS USE

base 150

CODE

910024D0

910024Y0

910024A0

base 350

CODE

910026D0

910026Y0

910026A0

base 550

CODE

910028D0

910028Y0

910028A0

OPTIONAL

CODE

90013103

90013302

7070150350550110110

3.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.52kg

IP65

±0.3°

Ⓜ

3000K | >80 CRI | 300lm

CODE

726373D4

726373Y4

726373A4

ALWAYS USE

base 150

CODE

910024D0

910024Y0

910024A0

base 350

CODE

910026D0

910026Y0

910026A0

base 550

CODE

910028D0

910028Y0

910028A0

OPTIONAL

CODE

90013103


90013302

back

WEVER & DUCRÉ 554 — 555



EDGE
OUTDOOR
FLOOR SURFACE



2.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

2.41kg IP65 3~0,3~D

3000K | >80 CRI | 480lm

CODE

721174D4



4.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

3.34kg IP65 3~0,3~D

3000K | >80 CRI | 480lm

CODE

721274D4



6.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

4.45kg IP65 3~0,3~D

3000K | >80 CRI | 480lm

CODE

721474D4



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

5.60kg IP65 3~0,3~D

3000K | >80 CRI | 480lm

CODE



721374D4



PRIVATE RESIDENCE SWEDEN

PALLUZ C

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg IP65 1.30kg

3000K | >80 CRI | 665lm | opal glass

CODE
724374D4

ALWAYS USE

CODE
base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation
base 230 910032D0

OPTIONAL

CODE
ground spike for invisible base
230 90013104
ground fixation for base
230 600 800 90013303

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg IP65 1.30kg

3000K | >80 CRI | 720lm | clear glass

CODE
724474D4

ALWAYS USE

CODE
base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation
base 230 910032D0

OPTIONAL

CODE
ground spike for invisible base
230 90013104
ground fixation for base
230 600 800 90013303



PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TELUX OY + SIGGE / ANTTI KORPI, FINLAND




SMILE

OUTDOOR
FLOOR SURFACE



p. 405

p. 491



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.15kg IP65 0.3m

3000K | >80 CRI | 360lm

CODE
703554D4

ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0

base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.95kg IP65 0.3m

3000K | >80 CRI | 360lm

CODE
703654D4

ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0


base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0



FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.20kg IP65 0.3m

3000K | >80 CRI | 360lm

CODE
756174D4


ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0

base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0



2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.98kg IP65 0.3m

3000K | >80 CRI | 360lm

CODE
756274D4

ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0

base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0







PRIVATE RESIDENCE ITALY



SWAY

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.01kg IP54 140°/140°

140°/140°

3000K | >80 CRI | 520lm

CODE
720174D4

ALWAYS USE

base with fixation plate

	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

2.0

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.10kg IP54 140°/140°

140°/140°

3000K | >80 CRI | 2x520lm

CODE
720274D4

ALWAYS USE

base with fixation plate


	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0



PRIVATE RESIDENCE | PANOS NIKOLAIDIS | HALO ARCHITECTURAL LIGHTING GREECE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.40kg IP65 0.3

3000K | >90 CRI | 520lm

	CODE
	716374D5
	716374A5

ALWAYS USE

base with fixation plate
base 300

	CODE
	910013D0
	910013A0

base 400

	910014D0
	910014A0

base 600

	910016D0
	910016A0

base 800

	910018D0
	910018A0

base 1000

	910010D0
	910010A0

ALWAYS USE

base with concrete fixation
base 300

	CODE
	910073D0
	910073A0

base 400

	910074D0
	910074A0

base 600


	910076D0
	910076A0

base 800

	910078D0
	910078A0

base 1000

	910070D0
	910070A0



2.0

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.65kg IP65 0.3

3000K | >90 CRI | 2x520lm

	CODE
	716474D5
	716474A5

ALWAYS USE

base with fixation plate
base 300

	CODE
	910013D0
	910013A0

base 400

	910014D0
	910014A0

base 600

	910016D0
	910016A0

base 800

	910018D0
	910018A0

base 1000

	910010D0
	910010A0

ALWAYS USE

base with concrete fixation
base 300

	CODE
	910073D0
	910073A0

base 400

	910074D0
	910074A0

base 600

	910076D0
	910076A0

base 800

	910078D0
	910078A0

base 1000


	910070D0
	910070A0

FLOOR PROJECTOR

p. 573 — 579



STIPO
p. 573

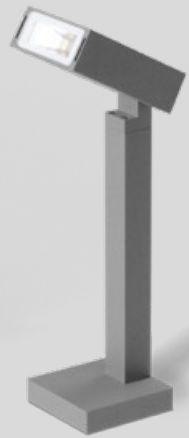

STAKE
p. 575




STAKE FOLD
p. 577



X-BEAM
p. 579



OUTDOOR FLOOR PROJECTOR



4.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | incl. power supply
aluminium powder coated

 0.49 kg
  IP65
  ±0,3°
  G
  135°
 38°

3000K | >80 CRI | 460lm | 2m cable

CODE
737467D4
737467Y4

ALWAYS USE

pole 200 excl. spike

CODE

910062D0
910062Y0

pole 400 excl. spike

pole 600 excl. spike



910066D0

910066Y0

pole 800 excl. spike

910068D0

910068Y0

OPTIONAL



	CODE
ground spike	90013106



PRIVATE RESIDENCE AUSTRIA

STAKE

OUTDOOR
FLOOR PROJECTOR



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.55kg IP54 0.3m 6

0/120°

3000K | >80 CRI | 460lm | 1m cable

	CODE
	727174D4

OPTIONAL

	CODE
ground spike	90013106
snoot	90019004

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.50kg IP54 0.3m 6

0/120°

3000K | >80 CRI | 460lm

	CODE
	727374D4

ALWAYS USE

	CODE
base 200	910042D0
base 400	910044D0

OPTIONAL

	CODE
ground spike	90013107
snoot	90019004




back



PRIVATE RESIDENCE BELGIUM

STAKE FOLD

OUTDOOR
FLOOR PROJECTOR



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.78kg IP54 0.3m


0/90°

3000K | >80 CRI | 460lm

CODE
727274D4

OPTIONAL

CODE
ground spike 90013107
snoot 90019004







PRIVATE RESIDENCE AUSTRIA

X-BEAM

OUTDOOR
FLOOR PROJECTOR



1.0

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0/110°

3000K | >80 CRI | 1040lm
CODE
700364D4

OPTIONAL

CODE
ground spike 90013115
snoot 90019023

2.0

LED 16W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

LED 16W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0/110°

3000K | >80 CRI | 895lm
CODE
700354D4


OPTIONAL

CODE
ground spike 90013115
snoot 90019023



TECH
NICAL

WELL, WELL ... LOOK WHAT THE CAT DRAGGED IN.




CRI 70+

AREA OF APPLICATION

Offices and shops
for average use

ANWENDUNGSBEREICH

*Büro- und Geschäftsräume mit
durchschnittlichen Anwendungen*




CRI 80+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDUNGSBEREICH

*Privaträume, Büros
und Verkaufsbereiche*




CRI 90+

AREA OF APPLICATION

Museums, galleries, exquisite dining,
and exclusive products in stores


ANWENDUNGSBEREICH

*Museen, Gallerien, exquisites Essen und
Qualitätsprodukte in Shops*

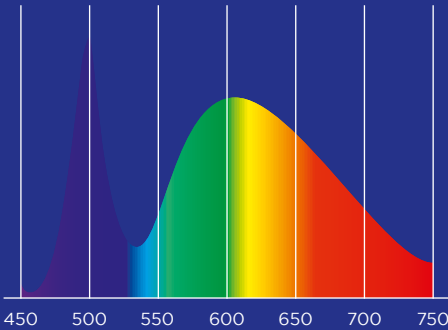


Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, shows the quality of how colours are perceived under artificial light. The higher this value, and 100 CRI would be possible in theory, the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

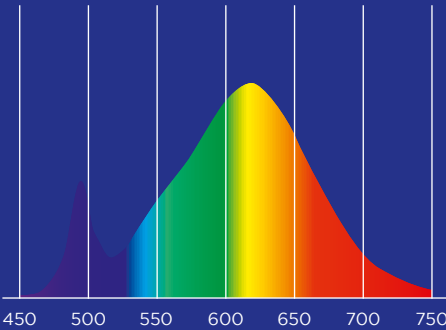

Wavelength (nm) / Wellenlänge (nm)


Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

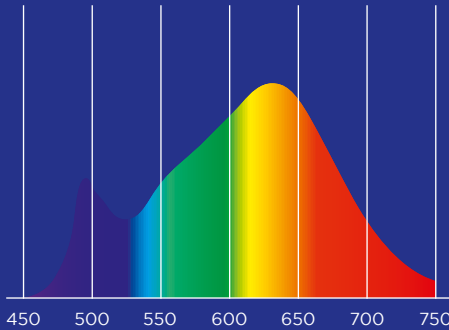

Wavelength (nm) / Wellenlänge (nm)


YOU HAD ME AT HELLO.

DIMMING

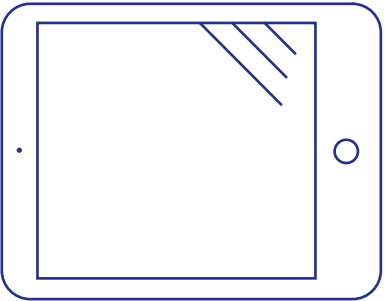

DIM DALI

Digital

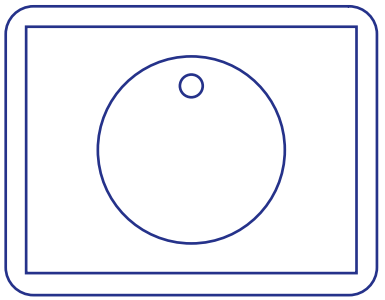

PHASE-CUT DIM

Triac (Analog)

LET THERE BE LIGHT

Would you like to control your light digitally or through the building automation system? No problem! DALI lets you group different lights, dim lights separately, or even program different light ambiance scenarios. Sounds great? It is. Because all you need for this is a five-wire cable and the corresponding software. Then you can control all of your lighting conveniently on your iPad or iPhone. Almost like James Bond.

ES WERDE LICHT


Sie möchten Ihr Licht digital oder über die Gebäudeautomatisierung steuern? Kein Problem. Mit DALI können Sie verschiedene Leuchten gruppieren, Leuchten separat dimmen und sogar verschiedene Lichtstimmungen vorab einstellen. Klingt toll? Ist es auch. Denn für all das brauchen Sie nur ein 5-poliges Kabel und die entsprechende Software. Danach können Sie die gesamte Beleuchtung mit nur einem Klick über das iPad und iPhone steuern. Fast wie James Bond.

WHOA THAT'S BRIGHT ...

You will never hear that phrase in your apartment. Because the analogue phase cut dimmer lets you set the light intensity in every room perfectly. What do you need? Normal wiring with a three-wire cable and a suitable dimmer. A solution that is especially perfect when you are renovating your apartment and don't want to change the wiring. And with the Ambient White Dim, you can even set the colour temperature with a simple phase-cut dimmer. Nothing could be easier.

UI, DAS BLENDET ...

Diesen Satz werden Sie in Ihrer Wohnung garantiert nie hören. Denn mit dem analogen Phasenabschnittsdimmer lässt sich die Lichtintensität in jedem Raum perfekt einstellen. Was Sie dazu brauchen? Eine normale Verkabelung mit einem 3-poligen Kabel und einen passenden Dimmer. Eine Lösung, die vor allem dann perfekt ist, wenn Sie gerade Ihre Wohnung renovieren und die Verkabelung nicht ändern wollen. Und mit dem Ambient White Dim können Sie mit einem einfachen Phasenabschnittsdimmer sogar die Lichtfarbe einstellen. Bequemer geht's nicht.

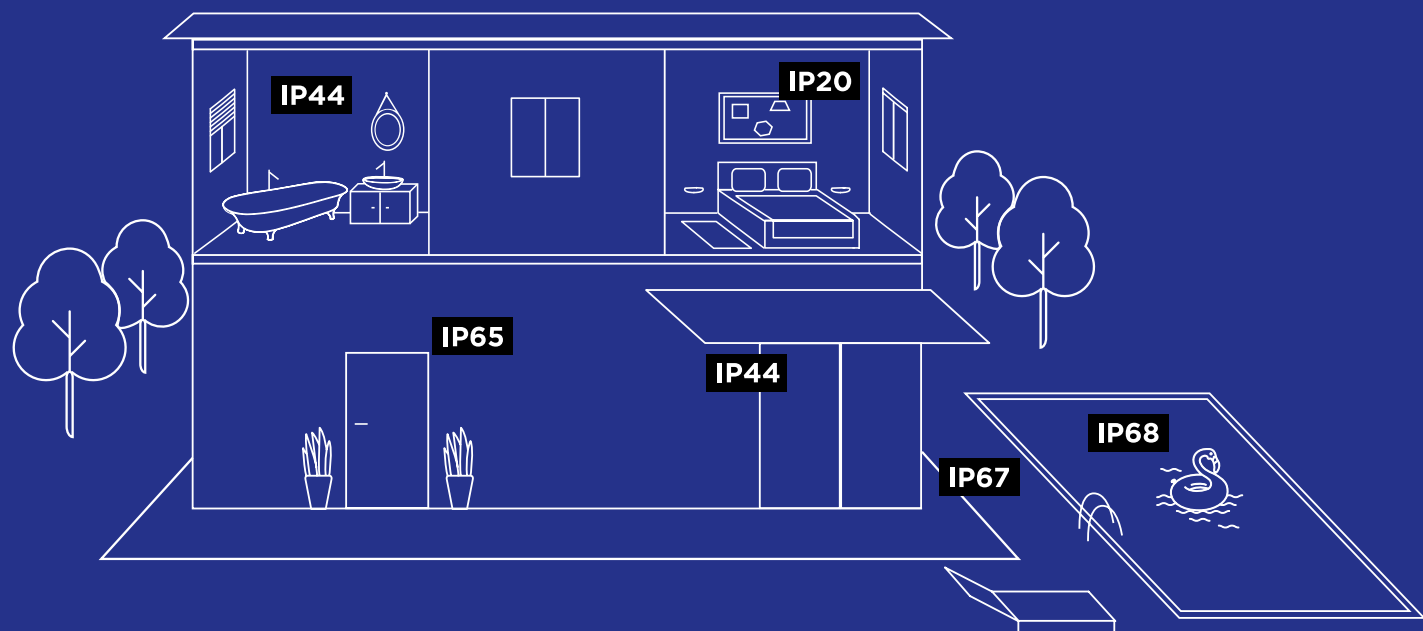

GENERAL REMARK

We advise to have the lighting devices installed only by a qualified electrician. In case the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against dust

Schutz gegen Festkörper



No protection
Kein Schutz



Protected against solid
objects greater than 50 mm Ø
*Geschützt vor festen
Gegenständen über 50 mm Ø*



Protected against solid
objects greater 12 mm Ø
*Geschützt vor festen
Gegenständen über 12 mm Ø*



Protected against solid
objects over 2.5mm Ø
*Geschützt vor festen
Gegenständen über 2,5mm Ø*



Protected against solid
objects greater than 1.0 mm Ø
*Geschützt vor festen
Gegenständen über 1,0 mm Ø*



Dust protected
Staubgeschützt



Dust tight
Staubdicht

SECOND DIGIT

Protection against water

Schutz gegen Flüssigkeiten



No protection
Kein Wasserschutz



Protected against vertically
dripping water
*Geschützt vor senkrecht
fallendem Tropfwasser*



Protected against dripping
water (tilted up to 15°)
*Geschützt vor schräg fallen-
dem Tropfwasser (bis 15°)*



Protected against
spray water
*Geschützt vor
Sprühwasser*



Protected against splashing
water from all directions
*Geschützt vor Spritzwasser
aus allen Richtungen*



Protected against
water jets
*Geschützt vor
Strahlwasser*



Protected against
strong water jets
*Geschützt vor starkem
Strahlwasser*



Protected against
penetrating water during
short-term immersion
*Geschützt vor eindringendem
Wasser beim kurzzeitigen
Eintauchen*






Protected against
submersion
*Geschützt vor eindrin-
gendem Wasser beim
Untertauchen*

DIM THE LIGHTS

IT CAN BE SO EASY

Never have your words and your touch been any more illuminating than with our new collection of ZigBee-compatible luminaires. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen or a command to your voice-controlled device. Sounds easy? It is: Choose your favourite ZigBee products from our collection, connect them to your smart home system such as Amazon Echo or homee and you're good to go. Whether you want bright lights for breakfast, candle light atmosphere for dinner or anything in between – just kick up your feet and touch or talk to set your desired mood.

Noch nie war die Erleuchtung so einfach wie mit unserer ZigBee-kompatiblen Leuchtenkollektion – ein einfacher Klick oder eine Aufforderung an dein sprachgesteuertes Gerät genügen. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer ZigBee Kollektion auswählen, mit dem Smart-Home-System wie Amazon Echo oder homee verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

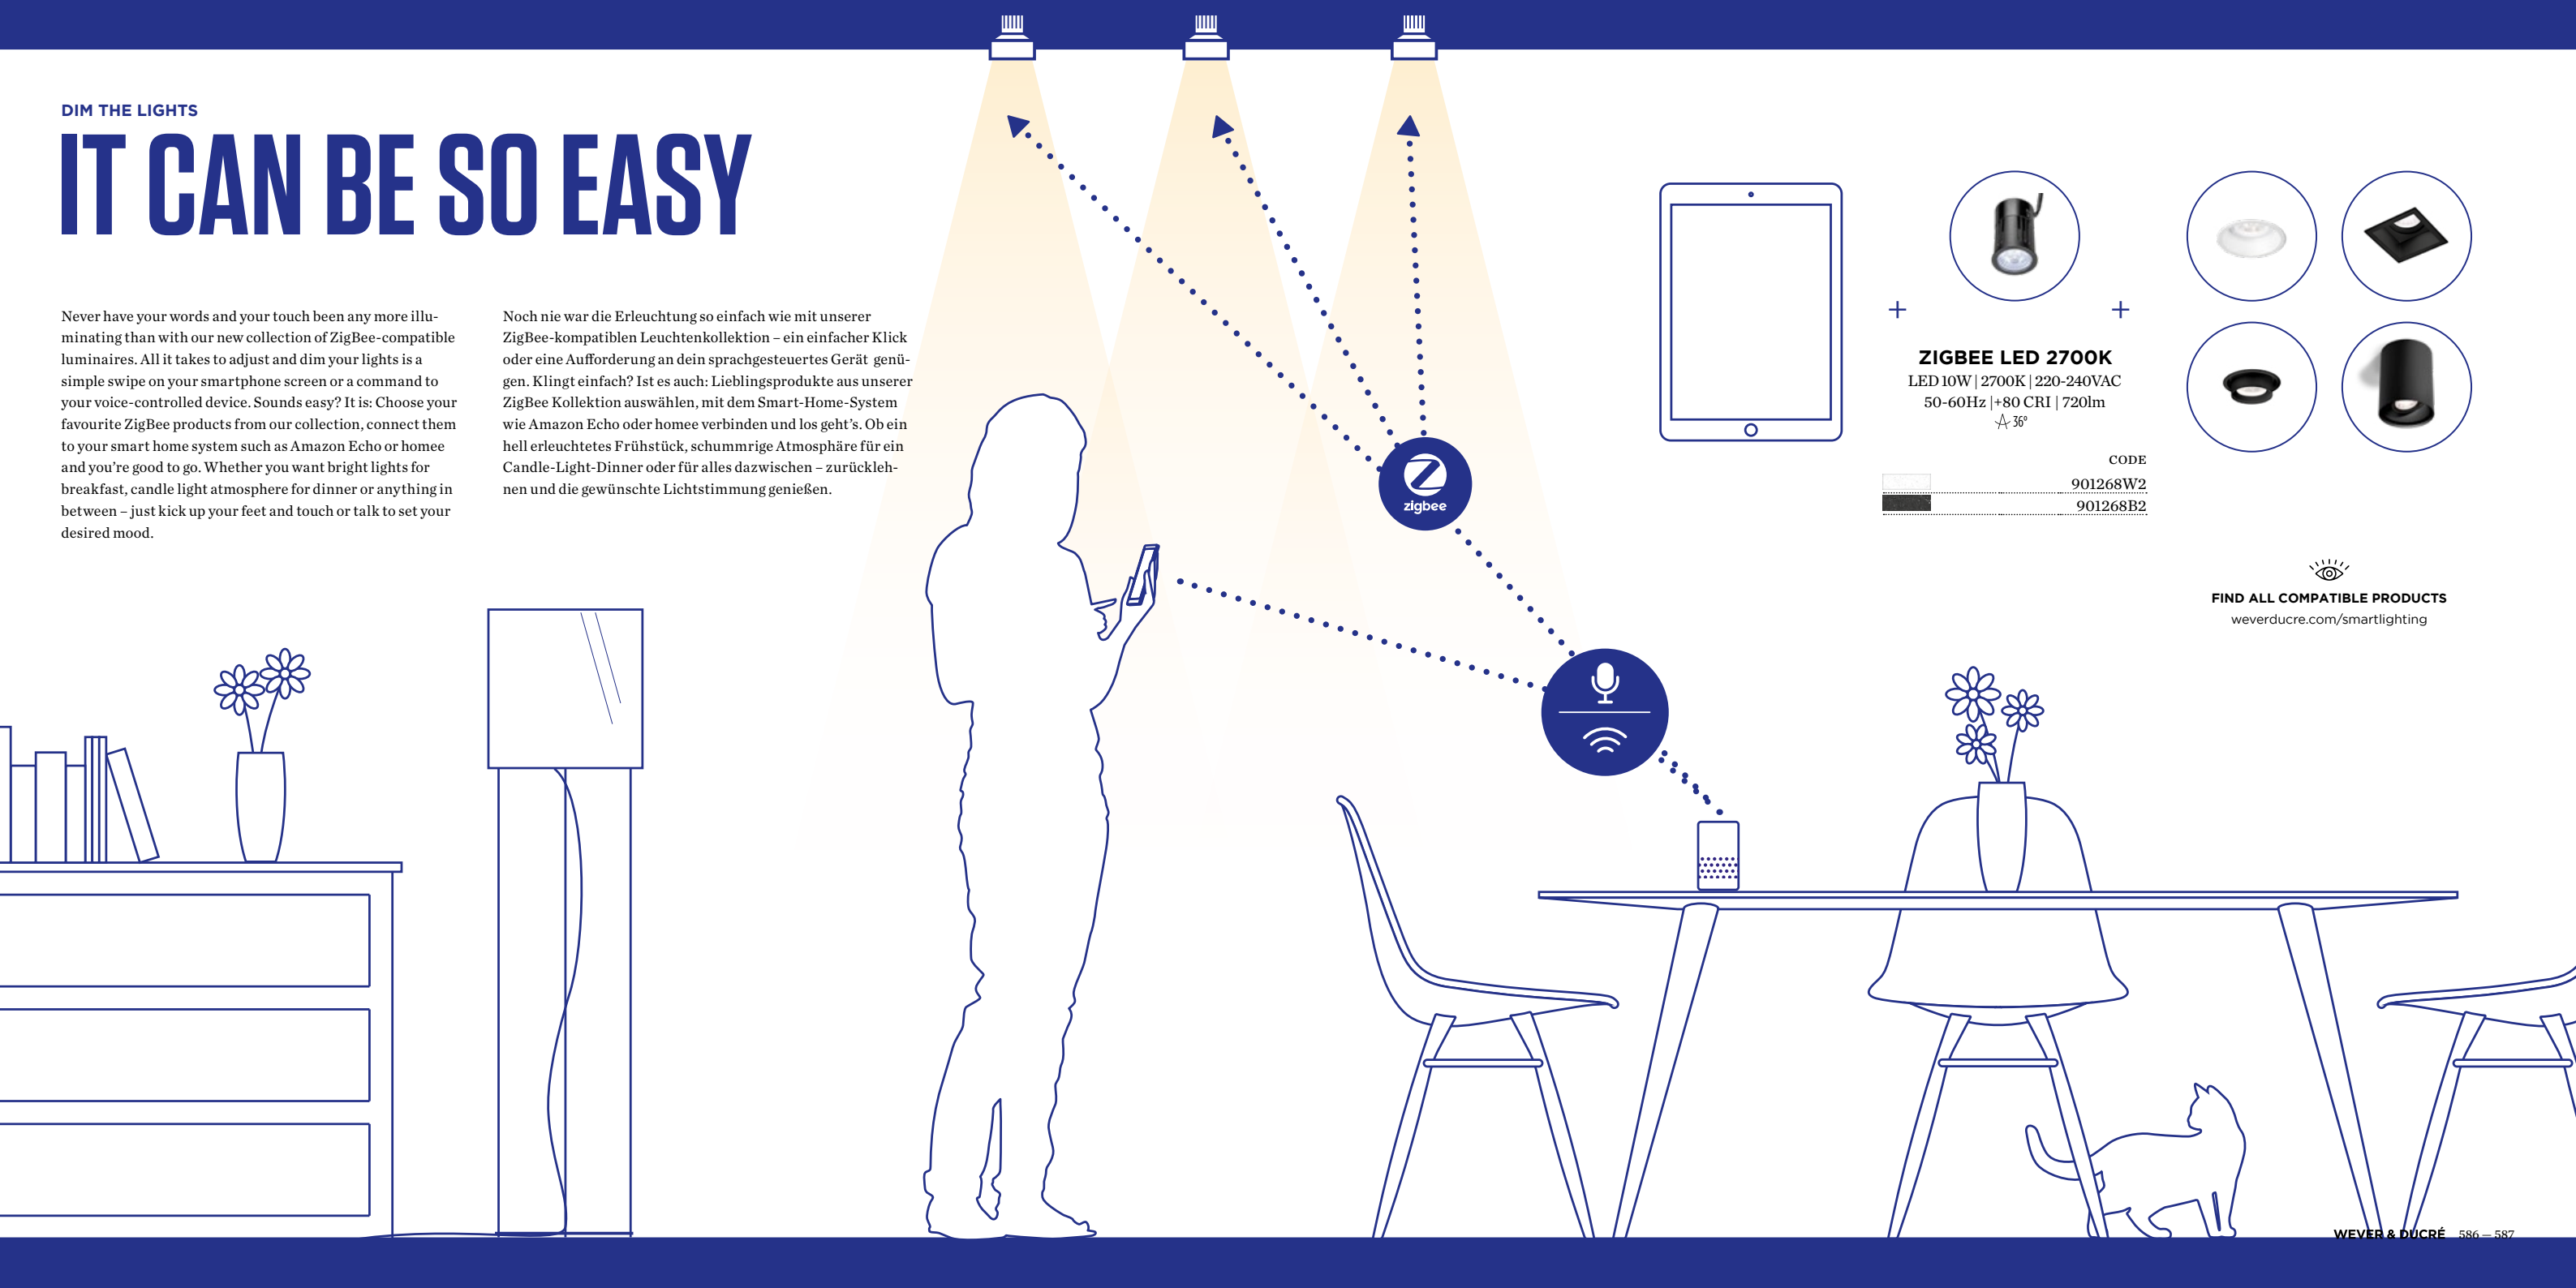

+ +

ZIGBEE LED 2700K

LED 10W | 2700K | 220-240VAC
50-60Hz | +80 CRI | 720lm
★ 36°



CODE

901268W2

901268B2



FIND ALL COMPATIBLE PRODUCTS
weverducre.com/smartlighting

POWER SUPPLIES

ACCESSORIES

350/500/700mA 20W

Driver 220-240VAC | 50-60Hz
20W | 350/500/700mA with output
selection | 350mA 25-50V | 500mA
20V-40V | 700mA 14V-28,5V
L/W/H 101.5x51x29.5

CE 0.09kg SELV IP20

DEEP 7/10W (2x)
RON 7/10W (2x) | RONY 7/10W (2x)

CODE
90218601

350mA 4W

Driver 100-240VAC | 50-60Hz
4W | 350mA | 4-12V
L/W/H 43x42x23

CE 0.05kg TÜV IP20

CODE
90213201

350mA 6W

Driver 90-264VAC | 50-60Hz
6W | 350mA | 3-22V
L/W/H 64x35x21

CE 0.04kg SELV IP20

LITO 2W | STRIPE 1W | EYE 1W
SMILE IN 4W

CODE
90213202

350mA 10W

Driver 220-240VAC | 50-60Hz | 10W
350mA | 12-28V | phase-cut dim
L/W/H 102x38x21

CE 0.09kg SELV IP20

DEEP PETIT (1x) | DEEP 7W (1x)
PLANO PETIT (1x) | PLANO 7W (1x)

CODE
90223402

350mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz | 10W
350mA | 14-28V | 1-10V dim
L/W/H 101,5x51x29,5

CE 0.09kg SELV IP20

DEEP 7W | RON 7W | RONY 7W
STRANGE ceiling 7W

CODE
90223401

350mA 15W DIM

Driver 220-240VAC | 50-60Hz | 15W
350mA | 21-42V | phase-cut dim
L/W/H 101,5x51x29,5

CE 0.09kg SELV IP20

DEEP PETIT (2x) | DEEP 7W (1x)
PLANO PETIT (2x) | PLANO 7W (1x)

CODE
90223503

500mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz
10W | 500mA | 11-20V | 1-10V dim
L/W/H 100x43x22.5

CE 0.06kg SELV IP20

DEEP 10W | RON 10W | RONY 10W
LUNA 10W | STRANGE 10W
PLANO 10W

CODE
90234401

500mA 10W

Driver 220-240VAC | 50Hz
10W | 500mA | 11-20V
L/W/H 101.5x51x29.2

CE 0.116kg SELV IP20

DEEP 10W | RON 10W | RONY 10W
LUNA 10W | STRANGE ceiling 10W
PLANO 10W

CODE
90214405

500mA 10W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
10W | 350mA | 2.5-20V | DALI
L/W/H 124x31x21

CE 0.08kg EL EMC SELV IP20

DEEP 10W | RON 10W | RONY 10W
STRANGE ceiling 10W

CODE
90244401

500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
15W | 500mA | 13.5-30V
L/W/H 102x51x30 | phase-cut dim

CE 0.08kg SELV IP20

DEEP 10W | RON 10W | RONY 10W
STRANGE ceiling 10W

CODE
90224501

350mA 15W DIM

Driver 220-240VAC | 50Hz | 15W
350mA | 28-42V | phase-cut dim
L/W/H 101,5x51x29,5

CE 0.11kg SELV IP20

LED MODULES HO (1x) | 73240577 |
73240682 | 73240542 | 73240681

CODE
90228501

350mA 30W

Driver 220-240VAC | 50-60Hz
30W | 350mA | 43-86V
L/W/H 127x43x30

CE 0.15kg SELV IP20

DEEP PETIT (3x) | PLANO
PETIT (3x) | PLANO PETIT 3.0 |
STRANGE PETIT (3x) | STRANGE
PETIT 3.0

CODE
90213701

350mA 10W DALI

Driver 220-240VAC | 50-60Hz | 5-100%
10W | 350mA | 2.5-26V | DALI dim
L/W/H 124x31x21

CE 0.08kg EL EMC SELV IP20

LED MODULES HO (1x) | 73240577
73240682 | 73240542 | 73240681

CODE
90243401

350mA 18W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
18W | preset at 350mA | 8-50V | touch
dim | DALI
L/W/H 119x53x30
CE 0.08kg SELV IP20

LED MODULES HO (1x) | 73240577
73240682 | 73240542 | 73240681

CODE
90253601

500mA 18W DALI

Driver 220-240VAC | 50-60Hz | 10-100%
18W | preset at 500mA | 7.5-35VDC at
500mA | touch dim | DALI
L/W/H 119x53x30

CE 0.08kg SELV EMC IP20

DEEP 10W (1x) | RON 10W (1x)
RONY 10W (1x)

CODE
90254602

500mA 21W DIM

Driver 220-240VAC | 50-60Hz
21W | 500mA | 16-42V
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg SELV IP20

included in CORO SURFACE 1.4

CODE
90224702

500mA 21W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
21W | 500mA | 28-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.09kg SELV IP20

DEEP 10W (2x) | RON 10W (2x)
RONY 10W (2x)

CODE
90224701

500mA 25W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
25W | 350-1050mA | preset at 500mA
20-50V | DSI | switch dim | DALI
L/W/H 130x43x30

CE 0.17kg SELV IP20

DEEP 10W (2x) | RON 10W (2x)
RONY 10W (2x) PLANO 10W (2x)
STRANGE CEILING 10W (2x)


CODE
90254603

POWER SUPPLIES

ACCESSORIES

LED LAMPS

ACCESSORIES


PAR16 LED 2700K PAR16 LED GU10 175-250VAC 50-60Hz 2700K 7W >80 CRI 480lm phase-cut dim		PAR16 LED 2700K PAR16 LED GU10 175-250VAC 50-60Hz 2700K 7W >90 CRI 360lm phase-cut dim		PAR16 LED 2700K PAR16 LED GU10 220-240VAC 50-60Hz 2700K 4.6W >80 CRI 350lm phase-cut dim		QT14 LED 3000K QT14 LED G9 175-250VAC 50-60Hz 3000K 3W >80 CRI 300lm	
CE 0.06kg IP20 45°		CE 0.06kg IP20 45°		CE 0.06kg IP20 36°		CE 0.05kg IP20	
 		 		 		 	
CODE 901228W2		CODE 901228B3		CODE 905228S2		CODE 9019G703	
PAR16 LED 3000K PAR16 LED GU10 175-250VAC 50-60Hz 3000K 7W >90 CRI 360lm phase-cut dim		PAR16 LED 3000K PAR16 LED GU10 220-240VAC 50-60Hz 3000K 4.6W >80 CRI 350lm phase-cut dim		PAR16 LED 3000K PAR16 LED GU10 175-250VAC 50-60Hz 3000K 7W >80 CRI 465lm phase-cut dim		PAR16 LED 4000K PAR16 LED GU10 175-250VAC 50-60Hz 4000K 7W >80 CRI 450lm phase-cut dim	
CE 0.06kg IP20 45°		CE 0.06kg IP20 36°		CE 0.06kg IP20 45°		CE 0.06kg IP20 45°	
 		 		 		 	
CODE 901228B5		CODE 905228S4		CODE 901228W4		CODE 901228W6	
PAR16 FLAT HEAD PAR16 GU10 220-240VAC 50-60Hz		LED AC MODULE 2700K 220-240V COB 3-step phase-cut dim >90 CRI 8W 2700K 480lm compatibility on request		LED AC MODULE 3000K 220-240V COB 3-step phase-cut dim >90 CRI 8W 3000K 500lm compatibility on request		LED MODULE HO 2700K LED Module 350mA 35Vf 2700K 12W >90 CRI 1050lm compatibility on request	
CE 0.06kg IP20		CE 0.08kg IP20 36°		CE 0.08kg IP20 36°		CE 0.06kg IP20 26°	
 		 		 		 	
CODE 90059125		CODE 901268W3 901268B3		CODE 901268W5 901268B5		CODE 901268W3 901268B3	

DECO LAMPS

ACCESSORIES

G95 LAMP 2200K

G95 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 6.1, 6.5



CODE
9003E102

ST64 LAMP 2200K

ST64 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 3.8, 6.1, 6.5



CODE
9003E105

QA60 LAMP 2200K

QA60 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0



CODE
9003E124

QA60 LED 2200K

QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>80 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **J.J.W.** | **BISHOP**



CODE
9003E109

QA60 LED 2700K OPAL MIRROR


QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 400lm | phase-cut dim
MIRRO



gold mirror 9003E139
silver mirror 9003E140

QA60 LED 2700K DIM

QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>85 CRI | 500lm | phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **ROCK** | **J.J.W.**
BISHOP



CODE
9003E138

QA60 LED 2700K OPAL

QA60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 14,5W | >80 CRI
1520lm | phase-cut dim
matt
ROCK | **REVER** Suspended | **BISHOP**



CODE
9003E131

QT14 LED 2700K

QT14 LED | G9 | 220-240VAC | 50-60Hz
2700K | 3W | >80 CRI | 170lm
phase-cut dim | opal
DRO

CE 0.05kg IP20



CODE
9019G706

QT14 LED 2700K

QT14 LED | G9 | 220-240VAC
50-60Hz | 2700K | 3W | >80 CRI | 200lm
phase-cut dim
DRO

CE 0.05kg IP20



CODE
9019G705

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC | 50-60Hz
3000K | 3W | >80 CRI | 190lm
phase-cut dim | opal
DRO

CE 0.05kg IP20



CODE
9019G707

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC
50-60Hz | 3000K | 3W | >80 CRI | 300lm

DRO

CE 0.05kg IP20



CODE
9019G703

QA60 LED 2700K OPAL


QA60 LED | E27 | 220-240VAC
50-60Hz | 2800K | 9.5W | >80 CRI
810lm | phase-cut dim
matt
ROCK | **REVER TABLE** | **FLOOR**
BISHOP



CODE
9003E148

G95 LED 2200K


G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E111

G95 LED 2700K OPAL

G95 LED | E27 | 220-240VAC | 50-60Hz
2700K | 12W >80 CRI | 1050lm
phase-cut dim
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E137

G95 LED 2700K MIRROR

G95 LED FILAMENT | E27
220-240VAC | 50-60Hz 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO



gold mirror 9003E142
silver mirror 9003E149

TCR LED 3000K

TCR LED | GX53 | 175-264VAC
50-60Hz | 3000K | 6W | >80 CRI | 450lm

CE 0.12kg IP20



CODE
901348W4

G125 LED 2200K

G125 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E112

C35 LED 2700K OPAL

C35 LED | E14 | 220-240VAC | 50-60Hz
2700K | 6W | >80 CRI | 470lm
phase-cut dim | matt
REVER WALL



CODE
9003C101

ST64 LED 2200K DIM

ST64 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8, 6.1, 6.5 | **BISHOP**



CODE
9003E110

DECO LAMPS

ACCESSORIES

T32-180 LAMP 2200K

T32-180 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 3.8, 6.1, 6.5 | **WIRO** Wall
Table | Floor | **CONE** | **DIAMOND**
GLOBE | **INDUSTRY** | **ROCK**



CODE
9003E106

T32-300 LAMP 2200K

T32-300 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 3.8, 6.1, 6.5 | **INDUSTRY**
DIAMOND | **GLOBE** 1.0, 2.0, 5.0, 6.0
GLOBE Floor 1.0, 2.0 | **GLOBE** Table
2.0 | **ROCK**



CODE
9003E127

T30-225 LED 2200K

T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 3.8, 6.1, 6.5 | Wall | Table | Floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**



CODE
9003E129

T30-300 LED 2700K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 8W
>95 CRI | 550lm | phase-cut dim
WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
Table 2.0 | Floor 1.0, 2.0 | **ROCK**



CODE
9003E135

T30-300 LED 2200K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 8W
>95 CRI | 550lm | phase-cut dim
gold tinted glass
WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
Table 2.0 | Floor 1.0, 2.0 | **ROCK**



CODE
9003E130

T30-225 LED 2700K DIM


T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8, 6.1, 6.5 | Wall | Table | Floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**



CODE
9003E136

PLANO 111

plasterkit



CODE
90017106

LUNA 1.0 ROUND

plasterkit
not compatible with LUNA round 1.0
LED HV



CODE
90017101

LUNA 2.0 SQUARE


plasterkit
not compatible with LUNA square 1.0
LED HV



CODE
90017102

MIRBI 2.0

plasterkit



CODE
90017124

PLANO 1.0


plasterkit



CODE
90017104

PLANO 2.0

plasterkit



CODE
90017105

THEMIS 1.7


plasterkit



CODE
90017111

THEMIS 2.7

plasterkit



CODE
90017112

THEMIS 5.0

plasterkit



CODE
90017115

PLASTERKITS

ACCESSORIES

LITO

plasterkit



CODE
90017119


PLASTERKITS

ACCESSORIES

STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit

86x86


4-25



STRANGE 1.0 | SNEAK TRIMLESS 1.0
plastic plasterkit

86x86

10 or 13



CODE

90017120

CODE


90017122

90017116

STRANGE PETIT 1.0
aluminium plasterkit

64x64


7-17



STRANGE PETIT 1.0
plastic plasterkit

65x65


10 or 13



STRANGE 1.0 111
plasterkit

153x153


4-25



STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit

156x86


4-25



STRANGE 2.0 | SNEAK TRIMLESS 2.0
plastic plasterkit

156x86


10 or 13



ORIS 0.7
plasterkit + recessed housing

191x58

60



CODE

90017123

90017117


CODE

90012039

STRANGE PETIT 2.0
aluminium plasterkit

64x115


7-17



STRANGE PETIT 2.0
plastic plasterkit

67x118


10 or 13



STRANGE PETIT 3.0
aluminium plasterkit

64x167


7-17



STRANGE PETIT 3.0
plastic plasterkit

68x168


10 or 13



ORIS 1.3
plasterkit + recessed housing

122x122


60



ORIS 2.0
plasterkit + recessed housing

123x191

60



STRIPE 0.4 | 0.7
plasterkit + recessed housing

75x75


55



STRIPE 2.2
plasterkit + recessed housing

251x76

55



CODE

90017205

CODE

90017203

90017204

CODE

90017208

CODE

90017206

90017207

CODE

90012041

CODE

90012043

CODE

90012037

CODE

90012038


RECESSED HOUSING

ACCESSORIES

HIDE 1 LAMP

recessed housing + plasterkit
aluminium | steel powder coated


115x115 125



HIDE 2 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated


212x115 125



HIDE 3 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated


306x115 125



HIDE 4 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated

402x115 125



CODE

90012009

90012017

CODE

90012010

90012018

CODE

90012011

90012019

CODE

90012012

90012020

MAP 0.6 | CHART 0.6

recessed housing

137 110

MAP 0.9 | CHART 0.9

recessed housing

137 130

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART
ASYM 1.2


recessed housing

190 158

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART
ASYM 1.6


recessed housing

220 184




CODE

90012201




CODE

90012202



CODE

90012203



CODE

90012204

LITO

recessed housing
always use in combination with
plasterkit

122x90 45




CODE

90012027

THEMIS 1.7

recessed housing
always use in combination with
plasterkit

272x160 85




CODE

90012032

THEMIS 2.7

recessed housing
always use in combination with
plasterkit

372x160 85




CODE

90012033

THEMIS 5.0

recessed housing
always use in combination with
plasterkit

572x160 85



CODE

90012036

EYE

recessed housing

55 40




CODE

90012025

ORIS 0.7

concrete housing

192x58 60




CODE

90012044

ORIS 1.3

concrete housing

121x121 60




CODE

90012040

ORIS 2.0

concrete housing

123x191 60



CODE

90012042

for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com

1-PHASE TRACK


for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com

1-PHASE TRACK

ACCESSORIES

TRACK PROFILE 1M


recessed



CODE	
	90014118
	90014119

TRACK PROFILE 2M


recessed



CODE	
	90014120
	90014121

TRACK PROFILE 3M


recessed



CODE	
	90014122
	90014123

TRACK PROFILE 1M


surface



CODE	
	90014001
	90014007

TRACK PROFILE 2M


surface



CODE	
	90014002
	90014008

TRACK PROFILE 3M


surface



CODE	
	90014003
	90014009

COVERPLATE I/L/T/X

only use with recessed tracks



CODE	
	90014126
	90014127

COVERPLATE END FEEDS

only use with recessed tracks



CODE	
	90014124
	90014125

END FEED

left



CODE	
	90014018
	90014019

END FEED

right



CODE	
	90014020
	90014021

CONNECTOR

straight



CODE	
	90014022
	90014023

L-CONNECTOR LEFT

can be used as feed



CODE	
	90014024
	90014025

L-CONNECTOR RIGHT

can be used as feed




CODE	
	90014026
	90014027

for more support and planning of 1-phase track systems,
please check our FAQ section on [weverducre.com](#)

1-PHASE TRACK

ACCESSORIES

MIDDLE FEED
straight



	CODE
	90014036
	90014037

END CAP LEFT/RIGHT



	CODE
	90014028
	90014029

TRACK ADAPTER
no space for driver
for suspension power cable
incl. strain relief



	CODE
	90014044
	90014043

T-CONNECTOR
can be used as feed



	CODE
	90014010
	90014011

T-CONNECTOR
can be used as feed



	CODE
	90014012
	90014013

T-CONNECTOR
can be used as feed



	CODE
	90014014
	90014015

T-CONNECTOR
can be used as feed



	CODE
	90014016
	90014017

X-CONNECTOR
can be used as feed



	CODE
	90014049
	90014050

FLEXIBLE CORNER



	CODE
	90014042
	90014041

HEIGHT ADJ. SLEEVE




	CODE
	90014040

SUSPENSION CLAMP




	CODE
	90014038

TRACK PROFILE 1M
surface




	CODE
	90014060
	90014061

TRACK PROFILE 2M
surface



	CODE
	90014062
	90014063

TRACK PROFILE 3M
surface



	CODE
	90014064
	90014065

SUSPENSION CLAMP
fast mounting



	CODE
	90014130
	90014128

HEIGHT ADJ. SLEEVE



	CODE
	90014040

WIRE SUSPENSION
incl. ceiling fixation bracket | suitable
also for 1-phase track



1.5m	CODE
	90014047
	90014039

3.0m	CODE
	90014053
	90014082

TRACK ADAPTER
no space for driver
for suspension power cable
incl. strain relief



	CODE
	90014078
	90014079

COMPLETE SUSPENSION SET
incl. ceiling fixation



	CODE
	90014083

SUSPENSION WIRE SET
cable with loop | 3.0m



	CODE
	90014131
	90014129

for more support and planning of 3-phase track systems,
please check our FAQ section on [weverducre.com](#)







3-PHASE TRACK

ACCESSORIES

T-CONNECTOR can be used as feed		T-CONNECTOR can be used as feed		T-CONNECTOR can be used as feed	
					
					
CODE		CODE		CODE	
90014084		90014086		90014088	
90014085		90014087		90014089	
T-CONNECTOR can be used as feed		STRAIGHT CONNECTOR		END CAP end cap left / right	
					
					
CODE		CODE		CODE	
90014090		90014080		90014076	
90014091		90014081		90014077	
END FEED right		MIDDLE FEED straight		L-CONNECTOR left	
					
					
CODE		CODE		CODE	
90014068		90014070		90014072	
90014069		90014071		90014073	
END FEED left		R-CONNECTOR right		R-CONNECTOR left	
					
					
CODE		CODE		CODE	
90014066		90014074		90014075	
90014067					

SUSPENSION OPTIONS

ACCESSORIES


WIRO single decenter set without ceiling base E27 2.6m		WIRO single decenter set without ceiling base E27 6.0m		WIRO 6.0m suspension	
					
					
CODE		CODE		CODE	
90015160		90015161		90052051	
ROOMOR E27 6.0m suspension		ROOMOR PAR16 6.0m suspension		BISHOP SUSPENSION 6.0M only for BISHOP 4.0 and 6.0	
					
					
CODE		CODE		CODE	
2482E0B _		248220B _		90015128	
2482E0R _		248220R _		90015140	
2482E0G _		248220G _		90015136	
				90015127	
BISHOP SUSPENSION 6.0M only for BISHOP 8.0		BISHOP SUSPENSION 6.0M only for BISHOP 8.0		BISHOP SUSPENSION 6.0M only for BISHOP 8.0	
					
					
CODE		CODE		CODE	
90015131		90015131		90015131	
90015141		90015141		90015141	
90015137		90015137		90015137	
90015130		90015130		90015130	

SUSPENSION OPTIONS

ACCESSORIES

INVISIBLE CEILING SUSPENSION SYSTEM

plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg



CODE

90015195

STRAIN RELIEF

accessory for WIRO suspension



CODE

90052064

ROOMOR CEILING 1.0 | 2.0

extension tube | 0.5m



CODE

90019192

ROOMOR CEILING 1.0 | 2.0

extension tube | 1.0m



CODE

90019191

SINGLE SUSPENSION

ceiling base round



CODE

90052022

90052021

STRAIN RELIEF

for multi base | without steel wire
REVER | ROCK | CONE



CODE

90052023

HOOK

for multi suspension
REVER | ROCK



CODE

90052066

90052065

SHIEK 4.0 | 5.0

cable ring for 3 lamps



CODE

90059123

90059121

SHIEK 4.0 | 5.0

cable ring for 4 lamps



CODE

90059124

90059122

WIRO

cable wall bracket



CODE

90052062

WIRO

ceiling hook




CODE

90052061

SINGLE CEILING BASE

semi recessed | for shades without steel wire only



CODE

90059118

CODE

90052026

90052027

SINGLE CEILING BASE

semi recessed | for shades without steel wire only



CODE

90052022

90052021

SINGLE CEILING BASE

semi recessed | for shades without steel wire only




CODE

90052022

90052021

CORK MULTI

multiple suspension ceiling base
round for 4 to 8 lamps | incl. PS




CODE

90052015

90052016

CORK MULTI

multiple suspension ceiling base
600mm | 2 lamps | incl. PS




CODE

90052017

90052018

CORK MULTI

multiple suspension ceiling base
900mm | 3 lamps | incl. PS




CODE

90052019

90052020

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1200mm | 4 lamps




CODE

90052011

90052012

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1500mm | 5 lamps



CODE

90052013


90052014

ACCESSORIES

ACCESSORIES

ROOMOR

shade 1.0



CODE	
	9113610B1
	9113610K1
	911361RW1
	911361GW1
 felt	911361FT1

CORK


bottle 1 | clear glass



CODE
90019013

STAKE


snoot



CODE
90019004

ROOMOR

shade 2.0



CODE	
	9113620B1
	9113620K1
	911362RW1
	911362GW1
 felt	911362FT1

CORK


bottle 2 | clear glass with closing cap



CODE
90019014

GETTON


big cover



CODE
 911141W1
 911141D1

ROOMOR


shade 3.0



CODE	
	9113630B1
	9113630K1
	911363RW1
	911363GW1
 felt	911363FT1

ATIM


louvre long



CODE
90019106

X-BEAM


snoot



CODE
90019023

ROOMOR


shade 4.0



CODE	
	9113640B1
	9113640K1
	911364RW1
	911364GW1
 felt	911364FT1

ATIM

louvre carré



CODE
90019105

BOX | RAY

flaps for adjustable beam angle
powder coated white



CODE
900401W0

BASE

ACCESSORIES

BASE 300

FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
 910013D0
 910013A0

BASE 1000


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
 910010D0
 910010A0

BASE 800

FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
 910078D0
 910078A0

BASE 400

FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
 910014D0
 910014A0

BASE 300


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
 910073D0
 910073A0

BASE 1000

FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
 910070D0
 910070A0

GROUND FIXATION

ACCESSORIES

PALLUZ C 230
invisible fixation base



CODE
910032D0

PALLUZ C 230




CODE
910033D0

STAKE POLE 200




CODE
910042D0

STAKE POLE 400




CODE
910044D0

X-BEAM
ground spike




CODE
90013115

PALLUZ C 600



CODE
910036D0

PALLUZ C 800




CODE
910038D0

LINUS 150




	CODE
	910024D0
	910024Y0
	910024A0

LINUS 350




	CODE
	910026D0
	910026Y0
	910026A0

TAPE | PACE
ground spike




CODE
90013102

GETTON POLE
ground spike




CODE
90013101

LINUS
ground spike




CODE
90013103

LINUS
ground fixation




CODE
90013302

LINUS 550




	CODE
	910028D0
	910028Y0
	910028A0

GETTON 400




CODE
910052D0

GETTON 600




CODE
910054D0

GETTON 800




CODE
910058D0

PALLUZ C
ground fixation




CODE
90013303

PALLUZ C
ground spike only for invisible
fixation base 230



CODE
90013104

STAKE 1.0 | STIPO
ground spike



CODE
90013106

STAKE POLE | FOLD
ground spike



CODE
90013107

NOTES

NOTES

NOTES

NO MORE MISUNDERSTANDINGS





ICONS

[illegible]

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrément	Profundidad de empotramiento	Profondità dell'incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Turn Vertical	Vertikal drehbar	Verticaal richtbaar	Orientable en vertical	Orientable en vertical	Orientabile in verticale	Наклонный по вертикали
	Turn Horizontal	Horizontal drehbar	Horizontaal richtbaar	Orientable horizontal	Orientable en horizontal	Orientabile in orizzontale	Поворотный по горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faisceau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол рассеивания
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Класс защиты светильника 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Класс защиты светильника 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Класс защиты светильника 3
	Safety Distance	Sicherheitsabstand	Veiligheidsafstand	Distance de sécurité	Distancia de seguridad	Distanza di sicurezza	Безопасное расстояние
	Glowtest 960	Glühdrahtprüfung 960	Gloeidraadtest 960	Test au fil incandescent	Prueba de hilo 960	Resistenza alla temperatura 960°	Тестирование на нагрев 960
	IP Rated	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Класс защиты IP
	Plastic	Kunststoff	Kunststof	Plastique	Plástico	Plastica	пластик
	Protection Glass	Sicherheitsglas	Beschermglas	Verre de protection	Vidrio de protección	Protetto con vetro	Защитное стекло
	Tempered Glass	Temperiertes Glas	Getemperd beschermglas	Verre de protection température sur verre	Cristal atemperado	Vetro temperato	Закалённое стекло
	Fixation Ceiling	Deckenmontage	Plafondbevestiging	Montage au plafond	Montaje en techo	Montaggio a soffitto	Потолочное крепление
	Fixation Wall	Wandmontage	Wandbevestiging	Montage au mur	Montaje en pared	Montaggio a parete	Настенное крепление
	Fixation Floor	Bodenmontage	Vloerbevestiging	Montage au sol	Montaje en suelo	Montaggio a pavimento	Напольное крепление
	Up/Down	aufwärts/abwärts strahlend	Verlichting haut op/ down	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto	Освещение вверх или вниз
	Side	seitlich abstrahlend	Verlichting lateraal	Éclairage laterale	Emisión lateral	Luce laterale	Освещение в сторону
	Up and Down	direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce monoemissione sopra e sotto	Освещение вверх и вниз
	Surround	allseitig abstrahlend	Sfeerverlichting	Éclairage multidirections	Emisión perimetral	Luce diffusa	Освещение вокруг
	CE/VDE/ENEC Certificate	CE Zertifikat	CE Certificaat	Certificat CE	Certificado CE	Certificato CE	Сертификат CE
	Available mid 2019	Verfügbar Mitte 2019	Beschikbaar midden 2019	Disponibile mi-2019	Disponible a mediados de 2019	Disponibile a metà del 2019	Доступно в середине 2019 года

A RAINBOW OF POSSIBILITIES

COLOUR CODES

	A Aluminium Anodised		E/ WB White Texture + Black		GR Greyish Rose		N Black Chrome		R/ RW Coral Red + White Texture		W White Texture RAL 9010
	A Anthracite Grey RAL 7016		F Aluminium Brushed + Black		HR Hip Rose		NB Black Texture + Black Chrome		R/ VB Black Texture + Rust		W Autumn White
	AY Amber Yellow		F/ FT Felt Grey		I Inox		O Green RAL 6019		S Silver / Grey RAL 9006		WB Black Texture + White Opal Glass
	B Black Texture RAL 9005		G Gold		J White Texture + Gold		OR Orange		SB Light Blue		WN Walnut
	B Simple Black		G Light Gold		K Black Texture + Gold		P Copper		SG Smoke Grey		X White Texture + Aluminium Brushed
	C Chrome		G Cement Grey RAL 7033		L Aluminium Brushed		P Copper + Black Texture		SY Soft Yellow		Y Brown Texture RAL 8019
	CW Champagne White		G/ GW Grey + White		M Matt Chrome		P Pink Copper		T Grey Texture		YB Black Texture + Brown Opal Glass
	D Dark Grey Texture RAL 9007		GB Black Texture + Light Gold		MB Marble Black		Q Bronze		TG Tea Green		YE Yellow
	D Multi Colour		GG Greyish Green		MW Marble White		R Coral Red RAL 3016		V Rust		Z/ PB Black Texture + Copper

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BVBA

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SCHWEIZ GMBH

Kellerstrasse 22
6005 Luzern
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

WEVER & DUCRÉ INC.

133 West 19th Street, 9th Floor
New York, NY 10011
United States of America
Phone +1 212 343 8100
office.us@weverducre.com
weverducre.us

SHOWROOMS

WEVER & DUCRÉ DEUTSCHLAND GMBH

Schanzenstrasse 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 13 06 49 60
Fax +49 221 13 06 49 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC LTD.

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 21 10 69 24
Fax +852 31 06 40 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE

10, rue Pecquay
75004 Paris
France
Phone +33 1 40 29 81 01
office.fr@weverducre.com

WEVER & DUCRÉ AB

Hårdvallsgatan 18
115 46 Stockholm
Sweden
Phone +46 708 44 84 84
office.se@weverducre.com

WEVER & DUCRÉ UK

23 Batemans Row
London EC2A 3HH
United Kingdom
Phone +44 20 31 74 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND

Diamond Business Park
Posag 7 Panien Street no 1,
02-495 Warsaw
Poland
Phone +48 73 03 30 341
office.pl@weverducre.com

WEVER & DUCRÉ ITALY

Via Giannino Ancillotto, 15
30027 San Doná di Piave - Venezia
Italy
Phone +39 04 21 17 78 388
office.it@weverducre.com

WEVER & DUCRÉ AUSTRIA

showroom.at@weverducre.com

WEVER & DUCRÉ IBERIA info.es@weverducre.com

WEVER & DUCRÉ NETHERLANDS info.nl@weverducre.com

WEVER & DUCRÉ RUSSIA info.ru@weverducre.com

WEVER & DUCRÉ MIDDLE EAST office.me@weverducre.com

WEVER & DUCRÉ FINLAND office.fi@weverducre.com

1st edition, March 2019, ©Wever & Ducré® bvba.

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Futher lumen values on request. The general terms and conditions of Wever & Ducré bvba shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at www.weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some original images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an 

Corian® is a registered trademark of DuPont™

ThermoX® is a registered trademark of KAISER GmbH & Co KG (www.kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PROJECT MANAGEMENT

PRINTING

PHOTOGRAPHY

Steffen Seeger

Carina Erlach, Lisa Hauser

Lisa Hauser

Lukas Hochenwarter

Tanja Petschnig

Volker Waldhauser

Victoria Konrad

Drukarnia Perfekt S.A., Warsaw, Poland

311PHOTOGRAPHY (p. 344-345) | Adelina Illiev (p. 442) | Aikon Producties bvba (p. 46) | Aleksandr Del Cero (p. 266) | Alexander Maria Lohmann (p. 264, 318) | Alexander Schwarz (p. 532) | Artion Istuganov (p. 496) | Aurelien Aumont (p. 152) | B.C. Gassner (p. 474) | Bruno Eggermont (p. 142) | Cafeine.be architectuurfotografie (p. 524) | Carlo Falanga - Torre del Greco (p. 354) | Christian Brandstätter (p. 154, 480) | Christian Repnik (p. 542) | Christian Weinrich (p. 116 - 125, 132) | Christoph Steinbauer (p. 110, 126, 216, 296, 324, 392, 458, 470, 492, 548, 562, 564) | Corinna Unterkofler (p. 310) | Corinna Unterkofler / Joachim Grubelnik (p. 129, 346, 430-431, 464) | Croce & Wir (p. 546) | Dani Rovira Fotografia (p. 544) | Das Bildwerk (p. 130) | David Aebi (p. 552) | Dizzart Studio (p. 260) | Edgar Navarre (p. 432) | Egon Gade (p. 176) | Emma Marshall Photography (p. 146-147) | FOTOMOHITO (p. 338) | George Fakaros (p. 566) | Georges Leroux (p. 135) | Gerald Rafelghem (p. 166, 280, 402, 530) | Hannes Windrath (p. 144) | Jaro van Meerten, The Art of Living Magazine (p. 198) | Jean Marc Manson (p. 248) | Jiří Dymáček (p. 510-511) | Joachim Grothus (p. 246) | Johannes Meger (p. 274, 276) | Justine Szczepanycyk (p. 218) | KAPFHAMMER (p. 74) | Kim Forrsén (p. 182, 372, 388, 498, 560) | Kris Dekeijser (p. 48, 50, 56, 60, 64, 68, 128, 138, 140, 156-164, 172, 180, 184, 186, 190-196, 202, 206, 208, 222-226, 232-238, 241, 244, 252, 256, 270, 278, 282-288, 292, 294, 298 - 301, 308, 311, 314, 320, 328, 332, 340, 350, 352, 356-359, 366, 370, 378, 382-386, 394, 398, 404, 416, 420, 422, 426-428, 468, 490, 512, 520, 534, 556, 572, 576) | Kurt Hoerbst (p. 390, 466) | Kurt Kuball (p. 240, 500, 550) | Laura Bertone (p. 242, 268) | Leonas Garbačauskas Photographer (p. 536) | Lukas Roth (p. 102) | Lupi Spuma Fine Photography (COVER, p. 8-16, 115, 374) | Marc Hadden (p. 150, 170, 316) | Marco Richter Photography (p. 188, 400) | Martin Baitinger (p. 58-59) | Martin Steinthaler (p. 478) | Martin Zilka (p. 554) | Massimo Spicca (p. 322-323) | Mattia Aquila (p. 254, 348) | Miquel Llonch (p. 30) | Miriam Raneburger (p. 462) | Nick Guttridge (p. 210) | Nikki Candelero (p. 250-251) | Oliver Nauditt (p. 334) | paul ott fotografiert (p. 104-108, 111, 112, 329, 502, 506, 508, 514-517, 574, 578) | Paula Beetlestone (p. 504) | Peter Holgersson AB (p. 488) | Photojoost (p. 368) | Salvatore Guido (p. 22-28, 32-40, 44, 66, 70, 72, 76-100, 214, 220, 272, 312, 406 - 414, 436, 444, 448) | Schwarz+Licht (p. 302) | Selma Hengeveld (p. 52) | Sonja Zettl (p. 54, 55) | Søren Kristensen (p. 174) | Sourbron Fotografie (p. 342) | Studio Erick Saillet (p. 178, 258, 434) | Tiziano Cristofoli (p. 262-263) | Tom Ferguson (p. 330, 452) | Vogelsänger Studios (p. 376-377) | Walters Media (p. 438, 440-441) | wide shot photography Alexandre Van Battel (p. 136) | Zvonimir Mihaljek (p. 494)

**THIS
IS NOT
THE
END**

PAY A VISIT TO **WEVERDUCRE.COM**



WEVERDUCRE.COM