



FROM
BELGIUM
WITH
LOVE













































WEVER & DUCRÉ
LIGHTING

LIFE IS
TOO SHORT
FOR BORING
LIGHTING





















WEVER & DUCRÉ
LIGHTING

ROOMOR p. 31 – 49	 CEILING p. 33	 CEILING p. 35	 SUSPENDED p. 37	 WALL p. 39	 WALL p. 45	 TABLE p. 47	 FLOOR p. 49	
MIRRO p. 51 – 63	 CEILING p. 53	 SUSPENDED p. 55	 WALL p. 57	 WALL p. 57	 TABLE p. 61	 FLOOR p. 63		
DRO p. 65 – 79	 CEILING p. 65	 SUSPENDED p. 67	 WALL p. 71	 WALL p. 71	 TABLE p. 75	 TABLE p. 77	 FLOOR p. 79	 FLOOR p. 79
ROCK p. 81 – 87	 SUSPENDED p. 81	 TABLE p. 85	 FLOOR p. 85	 NAKED p. 85				
WIRO p. 89 – 125	 WIRO p. 93	 DIAMOND p. 99	 INDUSTRY p. 107	 GLOBE p. 109	 CONE p. 113	 WALL p. 117	 TABLE p. 123	 FLOOR p. 125
REVER p. 127 – 147	 SUSPENDED p. 131	 WALL p. 133	 TABLE p. 137	 TABLE p. 141	 FLOOR p. 147			
J.J.W. p. 149 – 163	 CEILING p. 151	 SUSPENDED p. 153	 SUSPENDED p. 155	 WALL p. 157				

INDOOR






























































CEILING RECESSED
p. 165 – 263

 DEEP BIJOU p. 169	 DEEP PETIT p. 171	 DEEP p. 173	 DEEP ADJUST PETIT p. 177		 DEEP ADJUST p. 179	 DEEP ADJUST p. 183	 DEEP ADJUST TRIMLESS p. 185	 DEEP ADJUST FORT p. 187	
 DEEP ASYM ADJUST p. 189	 DEEPER p. 175	 DEEP IP44 p. 245	 DEEPER IP44 p. 247	 RONY p. 193	 RON p. 203	 RINI IP44 p. 251	 RINI SNEAK IP44 p. 255	 RUVI p. 223	
 CENO 1.0 p. 225	 PIRRO p. 195	 PYRAMID p. 221	 PLANO PETIT p. 207	 PLANO p. 209	 PLANO IP44 p. 259	 PLANO ADJUST FORT p. 211	 STRANGE PETIT p. 213	 STRANGE p. 215	
 LUNA ROUND IP44 p. 253	 LUNA SQUARE IP44 p. 257	 SNEAK TRIM p. 217	 SNEAK TRIMLESS p. 219	 CITY IP44 p. 263	 MIRBI IP44 p. 261	 MIRBI IP44 p. 261	 BLIEK ROUND PETIT p. 227	 BLIEK ROUND p. 229	
 SPYDER p. 231	 BLIEK SQUARE p. 235	 SPINEO p. 191	 NOP PETIT p. 199	 NOP p. 201	 ROOMOR p. 33			 MIRRO p. 53	 DRO p. 65
 J.J.W. p. 151	 VENN p. 335	 BEBOW p. 331	 PIRRO p. 291	 SOLID PETIT p. 295	 SOLID p. 299	 SIRRA p. 303	 SIRRO p. 305	 BOX MINI p. 271	
 BOX p. 275	 DOCUS p. 281	 HEXO p. 285	 RAY p. 267	 ROB IP44 p. 323	 ROBY IP44 p. 325	 TOWNA IP44 p. 327	 MIRBI IP44 p. 329	 MIRBI IP44 p. 329	

CEILING SURFACE
p. 265 – 335

INDOOR

























































TRACK SYSTEM
p. 337 – 381

 SARA p. 309	 SQUBE p. 311	 CENO p. 317	 MICK p. 319	 48V TRACKS p. 341		 CENO p. 347	 MICK p. 349	 DOTS LIGHT MODULE p. 351		
 OPAL LIGHT MODULE p. 351	 ODREY p. 353	 STUBE p. 355	 SOLLI p. 357	 1-PHASE TRACKS p. 359		 SARA p. 361	 SQUBE p. 363	 ODREY p. 365	 RAY p. 367	
 HEXO p. 367	 3-PHASE TRACKS p. 369		 SQUBE p. 371	 RAY p. 377	 HEXO p. 377	 ELLO SYSTEM p. 379		 ROOMOR p. 37		 MIRRO p. 55
 DRO p. 67	 ROCK p. 81	 WIRO p. 93	 DIAMOND p. 99	 INDUSTRY p. 107	 GLOBE p. 109	 CONE p. 113	 REVER p. 131	 J.J.W. p. 153		
 ODREY p. 387	 BOX p. 393	 DOCUS p. 395	 HEXO p. 397	 RAY p. 401	 SHIEK p. 403	 SHIEK p. 405	 SHIEK p. 407	 WETRO p. 411		
 SELO p. 417	 DINOR p. 421	 DINOR p. 421	 DINOR p. 421	 CORK p. 423	 CONE p. 427	 BISHOP p. 429	 ELLO p. 437	 DARF p. 439		
 VENN p. 441	 BEBOW p. 443	 GIGANT p. 447	 CYCLONE p. 451	 BOX MULTI p. 457	 DOCUS MULTI p. 459	 HEXO MULTI p. 461	 RAY MULTI p. 463			

INDOOR

 WETRO MULTI p. 465	 SHIEK MULTI p. 467	 CORK MULTI p. 471	WALL RECESSED p. 473 – 485	 SMILE IN p. 475	 LITO p. 477	 STRIPE p. 479	 STRANGE p. 481	 THEMIS p. 483
 ORIS p. 485	WALL SURFACE p. 487 – 561	 ROOMOR p. 39	 MIRRO p. 57	 DRO p. 71	 WIRO p. 117	 REVER p. 133	 J.J.W. p. 157	 ODREY p. 491
 RAY MINI p. 495	 RAY p. 497	 BOX MINI p. 503	 BOX p. 505	 DOCUS MINI p. 513	 HEXO MINI p. 515	 TRAIN p. 517	 CENTRAL p. 519	 STATION p. 521
 SARA SNOOZE p. 523	 MICK SNOOZE p. 527	 MICK WALL p. 529	 LEENS p. 531	 BENTA p. 533	 BENTO p. 535	 INCH p. 537	 SCAVA p. 539	 MILES p. 541
 MILES p. 543	 MILES p. 545	 ARZY p. 547	 VENN p. 549	 FINLIN p. 553	 DARF p. 555	 LIGHTDROP IP44 p. 557	 MIRBA IP44 p. 559	 MIRBI LONG IP44 p. 561
TABLE	 ROOMOR p. 47	 MIRRO p. 61	 DRO p. 75	 DRO p. 77	 ROCK p. 85	 WIRO p. 123	 REVER p. 137	 REVER p. 141
FLOOR SURFACE	 ROOMOR p. 49	 MIRRO p. 63	 DRO p. 79	 DRO p. 79	 ROCK p. 85	 NAKED p. 85	 WIRO p. 125	 REVER p. 147

OUTDOOR

CEILING RECESSED p. 565 – 567	 INTRA p. 567	CEILING SURFACE p. 569 – 585	 BLAS p. 585	 BLAS p. 585	 BOX p. 579	 RAY p. 575	 TUBE p. 573	 TUBE CARRÉ p. 577
 TRAM ROUND p. 571	 TRAM CARRÉ p. 571	 ROB p. 583	WALL RECESSED p. 587 – 591	 SMILE IN p. 589	 SMILE IN p. 589	 ORIS p. 591	 ORIS p. 591	
WALL SURFACE p. 593 – 637	 SMILE ON p. 627	 SMILE ON p. 627	 SMILE p. 629	 TAPE p. 631	 TUBE p. 597	 TUBE CARRÉ p. 603	 TUBE CARRÉ p. 605	 GETTON p. 635
 CENTRAL p. 619	 STATION p. 621	 TRAIN p. 613	 TRAIN NARROW p. 617	 BOX p. 607	 BOXX p. 623	 RAY p. 601	 TRAM p. 595	 PALOS p. 637
 PALOS p. 637	 SWAM p. 633	 X-BEAM p. 625	FLOOR RECESSED p. 639 – 649	 CARD p. 641	 MAP p. 643	 MAP ASYM p. 645	 CHART p. 647	 CHART ASYM p. 649
FLOOR SURFACE p. 651 – 687	 STIPO p. 653	 STAKE p. 659	 STAKE FOLD p. 655	 X-BEAM p. 657	 COSTA p. 661	 COSTA p. 663	 SWAM p. 667	 GETTON p. 669
 TAPE p. 671	 PACE p. 673	 SMILE p. 675	 FIFTY FIFTY p. 677	 SWAY p. 679	 PALOS p. 681	 EDGE p. 683	 LINUS p. 685	 PALLUZ C p. 687

FROM BELGIUM WITH LOVE



LIGHT UP YOUR LIFE

Delicious waffles and chocolate prepared with love – that’s what Belgium is famous for, right? Not exactly. For a while now, Belgium has also become known for trendy lights that not only look great, but also have compelling inner values. State-of-the-art LEDs that feel equally at home in a cosy attic apartment or in the hippest club in the city. Because they save space, preserve resources, and offer a greater quality of life. And that is exactly what we at Wever & Ducré want. Where do we get our inspiration? From people like you, who share our passion for beautiful things and who pay as much attention to great design as to high-quality products. Sounds good? Then keep reading. The newest highlights are waiting for you.

WIR BRINGEN SIE ZUM STRAHLEN

Köstliche und mit viel Liebe zubereitete Waffeln und Schokolade – dafür ist Belgien berühmt. Stimmt’s? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten, die nicht nur toll aussehen, sondern auch mit inneren Werten punkten. LEDs der jüngsten Generation, die sich in einer kleinen Dachgeschoßwohnung ebenso wohlfühlen wie im angesagtesten Club der Stadt. Denn sie sparen Platz, schonen die Ressourcen und sorgen so ganz einfach für mehr Lebensqualität. Und genau das ist es auch, was wir von Wever & Ducré möchten. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebensoviel Wert legen wie auf eine hochwertige Verarbeitung. Klingt interessant? Dann blättern Sie doch einfach weiter. Die neuesten Hotspots warten schon auf Sie.



COME ON BY

HOMETOWN GLORY KORTRIJK



Anyone who loves exceptional and fresh design must see Kortrijk. Wever & Ducré's hometown hosts one of the most important trade fairs in Europe, and as the City of Design, it has been home to the latest lighting trends. Want to see for yourself? Come to the Wever & Ducré headquarters, which boasts a new warehouse and a huge showroom. Sounds good? Let's go. A fresh cup of coffee and our brand-new collections are waiting for you.

Wer außergewöhnliches, junges Design liebt, muss auf jeden Fall mal in Kortrijk gewesen sein. Und das nicht nur, weil hier eine der wichtigsten Interieur-Messen Europas stattfindet, sondern auch, weil die „City of Design“ das Zuhause der aktuellsten Leuchtentrends ist. Wo man diese bewundern kann? Natürlich im Wever & Ducré-Headquarter, zu dem neben einem neuen Warenlager auch ein riesengroßer Showroom gehört. Klingt gut? Dann nichts wie los. Eine Tasse frischer Kaffee und unsere brandneuen Kollektionen warten schon auf Sie.

SHOWROOM


WEVER & DUCRÉ
SHOWROOM
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

WEVER & DUCRÉ
OPERATIONAL SITE
Evolis 118
8530 Harelbeke
Belgium



EXPLORE KORTRIJK
weverducre.com/kortrijk

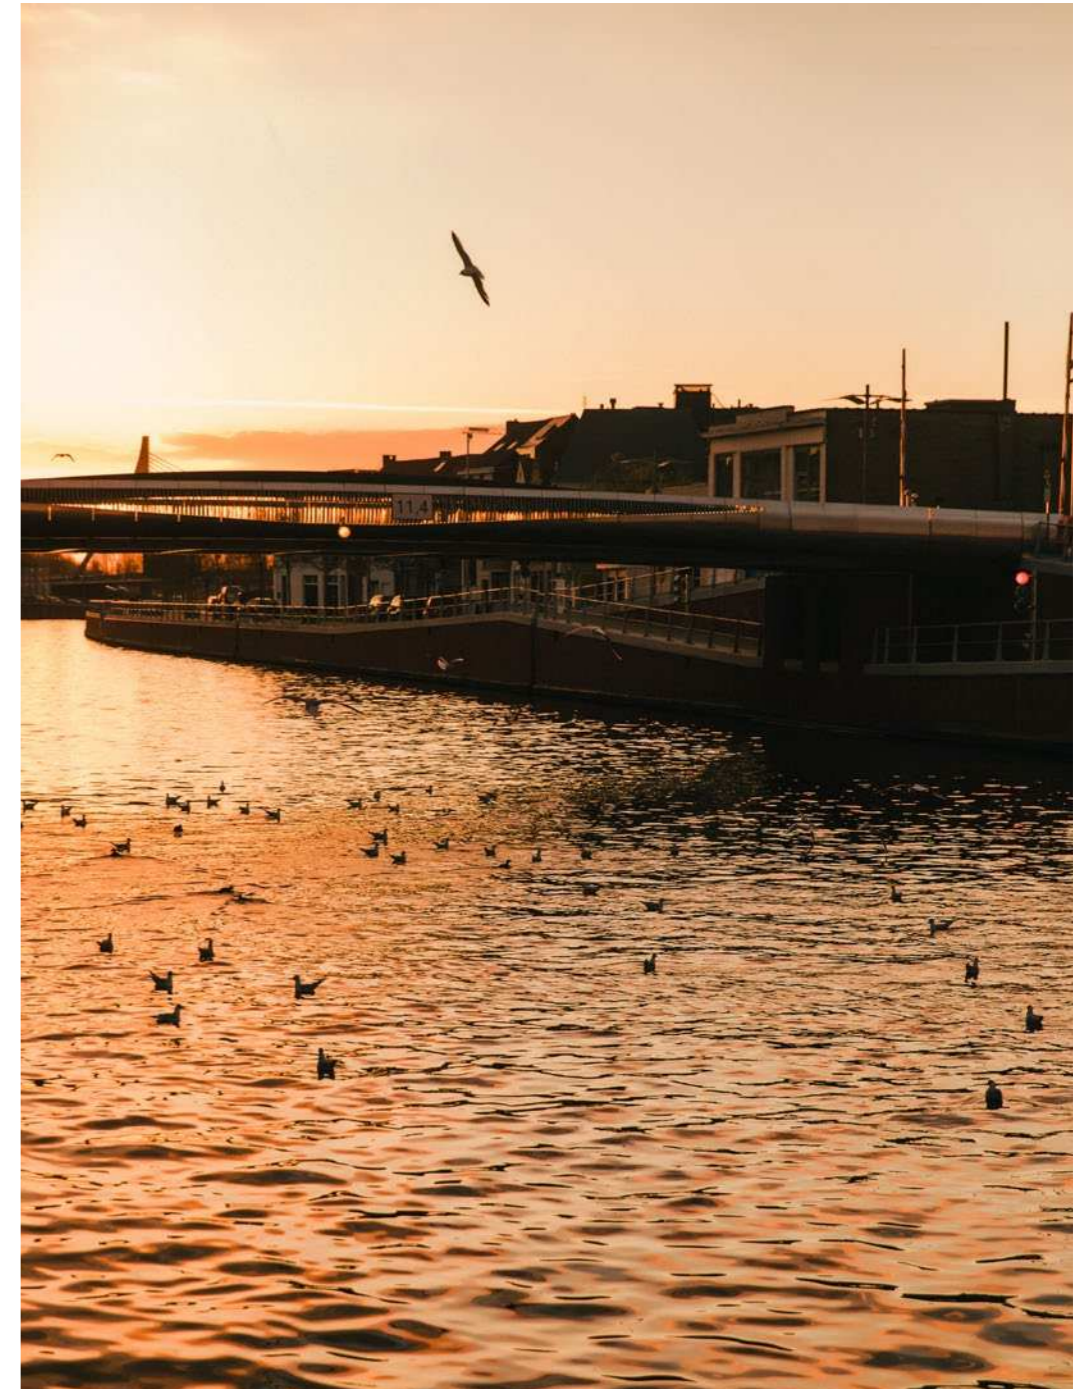

ALWAYS WITH YOU

ALL OVER THE WORLD




Wever & Ducré luminaires may be true Belgians, but they went global right from the get-go and are already in over 60 countries. And always right where the action is. In the chicest bars, the hippest clubs, and of course the coolest lofts in town. From London to New York. From Lucerne to Paris. Want to look at our trendsetters in peace? Drop by one of our nine showrooms. The latest Wever & Ducré highlights are waiting for you.

Wever & Ducré-Leuchten sind zwar echte Belgier, doch von Beginn an wahre Globetrotter. Deshalb findet man sie heute auch in über 60 Ländern der Welt. Und zwar immer genau da, wo was los ist. In den schicksten Lokalen, den angesagtesten Clubs und natürlich den coolsten Lofts der Stadt. Von London bis New York. Von Luzern bis Paris. Sie möchten sich unsere Trendsetter mal ganz in Ruhe ansehen? Dann kommen Sie doch einfach in einem unserer neun Showrooms vorbei. Die aktuellen Wever & Ducré-Highlights warten schon auf Sie.




WEVER & DUCRÉ COLOGNE
SHOWROOM
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 1306496 0



WEVER & DUCRÉ GRAZ
SHOWROOM
Gleisdorfer Gasse 15
8010 Graz
+43 316 31708591




WEVER & DUCRÉ LONDON
SHOWROOM
23 Batemans Row
EC2A 3HH London
+44 203 174 0177



WEVER & DUCRÉ SAN DONÀ DI PIAVE
SHOWROOM
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 17 78 388



WEVER & DUCRÉ STOCKHOLM
SHOWROOM
Hårdvallsgatan 18
115 46 Stockholm
+46 70 844 84 84



WEVER & DUCRÉ LYON
SHOWROOM
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 81 12 00



WEVER & DUCRÉ HONG KONG
SHOWROOM
EM-1413, Block A, Sea Port View Estate
2 Watson Road North Point, Hong Kong
+852 2110 6924



WEVER & DUCRÉ PARIS
SHOWROOM
10, Rue Pecquay
75004 Paris
+33 1 40 29 81 01



WEVER & DUCRÉ WARSAW
SHOWROOM
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 337



WEVER & DUCRÉ LUCERNE
OFFICE
Kellerstraße 22
6005 Lucerne
+41 41 361 60 60

LET'S STICK TOGETHER



WE LIKE EVERY PIECE OF IT

“At university, we always had to keep a sketchbook for every project,” says Egija Zirapa when asked about her preference for collages. “And somehow I usually found the newspaper clippings collected in it more interesting than the final outcome itself – I loved expressing myself in them.” No wonder this technique became her favourite. After all, a wide variety of subjects can be combined to form an entirely new statement. This is an idea we like. Because at Wever & Ducré, designers, architects, and artists from all over the world work together to create something new. We asked Egija Zirapa to create a unique work of art for us. Where? Right in Latvia, her home country, where the mural was crafted in an old brewery in Cēsis.


UNS GEFÄLLT JEDES TEIL DAVON

„An der Universität mussten wir immer ein kleines Skizzenbuch mit uns herumtragen“, erzählt Egija Zirapa, wenn man sie nach ihrer Vorliebe für Collagen fragt, „und irgendwie fand ich die darin gesammelten Zeitungsausschnitte meist interessanter als das Werk selbst.“ Kein Wunder also, dass gerade diese Technik zu ihrem Favoriten wurde. Schließlich lassen sich damit unterschiedlichste Dinge zu einer ganz neuen Aussage zusammenfügen. Eine Idee, die uns gefällt. Denn auch bei Wever & Ducré arbeiten Designer, Architekten und Künstler aus allen Erdteilen daran, gemeinsam etwas völlig Neues zu schaffen. Also haben wir Egija Zirapa gebeten, für uns ein neues Kunstwerk zu schaffen. Wo? Gleich direkt in ihrem Heimatland Lettland, wo das Mural in einer alten Brauerei in Cēsis umgesetzt wurde.

“I can change the mood and emotion of an image. Piece by piece.”

EGIJA ZIRAPA



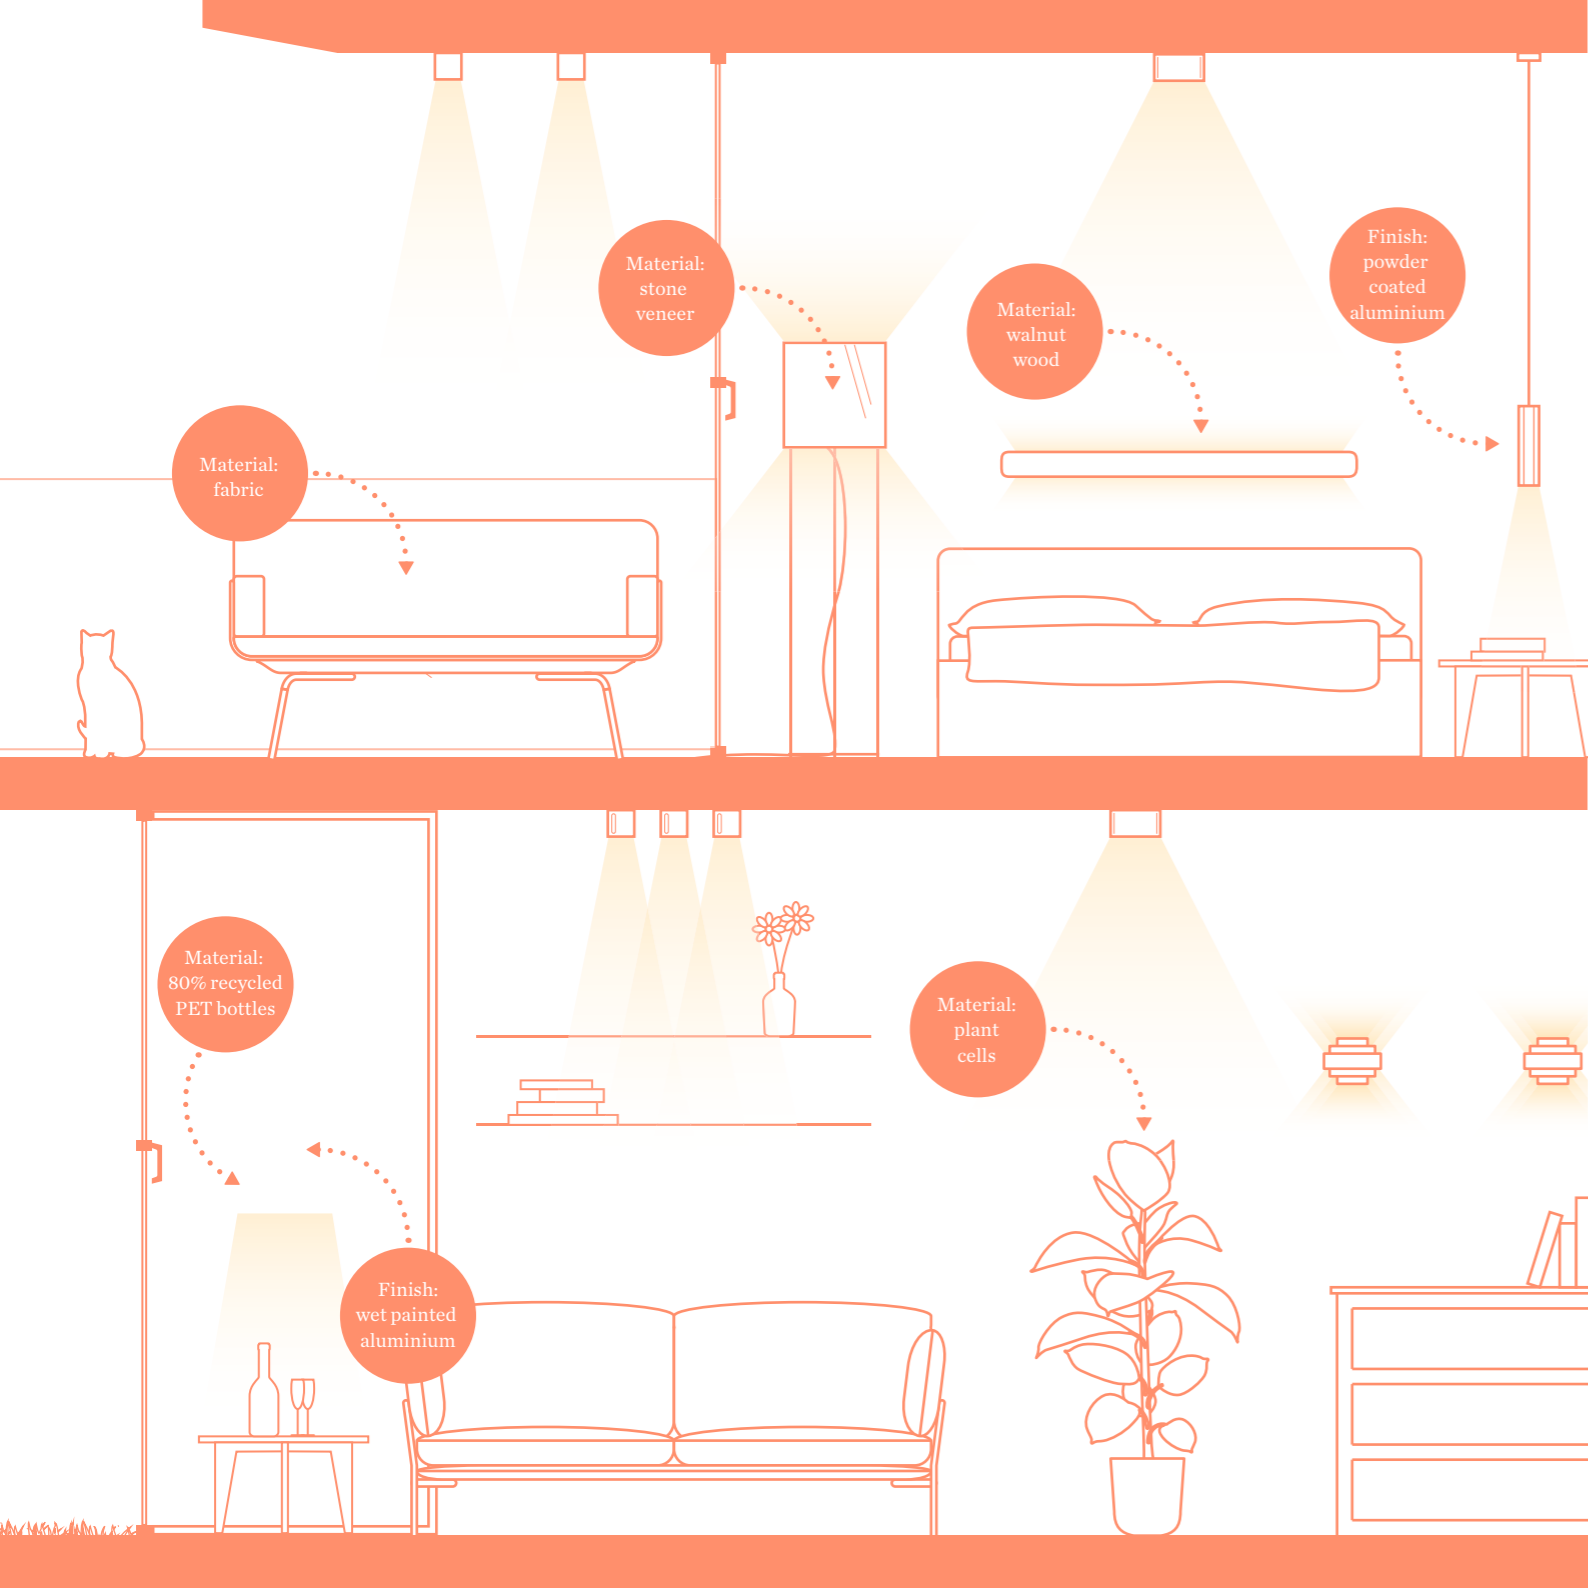

TRUST YOUR EYES

AMAZING MATERIALS AND FINISHES



“Is this really stone?” We hear questions like this a lot at Wever & Ducré. It’s no wonder. After all, there’s virtually no material our designers don’t experiment with. We create luminaires that make a statement, and that you wouldn’t find on every ceiling. From beautiful walnut wood to soft felt to real marble. Sounds crazy? It is. But it is precisely this extraordinary combination of design and material that defines a genuine Wever & Ducré luminaire. You like aluminium? Choose your favourite from our range of different finishes from our new collection.

„Ist das wirklich Stein?“ Fragen wie diese hören wir bei Wever & Ducré öfter. Kein Wunder. Schließlich gibt es fast kein Material, mit dem unsere Designer nicht experimentieren. Das Ergebnis: Leuchten mit Statement-Charakter, die man ganz sicher nicht an jeder Decke findet. Von edlem Walnussholz über weichen Filz bis zu echtem Marmor. Klingt verrückt? Ist es auch. Aber genau diese außergewöhnliche Kombination aus Design und Material ist es, die eine echte Wever & Ducré-Leuchte ausmacht. Sie haben sich für Aluminium entschieden? Dann können Sie zusätzlich aus vielen unterschiedlichen Finishes wählen. Also schnell zu den neuen Kollektionen weiterblättern und sich Ihren persönlichen Favoriten aussuchen.




SEE ALL MATERIALS AND FINISHES

weverducre.com/materials

FINISHES

PAINTED FINISHES | METAL FINISHES



A Anthracite Grey
Aluminium powder coated texture
RAL 7016



B Signal Black
Aluminium powder coated
without texture
RAL 9004




B Jet Black
Aluminium powder coated
wet painted in matt structure
RAL 9005




D Dark Grey Texture
Aluminium powder coated
in matt structure
RAL 9007



G Gold
Aluminium painted/brushed



G Cement Grey
Aluminium wet painted
RAL 7033




GW Cement Grey and White
Aluminium wet painted



D Dark Grey Texture
Composite material wet painted




GG Greyish Green
Composite material wet painted




GR Greyish Rose
Composite material wet painted



SY Soft Yellow
Composite material wet painted



O Pastel Green
Steel wet painted
RAL 6019



J White Texture and Gold
Aluminium wet painted



K Black Texture and Gold
Aluminium wet painted




P Copper
Aluminium or steel
painted brushed



P Copper
Steel varnished lacquered



Z Black Texture and Copper
Aluminium powder coated




Q Bronze
Aluminium painted/brushed




R Coral Red
Aluminium wet painted
RAL 3016




RW Coral Red and White Texture
Aluminium wet painted




S White Aluminium
Aluminium powder coated
without texture
RAL 9006




S Silver/Grey
Aluminium powder coated
without texture



T Light Grey
Steel powder coated
RAL 7035



W Signal White
Aluminium or steel powder coated
wet painted in matt structure
RAL 9003



W Pure White
Aluminium powder coated
without texture
RAL 9010



Y Grey Brown
Aluminium or steel powder coated
in matt structure
RAL 8019



A Aluminium Anodised
Aluminium anodised



C Chrome
Steel glossy chrome plated



C Chrome
Steel glossy chrome plated




G Light Gold
Steel plated



P Pink Copper
Steel plated



I Inox
304 Stainless steel electro polished



L Aluminium Brushed
Aluminium brushed



M Matt Chrome
Steel matt chrome plated



N Black Chrome
Plated steel



V Rust
Steel varnished rusted

MATERIALS

GLASS | MARBLE | WOOD | PORCELAIN | SYNTHETIC COMPOSITE MATERIAL



B Smoked
Glass handblown




P Copper
Glass handblown



TS Taupe Striped
Glass handblown




TW Taupe White
Glass handblown



TD Taupe Diamond
Glass handblown




FD Crystal Opal
Opal glass handblown



W White
Opal glass handblown




Y Brown
Opal glass handblown



MB Black
Marble



MW White
Marble



W White
Porcelain handmade



W White
LLDPE




AY Amber Yellow
Polycarbonate



CW Champagne White
Polycarbonate



HR Hip Rose
Polycarbonate



SG Smoke Grey
Polycarbonate



TG Tea Green
Polycarbonate




OR Traffic Orange
Polypropylene
RAL 2009



SB Water Blue
Polypropylene
RAL 5021



YE Colza Yellow
Polypropylene
RAL 1021




F Grey
Recycled PET felt



G Light Gold
Aluminium composite material




N Black Chrome
Aluminium composite material



D Multi Colour
Stone




W Autumn White
Stone




WN Walnut
Wood

COMBINATIONS

FINISHES AND MATERIALS



E White Texture and Black
Aluminium powder coated brushed



X White Texture and
Aluminium Brushed
Aluminium powder coated
and aluminium brushed

FROM DUSK TILL DAWN

RIGHT ATMOSPHERE AND MOOD



TURN IT HOWEVER YOU WANT

You can now set the right light for any mood with a simple twist. Do you want a chipper morning at 3000 K, or a romantic evening with a candlelight atmosphere at 1800 K? Either way, we have it covered! And the best thing is, the Ambient White Dim is available for nearly all of our lights. So you don't have to compromise on design. All you need is a 3-wire cable, a phase cut dimmer, and one of our lights. Keep shining!

DREHN SIE'S, WIE SIE'S MÖCHTEN


Ab sofort können Sie im Handumdrehen genau die Lichtstimmung zaubern, die Ihnen gefällt. Ein munterer Morgen bei 3000 K oder lieber ein romantischer Abend mit Candlelight-Stimmung bei 1800 K? Kein Problem. Und das Beste: Das Ambient White Dim ist für fast alle unsere Leuchten erhältlich. Damit sind Ihnen in puncto Design keine Grenzen gesetzt. Alles, was Sie brauchen, sind ein 3-poliges Kabel, ein Phasenabschnittsdimmer und eine unserer Leuchten. Also, keep shining!

GET YOURSELF

IN THE MOOD FOR

2700 K for
lunch

3000 K for
breakfast

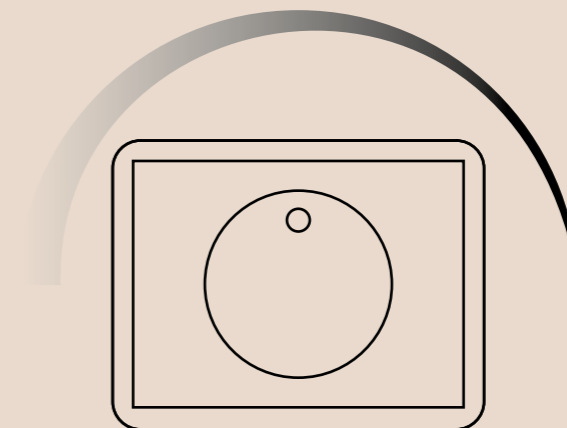

1800 K for
dinner

3000 K to 1800 K in
less than a second



SIGNED, SEALED, AND DELIVERED

YOU'VE BEEN EXPECTING ME

... SO WHAT NOW?

Now that you've fallen head over heels in love with one of our luminaires, there's only one last thing you want – and that's to have it as soon as possible. We understand that all too well. That's why we do everything we can to ensure that your new treasure arrives in record time. Here's an example. If we receive an order by 2:30 pm, we can ship it the very next day, since we have nearly all our luminaires on stock. That way, nothing stands in the way of your first evening together.

... UND AB DIE POST

Sie haben sich Hals über Kopf in eine unserer Leuchten verliebt und möchten jetzt nur noch eines: sie so schnell wie möglich bei sich haben? Verstehen wir gut. Deshalb tun wir alles, um Ihren neuen Liebling im Rekordtempo zu Ihnen zu bringen. Kleines Beispiel gefällig? Erreicht uns eine Bestellung bis 14:30 Uhr, können wir sie – da wir fast alle unsere Leuchten lagernd haben – gleich am nächsten Tag versenden. So steht dem ersten gemeinsamen Abend nichts mehr im Wege.



“When I see something beautiful, I simply have to have it now.”

YVES MARGINET
AREA SALES MANAGER

IN

DOOR

DESIGNER FAMILIES

p. 31 – 163

ROOMOR



**ROOMOR
CEILING 1.0**
p. 33



**ROOMOR
CEILING 2.0**
p. 35



**ROOMOR
SUSPENDED**
p. 37



**ROOMOR
WALL 2.0**
p. 39



**ROOMOR
WALL 4.0**
p. 45



**ROOMOR
TABLE 1.0**
p. 47



**ROOMOR
FLOOR**
p. 49

MIRRO



**MIRRO
CEILING**
p. 53



**MIRRO
SUSPENDED**
p. 55



**MIRRO
WALL**
p. 57



**MIRRO
TABLE**
p. 61



**MIRRO
FLOOR**
p. 63

DRO



**DRO
CEILING**
p. 65



**DRO
SUSPENDED**
p. 67



**DRO
WALL**
p. 71



**DRO
TABLE**
p. 75



**DRO
FLOOR**
p. 79

ROCK COLLECTION



**ROCK
SUSPENDED**
p. 81



**ROCK
FLOOR**
p. 85



**ROCK
NAKED**
p. 85

WIRO



**WIRO
SUSPENSION
SYSTEMS**
p. 91



**WIRO
WALL**
p. 117



**WIRO
TABLE**
p. 123



**WIRO
FLOOR**
p. 125

REVER



**REVER
SUSPENDED**
p. 131



**REVER
WALL**
p. 133



**REVER
TABLE**
p. 137



**REVER
DINING**
p. 141




**REVER
FLOOR**
p. 147

J.J.W.



**J.J.W.
SURFACE**
p. 151



**J.J.W.
SUSPENDED**
p. 153



**J.J.W.
WALL**
p. 157

A TRUE ALL-ROUNDER

ROOMOR HAS IT




 **MIX AND MATCH**
weverducre.com/roomor

It's safe to believe the rumours: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire to a discreet table lamp that can be used to create exceptional design accents at the office and beyond. And because ROOMOR is entirely adaptable to its surroundings when it comes to materials, all of the shade designs are offered in either painted aluminium or finely textured felt. Nothing could be more flexible.


Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe, mit der sich nicht nur im Büro schöne Design-Akzente setzen lassen. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen entweder in lackiertem Aluminium oder in fein strukturiertem Filz erhältlich. Flexibler geht's nicht.

MIX AND MATCH

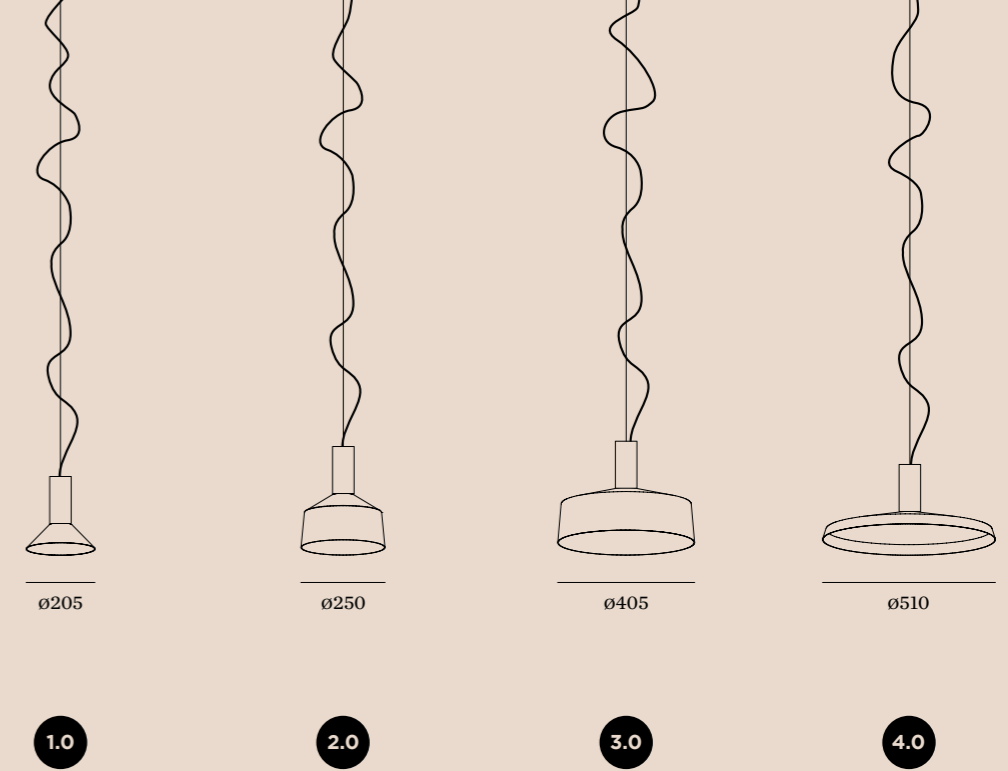

	1.0	2.0	3.0	4.0
CEILING				
1.0 PAR16 E27				
2.0 PAR16 E27				
SUSPENDED				
1.0 PAR16 E27				
WALL				
1.0				
2.0				
3.0				
4.0				
5.0				
TABLE				
1.0				
2.0				
FLOOR				
1.0				

RW | coral red + white G | cement grey + white K | black + gold B | black F | grey felt



1.0 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.10kg IP20 45°/45°

mounting only

CODE
168120B_

OPTIONAL


PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 701

extension tube

CODE
0.5m 90019192
1.0m 90019191



1.0 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium

1.10kg IP20 45°/45°

mounting only

CODE
1681E0B_

OPTIONAL

A60 LED E27 9W | phase-cut dim
2700K | 800lm

CODE
9003E152

more lamps and specs on page 703

extension tube

CODE
0.5m 90019192
1.0m 90019191



ALWAYS USE

no shade
CODE
00


shade 1.0 | Ø205mm
CODE
B1
K1
F1
grey felt

shade 2.0 | Ø250mm
CODE
B2
K2
F2
grey felt

shade 3.0 | Ø405mm
CODE
B3
K3
F3
grey felt

shade 4.0 | Ø510mm
CODE
B4
K4
F4
grey felt

overview on page 31



2.0 PAR16

2x PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

CODE
169120B_

OPTIONAL


PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 701

extension tube

CODE
0.5m 90019192
1.0m 90019191



2.0 E27

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

CODE
1691E0B_

OPTIONAL

A60 LED E27 9W | phase-cut dim
2700K | 800lm

CODE
9003E152

more lamps and specs on page 703

extension tube

CODE
0.5m 90019192
1.0m 90019191



B1



K2



F3



B4

ALWAYS USE

no shade

CODE
00

shade 1.0 | Ø205mm | 2 shades incl.

CODE
B1
K1
grey felt F1

shade 2.0 | Ø250mm | 2 shades incl.

CODE
B2
K2
grey felt F2


shade 3.0 | Ø405mm | 2 shades incl.

CODE
B3
K3
grey felt F3

shade 4.0 | Ø510mm | 2 shades incl.

CODE
B4
K4
grey felt F4

overview on page 31



1.0 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body

0.80kg IP20 ± 0.3

mounting only

	CODE
	248120B_
	248120R_
	248120G_


6.0m suspension on page 712

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 701



1.0 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body

0.80kg IP20 ± 0.3

mounting only

	CODE
	2481E0B_
	2481E0R_
	2481E0G_

6.0m suspension on page 712

OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K 800lm	9003E152

more lamps and specs on page 703



reddot award 2019
winner lighting design

ALWAYS USE

no shade	CODE
	00

shade 1.0 Ø205mm	CODE
	B1
	K1
	R1
	G1
	F1

shade 2.0 Ø250mm	CODE
	B2
	K2
	R2
	G2
	F2





shade 3.0 Ø405mm	CODE
	B3
	K3
	R3
	G3
	F3

shade 4.0 Ø510mm	CODE
	B4
	K4
	R4
	G4
	F4

overview on page 31



reddot award 2019
winner lighting design



1.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

0.90kg IP20 45°/45°

mounting only

	CODE
	338120B_..
	338120R_..
	338120G_..

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	B1
	K1
	R1
	G1
	F1

overview on page 31

2.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

1.10kg IP20 45°/45°

mounting only

	CODE
	338220B_..

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	B1
	K1
	F1

shade 2.0 | Ø250mm

	CODE
	B2
	K2
	F2

overview on page 31

OPTIONAL



PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 701



reddot award 2019
winner lighting design




3.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

0.85kg IP20 45°/45° 30°/30°


mounting
cable plug with hand switch

CODE
339120B_



cable base round

339220B_




5.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

1.45kg IP20 45°/45° 30°/30°


mounting
cable plug with hand switch

CODE
340120B_



cable base round

340220B_



ALWAYS USE

no shade

CODE
00

shade 1.0 | Ø205mm

CODE
B1
K1
grey felt F1

ALWAYS USE

no shade

CODE
00

shade 1.0 | Ø205mm

CODE
B1
K1
grey felt F1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 701





ALWAYS USE

no shade
CODE
00

shade 1.0 | Ø205mm
CODE
B1
K1
grey felt
F1

shade 2.0 | Ø250mm
CODE
B2
K2
grey felt
F2



shade 3.0 | Ø405mm
CODE
B3
K3
grey felt
F3

shade 4.0 | Ø510mm
CODE
B4
K4
grey felt
F4

overview on page 31

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm
CODE
901228B3
more lamps and specs on page 701

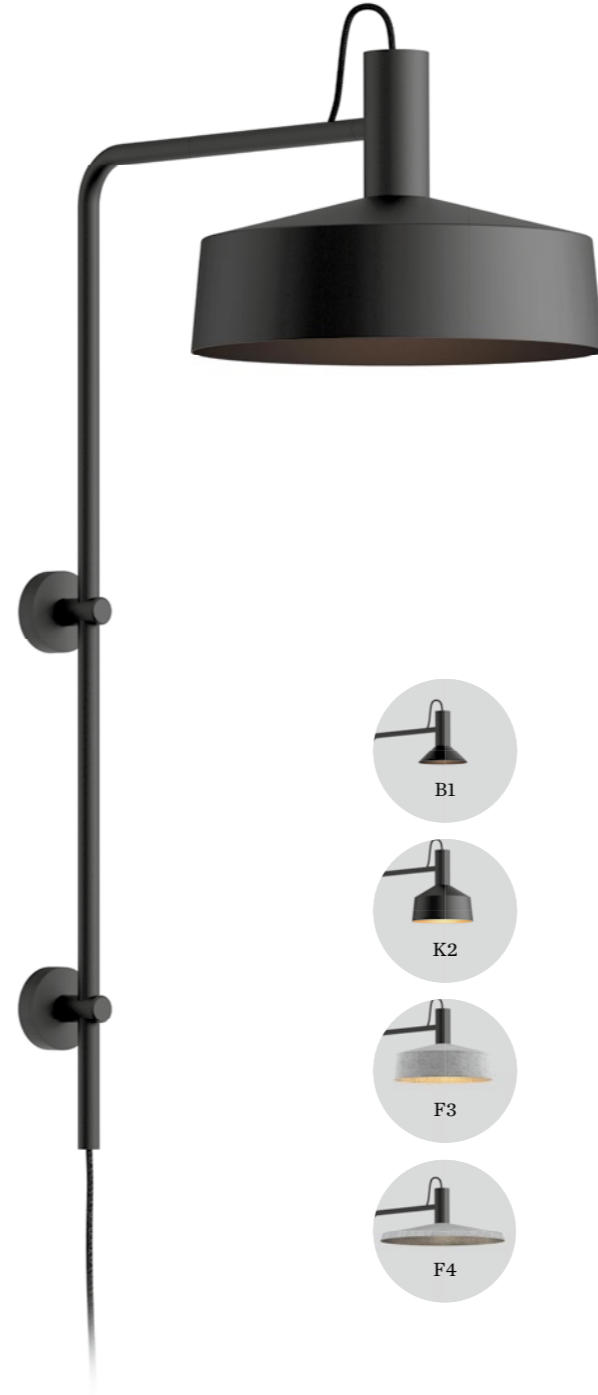


4.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.30kg IP20 45°/45° 30°/30°


mounting
cable plug with floor switch

CODE
339520B_



cable base round

CODE
339620B_



B1



K2





F3



F4



reddot award 2019
winner lighting design




1.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch

3.40kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	637120B_
	637120R_
	637120G_



ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	B1
	K1
	R1
	G1
	F1


2.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch

4.50kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	639120B_



ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	B1
	K1
	F1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm



	CODE
	901228W3
	901228B3

more lamps and specs on page 701





reddot award 2019
winner lighting design

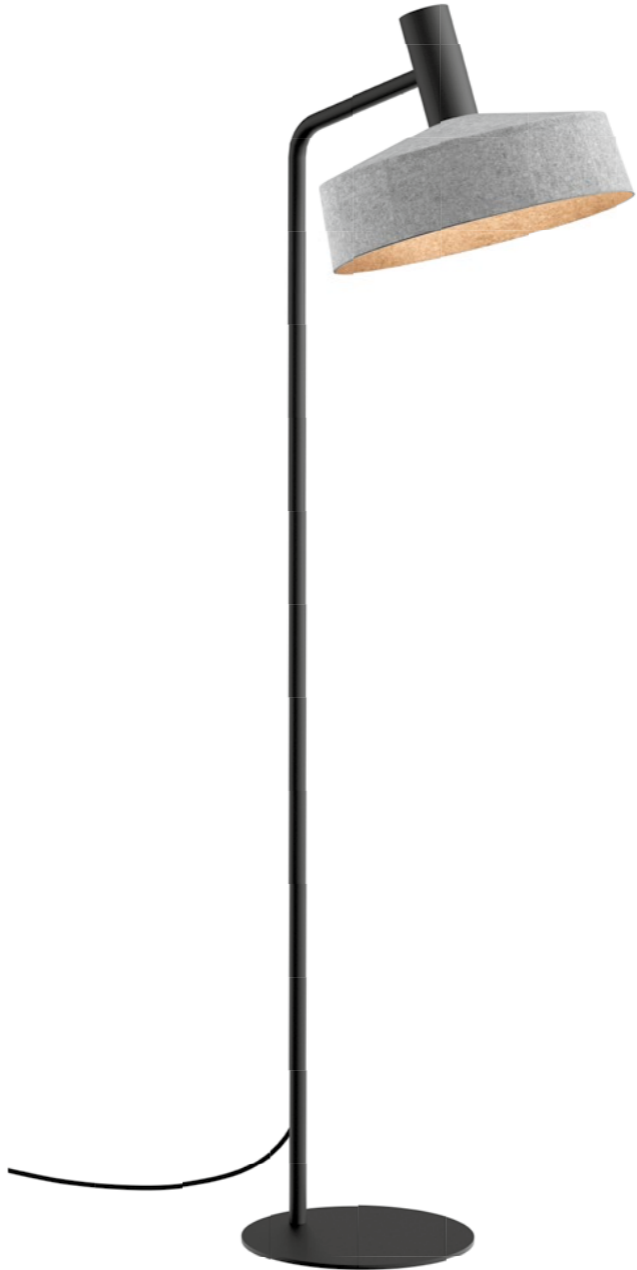


1.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

5.60kg IP20 45°/45° 30°/30°

mounting
black cable plug with floor switch

CODE
638120B...



ALWAYS USE

no shade
CODE
00

shade 1.0 | Ø205mm
CODE
B1
K1
grey felt F1

shade 2.0 | Ø250mm
CODE
B2
K2
grey felt F2

shade 3.0 | Ø405mm
CODE
B3
K3
grey felt F3

overview on page 31

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 701



DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIA SU & MARTIN LESJAK, 13&9 DESIGN

Anastasia Su and Martin Lesjak from the studio 13&9 are completely focused on “transferring the creative energy of a brand to the product itself”. This approach is also reflected in the three collections that the Austrian design team has created exclusively for Wever & Ducré.

First and foremost: the natural shale veneer of ROCK with its expressive character and varying degrees of transparency, which makes every luminaire completely unique. And DRO, for which the two designers have succeeded in permanently capturing the fleeting beauty of a dewdrop. “We dealt intensively with the so-called hydrophobic effect when designing this luminaire,” explains Anastasia Su. “It causes water to bead off or adhere to the surface, thus creating nestling or upright shapes – an aesthetic that made a special impression on us.” Besides finding inspiration in nature, 13&9 also draws upon an abundance of other creative realms such as art, fashion, and architecture – a transdisciplinary approach that is articulated so eloquently in the MIRRO collection designed together with Sabrina Stadlober. Both the beholder and the surroundings can be mirrored simultaneously in the reflective metallic surface of the luminaires. A masterful technique that 13&9 employs to create an intense connection between user and product. And that is exactly what makes all of the pieces designed by 13&9 so fascinating.

Anastasia Su und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in den insgesamt drei Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: die charakterstarke ROCK, deren unterschiedlich transparentes Schieferfurnier jede Leuchte zu einem absoluten Unikat macht. Aber auch DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasia Su. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“

Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch-reflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.




HAVE A LOOK
weverducre.com/dro





MORE INFO
weverducre.com/mirro


CURIOUS?
weverducre.com/rock



MIRRO

CEILING SURFACE



1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

CODE
6321E8GB0
6321E8NB0

2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

CODE
6322E8GB0
6322E8NB0

3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

CODE
6323E8GB0
6323E8NB0

OPTIONAL

A60 LED E27 6W gold mirror	CODE
2200K 400lm	9003E150
2700K 500lm	9003E139

A60 LED E27 6W silver mirror	CODE
2700K 500lm	9003E140

OPTIONAL

G95 LED E27 6W gold mirror	CODE
2200K 400lm	9003E151
2700K 500lm	9003E142

G95 LED E27 6W silver mirror	CODE
2700K 500lm	9003E149

OPTIONAL

G95 LED E27 6W gold mirror	CODE
2200K 400lm	9003E151
2700K 500lm	9003E142

G95 LED E27 6W silver mirror	CODE
2700K 500lm	9003E149



MIRRO

CEILING SUSPENDED



1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

2.5m

CODE
6341E8GBO
6341E8NBO

6.0m

CODE
6344E8GBO
6344E8NBO

OPTIONAL

A60 LED E27 6W gold mirror		CODE
2200K 400lm		9003E150
2700K 500lm		9003E139

A60 LED E27 6W silver mirror		CODE
2700K 500lm		9003E140

2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

2.5m

CODE
6342E8GBO
6342E8NBO

6.0m

CODE
6345E8GBO
6345E8NBO

OPTIONAL

G95 LED E27 6W gold mirror		CODE
2200K 400lm		9003E151
2700K 500lm		9003E142

G95 LED E27 6W silver mirror		CODE
2700K 500lm		9003E149

3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

2.5m

CODE
6343E8GBO
6343E8NBO


6.0m

CODE
6346E8GBO
6346E8NBO

OPTIONAL

G95 LED E27 6W gold mirror		CODE
2200K 400lm		9003E151
2700K 500lm		9003E142

G95 LED E27 6W silver mirror		CODE
2700K 500lm		9003E149




1.0 EXTENDED

LED A60 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20 35°/35°

CODE	
	6331E8GBO
	6331E8NBO

cable plug with dimmer




OPTIONAL

A60 LED E27 6W | gold mirror

CODE	
2200K 400lm	9003E150
2700K 500lm	9003E139

A60 LED E27 6W | silver mirror

CODE	
2700K 500lm	9003E140



1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

CODE	
	6321E8GBO
	6321E8NBO


OPTIONAL

A60 LED E27 6W | gold mirror

CODE	
2200K 400lm	9003E150
2700K 500lm	9003E139

A60 LED E27 6W | silver mirror

CODE	
2700K 500lm	9003E140



2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

CODE	
	6322E8GBO
	6322E8NBO


OPTIONAL

G95 LED E27 6W | gold mirror

CODE	
2200K 400lm	9003E151
2700K 500lm	9003E142

G95 LED E27 6W | silver mirror

CODE	
2700K 500lm	9003E149



3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

CODE	
	6323E8GBO
	6323E8NBO

OPTIONAL

G95 LED E27 6W | gold mirror

CODE	
2200K 400lm	9003E151
2700K 500lm	9003E142

G95 LED E27 6W | silver mirror


CODE	
2700K 500lm	9003E149





MIRRO

TABLE




1.0

LED A60 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.30kg IP20

CODE	
	6301ESGBO
	6301E8NBO

cable plug with dimmer



OPTIONAL

A60 LED E27 6W | gold mirror

CODE	
2200K 400lm	9003E150
2700K 500lm	9003E139

A60 LED E27 6W | silver mirror


CODE	
2700K 500lm	9003E140





MIRRO

FLOOR SURFACE





2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

3.30kg IP20

	CODE
	<u>6311E8GB0</u>
	<u>6311E8NB0</u>

cable plug with dimmer




3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

3.70kg IP20

	CODE
	<u>6312E8GB0</u>
	<u>6312E8NB0</u>

cable plug with dimmer



OPTIONAL



G95 LED E27 6W gold mirror	CODE
2200K 400lm	<u>9003E151</u>
2700K 500lm	<u>9003E142</u>

G95 LED E27 6W silver mirror	CODE
2700K 500lm	<u>9003E149</u>

OPTIONAL

G95 LED E27 6W gold mirror	CODE
2200K 400lm	<u>9003E151</u>
2700K 500lm	<u>9003E142</u>

G95 LED E27 6W silver mirror	CODE
2700K 500lm	<u>9003E149</u>



1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP20

CODE	
	1721G0WB0
	1721G0YB0

OPTIONAL

QT14 LED 3.5W dim

CODE	
2800K 300lm	9019G802
3000K 330lm	9019G804

more lamps and specs on page 703

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP20

CODE	
	1722C0WB0
	1722C0YB0

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE	
2700K 450lm	9003C103

more lamps and specs on page 703

3.0

LED A60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

2.70kg IP20

CODE	
	1723E0WB0
	1723E0YB0

OPTIONAL

A60 LED E27 9W | phase-cut dim

CODE	
2700K 800lm	9003E152

more lamps and specs on page 703



Italian hand blown glass



Italian hand blown glass

DRO
CEILING SUSPENDED

<p>1.0</p> <p>LED QT14 max. 5W G9 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium powder coated black textile cable</p> <p>0.70kg IP20</p>	<p>2.0</p> <p>LED C35 max. 6W E14 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium powder coated black textile cable</p> <p>1.30kg IP20</p>	<p>3.0</p> <p>LED A60 max. 12W E27 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium powder coated black textile cable</p> <p>2.70kg IP20</p>	<p>4.0</p> <p>LED A60 max. 15W E27 220-240VAC 50-60Hz white/brown opal glass hand blown aluminium powder coated black textile cable</p> <p>4.10kg IP20</p>
<p>CODE</p> <p>2521G0WB0</p> <p>2521G0YB0</p>	<p>CODE</p> <p>2522C0WB0</p> <p>2522C0YB0</p>	<p>CODE</p> <p>2523E0WB0</p> <p>2523E0YB0</p>	<p>CODE</p> <p>2524E0WB0</p> <p>2524E0YB0</p>
<p>OPTIONAL</p> <p>QT14 LED 3.5W dim</p> <p>CODE</p> <p>2800K 300lm 9019G802</p> <p>3000K 330lm 9019G804</p> <p>more lamps and specs on page 703</p>	<p>OPTIONAL</p> <p>C35 LED E14 6W opal phase-cut dim</p> <p>CODE</p> <p>2700K 450lm 9003C103</p> <p>more lamps and specs on page 703</p>	<p>OPTIONAL</p> <p>A60 LED E27 9W opal phase-cut dim</p> <p>CODE</p> <p>2700K 800lm 9003E152</p> <p>more lamps and specs on page 703</p>	<p>OPTIONAL</p> <p>A60 LED E27 15W opal phase-cut dim</p> <p>CODE</p> <p>2700K 1400lm 9003E153</p> <p>more lamps and specs on page 703</p>






SHOWROOM VANDEWIELE | FIVE AM MARKE | BELGIUM



FAIR LIGHTLAB | BELGIUM



DRO
WALL SURFACE





1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP44

CODE	
	3431GOW0
	3431GOY0



OPTIONAL

QT14 LED 3.5W dim

CODE	
2800K 300lm	9019G802
3000K 330lm	9019G804

more lamps and specs on page 703

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP44

CODE	
	3432COW0
	3432COY0

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE	
2700K 450lm	9003C103

more lamps and specs on page 703


1.0 COMP

3x LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable

2.50kg IP20 35°/35°

CODE	
	3441GOWB0
	3441GOYB0

cable plug with dimmer



OPTIONAL

QT14 LED 3.5W dim

CODE	
2800K 300lm	9019G802
3000K 330lm	9019G804

more lamps and specs on page 703

Italian hand blown glass






1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable

0.75kg IP20

CODE
6421G0WB0
6421G0YB0

cable plug with switch




OPTIONAL

QT14 LED 3.5W dim

2800K | 300lm 9019G802
3000K | 330lm 9019G804

more lamps and specs on page 703




2.0

LED C35 4-6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable

1.30kg IP20

CODE
6422C0WB0
6422C0YB0

cable plug with dimmer




OPTIONAL

C35 LED E14 6W opal | phase-cut dim

2700K | 450lm 9003C103

more lamps and specs on page 703




3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable

2.30kg IP20

CODE
6423E0WB0
6423E0YB0

cable plug with dimmer




OPTIONAL


A60 LED E27 9W | phase-cut dim

2700K | 800lm 9003E152

more lamps and specs on page 703



brown on




brown off

Italian hand blown glass



DRO

TABLE




2.0

LED C35 4-6W | E14
220-240VAC | 50-60Hz
opal glass hand blown
aluminium steel powder coated
black textile cable

2.30kg IP20


	CODE
	6432COWBO
	6432COYBO

cable plug with dimmer



OPTIONAL

C35 LED E14 6W opal | phase-cut dim
CODE
2700K | 450lm 9003C103
more lamps and specs on page 703




3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
opal glass hand blown
aluminium steel powder coated
black textile cable

3.30kg IP20



	CODE
	6433EOWBO
	6433EOYBO

cable plug with dimmer





OPTIONAL


A60 LED E27 9W opal | phase-cut dim
CODE
2700K | 800lm 9003E152
more lamps and specs on page 703



Italian hand blown glass



Italian hand blown glass




3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
opal glass hand blown
aluminium steel powder coated
black textile cable

5.00kg IP20

CODE
6442E0WB0
6442E0YB0

cable plug with dimmer




OPTIONAL

A60 LED E27 9W opal | phase-cut dim

CODE	
2700K 800lm	9003E152

more lamps and specs on page 703




1.0 COMP

3x LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
opal glass hand blown
aluminium steel powder coated
black textile cable

4.60kg IP20

CODE
6443G0WB0
6443G0YB0

cable plug with dimmer



OPTIONAL

QT14 LED 3.5W dim


CODE	
2800K 300lm	9019G802
3000K 330lm	9019G804

more lamps and specs on page 703



ROCK COLLECTION

CEILING SUSPENDED




3.0

A60 max. 100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

⏱ 3-5kg ⚡ IP20 ⚙ 0.3-1

Ø370mm	CODE
	2201E8W0
	2201E8D0
Ø560mm	CODE
	2203E8W0
	2203E8D0
Ø740mm	CODE
	2205E8W0
	2205E8D0



4.0

A60 max. 100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

⏱ 3.5-5.5kg ⚡ IP20 ⚙ 0.3-1

Ø370mm	CODE
	2202E8W0
	2202E8D0
Ø560mm	CODE
	2204E8W0
	2204E8D0
Ø740mm	CODE
	2206E8W0
	2206E8D0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

G95 LED E27 6W dim

2200K 450lm	9003E111
---------------	----------

G95 LED E27 12W phase-cut dim opal
2700K | 1000lm

9003E154

more lamps and specs on page 703

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138



G95 LED E27 6W dim

2200K 450lm	9003E111
---------------	----------


G95 LED E27 12W phase-cut dim opal
2700K | 1000lm

9003E154

more lamps and specs on page 703



Stone is a pure natural product, there may be deviations from the pictures in structure and colour.

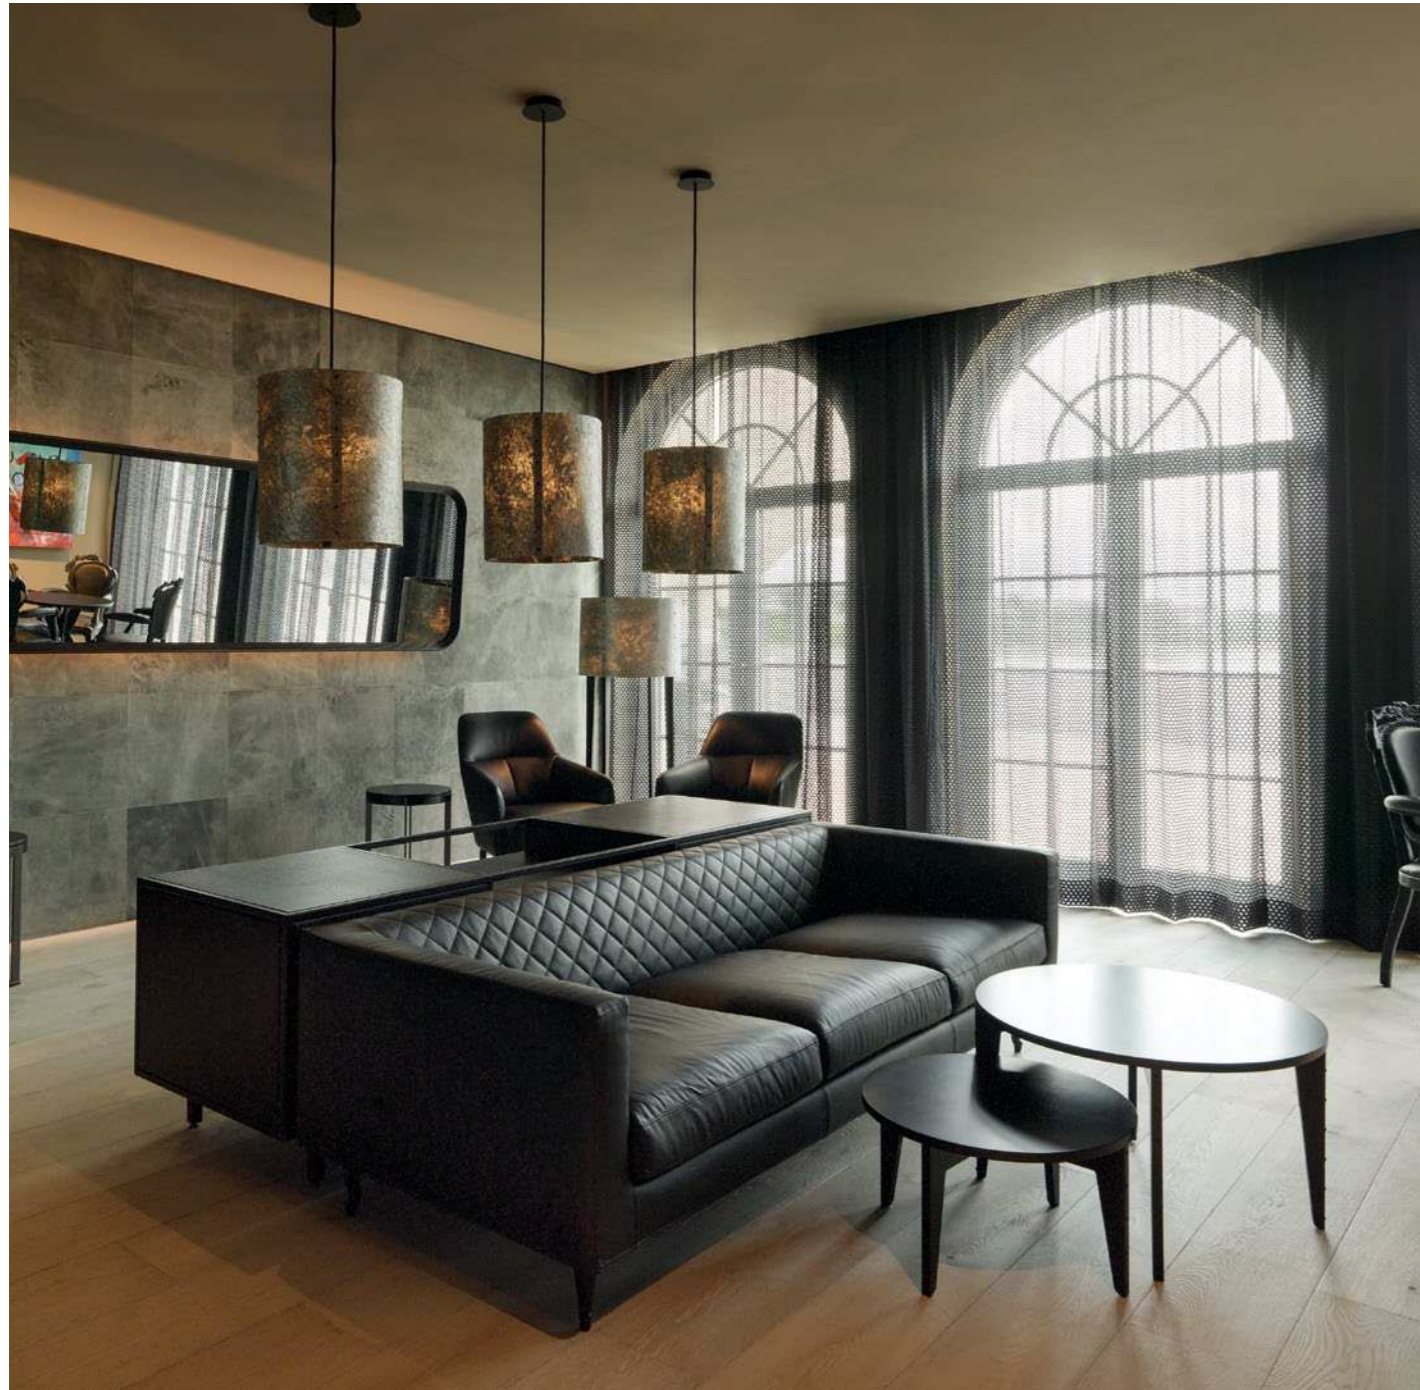


CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA



PRO MEDICO | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA

ROCK COLLECTION

FLOOR SURFACE




1.0 NAKED

◊ E27 max. 100W
220-240VAC | 50-60Hz
MDF lacquered
black textile cable

⚡ ⏳ 5.00kg ⊕ IP20 ⚙️ 0.3

CODE
2223E800

cable plug with dimmer



OPTIONAL


T32-300 carbon filament E27 15W

CODE
2200K | 50lm 9003E127

T30-300 LED E27 6W dim

CODE
2200K | 550lm 9003E130
2700K | 550lm 9003E135

more lamps and specs on page 704




6.0

◊ LED A60 4-25W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

⚡ ⏳ 6.00kg ⊕ IP20 ⚙️ 0.3

CODE
2221E8W0
2221E8D0

cable plug with dimmer



OPTIONAL

A60 LED E27 6W dim

CODE
2200K | 315lm 9003E109
2700K | 500lm 9003E138


G95 LED E27 6W dim

CODE
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal

CODE
2700K | 1000lm 9003E154

more lamps and specs on page 703




7.0

◊ LED A60 4-25W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

⚡ 7.00kg ⊕ IP20 ⚙️ 0.3

CODE
2222E8W0
2222E8D0

cable plug with dimmer



OPTIONAL

A60 LED E27 6W dim

CODE
2200K | 315lm 9003E109
2700K | 500lm 9003E138


G95 LED E27 6W dim

CODE
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal

CODE
2700K | 1000lm 9003E154

more lamps and specs on page 703




8.0

◊ LED A60 4-25W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

⚡ 3.50kg ⊕ IP20 ⚙️ 0.3

CODE
2241E8W0
2241E8D0

cable plug with dimmer



OPTIONAL

A60 LED E27 6W dim

CODE
2200K | 315lm 9003E109
2700K | 500lm 9003E138

G95 LED E27 6W dim

CODE
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal

CODE
2700K | 1000lm 9003E154

more lamps and specs on page 703



HAIRDRESSER ZEITGEIST | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA



WIRO DIAMOND



WIRO GLOBE



WIRO



WIRO INDUSTRY



MIX AND MATCH

weverducre.com/wiro



DESIGNER

“Design is good if it brings something new and timeless to the world.”


BERND STEINHUBER

And with WIRO, Bernd Steinhuber has accomplished exactly that. What inspires the Austrian designer, who was born in 1972, the most? Plainly said: Everything. Therefore, his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.



WIRO
SUSPENSION SYSTEM



SUSPENSION SINGLE


E27 | connector set for one shade
round ceiling base | black textile cable
shade not included

for shades without steel wire
max. 4.0kg

	CODE
2.6m	90015171
6.0m	90015172

for shades with steel wire


	CODE
2.6m	90015175
6.0m	90015176



DECENTER 1.0

E27 | connector set for one shade
round ceiling base | black textile cable
cable shade not included | 1 base +
1 endstop included | max 4.0kg


	CODE
6.0m suspension on page 712	90052050



DECENTER 2.0

E27 | connector set for two shades
round ceiling base | black textile cable
shades not included | 1 multibase
+ 2 endstops included
max 4.0kg per shade

	CODE
6.0m suspension on page 712	90052055




DECENTER 3.0-8.0

E27 | connector set for 3 to max. 8
shades round ceiling base | black
textile cable | shades not included
2.6m | 1 multibase + 3-8 endstops
included | max 4.0kg per shade

	CODE
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071


6.0m suspension on page 712




PLUG + PLAY

E27 LED 4-25W | connector set for
one shade | black textile cable | incl.
cable plug with dimmer | shade not
included | 2 cable brackets included
max 4.0kg

	CODE
cable plug with dimmer	90015165





1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.15kg | 0.3m | IP20

shade only

	CODE
	209200V0
	209200B0

OPTIONAL

A60 carbon filament E27 15W

	CODE
2200K 50lm	9003E124



T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

more lamps and specs on page 703



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

0.35kg | 0.3m | IP20

shade only

	CODE
	209600V0
	209600B0

OPTIONAL


A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

A60 carbon filament E27 15W

	CODE
2200K 50lm	9003E124

more lamps and specs on page 703



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.35kg | 0.3m | IP20

shade only

	CODE
	209300V0
	209300B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

A60 carbon filament E27 15W

	CODE
2200K 50lm	9003E124

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

more lamps and specs on page 703

ALWAYS USE

Suspension single
connector set for one shade | max 4.0kg
round ceiling base | no steel wire

	CODE
	2.6m 90015171
	6.0m 90015172

more information on page 91

Plug + Play | connector set for one shade | incl. cable plug with dimmer
max 4.0kg

	CODE
	90015165

Decenter 1.0-8.0

connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 4.0kg per shade


	CODE
	for 1 90052050
	for 2 90052055
	for 3 90052060
	for 4 90052067
	for 5 90052068
	for 6 90052069
	for 7 90052070
	for 8 90052071





WIRO

CEILING SUSPENDED

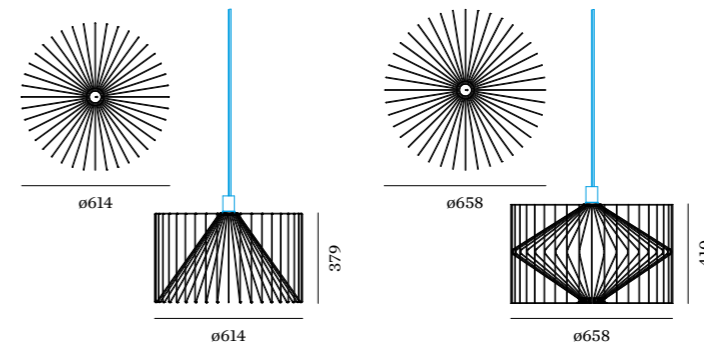

6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg | 0.3m | IP20

shade only

	CODE
	209400V0
	209400B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

ST64 carbon filament E27 15W

	CODE
2200K 50lm	9003E105

more lamps and specs on page 703

6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.85kg | 0.3m | IP20

shade only

	CODE
	209500V0
	209500B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 703

ALWAYS USE

Suspension single

connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

Plug + Play | connector set for one shade | incl. cable plug with dimmer
max 4.0kg

	CODE
	90015165

Decenter 1.0-8.0


connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 4.0kg per shade

	CODE
for 1	90052050
for 2	90052055
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071





WIRO
CEILING SUSPENDED



1.0 DIAMOND

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

📏 2.82kg 📏 0.3+D IP20

shade only

	CODE
■	229100P0
■	229100B0

OPTIONAL


T30-300 LED E27 8W

	CODE
■ 2200K 550lm	9003E130
■ 2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
■ 2200K 50lm	9003E127

more lamps and specs on page 704



1.1 DIAMOND

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

📏 2.00kg 📏 0.3+D IP20

shade only

	CODE
■	244100P0
■	244100B0

OPTIONAL


T30-300 LED E27 8W

	CODE
■ 2200K 550lm	9003E130
■ 2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
■ 2200K 50lm	9003E127

more lamps and specs on page 704



ALWAYS USE

Suspension single

connector set for one shade
round ceiling base | with steel wire

	CODE
■ 2.6m	90015175
■ 6.0m	90015176

more information on page 91

Plug + Play | connector set for one shade | incl. cable plug with dimmer
max 4.0kg

	CODE
■	90015165

Decenter 1.0-8.0


connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 4.0kg per shade

	CODE
■ for 1	90052050
■ for 2	90052055
■ for 3	90052060
■ for 4	90052067
■ for 5	90052068
■ for 6	90052069
■ for 7	90052070
■ for 8	90052071





As awarded by The Chicago Athenaeum: Museum of Architecture and Design



2.0 DIAMOND

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 5.08kg ☑ ±0.3+D IP20

shade only

	CODE
	229200P0
	229200B0

OPTIONAL


T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 704



3.0 DIAMOND

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 6.50kg ☑ ±0.3+D IP20

shade only

	CODE
	229300P0
	229300B0

OPTIONAL


T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 704



4.0 DIAMOND

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 6.00kg ☑ ±0.3+D IP20

shade only

	CODE
	229400P0
	229400B0

OPTIONAL


T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 704



copper
P



black
B

ALWAYS USE

Suspension single

connector set for one shade
round ceiling base | with steel wire


	CODE
	90015175
	90015176

more information on page 91





WIRO
CEILING SUSPENDED



1.0 INDUSTRY

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.00kg ±0.3 IP20

shade only

	CODE
	230100T0
	230100B0

OPTIONAL

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135


T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

more lamps and specs on page 704

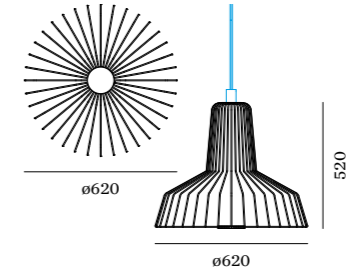

2.0 INDUSTRY

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

4.50kg ±0.3 IP20

shade only

	CODE
	230200O0
	230200B0

OPTIONAL


T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 704




ALWAYS USE

Suspension single

connector set for one shade
round ceiling base | with steel wire

	CODE
	90015175
	90015176

more information on page 91



1.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.20kg 0.3m IP20

shade only

	CODE
	228100W0
	228100R0
	228100B0

OPTIONAL


T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.80kg 0.3m IP20

shade only

	CODE
	228200W0
	228200B0

OPTIONAL


A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

more lamps and specs on page 703



3.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.30kg 0.3m IP20

shade only

	CODE
	228300W0
	228300B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

ST64 LED E27 6W

	CODE
2200K 450lm	9003E110

more lamps and specs on page 703



ALWAYS USE

Suspension single


connector set for one shade
round ceiling base | with steel wire

	CODE
	90015175
	90015176

more information on page 91



ø300



ø300

4.0 GLOBE

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 1.30kg ☑ IP20

shade only

	CODE
☐	243100W0
☑	243100V0
☑	243100B0

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

more lamps and specs on page 704



ø450



ø450

5.0 GLOBE

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 2.70kg ☑ IP20

shade only

	CODE
☐	243200W0
☑	243200V0
☑	243200B0

OPTIONAL

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135


T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 704



ø550



ø550

6.0 GLOBE

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ 3.30kg ☑ IP20

shade only

	CODE
☐	243300W0
☑	243300V0
☑	243300B0

OPTIONAL

T30-300 LED E27 8W

	CODE
2200K 550lm	9003E130
2700K 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127


more lamps and specs on page 704



white
W



rust
V



black
B

ALWAYS USE

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
☐ 2.6m	90015175
☑ 6.0m	90015176

more information on page 91

Plug + Play | connector set for one
shade | incl. cable plug with dimmer
max 4.0kg

	CODE
☐	90015165

Decenter 1.0-8.0

connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 4.0kg per shade

	CODE
☐ for 1	90052050
☑ for 2	90052055
☑ for 3	90052060
☑ for 4	90052067
☑ for 5	90052068
☑ for 6	90052069
☑ for 7	90052070
☑ for 8	90052071



WIRO

CEILING SUSPENDED



ø245



ø245

265

1.0 CONE

☐ T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered


☑ 1.00kg | 0.3m | IP20

shade only

	CODE		90015171
	245100V0		90015172
	245100B0		

OPTIONAL

T30-225 LED E27 6W

	CODE		90015165
2200K 450lm	9003E129		
2700K 500lm	9003E136		

T32-180 carbon filament E27 15W

2200K 50lm	9003E106		
--------------	----------	--	--


A60 LED E27 6W

2200K 315lm	9003E109		
---------------	----------	--	--

A60 carbon filament E27 15W

2200K 50lm	9003E124		
--------------	----------	--	--

more lamps and specs on page 703



rust
V



black
B

ALWAYS USE

Suspension single
connector set for one shade | max 4.0kg
round ceiling base | no steel wire









	CODE		90015171
			90015172

more information on page 91

Plug + Play | connector set for one shade | incl. cable plug with dimmer
max 4.0kg

	CODE		90015165
--	------	---	----------

Decenter 1.0-8.0
connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 4.0kg per shade


	CODE		for 1	90052050
			for 2	90052055
			for 3	90052060
			for 4	90052067
			for 5	90052068
			for 6	90052069
			for 7	90052070
			for 8	90052071





WIRO

WALL SURFACE




1.0 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.45kg IP20

CODE	
	3351E8PB0
	3351E8BB0




1.1 DIAMOND

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.45kg IP20

CODE	
	3352E8PB0
	3352E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

CODE	
2200K 50lm	9003E106

more lamps and specs on page 704

OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

CODE	
2200K 50lm	9003E106


more lamps and specs on page 704





WIRO

WALL SURFACE





1.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.95kg IP20

	CODE
	3353E8WB0
	3353E8VB0
	3353E8BB0




1.1 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.95kg IP20

	CODE
	3354E8WB0
	3354E8VB0
	3354E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

more lamps and specs on page 704

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W


	CODE
2200K 50lm	9003E106

more lamps and specs on page 704



WIRO

WALL SURFACE




1.0 CONE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.45kg IP20

	CODE
	3341E8VB0
	3341E8BB0




1.1 CONE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.65kg IP20

	CODE
	3342E8VB0
	3342E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

A60 LED E27 6W

	CODE
2200K 315lm	9003E109

A60 carbon filament E27 15W

	CODE
2200K 50lm	9003E124

more lamps and specs on page 703

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106


A60 LED E27 6W

	CODE
2200K 315lm	9003E109

A60 carbon filament E27 15W

	CODE
2200K 50lm	9003E124

more lamps and specs on page 703




1.0 DIAMOND

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.90kg IP20

CODE
6603E8PB0
6603E8BBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE
2200K 450lm 9003E129
2700K 500lm 9003E136

T32-180 carbon filament E27 15W

CODE
2200K 50lm 9003E106

more lamps and specs on page 704




1.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.20kg IP20

CODE
6601E8WB0
6601E8VB0
6601E8BBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE
2200K 450lm 9003E129
2700K 500lm 9003E136

T32-180 carbon filament E27 15W

CODE
2200K 50lm 9003E106

more lamps and specs on page 704




2.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.20kg IP20

CODE
6602E8WB0
6602E8VB0
6602E8BBO

cable plug with dimmer



OPTIONAL


T30-300 LED E27 8W

CODE
2200K 550lm 9003E130
2700K 550lm 9003E135


T32-300 carbon filament E27 15W

CODE
2200K 50lm 9003E127

more lamps and specs on page 704

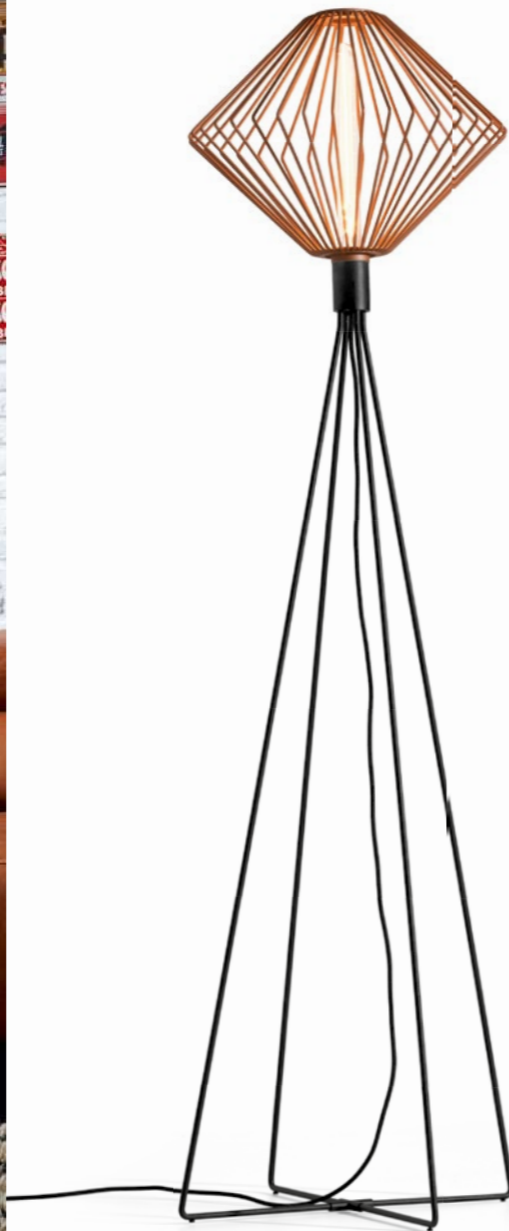

WIRO
FLOOR SURFACE




DIAMOND 1.0

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5,40kg IP20

CODE
6614E8PB0
6614E8BBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE
2200K 450lm 9003E129
2700K 500lm 9003E136

T32-180 carbon filament E27 15W

CODE
2200K 50lm 9003E106

more lamps and specs on page 704




GLOBE 1.0

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6,10kg IP20

CODE
6611E8WB0
6611E8VB0
6611E8BBO

cable plug with dimmer



OPTIONAL


T30-300 LED E27 8W

CODE
2200K 550lm 9003E130
2700K 550lm 9003E135

T32-300 carbon filament E27 15W

CODE
2200K 50lm 9003E127

more lamps and specs on page 704




GLOBE 2.0

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6,70kg IP20

CODE
6612E8WB0
6612E8VB0
6612E8BBO

cable plug with dimmer



OPTIONAL

T30-300 LED E27 8W

CODE
2200K 550lm 9003E130
2700K 550lm 9003E135

T32-300 carbon filament E27 15W

CODE
2200K 50lm 9003E127

more lamps and specs on page 704

ONE IDEA

ENDLESS VARIATIONS

I bet you think they're sweet. They are. REVER's delicate pastel shades are real eye candy, and not just for Sixties fans. The multifunctional luminaire was designed by the Italian designer Marcello Ziliani, who was inspired by the lapels typical of the time. The result is a unique product in both design and material. What looks like frosted glass is a special polycarbonate moulded in a single casting. This makes REVER a highlight in terms of stability. Regardless of whether they are wall, ceiling, floor, or table luminaires. By the way, if you want it colourful, combine up to five distinct luminaire fixtures with six different aluminium details and trays. It couldn't be more customisable.

SHADE COLOUR | LAMP BODY



TRAY COLOUR | MOUNTING DETAIL



Ooch - sind die süß, werden Sie jetzt denken. Stimmt. Denn die zarten Pastelltöne von REVER sind nicht nur für Sixties-Fans echter „Eyecandy“. Entworfen wurde die multifunktionale Leuchte vom italienischen Designer Marcello Ziliani, der sich von den typischen Reversformen der Zeit inspirieren ließ. Das Ergebnis ist ein Produkt, das nicht nur durch sein Design, sondern auch durch das verwendete Material absolut einzigartig ist. Was wie Milchglas aussieht, ist nämlich ein spezielles Polycarbonat, das in nur einem Guss geformt wird. Das macht REVER auch in puncto Stabilität zu einem echten Highlight. Ganz egal, ob man sie als Wand-, Decken-, Steh- oder Tischleuchte einsetzt. Übrigens: Wer's gerne bunt mag, kann bis zu fünf unterschiedliche Leuchtenkörper mit sechs verschiedenen Aluminiumdetails und Trays kombinieren. Individueller geht's nicht.



MIX AND MATCH
weverducre.com/rever



DESIGNER

Designing luminaires is a very niche art.

MARCELLO ZILIANI



MORE INFO

weverducre.com/rever


Wever & Ducré teamed up with renowned designer Marcello Ziliani, who created an eclectic collection of luminaires that skilfully combines timeless design with functionality. The lapels of men's jackets served as a model for the diffusers' shape. The lamp body is composed of a single piece of injection-moulded polycarbonate. Inspired by delicate linens, the surface texture is achieved by a complex, cutting-edge laser technology. Sounds good? Then you'll also be happy to hear that the REVER collection is available in a variety of colours and finishes, making it a perfect fit for every lobby. And also for every hotel room of course.

In Zusammenarbeit mit dem renommierten italienischen Designer Marcello Ziliani realisierte Wever & Ducré eine eklektische Leuchtenserie, die gekonnt zeitloses Design mit Funktionalität verbindet. Modernste Lasertechnologien verleihen der Oberfläche ihre zarte, von Leinen inspirierte Struktur. Der elegante Leuchtenkörper erinnert an ein Herrenanzugrevers. Klingt gut? Dann freut es Sie sicher auch zu hören, dass die REVER-Kollektion in ihrer Vielzahl an Farb- und Oberflächen-Kombinationen perfekt in jede Lobby passt. Und natürlich auch in jedes Hotelzimmer.






PRIVATE RESIDENCE GERMANY



REVER

CEILING SUSPENDED



1.0

LED A60 max. 15W | E27
metalized or painted ABS
polycarbonate | hanging in
both ways

IP20 3.5kg

lamp body

	CODE
	6521ETG
	6521ESG
	6521ECW
	6521EAY
	6521EHR

mounting detail

	CODE
	C
	N
	G
	P
	W
	B


cable colour

	CODE
	_W
	_B


6.0m cable available on request

OPTIONAL

A60 LED E27 15W phase-cut dim		CODE
2700K 1400lm		9003E153




mounting detail chrome

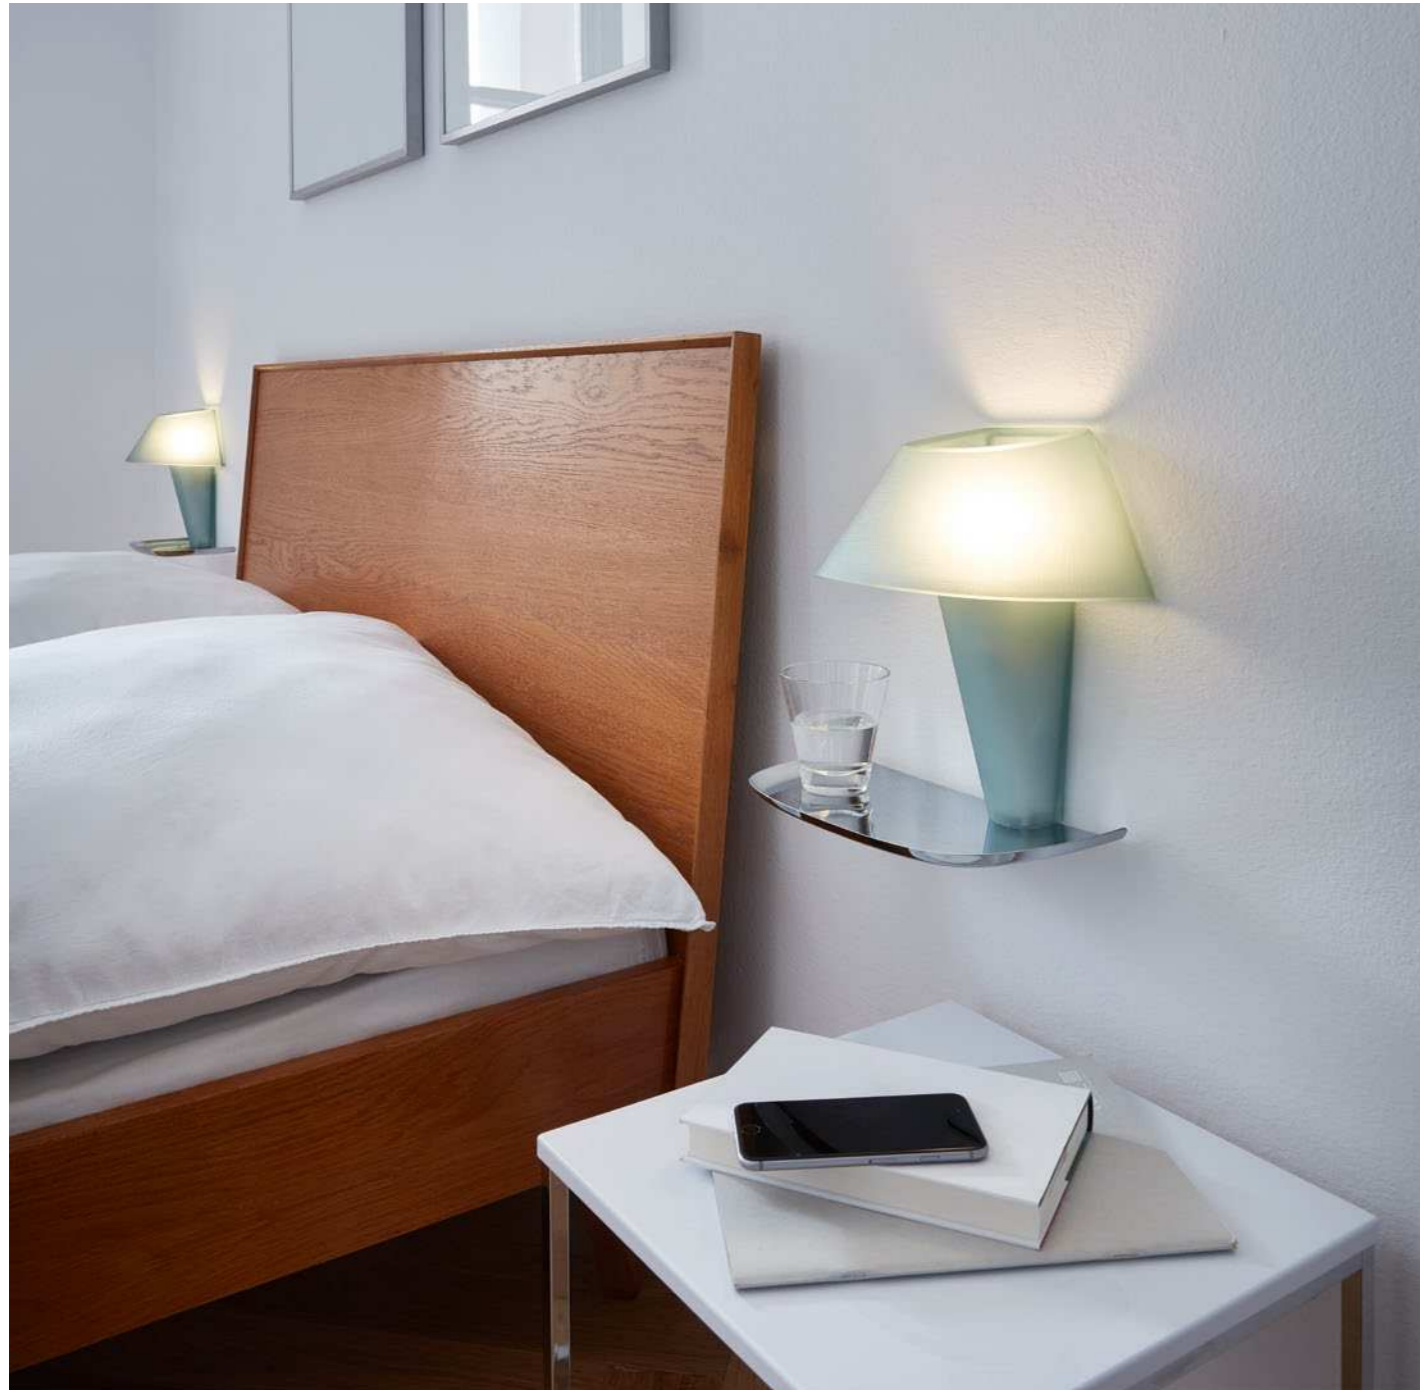

REVER

WALL SURFACE



1.0

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 1kg

lamp body


	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_

tray colours

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W opal | phase-cut dim
CODE
2700K | 450lm 9003C103



1.1

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 1,1kg

lamp body


	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_

tray colours

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

Cable Plug Colours cable plug with dimmer


	CODE
	_W
	_B





REVER

WALL SURFACE



2.0

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 0.7kg

lamp body


	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_

mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W opal | phase-cut dim
CODE
2700K | 450lm 9003C103



2.1

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 0.8kg

lamp body


	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_

mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

Cable Plug Colours
cable plug with dimmer

	CODE
	_W
	_B






REVER

TABLE



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED A60 max. 12W | E27
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 1.5kg


lamp body

	CODE
	6501ETG_
	6501ESG_
	6501ECW_
	6501EAY_
	6501EHR_

tray colours

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



2.0

LED A60 max. 12W | E27
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

IP20 1.1kg 12


lamp body

	CODE
	6502ETG_
	6502ESG_
	6502ECW_
	6502EAY_
	6502EHR_

mounting detail

	CODE
	C

black cable plug with dimmer



OPTIONAL

A60 LED E27 9W | phase-cut dim
CODE
2700K | 800lm 9003E152






REVER DINING

TABLE



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED 2.5W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder
coated zink alloy | PMMA

IP23 0.8kg

ALWAYS USE

flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

lamp body	CODE	CODE
	655184Q	90019163
	655184B	90019164

LIGHT COLOUR	LUMEN	CRI	CODE
2200K	90	>80	1

lamp body	CODE
	655184C
	655184G
	655184Q
	655184W
	655184B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	100	>80	2

ALWAYS USE

single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

OPTIONAL	CODE	CODE
multiple charging tray up to 4 fixtures	90018007	90019171
		90019173
		90019175
		90019165
		90019166





RESTAURANT FREIGEIST BRAUQUARTIER | FIPE ARCHITECTURE GRAZ | AUSTRIA




PRIVATE RESIDENCE GRAZ | AUSTRIA

available from spring 2020

REVER DINING

TABLE



2.0


LED 2W | 220-240VAC | 50-60Hz
PCB 3-step | zink alloy powder coated | PMMA | touch dim

0.93kg | IP23

CODE	
	655284W
	655284Q
	655284B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	100	>80	2


black cable plug with transformer
white cable for white tray





REVER

FLOOR SURFACE



1.0 XS

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel polycarbonate

IP20 4.7kg


lamp body

	CODE
	6531ETG_
	6531ESG_
	6531ECW_
	6531EAY_
	6531EHR_

mounting detail


	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim
CODE
2700K | 800lm 9003E152



1.0 S

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel polycarbonate

IP20 5kg


lamp body

	CODE
	6532ETG_
	6532ESG_
	6532ECW_
	6532EAY_
	6532EHR_

mounting detail


	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim
CODE
2700K | 800lm 9003E152



1.0 M

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel polycarbonate

IP20 5.3kg


lamp body

	CODE
	6533ETG_
	6533ESG_
	6533ECW_
	6533EAY_
	6533EHR_

mounting detail


	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim
CODE
2700K | 800lm 9003E152



1.0 L

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel polycarbonate

IP20 5.4kg


lamp body

	CODE
	6534ETG_
	6534ESG_
	6534ECW_
	6534EAY_
	6534EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim
CODE
2700K | 800lm 9003E152



J.J.W. 042


J.J.W. 05

J.J.W. 02

DESIGNER

You can learn new things from old ones.

JULES WABBES

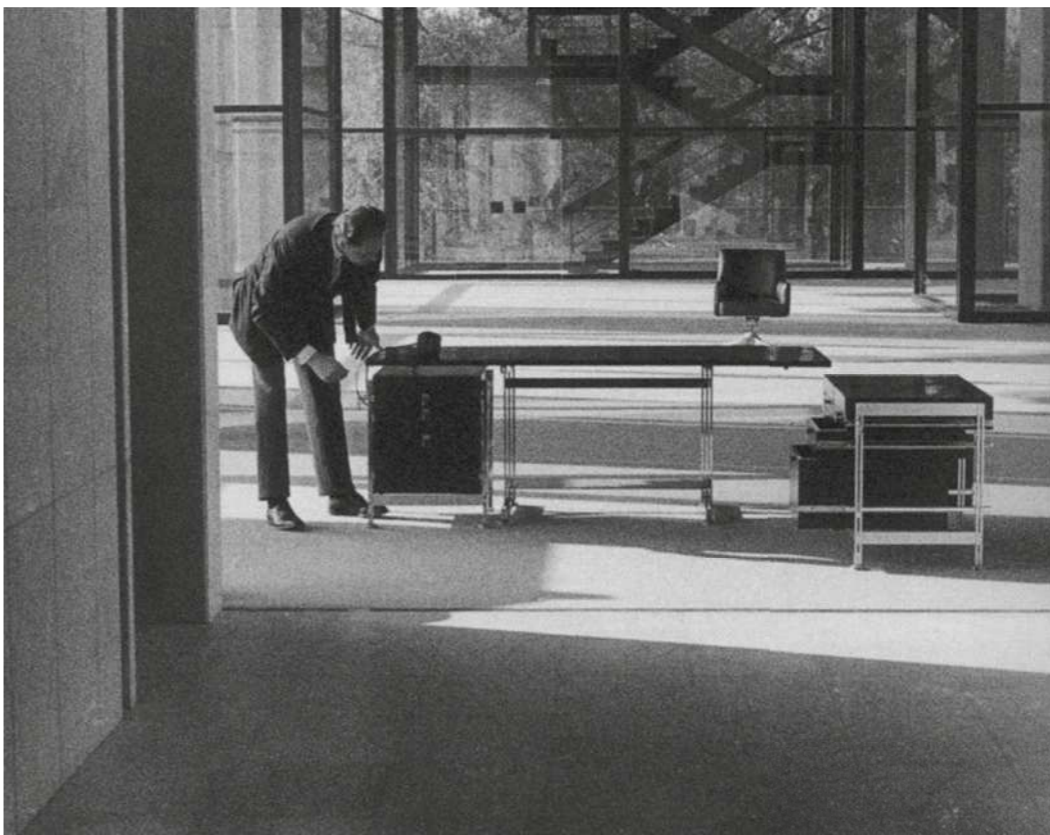


Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, © Wabbes Sofam, Brussels, 2017.

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A primary example: The chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.



J.J.W.
CEILING SURFACE



03

3x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.00kg | IP20 | 0.3


	CODE
	2051E8SO
	2051E8GO

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703



04

6x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.50kg IP20


CODE	
	2052E8S0
	2052E8G0

OPTIONAL

A60 LED E27 6W dim

CODE	
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703



042

6x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.10kg IP20


CODE	
	2056E8S0
	2056E8G0

OPTIONAL

A60 LED E27 6W dim

CODE	
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703



05

3x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.50kg | IP20 | 0-10V dim



	CODE
	2053E8S0
	2053E8G0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703

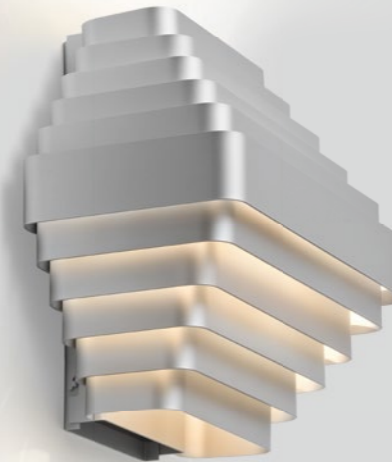

01

2x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

2.92kg | IP20 | 0-10V dim

CODE

2054E8S0

2054E8G0

OPTIONAL

A60 LED E27 6W dim

CODE

2200K | 315lm


9003E109

2700K | 500lm

9003E138

more lamps and specs on page 703





O2

A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

1.02kg | IP20 | 0.3°

	CODE
	2055E8S0
	2055E8G0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 703



**CEILING
RECESSED
SPOTLIGHTS**



DEEP BIJOU
p. 169



DEEP PETIT
p. 171



DEEP
p. 173



DEEPER
p. 175



**DEEP ADJUST
PETIT**
p. 177



DEEP ADJUST
p. 179



**DEEP ADJUST
TRIMLESS**
p. 185



**DEEP ADJUST
FORT**
p. 187




**DEEP ASYM
ADJUST**
p. 189



SPINEO
p. 191



RONY
p. 193



PIRRO
p. 195




NOP PETIT
p. 199



NOP
p. 201



RON
p. 203



PLANO PETIT
p. 207



PLANO
p. 209




**PLANO ADJUST
FORT**
p. 211




STRANGE PETIT
p. 213



STRANGE
p. 215



SNEAK TRIM
p. 217



SNEAK TRIMLESS
p. 219



PYRAMID
p. 221

**CEILING
SEMI-
RECESSED**



RUVI
p. 223



CENO 1.0
p. 225



CENO 2.0
p. 225



**BLIEK ROUND
PETIT**
p. 227



BLIEK ROUND
p. 229



SPYDER
p. 231



BLIEK SQUARE
p. 235


**CEILING
RECESSED
IP 44**



DEEP IP44
p. 245



DEEPER IP44
p. 247



RINI IP44
p. 251




LUNA ROUND IP44
p. 253



RINI SNEAK IP44
p. 255



LUNA SQUARE IP44
p. 257



PLANO IP44
p. 259



MIRBI IP44 1.0
p. 261



MIRBI IP44 2.0
p. 261



CITY IP44
p. 263

CEILING RECESSED

p. 167 – 263

HOW DEEP IS YOUR DEEP?

DEEP

FIX



BIJOU 1.0
LED




BIJOU 2.0
LED



PETIT 1.0
LED



1.0
LED | MR16 | PAR16
ZigBee



IP44 1.0
LED | MR16 | PAR16
ZigBee

DEEPER

FIX



1.0
LED | MR16 | PAR16
ZigBee




IP44 1.0
LED | MR16 | PAR16
ZigBee

DEEP and DEEPER are classic downlights. They shine their light beam straight down. Perfect for corridors and ceilings. But the recessed lights have so much more to offer. DEEP is available in five different versions and varying sizes. The IP44 variant is even waterproof. This means you can install a starry sky in the bathroom if you want. By the way, DEEPER is also available as an IP44 version and almost disappears in the ceiling. The 1.0 version of DEEP is even ZigBee capable, which is handy.


DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für Flure und Decken. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in fünf verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante sogar wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die 1.0-Version der DEEP ist sogar ZigBee-fähig.

DEEP ADJUST


ADJUSTABLE




PETIT 1.0
LED



1.0
LED | MR16 | PAR16
ZigBee



2.0
LED | PAR16
ZigBee




FORT 1.0
LED



TRIMLESS 1.0
LED | MR16 | PAR16

DEEP ASYM

ADJUSTABLE



1.0
LED | MR16 | PAR16

You want to put Picasso in the right light, create a fantastic ceiling pattern, or skilfully highlight surface structures on the wall? The DEEP family's swivelling spots are perfect for you. DEEP ADJUST is available in different versions and sizes. Some versions are even smart home-compatible. If you are looking for a luminaire that creates powerful wallwash effects, you should choose DEEP ASYM, which can be controlled via your mobile device.

Sie möchten den Picasso ins rechte Licht rücken, ein tolles Deckenbild kreieren oder Oberflächenstrukturen an der Wand gekonnt hervorheben? Dann sind die schwenkbaren Spots der DEEP-Familie die perfekte Lösung für Sie. Denn auch DEEP ADJUST ist in unterschiedlichen Versionen und Größen erhältlich. Und in einigen Ausführungen sogar Smart-Home-kompatibel. Sie suchen nach einer Leuchte, die wirkungsvolle Wallwash-Effekte erzeugt? Dann sollten Sie zu DEEP ASYM greifen, die ebenfalls via Handy oder Smartphone steuerbar ist.




HAVE A LOOK

weverducre.com/deep



DEEP BIJOU

CEILING RECESSED



1.0 LED

LED 4.5W | 250mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.065kg | IP20 | 0.3° | 30°

50-52 | 85 | 4-25

	CODE
	165161W_
	165161G_
	165161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

2.0 LED

2x LED 4.5W | 250mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated

0.15kg | IP20 | 0.3° | 30°

50-52x100-104 | 60 | 4-25

	CODE
	165261W_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x335	>90	3
3000K	2x350	>90	5

ALWAYS USE

power supply | 250mA

	CODE
10W dim	90226401


more power supplies on page 695

ALWAYS USE

power supply | 250mA (1 piece needed)

	CODE
15W dim	90226501

more power supplies on page 695



available from spring 2020

only for 2.0 LED version



DEEP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated


0.04kg IP20 0.3°C A 34°

68-70 50 4-23

CODE

White	153261W_
Grey	153261S_
Gold	153261G_
Black	153261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	570	>90	5
1800-2700K 15V	360	>95	9



fits into Kaiser ThermoX® 9320-11

ALWAYS USE

power supply | 350mA

CODE


10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695



DEEP

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
CRI >90

0.31kg IP20 0.3-1° 36°

90

wire springs 76-79 4-27

	CODE
	112161W_
	112161S_
	112161G_
	112161B_

blade springs 76-79 min 10

	CODE
	112161W_C
	112161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
4000K	610/830	>90	6
1800-2850K 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.25kg IP20 0.3-1°

90

wire springs 76-79 4-27

	CODE
	112110W0
	112110S0
	112110G0
	112110B0

blade springs 76-79 min 10

	CODE
	112110W0C
	112110B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.29kg IP20 0.3-1°

105

wire springs 76-79 4-27

	CODE
	112120W0
	112120S0
	112120G0
	112120B0

blade springs 76-79 min 10

	CODE
	112120W0C
	112120B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.




DEEPER

CEILING RECESSED



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg IP20 $\beta=0.3^\circ$ $\alpha=36^\circ$

95 76-79 4-38

	CODE
	152161W_
	152161S_
	152161G_
	152161Q_
	152161B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	16V 280/370	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg IP20 $\beta=0.3^\circ$

100 76-79 4-38

	CODE
	152110W0
	152110S0
	152110G0
	152110Q0
	152110B0


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	16V 280/370	>95	9

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg IP20 $\beta=0.3^\circ$

115 76-79 4-38

	CODE
	152120W0
	152120S0
	152120G0
	152120Q0
	152120B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	16V 280/370	>95	9

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



DEEP ADJUST petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.05kg IP20 0.3-D A 34°

68 35°/35° 355° TL 60

wire springs 68-70 4-23

	CODE
	153361W_
	153361G_
	153361Q_
	153361B_

blade springs 69-71 min 8

	CODE
	153361W_C
	153361B_C


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE




power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695



fits into Kaiser ThermoX® 9320-11



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 35°/35° 355° 90°

wire springs 86-89 4-23

CODE
112361W
112361S
112361G
112361Q
112361B

blade springs 86-89 min 6

CODE
112361W_C
112361B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
4000K	580/800	>90	6
1800-2850K 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 35°/35° 355° 90°

wire springs 86-89 4-23

CODE
112310W0
112310S0
112310G0
112310Q0
112310B0

blade springs 86-89 min 6

CODE
112310W0C
112310B0C

ALWAYS USE

power supply | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

DEEP ADJUST

CEILING RECESSED

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 35°/35° 355° 105°

wire springs 86-89 4-23

CODE
112320W0
112320S0
112320G0
112320Q0
112320B0

blade springs 86-89 min 6

CODE
112320W0C
112320B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701





For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.





DEEP ADJUST

CEILING RECESSED



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.61kg IP20 0.3-1D 36°


35°/35° 355° 90 86-89x172-178
4-23

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg IP20 0.3-1D 35°/35°

355° 105 4-30 86-89x172-178
4-23

	CODE
	112761W_
	112761B_

	CODE
	112720W0
	112720B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x570/770	>90	5
4000K	2x580/800	>90	6
1800-2850K	2x330/450	>95	9



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



DEEP ADJUST trimless

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 0.3° 36°

105-110 35°/35° 355° 95

	CODE
	112861W
	112861G
	112861B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
4000K	580/800 >90	6
1800-2850K	16V 330/450 >95	9

ALWAYS USE

plasterkit 12.5, 15, 20, 25

	CODE
	90017209

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 0.3°

105-110 35°/35° 355° 95

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE

plasterkit 12.5, 15, 20, 25

	CODE
	90017209

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 0.3°

105-110 35°/35° 355° 95

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

plasterkit 12.5, 15, 20, 25

	CODE
	90017209

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701


available from summer 2020



DENTAL PRACTICE COORNAERT (TANDARTSCENTRUM ATLAS) | MAISON JANE KORTRIJK | BELGIUM

DEEP ADJUST fort

CEILING RECESSED



1.0 LED

LED 25W | 700mA | 36V
 COB 3-step | excl. power supply
 aluminium powder coated

0.362kg IP20 0.3-1 34°

126-130 30°/30° 355° 130 4-30

	CODE
	112961W_
	112961B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2480 >90	5
4000K	2660 >90	6

ALWAYS USE

power supply | 700mA

	CODE
30W dim	90225702
30W DALI	90245702

more power supplies on page 697

available from summer 2020



DEEP ASYM adjust

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.25kg IP20 0.3° 36°

35°/35° 355° 100 87-88 4-25

CODE	
	112461W_
	112461S_
	112461G_
	112461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	460/610	>90	3
3000K	470/670	>90	5
1800-2850K	16V 290/390	>95	9

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.19kg IP20 0.3°

35°/35° 355° 90 87-88 4-25

CODE	
	112410W0
	112410S0
	112410G0
	112410B0

ALWAYS USE

power supply | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.23kg IP20 0.3°

35°/35° 355° 115 87-88 4-25

CODE	
	112420W0
	112420S0
	112420G0
	112420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



SPINEO

CEILING RECESSED



1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated

0.20kg IP20 0.3-1D 36°

28°/28° 355° 75

wire springs 79-83 4-16

	CODE
	160168W_
	160168B_

blade springs 79-83 min 4

	CODE
	160168W_C
	160168B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	500 >90	5



fits into Kaiser ThermoX® 9320-11



For wireless dimming compatible
with Amazon Echo Plus,
Philips Hue and Homee see
weverducre.com/smartlighting

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.14kg IP20 0.3-1D

35°/35° 355° 65

wire springs 79-83 4-16

	CODE
	160110W0
	160110B0

blade springs 79-83 min 4

	CODE
	160110WOC
	160110B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.18kg IP20 0.3-1D

35°/35° 355° 70

wire springs 79-83 4-16

	CODE
	160120W0
	160120B0

blade springs 79-83 min 4

	CODE
	160120WOC
	160120B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



RONY

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 35°/35° 36°

102-104 35°/35° 355° 90

4-25

	CODE
White	110161W
Black	110161B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
1800-2850K 16V	330/450	>95	9




For wireless dimming compatible
with Amazon Echo Plus,
Philips Hue and Homee see
weverducre.com/smartlighting

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max.12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.28kg IP20 35°/35°

102-104 35°/35° 355° 75

4-25

	CODE
White	110110W0
Black	110110B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.32kg IP20 35°/35°

102-104 35°/35° 355° 100

4-25

	CODE
White	110120W0
Black	110120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701




PIRRO

CEILING RECESSED



p. 291



1.0

LED 4.5W | 500mA | 9V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.09 kg IP20 3-0.3° 32°

50x50 85 4-25

	CODE
	150151E
	150151J
	150151K
	150151B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5

ALWAYS USE

	CODE
power supply 500mA	
7W dim	90224301
10W DALI	90244401

more power supplies on page 695

available from summer 2020



2.0

2x LED 4.5W | 500mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.155 kg IP20 3-0.3° 32°

93x50 60 4-25


	CODE
	150251E
	150251J
	150251K
	150251B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5

ALWAYS USE

	CODE
power supply 500mA (1 piece needed)	
15W dim	90224602
20W DALI	90244603

more power supplies on page 695



4.0

4x LED 4.5W | 500mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.28 kg IP20 3-0.3° 32°

181x50 60 4-25


	CODE
	150451E
	150451J
	150451K
	150451B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

ALWAYS USE

	CODE
power supply 500mA (1 piece needed)	
20W dim	90224602
20W DALI	90244602

more power supplies on page 695



6.0

6x LED 4.5W | 500mA | 2x27V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.40 kg IP20 3-0.3° 32°

269x50 60 4-25

	CODE
	150651E
	150651J
	150651K
	150651B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5

ALWAYS USE

	CODE
power supply 500mA (2 pieces needed)	
20W dim	90224602
20W DALI	90244602

more power supplies on page 695

HIDDEN CHAMPIONS

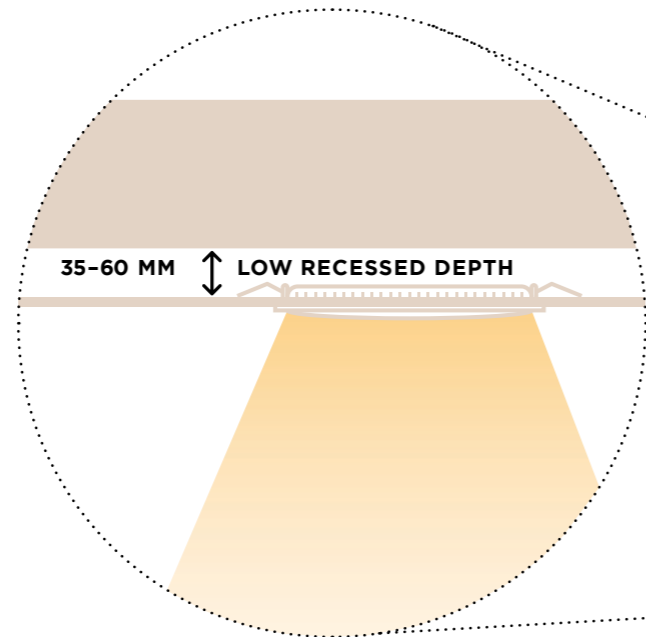

FLAT 'N' FANCY

Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. Nevertheless: There are some requirements you'll need to consider when mounting recessed luminaires. Especially low ceilings in modern living spaces or too little space in the suspended ceilings can be really tricky – and every centimetre counts. The solution: extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specifically designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

DEEP bijou 2.0	p. 169	60 MM
DEEP petit	p. 171	50 MM
DEEP ADJUST petit	p. 177	60 MM
PIRRO 2.0 4.0 6.0	p. 195	60 MM
NOP petit	p. 199	60 MM
CENO 2.0 3.0	p. 225	60 MM
BLIEK ROUND petit	p. 227	60 MM

RINI IP44	p. 251	60 MM
RINI SNEAK IP44	p. 255	46 MM
LUNA ROUND IP44	p. 253	50 MM
LUNA SQUARE IP44	p. 257	50 MM
MIRBI IP44	p. 261	50 MM
CITY IP44	p. 263	50 MM




PRIVATE RESIDENCE BELGIUM



NOP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
 COB 3-step | excl. power supply
 aluminium powder coated
 round cut out for mounting

0.18kg IP20 0.3m 34°

35°/35° 355° 60

wire springs 68-70 4-13

CODE

White	130561W_
Grey	130561S_
Black	130561B_

blade springs 70-76 min 4

CODE

White	130561W_C
Grey	130561S_C
Black	130561B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K 15V	350	>95	9



ALWAYS USE

power supply | 350mA





CODE

10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695



fits into Kaiser ThermoX® 9320-11



1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
round cut out for mounting

0.26kg IP20 $\pm 0.3^\circ$ $\Delta 36^\circ$

$\angle 30^\circ/30^\circ$ $\downarrow 355^\circ$ $\perp 95$

wire springs $\textcircled{1}$ 83-86 $\textcircled{2}$ 4-30

	CODE
	130468W_
	130468S_
	130468B_

blade springs $\textcircled{1}$ 83-92 $\textcircled{2}$ min 4

	CODE
	130468W_C
	130468S_C
	130468B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	500	>90	5

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut out for mounting

0.11kg IP20 $\pm 0.3^\circ$

$\angle 35^\circ/35^\circ$ $\perp 95$

wire springs $\textcircled{1}$ 83-86 $\textcircled{2}$ 4-30

	CODE
	130410W0
	130410S0
	130410B0

blade springs $\textcircled{1}$ 83-92 $\textcircled{2}$ min 4

	CODE
	130410W0C
	130410S0C
	130410B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut out for mounting

0.14kg IP20 $\pm 0.3^\circ$

$\angle 35^\circ/35^\circ$ $\perp 83$

wire springs $\textcircled{1}$ 83-86 $\textcircled{2}$ 4-30

	CODE
	130420W0
	130420S0
	130420B0

blade springs $\textcircled{1}$ 83-92 $\textcircled{2}$ min 4


	CODE
	130420W0C
	130420S0C
	130420B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



fits in round cut out






fits into Kaiser ThermoX® 9320-11

NOP
CEILING RECESSED



RON

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
round cut-out for mounting

0.36kg IP20 35° 36°

102-104 35°/35° 355° 90

4-25

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut-out for mounting

0.30kg IP20 35°

102-104 35°/35° 355° 75

4-25

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut-out for mounting

0.34kg IP20 35°

102-104 35°/35° 355° 100

4-25

CODE	
111161W	111161B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9

CODE	
111110W0	111110B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9

CODE	
111120W0	111120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

ALWAYS USE

power supply | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim





CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



RON

CEILING RECESSED



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.73kg IP20 36°

102x210 35°/35° 355° 90 4-25

3.0 LED

3x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

1.08kg IP20 36°

102x320 35°/35° 355° 90 4-25

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP20 36°

102x210 35°/35° 355° 100 4-25

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.02kg IP20 36°

102x320 35°/35° 355° 100 4-25

CODE
111261W_
111261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x570/770	>90	5
1800-2850K	2x330/450	>95	9

CODE
111361W_
111361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x530/710	>90	3
3000K	3x570/770	>90	5
1800-2850K	3x330/450	>95	9

CODE
111220W0
111220B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x570/770	>90	5
1800-2850K	2x330/450	>95	9

CODE
111320W0
111320B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x530/710	>90	3
3000K	3x570/770	>90	5
1800-2850K	3x330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701






For wireless dimming compatible
with Amazon Echo Plus,
Philips Hue and Homee see
weverducre.com/smartlighting



PLANO petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.08kg IP20 0.3-1° 34°

54x59 25°/25° 355° 65 2-22

	CODE
	162161W_
	162161Q_
	162161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695

2.0 LED

2x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.15kg IP20 0.3-1° 34°

54x110 25°/25° 355° 65 2-22

	CODE
	162261W_
	162261Q_
	162261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
1800-2700K 15V	2x360	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695

3.0 LED

3x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.22kg IP20 0.3-1° 34°

54x162 25°/25° 355° 65 2-22

	CODE
	162361W_
	162361Q_
	162361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
1800-2700K 15V	3x360	>95	9

ALWAYS USE

power supply | 350mA





	CODE
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695



PLANO

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.26kg IP20 36°

74x78 35°/35° 355° 95 2-18

CODE
118161W_
118161S_
118161Q_
118161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

	CODE
plasterkit	90017104

2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.48kg IP20 36°

74x148 35°/35° 355° 95 2-18

CODE
118261W_
118261S_
118261Q_
118261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/680	>90	3
3000K	2x550/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

	CODE
plasterkit	90017105

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.24kg IP20 36°

74x78 35°/35° 355° 120 2-18

CODE
118120W0
118120S0
118120Q0
118120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

OPTIONAL

	CODE
plasterkit	90017104

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.44kg IP20 36°

74x148 35°/35° 355° 120 2-18

CODE
118220W0
118220S0
118220Q0
118220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

OPTIONAL

	CODE
plasterkit	90017105




For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.



PLANO ADJUST fort

CEILING RECESSED



1.0 LED

LED 25W | 700mA | 36V
 COB 3-step | excl. power supply
 aluminium powder coated

0.381kg IP20 0.3-1 34°

111x111 30°/30° 355° 130 4-30

	CODE
	118961W_
	118961B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2480 >90	5
4000K	2660 >90	6

ALWAYS USE

power supply | 700mA

	CODE
30W dim	90225702
30W DALI	90245702




more power supplies on page 697

available from summer 2020



STRANGE petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.07kg IP20 31°

25°/25° 355° 65

CODE	
163161W_	163161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

plastic plasterkit 68x68 10 or 13

CODE	
90017200	90017201

aluminium plasterkit 64x64 7-7

90017202

power supply | 350mA

CODE	
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695

2.0 LED

2x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.13kg IP20 31°

25°/25° 355° 65

CODE	
163261W_	163261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
1800-2700K 15V	2x360	>95	9

ALWAYS USE

plastic plasterkit 68x119 10 or 13

CODE	
90017203	90017204

aluminium plasterkit 64x117 7-7

90017205

power supply | 350mA

CODE	
10W	90223401
10W dim	90223402
20W DALI	90243601

more power supplies on page 695

3.0 LED

3x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.19kg IP20 31°

25°/25° 355° 65

CODE	
163361W_	163361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
1800-2700K 15V	3x360	>95	9

ALWAYS USE

plastic plasterkit 68x171 10 or 13

CODE	
90017206	90017207

aluminium plasterkit 64x169 7-7

90017208

power supply | 350mA

CODE	
10W	90223401
10W dim	90223402
20W DALI	90243601


more power supplies on page 695



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.

STRANGE

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.43kg IP20 35°/35° 355° 95

35°/35° 355° 95

CODE

131161W_
131161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	330/450	>95	9

ALWAYS USE

plastic plasterkit 86x86 10 or 13

CODE

90017122
90017116


aluminium plasterkit 86x86 8-32

CODE

90017120

power supply 500mA	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.74kg IP20 35°/35° 355° 95

35°/35° 355° 95

CODE

131261W_
131261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/680	>90	3
3000K	2x550/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

plastic plasterkit 86x156 10 or 13

CODE

90017123
90017117


aluminium plasterkit 86x156 8-32

CODE

90017121

power supply 500mA	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 35°/35° 120

35°/35° 355° 120

CODE

131120W0
131120B0

ALWAYS USE

plastic plasterkit 86x86 10 or 13

CODE

90017122
90017116

aluminium plasterkit 86x86 8-32

CODE

90017120


OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE

power supply 500mA	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.70kg IP20 35°/35° 120

35°/35° 355° 120

CODE

131220W0
131220B0

ALWAYS USE

plastic plasterkit 86x156 10 or 13

CODE

90017123
90017117

aluminium plasterkit 86x156 8-32

CODE

90017121

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE



power supply 500mA	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



SNEAK TRIM

CEILING RECESSED

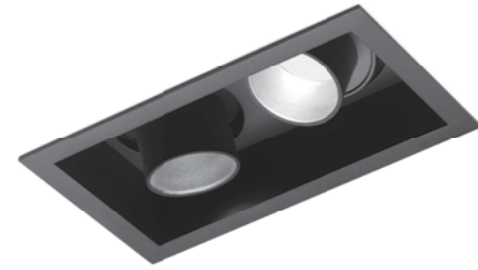


1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 \varnothing 0.3-D Δ 28°

74x78 \angle 35°/35° ψ 355° \perp 95 \approx 2-18



2.0 LED



2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 \varnothing 0.3-D Δ 28°


74x148 \angle 35°/35° ψ 355° \perp 95 \approx 2-18

CODE	
	155351W_
	155351B_
	155351K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400/530	>90	3
3000K	410/550	>90	5
1800-2850K	250/340	>95	9

CODE	
	155451W_
	155451B_
	155451K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400/530	>90	3
3000K	2x410/550	>90	5
1800-2850K	2x250/340	>95	9



ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602






350mA power supplies on page 694



PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

SNEAK TRIMLESS

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 0.3m A 28°

35°/35° 355° 95

	CODE
	155151W_
	155151B_
	155151K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400/530	>90	3
3000K	410/550	>90	5
1800-2850K	250/340	>95	9

ALWAYS USE

plastic plasterkit 86x86 10 or 13

	CODE
	90017122
	90017116

aluminium plasterkit 86x86 8-32

	90017120
--	----------

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 0.3m A 28°

35°/35° 355° 95

	CODE
	155251W_
	155251B_
	155251K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400/530	>90	3
3000K	2x410/550	>90	5
1800-2850K	2x250/340	>95	9

ALWAYS USE

plastic plasterkit 86x156 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 86x156 8-32

	90017121
--	----------

power supply | 500mA


	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



PYRAMID

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.28kg IP20 35°/35° 36°

102x102 35°/35° 355° 90 4-30

CODE

113161W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490/660	>90	3
3000K	530/720	>90	5
1800-2850K	310/410	>95	9

ALWAYS USE

power supply | 500mA

CODE

10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.50kg IP20 35°/35° 36°

102x172 35°/35° 355° 90 4-30

CODE

113261W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490/660	>90	3
3000K	2x530/720	>90	5
1800-2850K	2x310/410	>95	9


ALWAYS USE

power supply | 500mA

CODE

10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.26kg IP20 35°/35°

102x102 35°/35° 355° 115 4-30

CODE

113120W0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490/660	>90	3
3000K	2x530/720	>90	5
1800-2850K	2x310/410	>95	9


OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.46kg IP20 35°/35°

102x172 35°/35° 355° 115 4-30

CODE

113220W0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490/660	>90	3
3000K	2x530/720	>90	5
1800-2850K	2x310/410	>95	9

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9


more lamps and specs on page 701



For wireless dimming compatible
with Amazon Echo Plus, Philips Hue
and Homee see page 241.



RUVI
CEILING RECESSED



1.0

LED G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated

0.16kg IP20

54-57 90 4-30

CODE

1671E0B0

OPTIONAL

G95 LED E27 6W 400lm 2200K

CODE

gold mirror 9003E151

G95 LED E27 6W 500lm 2700K

CODE

gold mirror 9003E142
silver mirror 9003E149

G95 LED FILAMENT | E27 6W
450lm 2200K

CODE

clear 9003E111

more lamps and specs on page 703

available from summer 2020






CENO

CEILING RECESSED



p. 317 p. 347



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.12kg IP20 0.3° 35°

45-47 90° 350° 85 4-25

	CODE
	166161W_
	166161G_
	166161B_
	166161K_
	166161Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5
1800-2700K	320	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more power supplies on page 695

2.0 LED

2x LED 6W | 700mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated

0.26kg IP20 0.3° 35°

32x145 90° 350° 60 8-25

	CODE
	166261W_
	166261G_
	166261B_
	166261K_
	166261Q_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x470	>90	5

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
15W dim	90225502
20W DALI	90245602

more power supplies on page 697

3.0 LED

3x LED 6W | 700mA | 27V total
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP20 0.3° 35°

32x221 90° 350° 60 8-25

	CODE
	166461W_
	166461G_
	166461B_
	166461K_
	166461Q_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x440	>90	3
3000K	3x470	>90	5

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
20W dim	90225604
20W DALI	90245602

more power supplies on page 697





only for 2.0 + 3.0 LED version

available from summer 2020



BLIEK ROUND petit

CEILING RECESSED



1.0 LED

LED 6W | 700mA | 9V
COB 3-step | excl. power supply
aluminium powder coated

0.20kg IP20 0.3° A 35°

86-89 60° 355° 60 4-23

2.0 LED

2x LED 6W | 700mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated

0.40kg IP20 0.3° A 35°


87x176 60° 355° 60 4-23

	CODE
	164161W
	164161B
	164161K

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5

	CODE
	164261W
	164261B
	164261K

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x470 >90	5



available from summer 2020

ALWAYS USE

power supply | 700mA

	CODE
10W dim	90225402
10W DALI	90245401

more power supplies on page 697

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
15W dim	90225502
20W DALI	90245602

more power supplies on page 697





BLIEK ROUND

CEILING RECESSED



available from summer 2020



1.0 LED

LED 7/10W | 350/500mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.45kg IP20 36°

126-130 60° 355° 75 4-30

	CODE
	125161W
	125161B
	125161K

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/740	>90	3
3000K	490/790	>90	5
4000K	630/840	>90	6
1800-2850K 16V	300/410	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

more power supplies on page 695

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg IP20 36°

127 60° 350° 75 4-30

	CODE
	125120W0
	125120B0
	125120K0

ALWAYS USE

PAR16 LED GU10 7W | phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



SPYDER

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | steel powder coated

1.10kg IP20 0.3° 36°

146-148 85° 355° 90 4-33

	CODE
	124161W_
	124161B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490/660	>90	3
3000K	530/710	>90	5
1800-2850K 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium | steel powder coated

1.10kg IP20 0.3°

146-148 85° 355° 90 4-33


	CODE
	124120W_
	124120B_

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701





B





BLIEK SQUARE

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.47kg | IP20 | 36°

111x111 | 60° | 355 | 75 | 4-30

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.45kg | IP20 | 36°

111x111 | 60° | 355 | 75 | 4-30

	CODE
White	125261W_
Black	125261B_

	CODE
White	125220W0
Black	125220B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/740 >90	3
3000K	490/790 >90	5
4000K	630/840 >90	6
1800-2850K 16V	300/410 >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

more power supplies on page 695

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701


available from summer 2020

DIM THE LIGHTS

IT CAN BE SO EASY

Never have your words and your touch been any more illuminating than with our new collection of ZigBee-compatible luminaires. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen or a command to your voice-controlled device. Sounds easy? It is: Choose your favourite ZigBee products from our collection, connect them to your smart home system such as Amazon Echo Plus, Philips Hue or Homee and you're good to go. Whether you want bright lights for breakfast, candle light atmosphere for dinner, or anything in between – just kick up your feet and touch or talk to set your desired mood.

Noch nie war die Erleuchtung so einfach wie mit unserer ZigBee-kompatiblen Leuchtenkollektion – ein einfacher Klick oder eine Aufforderung an dein sprachgesteuertes Gerät genügen. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer ZigBee-Kollektion auswählen, mit dem Smart-Home-System wie Amazon Echo Plus, Philips Hue oder Homee verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

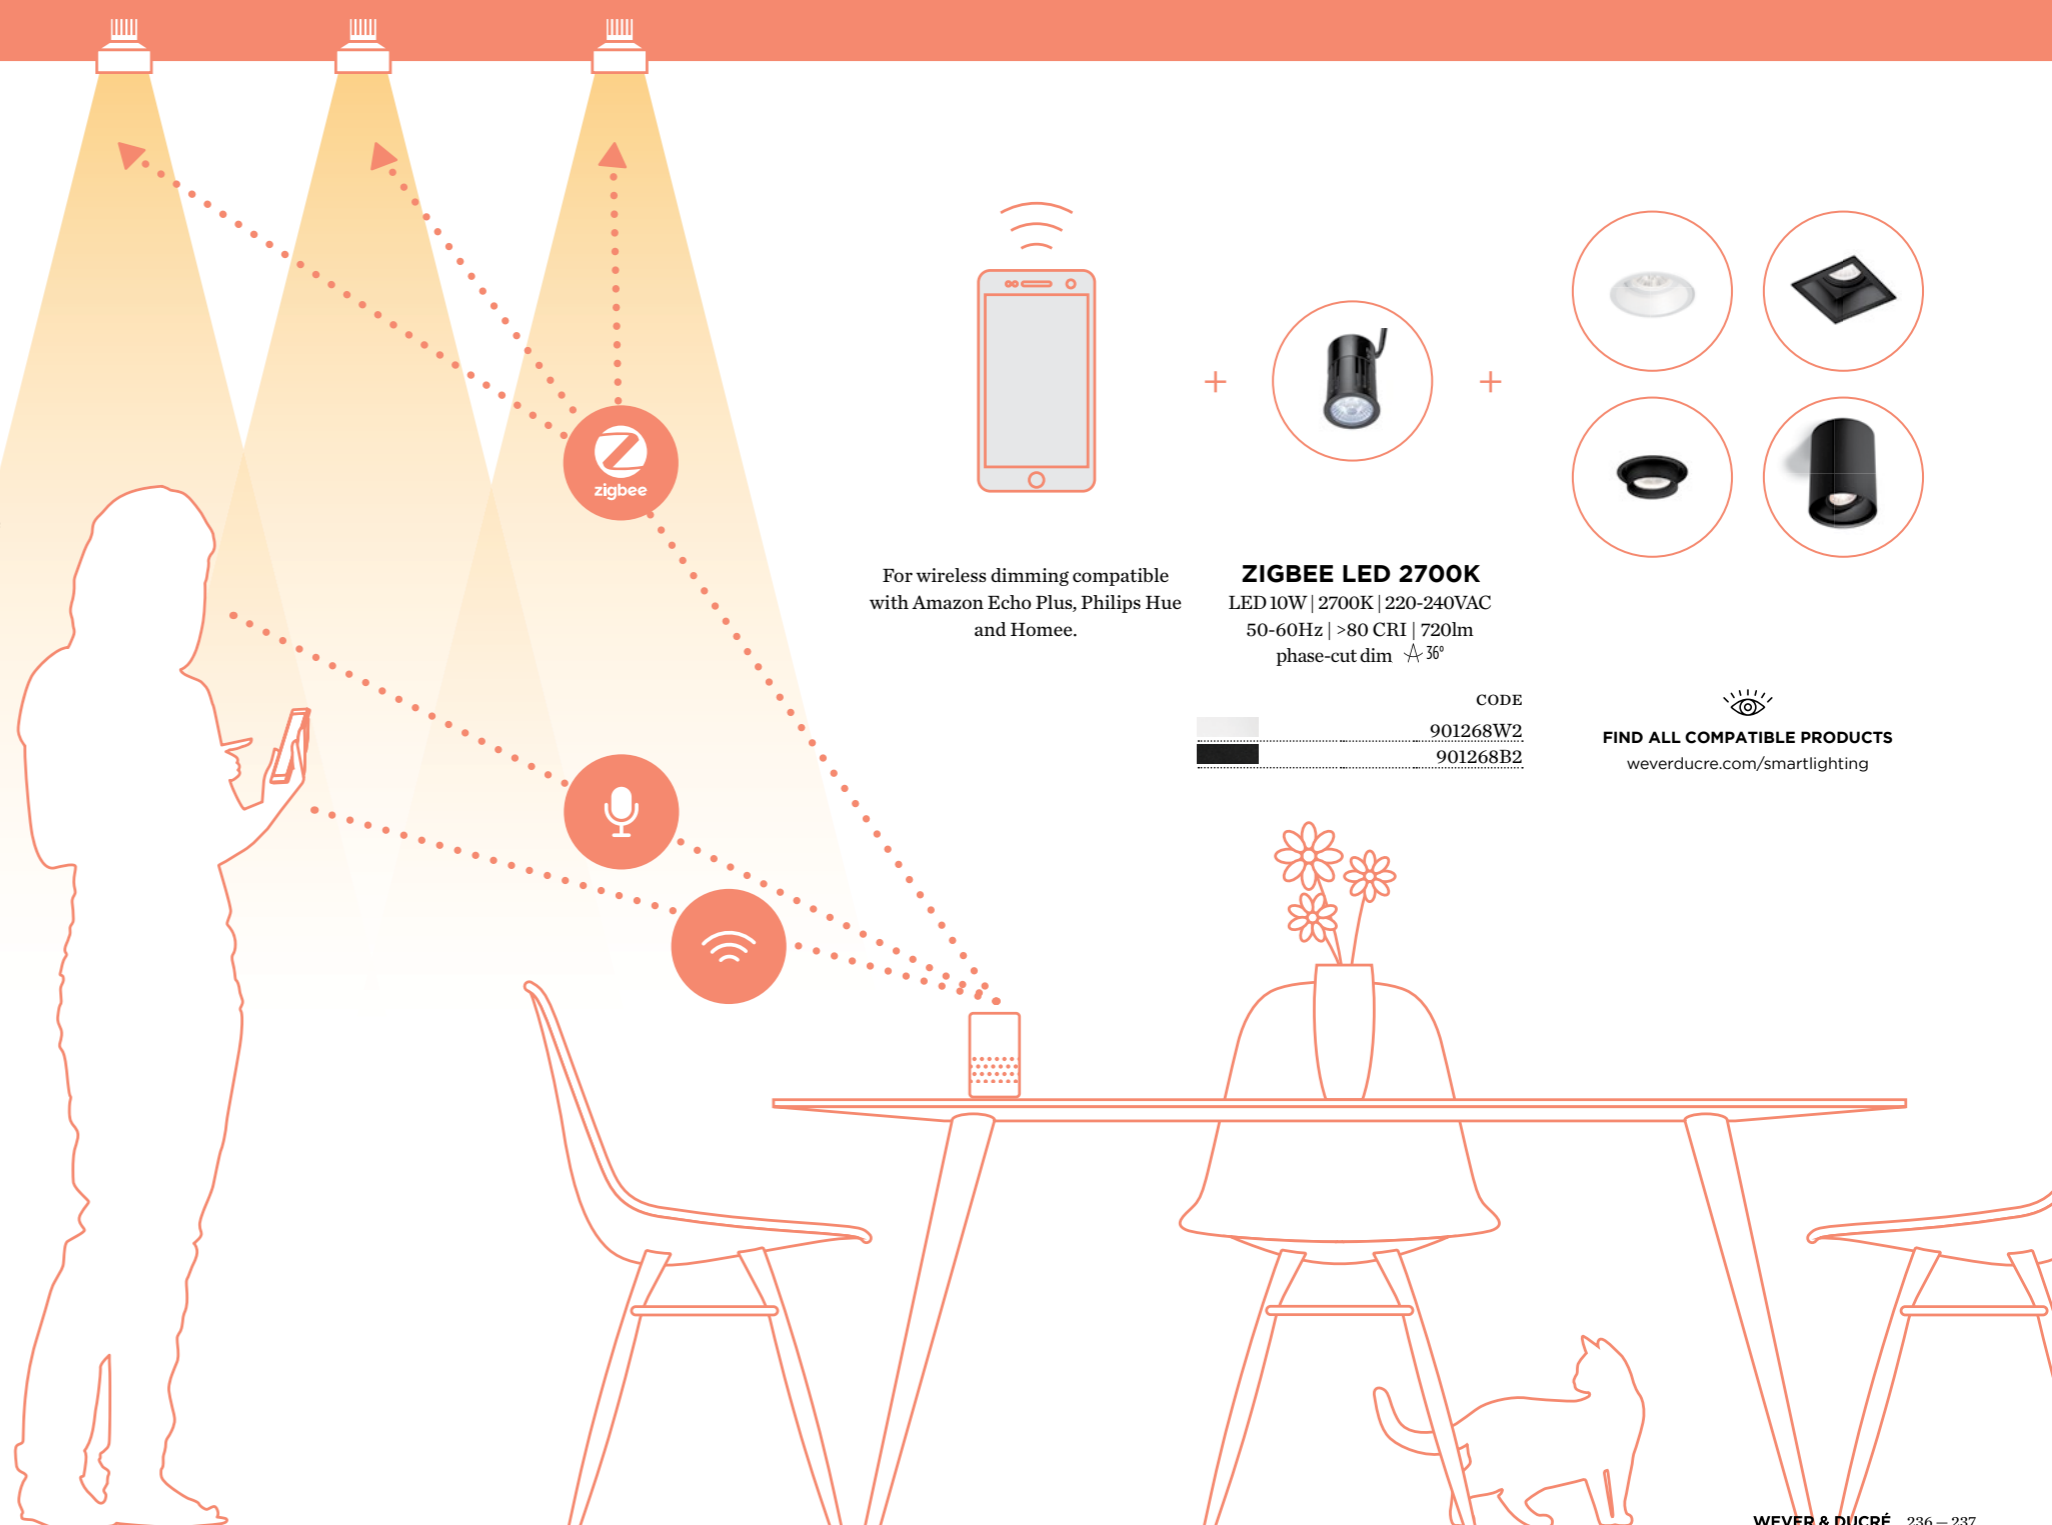

For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee.



ZIGBEE LED 2700K
LED 10W | 2700K | 220-240VAC
50-60Hz | >80 CRI | 720lm
phase-cut dim Δ 36°

	CODE
	901268W2
	901268B2


FIND ALL COMPATIBLE PRODUCTS
weverducre.com/smartlighting

SMART HOME LIGHTING

CEILING RECESSED

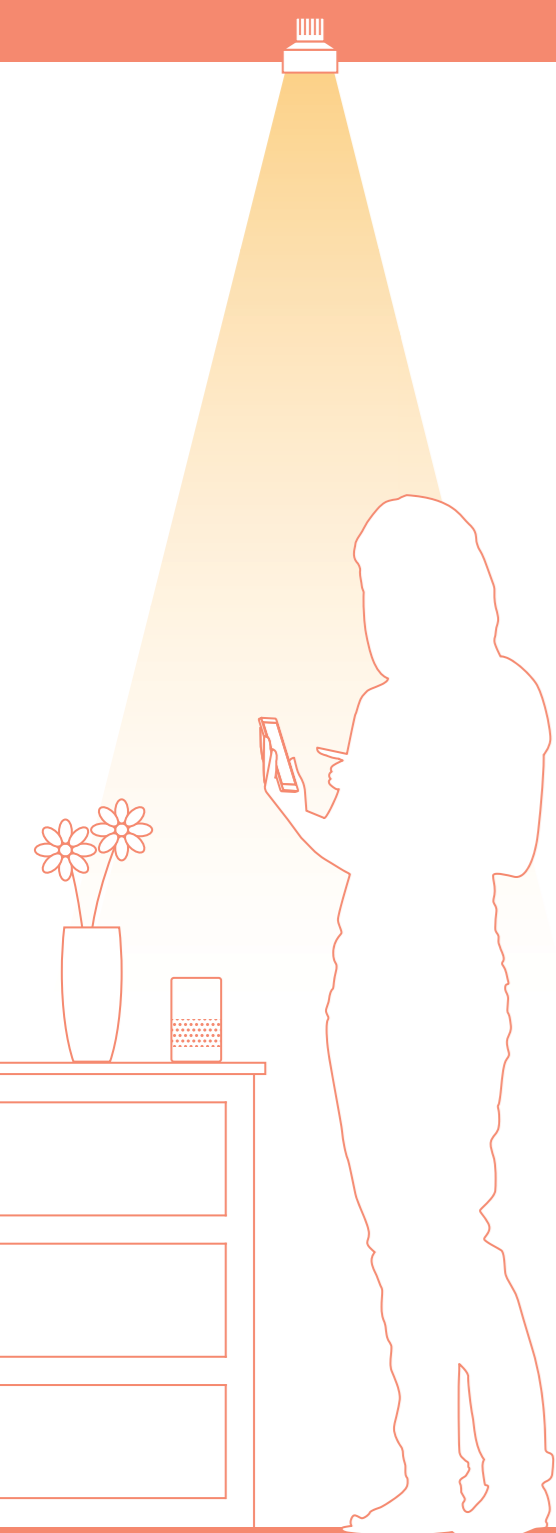

DEEP | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.31kg IP20 0.3° 36°

90


wire springs 76-79 4-27

CODE
11216ZW_
11216ZS_
11216ZG_
11216ZB_

blade springs 76-79 min 10

CODE
11216ZW_C
11216ZB_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



DEEP IP44 | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.32kg IP44 0.3° 36°

90


wire springs 86-89 4-25

CODE
11266ZW_
11266ZB_

blade springs 86-89 min 8

CODE
11266ZW_C
11266ZB_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



DEEPER | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated


0.17kg IP20 0.3° 36°

95

wire springs 76-79 4-38

CODE
15216ZW_
15216ZS_
15216ZG_
15216ZQ_
15216ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



DEEPER IP44 | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated
clear glass cover


0.17kg IP44 0.3° 36°

95

wire springs 76-79 4-38

CODE
15226ZW_
15226ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



DEEP ADJUST | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.23kg IP20 0.3° 36°

35°/35° 355° 90


wire springs 86-89 4-23

CODE
11236ZW_
11236ZS_
11236ZG_
11236ZQ_
11236ZB_

blade springs 89

CODE
11236ZW_C
11236ZB_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



DEEP ADJUST | 2.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.61kg IP20 0.3° 36°

35°/35° 355° 90



wire springs 87x176 4-23

CODE
11276ZW_
11276ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2

SMART HOME LIGHTING

CEILING RECESSED

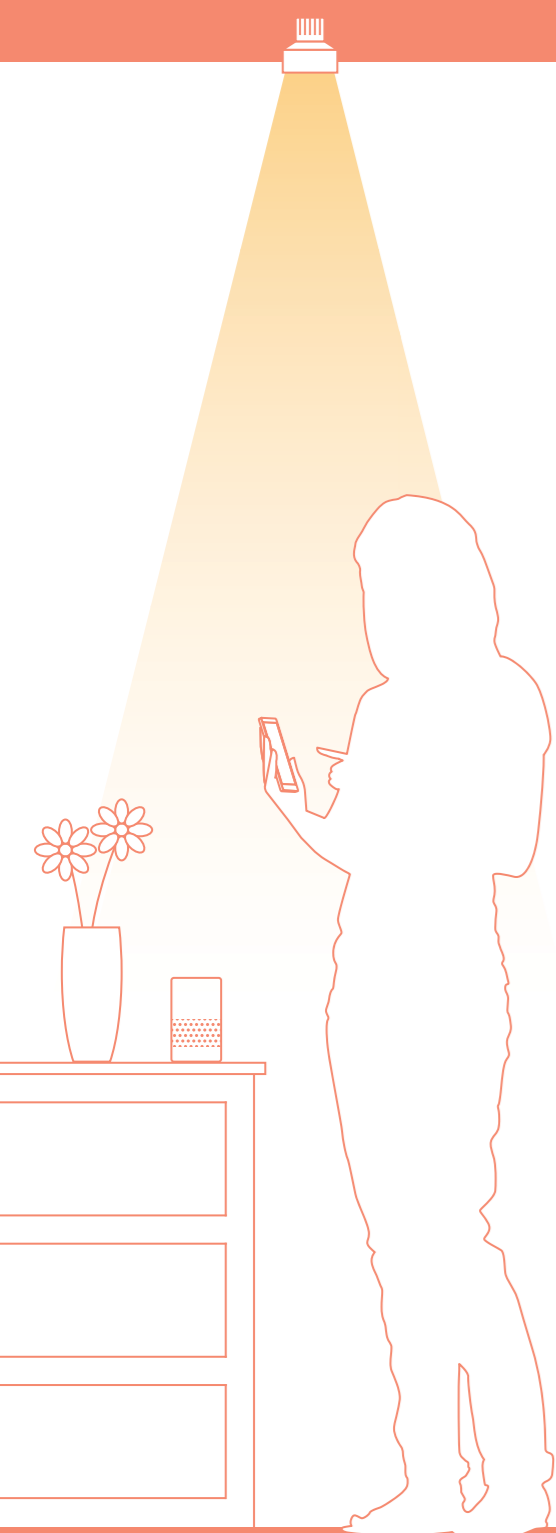

RON | 1.0 LED


LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated
round cut-out for mounting

0.36kg IP20 0.3° 36°
102x104 35°/35° 355° 90 4-25

wire springs

	CODE
	11116ZW_
	11116ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



PLANO | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated


0.26kg IP20 0.3° 36°
74x78 35°/35° 355° 95 2-18

	CODE
	11816ZW_
	11816ZS_
	11816ZG_
	11816ZQ_
	11816ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2

OPTIONAL

	CODE
plasterkit	90017104




PLANO IP44 | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.21kg IP44 0.3° 36°
74x78 90 4-30

	CODE
	11846ZW_
	11846ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2



STRANGE | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated


0.43kg IP20 0.3° 36°
86x86 35°/35° 355° 95

	CODE
	13116ZW_
	13116ZB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2

ALWAYS USE

	CODE
plastic plasterkit 10 or 13	
	90017122
	90017116
aluminium plasterkit 4-25	
	90017120



PYRAMID | 1.0 LED

LED 10W | 220-240VAC
50-60Hz | phase-cut dim + ZigBee
aluminium powder coated

0.28kg IP20 0.3° 36°
102x102 35°/35° 355° 90 4-30

	CODE
	11316ZW_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	720 >80	2

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door if you want, IP44 luminaires won't be in a hurry to leave. Luminaires with this certification are protected against splashes. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44-luminaires are available, including spots. Wever & Ducré can order surface or surface-mounted luminaires with this protection class.

DEEP IP44	p. 245
DEEPER IP44	p. 247
RINI IP44	p. 251
LUNA ROUND IP44	p. 253
RINI SNEAK IP44	p. 255
LUNA SQUARE IP44	p. 257
PLANO IP44	p. 259
MIRBI IP44	p. 261

WASSERSCHEU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Schließlich sind Leuchten mit dieser Zertifizierung optimal vor Spritzwasser geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44-Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich. So können bei Wever & Ducré auch Flächen- oder Aufbauleuchten mit dieser speziellen Schutzkennung geordert werden.




CITY IP44	p. 263
ROB IP44	p. 323
ROBY IP44	p. 325
TOWNA IP44	p. 327
LIGHTDROP IP44	p. 557
MIRBA IP44	p. 559
MIRBI LONG IP44	p. 561





DEEP IP44

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.32kg | IP44 | 0.3° | 36°

90

wire springs 86-89 4-25

CODE	
112661W_	112661B_

blade springs 86-89 min 8

CODE	
112661W_C	112661B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/640	>90	3
3000K	510/690	>90	5
1800-2850K	16V 300/400	>95	9

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.26kg | IP44 | 0.3° | 6°

90

wire springs 86-89 4-25

CODE	
112610W0	112610B0

blade springs 86-89 min 8

CODE	
112610W0C	112610B0C

ALWAYS USE

power supply | 12V

CODE	
10W dim	90221401
25W dim	90221701
10W dim	90221904

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.30kg | IP44 | 0.3° | 6°

105

wire springs 86-89 4-25

CODE	
112620W0	112620B0

blade springs 86-89 min 8

CODE	
112620W0C	112620B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701




For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.



DEEPER IP44

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg | IP44 | 36°

95 76-79 4-38

	CODE
	152261W_
	152261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440/600	>90	3
3000K	500/650	>90	5
1800-2850K 16V	280/370	>95	9




For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg | IP44

100 4-30 76-79 4-38

	CODE
	152210W0
	152210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg | IP44

115 4-30 76-79 4-38

	CODE
	152220W0
	152220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701





RINI IP44

CEILING RECESSED




1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.16 kg | IP44 | 0.3m | 36°

CODE
154161W_
154161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/650	>90	3
3000K	520/700	>90	5
1800-2850K 16V	300/400	>95	9



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.10 kg | IP44 | 0.3m

CODE
154110W0
154110B0

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.14 kg | IP44 | 0.3m


CODE
154120W0
154120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701






only for LED version



LUNA ROUND IP44

CEILING RECESSED



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal PMMA cover | polyamide

0.18kg | IP44 | 8-15

76-79 | 50 | 8-15

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.19kg | IP44 | 8-15

76-83 | 100 | min 4

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass cover | polyamide

0.24kg | IP44 | 8-15

76-83 | 120 | min 4

1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.28kg | IP44 | 8-15

76-83 | 100 | min 4

CODE
114388W
114388M
114388B


LIGHT COLOUR	LUMEN	CRI	CODE
3000K	350	>90	5

CODE
114381W
114381M
114381B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350/510	>90	3
3000K	410/550	>90	5
1800-2850K	16V 230/320	>95	9

CODE
114120W0
114120M0
114120B0

CODE
114110W0
114110M0
114110B0



only for LED HV version



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see weverducre.com/smartlighting

OPTIONAL

dimmer

for switch	CODE
90019017	
for din rail	90019018

more specs on page 699

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

plasterkit	CODE
90017101	

ALWAYS USE

power supply | 12V

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

plasterkit	CODE
90017101	

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699


OPTIONAL

plasterkit	CODE
90017101	



RINI SNEAK IP44

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.18 kg | IP44 | 36°

76-79 | 46 | 4-25

CODE	
154261W_	154261B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470/630	>90	3
3000K	500/680	>90	5
1800-2850K 16V	290/390	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.12 kg | IP44

76-79 | 55 | 4-25


CODE	
154210W0	154210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.16 kg | IP44

76-79 | 80 | 4-25


CODE	
154220W0	154220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701







only for LED version



LUNA SQUARE IP44

CEILING RECESSED



1.0 LED HV


LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal PMMA cover | polyamide

0.19kg | IP44 | 8-15

72x72 | 50 | 8-15

CODE
114488W
114488M
114488B

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	350	>90	5



only for LED HV version



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Home see weverducre.com/smartlighting

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.20kg | IP44 | 8-15

76x76 | 100 | 8-15

CODE
114481W
114481M
114481B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380/510	>90	3
3000K	410/550	>90	5
1800-2850K	16V 230/320	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

OPTIONAL

	CODE
plasterkit	90017101

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass cover | polyamide

0.26kg | IP44 | 8-15

76x76 | 120 | 8-15

CODE
114220W0
114220M0
114220B0

ALWAYS USE

power supply | 12V

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

	CODE
plasterkit	90017101

1.0 MR16

QR-CBC51 max. 10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.28kg | IP44 | 8-15

76x76 | 100 | 8-15

CODE
114210W0
114210M0
114210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699


OPTIONAL

	CODE
plasterkit	90017101



PLANO IP44

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.21kg IP44 3+0.3+D 36°

74x78 90 4-30

CODE
118461W_
118461B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5
1800-2850K 16V 300/390	>95		9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
15W dim	90224501
20W DALI	90244602

more power supplies on page 695



1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.15kg IP44 3+0.3+D 36°

74x78 115 4-30

CODE
118410W0
118410B0


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5
1800-2850K 16V 300/390	>95		9

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.19kg IP44 3+0.3+D 36°

74x78 115 4-30

CODE
118420W0
118420B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5
1800-2850K 16V 300/390	>95		9

ALWAYS USE

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.

available from spring 2020





MIRBI IP44

CEILING RECESSED



p. 329 p. 561



1.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.24kg | IP44 | 0.3 | 76-79 | 50 | 8-15

76-79 | 50 | 8-15

2.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.26kg | IP44 | 0.3 | 72x72 | 50 | 2-25

72x72 | 50 | 2-25

CODE
1145880

LIGHT COLOUR LUMEN | CRI CODE
3000K 440 | >90 5

CODE
1146880

LIGHT COLOUR LUMEN | CRI CODE
3000K 440 | >90 5

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018


more specs on page 699

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 699





CITY IP44

CEILING RECESSED




1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.64 kg IP44

202-205 50 4-22




2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.05 kg IP44

297-300 50 4-22




3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.70 kg IP44

387-390 50 4-22



		CODE
		115184W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	770 >90	3
3000K	840 >90	5

		CODE
		115284W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	1160 >90	3
3000K	1260 >90	5

		CODE
		115384W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	1730 >90	3
3000K	1850 >90	5

**CEILING
SURFACE
SPOTLIGHTS**



RAY
p. 267



BOX MINI
p. 271



BOX
p. 275



DOCUS
p. 281



HEXO
p. 285



PIRRO 4.1
p. 291



PIRRO 4.0
p. 293



SOLID PETIT 1.0
p. 295



SOLID PETIT 2.0
p. 295



SOLID
p. 299



SIRRA
p. 303



SIRRO
p. 305



SARA ON BASE
p. 309



SQUBE ON BASE
p. 311



CENO
p. 317



MICK
p. 319

**CEILING
SURFACE
IP-RATED**



ROB IP44
p. 323



ROBY IP44
p. 325



TOWNA IP44
p. 327



MIRBI IP44 1.0
p. 329




MIRBI IP44 2.0
p. 329

**CEILING
SURFACE
LUMINAIRES**



BEBOW
p. 331



VENN
p. 335

**DESIGNER
FAMILIES**



**ROOMOR
CEILING 1.0**
p. 33



**MIRRO
CEILING**
p. 53




**DRO
CEILING**
p. 65



**J.J.W.
SURFACE**
p. 151

CEILING SURFACE

p. 267 – 335

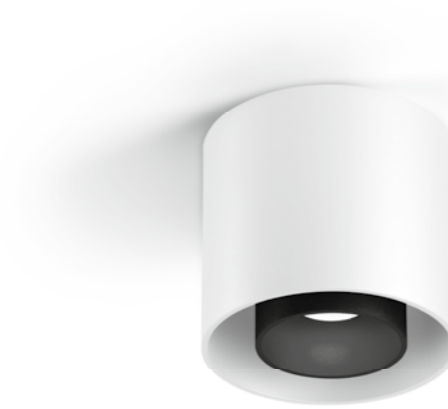




OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911041W1
	911041G1
	911041B1

RAY

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed







0.70kg IP20 0.3-1° 32°







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed







0.61kg IP20 0.3-1°

phase-cut dim

	CODE
	146764W_
	146764L_
	146764G_
	146764Q_
	146764P_
	146764B_

	CODE
	146720W0
	146720L0
	146720G0
	146720Q0
	146720P0
	146720B0

DALI dim

	CODE
	146765W_
	146765L_
	146765G_
	146765Q_
	146765P_
	146765B_

OPTIONAL

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1800-2850K available only for phase-cut dim

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701






BOX MINI

CEILING SURFACE



p. 503



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.16kg IP20 0.3

CODE	
258120W0	
258120G0	
258120Q0	
258120B0	

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try - not just in terms of colour. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start combining. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you. Use our online configurator to put it together exactly how you like it.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen. Und sie sich mit unserem Online-Konfigurator gleich selbst zusammenstellen.

SHADE COLOUR



INNER REFLECTOR COLOUR



INNER COVER COLOUR



HAVE A LOOK

weverducre.com/universalstars




BLACK
INNER COVER




WITHOUT
INSETS



GOLD
INNER COVER




WHITE
INNER REFLECTOR



BLACK
INNER REFLECTOR



GOLD
INNER REFLECTOR




inner reflector



inner cover

OPTIONAL

single inner reflector max. 10W
wet painted polycarbonate


	CODE
	911211W1
	911211G1
	911211B1

single inner cover max. 10W
aluminium powder coated brushed



	CODE
	911011W1
	911011G1
	911011B1

BOX

CEILING SURFACE



p. 393 p. 505 p. 579 p. 607



1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed







0.74kg IP20 0.3° 32°







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed







0.66kg IP20 0.3°

phase-cut dim

	CODE
	146164W_
	146164L_
	146164G_
	146164Q_
	146164P_
	146164B_

	CODE
	146120W0
	146120L0
	146120G0
	146120Q0
	146120P0
	146120B0

DALI dim

	CODE
	146165W_
	146165L_
	146165G_
	146165Q_
	146165P_
	146165B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1800-2850K available only for
phase-cut dim

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9




more lamps and specs on page 701





BOX

CEILING SURFACE

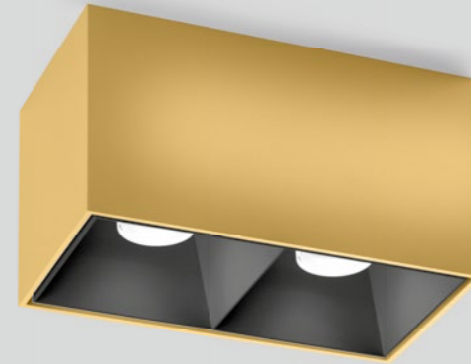

inner reflector



inner cover

OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

	CODE
	911251W1
	911251G1
	911251B1

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911011W1
	911011G1
	911011B1

2.0 LED

2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed | phase-cut dim

1.08kg IP20 $\pm 0.3^{\circ}$ $\pm 32^{\circ}$

	CODE
	146264W_
	146264L_
	146264G_
	146264Q_
	146264P_
	146264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x580 >80	2
3000K	2x610 >80	4
1800-2850K	2x390 >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.13kg IP20 $\pm 0.3^{\circ}$

	CODE
	146220W0
	146220L0
	146220G0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701





DOCUS

CEILING SURFACE



p. 395



1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.63kg | IP20 | $\approx 0.3 \cdot D$ | $\approx 32^\circ$

phase-cut dim

	CODE
	146364W_
	146364L_
	146364G_
	146364P_
	146364B_

DALI dim

	CODE
	146365W_
	146365L_
	146365G_
	146365P_
	146365B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1800-2850K available only for
phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.55kg | IP20 | $\approx 0.3 \cdot D$

	CODE
	146320W_
	146320L_
	146320G_
	146320P_
	146320B_

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701




inner
cover

OPTIONAL



single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021G1
	911021B1

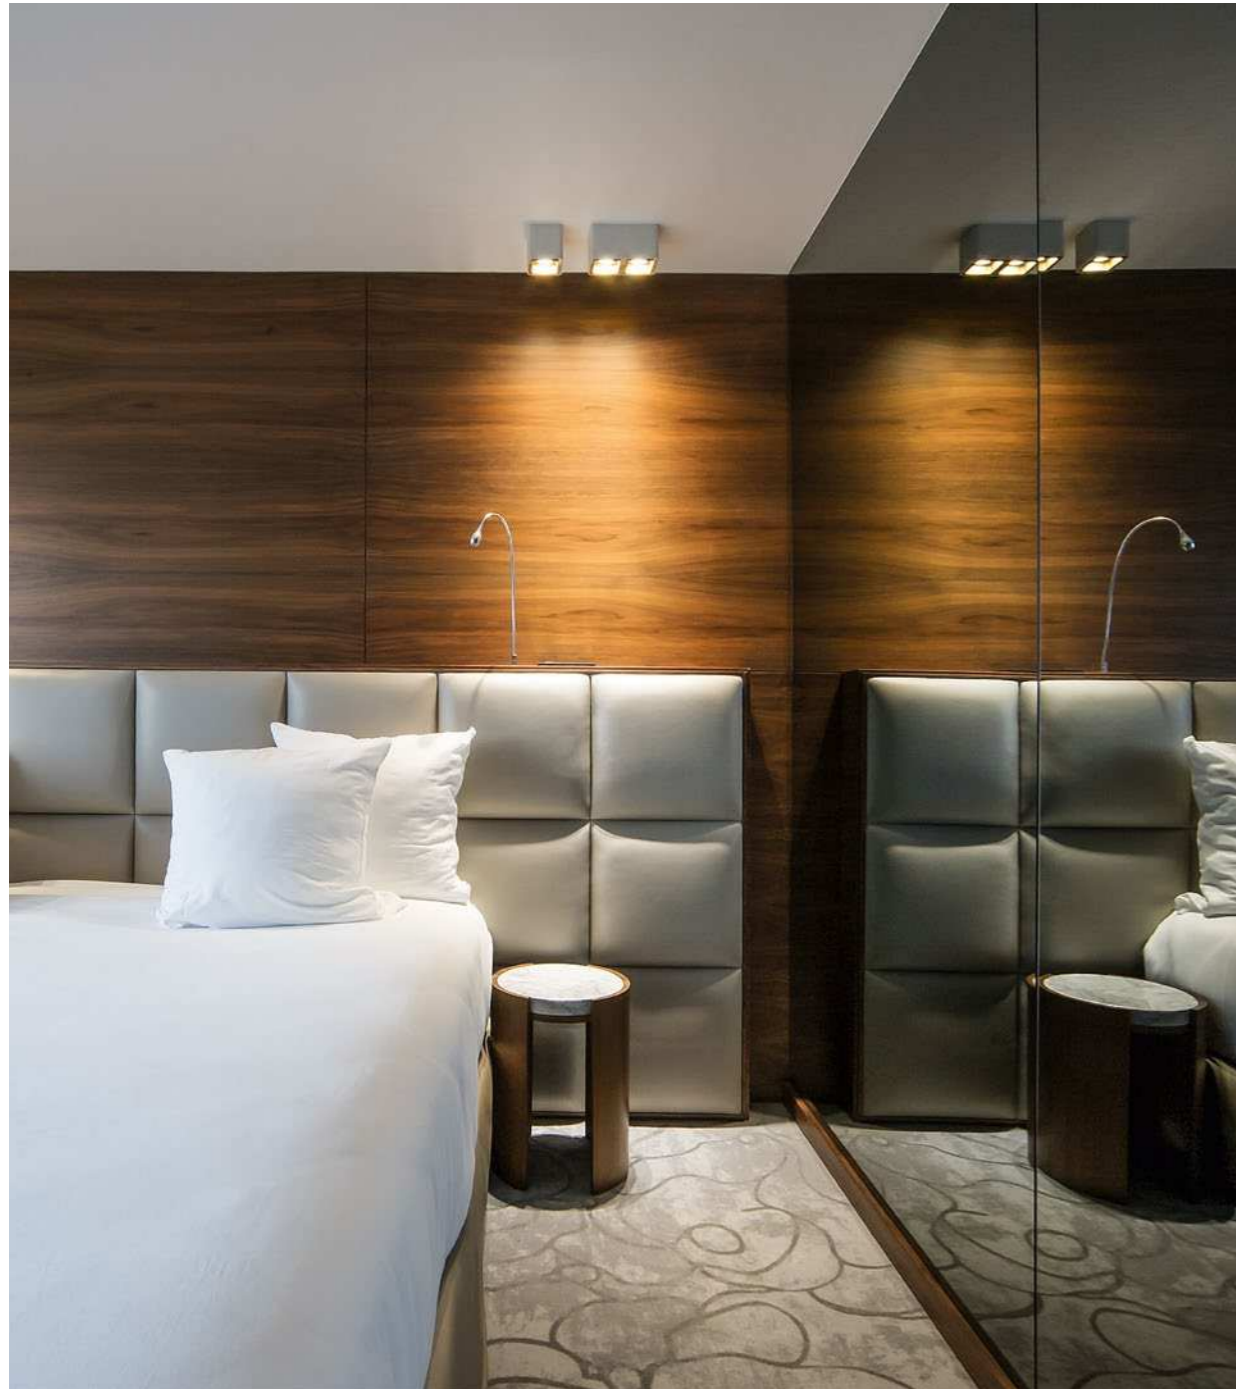

DOCUS

CEILING SURFACE



2.0 LED


2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed | phase-cut dim

0.92kg | IP20 | 0.3° | 32°

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed



1.01kg | IP20 | 0.3°








OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

	CODE
	146464W_
	146464L_
	146464G_
	146464P_
	146464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x580 >80	2
3000K	2x610 >80	4
1800-2850K	2x390 >95	9



	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



HEXO

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.72kg IP20 0.3+D 32°

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.63kg IP20 0.3+D

phase-cut dim

	CODE
	146564W_
	146564G_
	146564Q_
	146564P_
	146564B_

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

DALI dim

	CODE
	146565W_
	146565G_
	146565Q_
	146565P_
	146565B_



OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

1800-2850K available only for
phase-cut dim

more lamps and specs on page 701



HEXO CEILING SURFACE



2.0 LED

2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

1.13kg IP20 0.3° 32°

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed





1.19kg IP20 0.3°






OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

	CODE
	146664W_
	146664G_
	146664Q_
	146664P_
	146664B_

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x580 >80	2
3000K	2x610 >80	4
1800-2850K	2x390 >95	9

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701









PIRRO

CEILING SURFACE



p. 195



1.0

LED 4.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim aluminium
powder coated | PC lens and
reflector

0.20kg IP20 $\approx 0.3^\circ$ $\triangle 32^\circ$

	CODE
	151151E_
	151151J_
	151151K_
	151151B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	405 >90	5

4.1

4x LED 4.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC lens and
reflector

0.50kg IP20 $\approx 0.3^\circ$ $\triangle 32^\circ$

	CODE
	151461E_
	151461J_
	151461K_
	151461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x405 >90	5

available from summer 2020






PIRRO


CEILING SURFACE



p. 195



available from summer 2020




2.0

2x LED 4.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC reflector

0.30kg IP20 \varnothing 0.3° \varnothing 32°

CODE	
	151251E_
	151251J_
	151251K_
	151251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5




4.0

4x LED 4.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC reflector

0.48kg IP20 \varnothing 0.3° \varnothing 32°

CODE	
	151451E_
	151451J_
	151451K_
	151451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5



6.0

6x LED 4.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC reflector

0.80kg IP20 \varnothing 0.3° \varnothing 32°



CODE	
	151651E_
	151651J_
	151651K_
	151651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5



SOLID petit

CEILING SURFACE



1.0 LED

LED 4.5W | 220-240V | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated

0.32kg | IP20 | 0.3° | 32°

	CODE
	133564W_
	133564J_
	133564K_
	133564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

2.0 LED

LED 6W | 220-260V | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated

0.42kg | IP20 | 0.3° | 34°

25°/25° | 355°

	CODE
	133464W_
	133464J_
	133464K_
	133464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K	360	>95	9



available from summer 2020





SOLID

CEILING SURFACE



1.0 LED

LED 10W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
aluminium powder coated

0.65kg IP20 0.3-1° 36°

25°/25° 355°

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.61kg IP20 0.3-1°

25°/25° 355°

phase-cut dim

	CODE
	133264W_
	133264J_
	133264K_
	133264P_
	133264Q_
	133264B_

DALI dim

	CODE
	133365W_
	133365J_
	133365K_
	133365P_
	133365Q_
	133365B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	770	>90	5
1800-2850K	410	>95	9


	CODE
	133120W0
	133120J0
	133120K0
	133120P0
	133120Q0
	133120B0


OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

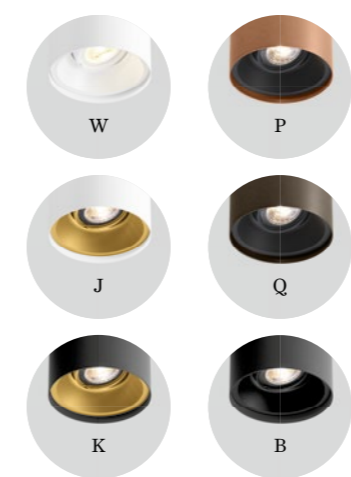


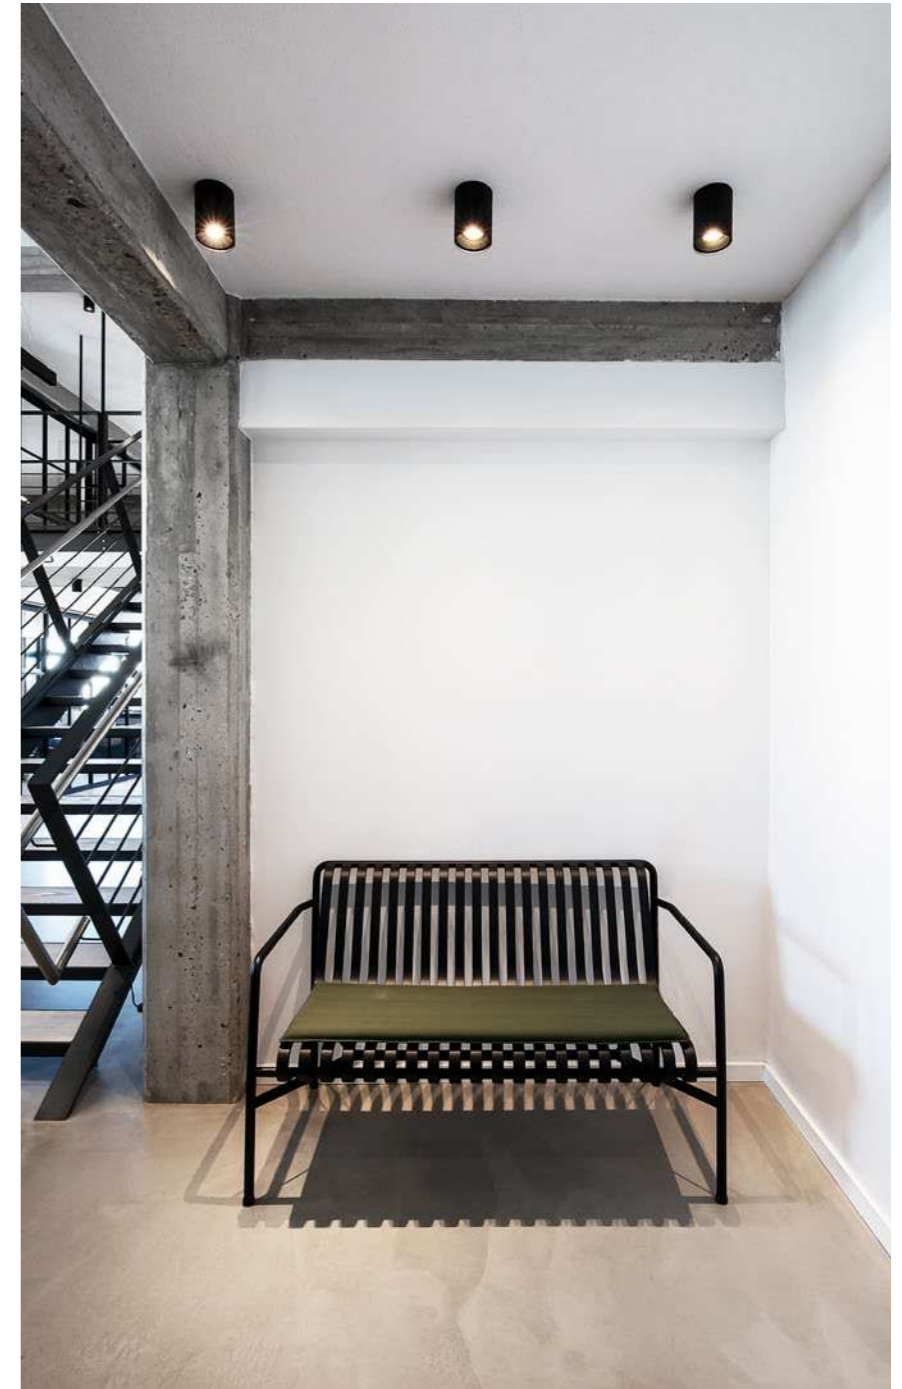



SIRRA

CEILING SURFACE



1.0 LED


LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.86kg | IP20 | 0.3° | 36°

35°/35° | 355°

	CODE
	134164W
	134164E
	134164B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	770 >90	5
1800-2850K	440 >95	9



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.74kg | IP20 | 0.3°

35°/35° | 355°

	CODE
	134120W0
	134120E0
	134120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



SIRRO

CEILING SURFACE



1.0 LED


LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.85kg | IP20 | 0.3° | A 36°

35°/35° | 355°

	CODE
	139164W
	139164E
	139164B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	770 >90	5
1800-2850K	440 >95	9



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.81kg | IP20 | 0.3°

35°/35° | 355°


	CODE
	139120W0
	139120E0
	139120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0 LED


2x LED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

1.57kg IP20 36°

35°/35° 355°

	CODE
	139264W
	139264E
	139264B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x710	>90	3
3000K	2x770	>90	5
1800-2850K	2x440	>95	9



3.0 LED


3x LED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

2.21kg IP20 36°

35°/35° 355°

	CODE
	139364W
	139364E
	139364B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x710	>90	3
3000K	3x770	>90	5
1800-2850K	3x440	>95	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 36°


35°/35° 355°

	CODE
	139220W0
	139220E0
	139220B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 36°

35°/35° 355°

	CODE
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9




more lamps and specs on page 701

SARA on base

CEILING SURFACE



p. 361 p. 523



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.23kg IP20

90°

	CODE
	157220W0
	157220G0
	157220B0
	157220K0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

1.1 PAR16

PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.32kg IP20

90° 330°

	CODE
	157420W0
	157420B0
	157420K0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.74kg IP20

90° 330°

	CODE
	157520W0
	157520B0
	157520K0


OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

available from summer 2020

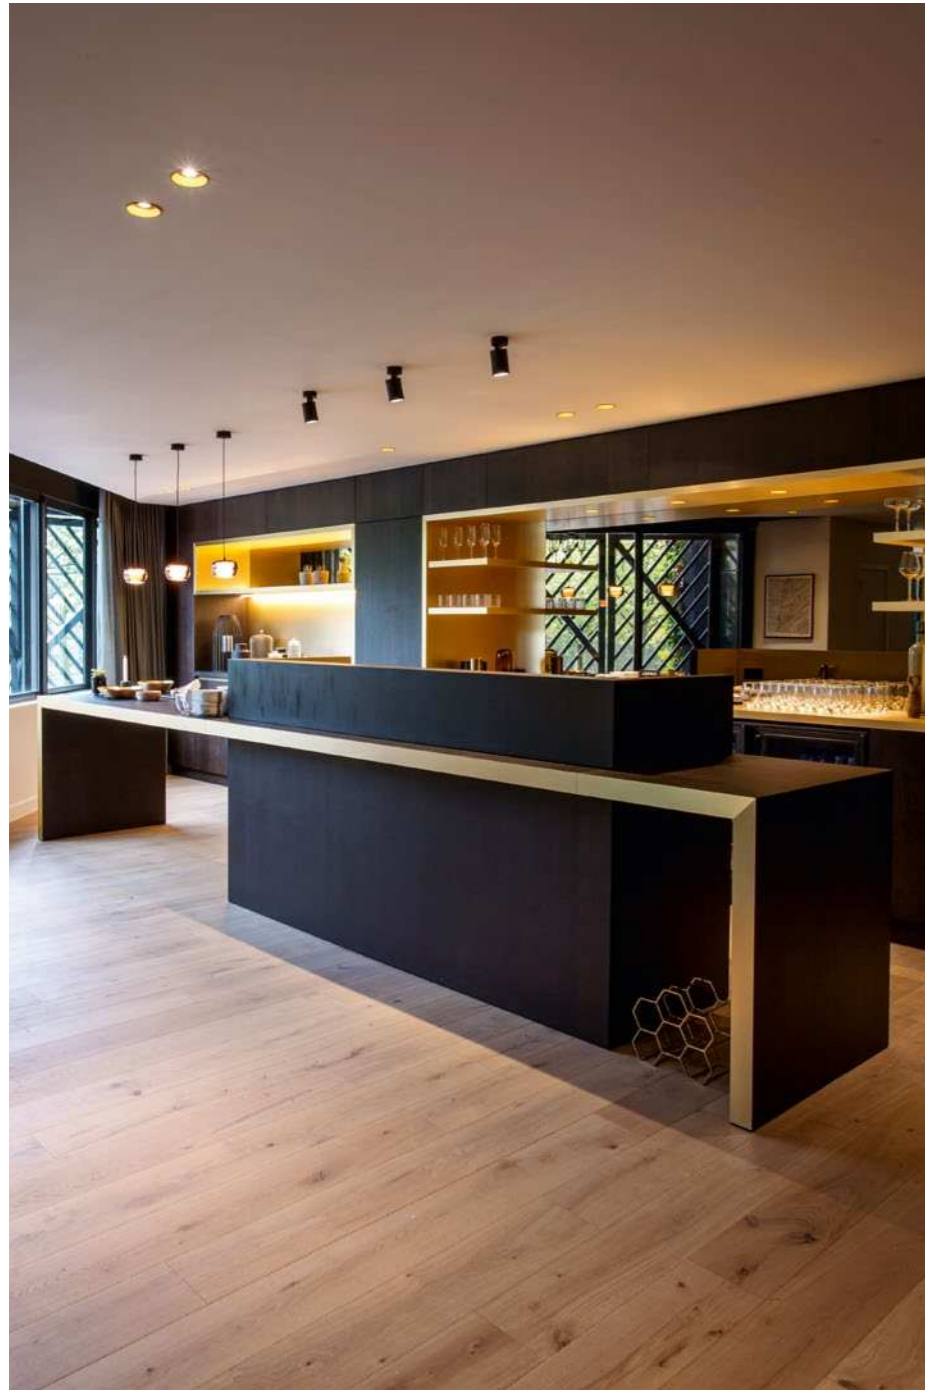


SQUBE on base

CEILING SURFACE



p. 363
p. 371



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.43kg IP20 0.3°D 39°

90°

	CODE
Light Colour	144264W
Light Colour	144264B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	2
3000K	380	>80	4
1800-3000K	350	>80	9

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699



2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.44kg IP20 0.3°D 32°

90°

	CODE
Light Colour	144464W
Light Colour	144464B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	711	>80	2
3000K	810	>80	4
1800-3000K	850	>80	9

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.43kg IP20 0.3°D

90°


	CODE
Light Colour	144220W0
Light Colour	144220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
Light Colour	901228W2
Light Colour	901228W4
Light Colour	901229S9


more lamps and specs on page 701

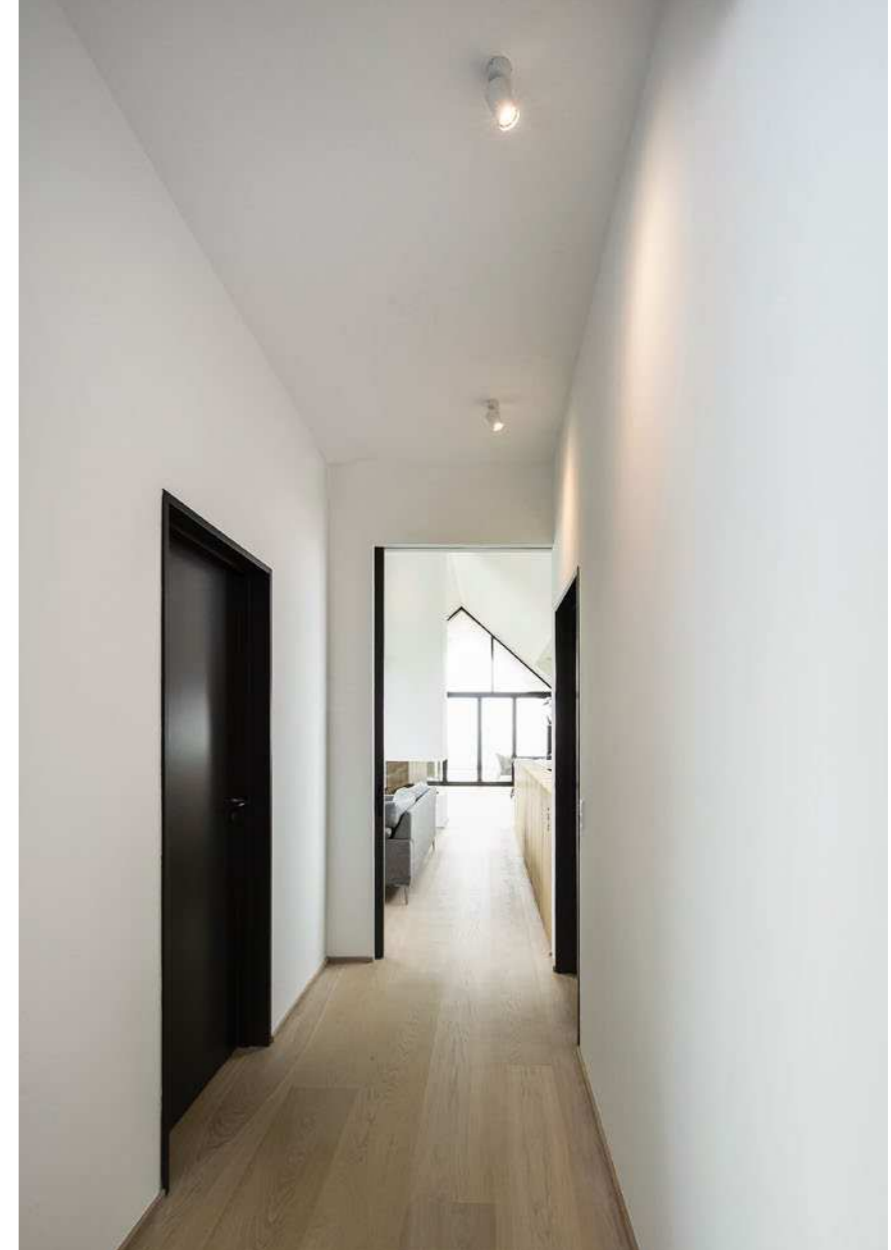



SQUBE on base

CEILING SURFACE




#2 PAR16

2x PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated

0.58kg IP20 0,3°

90° 355°



#3 PAR16

3x PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated

0.93kg IP20 0,3°

90° 355°

	CODE
	144520W0
	144520B0

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701




CENO

CEILING SURFACE



p. 225

p. 347



2.0


LED 2x LED 6W | 220-240VAC
50-60Hz | COB 3-step | phase-cut
dim | incl. PS | aluminium powder
coated

0.43kg IP20 3+D P A 35°

90° 350°

	CODE
	166361W_
	166361B_
	166361K_
	166361Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x470 >90	5



4.0

LED 4x LED 6W | 220-240VAC
50-60Hz | COB 3-step | phase-cut
dim | incl. PS | aluminium powder
coated

0.95kg IP20 3+D P A 35°

90° 350°

	CODE
	166761W_
	166761B_
	166761K_
	166761Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x440 >90	3
3000K	4x470 >90	5

available from summer 2020




MICK

CEILING SURFACE



p. 349 p. 527

DESIGNED BY
S&R CORNELISSEN




1.0

LED 7W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.35kg IP20 $\pm 0.3^\circ$


A 25° E 90° ψ 350°



J



K



2.0

2x LED 2x7W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.62kg IP20 $\pm 0.3^\circ$

A 25° E 90° ψ 350°

CODE

159154J_

159154K_

LIGHT COLOUR LUMEN | CRI CODE

2700K 370 | >90 3

3000K 390 | >90 5

CODE

159254J_

159254K_

LIGHT COLOUR LUMEN | CRI CODE

2700K 2x370 | >90 3

3000K 2x390 | >90 5

available from autumn 2020






ROB IP44

CEILING SURFACE



p. 583



1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.70kg IP44

CODE
701184W_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	860	>90	3
3000K	950	>90	5

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 699



2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.20kg IP44

CODE
701284W_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1250	>90	3
3000K	1380	>90	5

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 699



3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.90kg IP44

CODE
701384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1820	>90	3
3000K	1950	>90	5

OPTIONAL

dimmer


CODE
for switch 90019017
for din rail 90019018

more specs on page 699



ROBY IP44

CEILING SURFACE



1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover

1.00kg IP44 0.3

	CODE
	135184W
	135184B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	750 >90	3
3000K	820 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699



2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover

1.55kg IP44 0.3

	CODE
	135284W
	135284B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1130 >90	3
3000K	1250 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699



3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover

2.45kg IP44 0.3

	CODE
	135384W
	135384B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1680 >90	3
3000K	1800 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018


more specs on page 699

TOWNA IP44

CEILING SURFACE




FORUM 1



1.0

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover


1.15kg IP44 $\pm 0.3^\circ$



2.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover

1.90kg IP44 $\pm 0.3^\circ$



3.0

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover

3.00kg IP44 $\pm 0.3^\circ$



CODE
178184W
178184J
178184P
178184K
178184Z
178184B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	850	>90	5

OPTIONAL

dimmer

CODE
90019017
90019018

more specs on page 699

CODE
178284W
178284J
178284P
178284K
178284Z
178284B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1090	>90	3
3000K	1210	>90	5

OPTIONAL

dimmer

CODE
90019017
90019018

more specs on page 699

CODE
178384W
178384J
178384P
178384K
178384Z
178384B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1550	>90	3
3000K	1660	>90	5

OPTIONAL

dimmer

CODE
90019017
90019018

more specs on page 699






MIRBI IP44

CEILING SURFACE



p. 261

p. 561



1.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

0.4 kg IP44

	CODE
	175188W_
	175188E_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	440	>90	5

2.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
wet painted PA housing
clear + opal PMMA cover



0.5 kg IP44

	CODE
	175288W_
	175288E_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	440	>90	5



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM




1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg | IP20 | $\pm 0.3^\circ$ | P

3000K | >90 CRI | 1820lm

	CODE
	132184W5
	132184B5




2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg | IP20 | $\pm 0.3^\circ$ | P

3000K | >90 CRI | 2650lm

	CODE
	132164W5
	132164B5

BEBOW

CEILING SURFACE



p. 443



DESIGNED BY
S&R CORNELISSEN






BEBOW

CEILING SURFACE



p. 445

DESIGNED BY
S&R CORNELISSEN

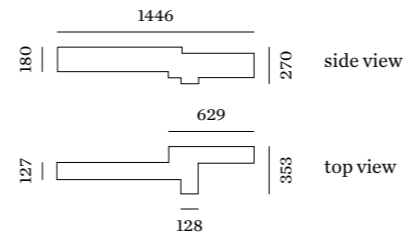

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

8.00kg | IP20 | 0.3

3000K | >90 CRI | 1910lm

	CODE
	132284W5
	132284B5


4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits
aluminium powder coated
opal PMMA cover

8.30kg | IP20 | 0.3

3000K | >90 CRI | 2350lm

	CODE
	132264W5
	132264B5

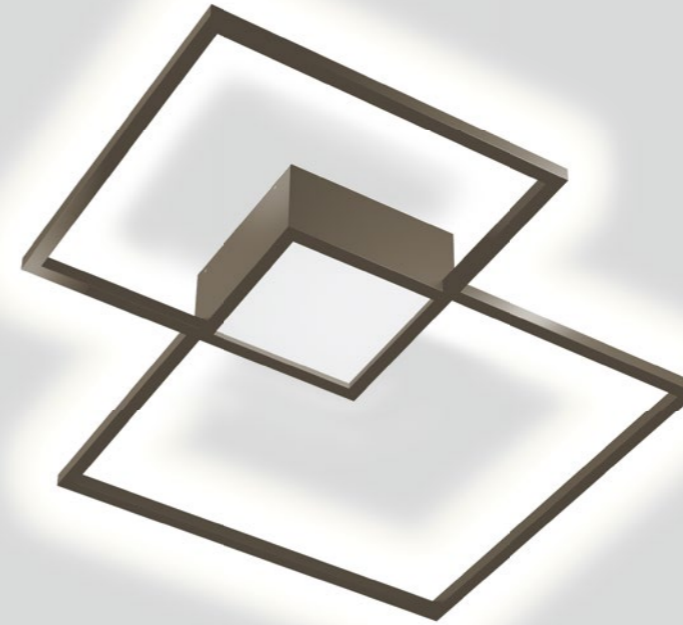

VENN

CEILING SURFACE





p. 441 p. 549



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY
S&R CORNELISSEN



1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover indirect light

2.50kg IP20 0.3-1 P

phase-cut dim

	CODE
	149184W
	149184Q
	149184B

DALI dim

	CODE
	149185W
	149185Q
	149185B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover dir./indir. light

2.50kg IP20 0.3-1 P

phase-cut dim

	CODE
	149284W
	149284Q
	149284B

DALI dim

	CODE
	149285W
	149285Q
	149285B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4

TRACKS | SYSTEMS

p. 339 – 381

STREX SYSTEM DALI

TRACKS ACCESSORIES
p. 341

CENO
p. 347

MICK
p. 349

DOTS LIGHT MODULE
p. 351

OPAL LIGHT MODULE
p. 351

ODREY
p. 353

STUBE
p. 355

SOLLI
p. 357

1-PHASE TRACK

TRACKS ACCESSORIES
p. 359

SARA ON TRACK
p. 361

SQUBE ON TRACK
p. 363

ODREY
p. 365

RAY
p. 367

HEXO
p. 367

3-PHASE TRACK

TRACKS ACCESSORIES
p. 369

SQUBE ON TRACK
p. 371

RAY
p. 377

HEXO
p. 377

ELLO SYSTEM










ELLO SYSTEM
p. 379

EVERYTHING ON TRACK

THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, fluorescent lamps and suspended luminaires are connected and controlled separately. The 48-volt system is new in the range. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted and moved with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.



Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung. Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Leuchtstofflampen und Hängeleuchten separat angeschlossen und gesteuert werden. Neu im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung – ganz einfach einsetzen und verschieben. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.

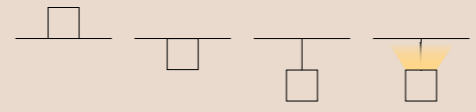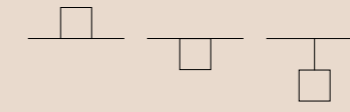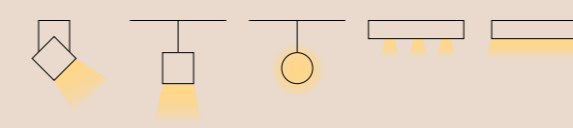	STREX TRACK SYSTEM 48V DALI p. 341	1-PHASE TRACK 220-240V p. 359	3-PHASE TRACK 220-240V p. 369
1 CHOOSE YOUR MOUNTING	 <p>recessed surface suspended suspended indirect light</p>	 <p>recessed surface suspended</p>	 <p>surface suspended</p>
2 COMBINE IT WITH DIFFERENT INSETS			
3 INSTALL IT IN YOUR FAVOURITE LAYOUT			

For more support and extended layout of track systems, please check our FAQ section on weverducre.com/faq

RECESSED EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m




RECESSED

track 48V | 15A | DALI

28-30 5-25 SELV

Length	CODE
1.0m	90014187
1.0m	90014188
2.0m	90014189
2.0m	90014190
3.0m	90014191
3.0m	90014192




A | MOUNTING BRACKET

recessed mounting bracket

CODE
90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed




F | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

Power	CODE
100W 48V	90218901
150W 48V	90218902


for DALI SELV solution on page 699



B | POWER FEED

48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²

CODE
90014153
90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

CODE
90014196
90014197

WIRELESS CONTROL

2400-2483.5MHz | adapter for DALI
wireless management

CODE
90014194
90014195






D | END CAP

CODE
90014149
90014150



SURFACE EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m

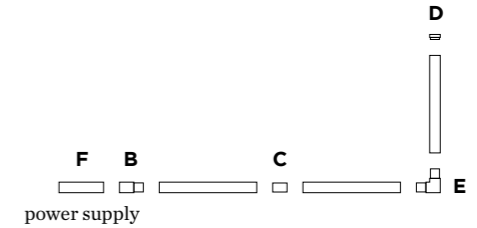


SURFACE

track 48V | 15A | DALI


SELV

	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186



F | POWER SUPPLY

profile converter box incl. PS
220-240VAC | 50-60Hz
48V | incl. DALI through wiring
for connection to power feed




	CODE
100W	90014166
100W	90014167
150W	90014170
150W	90014171

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W 48V	90218901
150W 48V	90218902

for DALI SELV solution on page 699



B | POWER FEED


48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



D | END CAP


	CODE
	90014147
	90014148



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector


	CODE
	90014196
	90014197



E | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
	90014199



WIRELESS CONTROL

2400-2483.5mHz | adapter for DALI
wireless management

	CODE
	90014194
	90014195





Download the App for Setup and
Control to start dimming.



SUSPENDED EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m

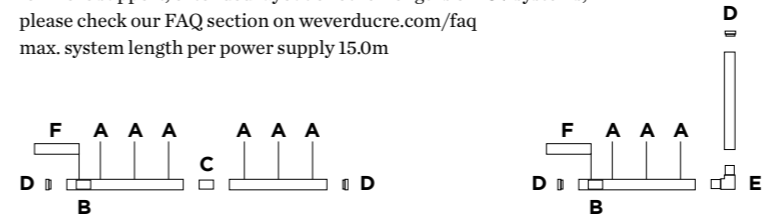


SUSPENDED

track 48V | 15A | DALI

SELV

	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186




SUSP. INDIRECT LIGHT

track 48V | 15A | DALI
with indirect light

SELV

	CODE
2.0m	900140W_
2.0m	900140B_
LIGHT COLOUR	LUMEN CRI
3000K 18.5W	1100 >90
3.0m	CODE
3.0m	900141W_
3.0m	900141B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K 29W	1650 >90	5




A | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


	CODE
1.5m	90014160
3.0m	90014161

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed




F | POWER SUPPLY

ceiling base incl. power supply
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to end feed



	CODE
100W	90014168
100W	90014169
150W	90014172
150W	90014173


for DALI SELV solution on page 699



B | POWER FEED

48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



WIRELESS CONTROL


2400-2483.5mHz | adapter for DALI
wireless management

	CODE
	90014194
	90014195



D | END CAP

	CODE
	90014147
	90014148



E | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right




	CODE
	90014198
	90014199





CENO on track

48V SYSTEM



1.0

LED 6W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.11kg IP20 0.3-1° 35°
90° 355°

non dim

	CODE
	166562W_
	166562B_
	166562K_

DALI dim

	CODE
	166565W_
	166565B_
	166565K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5

dim options on page 341

2.0

2x LED 6W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.22kg IP20 0.3-1° 35°
90° 355°

non dim

	CODE
	166662W_
	166662B_
	166662K_

DALI dim

	CODE
	166665W_
	166665B_
	166665K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x470	>90	5

dim options on page 341

available from autumn 2020



MICK on track



48V SYSTEM



p. 319

p. 527

DESIGNED BY
S&R CORNELISSEN



1.0

LED 6W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.22kg IP20 0.3-D P A 25°

90° 355°

non dim

	CODE
	159462J_
	159462K_

DALI dim

	CODE
	159465J_
	159465K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

dim options on page 341

2.0

2x LED 6W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.44kg IP20 0.3-D P A 25°

90° 355°

non dim

	CODE
	159562J_
	159562K_

DALI dim

	CODE
	159565J_
	159565K_




LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x350	>90	3
3000K	2x370	>90	5

dim options on page 341

available from autumn 2020

STREX MODULE

48V SYSTEM



1.0 DOT

LED 10W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.11kg IP20 \varnothing 0.3 P \angle 26°

non dim

	CODE
	171142W
	171142B

DALI dim

	CODE
	171145W
	171145B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	1000	>90	5

dim options on page 341

1.0 OPAL

LED 8W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.16kg IP20 \varnothing 0.3 P

non dim

	CODE
	171182W
	171182B

DALI dim

	CODE
	171185W
	171185B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	600	>90	5

dim options on page 341

2.0 OPAL

LED 16W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.32kg IP20 \varnothing 0.3 P

non dim

	CODE
	171282W
	171282B

DALI dim

	CODE
	171285W
	171285B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1080	>90	3
3000K	1200	>90	5

dim options on page 341



available from autumn 2020

ODREY on track


48V SYSTEM



p. 387 p. 491



available from autumn 2020



1.0

LED 5W | 48V | COB 3-step
aluminium wet painted
PC adapter

0.25kg IP20 0.3-1° 32°

DALI dim

	CODE
	257165G_
	257165B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

dim options on page 341

ALWAYS USE

shade 1.0 - 8.0 in gold


	CODE
	911421G1
	911422G1
	911423G1
	911424G1
	911425G1
	911426G1
	911427G1
	911428G1

shade 1.0 - 8.0 in black

	CODE
	911421B1
	911422B1
	911423B1
	911424B1
	911425B1
	911426B1
	911427B1
	911428B1

STUBE on track

48V SYSTEM

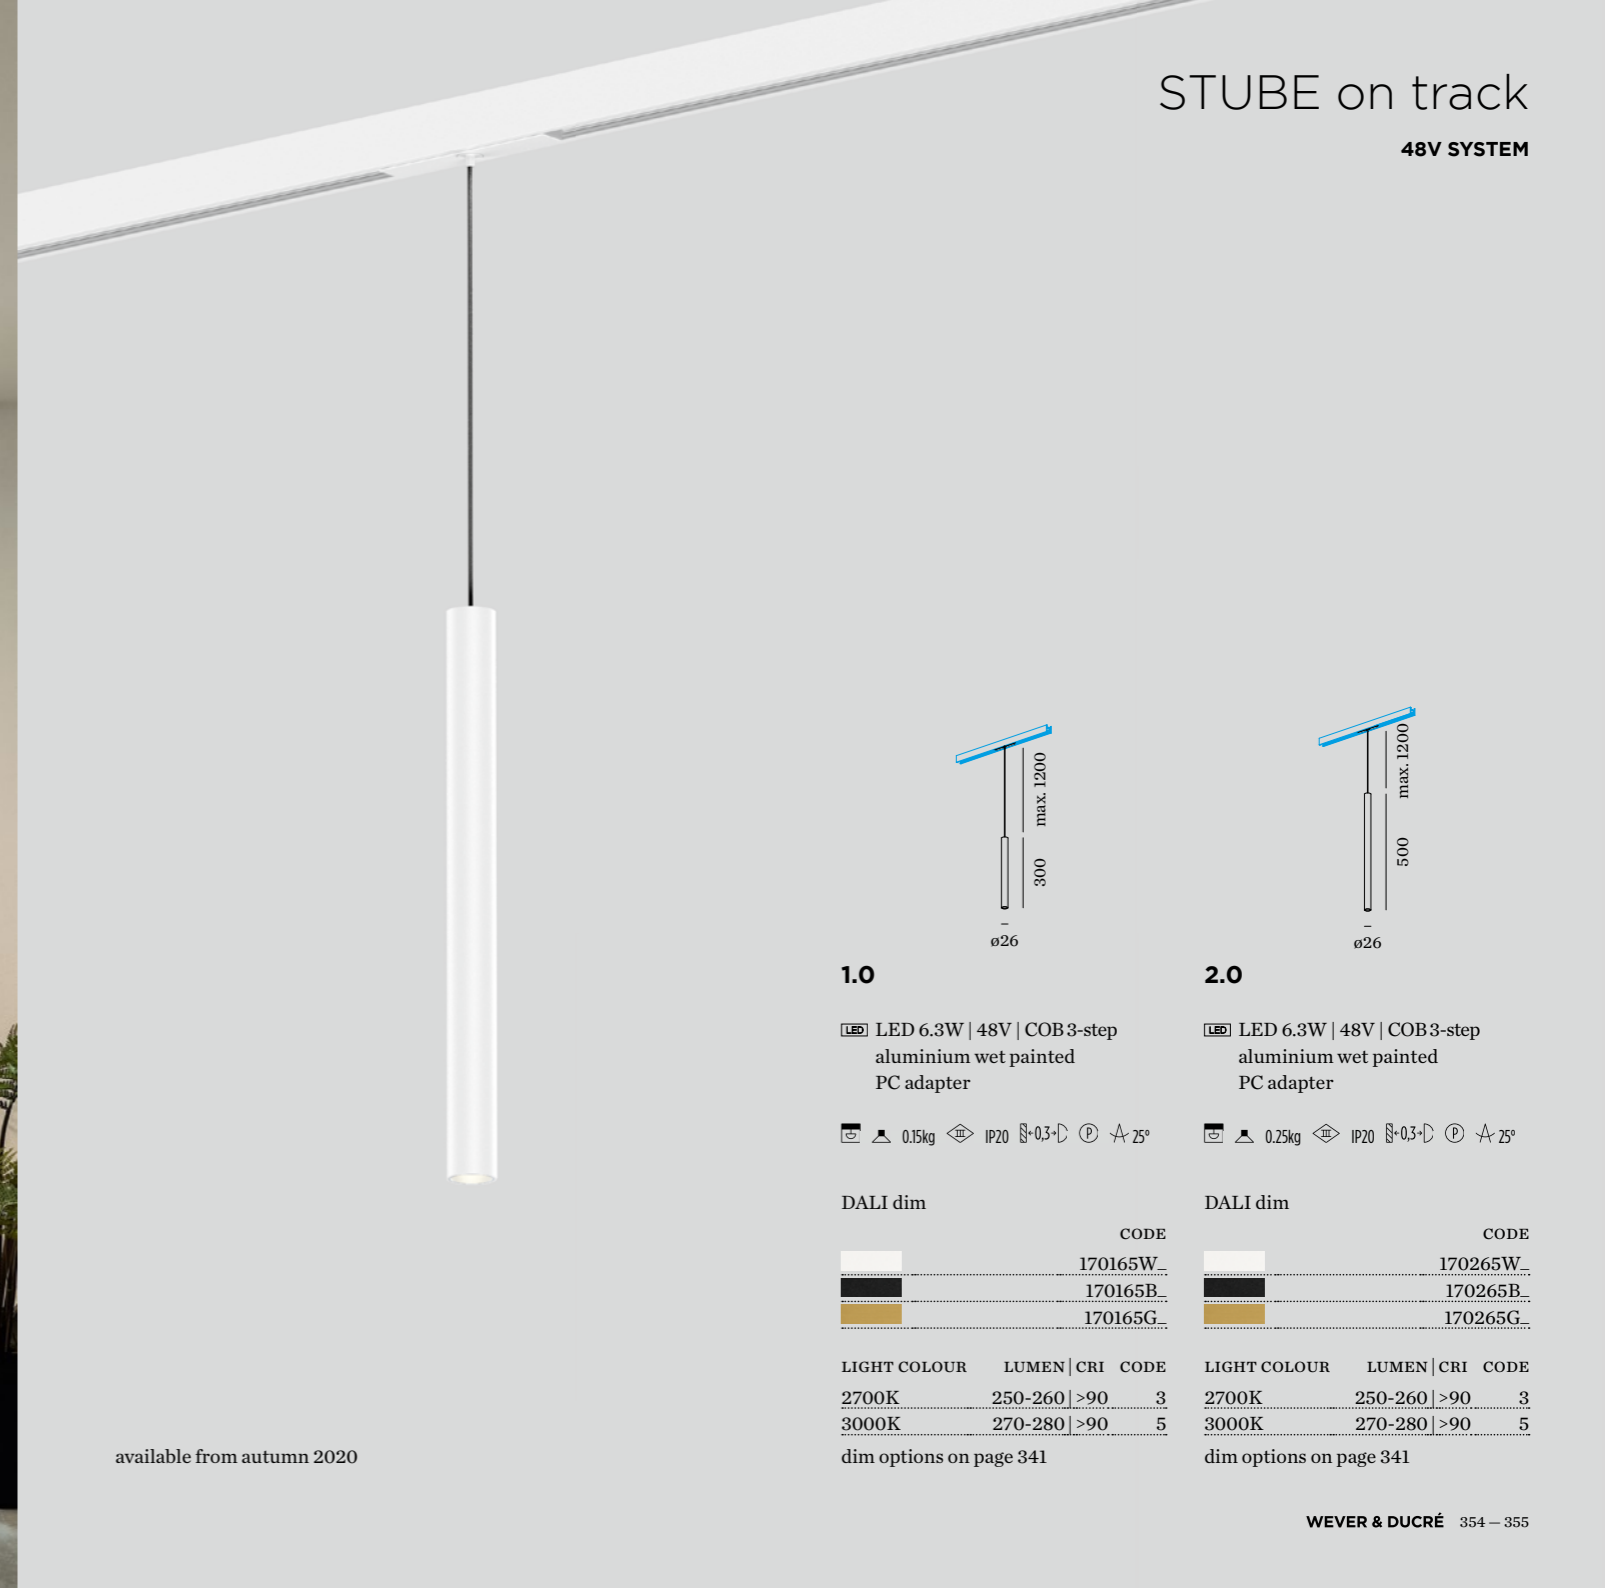

1.0

LED 6.3W | 48V | COB 3-step
aluminium wet painted
PC adapter

0.15kg IP20 0.3 A 25°

DALI dim

	CODE
	170165W_
	170165B_
	170165G_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	250-260	>90	3
3000K	270-280	>90	5

dim options on page 341



2.0

LED 6.3W | 48V | COB 3-step
aluminium wet painted
PC adapter

0.25kg IP20 0.3 A 25°

DALI dim

	CODE
	170265W_
	170265B_
	170265G_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	250-260	>90	3
3000K	270-280	>90	5


dim options on page 341

available from autumn 2020



SOLLI on track

48V SYSTEM



1.0

LED 5W | 48V | COB 3-step
aluminium powder coated
glass handblown | black PC
adapter and cable

0.70kg | IP20 | 0.3m | DALI

DALI dim

	CODE
	238185FD_
	238185TD_
	238185WB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	200 >90	3
3000K	210 >90	5

dim options on page 341








available from autumn 2020

1-PHASE TRACKS

220-240V TRACKS | ACCESSORIES

RECESSED | SURFACE | SUSPENDED EXAMPLES



configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

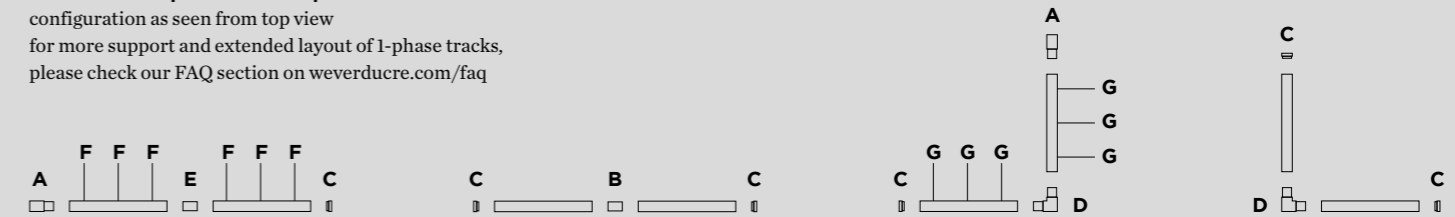

TRACK PROFILE




recessed | 220-240V | 16A



	CODE
 1.0m	90014118
 1.0m	90014119
 2.0m	90014120
 2.0m	90014121
 3.0m	90014122
 3.0m	90014123

F | MOUNTING BRACKET







for recessed fixation

	CODE
 1.0m - 2pcs needed	90014100
 2.0m - 3pcs needed	
 3.0m - 4pcs needed	

TRACK PROFILE








surface | suspended | 220-240V | 16A



	CODE
 1.0m	90014001
 1.0m	90014007
 2.0m	90014002
 2.0m	90014008
 3.0m	90014003
 3.0m	90014009

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
 1.5m	90014101
 1.5m	90014102
 3.0m	90014103
 3.0m	90014104
 1.0m - 2pcs needed	
 2.0m - 3pcs needed	
 3.0m - 4pcs needed	



A | END FEED

220-240V | max. 3 x 1.5mm² - 16A

left

	CODE
 left	90014018
 left	90014019

right

	CODE
 right	90014020
 right	90014021

D | L-CONNECTOR

can be used as feed
220-240V | max. 3 x 1.5mm² - 16A

left

	CODE
 left	90014024
 left	90014025


right

	CODE
 right	90014026
 right	90014027

B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
 straight	90014036
 straight	90014037



E | CONNECTOR

straight | 220-240V | 16A

	CODE
 straight	90014022
 straight	90014023

C | END CAP LEFT/RIGHT

	CODE
 left	90014028
 right	90014029

COVERPLATE END FEED

only use with recessed tracks

	CODE
 left	90014124
 right	90014125

more 1-phase track accessories on
page 710





RESTAURANT ENSO | TIM DE TAEYE KNOKKE-HEIST | BELGIUM



SARA on track

1-PHASE



1.0 LED


LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase Global® track adapter

0.24kg IP20 34°
90° 355°

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated
incl. 1-phase Global® track adapter

0.16kg IP20 34°
90° 355°

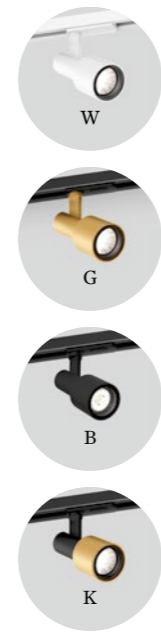

CODE
157164W_
157164G_
157164B_
157164K_

CODE
157120W0
157120G0
157120B0
157120K0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>80	2
3000K	530	>80	4

OPTIONAL

dimmer

for switch	CODE
90019017	901228W2
90019018	901228W4

more specs on page 699

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE
2700K
3000K
1800-2850K

more lamps and specs on page 701




WINE AND TAPAS BAR BOBO & CO DESTELBERGEN | BELGIUM

SQUBE on track

1-PHASE



p. 311



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase Global® track adapter

0.36kg IP20 0.3-1° 39°

90° 355°

	CODE
	144164W_
	144164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	2
3000K	430	>80	4
1800-3000K	350	>80	9


more 1-phase track accessories on page 710

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 1-phase Global® track adapter

0.32kg IP20 0.3-1° 36°

90° 355°

	CODE
	144120W0
	144120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701


more 1-phase track accessories on page 710

ODREY on track

1-PHASE



p. 387 p. 491



OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0


suitable for shades 6.0 | 7.0 | 8.0

inner cover 2.0

	CODE
	911430G0
	911430B0

suitable for shade 2.0

available from summer 2020



1.0

LED PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

0.22kg IP20 $\pm 0.3^\circ$

	CODE
	257220G0
	257220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

shade 1.0 - 8.0 in gold



	CODE
	911421G1
	911422G1
	911423G1
	911424G1
	911425G1
	911426G1
	911427G1
	911428G1

shade 1.0 - 8.0 in black

	CODE
	911421B1
	911422B1
	911423B1
	911424B1
	911425B1
	911426B1
	911427B1
	911428B1

SUSPENSIONS on track

1-PHASE

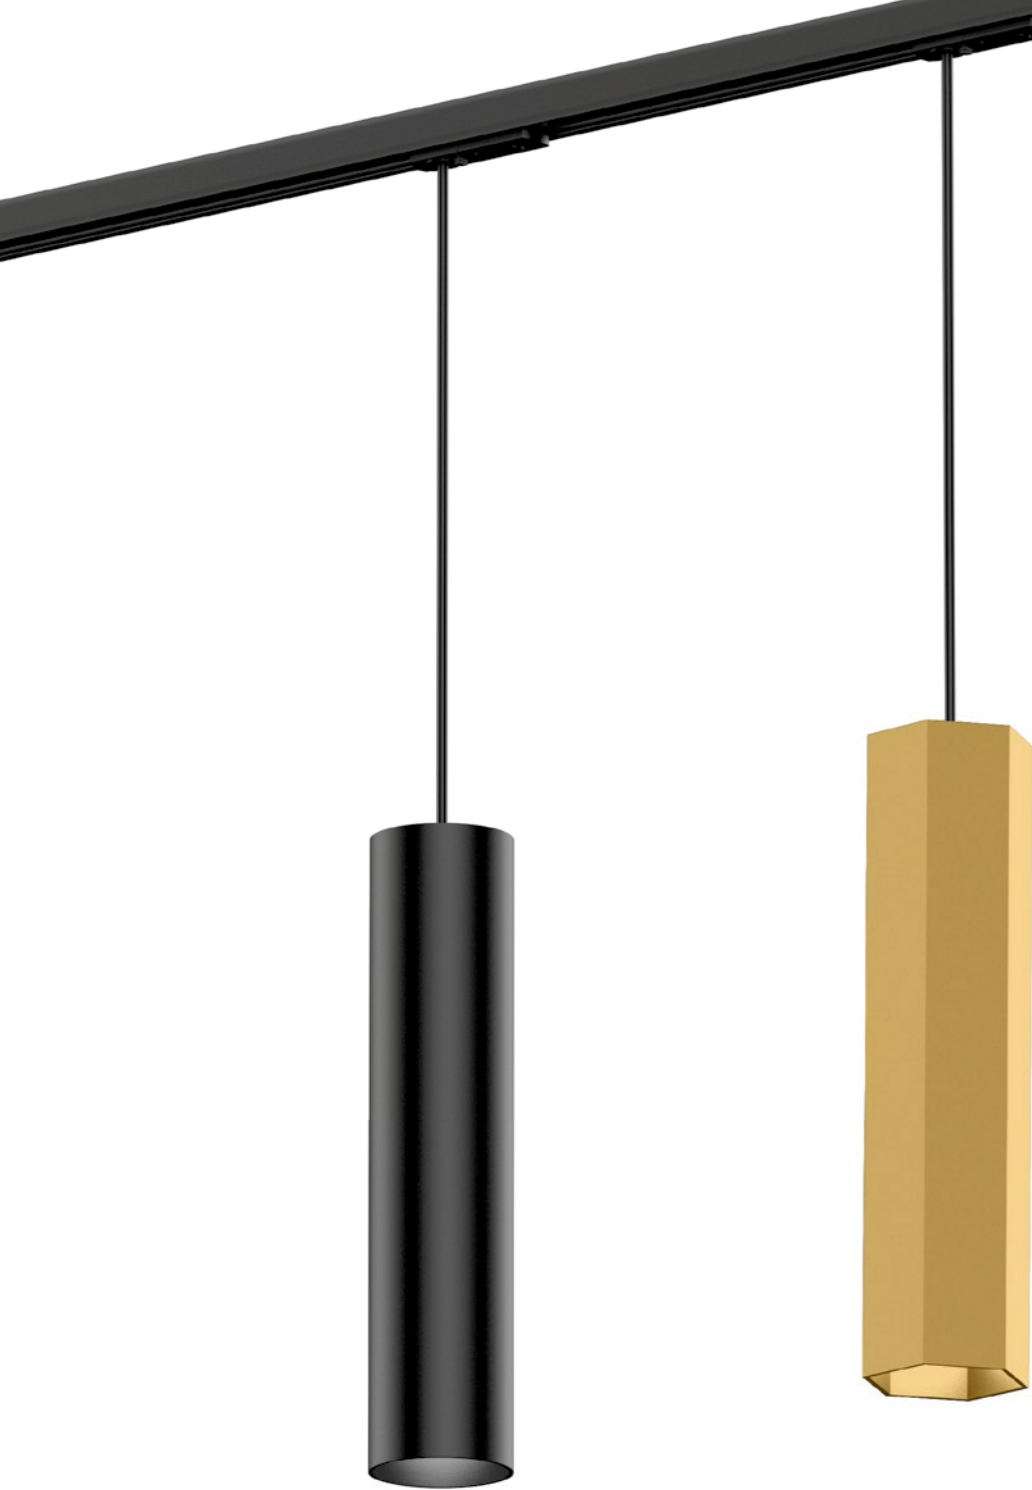

RAY 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.62 | 0.76kg IP20 0.3° 36°

2.0	200mm	CODE
White		217564W_
Grey		217564L_
Gold		217564G_
Brown		217564P_
Black		217564B_

3.0	300mm	CODE
White		217664W_
Grey		217664L_
Gold		217664G_
Brown		217664P_
Black		217664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.54 | 0.68kg IP20 0.3°


2.0	200mm	CODE
White		217520W0
Grey		217520L0
Gold		217520G0
Brown		217520P0
Black		217520B0

3.0	300mm	CODE
White		217620W0
Grey		217620L0
Gold		217620G0
Brown		217620P0
Black		217620B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



HEXO 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.66 | 0.82kg IP20 0.3° 36°

2.0	200mm	CODE
White		215564G_
Grey		215564Q_
Gold		215564P_
Black		215564B_

3.0	300mm	CODE
White		215664G_
Grey		215664Q_
Gold		215664P_
Black		215664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.58 | 0.74kg IP20 0.3°

2.0	200mm	CODE
White		215520G0
Grey		215520Q0
Gold		215520P0
Black		215520B0

3.0	300mm	CODE
White		215620G0
Grey		215620Q0
Gold		215620P0
Black		215620B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9



more lamps and specs on page 701

3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 3-phase tracks,
please check our FAQ section on weverducre.com/faq

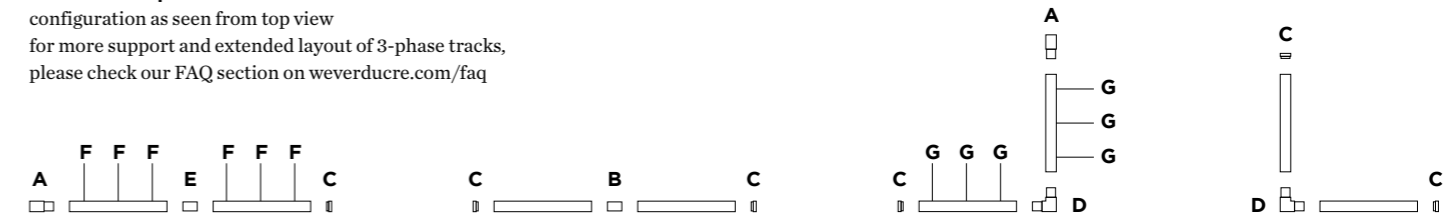

TRACK PROFILE

surface | suspended | 220-240V | 16A



	CODE
1.0m	90014200
1.0m	90014201
2.0m	90014202
2.0m	90014203
3.0m	90014204
3.0m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
1.5m	90014206
1.5m	90014207
3.0m	90014208
3.0m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED


including cable gasket
220-240V | max. 5 x 1.5-2.5mm² | 16A

left

	CODE
	90014238
	90014239

right

	CODE
	90014240
	90014241



D | L-CONNECTOR


220-240V | max. 5 x 1.5-2.5mm² | 16A

left

	CODE
	90014220
	90014221


right

	CODE
	90014222
	90014223



TRACK COVER

	CODE
1.0m	90014236
1.0m	90014237



B | MIDDLE FEED

straight
220-240V | max. 5 x 1.5-2.5mm² | 16A


	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT

	CODE
	90014216
	90014217

more 3-phase track accessories on
page 711



E | STRAIGHT CONNECTOR

	CODE
	90014226
	90014227




SQUBE on track

3-PHASE



p. 311




1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 3-phase track adapter

0.32kg IP20 0.3°D A 36°

90° 355°




2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.40kg IP20 0.3°D P A 32°

90° 355°



3.0 LED

LED 20W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.75kg IP20 0.3°D P A 27°

90° 355°

CODE
144720W0
144720B0

CODE
144364W_
144364B_

CODE
144564W_
144564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>80	2
3000K	790	>80	4
1800-3000K	790	>80	9

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1300	>90	3
3000K	1390	>90	5

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 701

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 699


OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018



more specs on page 699



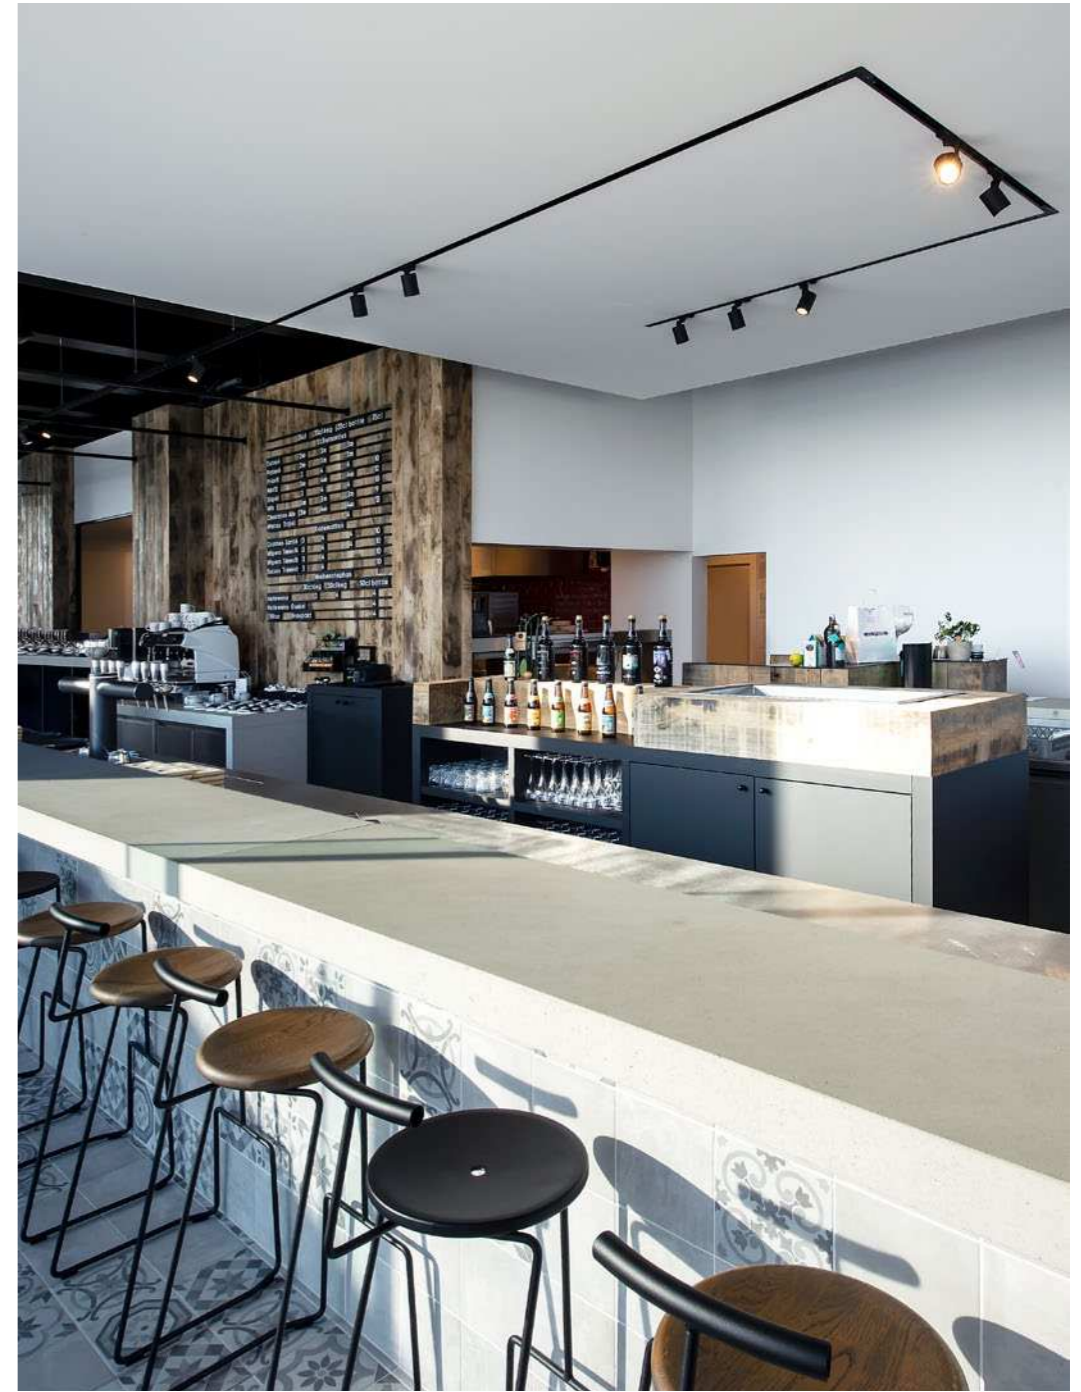

SUSPENSIONS on track

3-PHASE

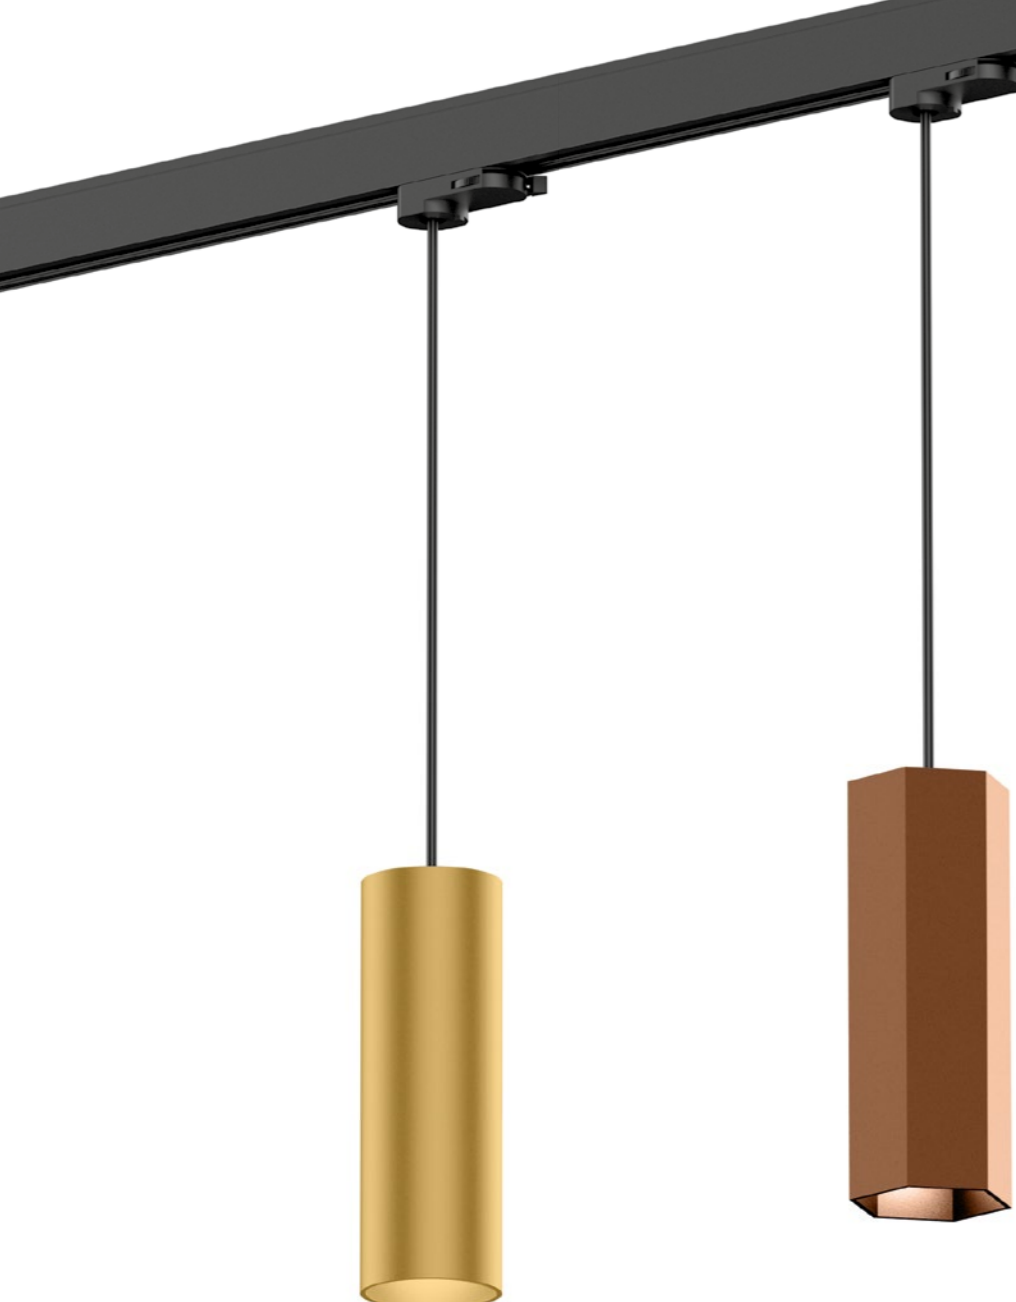

RAY 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.62 | 0.76kg IP20 0.3° 36°

2.0	
200mm	CODE
	217364W_
	217364L_
	217364G_
	217364P_
	217364B_

3.0	
300mm	CODE
	217464W_
	217464L_
	217464G_
	217464P_
	217464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.54 | 0.68kg IP20 0.3°


2.0	
200mm	CODE
	217320W0
	217320L0
	217320G0
	217320P0
	217320B0

3.0	
300mm	CODE
	217420W0
	217420L0
	217420G0
	217420P0
	217420B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



HEXO 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.66 | 0.82kg IP20 0.3° 36°

2.0	
200mm	CODE
	215364G_
	215364Q_
	215364P_
	215364B_

3.0	
300mm	CODE
	215464G_
	215464Q_
	215464P_
	215464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.58 | 0.74kg IP20 0.3°

2.0	
200mm	CODE
	215320G0
	215320Q0
	215320P0
	215320B0

3.0	
300mm	CODE
	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

ELLO SYSTEM

CEILING SURFACE | SUSPENDED




p. 437



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN



ALWAYS USE

B | connector point
phase-cut dim up to max. 4 fixtures
DALI dim up to max. 2 fixtures

	CODE
	900190W1
	900190B1

OPTIONAL

C | steel suspension cable

	CODE
2.0m	90015102

D1 | power feeder for phase-cut dim
incl. steel suspension cable 2.0m
max. 10 luminaires per power feeder

	CODE
	90018010
	90018011

D2 | power feeder for DALI 2.0m
incl. steel suspension cable 2.0m
max. 10 luminaires per power feeder

	CODE
	90018012
	90018013

A | 1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover

1.70kg IP20 0.3-1

phase-cut dim | 3000K | >90 CRI | 981lm


	CODE
	500184W5
	500184B5

DALI dim | 3000K | >90 CRI | 981lm

	CODE
	500185W5
	500185B5


SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°
for more support and extended layout of ELLO SYSTEM,
please check our FAQ section on weverducre.com/faq

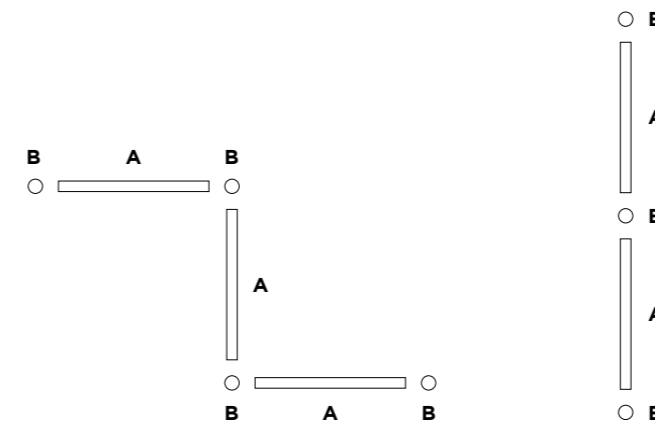

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect), for more support and extended
layout of ELLO SYSTEM, please check our FAQ section on weverducre.com/faq

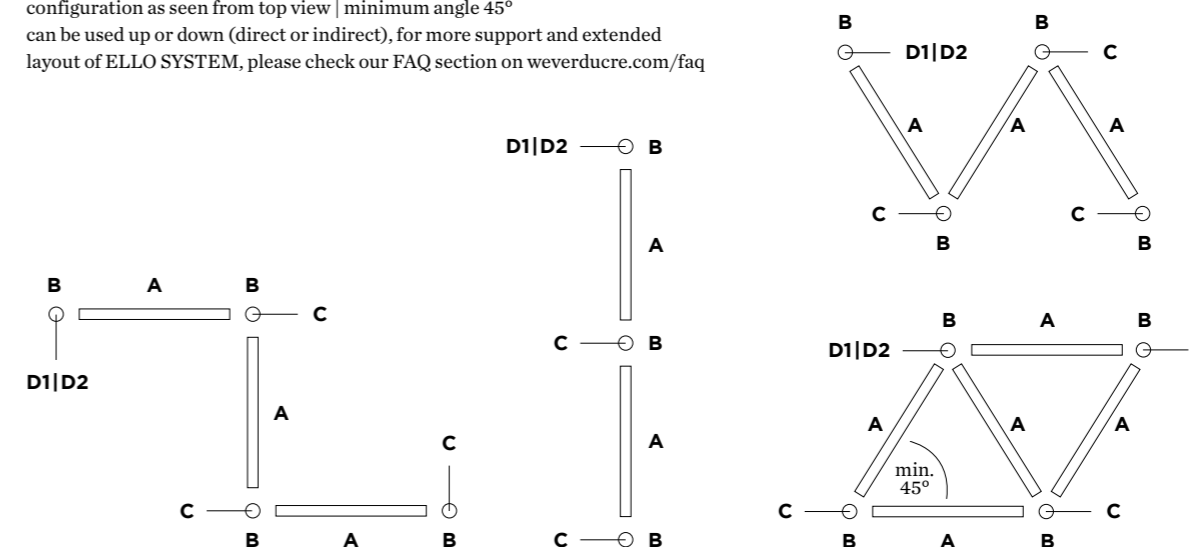



OFFICE KR PROPERTIES | H2A ARCHITECTURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA



OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY

CEILING SUSPENDED

p. 385 – 471

CEILING SUSPENDED SINGLE



ODREY
p. 387



BOX
p. 393



DOCUS
p. 395



HEXO
p. 397



RAY
p. 401



SHIEK 1.0
p. 403



SHIEK 3.0
p. 405



SHIEK 4.0
p. 407



WETRO
p. 411



SELO
p. 417



DINOR 1.0
p. 421



DINOR 2.0
p. 421



DINOR 3.0
p. 421



CORK
p. 423



CONE
p. 427



BISHOP
p. 429



ELLO
p. 437



DARF
p. 439



VENN
p. 441



BEBOW
p. 443



GIGANT
p. 447



CYCLONE
p. 451

CEILING SUSPENDED MULTI



BOX MULTI
p. 457



DOCUS MULTI
p. 459



HEXO MULTI
p. 461



RAY MULTI
p. 463



WETRO MULTI
p. 465



SHIEK MULTI
p. 467



CORK MULTI
p. 471

DESIGNER FAMILIES



ROOMOR
p. 37



WIRO
p. 93



MIRRO
p. 55



DRO
p. 67



ROCK
p. 81



REVER
p. 131



J.J.W.
p. 153

LOOK WHO CAME TO DINNER

ODREY ON THE CEILING



Looking for a surprise guest for your dinner party? Let ODREY shine from the ceiling. After all, the elegant luminaire is fantastic with its eight different shade shapes and two variable inner covers. Don't be surprised if your guests frequently look up at the ceiling. It's hard to resist the temptation when the elegant ODREY winks from its black or gold shade. By the way, if you really want something unique, choose a mounting in a contrasting colour. You can choose between black or gold.

Sie suchen nach einem Überraschungsgast für Ihre Dinner-party? Dann lassen Sie doch einfach ODREY von der Decke strahlen. Schließlich beeindruckt die elegante Leuchte nicht nur mit acht verschiedenen Schirmformen, sondern auch mit zwei variablen Innencover. Wundern Sie sich also nicht, wenn Ihre Gäste öfter mal nach oben sehen. Wenn die elegante ODREY mit einem Shade in Gold oder Schwarz von der Decke blinzelt, kann man dieser Versuchung kaum widerstehen. Übrigens: Wer's noch individueller mag, kann das Mounting in einer Kontrastfarbe wählen. Zur Auswahl stehen schwarz oder gold.

CREATE YOUR VERY OWN ODREY

MOUNTING + SHADE + INNER COVER

MOUNTING

available in ● black or ● gold

1.0



SHADES

available in ● black or ● gold



1.0
ø55




2.0
ø250




3.0
ø100



4.0
ø124



5.0
ø115



6.0
ø190



7.0
ø150



8.0
ø250



2.0



1.0



1.0



1.0

OPTIONAL INNER COVERS

available in ● black or ● gold




ODREY

CEILING SUSPENDED



p. 353
p. 365

p. 491



1.0

LED PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

0.22kg IP20

ALWAYS USE

Single suspension
ceiling base round

	CODE
	257120G0
	257120B0

CODE

	90052022
	90052021

ALWAYS USE

shade 1.0 - 8.0 in gold

	CODE
1.0	911421G1
2.0	911422G1
3.0	911423G1
4.0	911424G1
5.0	911425G1
6.0	911426G1
7.0	911427G1
8.0	911428G1

CODE

90015195

Single ceiling base semi recessed

	CODE
	90052026
	90052027

shade 1.0 - 8.0 in black


	CODE
1.0	911421B1
2.0	911422B1
3.0	911423B1
4.0	911424B1
5.0	911425B1
6.0	911426B1
7.0	911427B1
8.0	911428B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5
1800-2850K	901229S9

more lamps and specs on page 701



OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0

suitable for shades 6.0 | 7.0 | 8.0


inner cover 2.0

	CODE
	911430G0
	911430B0

suitable for shade 2.0

available from summer 2020



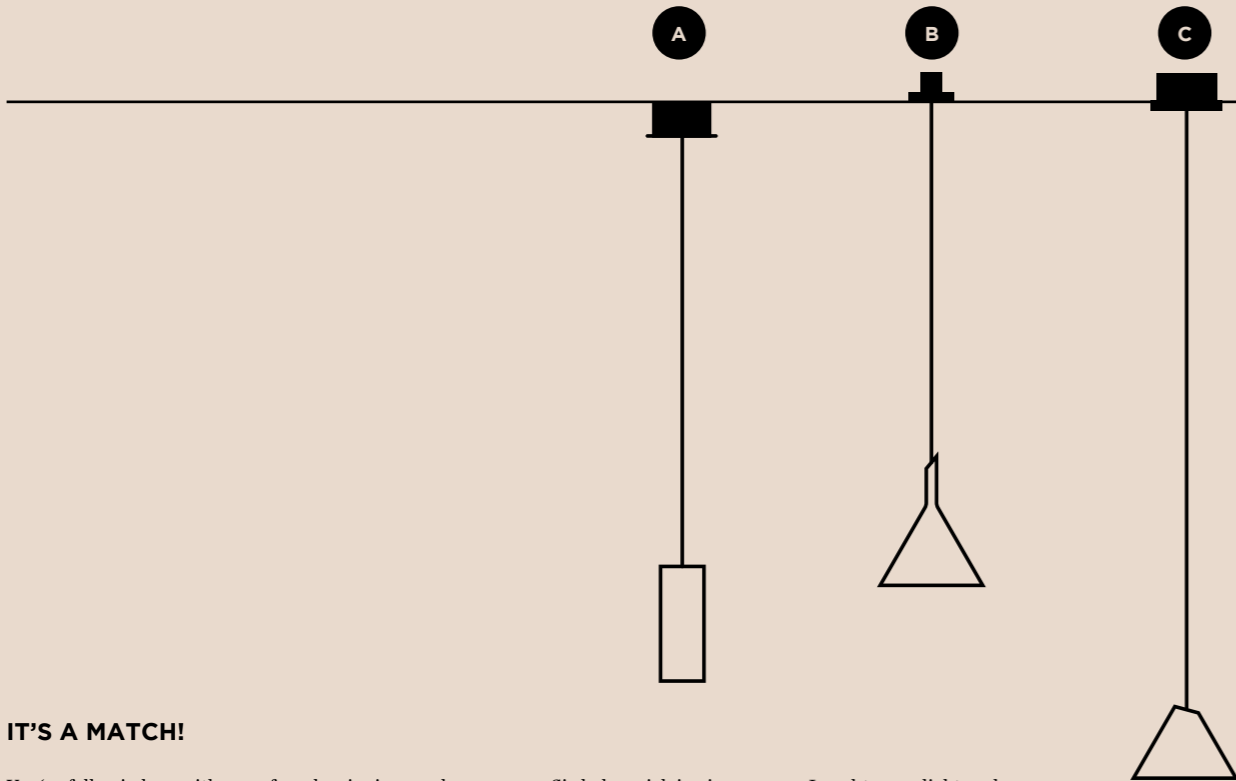

SINGLE SUSPENSION OPTIONS

FOR 1 LUMINAIRE


IT'S A MATCH!

You've fallen in love with one of our luminaires, and now you're looking for the right ceiling rose? Let's quickly play matchmaker here. You have three basic options. The first is the classic ceiling-base round. Alternatively, choose the timeless ceiling-mounted version or the more subtle invisible, where the installed ceiling rose disappears into the plaster ceiling. Rounding off the selection is the semi-recessed version, where the ceiling rose can also be hidden in the ceiling but with a cover that can always be opened for maintenance. Did you find a match? All you need to do now is pick the right colour.


BOX	p. 393
DOCUS	p. 395
HEXO	p. 397
RAY	p. 401
SHIEK	p. 403
WETRO	p. 411
SELO	p. 417
DINOR	p. 421

multi suspension options on page 455

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen drei Möglichkeiten wählen: Der Ceiling-base-round, die klassische Deckenaufbauvariante, der superdezenten invisible-Version, bei der man den Baldachin in der Gipsdecke einbaut und der damit unsichtbar wird und der Semi-recessed-Variante, die den Baldachin auch in der Decke verschwinden lässt, man aber zu Wartungszwecken die Abdeckung jederzeit öffnen kann. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für die passende Farbe entscheiden.

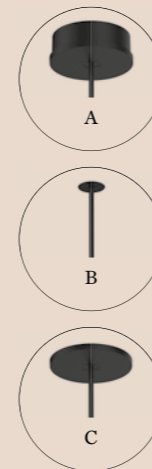

A



SINGLE SUSPENSION
ceiling base round

	CODE
□	90052022
■	90052021

more information on page 713

B




INVISIBLE CEILING SUSPENSION
plasterkit | system - with fixation and adjustment

	CODE
□	90015195
■	90015195

more information on page 713




C



SINGLE CEILING BASE
semi recessed

	CODE
□	90052026
■	90052027

more information on page 713

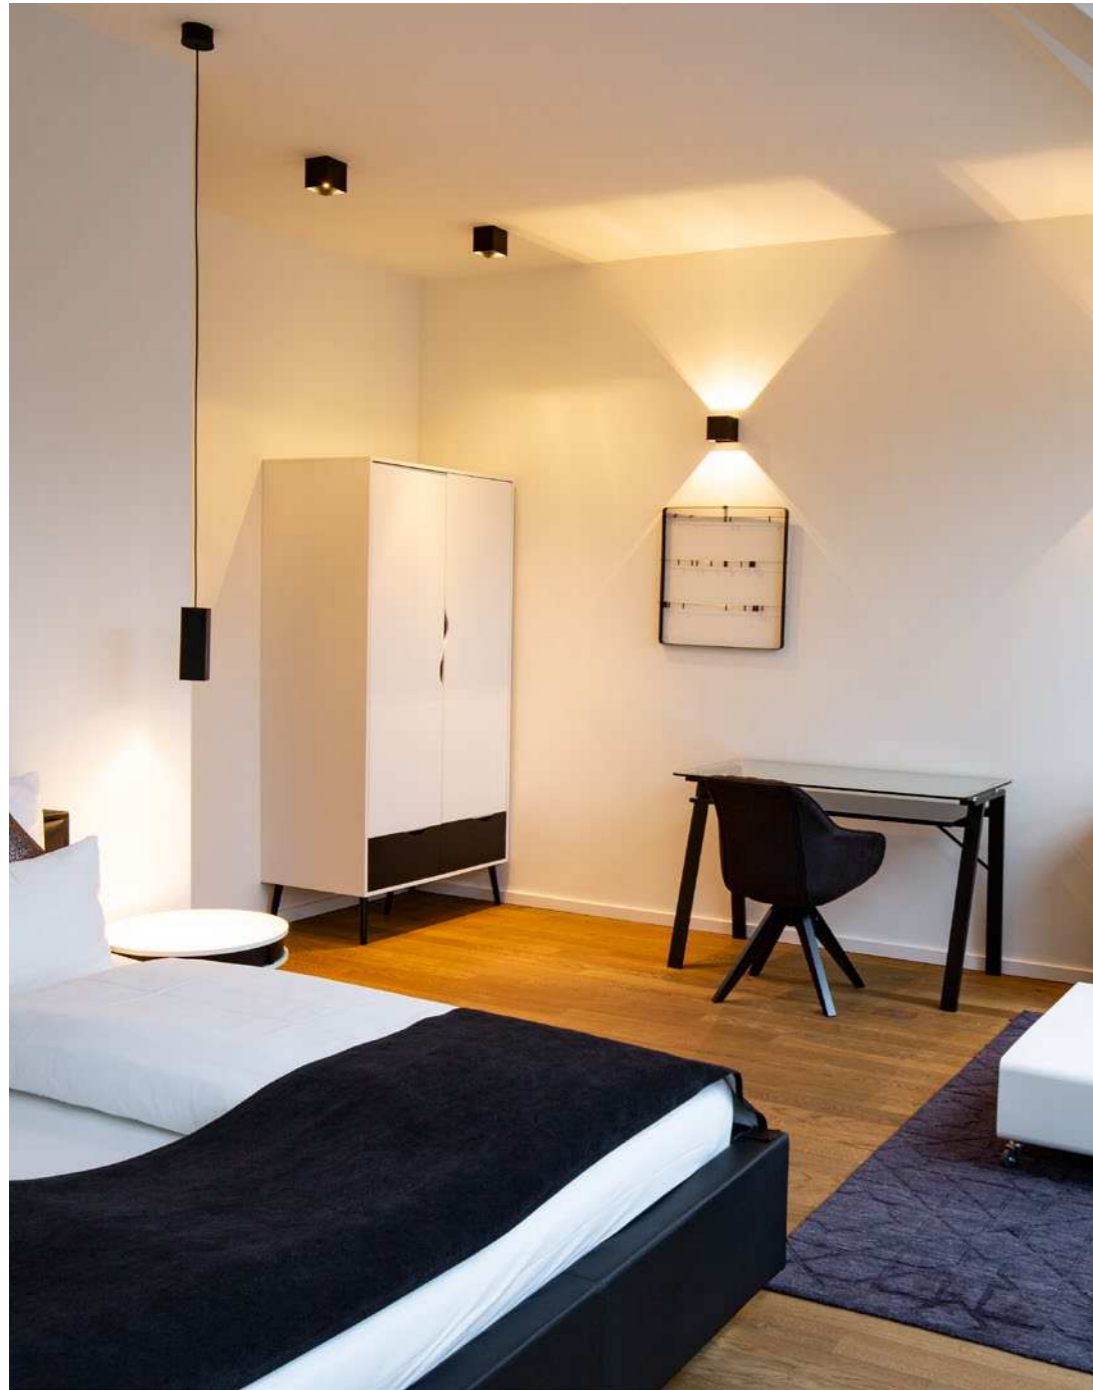

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.83kg IP20 36°

2.0	CODE
200mm	214164W_
	214164L_
	214164P_
	214164B_

3.0	CODE
300mm	214264W_
	214264L_
	214264P_
	214264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.59 | 0.76kg IP20 36°


2.0	CODE
200mm	214120W0
	214120L0
	214120P0
	214120B0

3.0	CODE
300mm	214220W0
	214220L0
	214220P0
	214220B0

OPTIONAL


PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



BOX

CEILING SUSPENDED



ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021




B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015195

C | Single ceiling base semi recessed

CODE
90052026
90052027

multi suspension options on page 455



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.82kg IP20 $\pm 0.3^\circ$ $\Delta 36^\circ$

2.0

200mm


	CODE
	216164W_
	216164G_
	216164P_
	216164B_

3.0

300mm

	CODE
	216264W_
	216264L_
	216264G_
	216264P_
	216264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.59 | 0.72kg IP20 $\pm 0.3^\circ$

2.0

200mm

	CODE
	216120W0
	216120G0
	216120P0
	216120B0

3.0

300mm

	CODE
	216220W0
	216220L0
	216220G0
	216220P0
	216220B0

OPTIONAL

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

DOCUS

CEILING SUSPENDED



p. 281

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021


B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455



2.0 | 3.0 LED





LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.82kg | IP20 | 0.3°C | A 36°

2.0 200mm	CODE
	215164G
	215164Q
	215164P
	215164B

3.0 300mm	CODE
	215264G
	215264Q
	215264P
	215264B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58 | 0.74kg | IP20 | 0.3°C

2.0 200mm	CODE
	215120G0
	215120Q0
	215120P0
	215120B0

3.0 300mm	CODE
	215220G0
	215220Q0
	215220P0
	215220B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

HEXO

CEILING SUSPENDED



p. 285



p. 367



p. 377

ALWAYS USE

A | Single suspension
ceiling base round

CODE	
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE	
	90015195

C | Single ceiling base semi recessed

CODE	
	90052026
	90052027



multi suspension options on page 455





RAY

CEILING SUSPENDED

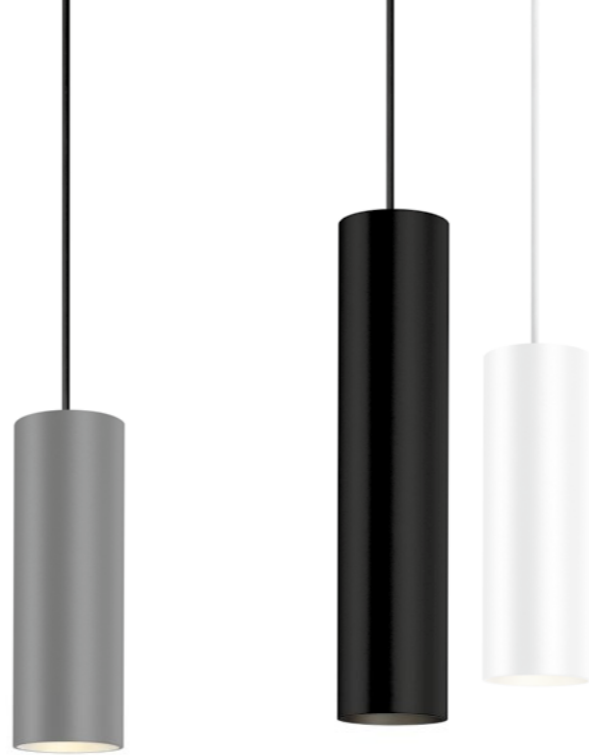

2.0 | 3.0 LED



LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.62 | 0.76kg | IP20 | 0.3° | A 36°

2.0	CODE
200mm	217164W_
	217164L_
	217164G_
	217164P_
	217164B_

3.0	CODE
300mm	217264W_
	217264L_
	217264G_
	217264P_
	217264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54 | 0.68kg | IP20 | 0.3°

2.0	CODE
200mm	217120W0
	217120L0
	217120G0
	217120P0
	217120B0

3.0	CODE
300mm	217220W0
	217220L0
	217220G0
	217220P0
	217220B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015195

C | Single ceiling base semi recessed

CODE
90052026
90052027




multi suspension options on page 455



SHIEK

CEILING SUSPENDED

DESIGNED BY
3HDRAFT

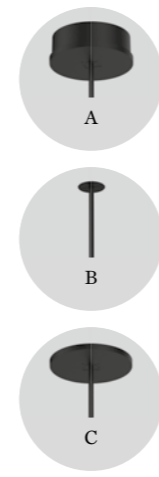

1.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.36 kg IP20 $\pm 0.3^{\circ}$

1800-2850K | >90 CRI | 510lm

	CODE
	237189W9
	237189J9
	237189P9
	237189K9
	237189Z9

2.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.47 kg IP20 $\pm 0.3^{\circ}$

1800-2850K | >90 CRI | 510lm

	CODE
	237289W9
	237289J9
	237289P9
	237289K9
	237289Z9

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021




B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455



3.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.60 kg IP20 0.3-D

1800-2850K | >90 CRI | 510lm

	CODE
	237389W9
	237389J9
	237389P9
	237389K9
	237389Z9

3.0 E27

E27 max. 20W | E27 | A60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.60 kg IP20 0.3-D

	CODE
	2343E8W0
	2343E8J0
	2343E8P0
	2343E8K0
	2343E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455

SHIEK

CEILING SUSPENDED



reddot award 2017
winner



DESIGN
AWARD
2017



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design


DESIGNED BY
3HDRAFT



SHIEK

CEILING SUSPENDED

DESIGNED BY
3HDRAFT



4.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.70 kg IP20 $\pm 0.3^\circ$

1800-2850K | >90 CRI | 510lm

	CODE
	237489W9
	237489J9
	237489P9
	237489K9
	237489Z9

4.0 E27

E27 max. 20W | E27 | A60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.70 kg IP20 $\pm 0.3^\circ$

	CODE
	2344E8W0
	2344E8J0
	2344E8P0
	2344E8K0
	2344E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455




PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

SHIEK

CEILING SUSPENDED

DESIGNED BY
3HDRAFT



5.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.80 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237589W9
	237589J9
	237589P9
	237589K9
	237589Z9

5.0 E27

E27 max. 20W | E27 | A60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.80 kg IP20 0.3

	CODE
	2345E8W0
	2345E8J0
	2345E8P0
	2345E8K0
	2345E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455







WETRO

CEILING SUSPENDED



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY 3HDRAFT



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut dim | artisanal hand blown glass

0.56 kg | IP20 | 0.3 | 6

1800-2850K | >90 CRI | 340lm

	CODE
	236189P9
	236189B9




2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut dim | artisanal hand blown glass

0.97 kg | IP20 | 0.3 | 6

1800-2850K | >90 CRI | 340lm

	CODE
	236289P9
	236289B9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut dim | artisanal hand blown glass

1.69 kg | IP20 | 0.3 | 6

1800-2850K | >90 CRI | 340lm

	CODE
	236389P9
	236389B9

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027



multi suspension options on page 455



WETRO

CEILING SUSPENDED

DESIGNED BY
3HDRAFT

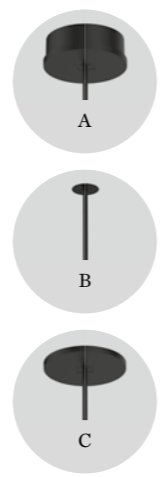


1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut
dim | italian hand blown glass

0.56 kg | IP20 | $\pm 0.3^\circ$ | G

1800-2850K | >90 CRI | 340lm

	CODE
	236189TS9
	236189TD9
	236189TW9




2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut
dim | italian hand blown glass

0.97 kg | IP20 | $\pm 0.3^\circ$ | G

1800-2850K | >90 CRI | 340lm

	CODE
	236289TS9
	236289TD9
	236289TW9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker | phase-cut
dim | artisanal hand blown glass

1.69 kg | IP20 | $\pm 0.3^\circ$ | G

1800-2850K | >90 CRI | 340lm

	CODE
	236389TS9
	236389TD9
	236389TW9

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015195

C | Single ceiling base semi recessed

	CODE
	90052026
	90052027

multi suspension options on page 455

available from spring 2020



Italian hand blown glass





TAUPE WHITE GLASS
ON

TAUPE WHITE GLASS
OFF



SELO
CEILING SUSPENDED

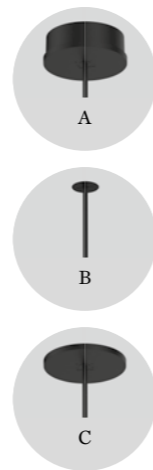


1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235189W9




2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.96 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235289W9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235389W9

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015195

C | Single ceiling base semi recessed

CODE
90052026
90052027







DINOR

CEILING SUSPENDED

DESIGNED BY
3HDRAFT

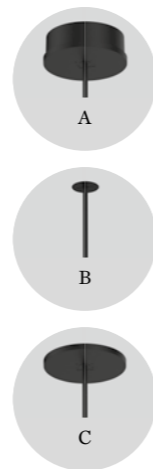


1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

0.90 kg | IP20 | 0.3~

1800-2850K | >90 CRI | 510lm

CODE	
	255189RW9
	255189GW9
	255189OK9
	255189OB9




2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

1.30 kg | IP20 | 0.3~

1800-2850K | >90 CRI | 510lm

CODE	
	255289RW9
	255289GW9
	255289OK9
	255289OB9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

2.30 kg | IP20 | 0.3~

1800-2850K | >90 CRI | 510lm

CODE	
	255389RW9
	255389GW9
	255389OK9
	255389OB9

ALWAYS USE

A | Single suspension
ceiling base round

CODE	
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE	
	90015195

C | Single ceiling base semi recessed


CODE	
	90052026
	90052027



RESTAURANT GUST | INTERIOR DESIGN FREDERIC HOOFT KORTRIJK | BELGIUM

CORK

CEILING SUSPENDED



1.0

LED 3W | 120-240VAC | 50-60Hz
PCB 3-step | incl. power supply
aluminium powder coated
fits bottles inner ø16,5 - 19,5 mm
and max. 1kg

0,24kg IP20 0,3m A 36°

	CODE
	210163W_
	210163B_

LIGHT COLOUR	LUMEN	CRI	CODE
2200K	120	>80	1
2700K	180	>80	2

OPTIONAL

	CODE
bottle 1	
75/174 glass	90019013
bottle 2	
87/323 glass	90019014

multi suspension options on page 455



MAGAZIN AUF EF HERTEN | GERMANY





RESTAURANT LE NOIR BONNET | AXIOME ARCHITECTURE SIRAUT | BELGIUM



CONE

CEILING SUSPENDED

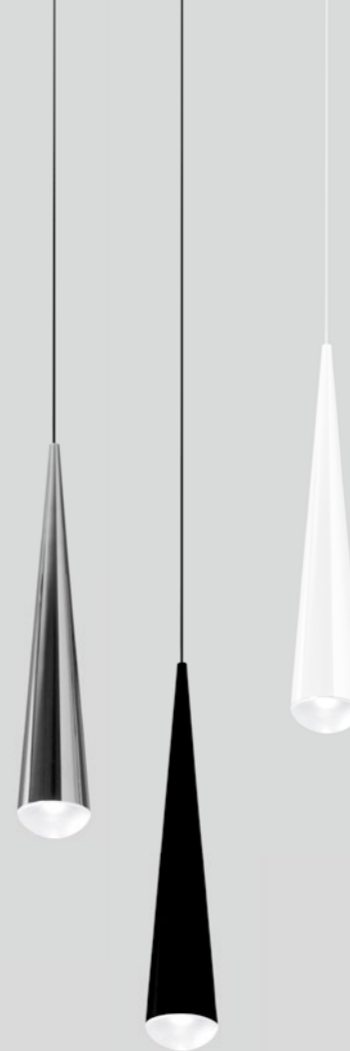

1.0

LED 8W | 220-240VAC | 50-60Hz
 COB 3-step | phase-cut dim
 aluminium powder coated
 chrome plated | glass

0.55kg | IP20 | 36°

2700K | >90 CRI | 480lm

	CODE
	200184W2
	200184C2
	200184B2



PRIVATE RESIDENCE AUSTRIA



4.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

1.08kg IP20 Σ -0.3+D

shade only

	CODE
	218100SY
	218100GR
	218100GG

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138


G95 LED E27 6W dim

2200K 450lm	9003E111
---------------	----------

G95 LED E27 12W opal

2700K 1000lm	9003E154
----------------	----------

more lamps and specs on page 703



6.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

2.62kg IP20 Σ -0.3+D

shade only

	CODE
	218200SY
	218200GR
	218200GG

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138


G95 LED E27 6W dim

2200K 450lm	9003E111
---------------	----------

G95 LED E27 12W opal

2700K 1000lm	9003E154
----------------	----------

more lamps and specs on page 703



8.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

5.70kg IP20 Σ -0.3+D

shade only

	CODE
	218300SY
	218300GR
	218300GG

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138


G95 LED E27 6W dim

2200K 450lm	9003E111
---------------	----------

G95 LED E27 12W opal





2700K 1000lm	9003E154
----------------	----------

more lamps and specs on page 703



ALWAYS USE

4.0 | 6.0
cable suspension set | 2.0m cable

	CODE
	90015120
	90015138
	90015134
	90015119

8.0
cable suspension set | 2.0m cable

	CODE
	90015123
	90015139
	90015135
	90015122

6.0m suspension set on page 712

BISHOP

CEILING SUSPENDED



reddot award 2015
honourable mention




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY
3HDRAFT





PRIVATE RESIDENCE AUSTRIA

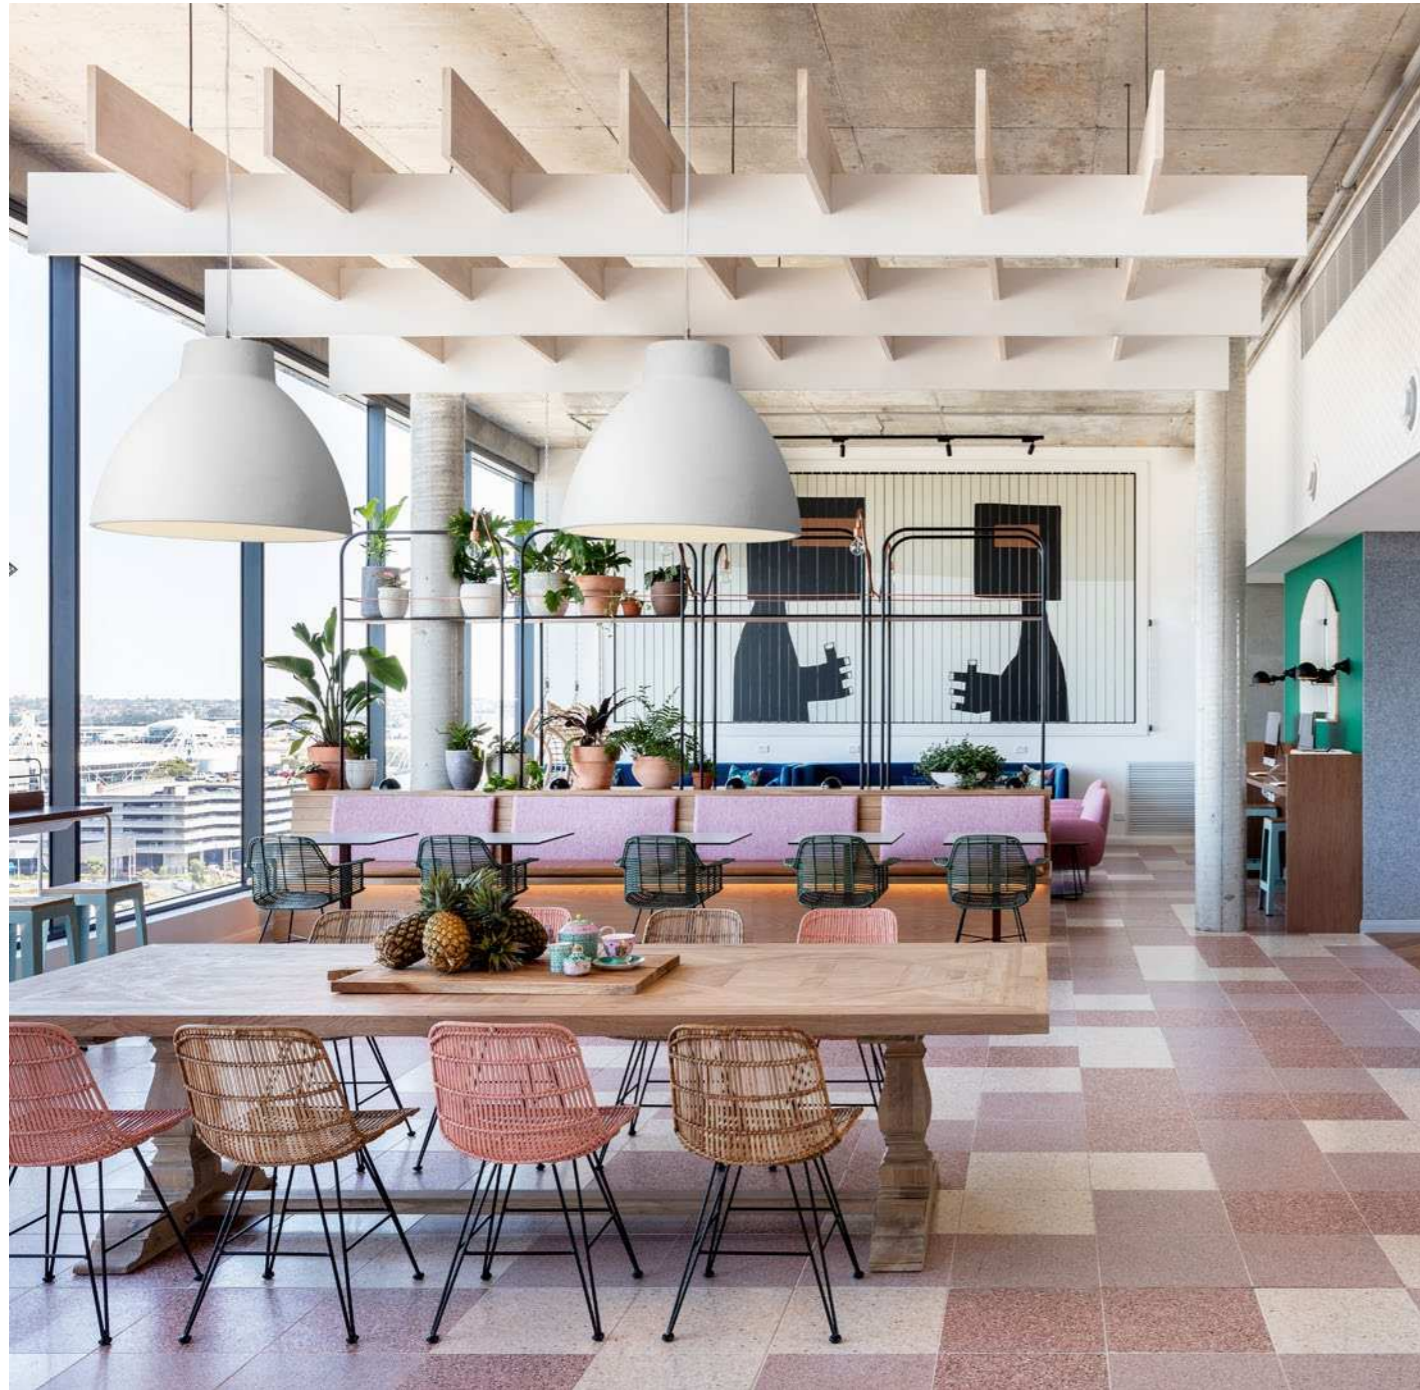

BISHOP

CEILING SUSPENDED




reddot award 2015
honourable mention



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY
3HDRAFT



4.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

1.08kg IP20 $\pm 0.3^\circ$

shade only

	CODE
	218100W0
	218100D0
	218100K0

OPTIONAL


A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

G95 LED E27 6W dim
2200K | 450lm 9003E111

G95 LED E27 12W opal
2700K | 1000lm 9003E154

more lamps and specs on page 703



6.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

2.62kg IP20 $\pm 0.3^\circ$

shade only

	CODE
	218200W0
	218200D0
	218200K0

OPTIONAL


A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

G95 LED E27 6W dim
2200K | 450lm 9003E111

G95 LED E27 12W opal
2700K | 1000lm 9003E154

more lamps and specs on page 703



8.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

5.70kg IP20 $\pm 0.3^\circ$

shade only

	CODE
	218300W0
	218300D0
	218300K0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K 315lm	9003E109
2700K 500lm	9003E138

G95 LED E27 6W dim
2200K | 450lm 9003E111

G95 LED E27 12W opal
2700K | 1000lm 9003E154

more lamps and specs on page 703



ALWAYS USE

4.0 | 6.0
cable suspension set | 2.0m cable

	CODE
	90015120
	90015138
	90015134
	90015119

8.0
cable suspension set | 2.0m cable

	CODE
	90015123
	90015139
	90015135
	90015122

6.0m suspension set on page 712



ELLO

CEILING SUSPENDED



p. 379




reddot award 2015
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY
S&R CORNELISSEN



13.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover

2.00kg IP20 $\pm 0.3^\circ$

phase-cut dim | 3000K | >90 CRI |
981lm

CODE

500284W5
500284B5

DALI dim | 3000K | >90 CRI | 981lm

CODE


500285W5
500285B5



chrome endcap



PRIVATE RESIDENCE GERMANY

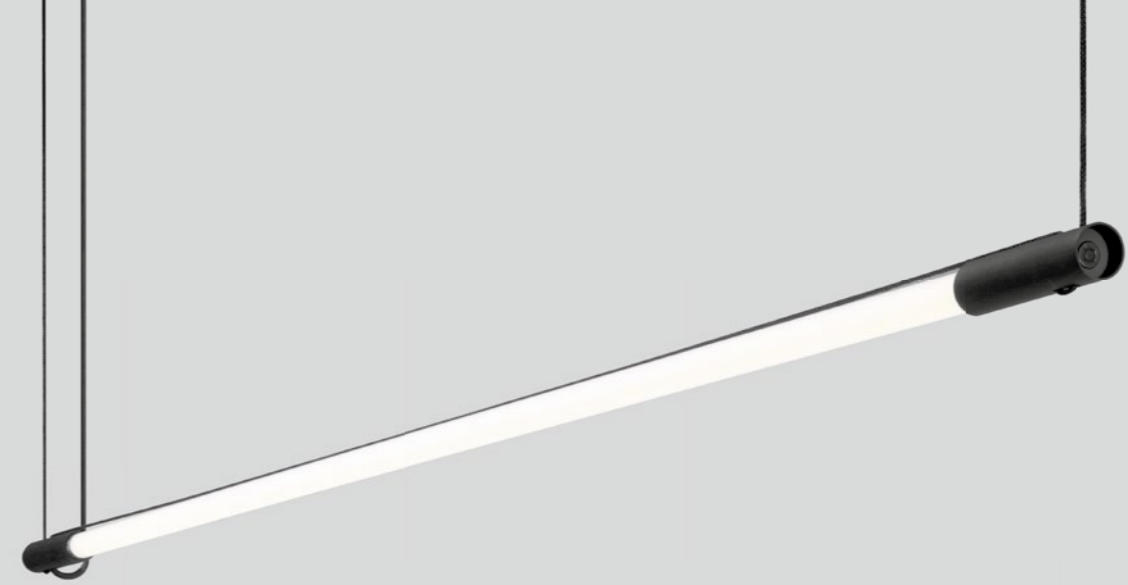


DARF

CEILING SUSPENDED



p. 555

DESIGNED BY
MARCH GUT

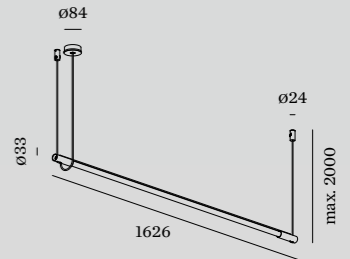

1.0

LED 22/25W | 220-240VAC
50-60Hz | aluminium powder
coated | black textile cable

0.42kg | IP20 | 0.3m | E

non dim

CODE
2561T7B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K 22W	3300	>80	4
4000K 22W	3700	>80	6

phase-cut dim

CODE
2561T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K 25W	1700	>90	5

available from spring 2020



VENN



CEILING SUSPENDED



p. 335

p. 549

DESIGNED BY
S&R CORNELISSEN

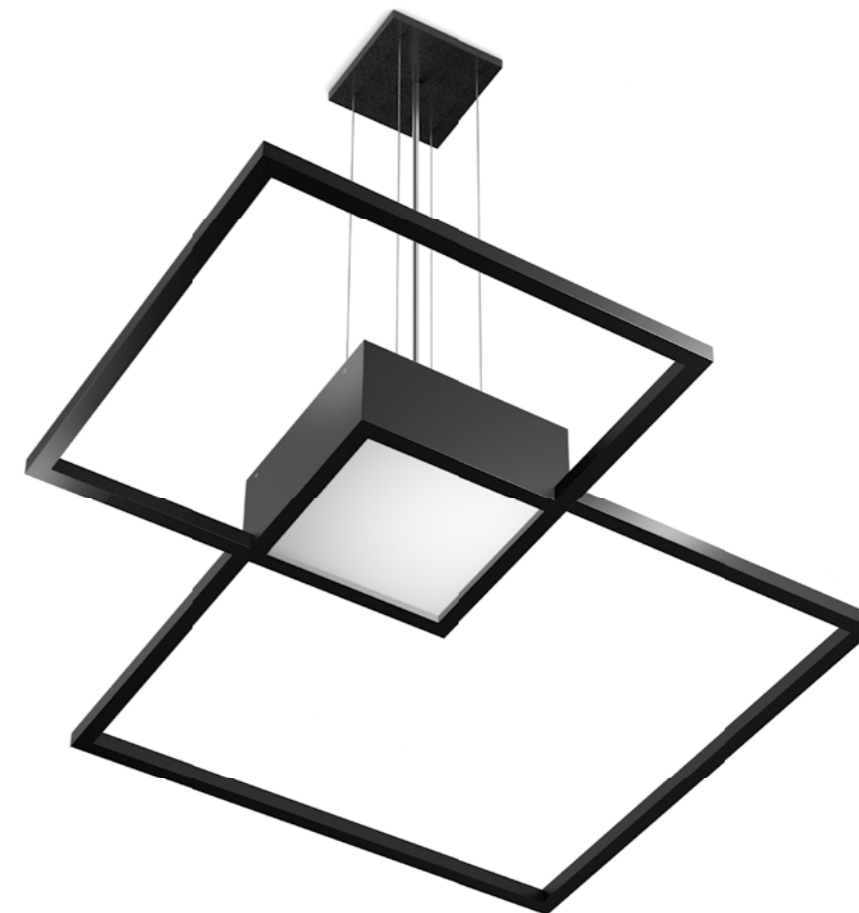

3.0

LED 47W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover | direct/indirect

2.90kg | IP20 | 0.3 | P

phase-cut dim

CODE
149384W
149384Q
149384B

DALI dim

CODE
149385W
149385Q
149385B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



BEBOW


CEILING SUSPENDED



p. 331



DESIGNED BY
S&R CORNELISSEN




1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg | IP20 | ± 0.3

3000K | >90 CRI | 1820lm

	CODE
	132384W5
	132384B5




2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg | IP20 | ± 0.3

3000K | >90 CRI | 2650lm

	CODE
	132364W5
	132364B5





BEBOW

CEILING SUSPENDED

p. 333

DESIGNED BY
S&R CORNELISSEN

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

8.00kg | IP20 | ± 0.3

3000K | >90 CRI | 1910lm

	CODE
	132484W5
	132484B5

4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits
aluminium powder coated
opal PMMA cover

8.30kg | IP20 | ± 0.3

3000K | >90 CRI | 2350lm


	CODE
	132464W5
	132464B5



GIGANT

CEILING SUSPENDED

DESIGNED BY
S&R CORNELISSEN



10.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | DALI switch
dim | opal LLDPE body | steel

8.80kg | IP20 | $\pm 0.3^\circ$

CODE

213185W_


LIGHT COLOUR	LUMEN	CRI	CODE
3000K	5300	>80	4
4000K	5600	>80	6

OPTIONAL

CODE

suspension
set 4.0m 90015114

the used material applies to UL 94 HB
standard and glow wire test 630°
longer suspension on request



16.0

LED 84W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | DALI switch
dim | opal LLDPE body | steel

15.30kg | IP20 | $\pm 0.3^\circ$

CODE

213285W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	10600	>80	4
4000K	11300	>80	6

OPTIONAL


CODE

suspension
set 4.0m 90015114

the used material applies to UL 94 HB
standard and glow wire test 630°
longer suspension on request



OFFICE ZUIDERPOORT GENT | BELGIUM

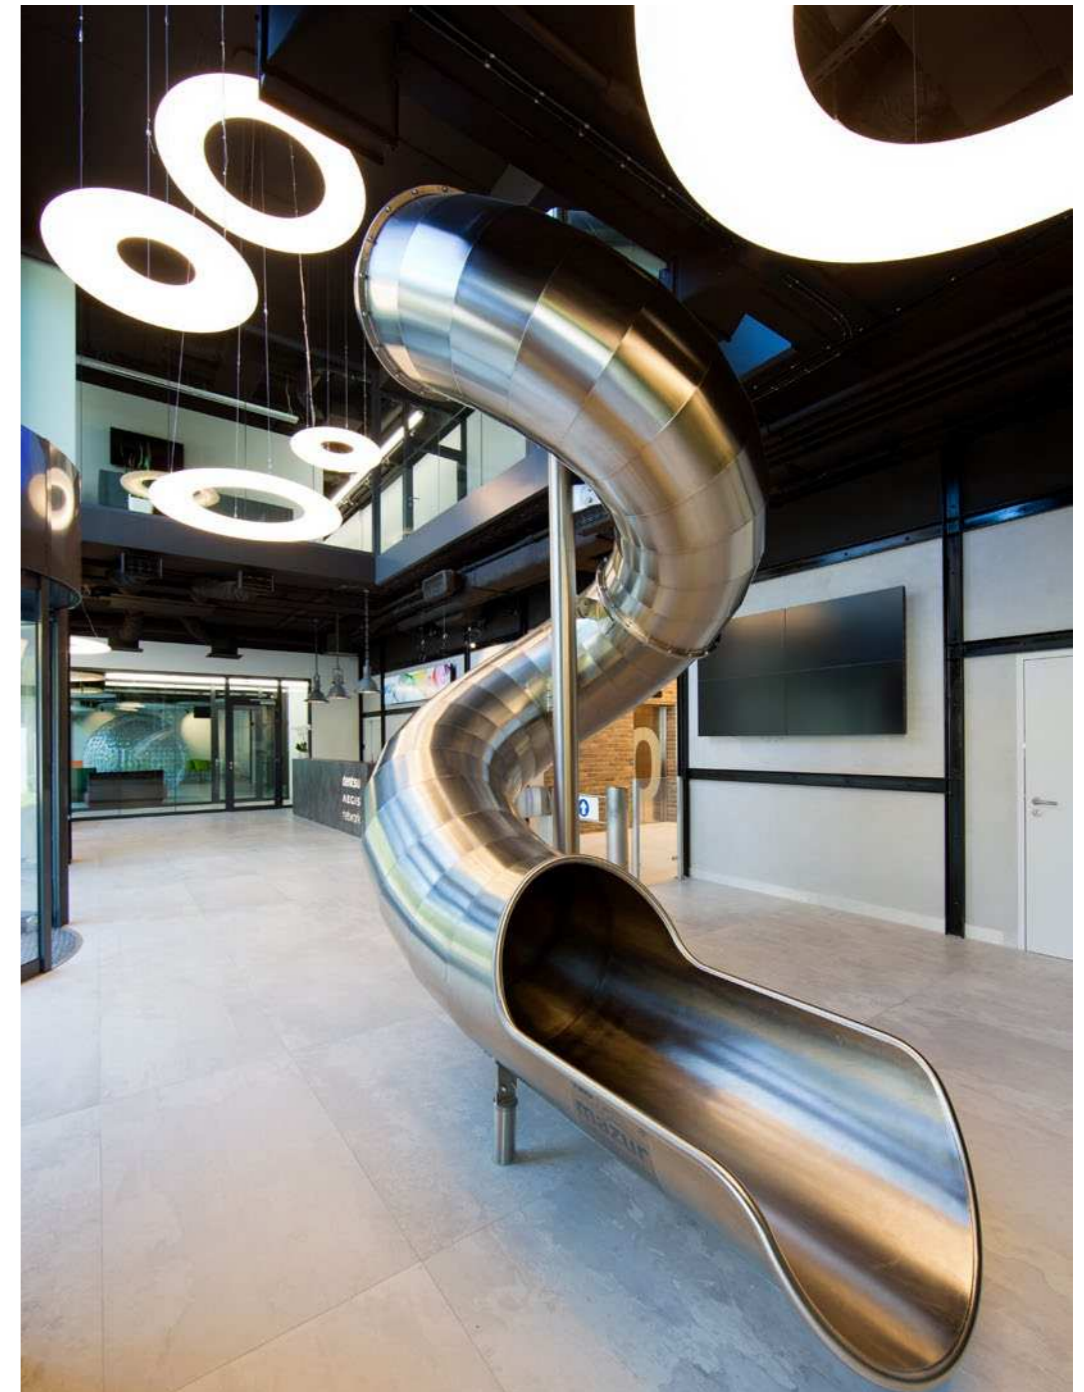

OFFICE | DENTSU AEGIS NETWORK | TRZOP ARCHITEKCI | PLUSLIGHTING WARSAW | POLAND

WEVER & DUCRÉ 448 – 449




OFFICE | MICROSOFT | CONCEPT & DESIGN: PROCOS GROUP BRUSSELS | BELGIUM

CYCLONE

CEILING SUSPENDED

DESIGNED BY
S&R CORNELISSEN

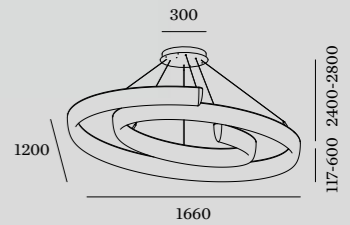

17.0

LED 70W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
DALI | aluminium powder coated
opal LLDPE body

8.80kg IP20 $\pm 0.3^\circ$

3000K | >80 CRI | 7000lm


CODE
219185W4

the used material applies to UL 94 HB
standard and glow wire test 630°



MULTI SUSPENSION OPTIONS

FOR 2-8 LUMINAIRES

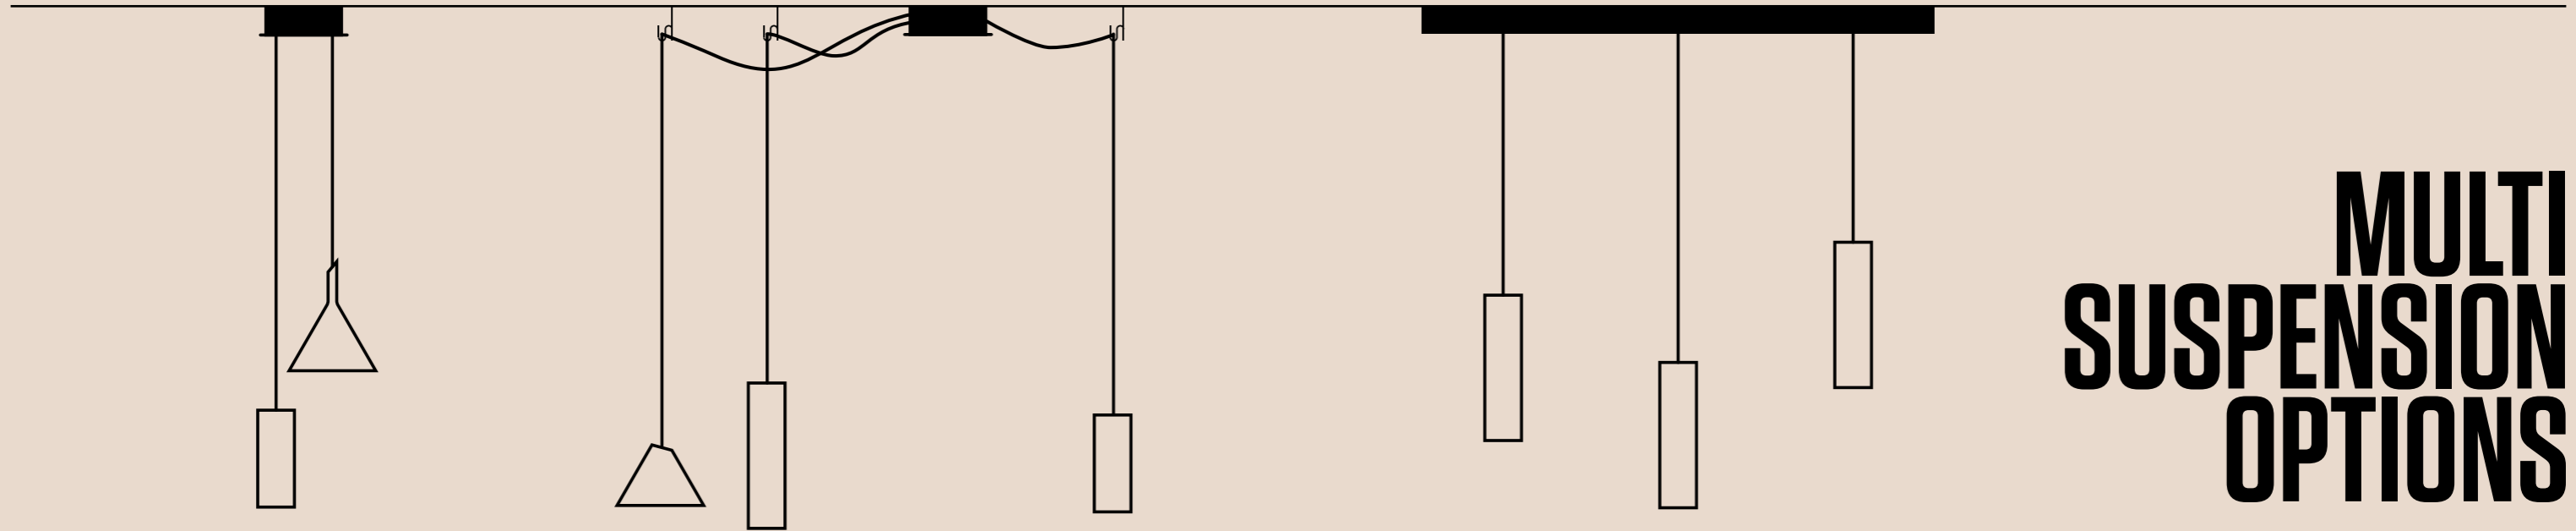

LET'S HANG OUT TOGETHER


RAY likes swinging from the ceiling together with other Wever & Ducré luminaires. The trick is suspending up to eight luminaires as a round multi-ceiling rose and up to five in a straight form. All you need is a single light outlet from which you can tailor the arrangement. Straight as a die or as a spider's web where the cables become a design element. Who can join the team? Beyond WETRO and DOCUS, BOX, HEXO, CORK, and SHIEK are combination geniuses.

RAY swingt am liebsten gemeinsam mit anderen Wever & Ducré-Leuchten von der Decke. Der Trick: Bis zu acht Leuchten lassen sich als Multibaldachin in runder und bis zu fünf in gerader Form abhängen. Und das von einem einzigen Lichtauslass aus, über dem man sie individuell arrangieren kann. Schnurgerade oder in Spinnennetzform, bei der die Kabel zum Design-Element werden. Wer ins Team passt? Neben WETRO und DOCUS sind auch BOX, HEXO, CORK oder SHIEK absolute Kombinationsgenies.

BOX MULTI	p. 457
DOCUS MULTI	p. 459
HEXO MULTI	p. 461
RAY MULTI	p. 463
WETRO MULTI	p. 465
SHIEK MULTI	p. 467
CORK MULTI	p. 471

single suspension options on page 391

2-8 LUMINAIRES




CEILING BASE ROUND

standard up to 4 luminaires
add 90059118 for 5 - 8 luminaires

	CODE
	90052005
	90052006

2 LUMINAIRES




CEILING BASE

600mm

	CODE
	90052007
	90052008

3 LUMINAIRES




CEILING BASE

900mm

	CODE
	90052009
	90052010

4 LUMINAIRES




CEILING BASE

1200mm

	CODE
	90052011
	90052012


5 LUMINAIRES



CEILING BASE


1500mm

	CODE
	90052013
	90052014

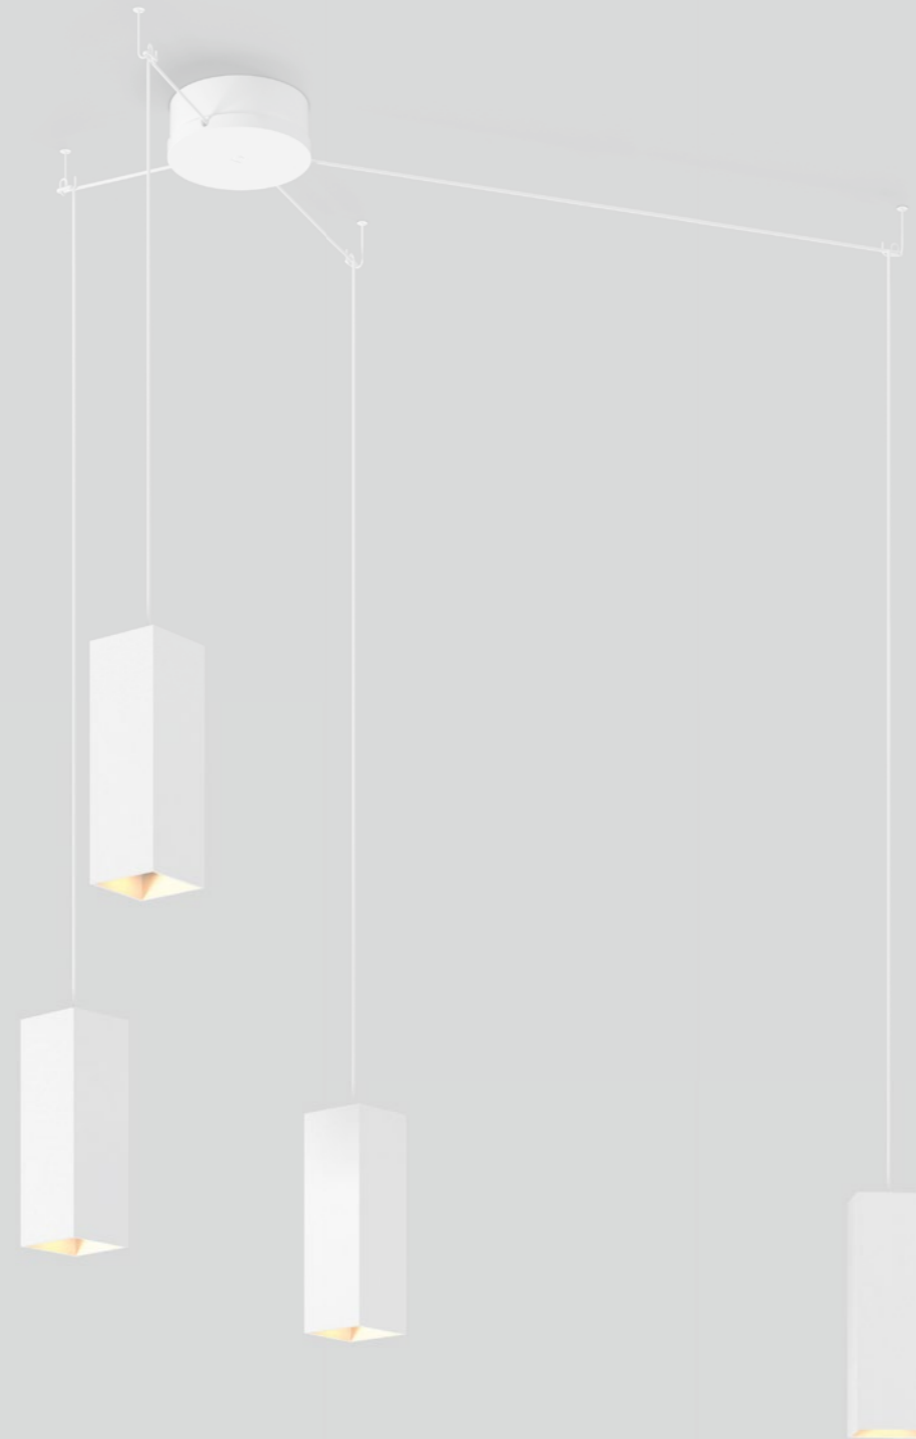

BOX MULTI

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 $\pm 0.3^\circ$ $\Delta 36^\circ$

2.0

200mm


	CODE
	227164W
	227164L
	227164P
	227164B

3.0

300mm

	CODE
	227264W
	227264L
	227264P
	227264B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 $\pm 0.3^\circ$

2.0

200mm

	CODE
	227120W0
	227120L0
	227120P0
	227120B0

3.0

300mm

	CODE
	227220W0
	227220L0
	227220P0
	227220B0

OPTIONAL

	CODE
PAR16 LED GU10 7W phase-cut dim	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012



1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 714

DOCUS MULTI

CEILING SUSPENDED

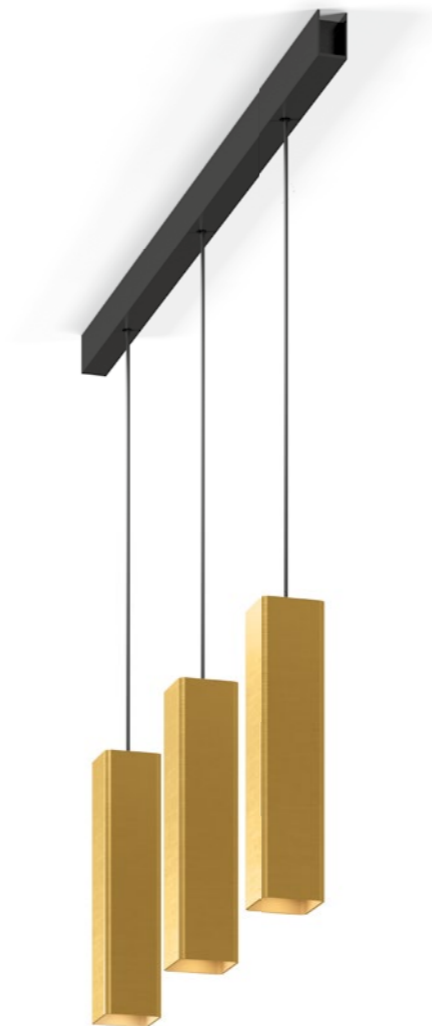

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 36°


2.0

200mm	CODE
	227564W
	227564L
	227564G
	227564P
	227564B

3.0

300mm	CODE
	227664W
	227664L
	227664G
	227664P
	227664B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 36°

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010


1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps


	CODE
	90052013
	90052014

more options and information
on page 714

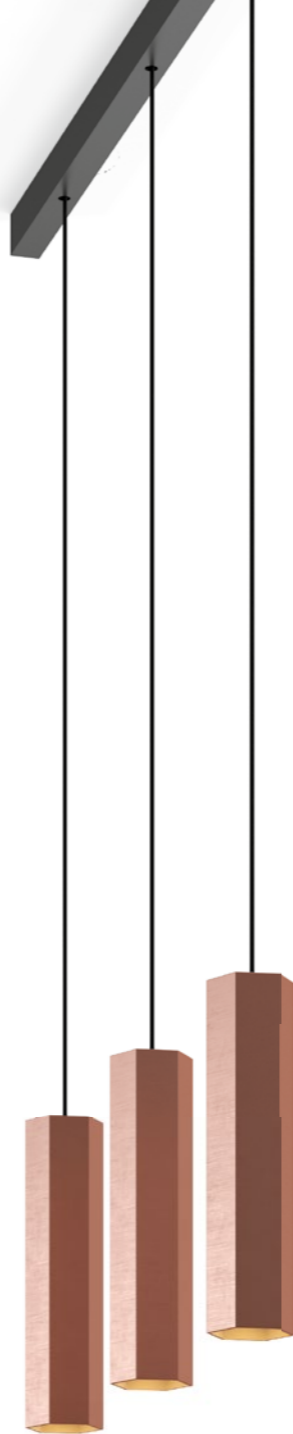

HEXO MULTI

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66kg IP20 $\pm 0.3^\circ$ $\pm 36^\circ$


2.0

200mm	CODE
	227364G
	227364Q
	227364P
	227364B

3.0

300mm	CODE
	227464G
	227464Q
	227464P
	227464B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58kg IP20 $\pm 0.3^\circ$

2.0

200mm	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010


1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 714



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.62kg | IP20 | 0.3° | 36°


2.0

200mm	CODE
	227764W
	227764L
	227764G
	227764P
	227764B

3.0

300mm	CODE
	227864W
	227864L
	227864G
	227864P
	227864B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54kg | IP20 | 0.3°

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701

RAY MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 714



WETRO MULTI

CEILING SUSPENDED



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY
3HDRAFT



ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

CODE

90052005

90052006

extra set standard connectors for
5 to 8 lamps

CODE

90059118

multiple suspension ceiling base long
600mm | 2 lamps | only for 1.0

CODE

90052007

90052008

900mm | 3 lamps | only for 1.0

CODE

90052009

90052010

1200mm | 4 lamps | only for 1.0

CODE

90052011

90052012


1500mm | 5 lamps | only for 1.0

CODE

90052013

90052014

more options and information
on page 714



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
hand blown glass

0.56 kg IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236189P9
	236189B9
	236189TD9
	236189TS9
	236189TW9




2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
hand blown glass

0.97 kg IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236289P9
	236289B9
	236289TD9
	236289TS9
	236289TW9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
hand blown glass

1.69 kg IP20


1800-2850K | >90 CRI | 340lm

	CODE
	236389P9
	236389B9
	236389TD9
	236389TS9
	236389TW9

SHIEK MULTI

CEILING SUSPENDED

DESIGNED BY
3HDRAFT




1.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.36 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237189W9
	237189J9
	237189P9
	237189K9
	237189Z9




2.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.47 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237289W9
	237289J9
	237289P9
	237289K9
	237289Z9




3.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.60 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237389W9
	237389J9
	237389P9
	237389K9
	237389Z9



3.0 E27

E27 max. 20W | E27 | A60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.6 kg IP20 0.3

	CODE
	2343E8W0
	2343E8J0
	2343E8P0
	2343E8K0
	2343E8Z0

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps | only for 1.0

	CODE
	90052007
	90052008

900mm | 3 lamps | only for 1.0

	CODE
	90052009
	90052010

1200mm | 4 lamps | only for 1.0

	CODE
	90052011
	90052012

1500mm | 5 lamps | only for 1.0

	CODE
	90052013
	90052014





more options and information
on page 714



SHIEK MULTI

CEILING SUSPENDED

DESIGNED BY
3HDRAFT



4.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.70 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237489W9
	237489J9
	237489P9
	237489K9
	237489Z9

5.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.80 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

	CODE
	237589W9
	237589J9
	237589P9
	237589K9
	237589Z9

4.0 E27

E27 max. 20W | E27 | A60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.70 kg IP20 0.3

	CODE
	2344E8W0
	2344E8J0
	2344E8P0
	2344E8K0
	2344E8Z0

5.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook | for multiple
suspension ceiling base round

0.80 kg IP20 0.3

	CODE
	2345E8W0
	2345E8J0
	2345E8P0
	2345E8K0
	2345E8Z0

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE 90052005
	90052006

extra set standard connectors for
5 to 8 lamps


	CODE 90059118
--	------------------

more options and information
on page 714



CORK MULTI

CEILING SUSPENDED



1.0

LED 2W | 500mA | 3V
 PCB 3-step | excl. power supply
 aluminium powder coated
 fits bottles inner ø16,5 - 19,5 mm
 and max. 1kg

0.24kg | IP20 | 0.3m | 36°

ALWAYS USE

suspension base round for 3-8 lamps
 incl. power supply

CODE	CODE
210263W	90052015
210263B	90052016

LIGHT COLOUR	LUMEN	CRI	CODE
2200K	105	>80	1
2700K	115	>80	2

suspension base long
 600mm | 2 lamps | incl. power supply
 CODE
 90052017
 90052018

OPTIONAL

	CODE	CODE
bottle 1		90052019
75/174 glass	90019013	90052020
bottle 2		
87/323 glass	90019014	

900mm | 3 lamps | incl. power supply
 more options and information
 on page 714

WALL RECESSED

p. 475 — 485

WALL
RECESSED



SMILE IN
p. 475



SMILE IN
p. 475



LITO 1.0
p. 477



LITO 2.0
p. 477



STRIPE
p. 479



STRANGE
p. 481



THEMIS
p. 483



ORIS
p. 485





SMILE IN

WALL RECESSED



p. 589



1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.39kg IP20 0.3-1.3

86-88 40 min 13

3000K | >80 CRI | 230/320lm

	CODE
3000K	326151W4
4000K	702151L4

2.0


LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.42kg IP20 0.3-1.3

86-88 40 min 13

3000K | >80 CRI | 230/320lm

	CODE
3000K	326251W4
4000K	703151L4



ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 695

OPTIONAL

	CODE
recessed ring	90012030

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 695


OPTIONAL

	CODE
recessed ring	90012030



LITO

WALL RECESSED



1.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20

70x70 35 12-18

3000K | >90 CRI | 160/210lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply


	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 695

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing always use in
combination with plasterkit



2.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20

70x70 35 12-18

3000K | >90 CRI | 160/210lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 695

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119


recessed housing always use in
combination with plasterkit





STRIPE

WALL RECESSED



0.4

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.09kg IP20 $\pm 0.3^\circ$ TC

25x56 40 2-18

3000K | >80 CRI | 11/20lm

	CODE
	305151W4
	305151L4
	305151B4
	305151G4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012037



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.10kg IP20 $\pm 0.3^\circ$ TC

25x56 40 2-18

3000K | >80 CRI | 11/20lm

	CODE
	305251W4
	305251L4
	305251B4
	305251G4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012037



2.2

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.27kg IP20 $\pm 0.3^\circ$ TC

25x170 40 2-18

3000K | >80 CRI | 17/27lm

	CODE
	305351W4
	305351L4
	305351B4
	305351G4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 695

OPTIONAL


	CODE
recessed housing incl. plasterkit	90012038





STRANGE

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.24kg IP20 $\approx 0.3^\circ$

170x86 55 2-25

	CODE
	320271W_
	320271S_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.31kg IP20 $\approx 0.3^\circ$

270x86 55 2-25

	CODE
	320371W_
	320371S_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.45kg IP20 $\approx 0.3^\circ$

470x86 55 2-25

	CODE
	320671W_
	320671S_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply


	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

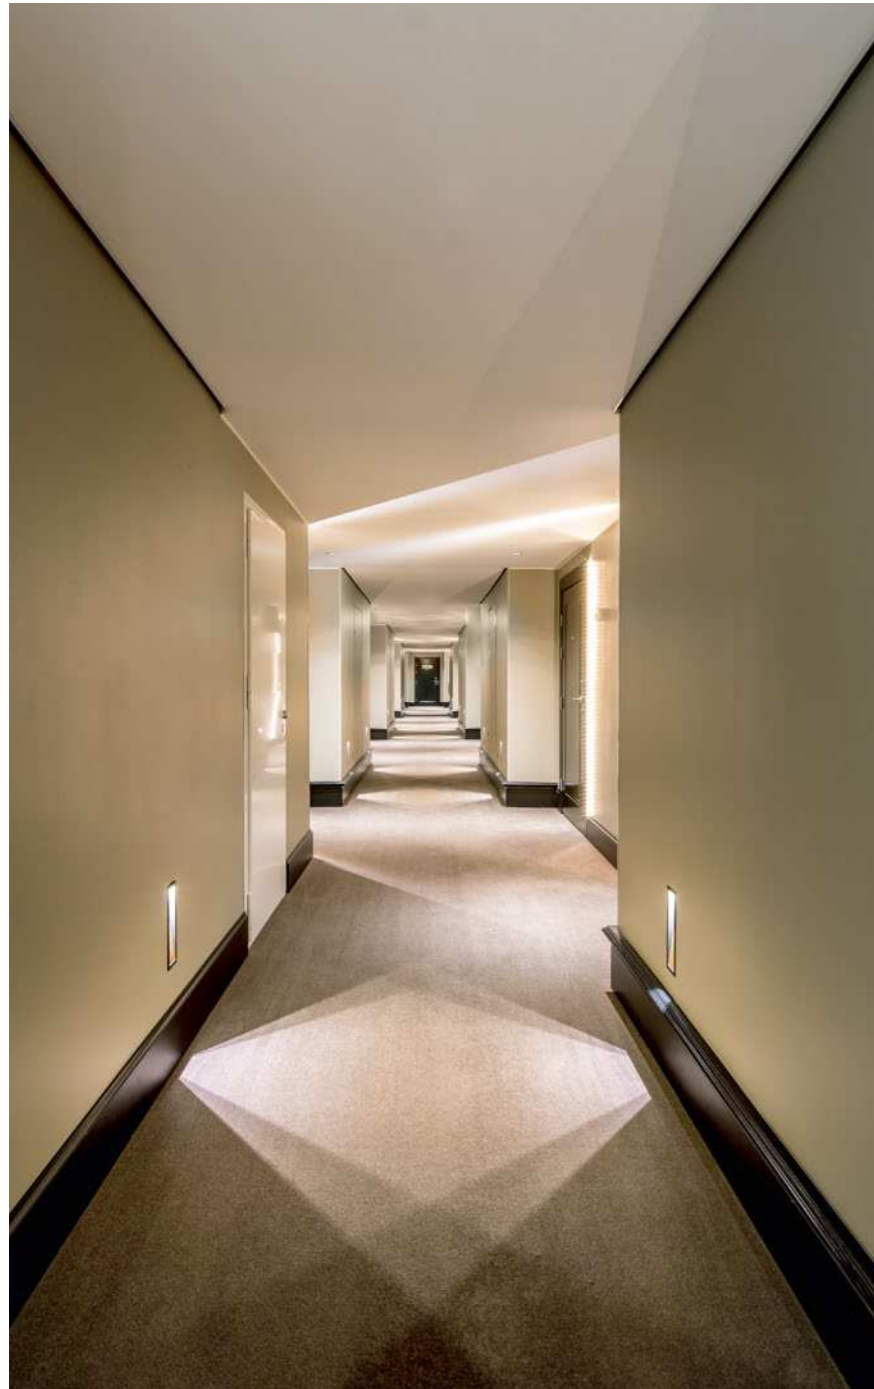

THEMIS

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20 0.3m

70x158 50 2-18

	CODE
	323271W_
	323271X_
	323271S_
	323271K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

recessed housing and plasterkit
on page 708



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20 0.3m

70x258 50 2-18

	CODE
	323371W_
	323371X_
	323371S_
	323371K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

recessed housing and plasterkit
on page 708



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20 0.3m

70x458 50 2-18

	CODE
	323671W_
	323671X_
	323671S_
	323671K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

recessed housing and plasterkit
on page 708



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP20 0.3m

47x182 40 4-40

3000K | >80 CRI | 90/150lm

	CODE
	327161W4
	327161B4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

	CODE
recessed housing	
incl. plasterkit	90012039
concrete	
housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 0.3m

115x117 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	327261W4
	327261B4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

	CODE
recessed housing	
incl. plasterkit	90012041
concrete	
housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP20 0.3m

115x185 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	327361W4
	327361B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 695

OPTIONAL

	CODE
recessed housing	
incl. plasterkit	90012043
concrete	
housing	90012042

**WALL
SURFACE
SPOTLIGHTS**



ODREY 1.0
p. 491



ODREY 2.0
p. 493



RAY MINI
p. 495



RAY
p. 497



BOX MINI
p. 503



BOX
p. 505



DOCUS MINI
p. 513



HEXO MINI
p. 515



TRAIN
p. 517



CENTRAL
p. 519



STATION
p. 521



SARA SNOOZE
p. 523



MICK SNOOZE
p. 527



MICK WALL 1.0
p. 529

**WALL
SURFACE
LUMINAIRES**



LEENS
p. 531



BENTA
p. 533



BENTO
p. 535



INCH
p. 537



SCAVA
p. 539

WALL SURFACE

p. 489 – 561



MILES ROUND
p. 541




MILES CARRÉ
p. 543




MILES 9.0
p. 545




ARZY
p. 547



VENN
p. 549



FINLIN 1.0
p. 553



FINLIN 4.0
p. 553



DARF
p. 555

**WALL
SURFACE
IP-RATED**



LIGHTDROP IP44
p. 557



MIRBA IP44
p. 559



MIRBI LONG IP44
p. 561

**WALL
SURFACE
DESIGNER
FAMILIES**



**ROOMOR
WALL**
p. 39



**WIRO
WALL**
p. 117



**MIRRO
WALL**
p. 57



**DRO
WALL**
p. 71



**REVER
WALL**
p. 133



**J.J.W.
WALL**
p. 157

SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL



MIX AND MATCH

weverducre.com/odrey

It exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. It looks stunning in almost any colour combination. And it is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. Corridors or restaurant walls can thus be skilfully accentuated.

Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.




CREATE YOUR VERY OWN ODREY

MOUNTING + SHADES

MOUNTING

available in ● black or ● gold



1.0



2.0



SHADES

available in ● black or ● gold



3.0
ø 100



4.0
ø 124



5.0
ø 115



3.0 + 4.0



4.0 + 4.0



5.0 + 3.0




ODREY

WALL SURFACE



p. 353
p. 365


p. 387



3.0



4.0



5.0

available from summer 2020

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

0.29kg IP20

mounting

	CODE
	257420G0
	257420B0

ALWAYS USE

shade 3.0 | 4.0 | 5.0 in gold

	CODE
	911423G1
	911424G1
	911425G1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5
1800-2850K	901229S9

shade 3.0 | 4.0 | 5.0 in black

	CODE
	911423B1
	911424B1
	911425B1

more lamps and specs on page 701





ODREY

WALL SURFACE



p. 353
p. 365


p. 387



3.0



4.0



5.0

available from summer 2020

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

0.29kg IP20 0.3

mounting

	CODE
	257320G0
	257320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5
1800-2850K	901229S9

more lamps and specs on page 701

ALWAYS USE

2 shades needed

shade 3.0 | 4.0 | 5.0 in gold

	CODE
3.0	911423G1
4.0	911424G1
5.0	911425G1

shade 3.0 | 4.0 | 5.0 in black

	CODE
3.0	911423B1
4.0	911424B1
5.0	911425B1



RAY mini

WALL SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.21kg IP20

aluminium | ø67 x 115

	CODE
	300220W0
	300220L0
	300220PO
	300220B0

wood | ø70 x 115


	CODE
	walnut 300220WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.36kg IP20

aluminium | ø67 x 115

	CODE
	301220W0
	301220L0
	301220PO
	301220B0

wood | ø70 x 200

	CODE
	walnut 301220WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim




	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



RAY

WALL SURFACE



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 ±0.3°

	CODE
	3221GOW0
	3221GOL0
	3221GOG0
	3221GOQ0
	3221GOP0
	3221GOB0


OPTIONAL

	CODE
QT14 LED 3W	
2700K 200lm	9019G705
3000K 300lm	9019G703

more lamps on page 703

	CODE
flaps for adjustable beam angle	
	900401W0

more lamps and specs on page 703

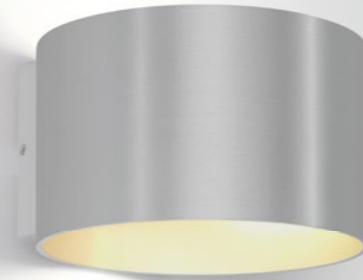

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

0.62kg IP20 ±0.3°

	CODE
	332168W_
	332168L_
	332168G_
	332168Q_
	332168P_
	332168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4
1800-2850K	400	>80	9

2.0 LED

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

0.69kg IP20 ±0.3°


	CODE
	332148W_
	332148L_
	332148G_
	332148Q_
	332148P_
	332148B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4
1800-2850K	2x200	>80	9



RAY

WALL SURFACE

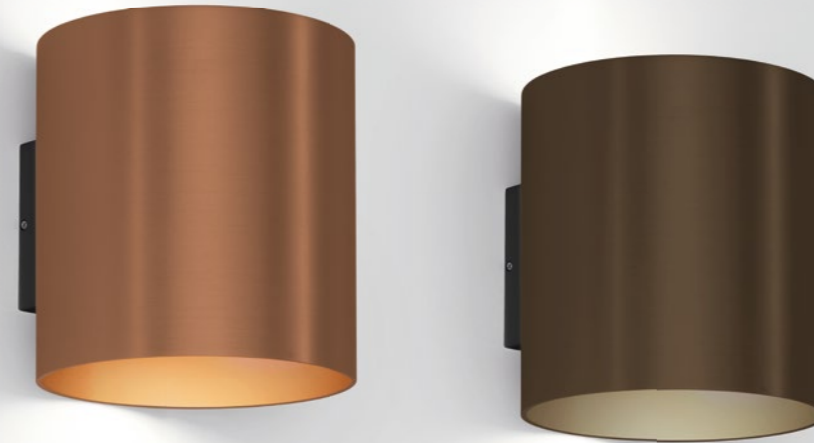

3.0 LED

2x LED 3W | 220-240VAC | 50-60Hz
 PCB 3-step | phase-cut dim
 aluminium powder coated
 brushed | incl. flaps for adjustable
 beam angle

0.85kg IP20 0-3°

CODE	
	332248W_
	332248L_
	332248G_
	332248Q_
	332248P_
	332248B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4
1800-2850K	2x200	>80	9






BOX mini

WALL SURFACE



p. 271



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

aluminium | 67 x 115

	CODE
	300120W0
	300120L0
	300120PO
	300120B0

walnut | 70 x 115


	CODE
	300120WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.44kg IP20

aluminium | 67 x 200

	CODE
	301120W0
	301120L0
	301120PO
	301120B0

walnut | 70 x 200

	CODE
	301120WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



BOX

WALL SURFACE




p. 275

p. 393

p. 579

p. 607



1.0 QT14

➤ QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed

⏱ 0.66kg ⊕ IP20 ⚡ 0.3~D

	CODE
	3211GOW0
	3211GOL0
	3211GOG0
	3211GOQ0
	3211GOP0
	3211GOB0
	walnut 3211GOWN0

OPTIONAL


	CODE
QT14 LED 3W	
2700K 200lm	9019G705
3000K 300lm	9019G703

more lamps on page 703

flaps for adjustable beam angle

	CODE
	900401W0

more lamps and specs on page 703




1.0 LED

Ⓛ LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

⏱ 0.60kg ⊕ IP20 ⚡ 0.3~D

	CODE
	331168W_
	331168L_
	331168G_
	331168Q_
	331168P_
	331168B_
	walnut 331168WN_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >80	2
3000K	440 >80	4
1800-2850K	400 >80	9



2.0 LED

Ⓛ 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

⏱ 0.67kg ⊕ IP20 ⚡ 0.3~D

	CODE
	331148W_
	331148L_
	331148G_
	331148Q_
	331148P_
	331148B_
	walnut 331148WN_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9





BOX

WALL SURFACE



3.0 LED

LED 2x LED 3W | 220-240VAC | 50-60Hz
 PCB 3-step | phase-cut dim
 aluminium powder coated
 brushed | incl. flaps for adjustable
 beam angle

⏸ 0.86kg ⊕ IP20 ⏸ 0.3°

CODE

	331248W_
	331248L_
	331248G_
	331248Q_
	331248P_
	331248B_
	331248WN_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9

UNIVERSAL STARS

SIMPLE FORMALITY

Even if maths wasn't your favourite subject: You'll love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. That makes them ideal for virtually any space. Regardless of whether they sparkle from the ceiling or shine from the walls. The sleek, narrow luminaires are available in six great colours, as well as in many different versions. Also for use outdoors. They'll elicit an admiring "wow" from your dear friends and relatives right in the entrance area. Who would have thought that geometry could be so enthralling?



HAVE A LOOK

weverducre.com/universalstars



BOX



DOCUS




HEXO



RAY


Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in sechs tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?

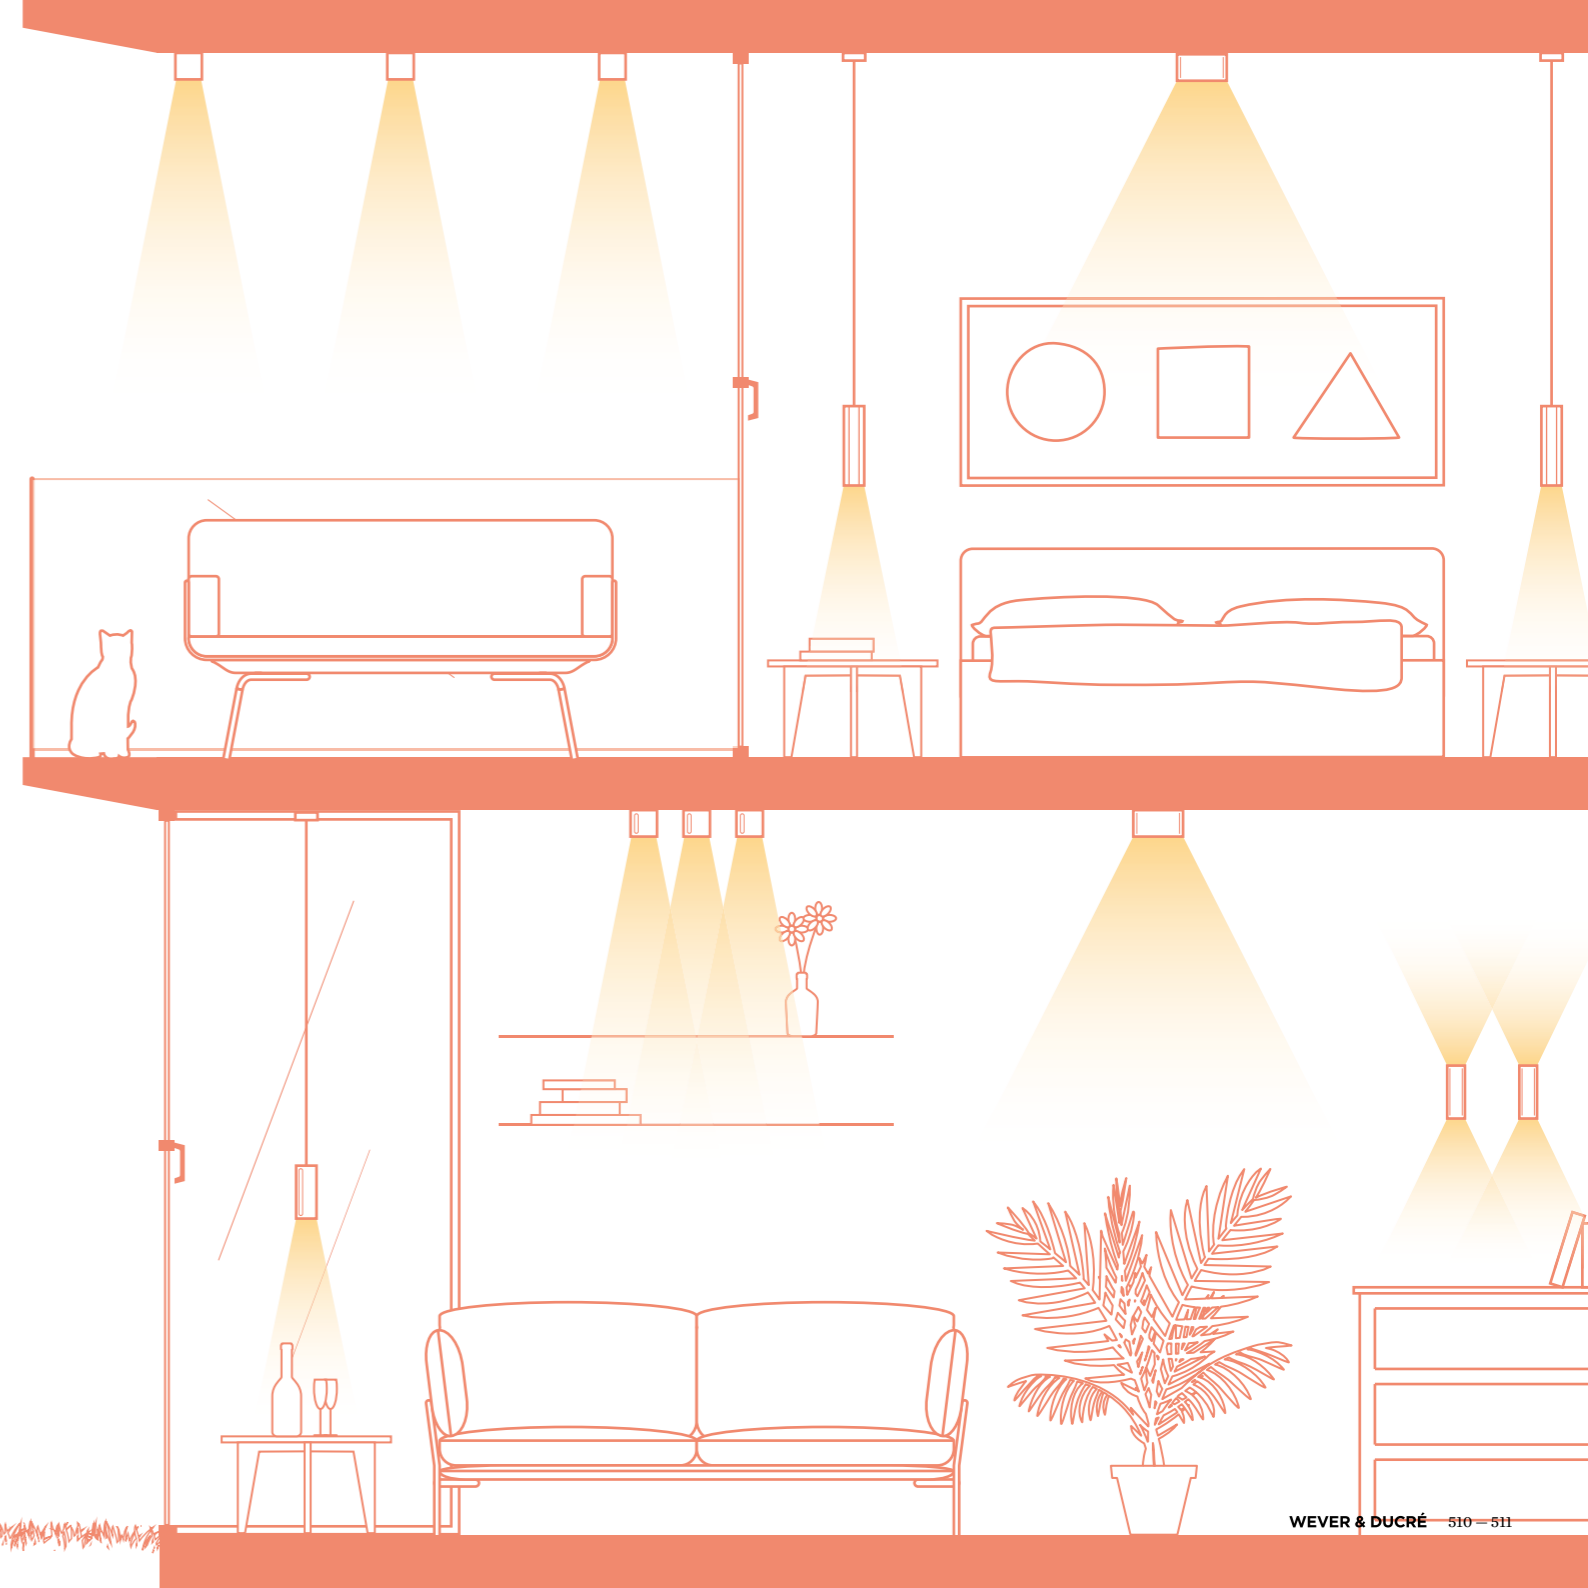



DOCUS mini

WALL SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20


CODE	
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.43kg IP20

CODE	
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



HEXO mini

WALL SURFACE

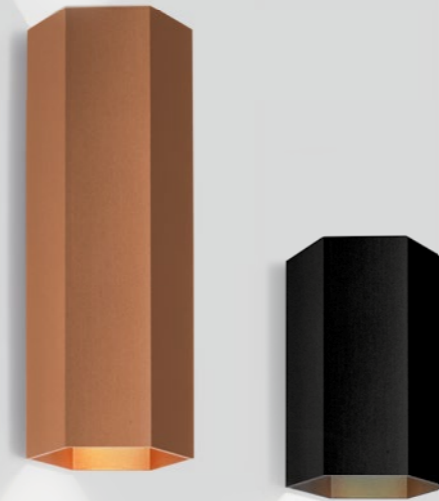

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.23kg IP20


CODE	
	300420G0
	300420Q0
	300420P0
	300420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.40kg IP20

CODE	
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701






TRAIN

WALL SURFACE



p. 613

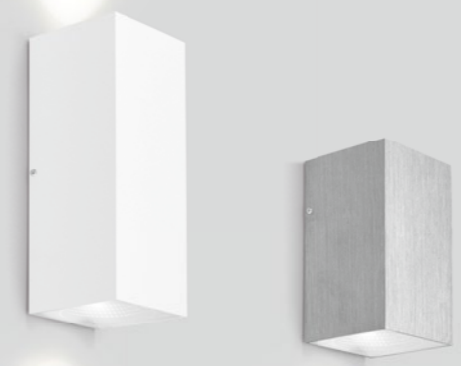

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
brushed

0.24kg IP20 36°

36°

2700K | >90 CRI | 390lm

Color	CODE
White	306668W3
Gold	306668G3
Black	306668B3

3000K | >90 CRI | 420lm

Color	CODE
White	306668W5
Grey	306668L5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
brushed

0.35kg IP20 36°

36°

2700K | >90 CRI | 2x260lm

Color	CODE
White	306768W3
Gold	306768G3
Black	306768B3

3000K | >90 CRI | 2x280lm

Color	CODE
White	306768W5
Grey	306768L5





CENTRAL

WALL SURFACE



p. 619



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.56kg IP20 0.3

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.5kg IP20 0.3



	CODE
	313574W_
	313574G_
	313574B_
	313574L_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5

	CODE
	313674W_
	313674G_
	313674B_
	313674L_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x240	>90	3
3000K	2x260	>90	5







STATION


WALL SURFACE



p. 621



1.0



2.0

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.52kg | IP20 | 0.3m | 6

3000K | >90 CRI | 520lm

CODE

314574W5

314574L5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.5kg | IP20 | 0.3m | 6

3000K | >90 CRI | 2x260lm

CODE

314674W5

314674L5



available from spring 2020


SARA snooze

WALL SURFACE



p. 309

p. 361





1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

0.329kg IP20 0.3m

90° 330°

CODE	
	157320W0
	157320G0
	157320B0
	157320K0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE

2700K 901228W2

3000K 901228W4

1800-2850K 901229S9

more lamps and specs on page 701





MICK snooze


WALL SURFACE



p. 319

p. 349

DESIGNED BY
S&R CORNELISSEN



1.0

LED 7.5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
aluminium powder coated
incl. switch on/off

0.39kg | IP20 | 0.3m | P

A 25° G 350° C 90°

CODE

159354J_ (White)
159354K_ (Black)

LIGHT COLOUR	LUMEN CRI	CODE
2700K	190 >90	3
3000K	200 >90	5

available from autumn 2020



MICK WALL



WALL SURFACE



p. 319

p. 349

DESIGNED BY
S&R CORNELISSEN

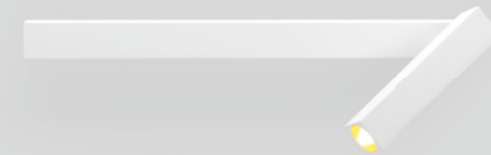

1.0


LED 7W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.35kg IP20 $\pm 0.3^\circ$

$\Delta 25^\circ$ $\ominus 350^\circ$ $\Psi 90^\circ$

CODE	
	159354J_
	159354K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	230 >90	3
3000K	250 >90	5



2.0

2x LED 7W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.62kg IP20 $\pm 0.3^\circ$

$\Delta 25^\circ$ $\ominus 350^\circ$ $\Psi 90^\circ$

CODE	
	159454J_
	159454K_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x230 >90	3
3000K	2x250 >90	5

available from autumn 2020



LEENS

WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.1kg ⊕ IP20 ⌀=0,3+D Ⓢ

3000K | >90 CRI | 300lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.90kg ⊕ IP20 ⌀=0,3+D Ⓢ

3000K | >90 CRI | 2x150lm



	CODE
	311274W5
	311274L5
	311274B5



PRIVATE RESIDENCE AUSTRIA

BENTA

WALL SURFACE



1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg | IP20 | 0.3

3000K | >90 CRI | 310lm

	CODE
	310174W5
	310174B5

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.25kg | IP20 | 0.3



3000K | >90 CRI | 310lm

	CODE
	310274W5
	310274B5



BENTO

WALL SURFACE

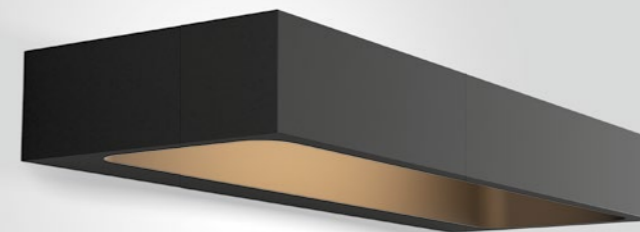

1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


0.74kg IP20

3000K | >90 CRI | 310lm

CODE

309274W5

309274B5



3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.48kg IP20

3000K | >90 CRI | 310lm

CODE


309374W5

309374B5



INCH

WALL SURFACE




1.5

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.49kg | IP20 | $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312164W4
	312164B4




2.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.40kg | IP20 | $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312264W4
	312264B4




5.4

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.65kg | IP20 | $\pm 0.3^\circ$


3000K | >80 CRI | 480lm

	CODE
	312364W4
	312364B4



SCAVA

WALL SURFACE



1.0

LED 25W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker | phase-cut
 dim | aluminium powder coated
 opal PC cover

0.42kg | IP20 | 0.3m | 1

CODE
350168W_
350168B_
350168K_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1100 >90	3
3000K	1200 >90	5

available from summer 2020



MILES

WALL SURFACE



2.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium powder coated | brushed

0.77kg IP20 0.3-10


marble | walnut

	CODE
	317574MW
	317574MB
	317574WN

aluminium

	CODE
	317574W
	317574G
	317574Q
	317574P
	317574B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	430	>90	5



3.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim | aluminium powder coated | brushed

1.09kg IP20 0.3-10

marble | walnut

	CODE
	317774MW
	317774MB
	317774WN

aluminium



	CODE
	317774W
	317774G
	317774Q
	317774P
	317774B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	430	>90	5



MILES

WALL SURFACE



2.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker
 phase-cut dim | aluminium powder coated | brushed

1.03kg IP20 S+0.3+D P

marble | walnut

	CODE
	317474MW_
	317474MB_
	317474WN_

aluminium

	CODE
	317474W_
	317474G_
	317474Q_
	317474P_
	317474B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	430	>90	5

3.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker
 phase-cut dim | aluminium powder coated | brushed

1.63kg IP20 S+0.3+D P

marble | walnut

	CODE
	317674MW_
	317674MB_
	317674WN_

aluminium


	CODE
	317674W_
	317674G_
	317674Q_
	317674P_
	317674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	430	>90	5



MILES

WALL SURFACE



9.0

LED 30W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.13kg IP20 0.3


marble | walnut

	CODE
	317274MW_
	317274MB_
	317274WN_

aluminium

	CODE
	317274W_
	317274L_
	317274G_
	317274B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1480	>90	3
3000K	1600	>90	5



12.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.62kg IP20 0.3

marble | walnut

	CODE
	317374MW_
	317374MB_
	317374WN_

aluminium

	CODE
	317374W_
	317374L_
	317374G_
	317374B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2050	>90	3
3000K	2200	>90	5





ARZY

WALL SURFACE



reddot design award
winner 2010

DESIGNED BY
FRANK JANSSENS

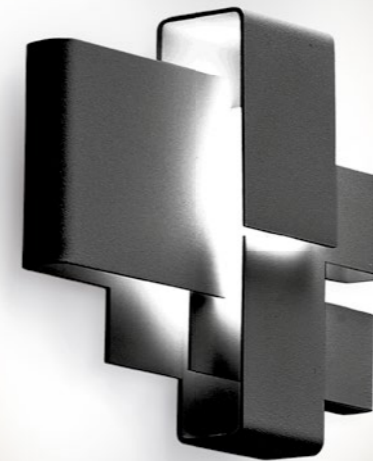


1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | powder coated
chrome

1.56kg ⊕ IP20 ⚡ ±0.3V Ⓢ

3000K | >80 CRI | 380lm

	CODE
	325163W4
	325163C4
	325163B4

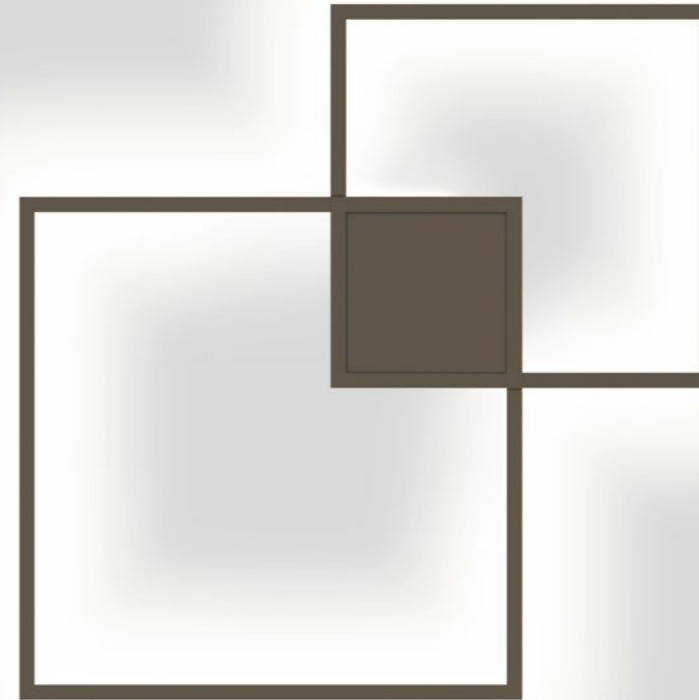

VENN


WALL SURFACE



p. 335 p. 441



DESIGNED BY S&R CORNELISSEN



1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
aluminium powder coated
opal PMMA cover | indirect

2.50kg IP20 $\pm 0.3^\circ$


phase-cut dim

	CODE
	149184W
	149184Q
	149184B

DALI dim

	CODE
	149185W
	149185Q
	149185B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4



2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
aluminium powder coated
opal PMMA cover | direct/indirect

2.50kg IP20 $\pm 0.3^\circ$

phase-cut dim


	CODE
	149284W
	149284Q
	149284B

DALI dim

	CODE
	149285W
	149285Q
	149285B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



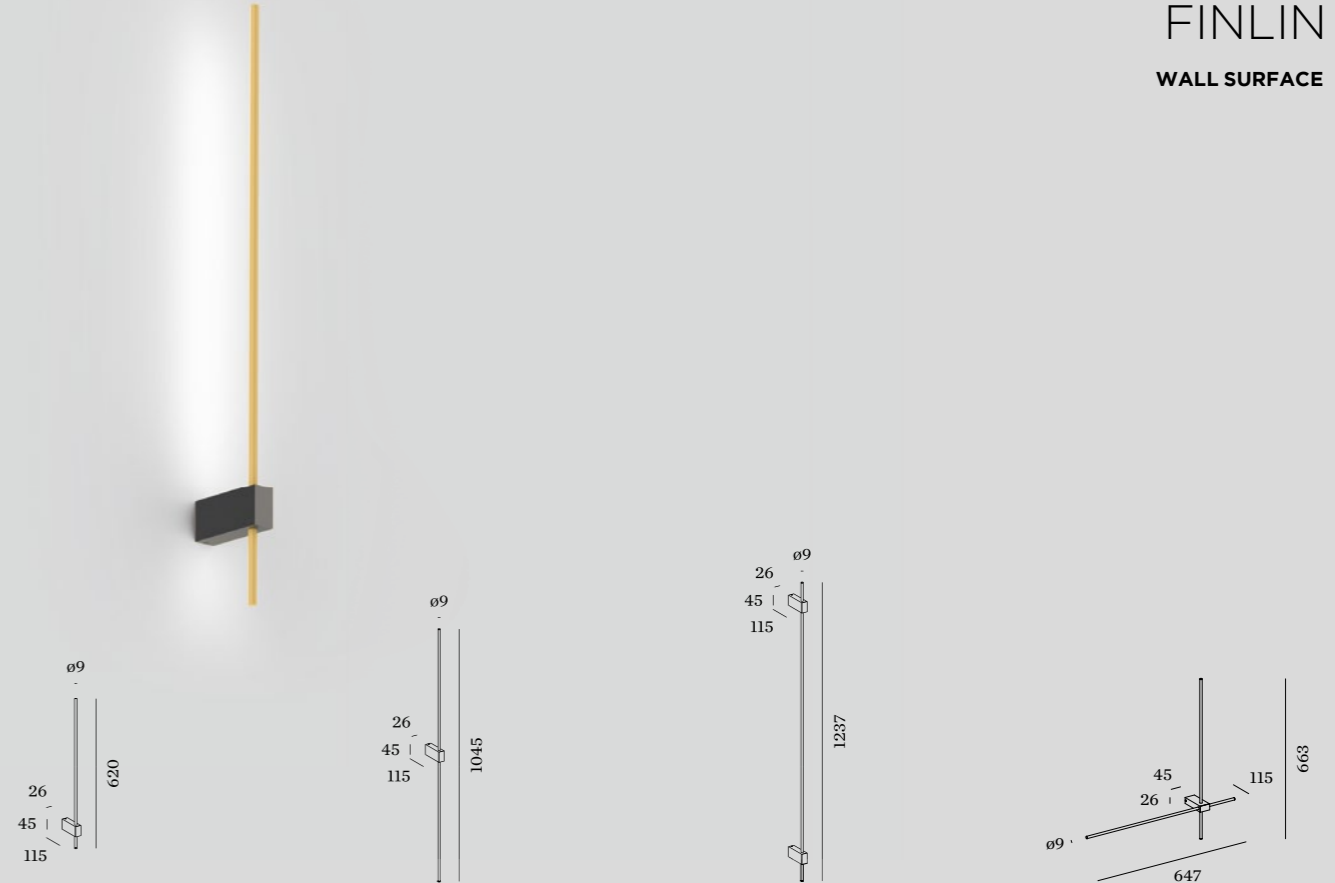

1.0

LED 6W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.15kg IP20 3-0.3-0.3

CODE	
	370184B_
	370184K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	380	>90	5

2.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.18kg IP20 3-0.3-0.3

CODE	
	370284B_
	370284K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

3.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.30kg IP20 3-0.3-0.3

CODE	
	370384B_
	370384K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

4.0


LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.20kg IP20 3-0.3-0.3

CODE	
	370484B_
	370484K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

available from autumn 2020

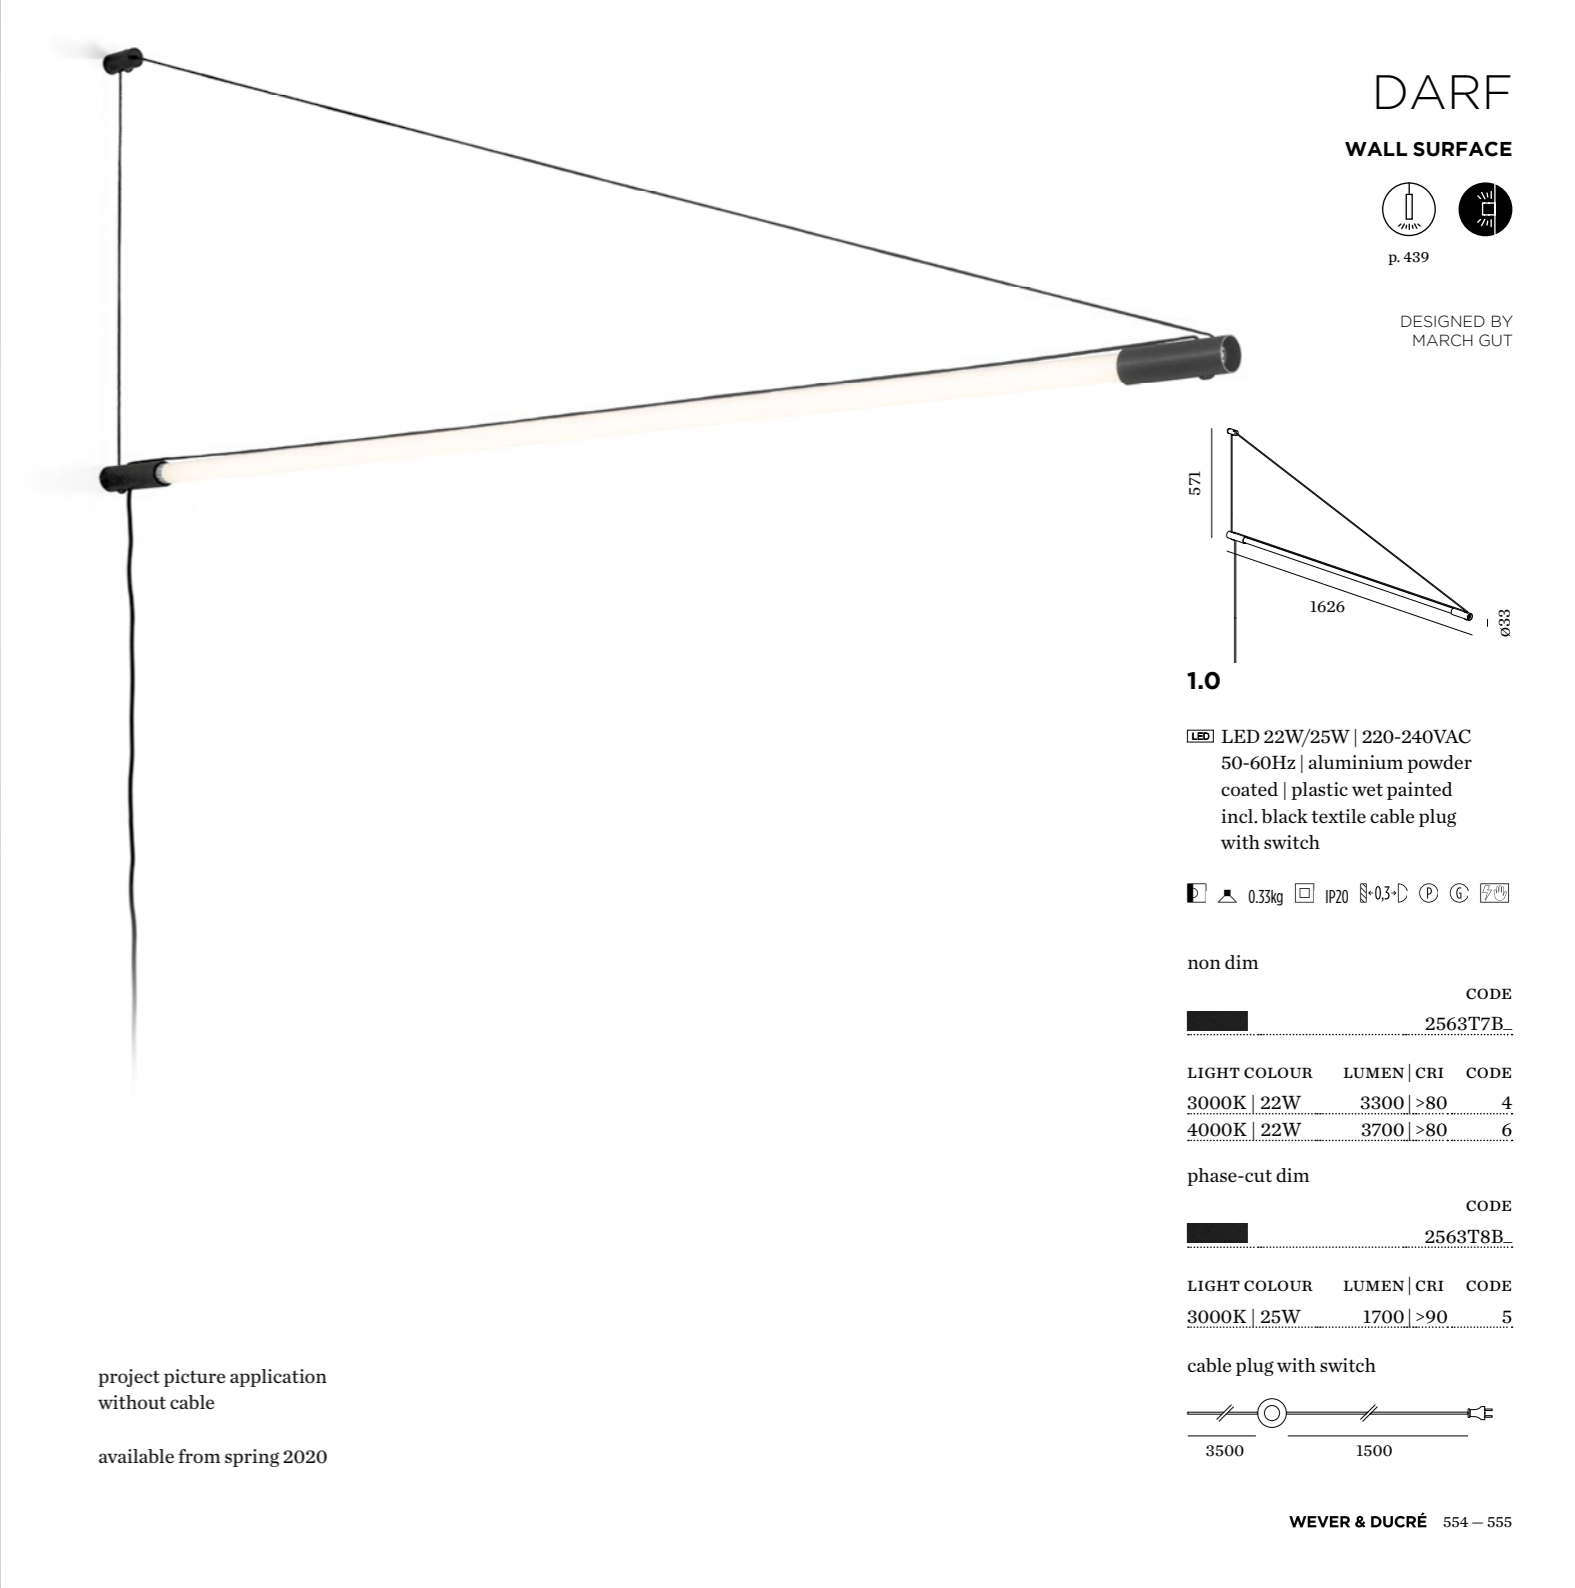


DARF

WALL SURFACE



p. 439

DESIGNED BY
MARCH GUT

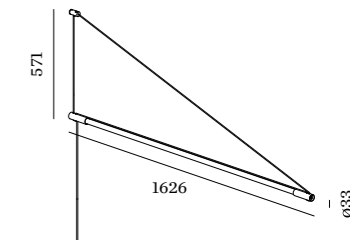

1.0

LED 22W/25W | 220-240VAC
50-60Hz | aluminium powder
coated | plastic wet painted
incl. black textile cable plug
with switch

0.33kg IP20 0.3 P C 700

non dim

CODE
2563T7B


LIGHT COLOUR	LUMEN	CRI	CODE
3000K 22W	3300	>80	4
4000K 22W	3700	>80	6

phase-cut dim

CODE
2563T8B

LIGHT COLOUR	LUMEN	CRI	CODE
3000K 25W	1700	>90	5

cable plug with switch




project picture application
without cable

available from spring 2020

LIGHTDROP IP44

WALL SURFACE

DESIGNED BY
STUDIO MANGO



1.2

QT14 max. 40W | G9
220-240VAC | 50-60Hz
powder coated | chrome plated

0.41kg IP44 0.3

CODE

3071V0W0

3071V0C0

3071V0B0

OPTIONAL

QT14 LED 3W

CODE

2700K | 200lm


9019G705

more lamps and specs on page 703



MIRBA IP44

WALL SURFACE




1.0 LED

LED LED 9W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

📦 📏 🗿 🗣️ 0.51kg 🌐 IP44 📏-0.3-📏 📄

CODE	
☐	328184W
▬	328184E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 560	>90	3
3000K	L 360/H 620	>90	5




2.0 LED

LED LED 12W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

📦 📏 🗿 🗣️ 0.65kg 🌐 IP44 📏-0.3-📏 📄

CODE	
☐	328284W
▬	328284E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 530/H 820	>90	3
3000K	L 590/H 900	>90	5



3.0 LED

LED LED 18W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

📦 📏 🗿 🗣️ 0.69kg 🌐 IP44 📏-0.3-📏 📄

CODE	
☐	328384W
▬	328384E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 610/H 1050	>90	3
3000K	L 680/H 1150	>90	5




MIRBI long IP44

WALL SURFACE



p. 261


p. 329



1.0

LED 4/6W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover


0.72kg IP44 0.3



2.0

LED 7/12W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover

1.53kg IP44 0.3



3.0

LED 12/18W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover

2.25kg IP44 0.3

CODE
329184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L190/H300	>90	3
3000K	L210/H330	>90	5

CODE
329284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L320/H550	>90	3
3000K	L365/H620	>90	5

CODE
329384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L550/H750	>90	3
3000K	L610/H840	>90	5

OUT

DOOR

CEILING RECESSED

p. 567

CEILING
RECESSED





INTRA
p. 567



INTRA

OUTDOOR
CEILING RECESSED



1.0 OPAL

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal glass | polyamide

0.15kg IP65 0.3° P


76-78 70 2-25

2.0 SPOT

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
clear lens | polyamide

0.15kg IP65 0.3° P A 38°

76-78 70 2-25

	CODE
	733168W_
	733168L_
	733168D_
	733168B_

	CODE
	733158W_
	733158L_
	733158D_
	733158B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	350	>90	5

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	590	>80	4

CEILING SURFACE

p. 571 – 585

CEILING SURFACE SPOTLIGHTS



TRAM ROUND
p. 571



TUBE
p. 573




RAY
p. 575



TRAM CARRÉ
p. 571



TUBE CARRÉ
p. 577



BOX
p. 579

CEILING SURFACE LUMINAIRES



ROB
p. 583



BLAS 1.0
p. 585



BLAS 2.0
p. 585



TRAM

OUTDOOR
CEILING SURFACE



p. 595




1.0 ROUND

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.24kg IP65 0.3° 36°

	CODE
	747368W_
	747368A_
	747368B_



LIGHT COLOUR LUMEN | CRI CODE
3000K 420 | >90 5



1.0 CARRÉ


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.26kg IP65 0.3° 36°

	CODE
	747468W_
	747468A_
	747468B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 420 | >90 5

available from summer 2020

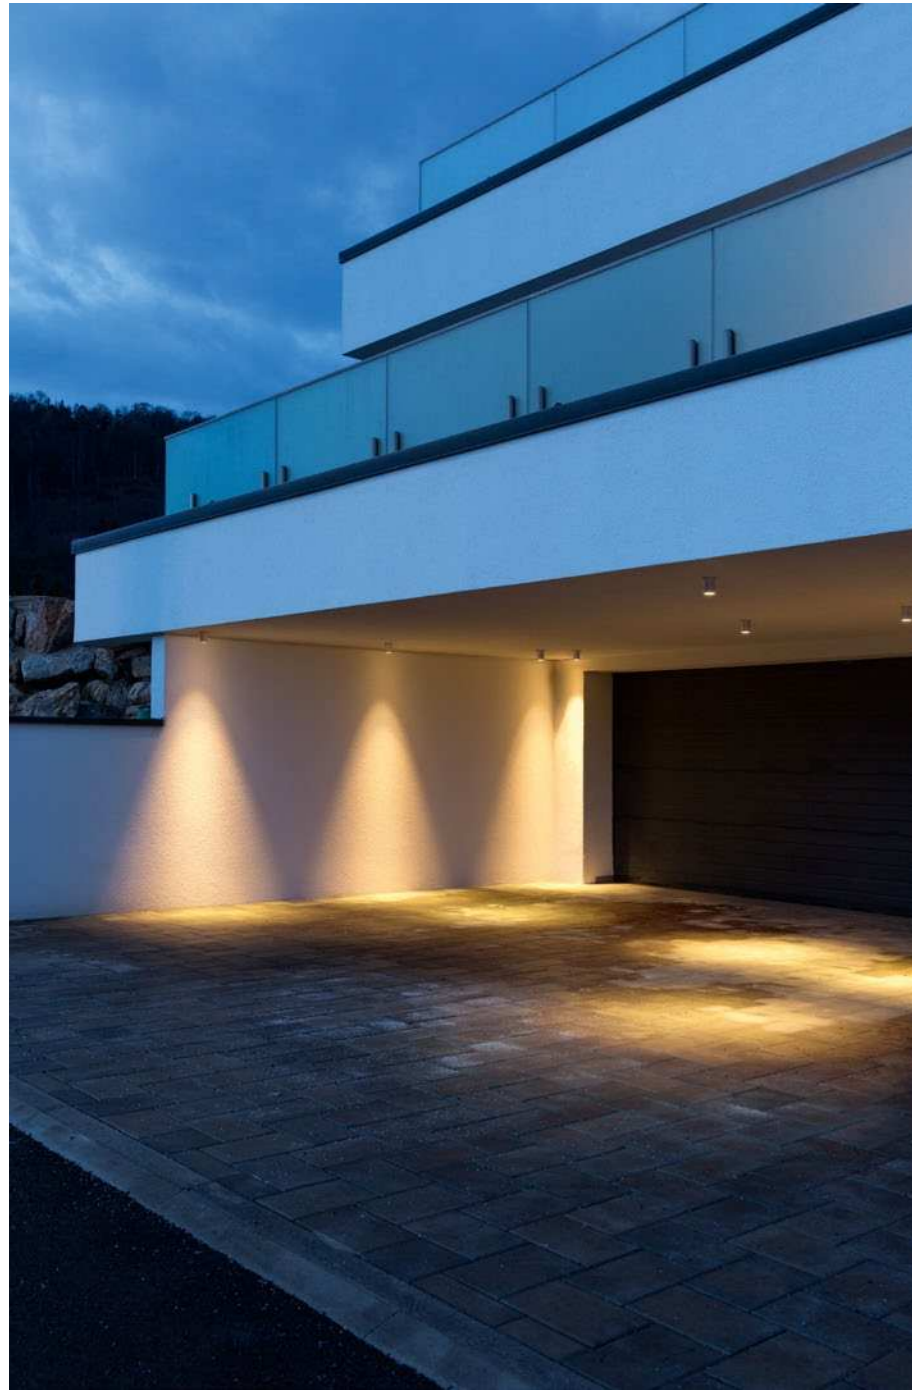


TUBE

OUTDOOR
CEILING SURFACE



p. 597



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.53kg IP65 30° 38°




	CODE
	734164W
	734164D
	734164B

LIGHT COLOUR	LUMEN CRI	CODE
3000K	440 >80	4

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.60kg IP65 30° 38°

	CODE
	734120W0
	734120D0
	734120B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim
CODE


2700K	905227S2
3000K	905227S4

more lamps and specs on page 701




RAY

OUTDOOR CEILING SURFACE




p. 267 p. 367
p. 377 p. 401 p. 497 p. 601



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.63kg | IP65 | 30°



inner cover

OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041B1

CODE

	735364W_
	735364D_
	735364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9





TUBE CARRÉ

**OUTDOOR
CEILING SURFACE**



p. 603



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.64kg IP65 0.3 38°

	CODE
	734264W
	734264D
	734264B

LIGHT COLOUR	LUMEN CRI	CODE
3000K	380 >90	5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP65 0.3


	CODE
	734220W0
	734220D0
	734220B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim
CODE

2700K	905227S2
3000K	905227S4

more lamps and specs on page 701







inner reflector



inner cover

OPTIONAL

single inner reflector


	CODE
	911211W1
	911211Q1
	911211D1
	911211B1

inner cover

	CODE
	911011W1
	911011Q1
	911011D1
	911011B1

BOX

OUTDOOR
CEILING SURFACE




p. 275

p. 393

p. 505





p. 607



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.67kg IP65 0.3-32°

	CODE
	735164W_
	735164Q_
	735164D_
	735164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9








ROB
OUTDOOR
CEILING SURFACE



p. 323



1.6

LED 13W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker
 phase-cut dim | aluminium
 powder coated | opal PMMA cover

0.70kg IP44 0.3-1

	CODE
	701184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	860	>90	3
3000K	950	>90	5

OPTIONAL

	CODE
dimmer	
for switch	90019017
for din rail	90019018

more specs on page 699

2.6

LED 18W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker
 phase-cut dim | aluminium
 powder coated | opal PMMA cover

1.20kg IP44 0.3-1

	CODE
	701284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1250	>90	3
3000K	1380	>90	5

OPTIONAL

	CODE
dimmer	
for switch	90019017
for din rail	90019018

more specs on page 699

3.5

LED 32W | 220-240VAC | 50-60Hz
 PCB 3-step low flicker
 phase-cut dim | aluminium
 powder coated | opal PMMA cover

1.90kg IP44 0.3-1

	CODE
	701384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1820	>90	3
3000K	1950	>90	5

OPTIONAL



	CODE
dimmer	
for switch	90019017
for din rail	90019018

more specs on page 699



BLAS

OUTDOOR
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated | glass

1kg IP65 0.3

CODE	
	736187W_
	736187D_
	736187B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 640 | >80 4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated | glass

1.3kg IP65 0.3

CODE	
	736287W_
	736287D_
	736287B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 640 | >80 4

WALL RECESSED

p. 589 – 591

WALL
RECESSED



SMILE IN 1.0
p. 589



SMILE IN 2.0
p. 589



ORIS 0.7
p. 591



ORIS 2.0
p. 591





SMILE IN

**OUTDOOR
WALL RECESSED**



p. 475



1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP65 $\pm 0.3^\circ$ 4

86 40 min 13

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 $\pm 0.3^\circ$ 4


86 40 min 13

CODE	
	702151W_
	702151D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230/320	>80	4

CODE	
	703151W_
	703151D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230/320	>80	4



ALWAYS USE

power supply IP67

CODE	
350mA 7W	90213301
500mA 7W	90214301

more power supplies on page 699

OPTIONAL

CODE	
recessed ring	90012030

ALWAYS USE

power supply IP67

CODE	
350mA 7W	90213301
500mA 7W	90214301

more power supplies on page 699


OPTIONAL

CODE	
recessed ring	90012030




ORIS

OUTDOOR WALL RECESSED



p. 485



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP65 0.3+D 6

47x182 40 4-40

	CODE
	709161W_
	709161D_
	709161B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 90/150 | >80 4

ALWAYS USE


power supply IP66

	CODE
350mA 3W	90213101
700mA 3W	90215101

more power supplies on page 699

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012039
concrete housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP65 0.3+D 6

115x117 40 4-40

	CODE
	709261W_
	709261D_
	709261B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 180/300 | >80 4

ALWAYS USE


power supply IP66

	CODE
350mA 3W	90213101
700mA 7W	90215301

more power supplies on page 699

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012041
concrete housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 0.3+D 6

115x185 40 4-40

	CODE
	709361W_
	709361D_
	709361B_

LIGHT COLOUR LUMEN | CRI CODE
3000K 180/300 | >80 4

ALWAYS USE


power supply IP66

	CODE
350mA 3W	90213101
700mA 7W	90215301

more power supplies on page 699

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012043
concrete housing	90012042



WALL SURFACE

p. 595 – 637

WALL SURFACE SPOTLIGHTS



TRAM
p. 595



TUBE
p. 597



RAY
p. 601



TUBE CARRÉ
p. 603



BOX
p. 607




TRAIN
p. 613



TRAIN NARROW
p. 617




CENTRAL
p. 619



STATION
p. 621



BOXX
p. 623



X-BEAM
p. 625

WALL SURFACE LUMINAIRES




SMILE ON 1.0
p. 627



SMILE ON 2.0
p. 627



SMILE
p. 629



TAPE
p. 631



SWAM
p. 633



GETTON 1.0
p. 635



GETTON 2.0
p. 635



PALOS 1.0
p. 637



PALOS 2.0
p. 637




PRIVATE RESIDENCE AUSTRIA

TRAM

OUTDOOR
WALL SURFACE



p. 571



1.0


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.25kg IP65 0.3

36°

	CODE
	747168W_
	747168A_
	747168B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5



2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.30kg IP65 0.3

36°

	CODE
	747268W_
	747268A_
	747268B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2x280 >90	5

available from summer 2020





TUBE

OUTDOOR
WALL SURFACE



p. 573



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.45kg IP65 0.3-10 38°

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.52kg IP65 0.3-10

	CODE
	711164W_
	711164D_
	711164B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	390 >90	5

	CODE
	711120W0
	711120D0
	711120B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim
CODE

2700K	905227S2
3000K	905227S4

more lamps and specs on page 701




TUBE

OUTDOOR
WALL SURFACE



p. 573



2.0 LED

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg | IP65 | 30° | 38°

	CODE
	711264W_
	711264D_
	711264B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2x390 >90	5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.90kg | IP65 | 30° | 38°

	CODE
	711220W0
	711220D0
	711220B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim
CODE

2700K	905227S2
3000K	905227S4

more lamps and specs on page 701




RAY

OUTDOOR WALL SURFACE



p. 267 p. 367 p. 401 p. 497 p. 575
p. 377

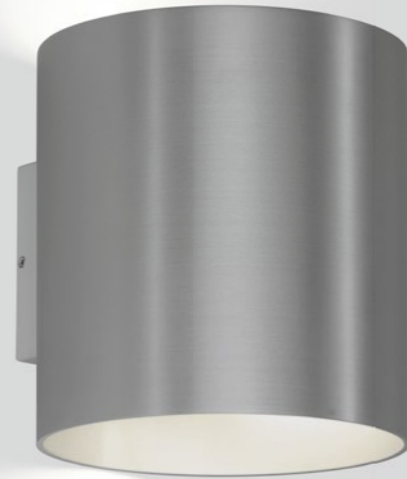

1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

CODE
741168W_
741168D_
741168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



2.0

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

CODE
741148W_
741148D_
741148B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4




3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

CODE
741268W_
741268D_
741268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



4.0

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

CODE
741248W_
741248D_
741248B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4





PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TECLUX OY + SIGGE / ANTTI KORPI FINLAND

TUBE CARRÉ

OUTDOOR
WALL SURFACE



p. 577



1.0 LED

LED | LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.66kg IP65 0.3 38°

	CODE
	744164W_
	744164D_
	744164B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	390 >90	5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.71kg IP65 0.3

	CODE
	744120W0
	744120D0
	744120B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim
CODE

2700K	905227S2
3000K	905227S4

more lamps and specs on page 701





TUBE CARRÉ

**OUTDOOR
WALL SURFACE**



p. 577



2.0 LED

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1kg IP65 0.3 38°

	CODE
	744264W
	744264D
	744264B

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2x390 >90	5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.05kg IP65 0.3 38°

	CODE
	744220W0
	744220D0
	744220B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim

	CODE
2700K	905227S2
3000K	905227S4

more lamps and specs on page 701






BOX

OUTDOOR WALL SURFACE



p. 275 p. 393 p. 505 p. 579



1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.60kg IP65

	CODE
	740168W_
	740168Q_
	740168D_
	740168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

2.0

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.66kg IP65

	CODE
	740148W_
	740148Q_
	740148D_
	740148B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4







BOX

OUTDOOR WALL SURFACE



p. 275 p. 393 p. 505 p. 579



3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.67kg IP65

CODE
740268W_
740268Q_
740268D_
740268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

4.0

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.86kg IP65

CODE
740248W_
740248Q_
740248D_
740248B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4




TRAIN

OUTDOOR
WALL SURFACE



p. 517



1.0


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.24kg IP65 0.3-10

38°

CODE	
	719868W_
	719868D_
	719868B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5



2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.35kg IP65 0.3-10

38°


CODE	
	719968W_
	719968D_
	719968B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2x280 >90	5





PRIVATE RESIDENCE CZECH REPUBLIC



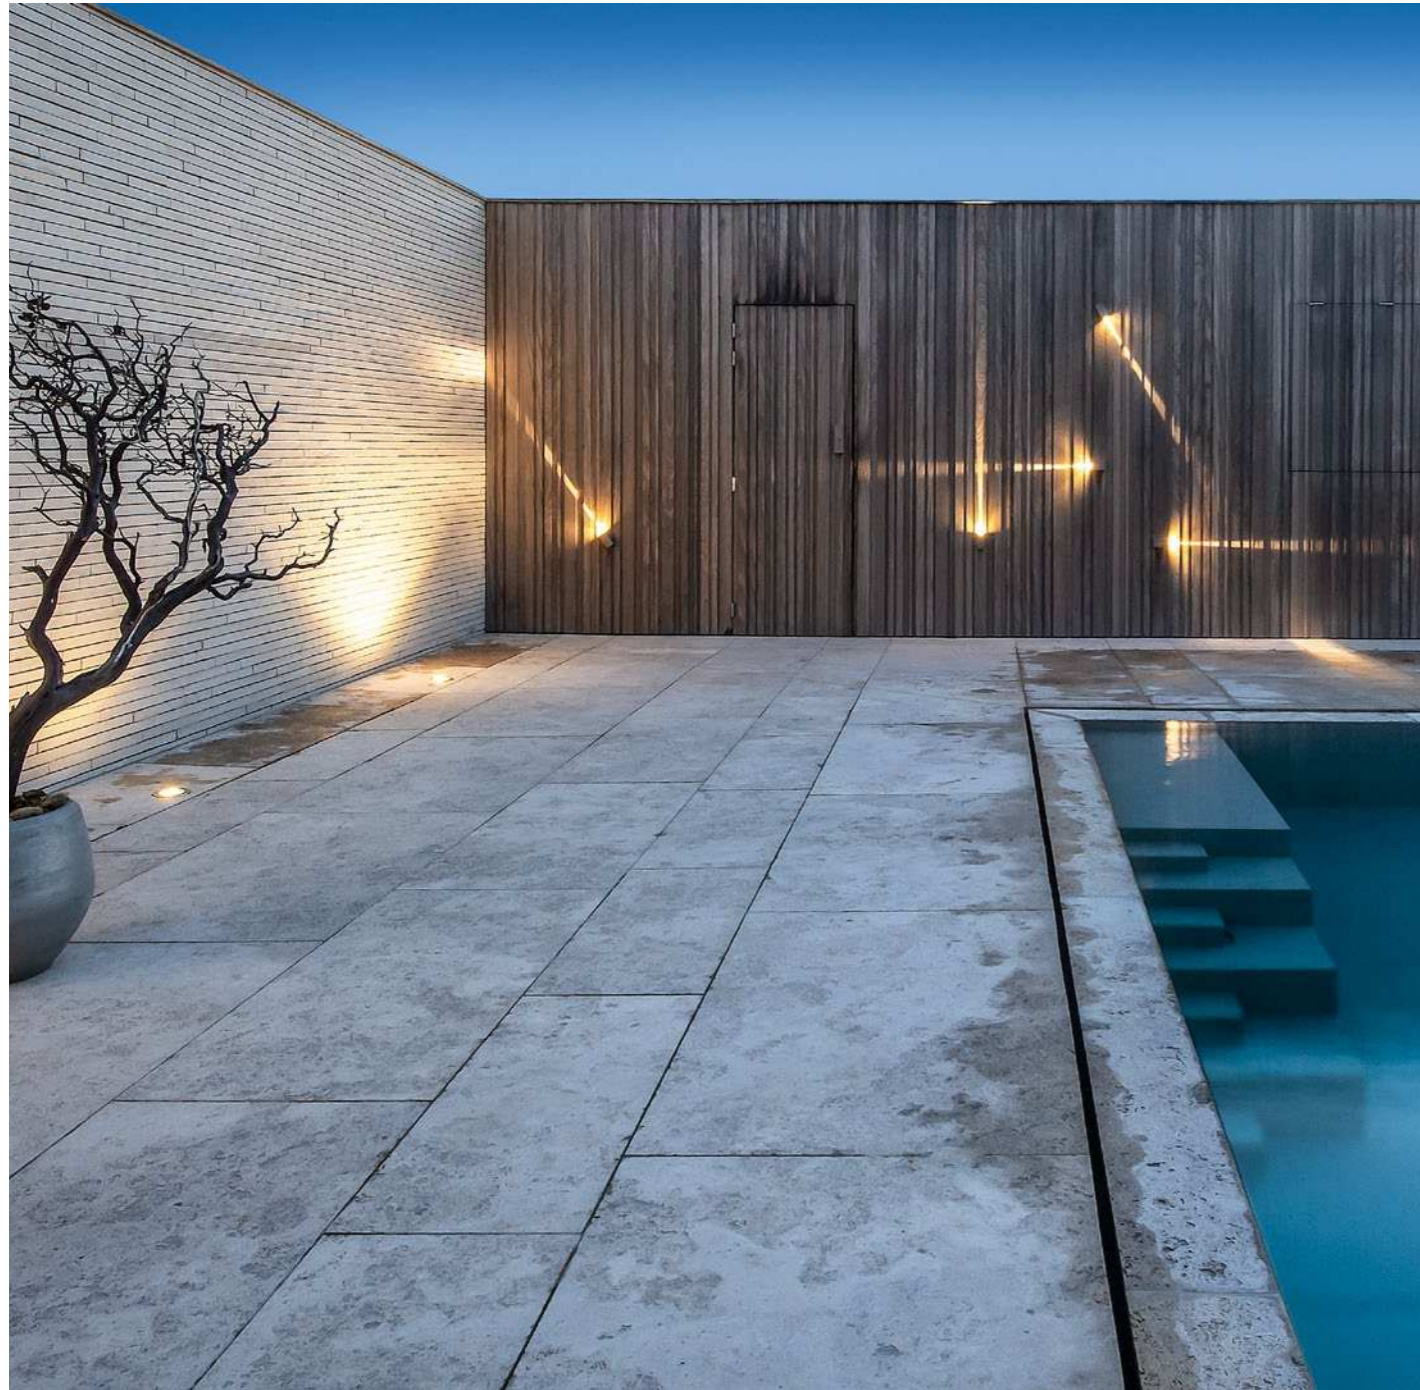

TRAIN NARROW

**OUTDOOR
WALL SURFACE**



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.24kg IP65 0.3° 5°

narrow up or narrow down

CODE

719143D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 120 | >80 4

2.0

2x LED 3W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.35kg IP65 0.3° 5°

narrow up | narrow down

CODE

719243D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 2x75 | >80 4

narrow up | flood down

CODE

719253D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 80/200 | >80 4





CENTRAL

OUTDOOR
WALL SURFACE



p. 519



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg IP65 $\pm 0.3^\circ$

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg IP65 $\pm 0.3^\circ$



CODE
313774W_
313774D_
313774A_
313774B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	520	>90	5

CODE
313874W_
313874D_
313874A_
313874B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x260	>90	5







PRIVATE RESIDENCE AUSTRIA

STATION

OUTDOOR
WALL SURFACE



p. 521



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.86kg | IP65 | 0.3° | G



	CODE
	314774D_
	314774B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	520 >90	5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg | IP65 | 0.3° | G


	CODE
	314874D_
	314874B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2x260 >90	5



BOXX

OUTDOOR WALL SURFACE



1.0

2x 2xLED 3W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | aluminium powder
coated | incl. flaps for adjustable
beam angle

0.93kg | IP65 | 0.3° |



CODE	
	739148W_
	739148D_
	739148B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >80	2
3000K	2x440 >80	4



X-BEAM

OUTDOOR
WALL SURFACE



1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

±0.3° 120° 0/110°

2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

±0.3° 15° 0/110°

CODE
700364D

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	1040	>80	4

CODE
700354D

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	895	>80	4

OPTIONAL

CODE
snoot 90019023

OPTIONAL


CODE
snoot 90019023





SMILE ON

OUTDOOR
WALL SURFACE



1.0


LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.43kg | IP65 | 0.3° | G

CODE

702258W_
702258D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 370 | >90 5



2.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.65kg | IP65 | 0.3° | G

CODE

703258W_
703258D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 370 | >90 5






SMILE

OUTDOOR
WALL SURFACE



p. 675

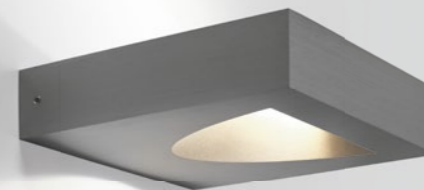

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.02kg IP65 0.3m

	CODE
	703354W_
	703354D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>90	5


2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.87kg IP65 0.3m

	CODE
	703454W_
	703454D_


LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>90	5

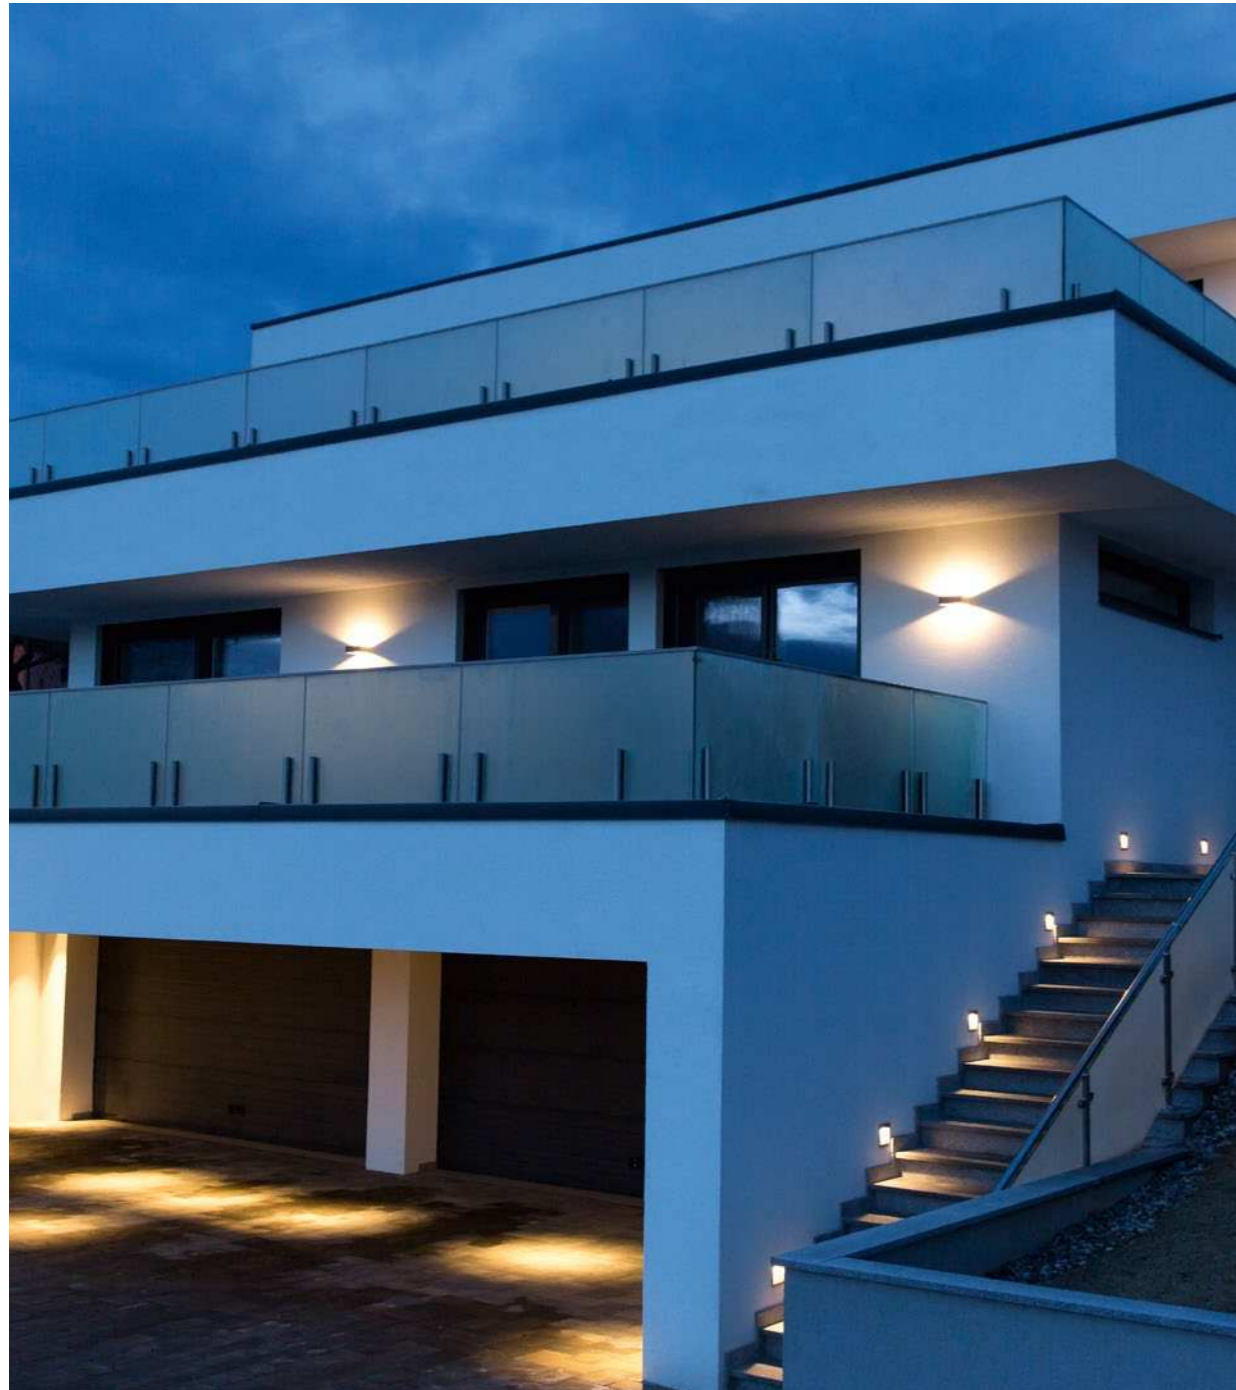

PRIVATE RESIDENCE | HERZBLUT DESIGN AUSTRIA

TAPE

OUTDOOR
WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg | IP65 | 0.3° |

CODE	
	722174W_
	722174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	420	>90	5




SWAM

OUTDOOR
WALL SURFACE



p. 667




1.0

LED 8W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.95kg IP65 0.3

	CODE
	746274K_
	746274B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	210	>90	3



1.1




LED 13W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.95kg IP65 0.3

	CODE
	746374K_
	746374B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3

available from autumn 2020



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal glass

0.83kg IP65 0.3-1 4

CODE	
White	717474W_
Grey	717474D_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	665 >80	4

OPTIONAL

big cover

CODE	
White	911141W1
Grey	911141D1

more details on page 716

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
clear glass

0.83kg IP65 0.3-1 4

CODE	
White	717374W_
Grey	717374D_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	720 >80	4

OPTIONAL

big cover

CODE	
White	911141W1
Grey	911141D1

more details on page 716






PALOS

OUTDOOR
WALL SURFACE



p. 681

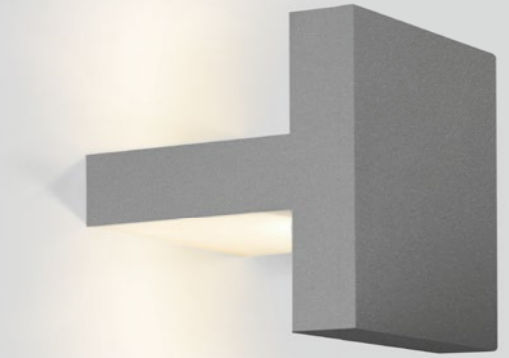

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.55kg IP65 0.3

	CODE
	716174W
	716174D
	716174A

LIGHT COLOUR LUMEN | CRI CODE
3000K 520 | >90 5

2.0

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.86kg IP65 0.3

	CODE
	716274W
	716274D
	716274A

LIGHT COLOUR LUMEN | CRI CODE
3000K 2x520 | >90 5

FLOOR RECESSED

p. 641 – 649

FLOOR
RECESSED



CARD 0.1
p. 641



MAP
p. 643



MAP ASYM
p. 645



CARD 0.2
p. 641



CHART
p. 647




CHART ASYM
p. 649



CARD

OUTDOOR
FLOOR RECESSED



0.1

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass | 0.9m cable
aluminium powder coated

0.05kg IP67 IK07 3-0.3-D

16° 22-24 60


CODE
750161L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	50	>80	4

ALWAYS USE

power supply IP66

CODE
350mA 3W 90213101



0.2

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass | 0.9m cable
aluminium powder coated

0.06kg IP67 IK07 3-0.3-D

16° 22-24 60

CODE
750261L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	50	>80	4

ALWAYS USE


power supply IP66

CODE
350mA 3W 90213101





MAP
OUTDOOR
FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass | 1.6m cable
aluminium powder coated


0.38kg IP67 IK08 0.3°
38° 41 100

CODE
751163L

LIGHT COLOUR LUMEN | CRI CODE
3000K 220 | >80 4

OPTIONAL

CODE
ground housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated


0.70kg IP67 IK08 0.3°
38° 78 135

CODE
751264L

LIGHT COLOUR LUMEN | CRI CODE
3000K 470 | >80 4

OPTIONAL

CODE
ground housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated


1.01kg IP67 IK08 0.3°
38° 110 120

CODE
751364L

LIGHT COLOUR LUMEN | CRI CODE
3000K 750 | >80 4

OPTIONAL

CODE
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.01kg IP67 IK09 0.3°
41° 150 185

CODE
751464L

LIGHT COLOUR LUMEN | CRI CODE
3000K 1030 | >80 4


OPTIONAL

CODE
ground housing 90012204



MAP ASYM

**OUTDOOR
FLOOR RECESSED**



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.06kg IP67 IK08 $\pm 0.3^\circ$

110 160


asymmetric reflector

	CODE
	751557L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	450	>80	4

OPTIONAL

	CODE
ground housing	90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.72kg IP67 IK09 $\pm 0.3^\circ$

150 185

asymmetric reflector

	CODE
	751657L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	550	>80	4

OPTIONAL


	CODE
ground housing	90012204





CHART

OUTDOOR FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass | 1.6m cable
aluminium powder coated

0.39kg IP67 IK08 0.3°


38° 45 118

CODE
752163I

LIGHT COLOUR LUMEN | CRI CODE
3000K 220 | >80 4

OPTIONAL

CODE
ground housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

0.70kg IP67 IK08 0.3°


38° 78 135

CODE
752264I

LIGHT COLOUR LUMEN | CRI CODE
3000K 470 | >80 4

OPTIONAL

CODE
ground housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.05kg IP67 IK08 0.3°


38° 110 175

CODE
752364I

LIGHT COLOUR LUMEN | CRI CODE
3000K 750 | >80 4

OPTIONAL

CODE
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.05kg IP67 IK09 0.3°

41° 150 185

CODE
752464I

LIGHT COLOUR LUMEN | CRI CODE
3000K 1030 | >80 4


OPTIONAL

CODE
ground housing 90012204



CHART ASYM

**OUTDOOR
FLOOR RECESSED**



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

IP67 IK08 1.10kg

110 160


asymmetric reflector

CODE
752557L

LIGHT COLOUR LUMEN | CRI CODE
3000K 450 | >80 4

OPTIONAL

CODE
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

IP67 IK09 1.83kg

150 185

asymmetric reflector

CODE
752657L

LIGHT COLOUR LUMEN | CRI CODE
3000K 550 | >80 4

OPTIONAL

CODE
ground housing 90012204



FLOOR SURFACE

p. 653 – 687

FLOOR SURFACE PROJECTOR



STIPO 1.0
p. 653



STIPO 4.0
p. 653



STAKE FOLD
p. 655



X-BEAM
p. 657



STAKE
p. 659

FLOOR SURFACE LUMINAIRES



COSTA 2.0
p. 661



COSTA 1.0
p. 663

FLOOR SURFACE BOLLARD



SWAM
p. 667



GETTON
p. 669



TAPE
p. 671



PACE
p. 673



SMILE
p. 675



FIFTY FIFTY
p. 677



SWAY
p. 679



PALOS 1.0
p. 681



PALOS 2.0
p. 681



EDGE
p. 683



LINUS
p. 685




PALLUZ C
p. 687



STIPO

OUTDOOR FLOOR PROJECTOR




1.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.5 kg | IP65 | 135° | 38°

CODE
737157D_
737157Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4




2.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.49 kg | IP65 | 135° | 38°

CODE
737267D_
737267Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4




3.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.5 kg | IP65 | 135° | 38°

CODE
737357D_
737357Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4



4.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.49 kg | IP65 | 135° | 38°

CODE
737467D_
737467Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4



OPTIONAL

CODE
90013106

ground spike

OPTIONAL

CODE
90013106

ground spike

OPTIONAL

CODE
90013106

ground spike

OPTIONAL

CODE
90013106

ground spike

ALWAYS USE

pole 200 excl. spike

CODE
910062D0
910062Y0

pole 400 excl. spike

910064D0
910064Y0

pole 600 excl. spike

910066D0
910066Y0

pole 800 excl. spike

910068D0
910068Y0

ALWAYS USE

pole 200 excl. spike

CODE
910062D0
910062Y0

pole 400 excl. spike

910064D0
910064Y0

pole 600 excl. spike

910066D0
910066Y0


pole 800 excl. spike

910068D0
910068Y0



STAKE FOLD

**OUTDOOR
FLOOR PROJECTOR**



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.78kg IP65 $\pm 0.3^\circ$

0/90°

CODE

727274D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>90	5

OPTIONAL

CODE



ground spike	90013107
snoot	90019004





X-BEAM

OUTDOOR FLOOR PROJECTOR



1.0

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

0.3° 120° 0/110°

2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

0.3° 15° 0/110°



CODE
700364D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 1040 | >80 4

OPTIONAL

CODE
ground spike 90013115
snoot 90019023

CODE
700354D_

LIGHT COLOUR LUMEN | CRI CODE
3000K 895 | >80 4



OPTIONAL

CODE
ground spike 90013115
snoot 90019023



STAKE

OUTDOOR FLOOR PROJECTOR



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.0m cable

0.55kg IP65 0.3° 0/90°

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.50kg IP65 0.3° 0/90°



CODE
727174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>90	5

CODE
727374D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>90	5

ALWAYS USE

	CODE
base 200	910042D0
base 400	910044D0

OPTIONAL

	CODE
ground spike	90013106
snoot	90019004



OPTIONAL

	CODE
ground spike	90013107
snoot	90019004



COSTA

OUTDOOR
FLOOR SURFACE

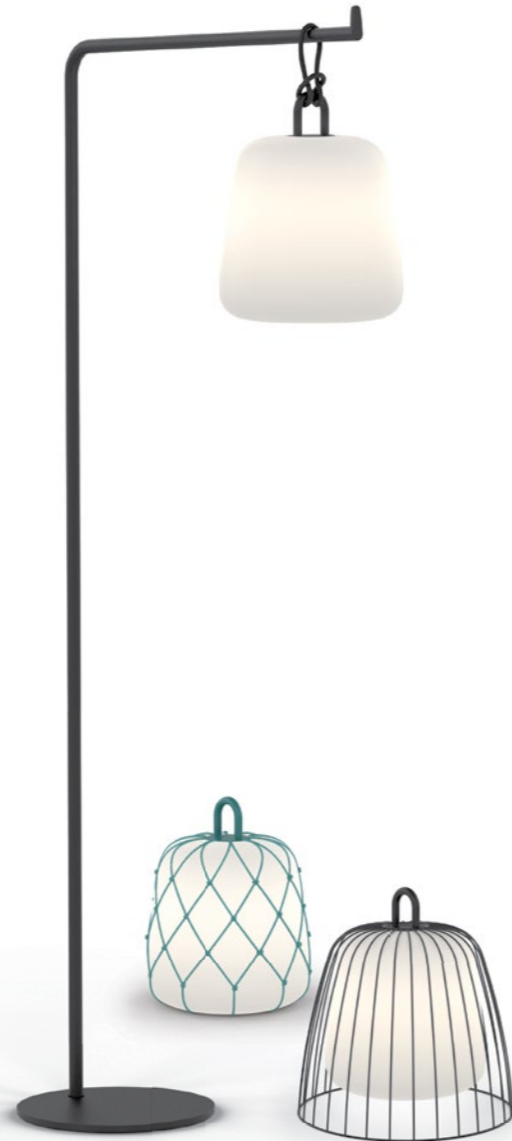

2.0 LED

2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

1.10kg IP65

handle colour

handle colour	CODE
	865286YE9
	865286OR9
	865286SB9
	865286OB9



OPTIONAL

2.0 rope


2.0 rope	CODE
	90057192
	90057191
	90057193
	90057190



OPTIONAL

2.1 cage


2.1 cage	CODE
	90057182
	90057181
	90057183
	90057180

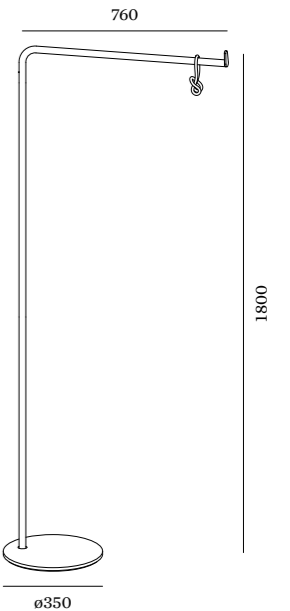

OPTIONAL

pole

pole	CODE
	90056001

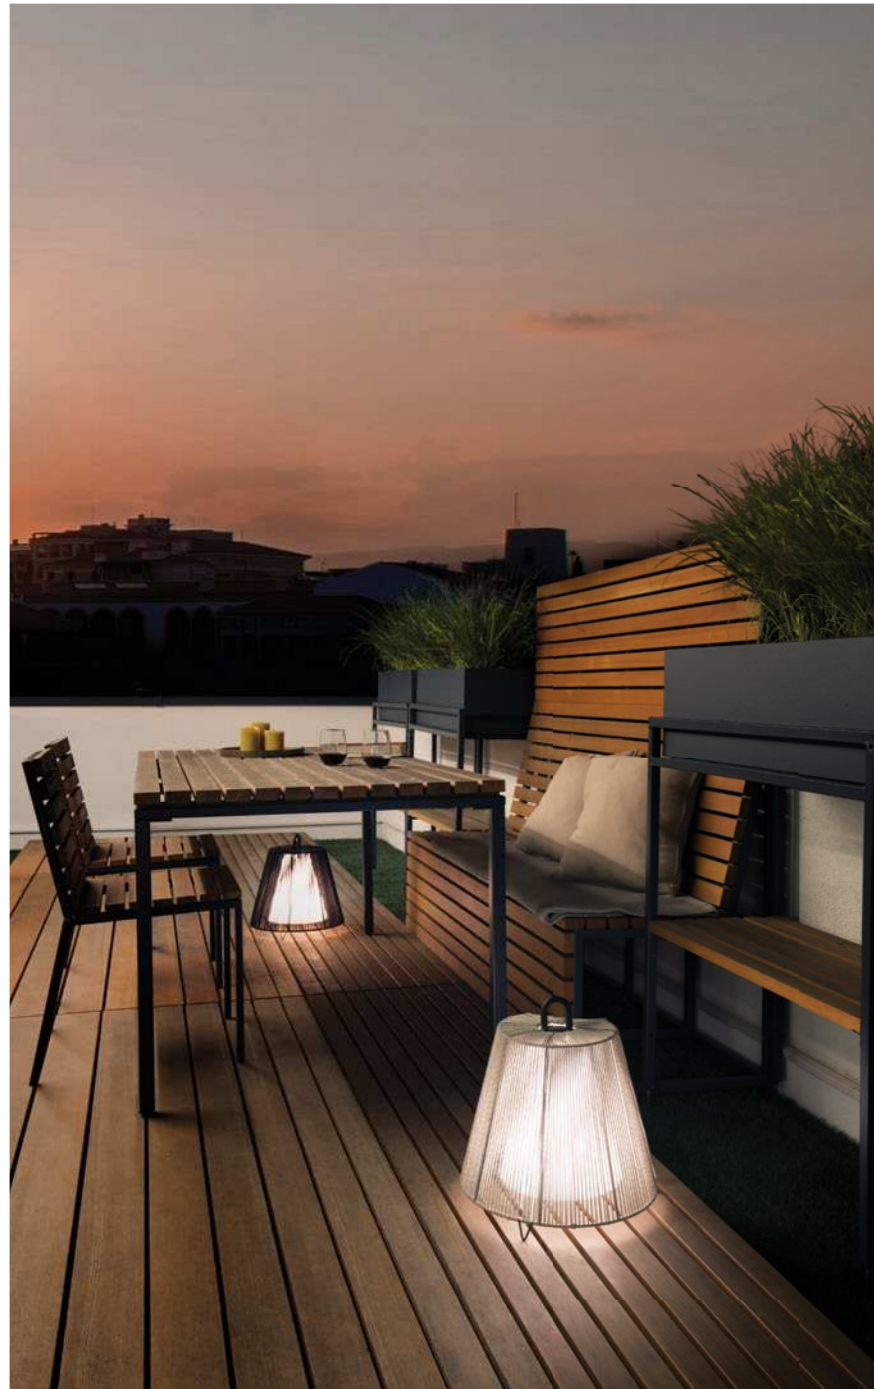

COSTA

OUTDOOR
FLOOR SURFACE



1.0
yellow



1.0
orange



1.0
light blue



1.0
black



1.0 LED

2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

0.90kg IP65




handle colour

handle colour	CODE
	865186YE9
	865186OR9
	865186SB9
	865186OB9

OPTIONAL

1.0 rope	CODE
	90057171
	90057170

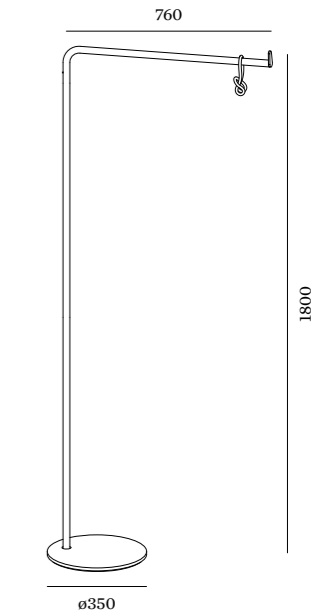


OPTIONAL

pole	CODE
	90056001





available from autumn 2020



1.0

LED 8W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated


0.85kg | IP65 | 0.3 | P

	CODE
	746174K
	746174B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	170	>90	3

OPTIONAL


ground fixation plate	CODE
	90019019



ALWAYS USE

base straight in black

	CODE
base 400	910090B0
base 600	910091B0
base 800	910092B0



ALWAYS USE

base curved in black

	CODE
base 400	910093B0
base 600	910094B0
base 800	910095B0





GETTON

OUTDOOR FLOOR SURFACE



p. 635



1.0

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step | incl. PS | phase-cut dim
 aluminium powder coated

0.80kg IP65 >0.3

opal glass

CODE
 717574D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	665	>80	4

ALWAYS USE

	CODE
base 400	910052D0
base 600	910054D0
base 800	910058D0

OPTIONAL

	CODE
ground spike	90013101

2.0

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step | incl. PS | phase-cut dim
 aluminium powder coated

0.80kg IP65 >0.3

clear glass

CODE
 717674D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	720	>80	4

ALWAYS USE

	CODE
base 400	910052D0
base 600	910054D0
base 800	910058D0


OPTIONAL

	CODE
ground spike	90013101



TAPE

OUTDOOR
FLOOR SURFACE



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.92kg IP65 $\pm 0.3^\circ$

	CODE
	722274W_
	722274D_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


2.60kg IP65 $\pm 0.3^\circ$

	CODE
	722374W_
	722374D_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

3.10kg IP65 $\pm 0.3^\circ$

	CODE
	722474W_
	722474D_


LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102



PACE
OUTDOOR
FLOOR SURFACE



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.00kg IP65 0.3°D

	CODE
	723174W_
	723174D_
	723174B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.33kg IP65 0.3°D

	CODE
	723274W_
	723274D_
	723274B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.61kg IP65 0.3°D

	CODE
	723374W_
	723374D_
	723374B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	420 >90	5

OPTIONAL

	CODE
ground spike	90013102





SMILE

OUTDOOR FLOOR SURFACE



p. 629



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.15kg IP65 0,3m

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.95kg IP65 0,3m

CODE
703554D

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>80	4

ALWAYS USE

base with fixation plate

base	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

base	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

CODE
703654D

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>80	4

ALWAYS USE

base with fixation plate

base	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation



base	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0





FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.20kg | IP65 | 0.3-1 | 6

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.98kg | IP65 | 0.3-1 | 6



CODE
756174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>80	4

ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0

base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0

CODE
756274D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>80	4

ALWAYS USE

base with fixation plate

CODE
base 300 910013D0
base 400 910014D0
base 600 910016D0
base 800 910018D0
base 1000 910010D0



base with concrete fixation

CODE
base 300 910073D0
base 400 910074D0
base 600 910076D0
base 800 910078D0
base 1000 910070D0



SWAY

OUTDOOR FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.01kg IP54 0.3-1.0

140°/140°

2.0

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.10kg IP54 0.3-1.0

140°/140°



CODE
720174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	520	>80	4

ALWAYS USE

base with fixation plate

base	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

base	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

CODE
720274D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x520	>80	4


ALWAYS USE

base with fixation plate

base	CODE
base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

base	CODE
base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0




1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.40kg IP65 0.3

	CODE
	716374D_
	716374A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	520	>90	5



2.0

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.40kg IP65 0.3

	CODE
	716474D_
	716474A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x520	>90	5

ALWAYS USE

base with fixation plate
base 300

	CODE
	910013D0
	910013A0

base 400

	910014D0
	910014A0

base 600

	910016D0
	910016A0

base 800

	910018D0
	910018A0

base 1000

	910010D0
	910010A0

ALWAYS USE

base with concrete fixation
base 300

	CODE
	910073D0
	910073A0

base 400

	910074D0
	910074A0

base 600

	910076D0
	910076A0

base 800

	910078D0
	910078A0


base 1000

	910070D0
	910070A0



EDGE

OUTDOOR FLOOR SURFACE



2.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

2.41kg | IP65 | 0.3° | 4

CODE

721174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	480	>80	4



4.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

3.34kg | IP65 | 0.3° | 4

CODE

721274D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	480	>80	4



6.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

4.45kg | IP65 | 0.3° | 4

CODE

721474D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	480	>80	4



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

5.60kg | IP65 | 0.3° | 4

CODE



721374D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	480	>80	4



LINUS

OUTDOOR FLOOR SURFACE

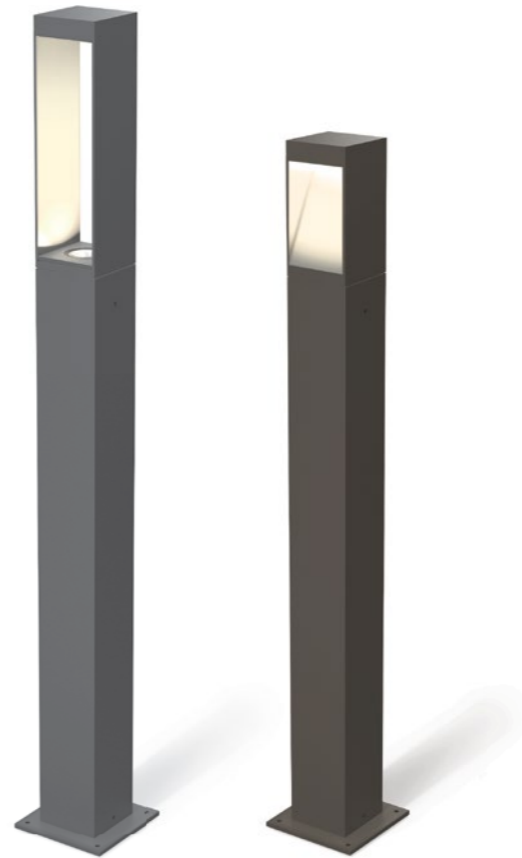


1.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium
powder coated

0.95kg IP65 0.3

CODE
726173D_
726173Y_
726173A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	320	>80	4




2.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium
powder coated

0.99kg IP65 0.3

CODE
726273D_
726273Y_
726273A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	300	>80	4



3.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium
powder coated

0.52kg IP65 0.3

CODE
726373D_
726373Y_
726373A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	300	>80	4

ALWAYS USE

base 150

CODE
910024D0
910024Y0
910024A0

base 350

910026D0
910026Y0
910026A0

base 550

910028D0
910028Y0
910028A0



OPTIONAL

CODE
ground spike 90013103
ground fixation 90013302



PALLUZ C

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg | IP65 | 0.3° | 6

opal glass

CODE
724374D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	720	>80	4

ALWAYS USE

CODE
base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation
base 230 910032D0

OPTIONAL

CODE
ground spike for invisible
base 230 90013104
ground fixation for base
230 600 800 90013303

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg | IP65 | 0.3° | 6

clear glass

CODE
724474D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	665	>80	4

ALWAYS USE

CODE
base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation
base 230 910032D0

OPTIONAL

CODE
ground spike for invisible
base 230 90013104
ground fixation for base
230 600 800 90013303



TECH
NICAL

WELL, WELL ... LOOK WHAT THE CAT DRAGGED IN.



CRI 70+

AREA OF APPLICATION

Offices and shops
for average use

ANWENDBUNGSBEREICH

Büro- und Geschäftsräume mit durchschnittlichen Anwendungen



CRI 80+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDBUNGSBEREICH

Privaträume, Büros und Verkaufsbereiche




CRI 90+

AREA OF APPLICATION


Museums, galleries, exquisite dining,
and exclusive products in stores

ANWENDBUNGSBEREICH


Museen, Gallerien, exquisite Essen und Qualitätsprodukte in Shops

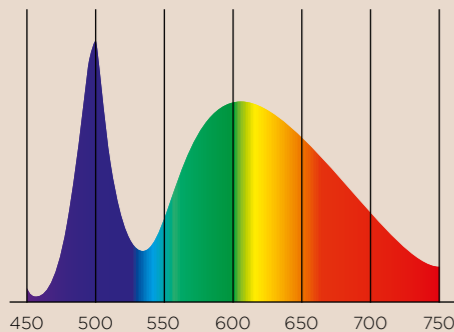

Wavelength (nm) / Wellenlänge (nm)

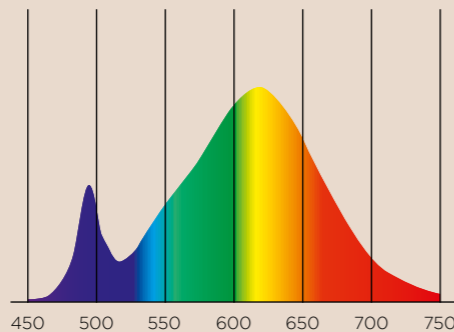

Wavelength (nm) / Wellenlänge (nm)

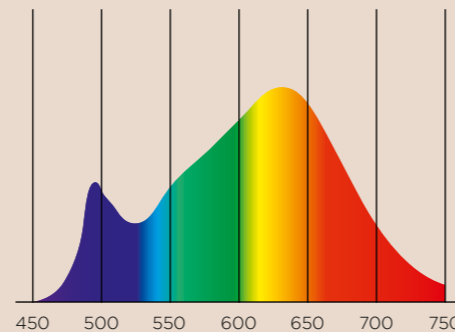

Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, shows the quality of how colours are perceived under artificial light. The higher this value, and 100 CRI would be possible in theory, the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC


What sets a romantic mood faster than tea lights? Correct. Our four dimming variants that easily control the light intensity. Not just with analogue dimming, but digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via PHASE-CUT DIM is perfect. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Complex five-pin cabling is not needed here. ZigBee offers another simple option to directly control the lights wirelessly for those who want to dim their lights from their mobile device. It can even be set up as an upgrade of a non-dimmable luminaire. Replace the light engine, and you're done.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere drei Dimming-Varianten mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer PHASE-CUT DIM die perfekte Lösung für Sie. Alles, was Sie dafür brauchen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten.


PHASE-CUT DIM

Triac (Analog)




1-10V DIM

Analog




DIM DALI


Digital



ZIGBEE

Digital



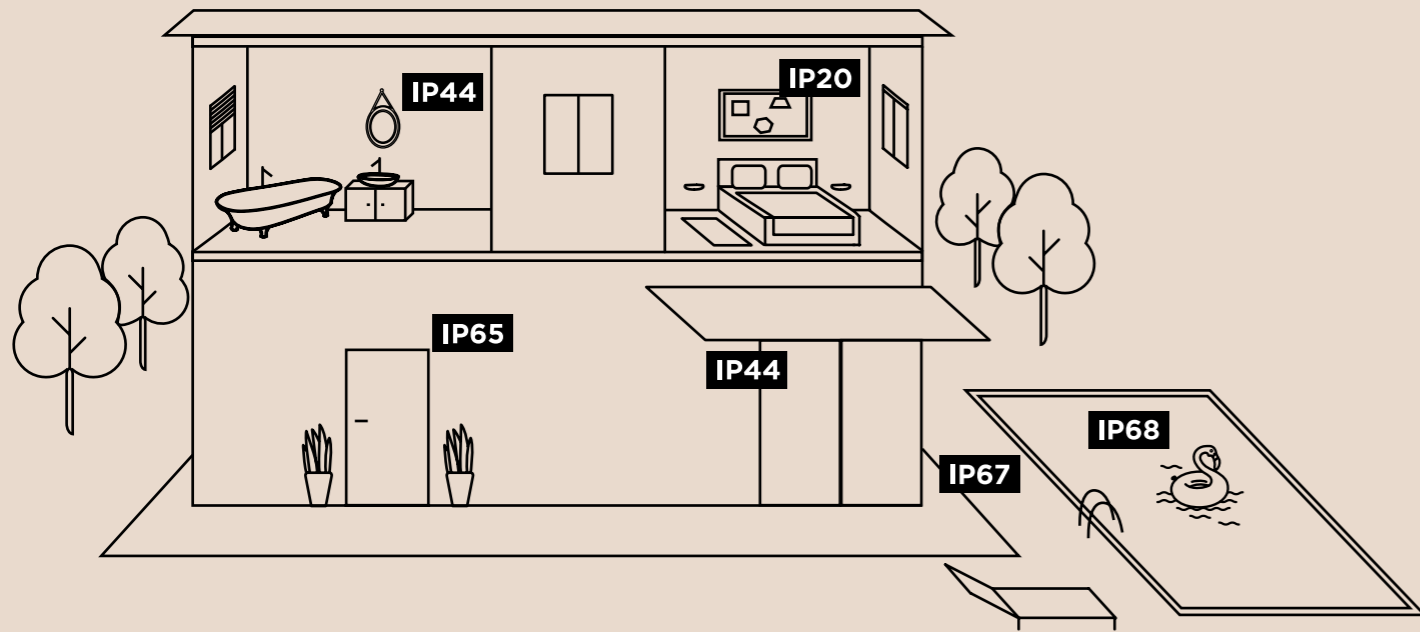

GENERAL REMARK

We advise to have the lighting devices installed only by a qualified electrician. In case the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.


SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against dust

Schutz gegen Festkörper




No protection
Kein Schutz



Protected against solid objects greater than 50 mm Ø
Geschützt vor festen Gegenständen über 50 mm Ø




Protected against solid objects greater 12 mm Ø
Geschützt vor festen Gegenständen über 12 mm Ø



Protected against solid objects over 2.5mm Ø
Geschützt vor festen Gegenständen über 2,5mm Ø



Protected against solid objects greater than 1.0 mm Ø
Geschützt vor festen Gegenständen über 1,0 mm Ø



Dust protected
Staubgeschützt




Dust tight
Staubdicht


SECOND DIGIT

Protection against water


Schutz gegen Flüssigkeiten




No protection
Kein Wasserschutz




Protected against vertically dripping water
Geschützt vor senkrecht fallendem Tropfwasser



Protected against dripping water (tilted up to 15°)
Geschützt vor schräg fallendem Tropfwasser (bis 15°)



Protected against spray water
Geschützt vor Sprühwasser




Protected against splashing water from all directions
Geschützt vor Spritzwasser aus allen Richtungen



Protected against water jets
Geschützt vor Strahlwasser



Protected against strong water jets
Geschützt vor starkem Strahlwasser



Protected against penetrating water during short-term immersion
Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen



Protected against submersion
Geschützt vor eindringendem Wasser beim Untertauchen

POWER SUPPLIES

ACCESSORIES

250mA 10W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 10W | preset at 250mA
16-29V | phase-cut dim
L/W/H 122x41x23

CE 0.094kg  SELV  IP20

DEEP BIJOU 1.0

CODE
90226401

250mA 15W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 250mA
26-42V | phase-cut dim
L/W/H 122x41x23

CE 0.096kg  SELV  IP20

DEEP BIJOU 2.0

CODE
90226501

350mA 4W

Driver 100-240VAC | 50-60Hz
4W | 350mA | 4-12V
L/W/H 43x42x23

CE 0.05kg  SELV  TÜV  IP20

DEEP BIJOU 2.0

CODE
90213201

350mA 6W

Driver 90-264VAC | 50-60Hz
6W | 350mA | 3-22V
L/W/H 64x35x21

CE 0.04kg  SELV  EMC  IP20

LITO 2W | STRIPE 1W SMILE IN 4W

CODE
90213202

500mA 6W

Driver 90-264VAC | 50-60Hz
6W | 500mA | 3-12V
L/W/H 64x35x21

CE 0.04kg  SELV  EMC  IP20

THEMIS 5W | STRANGE wall 5W LITO 3W | SMILE IN 6W

CODE
90214201

350mA 10W DIM

Driver 220-240VAC | 50-60Hz | 10W
350mA | 12-28V | phase-cut dim
L/W/H 102x38x21

CE 0.09kg  SELV  IP20

DEEP PETIT (1x) | DEEP 7W (1x) PLANO PETIT (1x) | PLANO 7W (1x)

CODE
90223402

350mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz | 10W
350mA | 14-28V | 1-10V dim
L/W/H 101.5x51x29.5

CE 0.09kg  SELV  IP20

DEEP 7W | RON 7W | RONY 7W STRANGE ceiling 7W

CODE
90223401

350mA 15W DIM

Driver 220-240VAC | 50-60Hz | 15W
350mA | 21-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.09kg  SELV  IP20

DEEP PETIT (2x) | DEEP 7W (1x) PLANO PETIT (2x) | PLANO 7W (1x) LED MODULES HO (1x) | 73240577 | 73240682 | 73240542 | 73240681

CODE
90223503

350mA 15W DIM

Driver 220-240VAC | 50Hz | 15W
350mA | 28-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.11kg  SELV  IP20

DEEP 10W | RON 10W | RONY 10W LUNA 10W | STRANGE ceiling 10W PLANO 10W

CODE
90228501

500mA 10W

Driver 220-240VAC | 50Hz
10W | 500mA | 11-20V
L/W/H 101.5x51x29.2

CE 0.116kg  SELV  IP20

DEEP 10W | RON 10W | RONY 10W LUNA 10W | STRANGE ceiling 10W PLANO 10W

CODE
90214405

500mA 7W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 7W | preset at 500mA
7-13V | phase-cut dim
L/W/H 122x41x23

CE 0.07kg  SELV  IP20

PIRRO 1.0

CODE
90224301

500mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz
10W | 500mA | 10-20V | 1-10V dim
L/W/H 100x43x22.5

CE 0.06kg  SELV  IP20

DEEP 10W | RON 10W | RONY 10W LUNA 10W | STRANGE ceiling 10W PLANO 10W

CODE
90234401

500mA 15W DIM



Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 500mA
12-20V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg  SELV  IP20

PIRRO 2.0

CODE
90224503

350/500/700mA 17.5-20W

Driver 220-240VAC | 50-60Hz
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20V-40V
20W | 700mA | 14V-28.5V
L/W/H 101.5x51x29.5
CE 0.09kg  SELV  IP20

DEEP 7/10W (2x) RON 7/10W (2x) | RONY 7/10W (2x)

CODE
90218601

350mA 30W

Driver 220-240VAC | 50-60Hz
30W | 350mA | 43-86V
L/W/H 127x43x30

CE 0.15kg  SELV  IP20

DEEP PETIT (3x) | PLANO PETIT (3x) | PLANO PETIT 3.0 | STRANGE PETIT (3x) | STRANGE PETIT 3.0

CODE
90213701

350mA 10W DALI



Driver 220-240VAC | 50-60Hz | 5-100%
10W | 350mA | 2.5-26V | DALI
L/W/H 124x31x21

CE 0.08kg EL  EMC  SELV  IP20

DEEP PETIT (1-2x) PLANO PETIT (1-2x)

CODE
90243401

350mA 20W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
20W | preset at 350mA | 10-49V | touch
dim | DALI
L/W/H 111x52x22
CE 0.10kg  SELV  IP20

DEEP PETIT (1-2x) PLANO PETIT (1-2x)

CODE
90243601

500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
15W | 500mA | 13.5-30V
L/W/H 102x51x30 | phase-cut dim

CE 0.08kg  SELV  IP20

DEEP 10W | RON 10W | RONY 10W STRANGE ceiling 10W

CODE
90224501

500mA 20W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 20W | preset at 500mA
26-38V | phase-cut dim
L/W/H 122x41x23

CE 0.0125kg  SELV  IP20

PIRRO 4.0, 6.0

CODE
90224602

500mA 21W DIM

Driver 220-240VAC | 50-60Hz
21W | 500mA | 16-42V
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg  SELV  IP20

DEEP 10W (2x) | RON 10W (2x) RONY 10W (2x)

CODE
90224702

500mA 21W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
21W | 500mA | 28-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.09kg  SELV  IP20

DEEP 10W (2x) | RON 10W (2x) RONY 10W (2x)

CODE
90224701

POWER SUPPLIES

ACCESSORIES

700mA 6W

Driver 90-264VAC | 50-60Hz
6W | 700mA | 3-8.4V
L/W/H 64x35x21

CE 0.04kg    IP20

STRIFE 2W | **THEMIS** 5W
STRANGE wall 5W

CODE
90215203

700mA 10W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 10W | preset at 700mA
8-14V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg  SELV  IP20

PIRRO 1.0
BLIEK ROUND PETIT 1.0

CODE
90225402

700mA 14W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
14W | 700mA | 10-20V | phase-cut dim
L/W/H 102x51x30

CE 0.07kg  SELV  IP20

700mA 15W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 700mA
12-20V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg  SELV  IP20

PIRRO 2.0 | **BLIEK ROUND PETIT** 2.0 | **CENO** 2.0

CODE
90225501

CODE
90225502

700mA 20W DIM

Driver 220-240VAC | 50-60Hz
20W | 700mA | 16-28V
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg  SELV  IP20

700mA 20W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 20W | preset at 700mA
15-28V | phase-cut dim
L/W/H 137.6x44x30

CE 0.105kg  SELV  IP20

PIRRO 6.0 | **CENO** 3.0

CODE
90225603

700mA 25W DIM

Driver 220-240VAC | 50-60Hz
25W | 700mA | 17-35V
L/W/H 145x51x30 | phase-cut dim

CE 0.12kg  SELV  IP20

700mA 30W DIM

Driver 220-240VAC | 50-60Hz
10-100% | 30W | preset at 700mA
26-42V | phase-cut dim
L/W/H 137.6x44x30

CE 0.14kg  SELV  IP20

PIRRO 4.0 | **DEEP FORT PLANO ADJUST FORT**

CODE
90225701

CODE
90225702

500mA 10W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
10W | 500mA | 2.5-20V | DALI
L/W/H 124x31x21

CE 0.08kg EL   EMC SELV  IP20

500mA 20W DALI

Driver 220-240VAC | 50-60Hz
0-100% | 20W | preset at 500mA
5-40V | DALI
L/W/H 111x52x22

CE 0.12kg EL  SELV  IP20

DEEP 10W (1-2x) | **RON** 10W (1-2x)
RONY 10W (1-2x) | **PIRRO** 4.0, 6.0

CODE
90244401

CODE
90244602

500mA 20W DALI

Driver 220-240VAC | 50-60Hz
0-100% | 20W | preset at 500mA
6-40V | DALI
L/W/H 150x52x28

CE 0.14kg  SELV IP20

PIRRO 2.0, 4.0, 6.0

CODE
90244603

500mA 25W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
25W | 350-1050mA | preset at 500mA
20-50V | DSI | switch dim | DALI
L/W/H 130x43x30

CE 0.17kg  SELV  IP20

DEEP 10W (2x) | **RON** 10W (2x)
RONY 10W (2x) | **PLANO** 10W (2x)
STRANGE ceiling 10W (2x)

CODE
90254603

700mA 10W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
10W | 700mA | 2.5-14V | DALI
L/W/H 124x31x21

CE 0.08kg EL   EMC SELV  IP20

DEEP ADJUST FORT PLANO ADJUST FORT

CODE
90245401

700mA 20W DALI

Driver 220-240VAC | 50-60Hz
0-100% | 20W | preset at 700mA
3-28V | DALI
L/W/H 111x52x22

CE 0.11kg EL  SELV  IP20

PIRRO 2.0, 6.0 | **CENO** 2.0, 3.0
BLIEK ROUND PETIT 2.0

CODE
90245602

700mA 26W DALI

Driver 220-240VAC | 50-60Hz
0-100% | 26W | preset at 700mA
10-37V | DALI
L/W/H 146.5x43.5x22

CE 0.105kg EL  SELV  IP20

PIRRO 4.0

CODE
90245701

700mA 30W DALI

Driver 220-240VAC | 50-60Hz
0-100% | 30W | preset at 700mA
6-43V | DALI
L/W/H 103x67x22

CE 0.142kg  SELV IP20

DEEP ADJUST FORT | PLANO ADJUST FORT

CODE
90245702

POWER SUPPLIES

ACCESSORIES

CONNECTION BOX 3P


incl. strain relief | 3 pole push connector
L/W/H 75x35x25



CODE
90059119

CONNECTION BOX 5P

incl. strain relief | 5 pole push connector
L/W/H 70x60x30



CODE
90059120

350mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 350mA | 3-15V
L/W/H 52x30x23

CE 0.05kg EMC IP66

ORIS 0.7 1W | **ORIS** 1.3 2W | **ORIS** 2.0 2W | **CARD**

CODE
90213101

350mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 350mA | 10-20V
L/W/H 57x41x24

CE 0.05kg SELV IP67

SMILE IN 4W

CODE
90213301

500mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 500mA | 5-14.5V
L/W/H 57x41x24

CE 0.15kg SELV IP67

SMILE IN 6W

CODE
90214301

500mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 500mA | 2-26V
L/W/H 81x40x23

CE 0.15kg SELV IP67

CODE
90214402

TRANSFORMER 12V/105W

230-240VAC | 50-60Hz | 35-105VA
105W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg IP20

CODE
90221905

LED DRIVER 12V/10W

220-240VAC | 50-60Hz | 3-10VA
10W | 12V | leading + trailing edge
L/W/H 102x51x30

CE 0.1kg IP20

CODE
90221401

LED DRIVER 12V/25W

220-240VAC | 50-60Hz | 8-25VA
25W | 12V | leading + trailing edge
L/W/H 145x51x29.5

CE 0.1kg IP20

CODE
90221701

TRANSFORMER 12V/70W

230-240VAC | 50-60Hz | 20-70VA
70W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg IP20

CODE
90221904

700mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 700mA | 3-6V
L/W/H 52x30x23

CE 0.09kg EMC IP66

ORIS 0.7 2W

CODE
90215101

700mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 700mA | 3-10.5V
L/W/H 57x41x24

CE 0.07kg SELV IP67

ORIS 1.3 4W
ORIS 2.0 4W

CODE
90215301

700mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 700mA | 2-18V
L/W/H 81x40x23

CE 0.28kg SELV IP67

CODE
90215402

700mA 18W IP67 DIM

Driver 220-240VAC | 50-60Hz
18W | 700mA | 4-26V | dim trailing edge
L/W/H 133x40x30


CE 0.28kg SELV IP67

CODE
90225602

DIMMER FOR SWITCH

DIM leading /trailing edge
230V | max. 200W LED
L/W/H 48x17.5x46

CE IP30




CODE
90019017

DIMMER DIN RAIL

DIM leading /trailing edge
230V | max. 200W LED
L/W/H 17x55x90

CE IP30




CODE
90019018

DALI SELV DEVICE

for 48V system | max. 300W
48VDC | L/W/H 213x37x25

CODE
90019193




DALI DIMMER FOR SWITCH

230V | 50-60Hz
L/W/H 48x49x22

CE 0.036kg IP20

CODE
90019194



LED LAMPS

ACCESSORIES

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >80 CRI
480lm | phase-cut dim

CE 0.06kg IP20 A 45°



CODE
901228W2

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 A 45°



CODE
901228W3

LED MODULE HO 2700K

LED Module | 350mA | 35Vf
2700K | 12W | >90 CRI | 1050lm
compatibility on request

CE 0.06kg IP20 A 26°



CODE

73240577

73240682

LED MODULE HO 3000K

LED Module | 350mA | 35Vf
3000K | 12W | >90 CRI | 1100lm
compatibility on request

CE 0.06kg IP20 A 26°



CODE

73240542

73240681

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 A 45°



CODE

901228B3

PAR16 LED 2700K

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 2700K | 4.3W | >80 CRI
350lm

CE 0.06kg IP20 A 36°



CODE

905227S2

PAR16 LED AMBIENT

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 1800-2850K | 7W | >90 CRI
380lm | ambient white phase-cut dim

CE 0.06kg IP20 A 40°



CODE

901229S9

PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >80 CRI
465lm | phase-cut dim

CE 0.06kg IP20 A 45°




CODE

901228W4

PAR16 FLAT HEAD

PAR16 | GU10 | 220-240VAC
50-60Hz

CE 0.06kg IP20




CODE
90059125

ZIGBEE LED 2700K

220-240VAC | 50-60Hz | phase-cut dim
>80 CRI | LED 10W | 2700K | 720lm

A 36°



CODE

901268W2

901268B2

LED AC MODULE 2700K

220-240V | COB 3-step | phase-cut dim | >90 CRI | 8W | 2700K | 480lm
compatibility on request

CE 0.08kg IP20 A 36°



CODE


901268W3

901268B3

LED AC MODULE 3000K

220-240V | COB 3-step | phase-cut dim | >90 CRI | 8W | 3000K | 500lm
compatibility on request

CE 0.08kg IP20 A 36°



CODE

901268W5

901268B5

PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 A 45°



CODE

901228B5

PAR16 LED 3000K

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 3000K | 4.3W | >80 CRI
350lm

CE 0.06kg IP20 A 36°



CODE

905227S4

METAL SPRING CLIP

Alternative front lamp fixation spring
for ø50 lamp rings

MR16 | LED | PAR16 | max. 12W

DEEP ADJUST | DEEP ASYM

DEEP 2.0 | PYRAMID | PLANO

STRANGE ceiling | SPINEO | NOP

SOLID



ø59

CODE

73240203

SPRING CLIP

lamp fixation | push-in system for ø50
lamp rings

MR16 | LED | PAR16 | max. 12W

DEEP ADJUST | DEEP ASYM

DEEP 2.0 | PYRAMID | PLANO

STRANGE ceiling | SPINEO | NOP

SOLID

	CODE
	73240651
	73240941
	73240940
	73240942
	73240652

QT14 LED 2700K

QT14 LED | G9 | 220-240VAC
50-60Hz | 2700K | 3W | >80 CRI | 200lm
DRO
CE 0.02kg IP20



CODE
9019G705

QT14 LED 2700K OPAL

QT14 LED | G9 | 220-240VAC | 50-60Hz
2700K | 3W | >80 CRI | 170lm
phase-cut dim | opal
CE 0.02kg IP20



CODE
9019G706

QT14 LED 3000K

QT14 LED | G9 | 220-240VAC
50Hz | 3000K | 3W | >80 CRI | 300lm
CE 0.03kg IP20



CODE
9019G703

QT14 LED 3000K OPAL


QT14 LED | G9 | 175-250VAC | 50-60Hz
3000K | 3W | >80 CRI | 190lm
phase-cut dim | opal
CE 0.02kg IP20



CODE
9019G707

QT14 LED 2800K

QT14 LED 2800K | 300lm
phase cut dim
DRO
CE 0.03kg IP20



CODE
9019G802

QT14 LED 3000K

QT14 LED 3000K | 330lm
phase cut dim
DRO
CE 0.03kg IP20



CODE
9019G804

C35 LED 2700K OPAL


C35 LED | E14 | 220-240VAC | 50-60Hz
2700K | 6W | >90 CRI | 450lm
phase-cut dim 20-100% | opal
REVER wall
CE 0.03kg IP20



CODE
9003C103

A60 LED 2700K OPAL


A60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 9W | >90 CRI
800lm | phase-cut dim | opal
ROCK | **REVER** table | floor
BISHOP
CE 0.04kg IP20



CODE
9003E152

A60 LED 2700K OPAL


A60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 15W | >90 CRI
1400lm | phase-cut dim | opal
ROCK | **REVER** suspended | **BISHOP**
CE 0.04kg IP20



CODE
9003E153

G95 LED 2700K OPAL

G95 LED | E27 | 220-240VAC | 50-60Hz
2700K | 12W | >90 CRI | 1000lm
phase-cut dim | opal
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**
CE 0.11kg IP20



CODE
9003E154

A60 LAMP 2200K


A60 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0
CE 0.04kg IP20



CODE
9003E124

G95 LAMP 2200K


G95 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 3.8, 6.1, 6.5
CE 0.06kg IP20



CODE
9003E102

ST64 LAMP 2200K

ST64 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 3.8, 6.1, 6.5
CE 0.05kg IP20



CODE
9003E105

A60 LED 2200K

A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 4.5W
>90CRI | 315lm | phase-cut dim
gold tinted glass
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **J.J.W.** | **BISHOP**
CE 0.04kg IP2



CODE
9003E109

A60 LED 2200K MIRROR

A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 400lm | phase-cut dim
MIRRO
CE 0.04kg IP20



CODE
9003E150

A60 LED 2700K MIRROR


A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO
CE 0.04kg IP20



CODE
9003E139

G95 LED 2200K MIRROR

G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 400lm | phase-cut dim
MIRRO
CE 0.07kg IP20



CODE
9003E151

G95 LED 2700K MIRROR

G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO
CE 0.07kg IP20



CODE
9003E142

A60 LED 2700K DIM


A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>85 CRI | 500lm | phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **ROCK** | **J.J.W.**
BISHOP
CE 0.04kg IP20



CODE
9003E138

G95 LED 2200K


G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**
CE 0.07kg IP20



CODE
9003E111

ST64 LED 2200K DIM


ST64 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8, 6.1, 6.5 | **BISHOP**
CE 0.05kg IP20



CODE
9003E110

G125 LED 2200K

G125 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**
CE 0.11kg IP20



CODE
9003E112

gold mirror

gold mirror
silver mirror

gold mirror

gold mirror
silver mirror

DECO LAMPS

ACCESSORIES

T30-225 LED 2200K

T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass

WIRO 3.8, 6.1, 6.5 | wall | table | floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**

€ 0.06kg IP20



CODE

9003E129

T30-225 LED 2700K

T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
gold tinted glass

WIRO 1.8, 3.8, 6.1, 6.5 | wall | table | floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**

€ 0.06kg IP20



CODE

9003E136

T30-300 LED 2200K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 8W
>95 CRI | 550lm | phase-cut dim
gold tinted glass

WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
table 2.0 | floor 1.0, 2.0 | **ROCK**

€ 0.08kg IP20



CODE

9003E130

T30-300 LED 2700K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 8W
>90 CRI | 550lm | phase-cut dim

WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
table 2.0 | floor 1.0, 2.0 | **ROCK**

€ 0.08kg IP20



CODE


9003E135

T32-180 LAMP 2200K

T32-180 DECORATIVE LOW
OUTPUT CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim

WIRO 1.8, 3.8, 6.1, 6.5 | **WIRO** wall
table | floor | **CONE** | **DIAMOND**
GLOBE | **INDUSTRY** | **ROCK**

€ 0.05kg IP20



CODE


9003E106

T32-300 LAMP 2200K

T32-300 DECORATIVE LOW
OUTPUT CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim | **WIRO** 3.8, 6.1, 6.5

INDUSTRY | **DIAMOND** | **GLOBE**
1.0, 2.0, 5.0, 6.0 | **GLOBE** floor 1.0, 2.0
GLOBE table 2.0 | **ROCK**

€ 0.07kg IP20



CODE


9003E127

PLASTERKITS

ACCESSORIES

PLANO 1.0

plasterkit




CODE

90017104

PLANO 2.0

plasterkit



CODE

90017105

LUNA 1.0 ROUND

plasterkit

not compatible with LUNA ROUND
IP44 1.0 LED HV



CODE

90017101

LUNA 1.0 SQUARE

plasterkit

not compatible with LUNA SQUARE
IP44 1.0 LED HV




CODE

90017102

LITO

plasterkit




CODE

90017119

THEMIS 1.7

plasterkit




CODE

90017111

THEMIS 2.7

plasterkit




CODE

90017112

THEMIS 5.0

plasterkit



CODE


90017115

PLASTERKITS

ACCESSORIES


STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit

86x86 8-32



STRANGE 1.0 | SNEAK TRIMLESS 1.0
plastic plasterkit

86x86 10 or 13




CODE
90017120

CODE
90017122
90017116


DEEP ADJUST TRIMLESS
plasterkit

105-110 12.5, 15, 20, 25




STRANGE PETIT 1.0
aluminium plasterkit

64x64 7-17



STRANGE PETIT 1.0
plastic plasterkit

68x68 10 or 13




CODE
90017209

CODE
90017202

CODE
90017200
90017201


STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit

156x86 8-32



STRANGE 2.0 | SNEAK TRIMLESS 2.0
plastic plasterkit

156x86 10 or 13




CODE
90017121

CODE
90017123
90017117

ORIS 0.7
recessed housing incl. plasterkit


191x58 60



CODE
90012039


STRANGE PETIT 2.0
aluminium plasterkit

64x117 7-17




STRANGE PETIT 2.0
plastic plasterkit

68x119 10 or 13




STRANGE PETIT 3.0
aluminium plasterkit

64x169 7-17



STRANGE PETIT 3.0
plastic plasterkit

68x171 10 or 13




CODE
90017203
90017204

CODE
90017208

CODE
90017206
90017207


ORIS 1.3
recessed housing incl. plasterkit

122x122 60



ORIS 2.0
recessed housing incl. plasterkit

123x191 60




CODE
90012041

CODE
90012043

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit


75x75 55



CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit

251x76 55



CODE
90012038

RECESSED HOUSING

ACCESSORIES

SMILE IN
recessed ring


⌀ 91 55



CODE
90012030

ORIS 0.7
concrete housing


192x58 60



CODE
90012044

ORIS 1.3
concrete housing


121x121 60



CODE
90012040

ORIS 2.0
concrete housing

123x191 60




CODE
90012042

LITO

recessed housing
always use in combination with
plasterkit

122x90 45




CODE
90012027

THEMIS 1.7

recessed housing
always use in combination with
plasterkit

272x160 85




CODE
90012032

THEMIS 2.7

recessed housing
always use in combination with
plasterkit

372x160 85




CODE
90012033

THEMIS 5.0

recessed housing
always use in combination with
plasterkit

572x160 85




CODE
90012036

MAP 0.6 | CHART 0.6

ground housing

137 110




CODE
90012201

MAP 0.9 | CHART 0.9

ground housing

137 130




CODE
90012202

MAP 1.2 | CHART 1.2

MAP ASYM 1.2 | CHART
ASYM 1.2
ground housing

190 158




CODE
90012203

MAP 1.6 | CHART 1.6

MAP ASYM 1.6 | CHART
ASYM 1.6
ground housing

220 184



CODE
90012204

for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com/faq

1-PHASE TRACK

ACCESSORIES


for more support and planning of 3-phase track systems,
please check our FAQ section on weverducre.com/faq

3-PHASE TRACK

ACCESSORIES

COVERPLATE I/L/T/X


only use with recessed tracks



CODE
90014126
90014127

COVERPLATE END FEEDS


only use with recessed tracks



CODE
90014124
90014125

TRACK ADAPTER

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg



CODE
90014044
90014043

CUTTING TOOL

for 3-phase track and 48V track
CE TÜV SELV



CODE
90014165

TRACK ADAPTER


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 5kg



CODE
90014078
90014079

T-CONNECTOR


can be used as feed



CODE
90014010
90014011

T-CONNECTOR


can be used as feed



CODE
90014012
90014013

T-CONNECTOR


can be used as feed



CODE
90014014
90014015

T-CONNECTOR


can be used as feed



CODE
90014016
90014017

T-CONNECTOR


can be used as feed



CODE
90014228
90014229

T-CONNECTOR


can be used as feed



CODE
90014230
90014231

T-CONNECTOR


can be used as feed



CODE
90014232
90014233

T-CONNECTOR

can be used as feed




CODE
90014234
90014235

SUSPENSION OPTIONS

ACCESSORIES

STRAIN RELIEF

for multi base | without steel wire
REVER | ROCK | CONE




CODE

90052023

WIRO

single decenter set without ceiling base | E27 | 2.6m




CODE

90015160

WIRO

single decenter set without ceiling base | E27 | 6.0m



CODE

90015161

WIRO

6.0m suspension

Decenter 1.0

CODE

90052051

Decenter 2.0

CODE

90052056


Decenter 3.0

CODE

90052063

STRAIN RELIEF

accessory for WIRO suspension




CODE

90052064

WIRO

cable wall bracket only for WIRO textile cable




CODE

90052062

WIRO

ceiling hook




CODE

90052061

ROOMOR CEILING 1.0 | 2.0

extension tube | 0.5m | use only 1 per luminaire



CODE

90019192

ROOMOR E27

6.0m suspension including single surface ceiling base

Color	CODE
Black	2482E0B_
Red	2482E0R_
Green	2482E0G_

ROOMOR PAR16

6.0m suspension including single surface ceiling base

Color	CODE
Black	248220B_
Red	248220R_
Green	248220G_

BISHOP SUSPENSION 6.0M

only for BISHOP 4.0 and 6.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base

Color	CODE
White	90015128
Red	90015140
Green	90015136
Black	90015127

BISHOP SUSPENSION 6.0M

only for BISHOP 8.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base

Color	CODE
White	90015131
Red	90015141
Green	90015137
Black	90015130

ROOMOR CEILING 1.0 | 2.0

extension tube | 1.0m | use only 1 per luminaire




CODE

90019191

SINGLE CEILING BASE

semi recessed | for shades without steel wire only




CODE

90052026

SINGLE SUSPENSION

ceiling base round




CODE

90052022

INVISIBLE CEILING SUSPENSION SYSTEM

plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg




CODE

90015195

SUSPENSION OPTIONS


ACCESSORIES

HOOK
for multi suspension
REVER | ROCK



	CODE
	90052066
	90052065

SHIEK 4.0 | 5.0
cable ring for 3 luminaires



	CODE
	90059123
	90059121

SHIEK 4.0 | 5.0
cable ring for 4 luminaires




	CODE
	90059124
	90059122

CONNECTOR SET
extra set standard connectors for
5 to 8 pieces | use when connecting
more than 4 MULTI fixtures to one
ceiling base round


	CODE
	90059118

CORK MULTI
multiple suspension ceiling base
round for 3 to 8 luminaires | incl. PS




	CODE
	90052015
	90052016

CORK MULTI
multiple suspension ceiling base
600mm | 2 luminaires | incl. PS




	CODE
	90052017
	90052018

CORK MULTI
multiple suspension ceiling base
900mm | 3 luminaires | incl. PS




	CODE
	90052019
	90052020

**MULTIPLE SUSPENSION
CEILING BASE ROUND**
BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | DINOR | SELO
standard up to 4 luminaires
add 90059118 for 5 - 8 luminaires




	CODE
	90052005
	90052006

**MULTIPLE SUSPENSION
CEILING BASE**
BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
600mm | 2 luminaires




	CODE
	90052007
	90052008

**MULTIPLE SUSPENSION
CEILING BASE**
BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
900mm | 3 luminaires




	CODE
	90052009
	90052010

**MULTIPLE SUSPENSION
CEILING BASE**
BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1200mm | 4 luminaires



	CODE
	90052011
	90052012

**MULTIPLE SUSPENSION
CEILING BASE**
BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1500mm | 5 luminaires




	CODE
	90052013
	90052014

ROOMOR
shade 1.0




	CODE
	9113610B1
	9113610K1
	911361RW1
	911361GW1
	911361FT1

ROOMOR
shade 2.0




	CODE
	9113620B1
	9113620K1
	911362RW1
	911362GW1
	911362FT1

ROOMOR
shade 3.0



	CODE
	9113630B1
	9113630K1
	911363RW1
	911363GW1
	911363FT1

ROOMOR
shade 4.0




	CODE
	9113640B1
	9113640K1
	911364RW1
	911364GW1
	911364FT1

ODREY
shade 1.0




	CODE
	911421G1
	911421B1

ODREY
shade 2.0




	CODE
	911422G1
	911422B1

ODREY
shade 3.0




	CODE
	911423G1
	911423B1

ODREY
shade 4.0




	CODE
	911424G1
	911424B1

ODREY
shade 5.0



	CODE
	911425G1
	911425B1

ODREY
shade 6.0




	CODE
	911426G1
	911426B1

ODREY
shade 7.0



	CODE
	911427G1
	911427B1

ODREY
shade 8.0



	CODE
	911428G1
	911428B1

ACCESSORIES


ACCESSORIES

ACCESSORIES

ACCESSORIES

CORK


bottle 1 | clear glass



CODE
90019013

CORK

bottle 2 | clear glass with closing cap



CODE
90019014

HONEYCOMB


CENO | PIRRO
BLIEK ROUND PETIT



CODE
90051130
90051131

STAKE


snoot



CODE
90019004

GETTON


big cover



CODE
911141W1
911141D1

X-BEAM


snoot



CODE
90019023

BOX | RAY


flaps for adjustable beam angle
powder coated white



CODE
900401W0

BASE 600


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910016D0
910016A0

BASE 800


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910018D0
910018A0

BASE 1000


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910010D0
910010A0

BASE 400


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910074D0
910074A0

BASE 600


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910076D0
910076A0

BASE 800


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910078D0
910078A0

BASE 1000


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910070D0
910070A0

BASE 300


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910013D0
910013A0

BASE 400


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910014D0
910014A0

BASE 300

FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation




CODE
910073D0
910073A0

GROUND FIXATION


ACCESSORIES

X-BEAM
ground spike




CODE
90013115

PALLUZ C 230
invisible fixation base




CODE
910032D0

PALLUZ C 230




CODE
910033D0

STAKE POLE 200




CODE
910042D0

STAKE POLE 400




CODE
910044D0

TAPE | PACE
ground spike




CODE
90013102

GETTON POLE
ground spike




CODE
90013101

LINUS
ground spike




CODE
90013103

LINUS
ground fixation




CODE
90013302

PALLUZ C 600




CODE
910036D0

PALLUZ C 800




CODE
910038D0

LINUS 150




CODE
910024D0
910024Y0
910024A0

LINUS 350




CODE
910026D0
910026Y0
910026A0

PALLUZ C
ground fixation




CODE
90013303

PALLUZ C
ground spike only for invisible
fixation base 230




CODE
90013104

STAKE 1.0 | STIPO
ground spike




CODE
90013106

STAKE 2.0 | FOLD
ground spike




CODE
90013107

LINUS 550




CODE
910028D0
910028Y0
910028A0

GETTON 400




CODE
910052D0

GETTON 600



CODE
910054D0

GETTON 800



CODE
910058D0

ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Turn Vertical	Vertikal drehbar	Verticaal richtbaar	Orientable vertical	Orientable en vertical	Orientabile in verticale	Наклонный по вертикали
	Turn Horizontal	Horizontal drehbar	Horizontaal richtbaar	Orientable horizontal	Orientable en horizontal	Orientabile in orizzontale	Поворотный по горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол рассеивания
	Tilting outside the luminaire	nach außen schwenkbar	Kantel- en richtbaar	Projecteur extractible	basculación exterior de la luminaria	inclinazione esterna apparecchio	Вращение снаружи
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Класс защиты светильника 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Класс защиты светильника 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Класс защиты светильника 3
	Safety Distance	Sicherheitsabstand	Veiligheidsafstand	Distance de sécurité	Distancia de seguridad	Distanza di sicurezza	Безопасное расстояние
	Glowtest 960	Glühdrahtprüfung 960	Gloeidraadtest 960	Test au fil incandescent	Prueba de hilo 960	Resistenza alla temperatura 960°	Тестирование на нагрев 960
	IP Rated	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Класс защиты IP
	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating	Код защиты IK

ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN	
	Plastic	Kunststoff	Kunststof	Plastique	Plástico	Plastica	пластик	
	Protection Glass	Sicherheitsglas	Beschermglas	Verre de protection	Vidrio de protección	Protetto con vetro	Защитное стекло	
	Tempered Glass	Temperiertes Glas	Getemperd beschermglas	Verre de protection température sur verre	Cristal atemperado	Vetro temperato	Закалённое стекло	
	Fixation Ceiling	Deckenmontage	Plafondbevestiging	Montage au plafond	Montaje en techo	Montaggio a soffitto	Потолочное крепление	
	Fixation Wall	Wandmontage	Wandbevestiging	Montage au mur	Montaje en pared	Montaggio a parete	Настенное крепление	
	Fixation Floor	Bodenmontage	Vloerbevestiging	Montage au sol	Montaje en suelo	Montaggio a pavimento	Напольное крепление	
	Up/Down	aufwärts/abwärts strahlend	Verlichting up of down	Éclairage haut ou bas	Emisión superior/inferior	Luce monoemissione sopra/sotto	Освещение вверх или вниз	
	Side	seitlich abstrahlend	Verlichting lateraal	Éclairage laterale	Emisión lateral	Luce laterale	Освещение в сторону	
	Up and Down	direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce monoemissione sopra e sotto	Освещение вверх и вниз	
	Asymmetrical	asymetrisch abstrahlend	Asymmetrisch	Asymétrique	Asimétrico	asimmetrico	Асимметричный	
	Surround	allseitig abstrahlend	Sfeerverlichting	Éclairage multidirections	Emisión perimetral	Luce diffusa	Освещение вокруг	
	CE/VDE/ENEC Certificate	CE Zertifikat	CE Certificaat	Certificat CE	Certificado CE	Certificato CE	Сертификат CE	
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)	Травмоопасность (удушение)	
	Kelvin	colour temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	temperatura de color	temperatura colore	Цветовая температура
	Blue lines	not included part	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	parte no incluida	articolo non incluso	В комплект не входит

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BVBA

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SCHWEIZ GMBH

Kellerstrasse 22
6005 Luzern
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

SHOWROOMS

WEVER & DUCRÉ DEUTSCHLAND GMBH

Schanzenstrasse 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 13 06 49 60
Fax +49 221 13 06 49 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC LTD.

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 21 10 69 24
Fax +852 31 06 40 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE

10, Rue Pecquay
75004 Paris
France
Phone +33 1 40 29 81 01
office.fr@weverducre.com

WEVER & DUCRÉ LYON

36, Rue Juliette Récamier
69006 Lyon
France
Phone +33 4 72 81 12 00
office.fr@weverducre.com

WEVER & DUCRÉ AB

Hårdvällsgatan 18
115 46 Stockholm
Sweden
Phone +46 708 44 84 84
office.se@weverducre.com

WEVER & DUCRÉ ITALY

Via Monte Popera 4/2 (Design Center)
30027 San Doná di Piave - Venezia
Italy
Phone +39 04 21 17 78 388
office.it@weverducre.com

WEVER & DUCRÉ UK

23 Batemans Row
London EC2A 3HH
United Kingdom
Phone +44 20 31 74 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND

Ul. Posag 7 Panien 1a
02-495 Warsaw
Poland
Phone +48 730 330 337
office.pl@weverducre.com

WEVER & DUCRÉ AUSTRIA

Gleisdorfer Gasse 15
8010 Graz
Austria
Phone +43 316 31708591
showroom.at@weverducre.com

WEVER & DUCRÉ IBERIA info.es@weverducre.com

WEVER & DUCRÉ NETHERLANDS info.nl@weverducre.com

WEVER & DUCRÉ RUSSIA russia@weverducre.com


WEVER & DUCRÉ MIDDLE EAST office.me@weverducre.com

WEVER & DUCRÉ FINLAND office.fi@weverducre.com

WEVER & DUCRÉ NORWAY office.no@weverducre.com

2nd edition, April 2020, ©Wever & Ducré® bvba.

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré bvba shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some original images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an 

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PRINTING

PHOTOGRAPHY

Egija Zirapa, Location Brewery Cēsis (Latvia)

Carina Erlach, Ramona Gaar, Doris Tatschl, Valerie Thaller, Sara Wilfing

Carina Erlach, René Zavadilik

Lukas Hochenwarter, Doris Tatschl

Tanja Petschnig

Volker Waldhauser

Drukarnia Perfekt S.A., Warsaw, Poland

311PHOTOGRAPHY (p. 452-453) | Adelina Illiev (p. 536) | Aikon Producties bvba (p. 92) | Aleksandr Dal Cero (p. 268-269) | Alexander Maria Lohmann (p. 266) | Andrea Badrutt (p. 324) | Artion Istuganov (p. 598) | Aurélien Aumont (p. 170) | Beatrice Graalheim (p. 416) | B.C. Gassner (p. 582) | Bruno Eggermont (p. 156) | Candice Athenais (p. 69) | Carlo Ambrosi (p. 140) | Christian Brandstätter (p. 590) | Christian Repnik (p. 662) | Christian Weinrich (p. 130-139, 146) | Christoph Steinbauer (p. 86, 370, 428, 478, 566, 572, 630, 670, 676) | Corinna Unterkofler (p. 17) | Corinna Unterkofler/Joachim Grubelnik (p. 143, 392, 506-507, 652) | Croce & Wir (p. 664-665) | Dani Rovira Fotografia (p. 660) | David Aebi (p. 668) | Edgar Navarre (p. 508, 512) | Egon Gade (p. 248-249) | Emma Marshall Photography (p. 158-159) | FOTOMOHITO (p. 446) | Erich Sinzinger Fotografie (p. 666) | George Fakaros (p. 680) | Georges Leroux (p. 149) | Gerald Rafelghem (p. 640) | Hannes Windrath (p. 160) | Harald Eisenberger (p. 114-115) | Jack Lovel (p. 496, 548) | Fotografie Jaro van Meerten, The Art of Living Magazine (p. 214) | Jean Marc Manson (p. 274) | Jiří Dymáček (p. 614-615) | Joachim Grothus (p. 306) | KAPP-HAMMER (p. 50) | Kim Forrsén (p. 204, 426, 482, 602, 674) | Kris Dekeijser (p. 56, 68, 90, 94, 96, 102, 106-108, 112, 116, 122, 142, 152, 154, 172, 174-181, 186, 188, 190, 198, 202, 206-210, 212, 218, 230-233, 250, 254-258, 278, 282-286, 298, 300-301, 304, 310, 312-314, 328, 330-334, 360, 362, 372-375, 396-402, 408-410, 416, 422, 425, 430, 436, 440, 444, 448, 460, 464, 468, 470, 474, 484, 502, 504, 520, 556, 574, 578, 600, 606, 616, 628, 644, 646, 654, 682) | Kurt Hoerbst (p. 480, 580-581) | Kurt Kuball (p. 162-163, 594, 604, 642, 672) | Laura Bertone (p. 302, 322) | Lukas Jahn (p. 550-551) | Lukas Roth (p. 80) | Lupi Spuma Fine Photography (p. 8-12, 22-25) | Lux Visual Storytellers (portrait pictures cover) | Marc Diez (p. 38, 110) | Mark Hadden (p. 182, 404) | Marco Richter Photography (p. 220) | Martin Baitinger (p. 104-105) | Martin Steinthaler (p. 588) | Martin Zilka (p. 684) | Mattia Aquila (p. 280, 394) | Miriam Raneburger (p. 584) | Nikki Candelerio (p. 276-277) | Oliver Nauditt (p. 442) | Paul Karalius (p. 610, 678) | paul ott fotografiert (p. 82-84, 87, 433, 570-571, 612, 620, 634, 656, 658) | Paula Beetlestone (p. 618) | Peter Holgersson AB (p. 626) | Philip Kottlorz Fotografie (p. 44) | Photojoost (p. 462) | Rory Gardiner (p. 632) | Salvatore Guido (p. 30-36, 40-43, 46-48, 52-54, 58-66, 70-78, 120, 124, 144, 168, 194, 222-228, 260-262, 290-297, 316-321, 326, 386-389, 412-414, 420, 438, 490-494, 522-534, 538-540, 544, 552-554, 558, 560) | Saskia Devinne (p. 334) | SCHWARZ - LICHT / fotografie + kommunikation (p. 424) | Selma Hengeveld (p. 98) | Andrey Bezuglov (p. 216, 308) | Sonja Zettl (p. 100-101) | Søren Kristensen (p. 246) | Sourbron Fotografie (p. 450) | stella (COVER, p. 14-15) | Studio Erick Sallet (p. 192, 514) | Tiziano Cristofoli (p. 288, 289) | Tom Ferguson (p. 434, 546) | Vogelsänger Studios (p. 418-419) | Walters Media (p. 498, 500-501) | wide shot photography Alexandre Van Battel (p. 150) | www.raumpixel.at (p. 406) | Zvonimir Mihaljek (p. 596)

**THIS
IS NOT
THE
END**

PAY A VISIT TO [WEVERDUCRE.COM](https://www.weverducre.com)

