



FROM
BELGIUM
WITH
LOVE.



WEVER & DUCRÉ
LIGHTING

LIFE IS
TOO SHORT
FOR BORING
LIGHTING



WEVER & DUCRÉ
LIGHTING

ROOMOR 26 — 49								
	SUSPENDED 27	OFFICE SUSPENDED 31	OFFICE CEILING 33	OFFICE ON TRACK 35	WALL 37	WALL 45	TABLE 47	FLOOR 49
MIRRO 52 — 67								
	CEILING 53	SUSPENDED 55	WALL 57	WALL 59	TABLE 65	FLOOR 67		
DRO 68 — 83								
	CEILING 69	SUSPENDED 71	WALL 75	WALL 75	FLOOR 79	TABLE 81	FLOOR 83	FLOOR 83
WIRO 84 — 113								
	DIAMOND 91	DIAMOND 97	GLOBE 107	CONE 109	CEILING 113	WALL 111		
J.J.W. 114 — 131								
	WALL 117	WALL 119	CEILING 123	SUSPENDED 125	SUSPENDED 127			

CEILING RECESSED 134 — 225								
	DEEP BIJOU 139	DEEP PETIT 141	DEEP 143	DEEPER 145	DEEP ADJUST PETIT 147	DEEP ADJUST 149	DEEP ADJUST 153	DEEP ADJUST TRIMLESS 155
								
DEEP ASYM ADJUST 157	DEEP ADJUST FORT 159	SPINEO 161	RONY 163	PIRRO 165	RON 169	PLANO PETIT 171	PLANO 173	PLANO FORT 175
								
STRANGE PETIT 177	STRANGE 179	SNEAK TRIM 181	SNEAK TRIMLESS 183	MATCH 187	CENO 1.0 189	CENO 2.0 191	BLIEK ROUND PETIT 195	BLIEK ROUND 197
								
BLIEK SQUARE 199	RUVI 201	DEEP BIJOU IP65 205	DEEP IP44 IP65 207	DEEPER IP44 209	TAIO IP65 213	LUNA ROUND IP44 215	RINI SNEAK IP44 217	LUNA SQUARE IP44 219
				CEILING SURFACE 226 — 313				
PLANO IP44 221	MIRBI IP44 1.0 223	MIRBI IP44 2.0 223	CITY IP44 225					
								
ROOMOR OFFICE 33	MIRRO 53	DRO 69	WIRO 113					
								
J.J.W. 123	RAY MINI 229	RAY 231	BOX MINI 237	BOX 239	DOCUS MINI 245	DOCUS 247	HEXO MINI 251	HEXO 253
								MORE ON THE NEXT PAGE
PIRRO SPOT 4.1 257	PIRRO SPOT 2.0 259	PIRRO SPOT 4.0 259	PIRRO OPAL 261	SOLID PETIT 1.0 263	SOLID PETIT 2.0 263	SOLID 267	SIRRO 271	

INDOOR



PLANO PETIT
275



PLANO
279



SARA
281



SQUBE
283



MATCH
289



CENO
291



MICK
295



CLEA
299



CLOCK
301



VENN
303



ROB IP44
305



ROBY IP44
307



TOWNA IP44
309



TAIO IP65
311



MIRBI IP44 1.0
313



MIRBI IP44 2.0
313

TRACKS
STREX
314 — 355



48V
TRACKS
319



MATCH
325



CENO
327



MICK
331



RAY MINI
335



BOX MINI
337



DOCUS MINI
339



HEXO MINI
341



OPAL LIGHT
MODULE
343



DOTS LIGHT
MODULE
343



ODREY
345



STUBE
353



SOLLI
355

TRACKS
1-PHASE
358 — 377



1-PHASE
TRACKS
359



SARA
361



SQUBE
365



PIRRO
367



DRO
369



ODREY
371



RAY
377



HEXO
377

TRACKS
3-PHASE
378 — 389



3-PHASE
TRACKS
379



SQUBE
381



CENO FORT
387



RAY
389



HEXO
389

SYSTEMS
390 — 405



ELLO
SYSTEM
391



PIRRO
SYSTEM
397



ILANE
401

CEILING
SUSPENDED
406 — 475



ROOMOR
31



MIRRO
55



DRO
71



WIRO
95



DIAMOND
97




GLOBE
107



CONE
109



J.J.W.
125



RAY
411



BOX
413



DOCUS
415


INDOOR




HEXO
417



SHIEK 2.0
421




SHIEK 3.0
423



SHIEK 4.0
425



WETRO
429



ODREY
437



DINOR 1.0
447



DINOR 2.0
447




DINOR 3.0
447




SOLLI
451



STUBE
453



CORK
455



CONE
457



BISHOP
459



NET
463



ELLO
465



DARF
469



GIGANT
473

RAY MULTI
411




BOX MULTI
413



DOCUS MULTI
415



HEXO MULTI
417



WETRO MULTI
429



SHIEK MULTI
421



ODREY MULTI
437



WALL
RECESSED
476 — 489



RETO
479

LITO 1.0
481



LITO 2.0
481



STRIPE
483



STRANGE
485



THEMIS
487



ORIS
489



WALL
SURFACE
490 — 579



ODREY
495



RAY MINI
501

RAY
503



BOX MINI
509



BOX
511



DOCUS MINI
517



HEXO MINI
519



TRACE
521



TRAIN
525



CENTRAL
527



SARA SNOOZE
529



MATCH
SNOOZE
533



MICK SNOOZE
535



MICK WALL
537



LEENS
539



BENTO
541



DOMINO
543



SCAVA
545



DOT
547



FINLIN
551




CLEA
555



CLOCK
557



TAPIS
559



MILES
563




MILES
567



MILES
569



VENN
571



DARF
575



MORE
ON THE NEXT
PAGE

WEVER & DUCRÉ 4 — 5

INDOOR

						
MIRBA IP44 577	MIRBI LONG IP44 579	ROOMOR 37	MIRRO 59	DRO 75	WIRO 111	J.J.W. 119

TABLE					
	ROOMOR 47	MIRRO 65	DRO 79	DRO 81	REVER 133

FLOOR SURFACE				
	ROOMOR 49	MIRRO 67	DRO 83	DRO 83

OUTDOOR

CEILING RECESSED 582 — 589					CEILING SURFACE 590 — 611				
 DEEP BIJOU IP65 585	 DEEP IP65 585	 TAIO IP65 587	 INTRA 589		 TRAM 593	 TUBE 595	 TAIO 597		
 RAY 599	 TRAIN 601	 TUBE CARRÉ 603	 BOX 605	 ROB 609	 BLAS 1.0 611	 BLAS 2.0 611	WALL RECESSED 612 — 621		 RETO 615
 ORIS 619	WALL SURFACE 622 — 667		 TRAM 625	 TUBE 1.0 627	 TUBE 2.0 629	 TAIO 631	 RAY 633	 TRAIN 635	 CENTRAL 639
 STATION 641	 TUBE CARRÉ 1.0 643	 BOX 1.0 649	 BOX 3.0 649	 BOXX 655	 X-BEAM 657	 RETO 659	 PALOS 661	 TAPE 663	
 SWAM 665	 GETTON 667	FLOOR RECESSED 668 — 681		 CARD 0.1 671	 CARD 0.2 671	 MAP 673	 MAP ASYM 677	 CHART 679	 CHART ASYM 681
FLOOR SURFACE 682 — 717		 STIPO 685	 STAKE 687	 STAKE FOLD 687	 X-BEAM 689	 SWAM 691	 PACE 695	 LINUS 697	 PALOS ROUND 699
 PALOS CARRÉ 701	 FIFTY FIFTY 703	 SWAY 705	 GETTON 707	 PALLUZ 709	 TAPE 711	 COSTA 1.0 713	 COSTA 2.0 715		

I'LL TAKE THE BIKE

HOMETOWN GLORY KORTRIJK



How about some fresh waffles? Grab your bike and pedal on down to Kortrijk. You can rent one on pretty much every corner in 2020's Best Bike City. Get from A to B incredibly quickly and without hurting the environment. We think it's great – and can't imagine a better place for sustainable ideas. Our lights are so much more than just an amazing design – their inner values count, too. We make sure every item limits resource use and avoids disposable packaging. Who inspires us? People like you. People who care about a clean environment as much as they care about elegant design. People who see plastic as yesterday's news.

Wie wär's mit frischen Waffeln? Dann schwingen Sie sich in Kortrijk am besten aufs Rad. Das kann man in der „Best Bike City 2020“ nämlich fast an jeder Straßenecke mieten. Und sich so schnell und umweltschonend von A nach B bewegen. Tolle Sache, finden wir und können uns keinen Ort vorstellen, an dem sich nachhaltige Ideen besser umsetzen ließen. Schließlich sollen unsere Leuchten nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punkten. Also achten wir bei jedem Stück darauf, dass Ressourcen geschont und Einwegverpackungen vermieden werden. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die auf edles Design ebenso viel Wert legen wie auf eine saubere Umwelt. Und für die Plastik echt von gestern ist.



WELCOME TO OUR NEW HEADQUARTERS

FROM HERE TO EVERYWHERE



A little tip before you start out: The easiest way to find our new warehouse is to head towards the four large wind turbines. They can be clearly seen from a distance in Kortrijk. It is something we are especially proud of. As basically these gentle giants supply the green energy to ensure the sustainable packaging and super-fast shipping of our products every day, to virtually any place in the world. If you also think that's a good thing, our premium showroom is just five minutes away and you can simply call in and get to know the world of Wever & Ducré on an exclusive tour. Our brand new collection is ready and waiting for you.

Kleiner Tipp vorweg: Den Weg zu unserem neuen Warehouse finden Sie am leichtesten, wenn Sie den vier großen Windrädern folgen. Die sieht man in Kortrijk nämlich schon von weitem. Und das macht uns richtig stolz. Schließlich sorgen die sanften Riesen täglich dafür, dass unsere Produkte mit nachhaltiger Energie verpackt und superschnell versandt werden. Und zwar an so ziemlich jeden Ort der Welt. Finden Sie gut? Dann kommen Sie doch einfach mal vorbei und lernen Sie die Welt von Wever & Ducré bei einer exklusiven Tour durch unseren Premium Showroom, fünf Minuten entfernt, kennen. Unsere brandneue Kollektion wartet schon auf Sie.

SHOWROOM

WEVER & DUCRÉ
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

WEVER & DUCRÉ
Evolis 118
8530 Harelbeke
Belgium



EXPLORE KORTRIJK
weverducre.com/kortrijk




WITH YOU, I AM HOME

AROUND THE WORLD

What makes Wever & Ducré luminaires so fantastic? Simply that they feel at home in 60 countries around the world. They shine just as comfortably in a London rooftop bar as in an ultra-modern high-rise apartment in Hong Kong. What is the secret of their success? Exceptional design and high-quality materials give each luminaire a personal appeal for everyone. Sounds perfect? Then you will be delighted to learn not just about the super-fast delivery for our products but also about the plastic-free packaging for shipping we have been using for years, even for the smallest screws. So cast an eye in the right direction and select one of the various showrooms. Our new collection is ready and waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl wie in einem trendigen City-Apartment in Hong Kong. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblingsstück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach rechts werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.


REPRESENTATIVE OFFICES



WEVER & DUCRÉ LUCERNE
Kellerstraße 22
6005 Lucerne
+41 41 361 60 60
Switzerland




WEVER & DUCRÉ VIENNA
Marxergasse 1B
1030 Vienna
+43 1 526 47 84
Austria



WEVER & DUCRÉ OSLO
Drammensveien 288
0283 Oslo
+47 24 07 61 11
Norway



WEVER & DUCRÉ HELSINKI
Sörnäistenkatu 1
00580 Helsinki
+358 50 506 71 82
Finland



WEVER & DUCRÉ DUBAI
Office No. 704, HDS Business Center, Cluster M,
Jumeirah Lakes Towers, DMCC, PO Box 336603 Dubai
+971 4 436 23 47
United Arab Emirates




WEVER & DUCRÉ BARCELONA
Gran vía de les Corts Catalanes 654
08010 Barcelona
+34 931 205 928
Spain



SHOWROOMS


WEVER & DUCRÉ COLOGNE
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 130 649 60
Germany




WEVER & DUCRÉ LONDON
23 Batemans Row
EC2A 3HH London
+44 203 174 01 77
United Kingdom



WEVER & DUCRÉ STOCKHOLM
Hårdvallsgatan 18
115 46 Stockholm
+46 73 045 76 39
Sweden



WEVER & DUCRÉ VENICE
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 177 83 88
Italy



WEVER & DUCRÉ LYON
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 811 199
France




JOIN US VIRTUALLY


360-tour.be/Wever&Ducré/showroom/




WEVER & DUCRÉ HONG KONG
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
+852 211 069 24
Hong Kong



WEVER & DUCRÉ WARSAW
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 358
Poland



WEVER & DUCRÉ GRAZ
Gleisdorfer Gasse 15
8010 Graz
+43 316 317 085 91
Austria



WEVER & DUCRÉ PARIS
10, Rue Pecquay
75004 Paris
+33 1 402 981 01
France


THANK YOU FOR THE FLOWERS

WE LOVED TO SEE YOUR ARTWORK GROW



Jonas believes that “Inspiration can be found anywhere.” However, he prefers to look for it in small bookstores and in the hustle and bustle of cities. This is where he came up with the concept for our mural, which in 2022 will focus on the topic of “light”. “I would describe my work as an illustrative collage. A mixture of patterns, geometric shapes and naturalistic elements”, explains the artist, for whom flowers in particular have a strong, symbolic meaning: “For me, they represent aesthetics and growth. Two aspects that I was particularly concerned with in this project”. “Not least”, continues Jonas, “because I have also grown personally through self-initiated, artistic work. As a commercial illustrator, one is usually confined to a precise briefing. In this case it was completely different.” A freedom that visibly inspired the Belgian artist. And this is particularly radiated by the mural with its intense black-blue contrasts. And just to let you know: Jonas’ artwork is now officially one of Kortrijk’s new attractions, and you can view it personally right in our new foyer.

„Inspiration lässt sich überall finden“, sagt Jonas, der am liebsten in kleinen Buchläden und aufregenden Städten nach ihr sucht. Hierbei kam ihm auch die Idee zu unserem Mural, bei dem 2022 das Thema „Licht“ im Zentrum steht. „Ich würde mein Werk als illustrative Collage bezeichnen. Eine Mischung aus Mustern, geometrischen Formen und naturalistischen Elementen“, erklärt der Künstler, für den vor allem Blumen eine starke, symbolische Bedeutung haben: „Für mich stehen sie für Ästhetik und Wachstum. Zwei Dinge, die mich bei diesem Projekt besonders beschäftigt haben“. „Vor allem“, so Jonas weiter, „weil ich durch das freie, künstlerische Arbeiten auch persönlich gewachsen bin. Als Werbeillustrator ist man ja meist an genaue Briefings gebunden. Hier war das etwas vollkommen anderes.“ Eine Freiheit, die den Belgier sichtlich beflügelt hat. Und das Mural mit seinen intensiven Schwarz-Blau-Kontrasten ganz besonders strahlen lässt. Übrigens: Bewundern kann man Jonas’ Kunstwerk direkt in unserem neuen Foyer, das jetzt ganz offiziell zu Kortrijks neuen Sehenswürdigkeiten zählt.

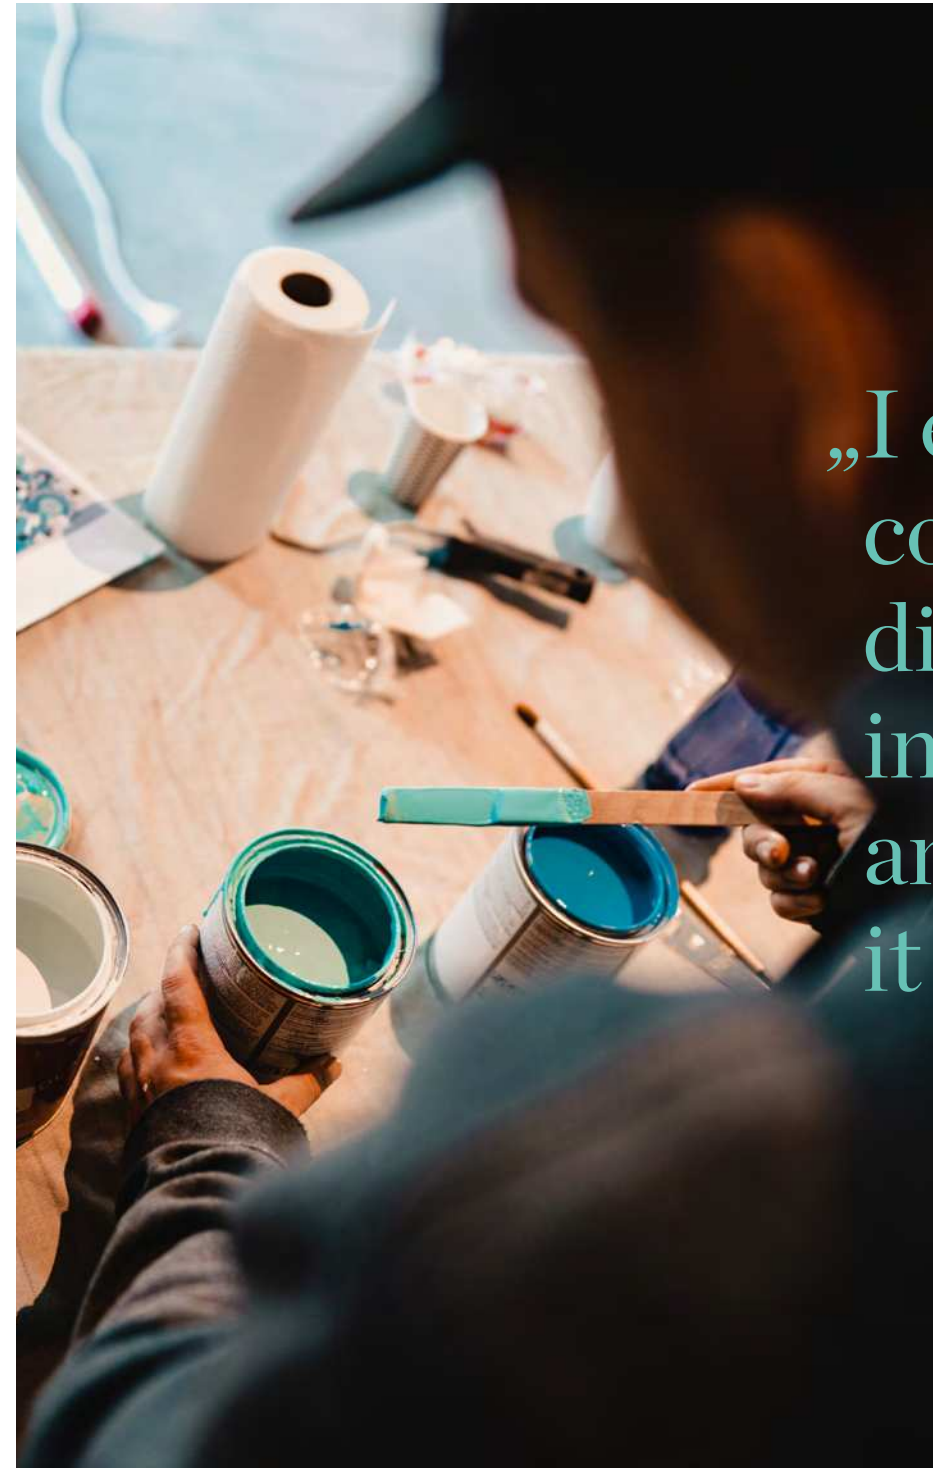

„I enjoy
combining
different
influences
and see where
it leads me.“

JONAS DEVACHT



LESS IS MORE

WHY IT'S OKAY TO SKIP SOME PAGES



weverducre.com/lessismore



SUSTAINABLE BY DESIGN

WE ARE COMMITTED

We don't merely develop our products to comply with the standards of the Ecodesign Directive, we go one step further and ensure the simplest and best possible long-term replaceability of the components: You can rely on the availability of appropriate replacements for LED engines for 20 years. The basis for longevity is a consistent quality standard right from the start, which is why we give a 5-year guarantee on our products. But it is not just our products themselves that are durable, our choice of materials and paints is also geared towards sustainability. In collaboration with the COLORNETWORK* we develop products in "Sustained Colors". These are products which are characterized by long-term validity and versatility.



Wir entwickeln unsere Produkte nicht nur nach den Standards der Ökodesign-Richtlinie, wir gehen noch einen Schritt weiter und stellen eine möglichst einfache und langfristige Austauschbarkeit von Komponenten sicher: Auf die Verfügbarkeit passenden Ersatzes für LED-Engines können Sie sich für 20 Jahre lang verlassen. Grundlage für Langlebigkeit ist ein konsequenter Qualitätsanspruch von Anfang an, weshalb wir für unsere Produkte 5 Jahre Garantie gewähren. Aber nicht nur unsere Produkte sind langlebig, auch unsere Material- und Farbwahl ist auf Nachhaltigkeit ausgerichtet. In Zusammenarbeit mit dem COLORNETWORK® entwickeln wir Produkte in „Sustained Colors“. Hierbei handelt es sich um Produkte, die sich durch Langzeitgültigkeit und Kombinationsfreude auszeichnen.

*The conditions of guarantee available to view at weverducre.com apply
*Es gelten die auf weverducre.com verfügbaren Garantiebedingungen

“A Sustained Color is characterised by long-term validity and versatility.”

OLIVER MÄRSCH
SALES DIRECTOR WEVER & DUCRÉ
MEMBER OF COLORNETWORK®



weverducre.com/sustainability



NOW I'M ALL YOURS

IT'S ALL-SYSTEMS-GO IN 48 HOURS

Well, that's the thing about crushes. Once you've set your heart on a light, of course you want it straightaway. The good news is that our super-fast delivery service makes this easy. 90% of our collection is shipped straight from our Kortrijk warehouse. No more endless waiting. And, of course, no plastic packaging. At all. Want to know for sure? Then simply check your crush's availability online. You can already start chilling the champagne.

Tja, so ist das mit dem Product Crush: Hat man sich erst mal in eine Leuchte verliebt, will man sie natürlich sofort bei sich haben. Die gute Nachricht: Mit unserem superschnellen Lieferservice ist das kein Problem. Denn 90% der Kollektion kann direkt von unserem Warehouse in Kortrijk aus versandt werden. Ohne lange Wartezeiten. Und natürlich ganz ohne Plastikverpackung. Sie möchten's genau wissen? Dann checken Sie die Verfügbarkeit Ihres Lieblings doch einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.



“I'm always fast. Just like our delivery service.”

YVES MARGINET
AREA SALES MANAGER

IN

DOOR



DESIGNER FAMILIES

p. 24 – 133

ROOMOR 3H DRAFT



**ROOMOR CABLE
SUSPENDED**
27



**ROOMOR OFFICE
CABLE SUSPENDED**
31



**ROOMOR OFFICE
CEILING SURFACE**
33



**ROOMOR OFFICE
ON TRACK**
35



**ROOMOR
WALL 1.0**
37



**ROOMOR
WALL**
45



**ROOMOR
TABLE 1.0**
47



**ROOMOR
FLOOR**
49

MIRRO 13&9 DESIGN



**MIRRO
CEILING**
53



**MIRRO
SUSPENDED**
55



**MIRRO
WALL**
59



**MIRRO
TABLE**
65



**MIRRO
FLOOR**
67

DRO 13&9 DESIGN




**DRO
CEILING**
69




**DRO
SUSPENDED**
71



**DRO
WALL**
75



**DRO
TABLE | FLOOR**
79



**DRO
FLOOR**
83

WIRO BERND STEINHUBER



**WIRO SUSPENSION
SYSTEMS**
86



**WIRO
SUSPENDED**
91



**WIRO
SUSPENDED**
93



**WIRO
SUSPENDED**
95



**WIRO
DIAMOND**
97




**WIRO
GLOBE**
105



**WIRO
CONE**
109



**WIRO
WALL**
111




**WIRO
CEILING**
113

J.J.W. JULES WABBES



**J.J.W.
WALL**
117



**J.J.W.
WALL**
119



**J.J.W.
CEILING**
123



**J.J.W.
SUSPENDED**
125





**J.J.W.
SUSPENDED**
127

REVER MARCELLO ZILIANI



**REVER
DINING**
133





1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.80kg


CODE		
2.5m	248120GG1	
2.5m	248120BK1	
2.5m	248120BB1	
6m	248220GG1	
6m	248220BK1	
6m	248220BB1	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE		
2700K 460lm	901228W3	
2700K 437lm	901228B3	
3000K 500lm	901228W5	
3000K 457lm	901228B5	

more lamps and specs on page 732



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 0.84kg


CODE		
2.5m	2481E0GG1	
2.5m	2481E0BK1	
2.5m	2481E0BB1	
6m	2482E0GG1	
6m	2482E0BK1	
6m	2482E0BB1	

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE		
2700K 800lm	9003E152	

more lamps and specs on page 732



1.2 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.07kg|0.89kg


CODE		
2.5m	248120BF2	
2.5m	248120BK2	
2.5m	248120BB2	
6m	248220BF2	
6m	248220BK2	
6m	248220BB2	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE		
2700K 437lm	901228B3	
3000K 457lm	901228B5	

more lamps and specs on page 732



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.11kg|0.94kg

CODE		
2.5m	2481E0BF2	
2.5m	2481E0BK2	
2.5m	2481E0BB2	
6m	2482E0BF2	
6m	2482E0BK2	
6m	2482E0BB2	

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE		
2700K 800lm	9003E152	

more lamps and specs on page 732



BF3



BK3




BB3



BK4



BB4



1.3 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.56kg|1.44kg


CODE	
2.5m	248120BF3
2.5m	248120BK3
2.5m	248120BB3
6m	248220BF3
6m	248220BK3
6m	248220BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 732



1.3 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.60kg|1.48kg


CODE	
2.5m	2481E0BF3
2.5m	2481E0BK3
2.5m	2481E0BB3
6m	2482E0BF3
6m	2482E0BK3
6m	2482E0BB3

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE	
2700K 800lm	9003E152

more lamps and specs on page 732



1.4 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 1.68kg


CODE	
2.5m	248120BK4
2.5m	248120BB4
6m	248220BK4
6m	248220BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 732



1.4 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.72kg

CODE	
2.5m	2481E0BK4
2.5m	2481E0BB4
6m	2482E0BK4
6m	2482E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE	
2700K 800lm	9003E152


more lamps and specs on page 732

ROOMOR

CABLE SUSPENDED



reddot award 2019
winner lighting design



UGR ≤ 19/65°
≤ 3000cd/m²
microprismatic

ROOMOR OFFICE


CABLE SUSPENDED



reddot winner 2021



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover


IP20 SDCM3 L80/60K UGR ≤ 19/65° 4.62kg

3000K | CRI >90 | 3640lm

CODE
1681M5W5
1681M5B5

4000K | CRI >90 | 3640lm

CODE
1681M5W7
1681M5B7



1.0 OPAL

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover


IP20 SDCM3 L80/60K 4.62kg

3000K | CRI >90 | 3590lm

CODE
168185W5
168185B5

4000K | CRI >90 | 3590lm

CODE
168185W7
168185B7



1.0 MICROPRISMATIC

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover

IP20 SDCM3 L80/60K UGR ≤ 19/65° 4.22kg

3000K | CRI >90 | 3640lm

CODE
1683M5W5
1683M5B5

4000K | CRI >90 | 3640lm

CODE
1683M5W7
1683M5B7

1.0 OPAL

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80/60K 4.22kg

3000K | CRI >90 | 3590lm

CODE
168385W5
168385B5

4000K | CRI >90 | 3590lm

CODE
168385W7
168385B7



UGR ≤ 19/65°
≤ 3000cd/m²
microprismatic

ROOMOR OFFICE

CEILING SURFACE



reddot winner 2021



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



ROOMOR OFFICE on track

3-PHASE

1.0 MICROPRISMATIC

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover
3-phase track adapter

IP20 SDCM3 L80/60K UGR ≤ 19/65° 4.43kg

3000K | CRI >90 | 3640lm

CODE

1684M5W5

1684M5B5

4000K | CRI >90 | 3640lm

CODE

1684M5W7

1684M5B7

UGR ≤ 19/65°
≤ 3000cd/m²
microprismatic

1.0 OPAL

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover
3-phase track adapter

IP20 SDCM3 L80/60K 4.43kg

3000K | CRI >90 | 3590lm

CODE

168485W5

168485B5

4000K | CRI >90 | 3590lm

CODE

168485W7

168485B7

back

WEVER & DUCRÉ 34 — 35



ZENTRUMLAB LA GARINGA | SPAIN

3H DRAFT



BK1



BB1


back

ROOMOR

WALL SURFACE



reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted

IP20 0°-45° 0.99kg

CODE	
	338120BK1
	338120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more lamps and specs on page 731




KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK





reddot award 2019
winner lighting design



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 1.36kg

CODE

	339120BK1
	339120BB1


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

	2700K 437lm	901228B3
	3000K 457lm	901228B5

more lamps and specs on page 731



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 1.29kg

CODE

	339220BK1
	339220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

	2700K 437lm	901228B3
	3000K 457lm	901228B5

more lamps and specs on page 731



BK1



BB1







BF2



BK3



BB4

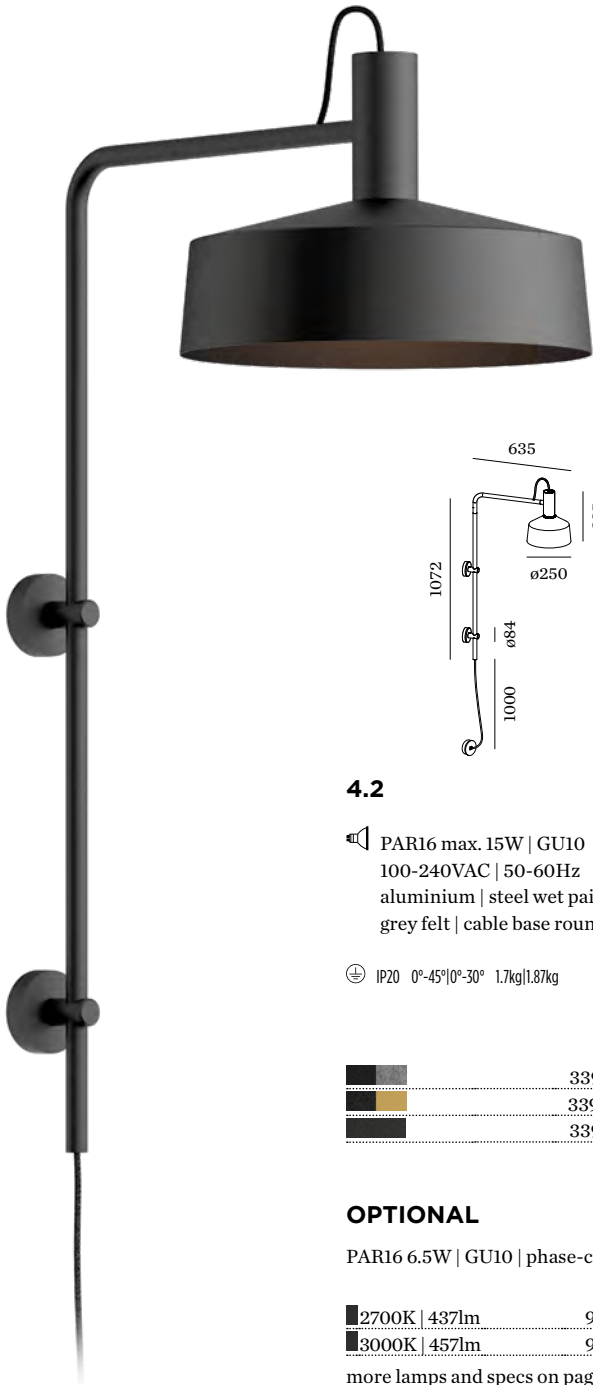

4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 1.7kg|1.87kg


CODE	
	339620BF2
	339620BK2
	339620BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	901228B3
	901228B5

more lamps and specs on page 731



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 2.24kg|2.37kg


CODE	
	339620BF3
	339620BK3
	339620BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	901228B3
	901228B5

more lamps and specs on page 731



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 2.48kg

CODE	
	339620BK4
	339620BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	901228B3
	901228B5

more lamps and specs on page 731





HOTEL ROTTERDAM | NETHERLANDS



3H DRAFT



GG1



RR1



BK1



BB1




back

ROOMOR

TABLE



reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°/0°-30° 2.35kg

CODE	
	637120GG1
	637120RR1
	637120BK1
	637120BB1

OPTIONAL


PAR16 6.5W | GU10

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731




PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

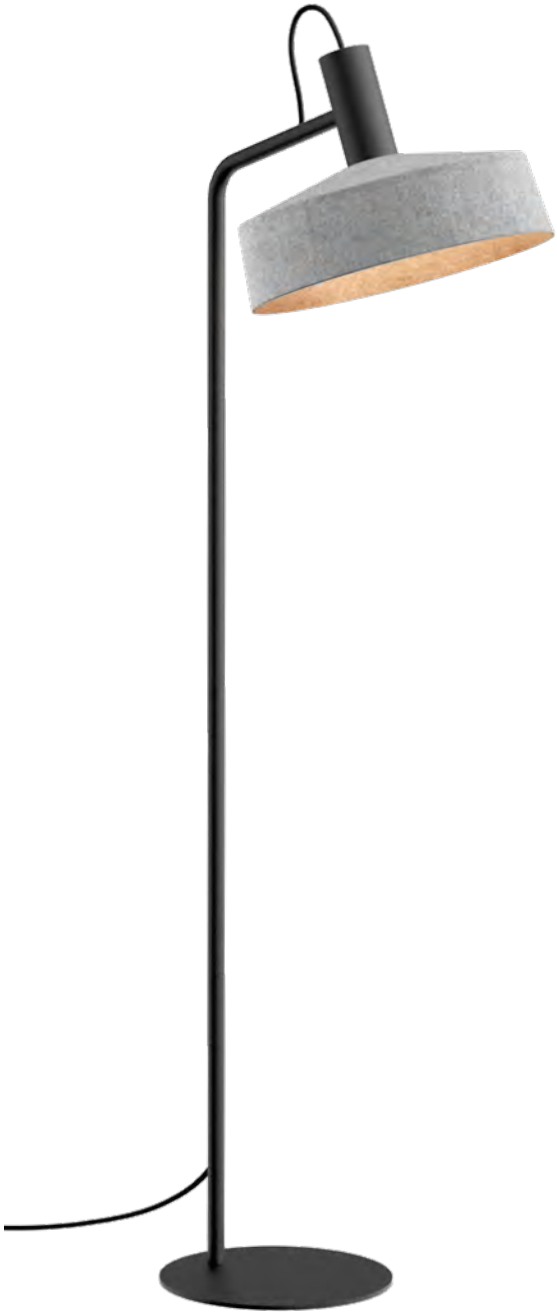

3H DRAFT



reddot award 2019
winner lighting design



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.05kg


CODE	
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 731



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.54kg

CODE	
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 731



DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN


At Studio 13&9, Anastasija and Martin Lesjak focus entirely on “transferring the creative energy of a brand to the product”. This approach is also reflected in all the collections that the Austrian designer team has designed exclusively for Wever & Ducré. DRO stands out in particular, where the designer duo has been able to take the fleeting beauty of a dewdrop and capture it permanently. As Anastasija explains: “In creating this luminaire, we have had to first delve deeply into the so-called hydrophobic effect. This causes water to cling to, or roll off a surface, thus creating clinging or stationary shapes in the process: an aesthetic that we found particularly attractive.” But the source of inspiration for 13&9 does not just come from nature, but many other creative areas, like the arts, fashion and architecture. It is a transdisciplinary approach, which is expressed in a particularly attractive manner in the MIRRO collection, designed together with the designer Sabrina Stadlober. The metallic, reflective surface of the luminaires allows both the viewer and the surroundings to be reflected at the same time. An artisan’s device, used in this instance by 13&9, to closely connect the user with the product. And it is just such details, in the pieces designed by 13&9, that draw the fascination of everyone.

Anastasija und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in allen Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasija. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“ Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallischreflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.




HAVE A LOOK
weverducre.com/dro


MORE INFO
weverducre.com/mirro



back



HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO | ITALY

MIRRO

CEILING SURFACE



1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

CODE	
	6321E0GB0
	6321E0NB0
	6321E0LB0


OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

CODE	
2200K 400lm	9003E155
2700K 495lm	9003E139

A60 5.1W | E27 | phase-cut dim
silver mirror

CODE	
2700K 418lm	9003E140



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

CODE	
	6322E0GB0
	6322E0NB0
	6322E0LB0


OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

CODE	
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142


G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



MIRRO

CEILING SUSPENDED



1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
2.5m	6341E0GB0
2.5m	6341E0NB0
2.5m	6341E0LB0
6m	6344E0GB0
6m	6344E0NB0
6m	6344E0LB0


OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

	CODE
2200K 400lm	9003E155
2700K 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

	CODE
2700K 500lm	9003E140



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
2.5m	6342E0GB0
2.5m	6342E0NB0
2.5m	6342E0LB0
6m	6345E0GB0
6m	6345E0NB0
6m	6345E0LB0


OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K 464lm	9003E157



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
2.5m	6343E0GB0
2.5m	6343E0NB0
2.5m	6343E0LB0
6m	6346E0GB0
6m	6346E0NB0
6m	6346E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror


	CODE
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K 464lm	9003E157



RESTAURANT TRIANGOLO | NANCY COOL CONIX RDBM ARCHITECTS EDEGEM | BELGIUM



1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

CODE	
	6321EOGB0
	6321EONB0
	6321EOLB0


OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

CODE	
2200K 400lm	9003E155
2700K 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 500lm	9003E140



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

CODE	
	6322EOGB0
	6322EONB0
	6322EOLB0


OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

CODE	
	6323EOGB0
	6323EONB0
	6323EOLB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror


CODE	
2700K 464lm	9003E157

MIRRO
WALL SURFACE






MIRRO
WALL SURFACE



1.0 EXTENDED

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 0.92kg



2.0 EXTENDED

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 1.25kg

CODE	
 6331EOGB0	6331EOGB0
 6331EONB0	6331EONB0
 6331EOLB0	6331EOLB0

OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

CODE	
2200K 400lm	9003E155
2700K 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 500lm	9003E140

CODE	
 6332EOGB0	6332EOGB0
 6332EONB0	6332EONB0
 6332EOLB0	6332EOLB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157






HOTEL PARK | MICHAL STAŠKO PIESTANY | SLOVAKIA





MIRRO

TABLE



1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 1.30kg

CODE	
	6301EOGB0
	6301EONB0
	6301EOLB0

OPTIONAL

A60 6W | E27 | phase-cut dim
gold mirror


CODE	
2200K 400lm	9003E155
2700K 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 500lm	9003E140




PRIVATE RESIDENCE BELGIUM

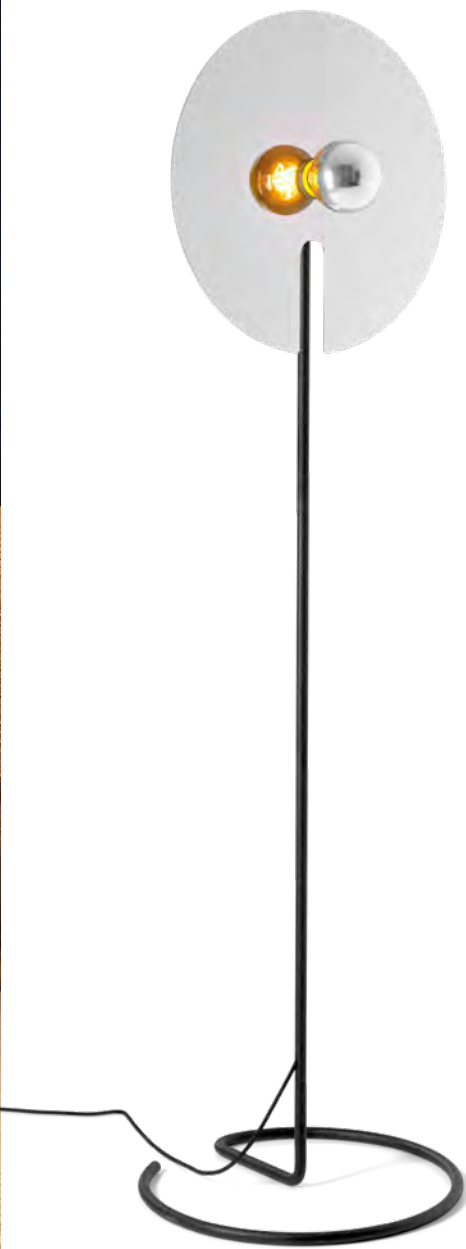

13&9 DESIGN

MIRRO


FLOOR SURFACE



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.30kg



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.70kg

CODE	
	6311EOGB0
	6311EONB0
	6311EOLB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

CODE	
	6312EOGB0
	6312EONB0
	6312EOLB0


OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 377lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



brown on



brown off



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.32kg

	CODE
	1721G0WB0
	1721G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim
CODE
3000K | 250lm 9010G804
more lamps and specs on page 732



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.89kg

	CODE
	1722C0WB0
	1722C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
CODE
2700K | 450lm 9003C103
more lamps and specs on page 732



3.0


A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass



IP20 1.96kg

	CODE
	1723E0WB0
	1723E0YB0

OPTIONAL


A60 9W | E27 | phase-cut dim
CODE
2700K | 800lm 9003E152
more lamps and specs on page 732



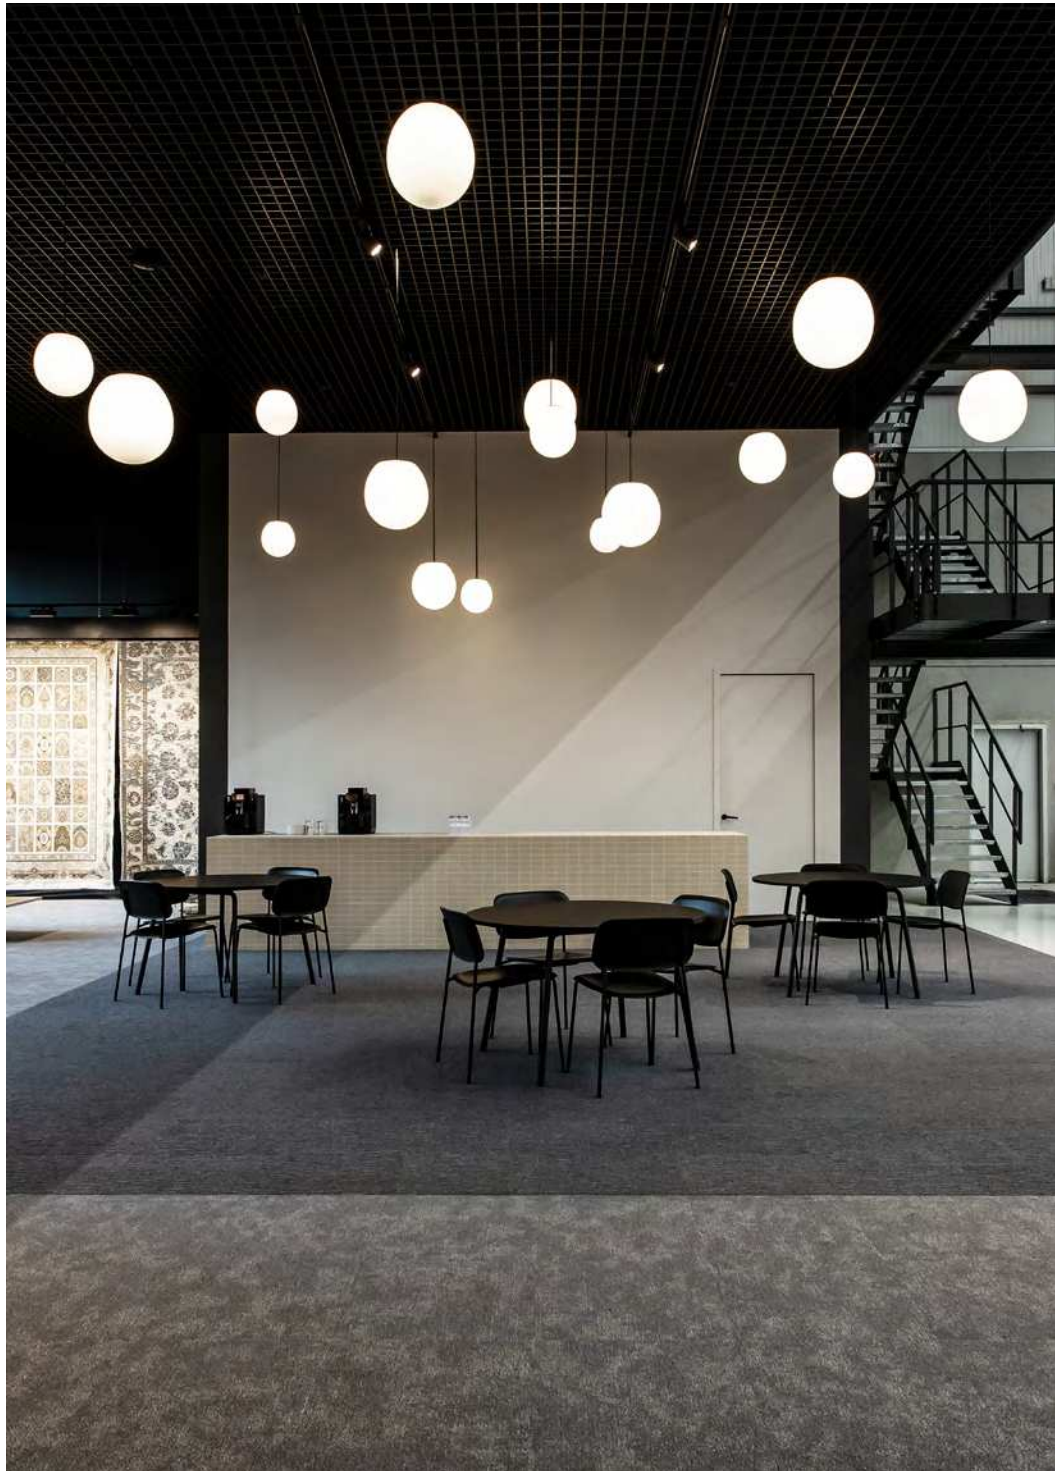

brown on

brown off



1.0


QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.50kg

CODE	
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim
CODE
3000K | 250lm 9010G804
more lamps and specs on page 732



2.0


C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.07kg

CODE	
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
CODE
2700K | 450lm 9003C103
more lamps and specs on page 732



3.0


A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass

IP20 2.20kg

CODE	
	2523E0WB0
	2523E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim
CODE
2700K | 800lm 9003E152
more lamps and specs on page 732



4.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass

IP20 3.25kg


CODE	
	2524E0WB0
	2524E0YB0

OPTIONAL




A65 14.6W | E27 | phase-cut dim
CODE
2700K | 1378lm 9003E153
more lamps and specs on page 732



OFFICE AUSY | ZAFÄ INTERIEURSTUDIO | GWENDY HERREMANS GENT | BELGIUM

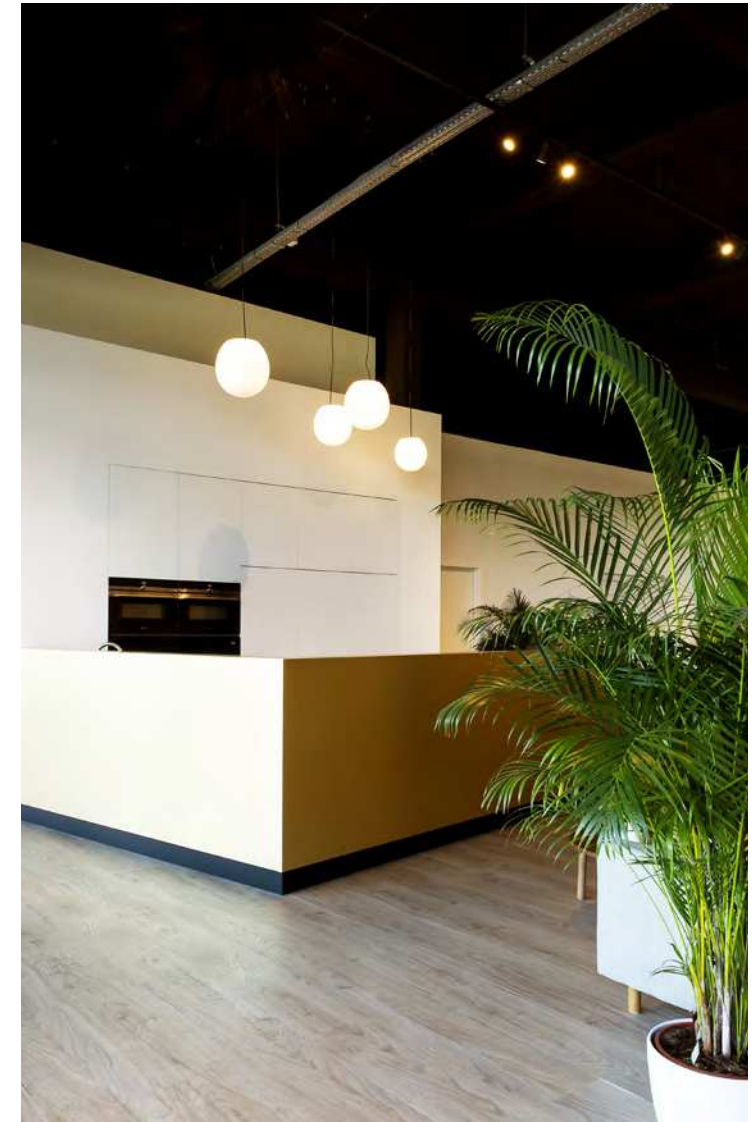

OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 0.60kg

2.0


C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 1.03kg


1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0°-35° 3.06kg



brown on



brown off

CODE	
	3431G0W0
	3431G0Y0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

CODE	
3000K 250lm	9010G804
more lamps and specs on page 732	

CODE	
	3432C0W0
	3432C0Y0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

CODE	
2700K 450lm	9003C103
more lamps and specs on page 732	

CODE	
	3441G0WB0
	3441G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

CODE	
3000K 250lm	9010G804
more lamps and specs on page 732	



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM






brown on



brown off



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with switch


IP20 0.41kg

CODE	
	6421G0WB0
	6421G0YB0

OPTIONAL

QT14 3.5W | G9

CODE	
3000K 250lm	9010G804
more lamps and specs on page 732	



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch


IP20 0.97kg

CODE	
	6422C0WB0
	6422C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

CODE	
2700K 450lm	9003C103
more lamps and specs on page 732	



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 1.97kg

CODE	
	6423E0WB0
	6423E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim


CODE	
2700K 800lm	9003E152
more lamps and specs on page 732	



brown on



brown off



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch


IP20 2.70kg

CODE	
	6432COWB0
	6432C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

CODE	
2700K 450lm	9003C103
more lamps and specs on page 732	



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 3.80kg

CODE	
	6433E0WB0
	6433E0YB0


OPTIONAL

A60 9W | E27 | phase-cut dim



CODE	
2700K 800lm	9003E152
more lamps and specs on page 732	



PRIVATE RESIDENCE NETHERLANDS

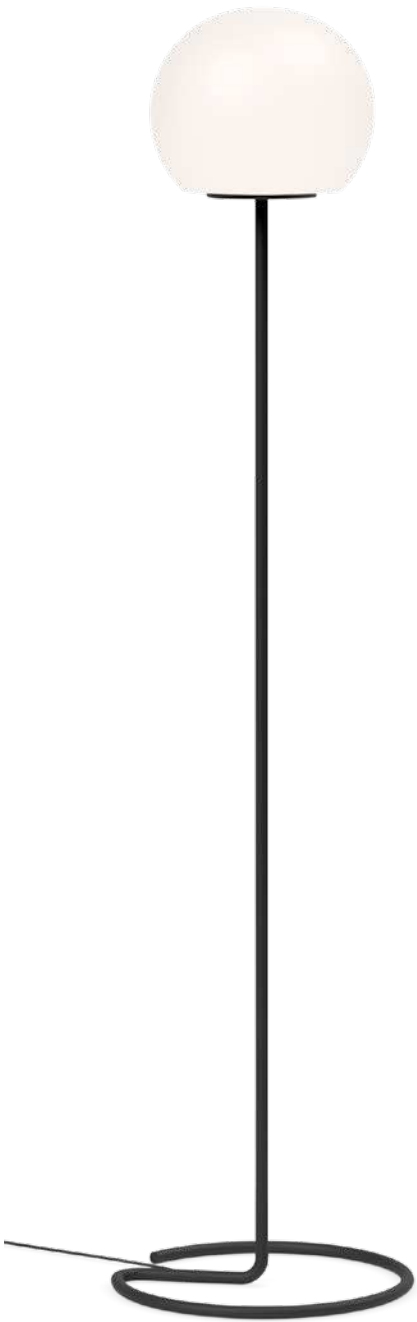

13&9 DESIGN



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 8.25kg


	CODE
	6442E0WB0
	6442E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

2700K | 800lm 9003E152
more lamps and specs on page 732

DRO
FLOOR SURFACE



1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 6.80kg

	CODE
	6443G0WB0
	6443G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

3000K | 250lm 9010G804
more lamps and specs on page 732



WIRO DIAMOND



WIRO GLOBE



WIRO




HAVE A LOOK

weverducre.com/wiro-configurator

DESIGNER

“A design is good if it brings something new and timeless to the world.”

BERND STEINHUBER

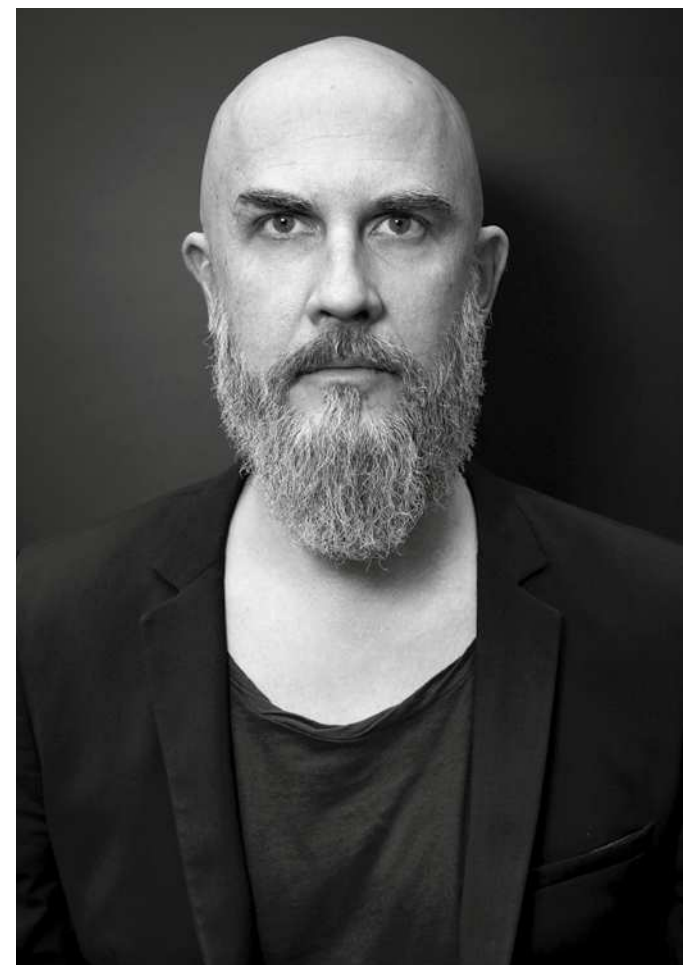

And with WIRO, Bernd Steinhuber has accomplished exactly that. What is the greatest inspiration of this Austrian designer born in 1972? Simply put: Everything. That's why his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don't stick to office hours.” That's an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.






► DESIGN WITH LOVE




rust
V



black
B

WIRO

CEILING SUSPENDED



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.7kg

	CODE
2.6m	2092E0V0
2.6m	2092E0B0
6m	2090E0V0
6m	2090E0B0

more suspension options on page 86

OPTIONAL


A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 602lm	9003E138

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 2.75kg

	CODE
2.6m	2093E0V0
2.6m	2093E0B0
6m	2097E0V0
6m	2097E0B0

more suspension options on page 86

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 602lm	9003E138



T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

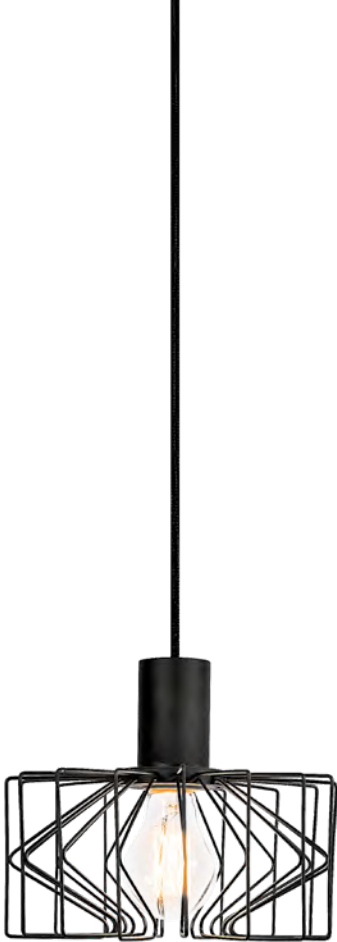

2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.82kg

CODE	
2.6m	2096E0B0
6m	2091E0B0

more suspension options on page 86

OPTIONAL

A60 6W | E27 | phase-cut dim

CODE	
2200K 315lm	9003E109
2700K 500lm	9003E138


more lamps and specs on page 732



RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO

CEILING SUSPENDED



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 3.22kg

	CODE
2.6m	2094E0V0
2.6m	2094E0B0
6m	2098E0V0
6m	2098E0B0


OPTIONAL

A60 3.8W/5.3W E27 phase-cut dim	CODE
2200K 247lm	9003E109
2700K 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 4.42kg

	CODE
2.6m	2095E0V0
2.6m	2095E0B0
6m	2099E0V0
6m	2099E0B0

OPTIONAL

A60 3.8W/5.3W E27 phase-cut dim	CODE
2200K 247lm	9003E109
2700K 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim


	CODE
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732



rust

V




black

B




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.52kg




1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.72kg



copper
P



black
B

	CODE
2.6m	2291E0P0
2.6m	2291E0B0
6m	2296E0P0
6m	2296E0B0

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732

	CODE
2.6m	2441E0P0
2.6m	2441E0B0
6m	2442E0P0
6m	2442E0B0

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732

more suspension options on page 86




THINK URBAN | DEGRAER INTERIEURARCHITECTEN KORTRIJK | BELGIUM






As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.62kg




3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 7.02kg



copper
P



black
B

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

CODE	
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732


OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

CODE	
2200K 582lm	9003E130
2700K 632lm	9003E135

more lamps and specs on page 732





1.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.92kg

	CODE	
2.6m	2281E0B0	
6m	2284E0B0	

OPTIONAL


A60 3.8W/5.3W | E27 | phase-cut dim

	CODE	
2200K 247lm	9003E109	
2700K 602lm	9003E138	

T30-300 6.8W/7W | E27
phase-cut dim

	CODE	
2200K 582lm	9003E130	
2700K 632lm	9003E135	

more lamps and specs on page 732



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

	CODE	
2.6m	2282E0B0	
6m	2285E0B0	

OPTIONAL


A60 3.8W/5.3W | E27 | phase-cut dim

	CODE	
2200K 247lm	9003E109	
2700K 602lm	9003E138	

T30-300 6.8W/7W | E27
phase-cut dim

	CODE	
2200K 582lm	9003E130	
2700K 632lm	9003E135	

more lamps and specs on page 732



4.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.92kg

	CODE
2.6m	2431E0B0
6m	2434E0B0

more suspension options on page 86

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



5.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.32kg

	CODE
2.6m	2432E0B0
6m	2435E0B0

OPTIONAL


T30-300 6.8W/7W | E27 | phase-cut dim

	CODE
2200K 582lm	9003E130
2700K 632lm	9003E135


more lamps and specs on page 732



rust
V




black
B



WIRO

CEILING SUSPENDED



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.60kg

		CODE
	2.6m	2451E0V0
	2.6m	2451E0B0
	6m	2452E0V0
	6m	2452E0B0

more suspension options on page 86

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

		CODE
2200K 428lm		9003E129
2700K 506lm		9003E136

more lamps and specs on page 732



cable plug with
dimmer switch

1.0 CONE

- T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

⊕ IP20 1.85kg

	CODE
	3341E0V0
	3341E0B0

OPTIONAL

T30-225 5.4W E27 phase-cut dim	
	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136
more lamps and specs on page 732	

1.0 CONE PLUG

- T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished
cable plug with dimmer switch

⊕ IP20 2.15kg

	CODE
	3343E0V0
	3343E0B0

OPTIONAL

T30-225 5.4W E27 phase-cut dim	
	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136
more lamps and specs on page 732	

1.8 WIRO

- T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

⊕ IP20 1.95kg

	CODE
	3345E0V0
	3345E0B0

OPTIONAL

T30-225 5.4W E27 phase-cut dim	
	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136
more lamps and specs on page 732	

1.8 WIRO PLUG

- T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished
cable plug with dimmer switch


⊕ IP20 2.25kg

	CODE
	3346E0V0
	3346E0B0

OPTIONAL

T30-225 5.4W E27 phase-cut dim	
	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136
more lamps and specs on page 732	





1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.56kg


	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.66kg


	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 0.78kg

	CODE
	2086E0V0
	2086E0B0

OPTIONAL

A60 6W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E109
2700K 506lm	9003E138

more lamps and specs on page 732



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 2.71kg

	CODE
	2083E0V0
	2083E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K 428lm	9003E129
2700K 506lm	9003E136

more lamps and specs on page 732



J.J.W. 042

J.J.W. 05

J.J.W. 02




CURIOUS?

weverducre.com/jjw

DESIGNER

“You can learn
new things from
old ones.”



JULES WABBES

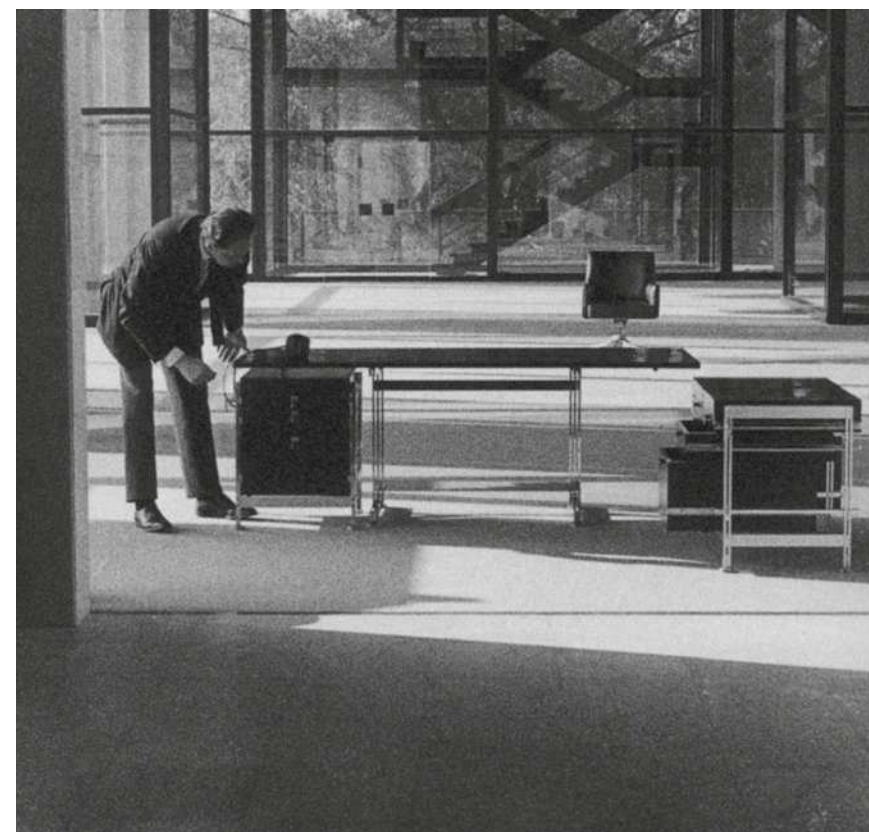

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, ©Wabbes Sofam, Brussels, 2017.

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

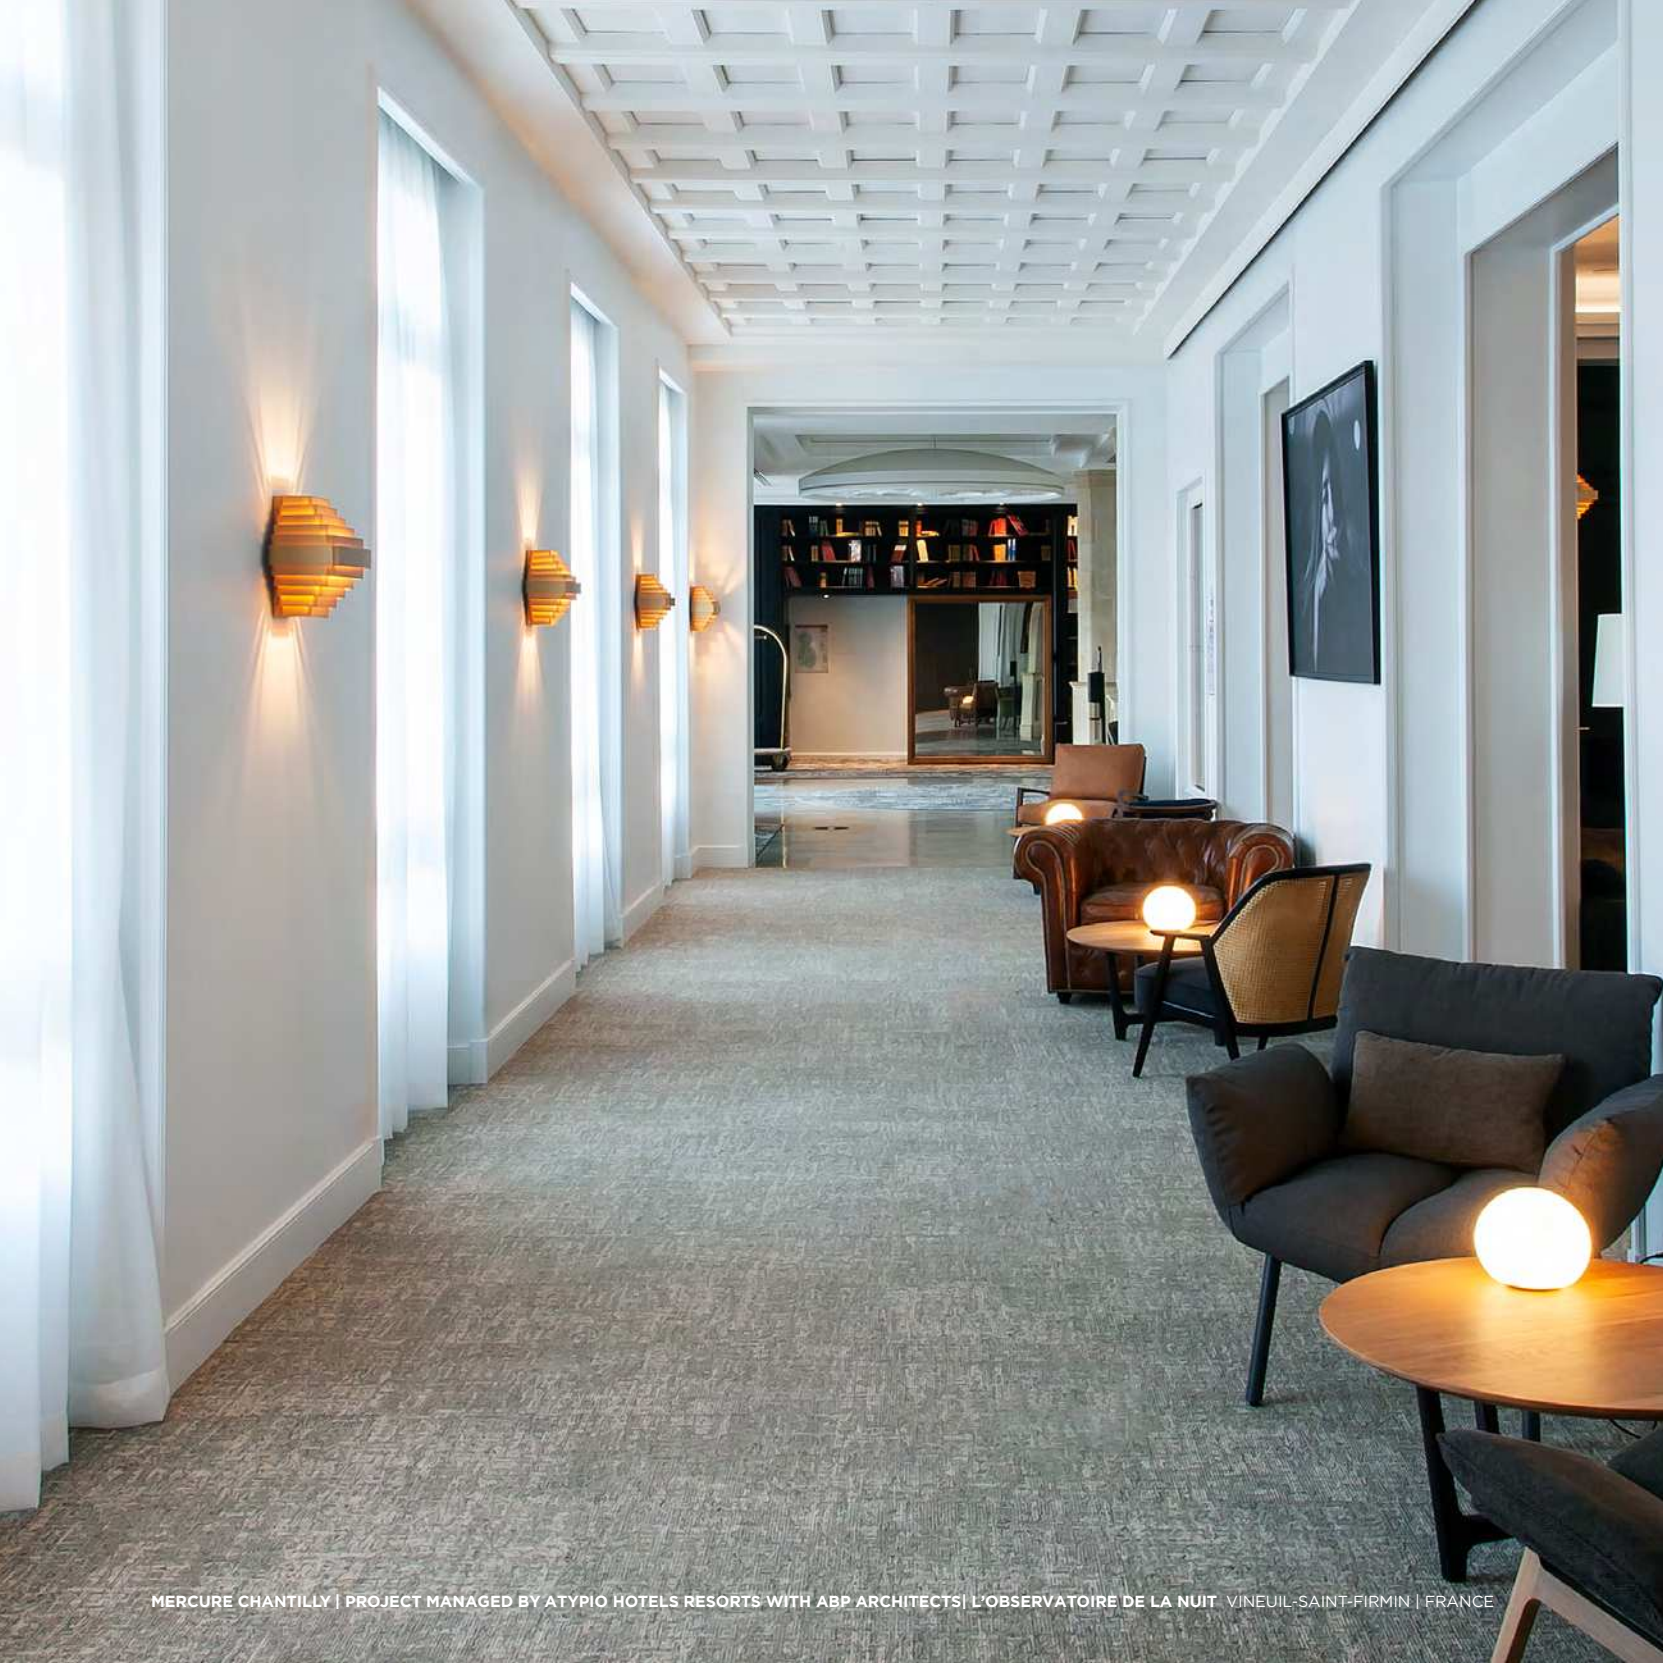

01

2x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 2.92kg


CODE	
	2054E0S0
	2054E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 602lm	9003E138

more lamps and specs on page 732



02

⌂ A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

⊕ IP20 1.02kg

CODE

2055E0S0
2055E0Q0
2055E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE


2200K 247lm	9003E109
2700K 602lm	9003E138

more lamps and specs on page 732



HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM





03

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.00kg

CODE	
	2051E0S0
	2051E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 602lm	9003E138


more lamps and specs on page 732



HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM



J.J.W.
CEILING SUSPENDED



04

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.50kg

CODE	
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 602lm	9003E138

more lamps and specs on page 732




MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES



J.J.W.
CEILING SUSPENDED



042

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.10kg

CODE	
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 602lm	9003E138

more lamps and specs on page 732



► DESIGN WITH LOVE




MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES



J.J.W.
CEILING SUSPENDED



05

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.50kg

CODE	
	2053E0S0
	2053E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 602lm	9003E138

more lamps and specs on page 732




REVER DINING

TABLE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



ALWAYS USE

1.0

LED LED 2W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder
coated zink alloy | PMMA

IP23 SDCM3 180|60K 0.80kg



flat metal plate to add to REVER
DINING with magnetic fixation
suitable to put under the table cloth

lamp body

	CODE
	655186Q_
	655186B_

LIGHT COLOUR	LUMEN CRI	CODE
2200K	115 >80	1

lamp body

	CODE
	655186Q_
	655186W_
	655186B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	135 >80	2

OPTIONAL

multiple charging tray | up to 4 fixtures

	CODE
	90018007

plate colours

	CODE
	90019163
	90019164



single metal charging tray to
add to REVER DINING with
magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166



W



Q



B

CEILING
RECESSED
SPOTLIGHTS



DEEP BIJOU
139



DEEP PETIT
141



DEEP
143



DEEPER
145



DEEP ADJUST
PETIT
147



DEEP ADJUST
149



DEEP ADJUST
TRIMLESS
155



DEEP ASYM
ADJUST
157



DEEP ADJUST
FORT
159




SPINEO
161



RONY
163



PIRRO SPOT
165



RON
169



PLANO PETIT
171



PLANO
173




PLANO FORT
175




STRANGE PETIT
177



STRANGE
179



SNEAK TRIM
181



SNEAK TRIMLESS
183

CEILING SEMI-
RECESSED
LUMINAIRES



MATCH
187



CENO 1.0
189



CENO 2.0
191



BLIEK ROUND
PETIT
195



BLIEK ROUND
197



BLIEK SQUARE
199



RUVI
201

CEILING
RECESSED
IP-RATED



DEEP BIJOU IP65
205



DEEP IP44 | IP65
207



DEEPER IP44
209



TAIO IP65
213



LUNA ROUND IP44
215



RINI SNEAK IP44
217



LUNA SQUARE IP44
219



PLANO IP44
221



MIRBI IP44 1.0 | 2.0
223



CITY IP44
225

CEILING
RECESSED

134 — 225

HOW DEEP IS YOUR DEEP?

DEEP

FIX



bijou 1.0
LED




bijou 2.0
LED



petit 1.0
LED



1.0
LED | MR16 | PAR16




bijou IP65 1.0
LED




IP44 / IP65 1.0
LED | MR16 | PAR16

DEEP ADJUST


ADJUSTABLE




petit 1.0
LED




1.0
LED | MR16 | PAR16



trimless 1.0
LED | MR16 | PAR16



2.0
LED | PAR16



fort 1.0
LED

DEEPER

FIX




1.0
LED | MR16 | PAR16



IP44 1.0
LED | MR16 | PAR16

DEEP ASYM

ADJUSTABLE



1.0
LED | PAR16

DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and emit their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP is available in different versions and a variety of sizes. And as an IP44 variant with splash protection as well as an IP65 variant with protection against water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEPER is also available as an IP44 variant, which disappears into your ceiling and is virtually invisible. Practical – the entire DEEP family can be controlled via smartphone.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante spritzwasser- und als IP65-Variante strahl-wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die gesamte DEEP Familie kann via Smartphone gesteuert werden.



DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can wander around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ASYM is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ASYM die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.



HAVE A LOOK
weverducre.com/deep



1.0

LED COB 6W | 250mA | 17V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.065kg

wire springs 50-52 85 4-25

	CODE
	165161W_
	165161G_
	165161B_

blade springs 51-54 85 4-25

	CODE
	165161W_C
	165161G_C
	165161B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	380 >90	5

ALWAYS USE

driver | 250mA

	CODE
10W dim	90226401
10W DALI	90249402

more options and specs on page 724

2.0

2x LED COB 6W | 250mA | 34V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.15kg

wire springs 50-52x100-104 60 4-25

	CODE
	165261W_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5

ALWAYS USE


driver | 250mA | only 1x needed

	CODE
15W dim	90226501
10W DALI	90249402


more options and specs on page 724



IP version
p. 205





low recessed
depth only for
2.0 LED




IC rated




585



low recessed
depth



IC rated



fits into Kaiser
ThermoX®
9320-11

DEEP petit

CEILING RECESSED



1.0 LED

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 34° SDCM2 L80|50K 0.04kg

wire springs 68-70 50 4-23

	CODE
	153561W_
	153561S_
	153561G_
	153561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 12V	440 >95	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724



IP version
p. 207

DEEP

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80I50K 0.31kg

wire springs 76-79 90 4-27

CODE	
	184261W_
	184261S_
	184261G_
	184261B_

blade springs 76-79 90 min 10

CODE	
	184261W_C
	184261B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
4000K	615/825 >90	7
2000-3000K 12V	380/560 >95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.25kg

wire springs 76-79 90 4-27

CODE	
	112110W0
	112110S0
	112110G0
	112110B0

blade springs 76-79 90 min 10

CODE	
	112110W0C
	112110B0C

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.29kg

wire springs 76-79 105 4-27

CODE	
	112120W0
	112120S0
	112120G0
	112120B0

blade springs 76-79 105 min 10

CODE	
	112120W0C
	112120B0C

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



IP version
p. 209



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80/50K 0.17kg

wire springs 76-79 95 4-38

CODE	
152361W	
152361S	
152361G	
152361Q	
152361B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	505/685 >90	3
3000K	550/740 >90	5
2000-3000K 12V	380/560 >95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.11kg

wire springs 76-79 100 4-38


CODE	
152110W0	
152110S0	
152110G0	
152110Q0	
152110B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.15kg

wire springs 76-79 115 4-38

CODE	
152120W0	
152120S0	
152120G0	
152120Q0	
152120B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731





DEEPER

CEILING RECESSED






PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM



fits into Kaiser
ThermoX®
9320-11

DEEP ADJUST petit

CEILING RECESSED



1.0 LED

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° A 34° SDCM2 L80|50K 0.05kg

wire springs 68-70 65 4-23

	CODE
	153661W_
	153661M_
	153661G_
	153661Q_
	153661B_

blade springs 69-71 65 min 8

	CODE
	153661W_C
	153661B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 12V	440 >95	9

ALWAYS USE

driver | 350mA


	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724



DEEP ADJUST

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

wire springs 86-89 90 4-23

CODE	
	184361W_
	184361S_
	184361M_
	184361G_
	184361Q_
	184361B_

blade springs 86-89 90 min 6

CODE	
	184361W_C
	184361B_C


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K 12V	380/560 >95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

wire springs 86-89 90 4-23

CODE	
	112310W0
	112310S0
	112310M0
	112310G0
	112310Q0
	112310B0

blade springs 86-89 90 min 6


CODE	
	112310W0C
	112310B0C

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

wire springs 86-89 105 4-23

CODE	
	112320W0
	112320S0
	112320M0
	112320G0
	112320Q0
	112320B0

blade springs 86-89 105 min 6

CODE	
	112320W0C
	112320B0C


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731





2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°/355° 36° SDCM2 L80/50K 0.61kg

wire springs	89x172-178	90	4-23
	CODE		
	184761W		
	184761B		


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/715	>90	3
3000K	2x575/775	>90	5
4000K	2x620/830	>90	7
2000-3000K 12V	2x380/560	>95	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE		
20W	90218601		
20W dim	90224602		
20W DALI	90244604		

more options and specs on page 726



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°/355° 0.42kg

wire springs	89x172-178	105	4-23
	CODE		
	112720W0		
	112720B0		

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE		
2700K 460lm	901228W3		
2700K 437lm	901228B3		
3000K 500lm	901228W5		
3000K 457lm	901228B5		

more lamps and specs on page 731



DEEP ADJUST trimless

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

	CODE
	184861W
	184861G
	184861B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K 12V	380/560 >95	9

ALWAYS USE

plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE


plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

plasterkit 105-110 110 12.5, 15, 20, 25


	CODE
	90017209

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

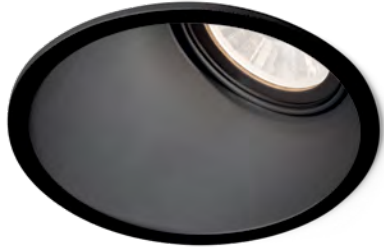

DEEP ASYM adjust

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° SDCM2 L80|50K 0.25kg

wire springs 87-88 100 4-25

	CODE
	184461W
	184461S
	184461G
	184461B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460/615 >90	3
3000K	495/665 >90	5
2000-3000K 12V	330/485 >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.23kg

wire springs 87-88 115 4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



DEEP ADJUST fort

CEILING RECESSED



1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°|355° A 34° SDCM2 L80|60K 0.36kg

wire springs 126-130 130 4-25

CODE	
	112961W
	112961B

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2490 >90	5
4000K	2680 >90	7

ALWAYS USE

driver | 700mA

CODE	
30W dim	90225702
35W DALI	90245801

more options and specs on page 727





PRIVATE RESIDENCE BELGIUM



SPINEO

CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated


IP20 0°-35°|355° 0.18kg

wire springs	79-83	70	4-16
	CODE		
	160120W0		
	160120B0		

blade springs	79-83	70	min 4
	CODE		
	160120W0C		
	160120B0C		

OPTIONAL

PAR16 6.5W GU10 phase-cut dim		
		CODE
2700K 460lm		901228W3
2700K 437lm		901228B3
3000K 500lm		901228W5
3000K 457lm		901228B5
more lamps and specs on page 731		



fits into Kaiser
ThermoX®
9320-11



PRIVATE RESIDENCE | CANDICE BRUNY FRANCE



1.0 LED

LED LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.34kg

wire springs 102-104 90 4-25

CODE	
	110261W
	110261B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
2000-3000K 12V	380/560 >95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

RONY
CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.32kg

wire springs 102-104 100 4-25

CODE	
	110120W0
	110120B0



OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



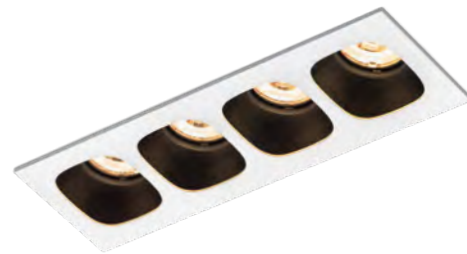

PIRRO


CEILING RECESSED







As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



257



367 | 399



1.0

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.09kg

wire springs 50x50 85 4-25

		CODE
	150161E	
	150161J	
	150161K	
	150161B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	420 >90	5

ALWAYS USE

driver | 500mA

		CODE
6.5W dim	90224301	
20W DALI	90244604	

more options and specs on page 725

2.0

2x LED COB 5W | 500mA | 17V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.16kg

wire springs 93x50 60 4-25

		CODE
	150261E	
	150261J	
	150261K	
	150261B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x420 >90	5

ALWAYS USE

driver | 500mA | only 1x needed

		CODE
10W dim	90224503	
20W DALI	90244604	

more options and specs on page 726

4.0

4x LED COB 5W | 500mA | 34V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.28kg

wire springs 181x50 60 4-25

		CODE
	150461E	
	150461J	
	150461K	
	150461B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x400 >90	3
3000K	4x420 >90	5

ALWAYS USE

driver | 500mA | only 1x needed

		CODE
20W dim	90224602	
20W DALI	90244604	

more options and specs on page 726

6.0

6x LED COB 5W | 500mA | 2x25V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.40kg

wire springs 269x50 60 4-25

		CODE
	150661E	
	150661J	
	150661K	
	150661B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x400 >90	3
3000K	6x420 >90	5

ALWAYS USE


driver | 500mA | 2x needed

		CODE
20W dim	90224602	
20W DALI	90244604	

more options and specs on page 726



IC rated



honeycomb

OPTIONAL

honeycomb louver

		CODE
	90051130	
	90051131	

HIDDEN CHAMPIONS

FLAT ‘N’ FANCY



Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some requirements you'll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts. The solution? Extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specially designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.


DEEP bijou 2.0	p. 139	60 mm
DEEP petit	p. 141	50 mm
DEEP ADJUST petit	p. 147	65 mm
PIRRO 2.0 4.0 6.0	p. 165	60 mm
PLANO petit	p. 171	65 mm
CENO 2.0 3.0	p. 191	60 mm

HOCH HINAUS



Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

BLIEK ROUND petit	p. 195	60 mm
LUNA ROUND IP44	p. 215	50 mm
RINI SNEAK IP44	p. 217	46 mm
LUNA SQUARE IP44	p. 219	50 mm
MIRBI IP44	p. 223	50 mm
CITY IP44	p. 225	50 mm

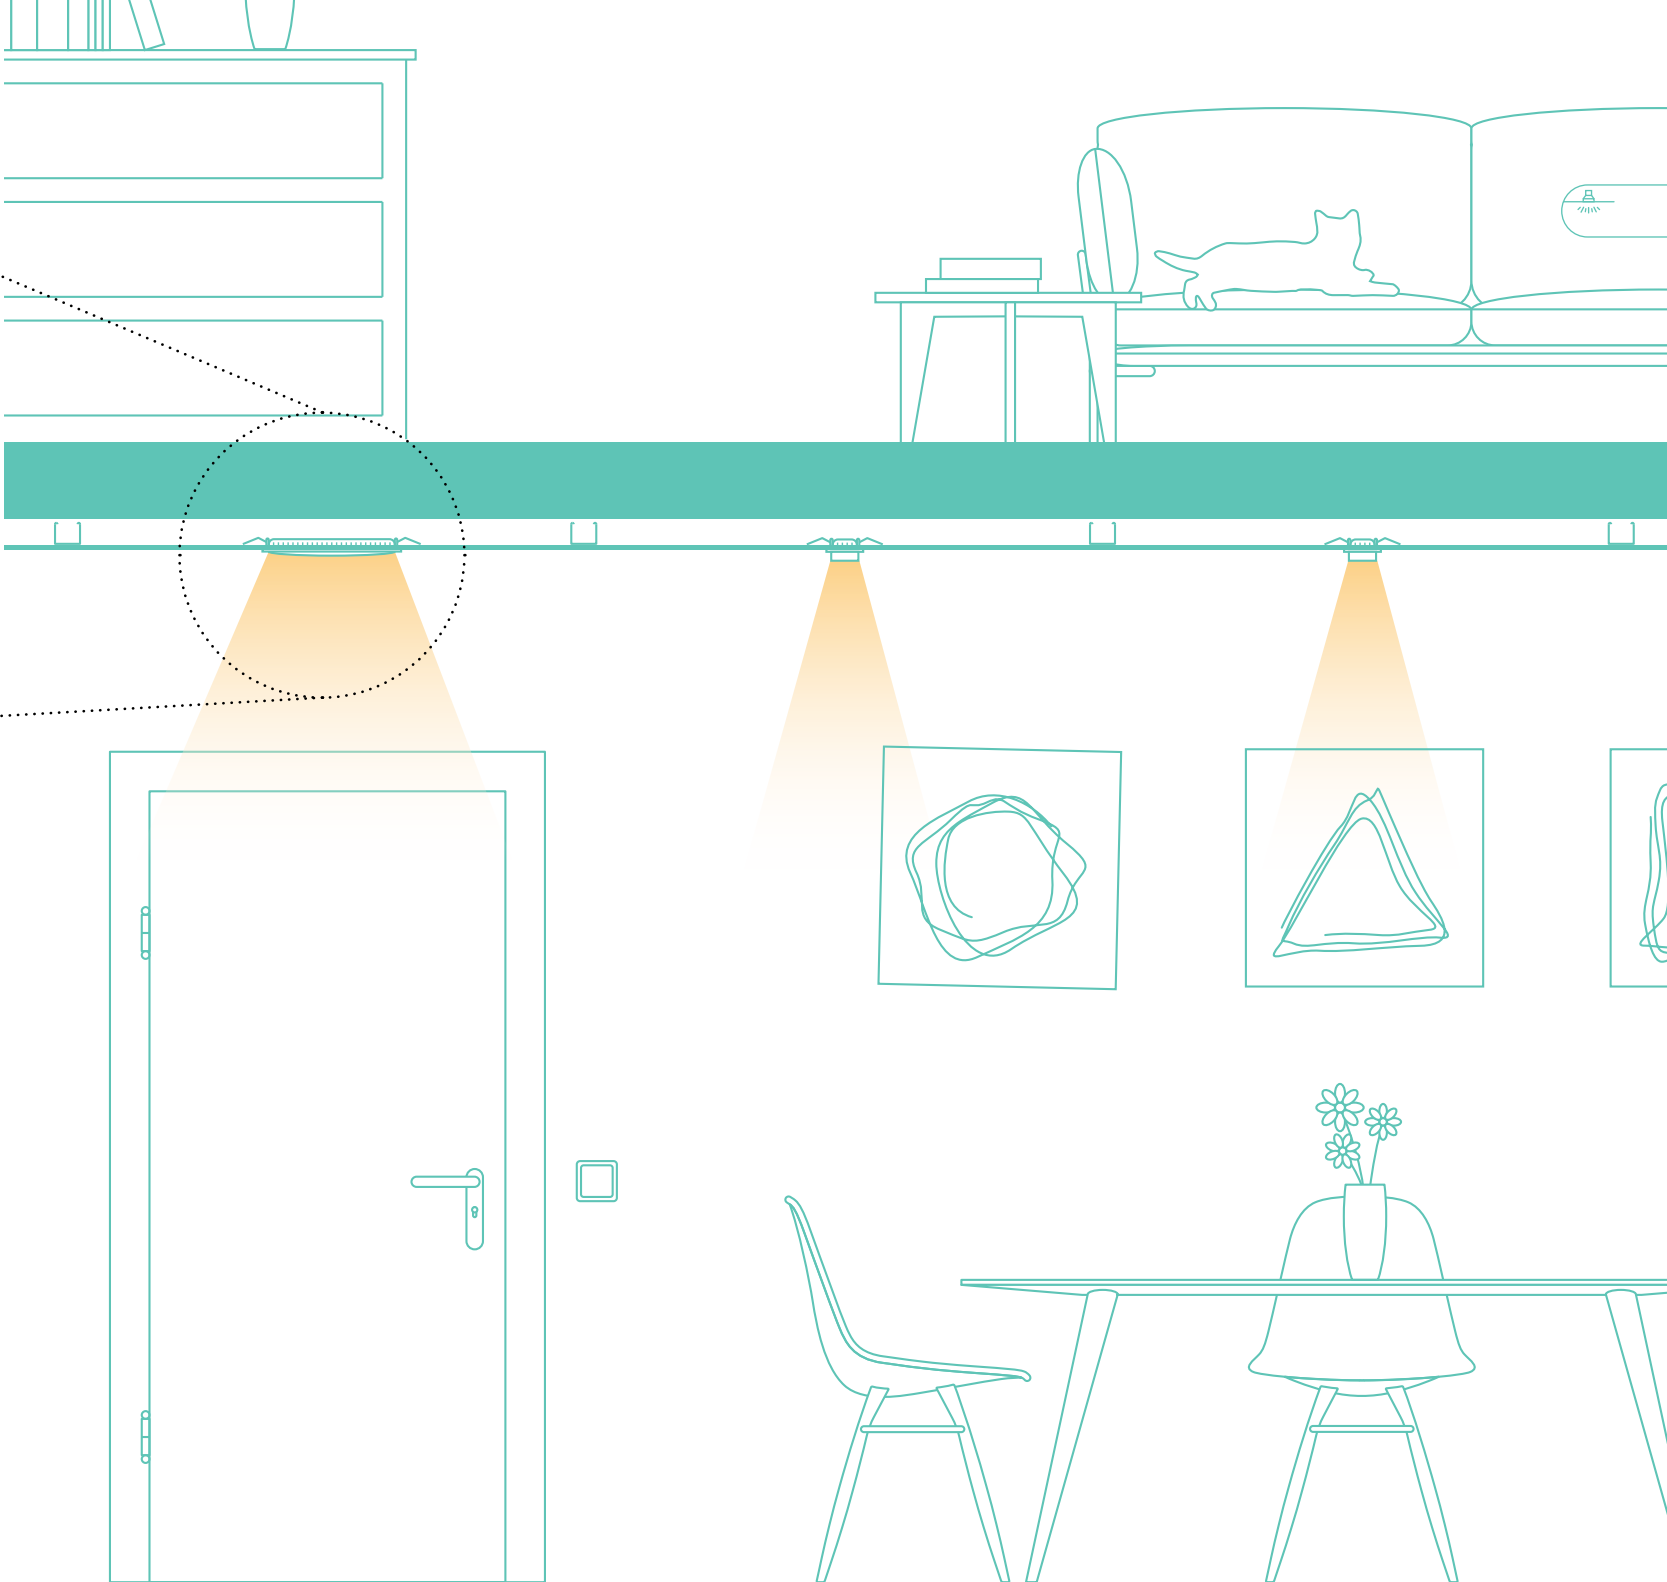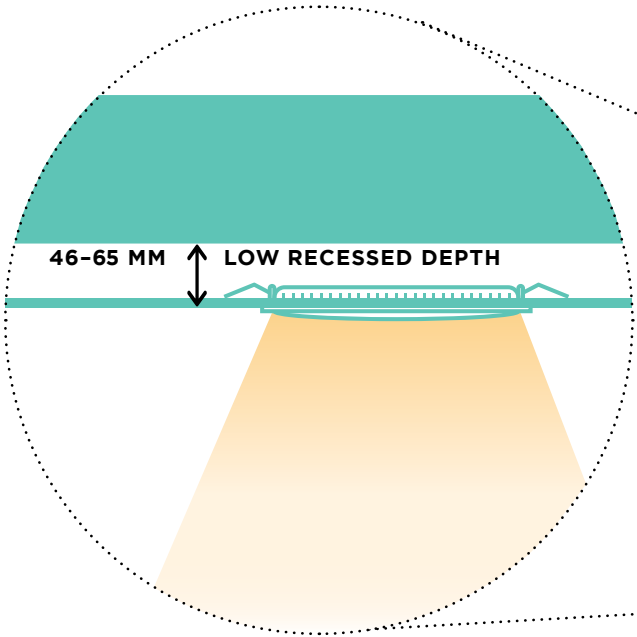



1.0 fits in
round cut out

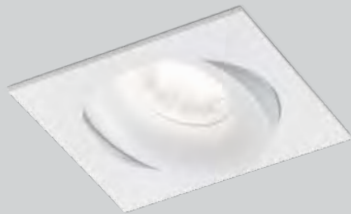

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.36kg

wire springs 102-104 90 4-25

CODE	
	111461W_
	111461B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
2000-3000K 12V	380/560 >95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.73kg

wire springs 102x210 90 4-25

CODE	
	111561W_
	111561B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x530/710 >90	3
3000K	2x575/770 >90	5
2000-3000K 12V	2x380/560 >95	9

ALWAYS USE

driver | 500mA | only 1x needed

CODE	
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.34kg

wire springs 102-104 100 4-25


CODE	
	111120W0
	111120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.69kg

wire springs 102x210 100 4-25

CODE	
	111220W0
	111220B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim



CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

RON

CEILING RECESSED





1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.08kg

wire springs 54x59 65 2-22

	CODE
	162461W
	162461Q
	162461B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K 12V	440	>95	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

2.0

2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.15kg

wire springs 54x110 65 2-22

	CODE
	162561W
	162561Q
	162561B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K 12V	2x440	>95	9

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W	90218601
15W dim	90225502
20W DALI	90245602

more options and specs on page 725

3.0

3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.22kg

wire springs 54x162 65 2-22

	CODE
	162661W
	162661Q
	162661B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K 12V	3x440	>95	9







ALWAYS USE

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.26kg

wire springs	74x78	95	2-18
	CODE		
	118561W_		
	118561S_		
	118561Q_		
	118561B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/685 >90	3
3000K	550/740 >90	5
2000-3000K 12V	365/535 >95	9

ALWAYS USE

driver | 500mA

	CODE	
10W	90214405	
10W dim	90224402	
20W DALI	90244604	

more options and specs on page 725

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.48kg

wire springs	74x148	95	2-18
	CODE		
	118661W_		
	118661S_		
	118661Q_		
	118661B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x510/685 >90	3
3000K	2x550/740 >90	5
2000-3000K 12V	2x365/535 >95	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE	
20W	90218601	
20W dim	90224602	
20W DALI	90244604	

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.24kg

wire springs	74x78	120	2-18
	CODE		
	118120W0		
	118120S0		
	118120Q0		
	118120B0		

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE	
2700K 460lm	901228W3	
2700K 437lm	901228B3	
3000K 500lm	901228W5	
3000K 457lm	901228B5	

more lamps and specs on page 731

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.44kg

wire springs	74x148	120	2-18
	CODE		
	118220W0		
	118220S0		
	118220Q0		
	118220B0		

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE	
2700K 460lm	901228W3	
2700K 437lm	901228B3	
3000K 500lm	901228W5	
3000K 457lm	901228B5	

more lamps and specs on page 731

PLANO


CEILING RECESSED





PLANO fort

CEILING RECESSED



1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°/355° 34° SDCM2 L70|50K 0.38kg

wire springs 11x11 130 4-25

CODE	
	118961W
	118961B

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2490 >90	5
4000K	2680 >90	7

ALWAYS USE




driver | 700mA

CODE	
30W dim	90225702
35W DALI	90245801

more options and specs on page 727







1.0 LED

 LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-25°|355°  34° SDCM2 L80|50K 0.07kg

	CODE
	163461W_
	163461M_
	163461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 12V	440 >95	9

ALWAYS USE
alu plasterkit  64x64  65  7-17

	CODE
	90017202

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

2.0 LED

 2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-25°|355°  34° SDCM2 L80|50K 0.13kg

	CODE
	163561W_
	163561M_
	163561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >90	3
3000K	2x570 >90	5
2000-3000K 12V	2x440 >95	9

ALWAYS USE
alu plasterkit  64x117  65  7-17

	CODE
	90017205

driver | 700mA | only 1x needed

	CODE
20W	90218601
15W dim	90225502
20W DALI	90245602

more options and specs on page 725

3.0 LED

 3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-25°|355°  34° SDCM2 L80|50K 0.19kg

	CODE
	163661W_
	163661M_
	163661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x540 >90	3
3000K	3x570 >90	5
2000-3000K 12V	3x440 >95	9


ALWAYS USE
alu plasterkit  64x169  65  7-17

	CODE
	90017208

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724



low recessed depth




WEVER & DUCRÉ

176 — 177



STRANGE

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.43kg

	CODE
	131461W_
	131461M_
	131461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/685 >90	3
3000K	550/740 >90	5
2000-3000K 12V	365/535 >95	9

ALWAYS USE

alu plasterkit 86x86 95 8-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.74kg

	CODE
	131561W_
	131561M_
	131561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x510/685 >90	3
3000K	2x550/740 >90	5
2000-3000K 12V	2x365/535 >95	9

ALWAYS USE

alu plasterkit 86x156 95 8-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.41kg

	CODE
	13120W0
	13120M0
	13120B0

ALWAYS USE

alu plasterkit 86x86 120 8-32

	CODE
	90017120

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.70kg

	CODE
	131220W0
	131220M0
	131220B0

ALWAYS USE

alu plasterkit 86x156 120 8-32



	CODE
	90017121

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.19 kg

wire springs 74x78 95 2-18

	CODE
	155751W
	155751K
	155751B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	395/530 >90 3	
3000K	425/570 >90 5	
2000-3000K 12V	280/415 >95 9	

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.34 kg

wire springs 74x148 95 2-18

	CODE
	155851W
	155851K
	155851B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x395/530 >90 3	
3000K	2x425/570 >90 5	
2000-3000K 12V	2x280/415 >95 9	

ALWAYS USE


driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725




K



B





PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



SNEAK trimless

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.19 kg

CODE	
	155551W_
	155551K_
	155551B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395/530	>90	3
3000K	425/570	>90	5
2000-3000K 12V	280/415	>95	9

ALWAYS USE

alu plasterkit  86x86  95  8-32

CODE	
	90017120

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.34 kg

CODE	
	155651W_
	155651K_
	155651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395/530	>90	3
3000K	2x425/570	>90	5
2000-3000K 12V	2x280/415	>95	9

ALWAYS USE

alu plasterkit  86x156  95  8-32

CODE	
	90017121

driver | 500mA | only 1x needed

CODE	
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

DIM THE LIGHTS

IT CAN BE SO EASY

Lighting a room has never been easier than with our new collection of Bluetooth-compatible products. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen. Sounds easy? It is. Choose your favourite products from our collection, add the Bluetooth dimmer behind the switch and connect them to your light control app and you're good to go. Whether you want bright lights for breakfast, a candle-lit atmosphere for dinner, or anything in between – just kick up your feet and touch to set your desired mood.


Noch nie war die Beleuchtung so einfach wie mit unseren Bluetooth-kompatiblen Produkten – ein einfacher Klick genügt. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer Kollektion auswählen, den Bluetooth Dimmer hinter dem Lichtschalter hinzufügen, mit Ihrer Light Control App verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

WHAT YOU NEED



smartphone with
Wever & Ducré
bluetooth app

+





Wever & Ducré
bluetooth dimmer
find on page 729

+




Wever & Ducré
phase-cut
dim products

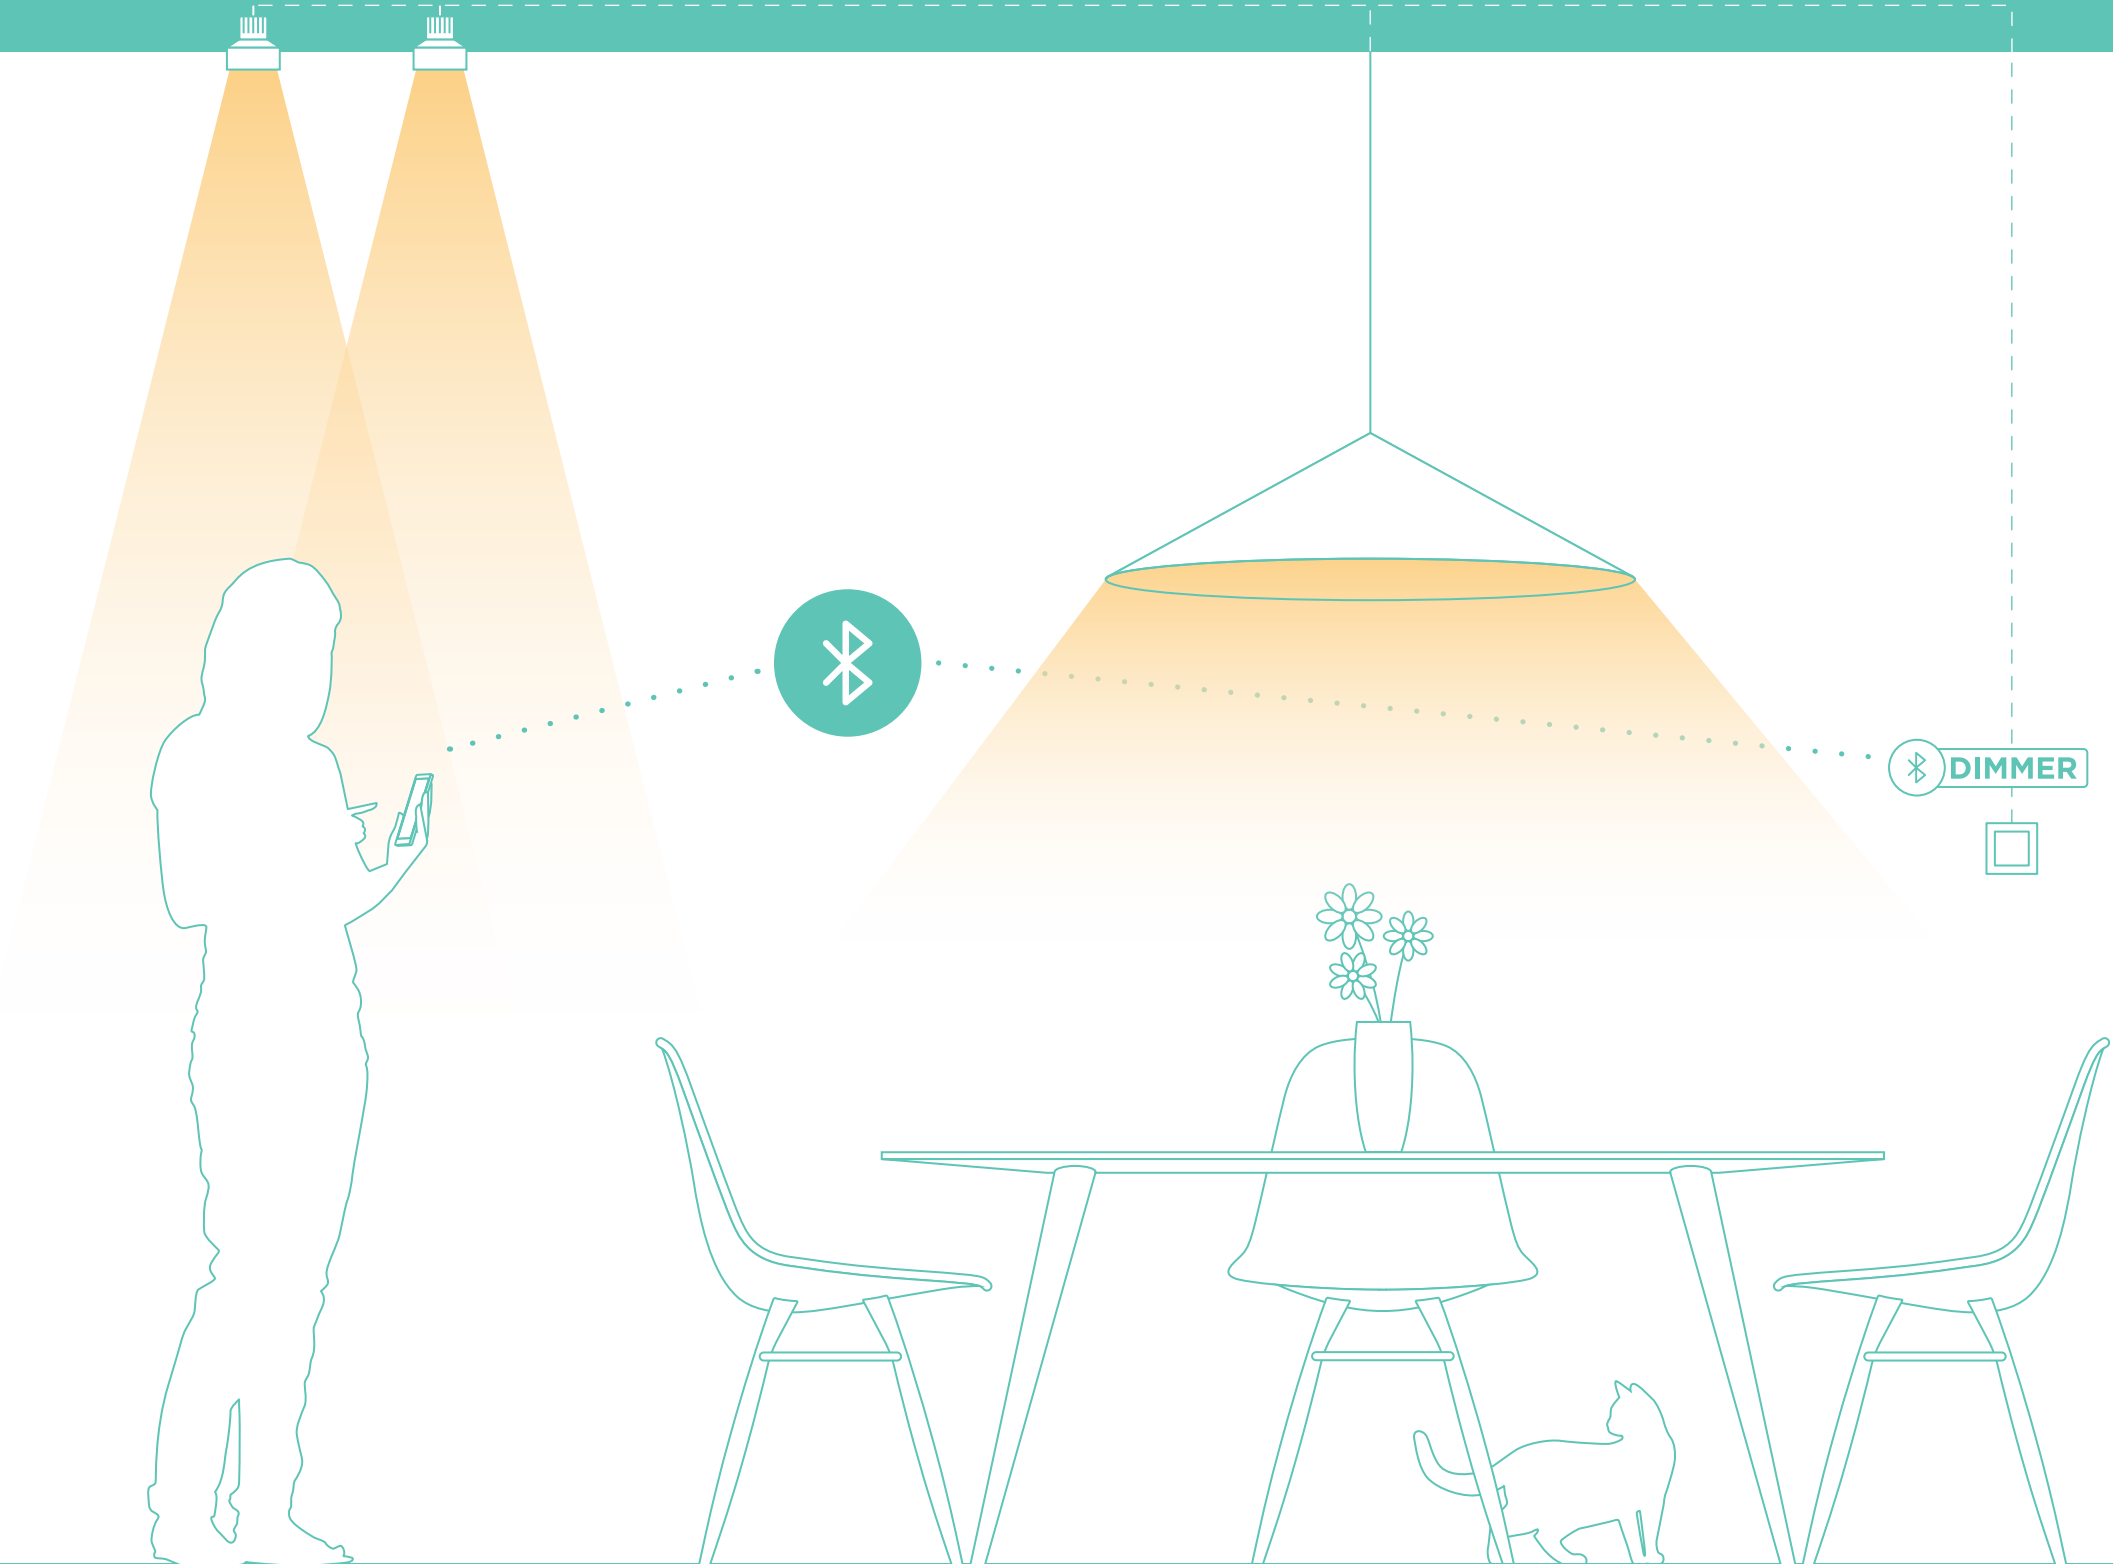



IC rated



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.15kg

45-47 85 4-26

CODE		
	190851W_	
	190851B_	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

ALWAYS USE

driver | 350mA

CODE		
10W dim	90223402	
10W DALI	90243401	

more options and specs on page 724



1.0

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.14kg

wire springs 45-47 85 4-26

CODE		
	190151W_	
	190151H_	
	190151B_	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

ALWAYS USE

driver | 350mA

CODE		
10W dim	90223402	
10W DALI	90243401	

more options and specs on page 724



2.0

2x LED COB 6W | 700mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.27kg

wire springs 105x30 60 4-26

CODE		
	190251W_	
	190251B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x510 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE		
15W dim	90225502	
35W DALI	90245801	

more options and specs on page 727

MATCH

TRIMLESS | CEILING RECESSED




289




325



533



IC rated



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401


more options and specs on page 724



back

CENO

SEMI RECESSED | CEILING RECESSED



1.0 SEMI RECESSED

LED LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A 35° SDCM2 L80|50K 0.13kg

45-47 85 4-26

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	465 >90	5



1.0

LED LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A 35° SDCM2 L80|50K 0.12kg

wire springs 45-47 85 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	465 >90	5
2000-3000K 12V	355 >95	9

ALWAYS USE


driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401



more options and specs on page 724



low recessed
depth only for
2.0 + 3.0 LED
version



IC rated

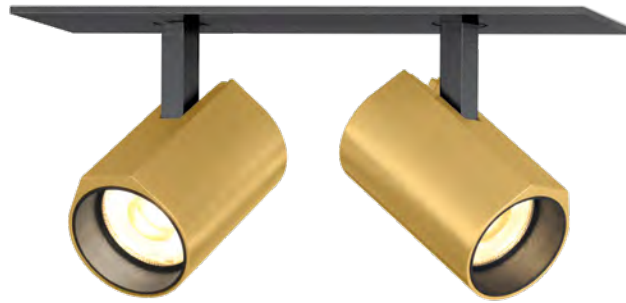

1.1

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM L80|50K 0.13kg

blade springs 32x66 85 4-26

	CODE
176461W	
176461Q	
176461K	
176461B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	465 >90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724



2.0

2x LED COB 7W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM L70|60K 0.26kg

blade springs 32x145 60 4-26

	CODE
176261W	
176261Q	
176261K	
176261B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x450 >90	3
3000K	2x465 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
35W DALI	90245801

more options and specs on page 727



3.0

3x LED COB 7W | 700mA | 26V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM L70|60K 0.39kg

blade springs 32x221 60 4-26

	CODE
176361W	
176361Q	
176361K	
176361B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x450 >90	3
3000K	3x465 >90	5

ALWAYS USE


driver | 700mA | only 1x needed

	CODE
20W dim	90225604
35W DALI	90245801


more options and specs on page 727

CENO


CEILING RECESSED



291



327 | 387




honeycomb

OPTIONAL

honeycomb louver

	CODE
90051130	
90051131	





back





BLIEK ROUND petit

CEILING RECESSED



1.0

LED COB 7W | 700mA | 8V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 35° SDCM2 L70|60K 0.20kg

wire springs 86-89 60 4-23

	CODE
	164361W_
	164361K_
	164361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	445 >90	3
3000K	470 >90	5
2000-3000K 12V	440 >95	9

2.0


2x LED COB 7W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 35° SDCM2 L70|60K 0.40kg


wire springs 87x176 60 4-23

	CODE
	164261W_
	164261K_
	164261B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x445 >90	3
3000K	2x470 >90	5



low recessed
depth



honeycomb



IC rated

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

ALWAYS USE


driver | 700mA

	CODE
10W dim	90225402
10W DALI	90245401
more options and specs on page 726	

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
35W DALI	90245801
more options and specs on page 727	





IC rated



BLIEK ROUND

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 180|50K 0.45kg

wire springs 127 75 min 4

CODE
125361W_
125361K_
125361B_

blade springs 127 75 min 4

CODE
125361W_C
125361K_C
125361B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/735 >90	3
3000K	585/785 >90	5
4000K	625/840 >90	7
2000-3000K 12V	390/580 >95	9

ALWAYS USE

driver | 500mA

CODE
10W 90214405
10W dim 90224402
20W DALI 90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.42kg

wire springs 127 75 min 4

CODE
125120W0
125120K0
125120B0

blade springs 127 min 4


CODE
125120W0C
125120K0C
125120B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE
2700K 460lm 901228W3
2700K 437lm 901228B3
3000K 500lm 901228W5
3000K 457lm 901228B5



more lamps and specs on page 731



IC rated

BLIEK SQUARE

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 L80|60K 0.47kg

wire springs 11x11 75 4-25

	CODE
	125461W
	125461B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/735 >90	3
3000K	585/785 >90	5
4000K	625/840 >90	7
2000-3000K 12V	390/580 >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.45kg

wire springs 11x11 75 4-25

	CODE
	125220W0
	125220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



RUVI

CEILING RECESSED



1.0

- LED G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
- IP20 0.25kg
- 54-56 90 7-33
- CODE
1671E0B0

OPTIONAL

- G95 5.5W | E27 | phase-cut dim
filament | gold mirror
- CODE
2200K | 377lm 9003E156
2700K | 464lm 9003E142
- G95 5.6W | E27 | phase-cut dim
filament | silver mirror
- CODE
2700K | 464lm 9003E157
- G95 5.4W | E27 | phase-cut dim
filament | gold tinted
- CODE
2200K | 380lm 9003E111
- more lamps and specs on page 732

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!


Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.

DEEP BIJOU IP65	p. 205
DEEP IP44 IP65	p. 207
DEEPER IP44	p. 209
TAIO IP65	p. 213
LUNA ROUND IP44	p. 215
RINI SNEAK IP44	p. 217
LUNA SQUARE IP44	p. 219
PLANO IP44	p. 221

WASSERSCHU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65 Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

MIRBI IP44	p. 223
CITY IP44	p. 225
ROB IP44	p. 305
ROBY IP44	p. 307
TOWNA IP44	p. 309
MIRBA IP44	p. 577
MIRBI LONG IP44	p. 579

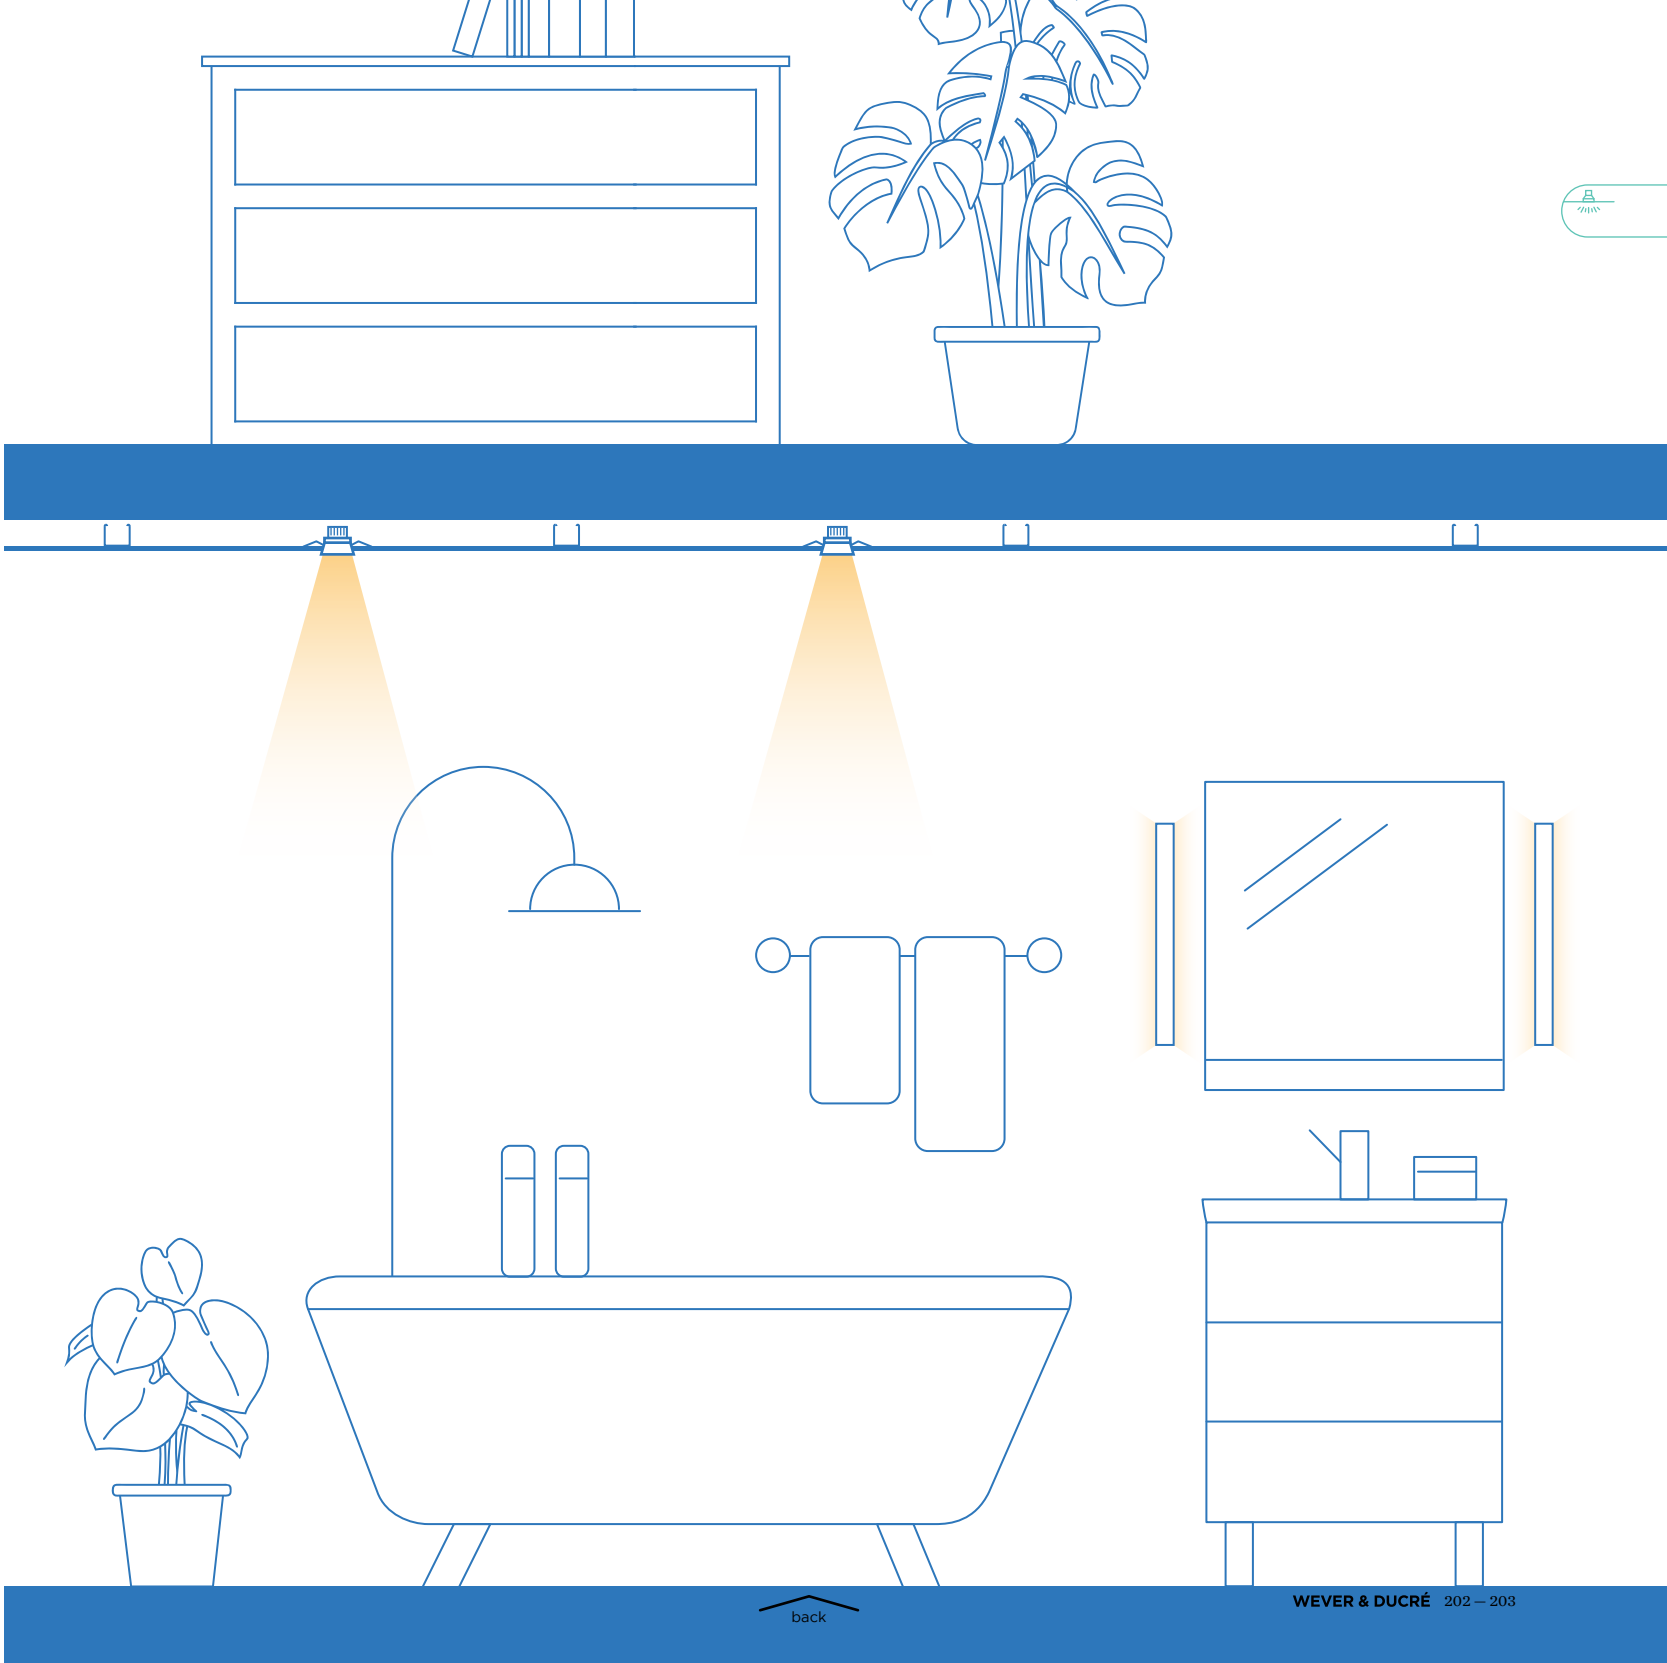



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM




DEEP bijou IP65

CEILING RECESSED



1.0

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated



585

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

CODE	
	165361W
	165361B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

ALWAYS USE


driver | 500mA

CODE	
6.5W IP20 dim	90224301
7W IP67	90214301

more drivers on page 724




IC rated



IC rated only
LED version

DEEP IP44 | IP65

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80/50K 0.24kg

wire springs 86-89 90 4-27

CODE	
184161W_	
184161B_	

blade springs 86-89 90 min 4

CODE	
184161W_C	
184161B_C	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.26kg

wire springs 86-89 90 4-25

CODE	
112610W0	
112610B0	

blade springs 86-89 90 min 8


CODE	
112610W0C	
112610B0C	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.30kg

wire springs 86-89 105 4-25

CODE	
112620W0	
112620B0	

blade springs 86-89 105 min 8

CODE	
112620W0C	
112620B0C	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



DEEPER IP44

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80I50K 0.17kg

wire springs 76-79 95 4-38

CODE	
152461W	
152461B	


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440/600	>90	3
3000K	480/645	>90	5
2000-3000K 12V	320/470	>95	9

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.11kg

wire springs 76-79 100 4-38

CODE	
152210W0	
152210B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.15kg

wire springs 76-79 115 4-38

CODE	
152220W0	
152220B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731





PRIVATE RESIDENCE AUSTRIA



TAIO IP65

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80/50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W
	180781G
	180781B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	250/350	>90	3
3000K	270/380	>90	5

ALWAYS USE


driver | 500mA

	CODE
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702

more options and specs on page 725




IC rated



low recessed
depth only for
LED HV version

LUNA ROUND IP44

CEILING RECESSED



1.0 LED HV


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80/50K 0.18kg

blade springs 76-79 50 8-15

3000K | CRI >90 | 350lm

	CODE
	114888W5
	114888B5



1.0 MR16

QR-CBC51 max.10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

blade springs 76-83 100 min 4

	CODE
	114810W0
	114810B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904


specs on page 727

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.24kg

blade springs 76-83 120 min 4

	CODE
	114820W0
	114820B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

	CODE
plasterkit	90017101




back



RINI SNEAK IP44

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80/50K 0.18 kg

wire springs 76-79 46 4-25

CODE	
154461W	
154461B	


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465/625	>90	3
3000K	505/675	>90	5
2000-3000K 12V	335/495	>95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.12 kg

wire springs 76-79 55 4-25


CODE	
154210W0	
154210B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.16 kg

wire springs 76-79 80 4-25


CODE	
154220W0	
154220B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 731



low recessed
depth only for
LED version




PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



low recessed
depth only for
LED HV version

LUNA SQUARE IP44

CEILING RECESSED



1.0 LED HV


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80/50K 0.19kg

blade springs 72x72 50 8-15

3000K | CRI >90 | 350lm

	CODE
	114988W5
	114988B5



1.0 MR16

QR-CBC51 max. 10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

wire springs 76x76 100 8-15

	CODE
	114910W0
	114910B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904


specs on page 727

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.26kg

wire springs 76x76 120 8-15

	CODE
	114920W0
	114920B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



OPTIONAL

	CODE
plasterkit	90017102



PLANO IP44

CEILING RECESSED

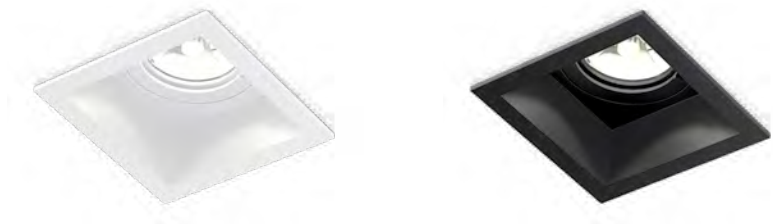

1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80I50K 0.21kg

wire springs 74x78 90 4-30

CODE	
	118861W
	118861B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/695	>90	3
3000K	550/740	>90	5
2000-3000K 12V	365/535	>95	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 35W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.15kg

wire springs 74x78 115 4-30


CODE	
	118410W0
	118410B0

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.19kg

wire springs 74x78 115 4-30

CODE	
	118420W0
	118420B0




OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731





1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

↑ IP44 SDCM2 L70|60K 0.24kg

blade springs 76-79 50 8-15

3000K | CRI >90 | 510lm

CODE
17548805

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

↑ IP44 SDCM2 L70|60K 0.26kg

blade springs 72x72 50 2-25

3000K | CRI >90 | 510lm


CODE
17558805

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729





low recessed
depth



CITY IP44

CEILING RECESSED



1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70/60K 0.64 kg

wire springs 202-205 50 4-22

3000K | CRI >90 | 1100lm

	CODE
	115484W5
	115484B5

2.6


LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70/60K 1.05 kg

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

	CODE
	115584W5
	115584B5



low recessed
depth

CEILING SURFACE

226 — 313



CEILING SURFACE SPOTLIGHTS



RAY MINI
229



RAY
231



BOX MINI
237



BOX
239



DOCUS MINI
245



DOCUS
247



HEXO MINI
251



HEXO
253



PIRRO SPOT 4.1
257



PIRRO SPOT 4.0
259



PIRRO OPAL
261



SOLID PETIT 1.0
263



SOLID PETIT 2.0
263



SOLID
267



SIRRO
271



PLANO PETIT
275



PLANO
279



SARA ON BASE
281



SQUBE ON BASE
283



MATCH
289



CENO
291



CENO 4.1
293



MICK
295


CEILING SURFACE LUMINAIRES



CLEA
299



CLOCK
301



VENN
303

CEILING SURFACE IP-RATED



ROB IP44
305



ROBY IP44
307



TOWNA IP44
309



TAIO IP65
311



MIRBI IP44 1.0
313



MIRBI IP44 2.0
313

DESIGNER FAMILIES



ROOMOR OFFICE
33



MIRRO
53




DRO
69



WIRO
113






J.J.W.
123





RAY mini

CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.14kg



inner reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate



CODE	
900199W4	900199G4
900199Q4	900199B4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.70kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.61kg

phase-cut dim

	CODE
	186764W
	186764L
	186764G
	186764Q
	186764P
	186764B

	CODE
	146720W0
	146720L0
	146720G0
	146720Q0
	146720P0
	146720B0

DALI dim | 10W

	CODE
	186765W
	186765L
	186765G
	186765Q
	186765P
	186765B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
2000-3000K*	715 >95	9

*only for phase-cut dim

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911041W1
	911041G1
	911041B1



MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you. Use our online configurator to put it together exactly how you like it.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen. Und sie sich mit unserem Online-Konfigurator gleich selbst zusammenstellen.

SHADE COLOUR



INNER REFLECTOR COLOUR



INNER COVER COLOUR



**HAVE A LOOK**
weverducre.com/universal-stars-configurator



BOX MINI
GOLD INNER REFLECTOR



BOX MINI
WITHOUT INSET




WITHOUT
INSET



GOLD
INNER COVER




BLACK
INNER COVER



WHITE
INNER REFLECTOR



BLACK
INNER REFLECTOR

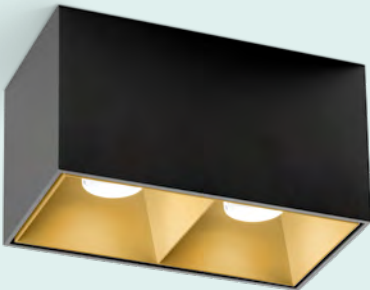


GOLD
INNER REFLECTOR



BOX mini


CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.16kg



inner reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate




CODE	
	900199W1
	900199G1
	900199Q1
	900199B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731

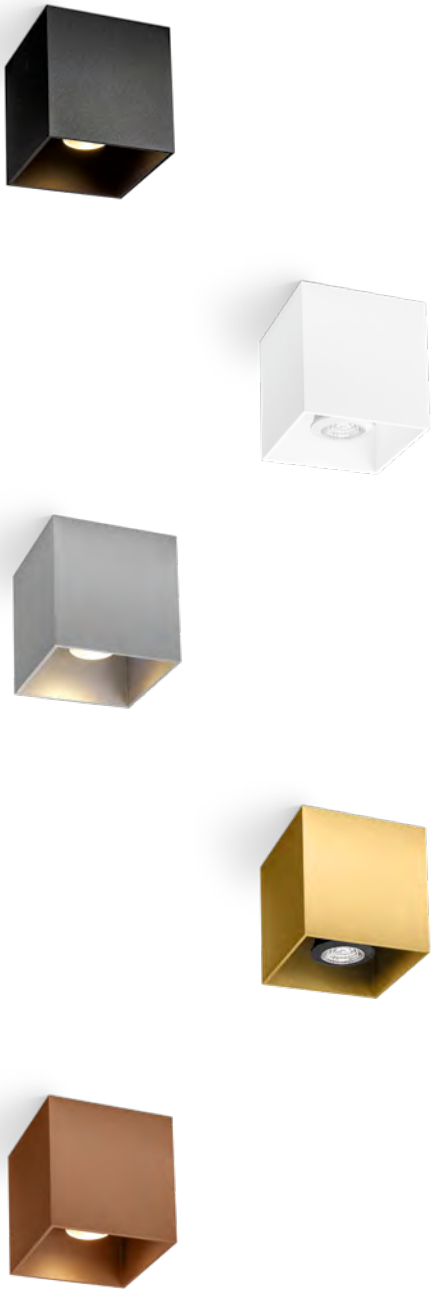

1.0 LED

 LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20  32°  SDCM2 L70|50K 0.74kg



inner reflector



inner cover

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	911211W1
	911211G1
	911211B1

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911011W1
	911011G1
	911011B1

phase-cut dim

	CODE
	186164W_
	186164L_
	186164G_
	186164Q_
	186164P_
	186164B_

DALI dim | 10W

	CODE
	186165W_
	186165L_
	186165G_
	186165Q_
	186165P_
	186165B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >80	2
3000K	560 >80	4
2000-3000K*	715 >95	9

*only for phase-cut dim

1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20 0.66kg

	CODE
	146120W0
	146120L0
	146120G0
	146120Q0
	146120P0
	146120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5




more lamps and specs on page 731





BOX

CEILING SURFACE

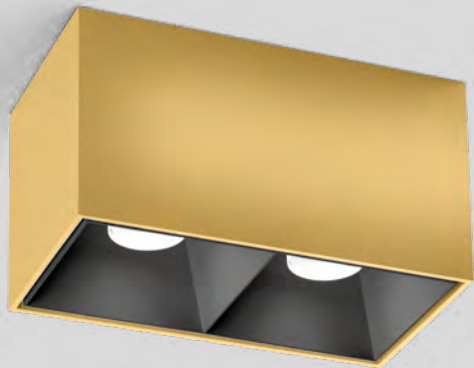

2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70/50K 1.08kg


2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.13kg



inner reflector



inner cover

OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

CODE	
	911251W1
	911251G1
	911251B1

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

CODE	
	911011W1
	911011G1
	911011B1

CODE	
	186264W_
	186264L_
	186264G_
	186264Q_
	186264P_
	186264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >80	2
3000K	2x560 >80	4
2000-3000K	2x715 >95	9


CODE	
	146220W0
	146220L0
	146220G0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



more lamps and specs on page 731






DOCUS mini

CEILING SURFACE



339




517

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.16kg



inner reflector

CODE

	258320W0
	258320G0
	258320B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

CODE

	900199W2
	900199G2
	900199B2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE

	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more lamps and specs on page 731



SHOP | ZANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70/50K 0.63kg

phase-cut dim

	CODE
	186364W_
	186364L_
	186364G_
	186364P_
	186364B_

DALI dim | 10W

	CODE
	186365W_
	186365L_
	186365G_
	186365P_
	186365B_




inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021G1
	911021B1

DOCUS
CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.55kg

phase-cut dim


	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.92kg




inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

CODE	
	911021W1
	911021G1
	911021B1

DOCUS
CEILING SURFACE



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.01kg

CODE	
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



HEXO mini

CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.15kg



inner reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

CODE	
900199W3	2700K 460lm
900199G3	3000K 500lm
900199Q3	3000K 457lm
900199B3	3000K 457lm

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

CODE	
901228W3	2700K 460lm
901228B3	2700K 437lm
901228W5	3000K 500lm
901228B5	3000K 457lm

more lamps and specs on page 731



PRIVATE RESIDENCE | CONCEPT'N BELGIUM



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered


IP20 32° SDCM2 L70|50K 0.72kg

phase-cut dim

	CODE
	186564W
	186564G
	186564Q
	186564P
	186564B

DALI dim | 10W

	CODE
	186565W
	186565G
	186565Q
	186565P
	186565B



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911031W1
	911031G1
	911031B1

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.63kg

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim



	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



HEXO

CEILING SURFACE



2.0 LED

 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20  32° SDCM2 L70|50K 1.13kg



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20 1.19kg

	CODE
	186664W_
	186664G_
	186664Q_
	186664P_
	186664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >80	2
3000K	2x560 >80	4
2000-3000K	2x715 >95	9

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 729



E




J



K



B




honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131


LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	405 >90	5



1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 ∠ 32° SDCM2 L80|50K 0.20kg



4.1

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 ∠ 32° SDCM2 L80|50K 0.50kg

	CODE
	151164E
	151164J
	151164K
	151164B

	CODE
	151564E
	151564J
	151564K
	151564B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x405 >90	5

PIRRO SPOT

CEILING SURFACE



165




367 | 399




SHOWROOM QSINE KNOCKE | BELGIUM



E



J



K




B




PIRRO SPOT




CEILING SURFACE



165



367 | 399



2.0

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.30kg

4.0


4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.48kg

6.0

6x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.80kg



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

	CODE
	151264E
	151264J
	151264K
	151264B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x380 >90	3
3000K	2x405 >90	5

	CODE
	151464E
	151464J
	151464K
	151464B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x405 >90	5

	CODE
	151664E
	151664J
	151664K
	151664B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x380 >90	3
3000K	6x405 >90	5



back




SHOWROOM QSINE KNOKKE | BELGIUM





PIRRO OPAL

CEILING SURFACE



367 | 399



2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.30kg

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.52kg



spot height
80 mm



opal height
65 mm

CODE			
151284E			
151284J			
151284K			
151284B			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240 >90	3
3000K	260 >90	5

CODE			
151484E			
151484J			
151484K			
151484B			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5



SOLID petit

CEILING SURFACE



W




K



J



B



H

1.0 LED

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.32kg

	CODE
	133864W_
	133864J_
	133864H_
	133864K_
	133864B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	340 >90	5

2.0 LED


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.42kg

	CODE
	133964W_
	133964J_
	133964H_
	133964K_
	133964B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K	440 >95	9



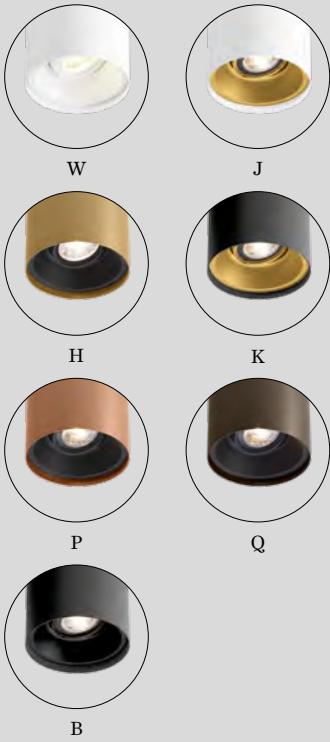

1.0 LED

LED COB 12W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 36° SDCM2 L80|50K 0.65kg

phase-cut dim

	CODE
	133764W_
	133764J_
	133764H_
	133764K_
	133764P_
	133764Q_
	133764B_

DALI dim

	CODE
	133765W_
	133765J_
	133765H_
	133765K_
	133765P_
	133765Q_
	133765B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	745 >90	3
3000K	800 >90	5
2000-3000K	560 >95	9

SOLID
CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-25°|355° 0.61kg

	CODE
	133120W0
	133120J0
	133120H0
	133120K0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731





PRIVATE RESIDENCE | ANKER & CO DENMARK





SIRRO

CEILING SURFACE



1.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.85kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.81kg



LED version with
light spill effect



PAR16

	CODE
189164W	
189164E	
189164B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	715 >90	3
3000K	775 >90	5
2000-3000K	560 >95	9

	CODE
139120W0	
139120E0	
139120B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



SIRRO

CEILING SURFACE




2.0 LED

2x LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 1.57kg

CODE	
	189264W
	189264E
	189264B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x715	>90	3
3000K	2x775	>90	5
2000-3000K	2x560	>95	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.51kg


CODE	
	139220W0
	139220E0
	139220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.51kg

CODE	
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731



PRIVATE RESIDENCE SWEDEN





PLANO petit

CEILING SURFACE



171



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.48kg

	CODE
	162564W_
	162564E_
	162564CH_
	162564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K	440 >95	9


2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.61kg

	CODE
	162664W_
	162664E_
	162664CH_
	162664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >90	3
3000K	2x570 >90	5
2000-3000K	2x440 >95	9



back




PRIVATE RESIDENCE SWEDEN



PLANO petit
CEILING SURFACE



171



3.0 LED

LED 3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 0°-25°|355° ⚡ 34° SDCM2 L80|50K 0.73kg

CODE	
	162764W
	162764E
	162764CH
	162764B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x540 >90	3
3000K	3x570 >90	5
2000-3000K	3x440 >95	9




PLANO

CEILING SURFACE



173




1.0 LED

 LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-30°|355°  36° SDCM2 L80|50K 1.15kg

	CODE
	118564W_
	118564E_
	118564CH_
	118564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	685	>90	3
3000K	740	>90	5
2000-3000K	535	>95	9




2.0 LED

 2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-30°|355°  36° SDCM2 L80|50K 1.62kg

	CODE
	118664W_
	118664E_
	118664CH_
	118664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x685	>90	3
3000K	2x740	>90	5
2000-3000K	2x535	>95	9



1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-30°|355° 1.39kg


	CODE
	118520W0
	118520E0
	118520CH0
	118520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731



2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-30°|355° 1.51kg

	CODE
	118620W0
	118620E0
	118620CH0
	118620B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731

SARA on base
CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.23kg


CODE	
	157220W0
	157220G0
	157220K0
	157220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 731



1.1 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/330° 0.32kg


CODE	
	157420W0
	157420K0
	157420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 731



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/330° 0.74kg

CODE	
	157520W0
	157520K0
	157520B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 731



K



1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 39° SDCM2 L70|50K 0.43kg

CODE		
	144268W	
	144268B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >80	2
3000K	430 >80	4
1800-3000K	350 >80	9

OPTIONAL

phase-cut | bluetooth dimmer

CODE	
	90019100

specs on page 729



2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° SDCM2 L70|50K 0.44kg

CODE		
	144468W	
	144468B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K 32°	711 >80	2
3000K 32°	790 >80	4
1800-3000K 58°	790 >80	9

OPTIONAL

phase-cut | bluetooth dimmer

CODE	
	90019100

specs on page 729



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.43kg

CODE		
	144220W0	
	144220B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731




PAR16



LED

SQUBE on base

CEILING SURFACE



365 | 381



PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE





PRIVATE RESIDENCE | LINK ARCHITECTURE | ANKER & CO DENMARK







SQUBE on base

CEILING SURFACE

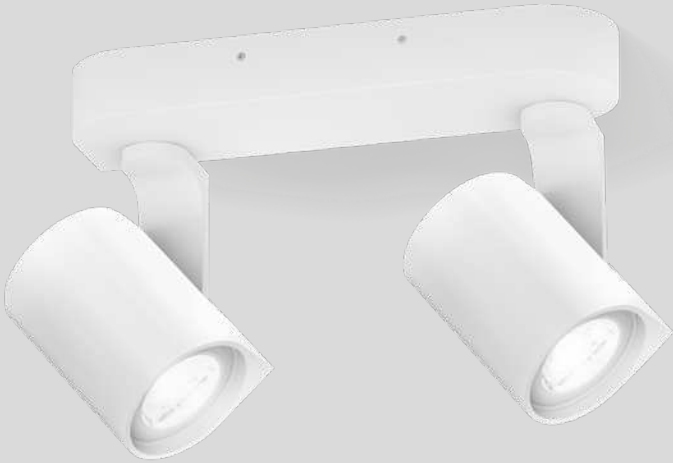

365 | 381



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.58kg

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.93kg

CODE	
	144520W0
	144520B0

CODE	
	144620W0
	144620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5



more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 731



1.0

LED COB9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.40kg

CODE		
	177154W	
	177154B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

2.0


2x LED COB9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.42kg


CODE		
	177254W	
	177254B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x510 >90	5

MATCH
CEILING SURFACE



187



325



533



PRIVATE RESIDENCE GERMANY




W




Q



K



B




honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131




1.0

 LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

 IP20 0°-90°|350°  35° SDCM2 L70|60K 0.20kg

	CODE
	176664W_
	176664Q_
	176664K_
	176664B_

	LIGHT COLOUR	LUMEN CRI	CODE
	2700K	440 >90	3
	3000K	470 >90	5



2.0

 2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

 IP20 0°-90°|350°  35° SDCM2 L70|60K 0.43kg

	CODE
	176764W_
	176764Q_
	176764K_
	176764B_


	LIGHT COLOUR	LUMEN CRI	CODE
	2700K	2x440 >90	3
	3000K	2x470 >90	5

CENO


CEILING SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



189



327 | 387



PRIVATE RESIDENCE AUSTRIA

CENO

CEILING SURFACE

189

327 | 387

34

26

700

55

ø34

110

175

55

ø34

20

W

Q

K

B

honeycomb

OPTIONAL

honeycomb louver

CODE	LIGHT COLOUR	LUMEN CRI	CODE
90051130	2700K	4x440 >90	3
90051131	3000K	4x470 >90	5

4.0

4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

⊕ IP20 0°-90°|350° ∠ 35° SDCM2 L70|60K 0.95kg

4.1

4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

⊕ IP20 0°-90°|350° ∠ 35° SDCM2 L70|60K 0.80kg

CODE			
	176864W		176964W
	176864Q		176964Q
	176864K		176964K
	176864B		176964B

CODE	LIGHT COLOUR	LUMEN CRI	CODE
90051130	2700K	4x440 >90	3
90051131	3000K	4x470 >90	5

CODE	LIGHT COLOUR	LUMEN CRI	CODE
90051130	2700K	4x440 >90	3
90051131	3000K	4x470 >90	5

back

WEVER & DUCRÉ 292 – 293



MICK

CEILING SURFACE

GOOD DESIGN
As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGN AWARD 2021

reddot winner 2020 lighting design

330 26 130 26

450 26 130 26

1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|60K 0.35kg

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

CODE

159144J_

159144K_

LIGHT COLOUR LUMEN | CRI CODE

2700K 400 | >90 3

3000K 435 | >90 5

CODE

159244J_

159244K_

LIGHT COLOUR LUMEN | CRI CODE

2700K 2x225 | >90 3

3000K 2x245 | >90 5

J

K

back

WEVER & DUCRÉ 294 – 295





CLEA
CEILING SURFACE



W




SG



FJ



B




1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 0.78kg

CODE			
	181184W		
	181184SG		
	181184FJ		
	181184B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5




2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 1.31kg

CODE			
	181284W		
	181284SG		
	181284FJ		
	181284B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 2.09kg

CODE			
	181384W		
	181384SG		
	181384FJ		
	181384B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



PRIVATE RESIDENCE AUSTRIA

CLOCK


CEILING SURFACE



1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown


IP20 SDCM2 L80|50K 0.66kg



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg



3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

CODE
182184B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

CODE
182384B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

CODE
182484B



LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

back

WEVER & DUCRÉ 300 – 301



OFFICE | RPD | VIVA ARCHITECTURE ANTWERPEN | BELGIUM

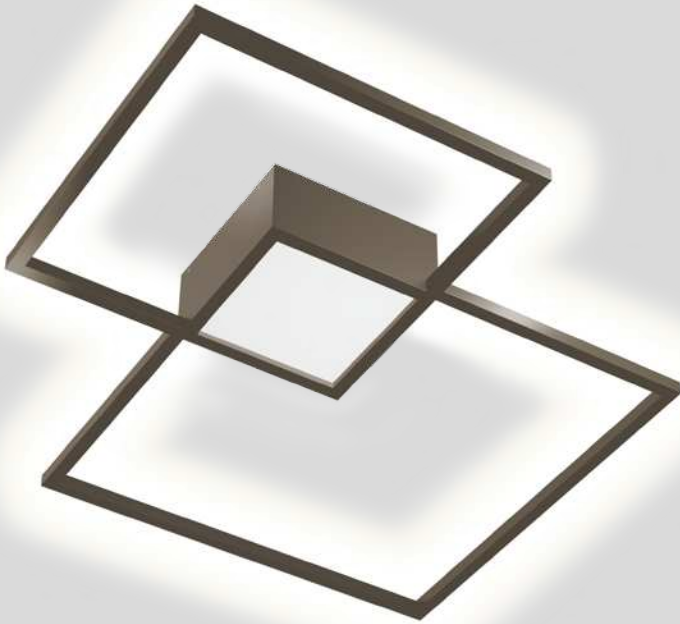


1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80I60K 2.50kg

CODE	
	149184W
	149184Q
	149184B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4



2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light


IP20 SDCM3 L80I60K 2.50kg

CODE	
	149284W
	149284Q
	149284B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4







MORE OPTIONS
weverducre.com/venn-configurator



ROB IP44

CEILING SURFACE



1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80/60K 0.70kg

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80/60K 1.20kg

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80/60K 1.90kg

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

CODE			
701188W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1130	>90	3
3000K	1150	>90	5




CODE			
701288W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

CODE			
701388W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5



ROBY IP44

CEILING SURFACE



1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.00kg

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.55kg

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 2.45kg

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

CODE
135188W
135188B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1050 >90	3
3000K	1060 >90	5

CODE
135288W
135288B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1670 >90	3
3000K	1680 >90	5

CODE
135388W
135388B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3090 >90	3
3000K	3100 >90	5



TOWNA IP44


CEILING SURFACE



W



J



K

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100


specs on page 729



Z



B




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80/60K 1.15kg

CODE
178188W
178188J
178188K
178188Z
178188B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1030 >90	3
3000K	1050 >90	5




2.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80/60K 1.90kg

CODE
178288W
178288J
178288K
178288Z
178288B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1650 >90	3
3000K	1660 >90	5



3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80/60K 3.00kg

CODE
178388W
178388J
178388K
178388Z
178388B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3050 >90	3
3000K	3060 >90	5



PRIVATE RESIDENCE AUSTRIA



W



A




Q




B

TAIO IP65

CEILING SURFACE



213



Ø80

107

1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens


IP65 105° SDCM2 L80/50K 0.55kg

	CODE
	180884W
	180884A
	180884Q
	180884B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	440	>90	5



587



597



631

back




PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM



MIRBI IP44



CEILING SURFACE



223



579



1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.4kg

3000K | CRI >90 | 510lm

CODE	
	175488W5
	175488E5

2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.5kg

3000K | CRI >90 | 510lm

CODE	
	175588W5
	175588E5

TRACKS | SYSTEMS

314 — 405

STREX
SYSTEM



**48V
TRACKS**
319



MATCH
325



CENO
327



MICK
331



RAY MINI
335



BOX MINI
337



DOCUS MINI
339



HEXO MINI
341



**OPAL LIGHT
MODULE**
343



**DOTS LIGHT
MODULE**
343



ODREY
345



STUBE
353



SOLLI
355

1-PHASE
TRACK



**1-PHASE
TRACKS**
359




SARA
361



SQUBE
365



PIRRO
367



DRO
369



ODREY
371



RAY
377



HEXO
377

3-PHASE
TRACK



**3-PHASE
TRACKS**
379



SQUBE
381



CENO FORT
387



RAY
389



HEXO
389

ELLO
SYSTEM



ELLO SYSTEM
391

PIRRO
SYSTEM



PIRRO SYSTEM
397

ILANE



ILANE
401

ON THE RIGHT TRACK








THREE WAYS TO MAKE THEM SHINE

It’s normal to go off the rails when it comes to tracks. That’s why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You’d prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets and suspended luminaires are connected and controlled separately. The 48-volt system is new in the range. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt’s hier eine schnelle Einführung: Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Neu im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung – ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.



HAVE A LOOK
weverducre.com/strex-configurator

	STREX TRACK SYSTEM 48V DALI p. 319	1-PHASE TRACK 220-240V p. 359	3-PHASE TRACK 220-240V p. 379
1	CHOOSE YOUR MOUNTING		
	 recessed surface suspended suspended indirect light	 recessed surface suspended	 surface suspended
2	COMBINE IT WITH DIFFERENT INSETS		
			
3	INSTALL IT IN YOUR FAVOURITE LAYOUT		
			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq






STREX SYSTEM

RECESSED | 48V DALI TRACKS


RECESSED EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator




A1 | DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed




B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right



RECESSED


track 48V | 15A | DALI



	CODE
1m	90014187
1m	90014188


2m	90014189
2m	90014190

3m	90014191
3m	90014192



E | END CAP


	CODE
	90014149
	90014150



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156




G | MOUNTING BRACKET

recessed mounting bracket



	CODE
	90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed



custom cut
available

more on page 739 and
weverducre.com/strex-custom



back





STREX SYSTEM

SURFACE | 48V DALI TRACKS

SURFACE EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator

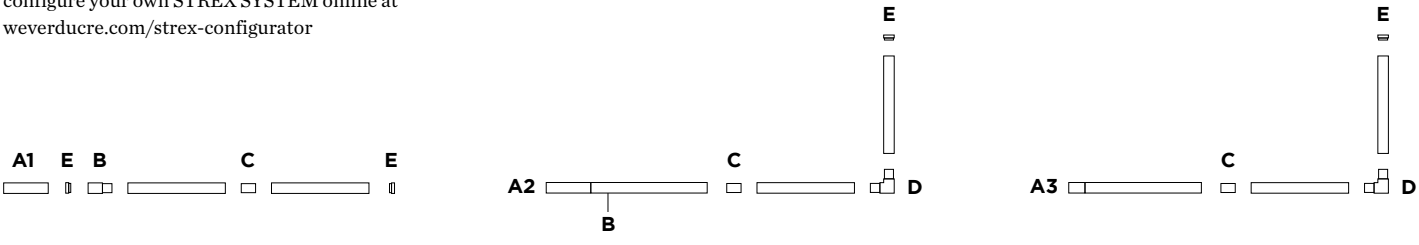


A1 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed


	CODE
100W 48V	90218901
150W 48V	90218902

for DALI SELV solution see page 739




A2 | IN LINE DRIVER

profile box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to power feed




	CODE
100W	90014166
100W	90014167
150W	90014170
150W	90014171




A3 | IN TRACK DRIVER

with in line connection box
including power feed
220-240VAC | 50-60Hz | 48V

	CODE
100W	90014178
100W	90014176




	CODE
250W	90014179
250W	90014177




A4 | IN TRACK DRIVER

with in track connection
including power feed
220-240VAC | 50-60Hz | 48V

	CODE
100W	90014144
100W	90014143



	CODE
250W	90014146
250W	90014145



SURFACE


track 48V | 15A | DALI



	CODE
1m	90014181
1m	90014182

2m	90014183
2m	90014184


3m	90014185
3m	90014186



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	CODE
	90014198
	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP


	CODE
	90014147
	90014148



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156



custom cut
available

more on page 739 and
weverducre.com/strex-custom





STREX SYSTEM

SUSPENDED | 48V DALI TRACKS

SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator

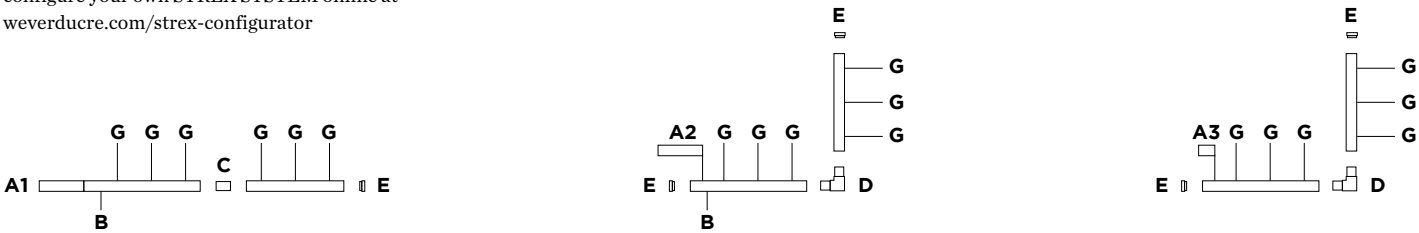


SUSPENDED

track 48V | 15A | DALI

SELV

	CODE
1m	90014181
1m	90014182
2m	90014183
2m	90014184
3m	90014185
3m	90014186




SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included

SELV

	CODE
3000K >90 CRI 1900lm	
2m	900140W5
2m	900140B5
3000K >90 CRI 2850lm	
3m	900141W5
3m	900141B5



G | SUSPENSION SET

complete suspension set incl. ceiling fixation bracket | not needed for indirect light version


stainless steel colour

	CODE
1.5m	90014160
3m	90014161

black colour


	CODE
1.5m	90014274
3m	90014275

for 1m - 2pcs needed
for 2m - 3pcs needed
for 3m - 4pcs needed




A1 | IN LINE DRIVER

profile box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring for connection to power feed
suspended in line with profile




	CODE
100W	90014260
100W	90014261
150W	90014262
150W	90014263




A2 | CEILING DRIVER

ceiling box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring for connection to power feed




	CODE
100W	90014168
100W	90014169
150W	90014172
150W	90014173




A3 | IN TRACK DRIVER

including power feed
220-240VAC | 50-60Hz | 48V
incl. 3m power cable

	CODE
100W	90014157
100W	90014174




	CODE
250W	90014158
250W	90014175



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/mechanical connector

	CODE
	90014196
	90014197




D | L-CONNECTOR

48V | 15A | DALI | electrical/mechanical connector left and right


	CODE
	90014198
	90014199

for 4 corner O shape, refer to mounting instructions or online configurator



E | END CAP


	CODE
	90014147
	90014148



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156



custom cut available

more on page 739 and weverducre.com/strex-custom



SHOWROOM QSINE KNOKE | BELGIUM

MATCH on track

STREX 48V SYSTEM

187

289

533

115 | 171

117

Ø26

1.0

LED

LED COB 8W | 48V

aluminium powder coated

PC adapter

IP20

0-90°|360°

25°

SDCM2

L80|50K

0.14kg

non dim

CODE

179152W_

179152B_

DALI dim

CODE

179155W_

179155B_

LIGHT COLOUR

LUMEN | CRI

CODE

2700K

535 | >90

3

3000K

550 | >90

5

accessories on page 739

W

B


back

WEVER & DUCRÉ

324 – 325





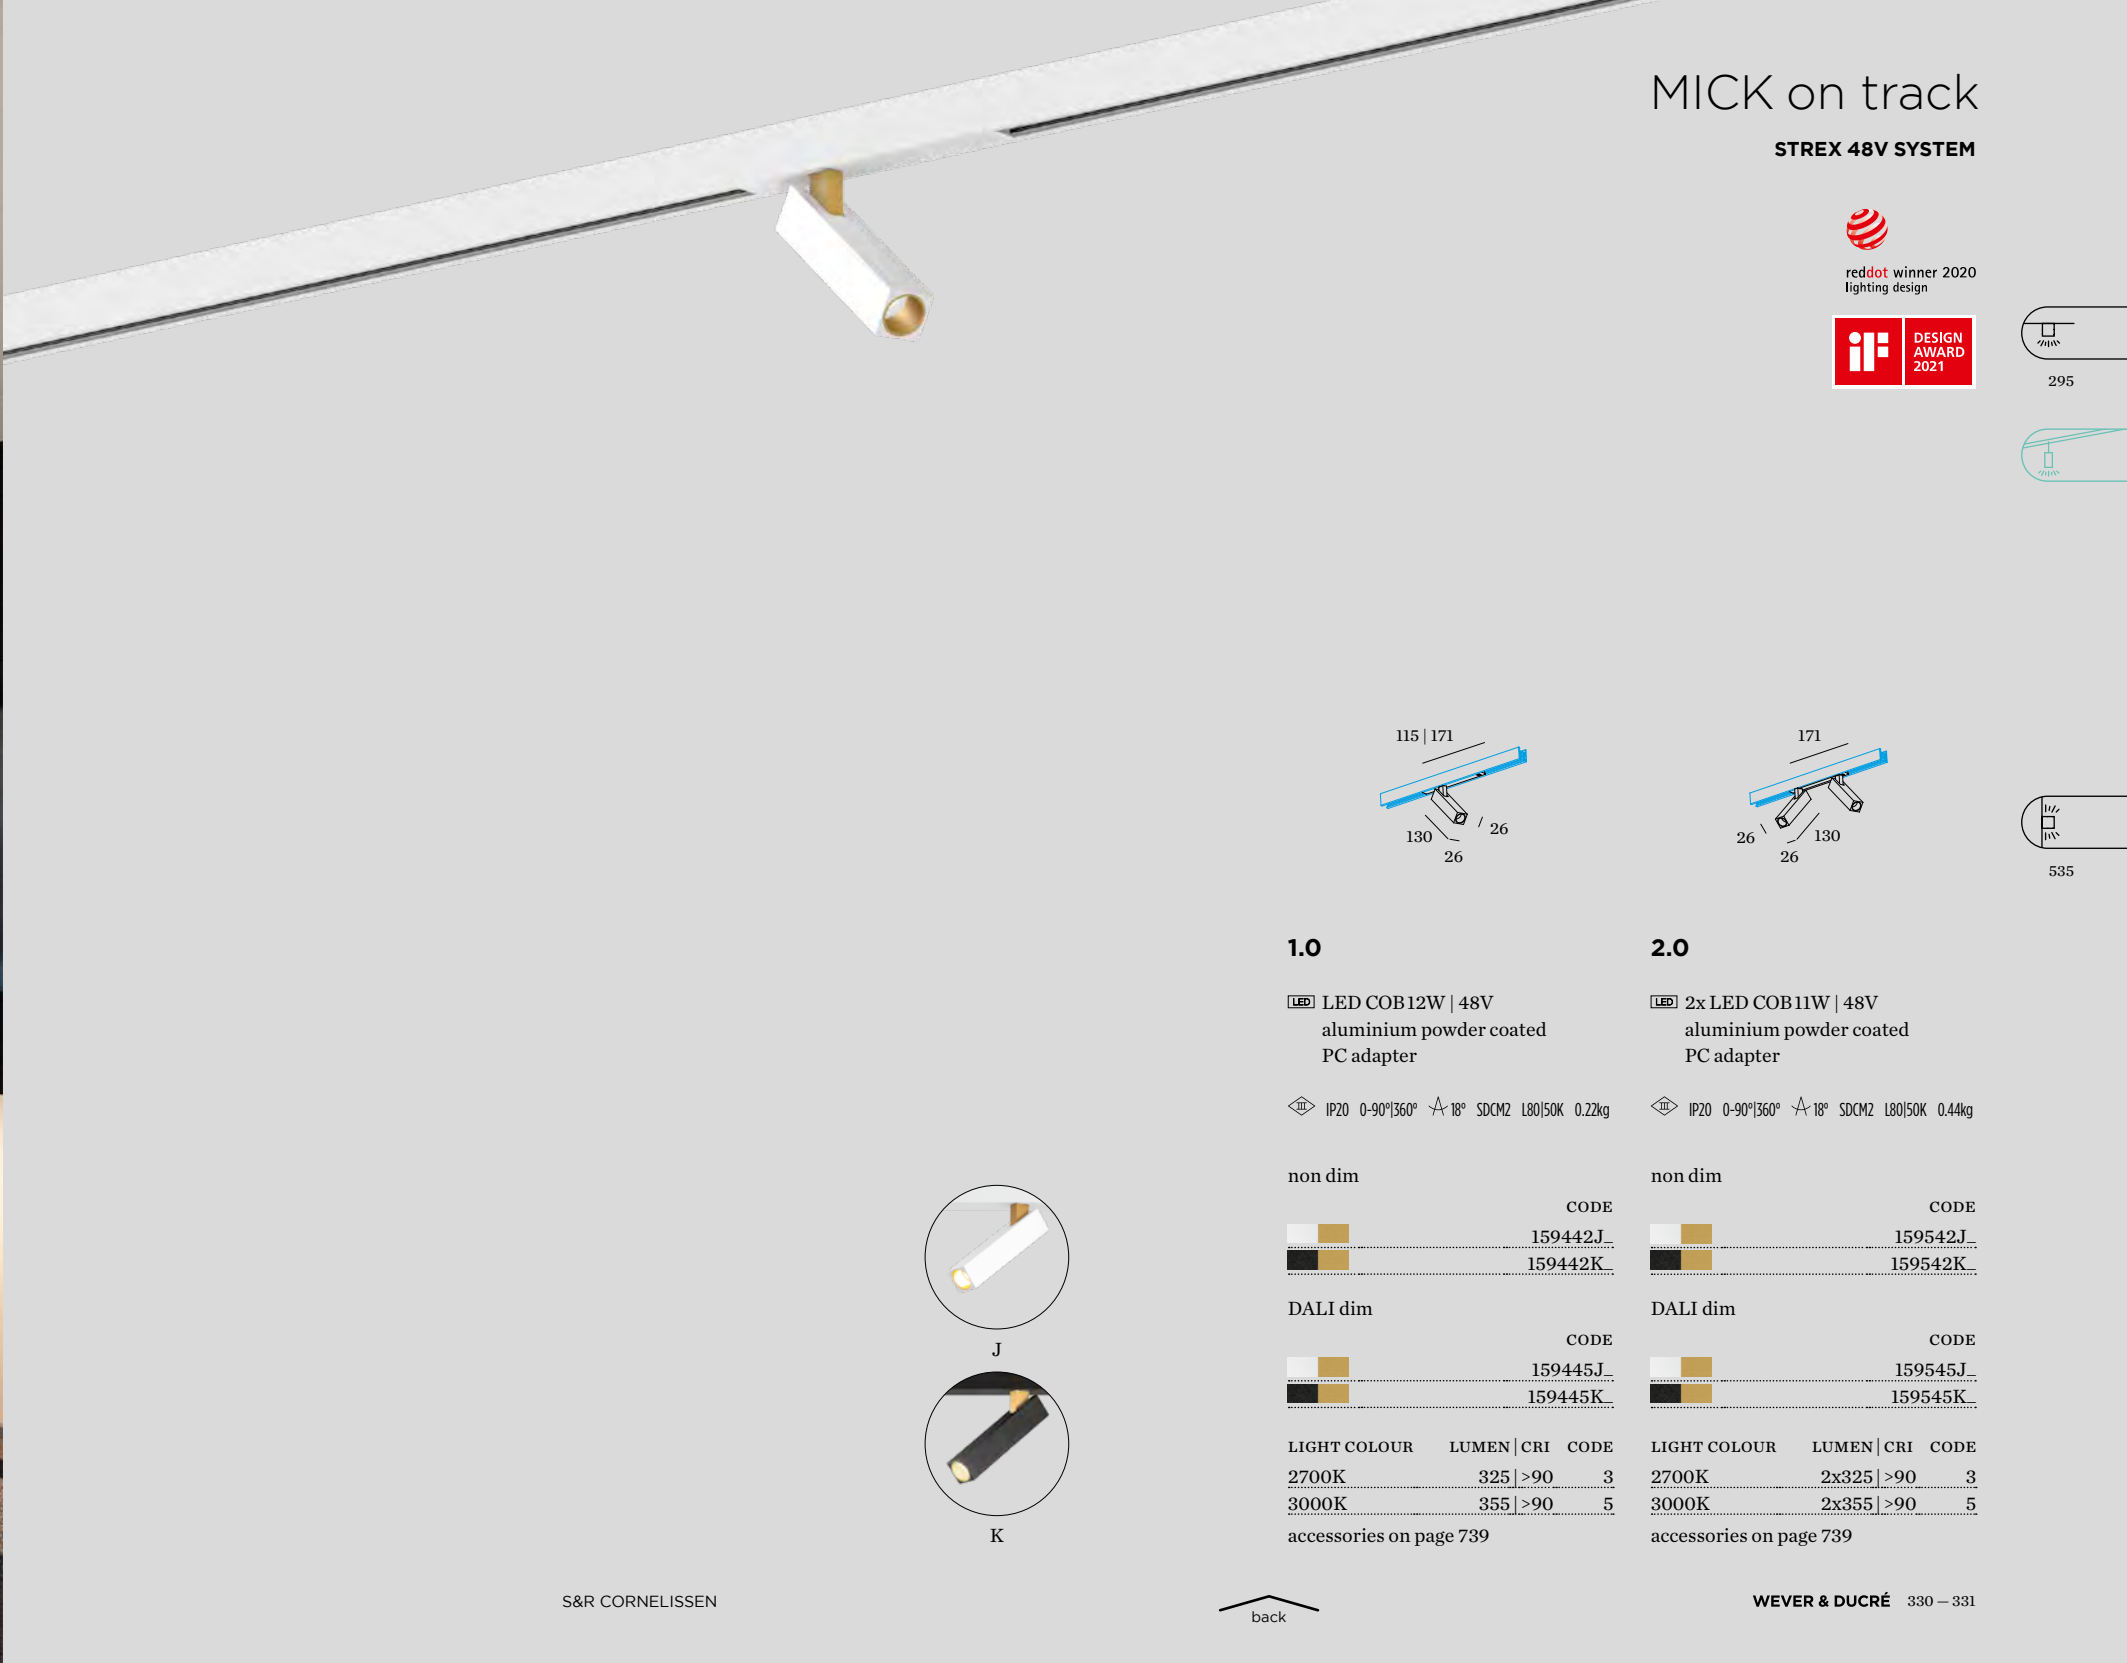


MICK on track

STREX 48V SYSTEM





reddot winner 2020
lighting design



295



535



1.0

LED COB12W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.22kg

non dim

	CODE
	159442J_
	159442K_

DALI dim

	CODE
	159445J_
	159445K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	355 >90	5

accessories on page 739

2.0

2x LED COB11W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.44kg

non dim

	CODE
	159542J_
	159542K_

DALI dim

	CODE
	159545J_
	159545K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x355 >90	5

accessories on page 739



J



K





RAY mini on track

STREX 48V SYSTEM

W

J

E

G

GB

Q

BQ

K

B

only for ceiling surface and suspended tracks

back

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.16kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258262W_3
	258262B_3
DALI	258265W_3
DALI	258265B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258262W_5
	258262B_5
DALI	258265W_5
DALI	258265B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	G
	GB
	Q
	BQ
	K
	B

229

501

OFFICE GERMANY

WEVER & DUCRÉ 334 – 335



BOX mini on track

STREX 48V SYSTEM

82 70 171 70

W

J

E

G

GB

Q

BQ

K

B

only for ceiling surface and suspended tracks

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.20kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258162W_3
	258162B_3
DALI	258165W_3
DALI	258165B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258162W_5
	258162B_5
DALI	258165W_5
DALI	258165B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	G
	GB
	Q
	BQ
	K
	B

back

WEVER & DUCRÉ 336 – 337



DOCUS mini on track

STREX 48V SYSTEM

only for ceiling surface and suspended tracks

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.18kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258362W_3
	258362B_3
DALI	258365W_3
DALI	258365B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258362W_5
	258362B_5
DALI	258365W_5
DALI	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

245

517

PRIVATE RESIDENCE SPAIN

WEVER & DUCRÉ 338 – 339



PRIVATE RESIDENCE | CHANTAL MEIER ARCHITEKTUR SWITZERLAND

HEXO mini on track

STREX 48V SYSTEM

82 | 171
ø81

W

J

E

Q

BQ

B

only for ceiling surface and suspended tracks

W

J

E

Q

BQ

B

only for ceiling surface and suspended tracks

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258462W_3
	258462B_3
	DALI 258465W_3
	DALI 258465B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258462W_5
	258462B_5
	DALI 258465W_5
	DALI 258465B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

back

WEVER & DUCRÉ 340 – 341

251

519



STREX MODULE

48V SYSTEM



1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 24° UGR≤19 SDCM3 L70|60K 0.11kg


non dim

CODE		
	171342W	
	171342B	

DALI dim

CODE		
	171345W	
	171345B	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	660	>90	3
3000K	735	>90	5



1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.16kg


non dim

CODE		
	171382W	
	171382B	

DALI dim

CODE		
	171385W	
	171385B	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	630	>90	5



2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.32kg


non dim

CODE		
	171482W	
	171482B	


DALI dim

CODE		
	171485W	
	171485B	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1225	>90	3
3000K	1265	>90	5




dot




opal

ODREY on track

48V SYSTEM

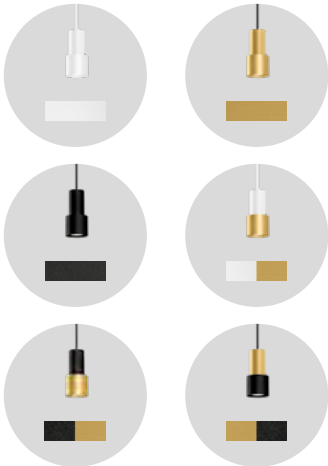

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service




1.1

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.28kg

CODE			
	187165WW_		
	187165GG_		
	187165BB_		
	187165WG_		
	187165BG_		
	187165GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5




1.2

LED COB 8W | 48V | DALI dim
aluminium wet painted | shade
matching inner cover included
PC adapter

IP20 32° SDCM2 L70|60K 0.48kg

CODE			
	187265WW_		
	187265GG_		
	187265BB_		
	187265WG_		
	187265BG_		
	187265GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5




1.3

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter


IP20 32° SDCM2 L70|60K 0.27kg

CODE			
	187365WW_		
	187365GG_		
	187365BB_		
	187365WG_		
	187365BG_		
	187365GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



437




495

ODREY on track

48V SYSTEM



MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service




1.4

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.32kg

CODE	
	187465WW_
	187465GG_
	187465BB_
	187465WG_
	187465BG_
	187465GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5




1.5

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.37kg

CODE	
	187565WW_
	187565GG_
	187565BB_
	187565WG_
	187565BG_
	187565GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.6

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.38kg

CODE	
	187665WW_
	187665GG_
	187665BB_
	187665WG_
	187665BG_
	187665GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

optional inner cover on page 743




441




495

ODREY on track

48V SYSTEM

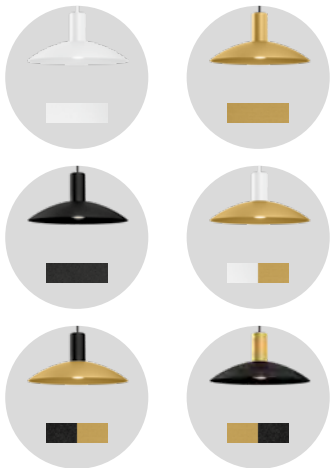

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service




1.7

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.34kg

	CODE
	187765WW_
	187765GG_
	187765BB_
	187765WG_
	187765BG_
	187765GB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485 >90	3
3000K	505 >90	5



1.8


LED COB 8W | 48V | DALI dim
aluminium wet painted | shade
matching inner cover included
PC adapter

IP20 32° SDCM2 L70|60K 0.45kg

	CODE
	187865WW_
	187865GG_
	187865BB_
	187865WG_
	187865BG_
	187865GB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485 >90	3
3000K	505 >90	5

optional inner cover on page 743

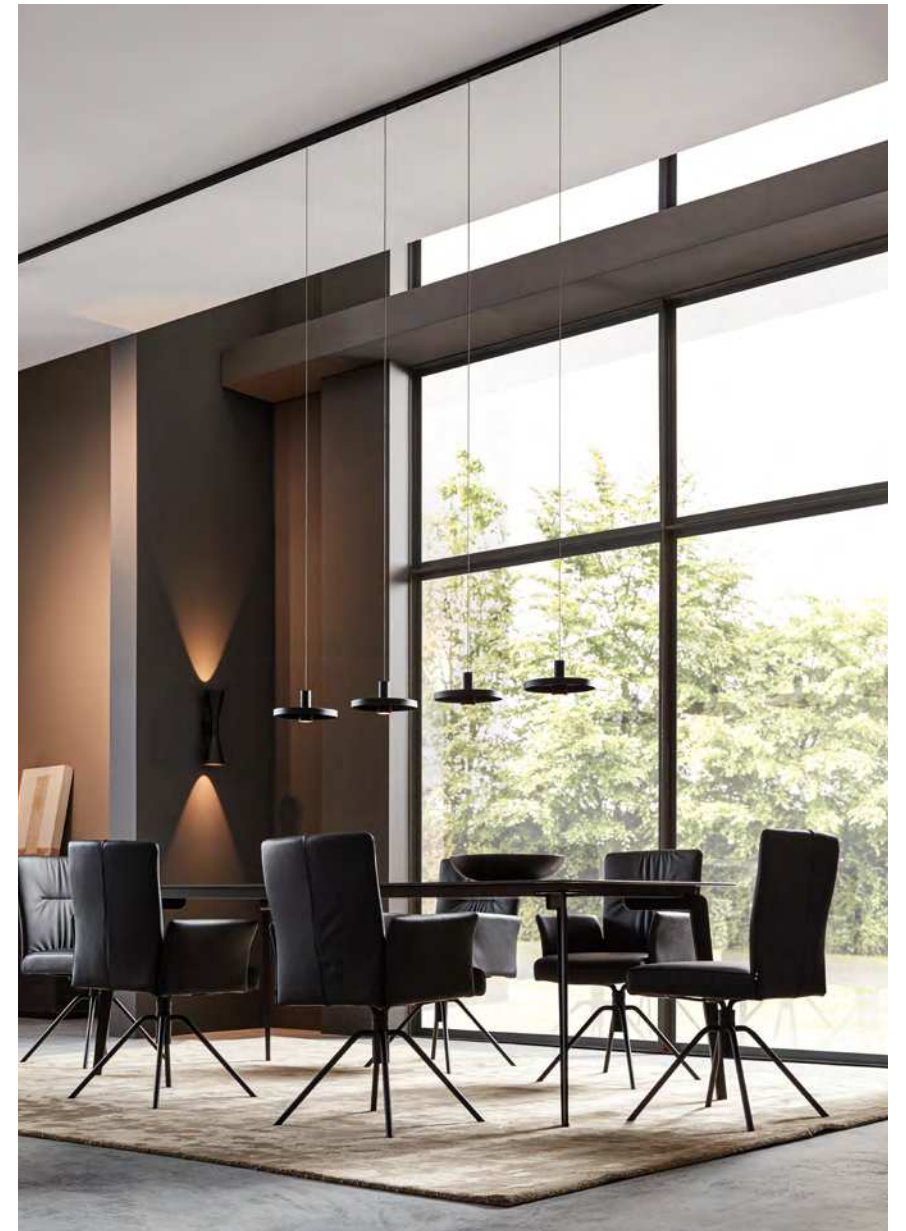



► DESIGN WITH LOVE

back



STUBE on track

48V SYSTEM

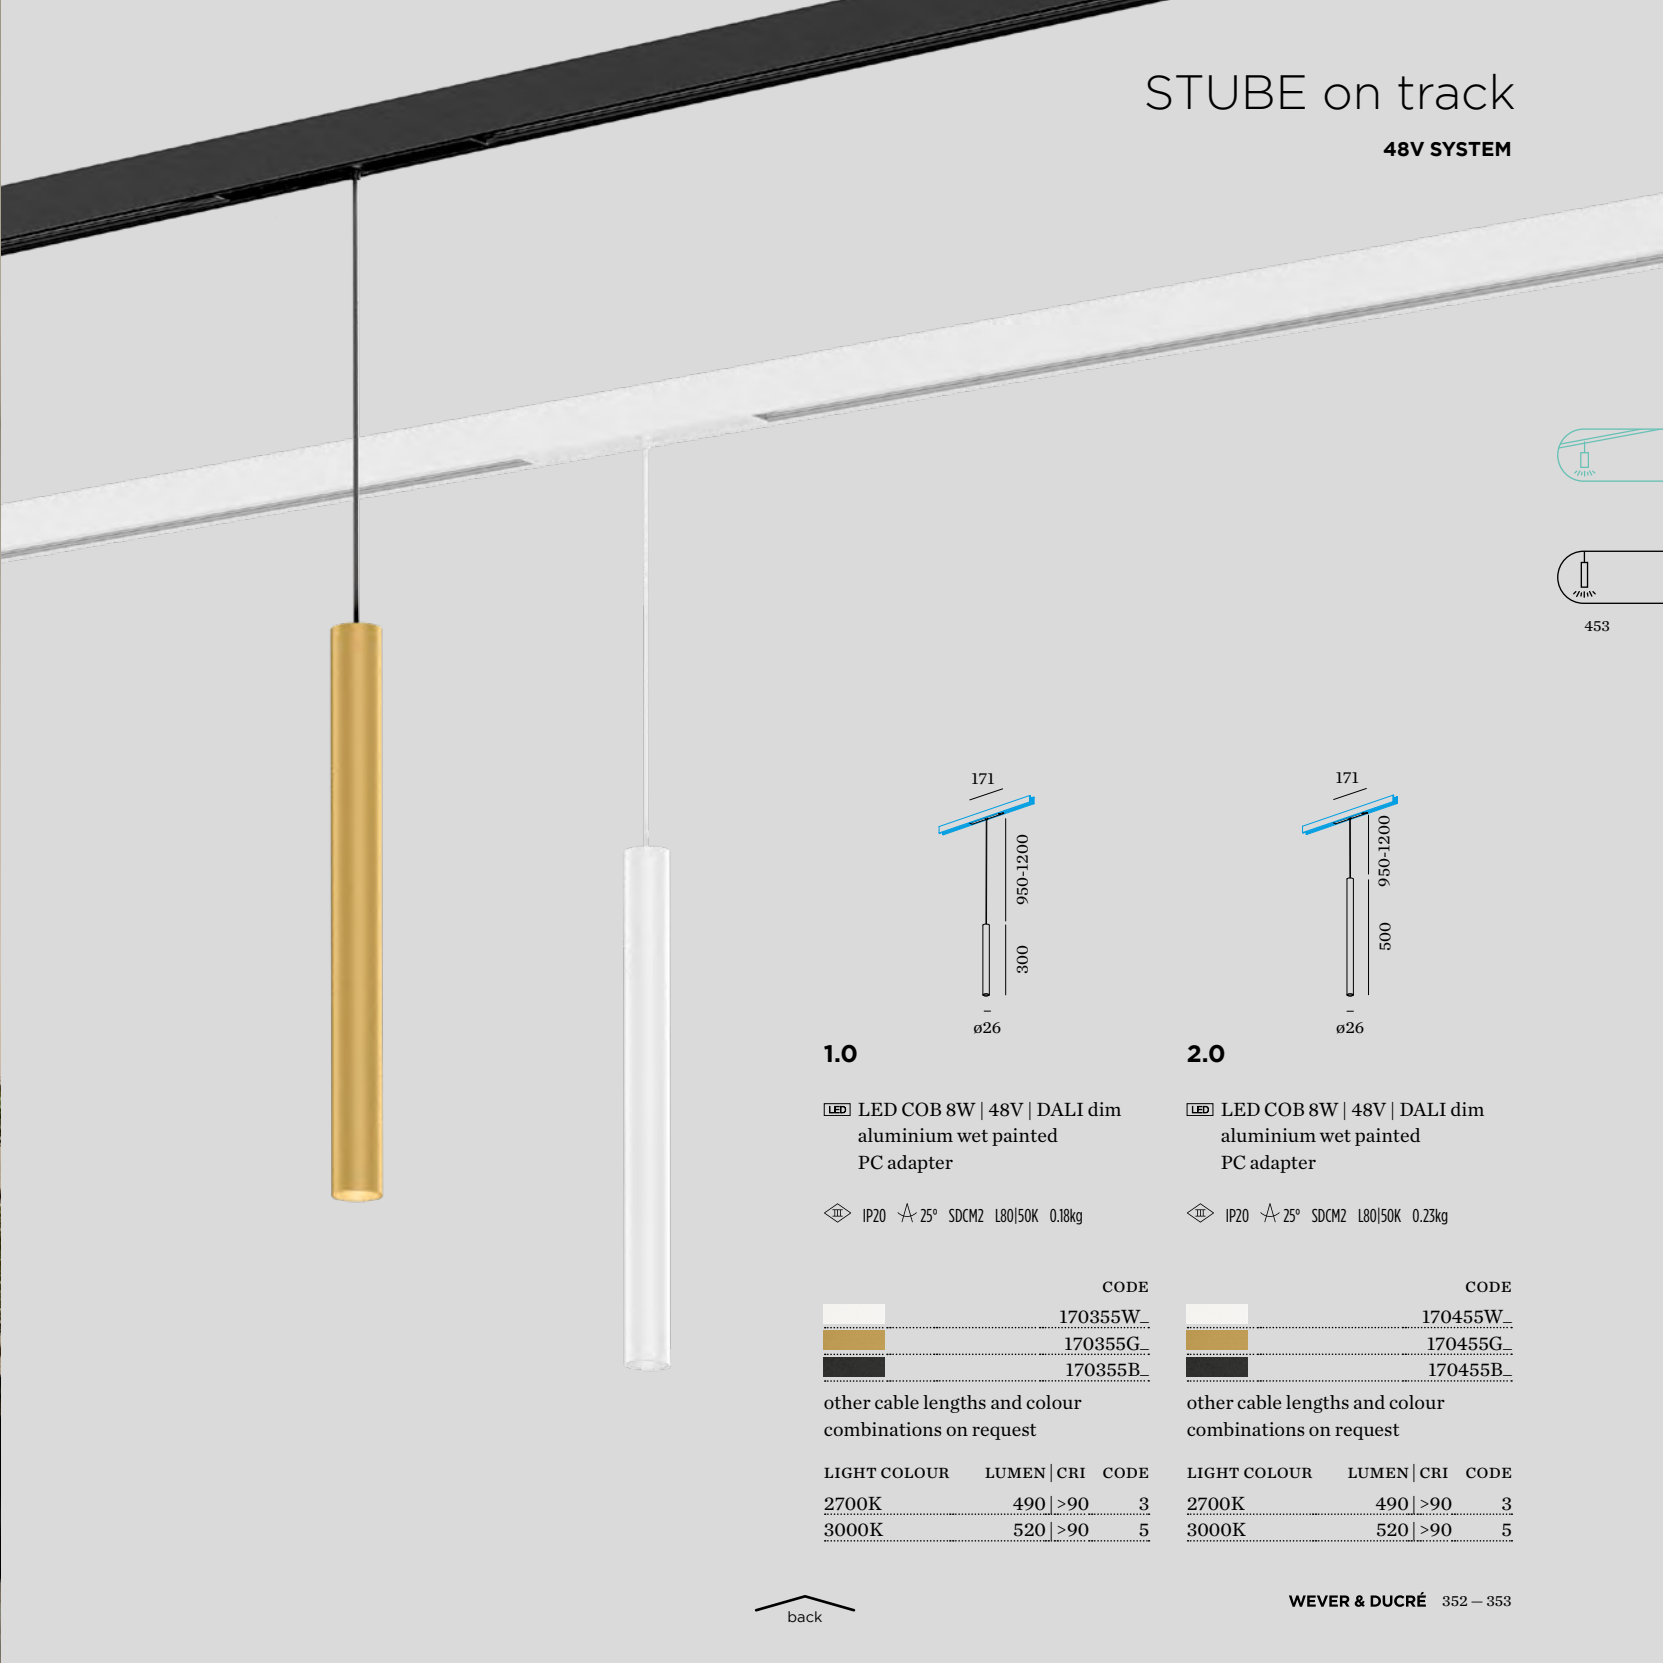

1.0


LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 25° SDCM2 L80/50K 0.18kg

	CODE
	170355W_
	170355G_
	170355B_

other cable lengths and colour
combinations on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



2.0

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 25° SDCM2 L80/50K 0.23kg

	CODE
	170455W_
	170455G_
	170455B_

other cable lengths and colour
combinations on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5




PRIVATE RESIDENCE AUSTRIA



SOLLI on track

48V SYSTEM



451



1.0


LED COB 5W | 48V | DALI dim
aluminium powder coated
black cable | PC adapter
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.70kg

CODE	
	238185FD_
	238185TD_
	238185WB_


other cable lengths and colour combinations on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	215 >90	3
3000K	230 >90	5



back




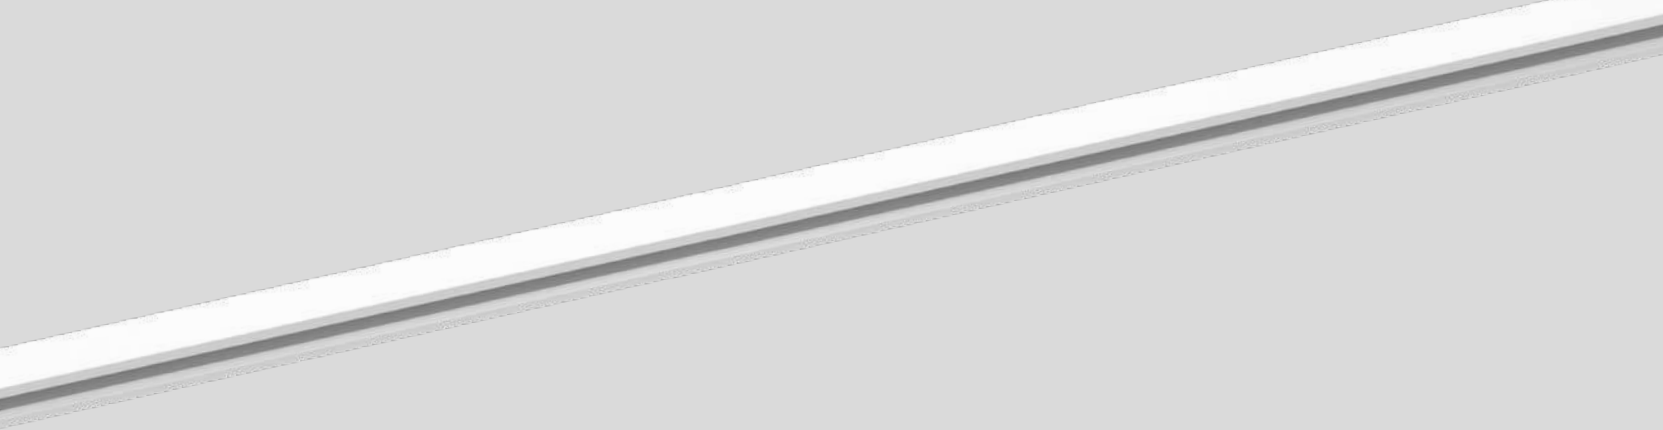


1-PHASE TRACKS

220-240V TRACKS | ACCESSORIES

RECESSED | SURFACE | SUSPENDED EXAMPLES


configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

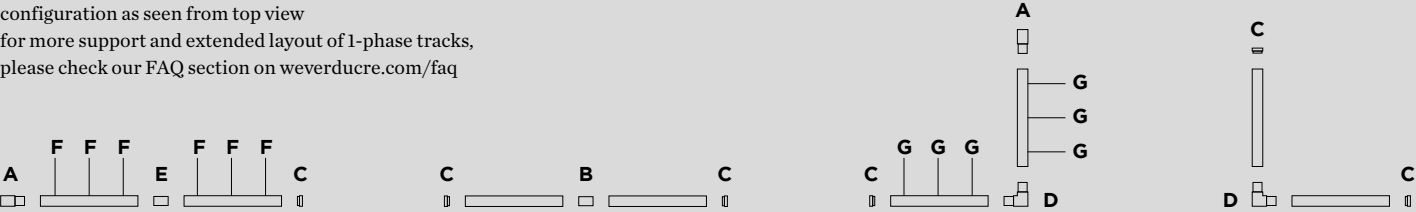

A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014018
	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014020
	90014021



B | MIDDLE FEED


straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT


	CODE
	90014028
	90014029



D | L-CONNECTOR 1.0

220-240V | max. 3 x 1.5mm² - 16A
can be used as feed

	CODE
	90014024
	90014025



D | L-CONNECTOR 2.0

220-240V | max. 3 x 1.5mm² - 16A
can be used as feed


	CODE
	90014026
	90014027



E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023




COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125

more 1-phase track accessories on
page 740



TRACK PROFILE


recessed | 220-240V | 16A



	CODE
	90014118
	90014119

	2m	90014120
	2m	90014121

	3m	90014122
	3m	90014123




F | MOUNTING BRACKET

for recessed fixation



	CODE
	90014100

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A



	CODE
	90014001
	90014007

	2m	90014002
	2m	90014008

	3m	90014003
	3m	90014009

ø29




G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
 1,5m	90014101
 1,5m	90014102

	3m	90014103
	3m	90014104

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



back



ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKE-HEIST | BELGIUM



SARA on track



1-PHASE



281



529



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 34° SDCM2 L70|50K 0.24kg

1.0 PAR16

PAR16 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.16kg

	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	500 >80	3
3000K	530 >80	5

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



W



G



K



B



for LED version
inner ring is black




BRACE | HELLE FLOU | ANKER & CO COPENHAGEN | DENMARK





1-PHASE



Technical drawing of a bottle with dimensions: 77, 100, 107, and ø55.

Ⓢ IP20 0-90°|355° Δ 39° SDCM2 L70|50K 0.36kg

Ⓢ IP20 0-90°|355° 0.32kg


CODE
144120W0
144120B0

OPTIONAL

more options and specs on page 731





PAR16

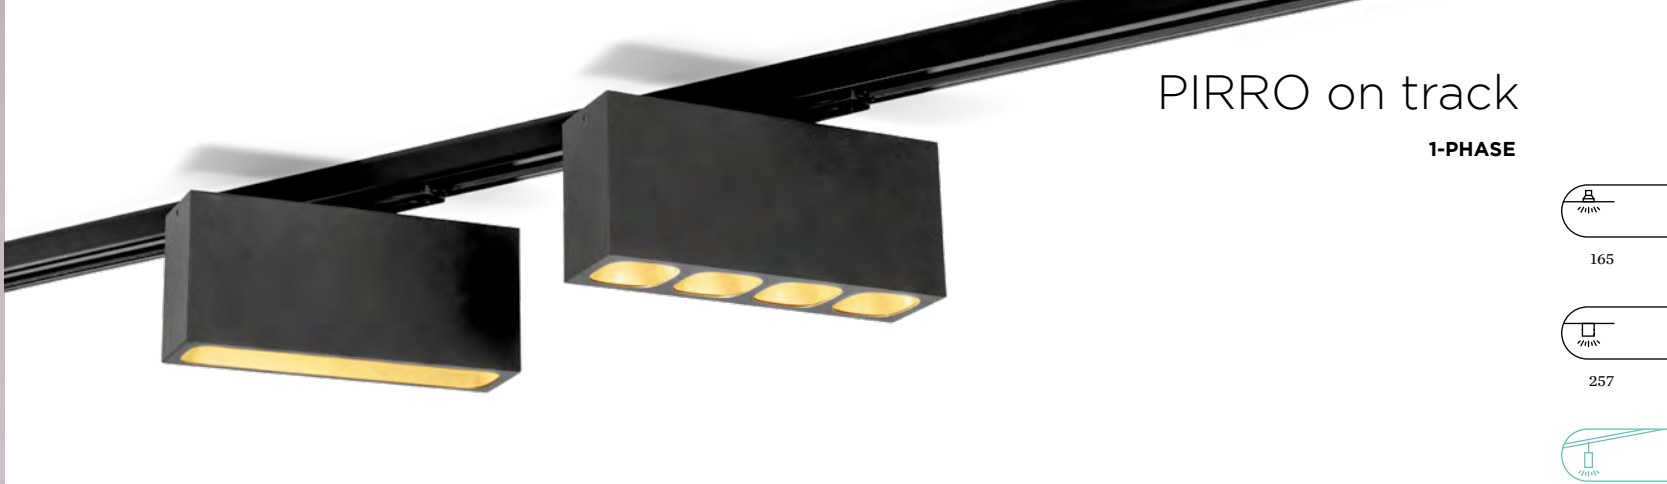

PIRRO on track

1-PHASE




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° 95° SDCM3 L80|50K 0.33kg

	CODE
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5




2.0 SPOT

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L80|50K 0.38kg

	CODE
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5




4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° 95° SDCM3 L80|50K 0.57kg

	CODE
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5



4.0 SPOT

4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L80|50K 0.61kg

	CODE
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5




DRO on track

1-PHASE



69



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal italian hand blown glass
1-phase Global® track adapter


IP20 0.60kg

CODE	
	1724G0WB0
	1724G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim


CODE	
3000K 250lm	9010G804
specs on page 732	



brown on



brown off




back



ODREY on track

1-PHASE



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

⊕ IP20 0.29kg


CODE	
	187120WW0
	187120GG0
	187120BB0
	187120WG0
	187120BG0
	187120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more options and specs on page 731



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included
incl. 1-phase Global® track adapter

⊕ IP20 0.49kg


CODE	
	187220WW0
	187220GG0
	187220BB0
	187220WG0
	187220BG0
	187220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more options and specs on page 731



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

⊕ IP20 0.28kg


CODE	
	187320WW0
	187320GG0
	187320BB0
	187320WG0
	187320BG0
	187320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more options and specs on page 731



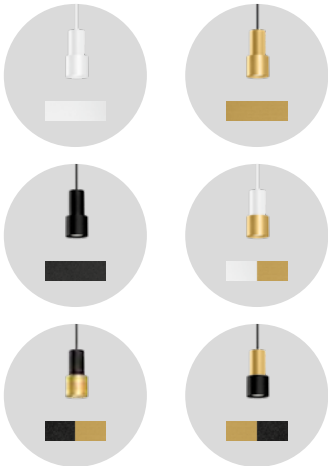


MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



ODREY on track

1-PHASE



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.33kg

	CODE
	187420WW0
	187420GG0
	187420BB0
	187420WG0
	187420BG0
	187420GB0

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.35kg

	CODE
	187520WW0
	187520GG0
	187520BB0
	187520WG0
	187520BG0
	187520GB0

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.36kg

	CODE
	187620WW0
	187620GG0
	187620BB0
	187620WG0
	187620BG0
	187620GB0

optional inner cover on page 743



MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	901228B3
	901228B5

more options and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	901228B3
	901228B5

more options and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
	901228B3
	901228B5

more options and specs on page 731




ODREY on track

1-PHASE

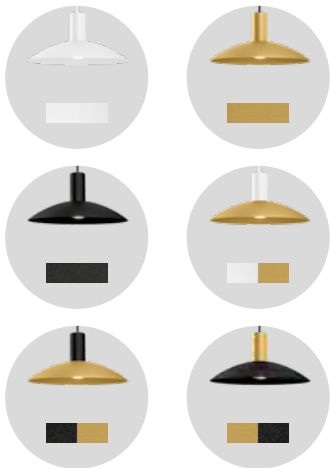

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.32kg

	CODE
	187720WW0
	187720GG0
	187720BB0
	187720WG0
	187720BG0
	187720GB0


optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more options and specs on page 731



1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included
incl. 1-phase Global® track adapter

IP20 0.43kg

	CODE
	187820WW0
	187820GG0
	187820BB0
	187820WG0
	187820BG0
	187820GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
	2700K 437lm 901228B3
	3000K 457lm 901228B5

more options and specs on page 731



SUSPENSIONS on track

1-PHASE



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.54 | 0.68kg


2.0	200mm	CODE
		217520W0
		217520G0
		217520P0
		217520B0

3.0	300mm	CODE
		217620W0
		217620G0
		217620P0
		217620B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.58 | 0.74kg

2.0	200mm	CODE
		215520G0
		215520Q0
		215520P0
		215520B0

3.0	300mm	CODE
		215620G0
		215620Q0
		215620P0
		215620B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



White luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Other colour combinations on request.





3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

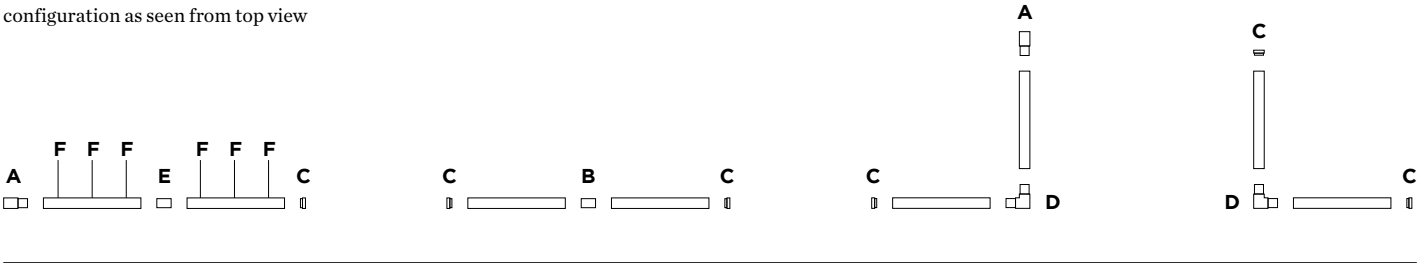

TRACK PROFILE

surface | suspended | DALI
220-240V | 16A



	CODE
1m	90014200
1m	90014201
2m	90014202
2m	90014203
3m	90014204
3m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
1.5m	90014206
1.5m	90014207
3m	90014208
3m	90014209


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014240
	90014241



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014238
	90014239



B | MIDDLE FEED


straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT


	CODE
	90014216
	90014217



D | L-CONNECTOR 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A
can be used as feed


	CODE
	90014220
	90014221



D | L-CONNECTOR 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A
can be used as feed


	CODE
	90014222
	90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

	CODE
1m	90014236
1m	90014237

more 3-phase track accessories on
page 741



SQUBE on track

3-PHASE

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144720W0
	144720B0

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° SDCM2 L70|50K 0.40kg

	CODE
	144368W_
	144368B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K 32°	711 >80	3
3000K 32°	790 >80	5
1800-3000K 58°	790 >80	9

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

3.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 27° SDCM2 L70|50K 0.75kg

	CODE
	144558W_
	144558B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1300 >90	3
3000K	1390 >90	5

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729

PAR16

for LED version
inner ring is black

back

WEVER & DUCRÉ 380 — 381



PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM




CERAVENTO GALLERY | CASA & COMPANY | DANILO CASTALDI LIGHTING CONSULTANT PESCARA | ITALY







PRIVATE RESIDENCE GERMANY



1.0

LED LED COB 36W
220-240VAC | 50-60Hz
3-phase track adapter


IP IP20 0-90°|360° **Beam** 24° **SDCM** SDCM2 **L70** L70|50K **Weight** 0.78kg

non-dim

CODE	
	166963W
	166963B

DALI dim

CODE	
	166965W
	166965B



honeycomb

OPTIONAL

honeycomb louver




back

CODE		LIGHT COLOUR		LUMEN CRI		CODE
90051132		3000K	2650	>90	5	
		4000K	2830	>90	7	



SUSPENSIONS on track

3-PHASE



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.54 | 0.68kg


2.0	200mm	CODE
		217320W0
		217320G0
		217320P0
		217320B0

3.0	300mm	CODE
		217420W0
		217420G0
		217420P0
		217420B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.58 | 0.74kg

2.0	200mm	CODE
		215320G0
		215320Q0
		215320P0
		215320B0

3.0	300mm	CODE
		215420G0
		215420Q0
		215420P0
		215420B0


OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



White luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Other colour combinations on request.



A | 1.0
LED PCB 18W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80/50K 1.70kg

phase-cut dim
3000K | >90 CRI | 1090lm

	CODE
	500384W5
	500384B5

DALI dim
3000K | >90 CRI | 1090lm

	CODE
	500385W5
	500385B5

B | CONNECTOR POINT
phase-cut dim up to max. 4 fixtures
DALI dim up to max. 2 fixtures

	CODE
	900190W1
	900190B1

C | STEEL SUSPENSION CABLE
2.0m

D1 | POWER FEEDER
for phase-cut dim | incl. steel
suspension cable 2.0m | max. 10
luminaires per power feeder

	CODE
	90018010
	90018011

D2 | POWER FEEDER
for DALI 2.0m | incl. steel suspension
cable 2.0m | max. 10 luminaires per
power feeder


	CODE
	90018012
	90018013

ELLO SYSTEM

CEILING SURFACE | SUSPENDED


SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

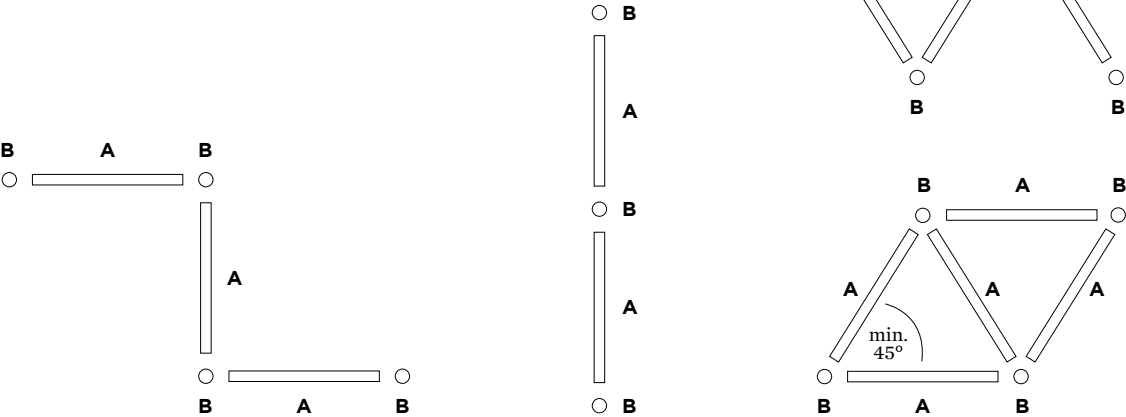

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

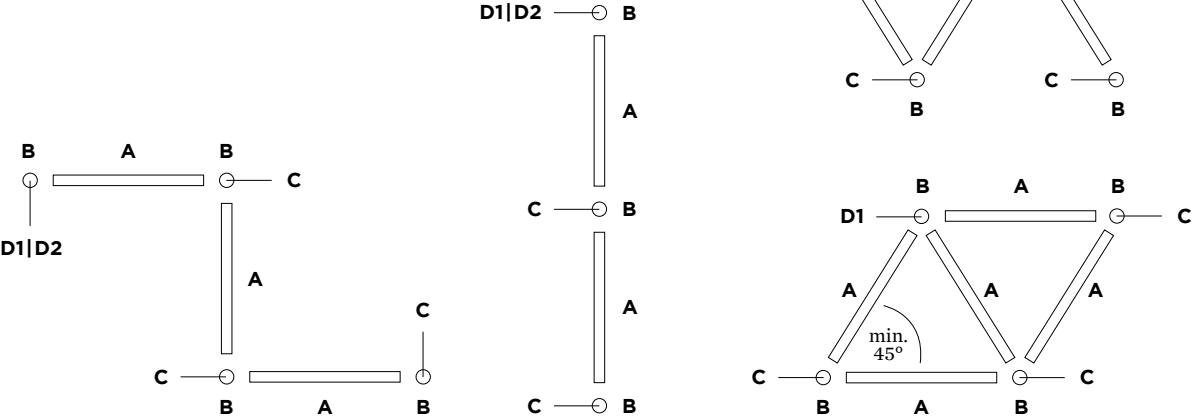



SLEEVESUP! SPACES GMBH GIESSEN | GERMANY



SLEEVESUP! SPACES GMBH HANNOVER | GERMANY



OFFICE KR PROPERTIES | H2A ARCHITECTURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA



OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY






YEP, RIGHT THERE

SPOT LANDING FOR YOUR FAVOURITE LIGHT

There's certainly one question you no longer need to ask: Where is the power outlet? That's because this doesn't really matter with PIRRO SYSTEM. After all, lights can be optically positioned precisely where they look just right – perfect, in fact. How does it work? PIRRO opal and PIRRO spot insets can be attached to two rails of different lengths and in many different versions. This lets you create a small work of art on every ceiling reminiscent of well-known Bauhaus classics – and that's no coincidence. Serge Cornelissen used exactly those classics as models or his lamp creation, which above all sets itself apart with its functionality, style and minimalism. A true success story, if we do say to ourselves. We'd like to add that the PIRRO SYSTEM is available in subtle white, gold or black, and can be combined with insets in two sizes and four different colours.

Eine Frage müssen Sie sich ab sofort bestimmt nicht mehr stellen und zwar: Wo ist hier der Stromauslass? Denn das ist mit PIRRO SYSTEM ziemlich egal. Schließlich lassen sich Leuchten damit optisch punktgenau dort platzieren, wo sie einfach richtig und zwar richtig gut aussehen. Wie's funktioniert? PIRRO Opal und PIRRO Spot Insets können auf zwei unterschiedlich langen Schienen und in vielen verschiedenen Varianten angebracht werden. So entsteht an jeder Decke ein kleines Kunstwerk, das nicht umsonst an bekannte Bauhaus-Klassiker denken lässt. Genau die dienten Serge Cornelissen nämlich als Vorbild für seine Leuchten-Kreation, die vor allem durch Funktionalität, Stil und Minimalismus besticht. Echt gelungen, finden wir und fügen hinzu, dass PIRRO SYSTEM in dezentem Weiß, Gold oder Schwarz zu haben ist und mit Insets in zwei Größen und vier verschiedenen Farbvarianten kombiniert werden kann.

HOW TO COMBINE YOUR PIRRO SYSTEM


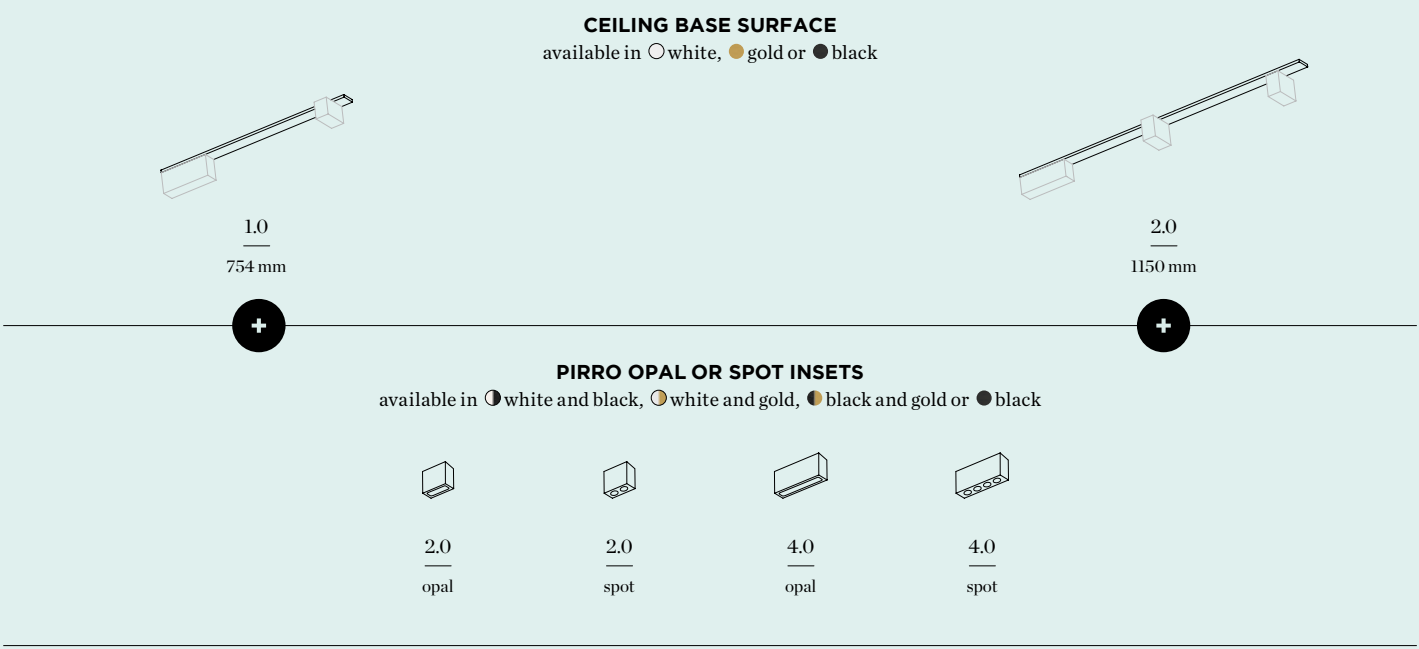




PRIVATE RESIDENCE GERMANY

PIRRO SYSTEM

CEILING SURFACE



2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.30kg

CODE			
			151284E
			151284J
			151284K
			151284B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240 >90	3
3000K	260 >90	5




2.0 SPOT

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

IP20 32° SDCM2 L80|50K 0.30kg

CODE			
			151264E
			151264J
			151264K
			151264B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x380 >90	3
3000K	2x405 >90	5




4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.52kg

CODE			
			151484E
			151484J
			151484K
			151484B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5



4.0 SPOT

4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector


IP20 32° SDCM2 L80|50K 0.48kg

CODE			
			151464E
			151464J
			151464K
			151464B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x405 >90	5


CHOOSE YOUR BASE

1.0 ceiling base
ceiling base for 2 insets
aluminium powder coated





CODE	
	90052072
	90052074
	90052073

2.0 ceiling base
ceiling base for 3 insets
aluminium powder coated



CODE	
	90052075
	90052077
	90052076



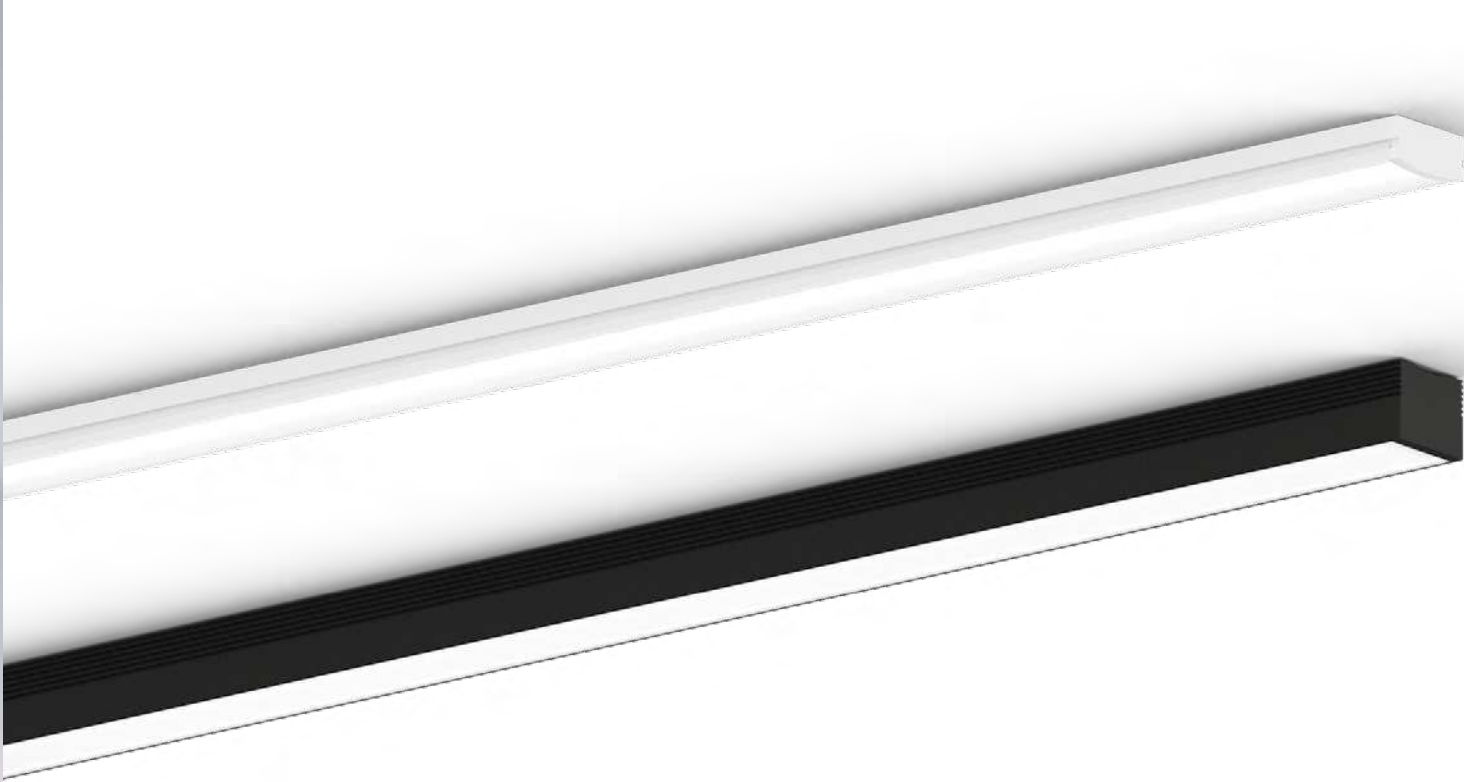


ILANE

CEILING SURFACE

1.0 PROFILE


aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911991W2
2m	911991B2
3m	911991W3
3m	911991B3

2.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911992W2
2m	911992B2
3m	911992W3
3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

OPTIONAL


Black diffuser | only for 1.0

CODE	
2m	911902B1
3m	911903B1


Double side tape for profile fixation

CODE	
3m	90019199

more accessories on page 738



only 1.0
black diffuser




only 2.0
flush with
plasterboard

for net output of LED strip on profiles,
check weverducre.com/ilane



3.0 PROFILE


aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE		
2m	911993W2	
2m	911993B2	
3m	911993W3	
3m	911993B3	

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE		
2m	911994W2	
2m	911994B2	
3m	911994W3	
3m	911994B3	

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE		
20W 2m	9003S21	
30W 3m	9003S31	
50W 5m	9003S41	

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE		
30W 2m	9003S22	
45W 3m	9003S32	
75W 5m	9003S42	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE		
35W	90212801	
100W	90212902	
25W dim	90222701	
50W dim	90222901	

specs on page 728

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE		
20W 2m	9003S21	
30W 3m	9003S31	
50W 5m	9003S41	

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE		
30W 2m	9003S22	
45W 3m	9003S32	
75W 5m	9003S42	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE		
35W	90212801	
100W	90212902	
25W dim	90222701	
50W dim	90222901	

specs on page 728

OPTIONAL

Black diffuser | only for 3.0

CODE		
2m	911912B1	
3m	911913B1	


Double side tape for profile fixation

CODE		
3m	90019199	

more accessories on page 738



only 3.0
black diffuser




only 4.0
flush with
plasterboard
with trim

for net output of LED strip on profiles,
check weverducre.com/ilane



3.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911993W2
2m	911993B2
3m	911993W3
3m	911993B3

ALWAYS USE

LED COB strip 24V | IP65
10W/m | 780lm/m

CODE	
16W 2m	9003S61
24W 3m	9003S71
40W 5m	9003S81

LED COB strip 24V | IP65
15W/m | 1350lm/m

CODE	
30W 2m	9003S62
45W 3m	9003S72
75W 5m	9003S82

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901


specs on page 728

ILANE IP65

CEILING SURFACE | RECESSED

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911994W2
2m	911994B2
3m	911994W3
3m	911994B3

ALWAYS USE

LED COB strip 24V | IP65
10W/m | 780lm/m

CODE	
16W 2m	9003S61
24W 3m	9003S71
40W 5m	9003S81

LED COB strip 24V | IP65
15W/m | 1350lm/m

CODE	
30W 2m	9003S62
45W 3m	9003S72
75W 5m	9003S82

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V


CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

for net output of LED strip on profiles,
check weverducre.com/ilane



only 3.0
black diffuser



only 4.0
flush with
plasterboard
with trim

OPTIONAL

Black diffuser | only for 3.0

CODE	
2m	911912B1
3m	911913B1

Double side tape for profile fixation

CODE	
3m	90019199

more accessories on page 738



back

CEILING SUSPENDED

406—475

CEILING
SUSPENDED
SINGLE




RAY
411



BOX
413



DOCUS
415



HEXO
417



SHIEK 1.0
421



SHIEK 3.0
423



SHIEK 4.0
425



WETRO
429



ODREY
445



DINOR 1.0
447



DINOR 2.0
447



DINOR 3.0
447



SOLLI
451



STUBE
453



CORK
455



CONE
457



BISHOP
459




NET
463



ELLO
465



DARF
469



GIGANT
473

CEILING
SUSPENDED
MULTI



RAY MULTI
411




BOX MULTI
413




DOCUS MULTI
415



HEXO MULTI
417



SHIEK MULTI
421



WETRO MULTI
429



ODREY MULTI
441



**ROOMOR
OFFICE**
31



MIRRO
55



DRO
71



WIRO
97




J.J.W.
125

DESIGNER FAMILIES


CHOOSE
YOUR BASE

If you have fallen in love with one of our luminaires, but need a matching ceiling rose: Then perhaps we can act as a “dating agency”. The choice basically comes down to single or multiple pendant roses. For single pendants, they are either surface mounted, semi-recessed or invisible. The multiple pendant ceiling rose is available in a round or rectangular shape. And last but not least, there is also a wall version with an integrated light switch. Have you found your match? Then all that remains to do now is decide on a suitable lampshade and a suitable colour on the following pages.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen Einzel- oder Multiabhängung wählen. Bei der Einzelabhängung gibts Aufbau-, Semi-Recessed oder Invisible. Den Multibaldachin gibts in runder oder gerader Form. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für einen passenden Lampenschirm auf den nächsten Seiten und eine passende Farbe entscheiden.

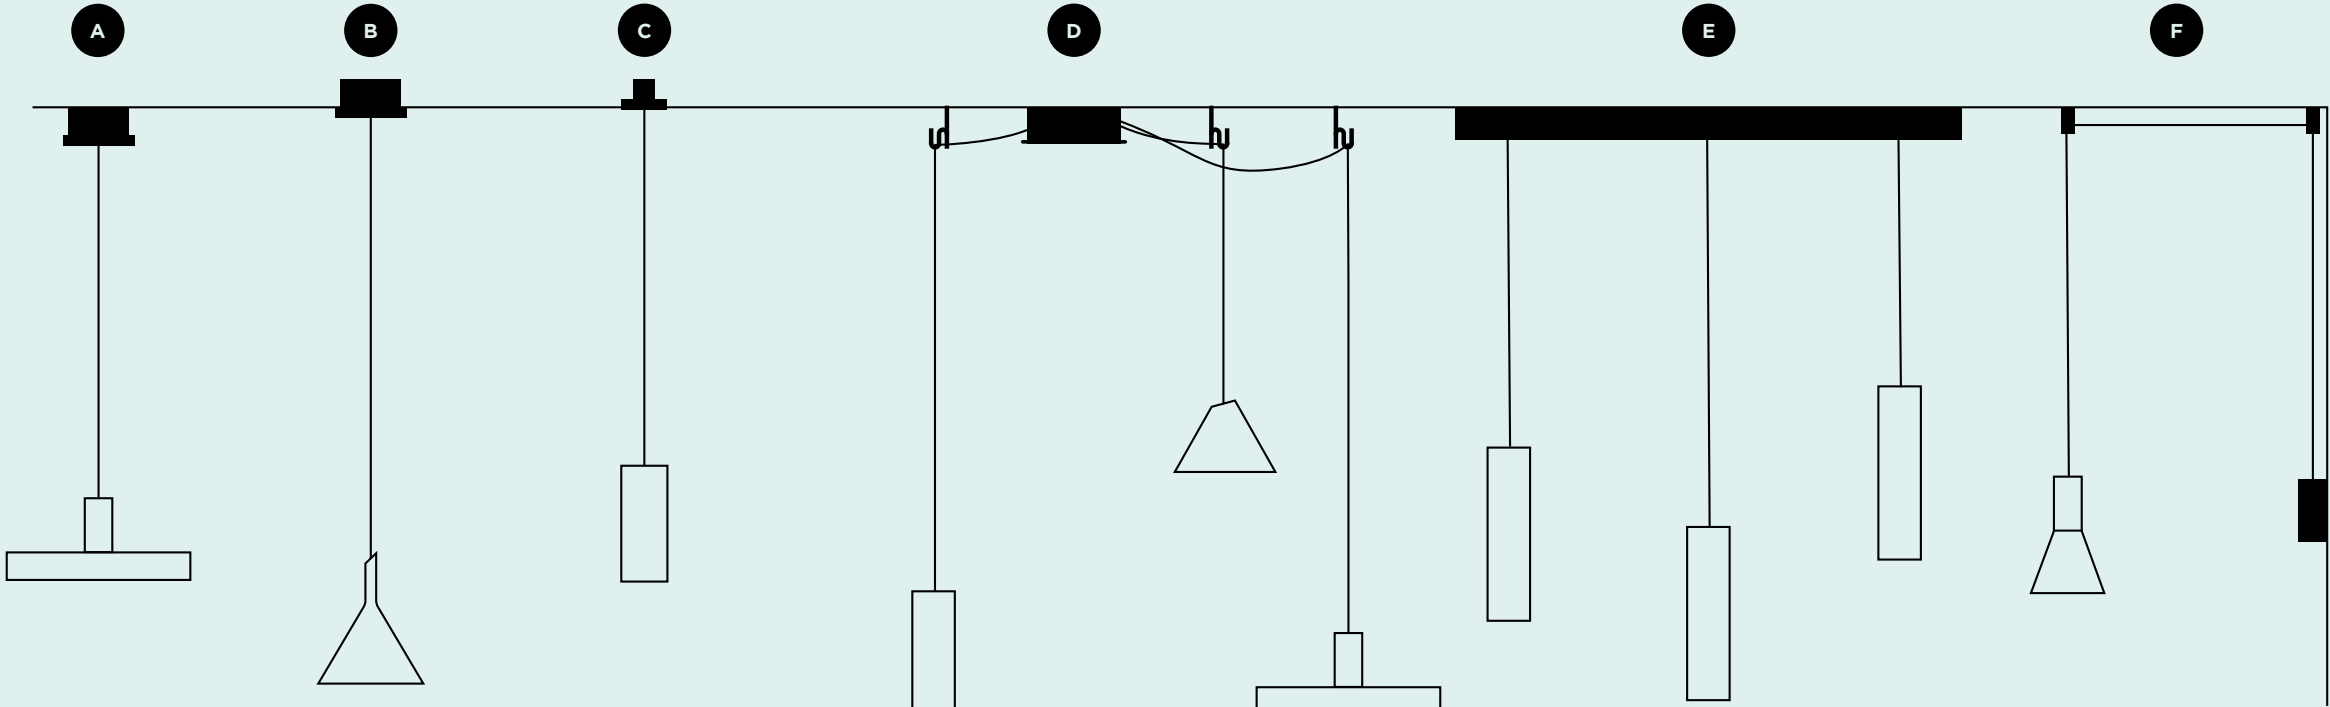


A



SINGLE BASE
ceiling base round

	CODE
	90052022
	90052021

B




SEMI RECESSED BASE
for shades without steel wire only

⌚ 73-76 ⚙️ 70 ⚡ 10-35

	CODE
	90052026
	90052027

C




INVISIBLE SINGLE BASE
plasterkit | system - with fixation
and adjustment with or without steel
cable | max. 10kg

⌚ 68 ⚙️ 80 ⚡ 12-5

	CODE
	90015196
	90015195


D



MULTIPLE BASE
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032


E



LINEAR MULTIPLE BASE
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F



WALL BASE
for 1 luminaire | incl. 2 wall-ceiling
brackets | for cable 4.25-5.5mm
diameter | incl. switch on/off


	CODE
	90019195
	90019196

wall - ceiling bracket

	CODE
	90019197
	90019198



white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted


IP20 36° SDCM2 L70|50K 0.62|0.76kg

2.0	CODE
200mm	
	226764W
	226764L
	226764G
	226764P
	226764B

3.0	CODE
300mm	
	226864W
	226864L
	226864G
	226864P
	226864B

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K	570 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.54|0.68kg

2.0	CODE
200mm	
	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0	CODE
300mm	
	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

RAY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm


	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base


incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

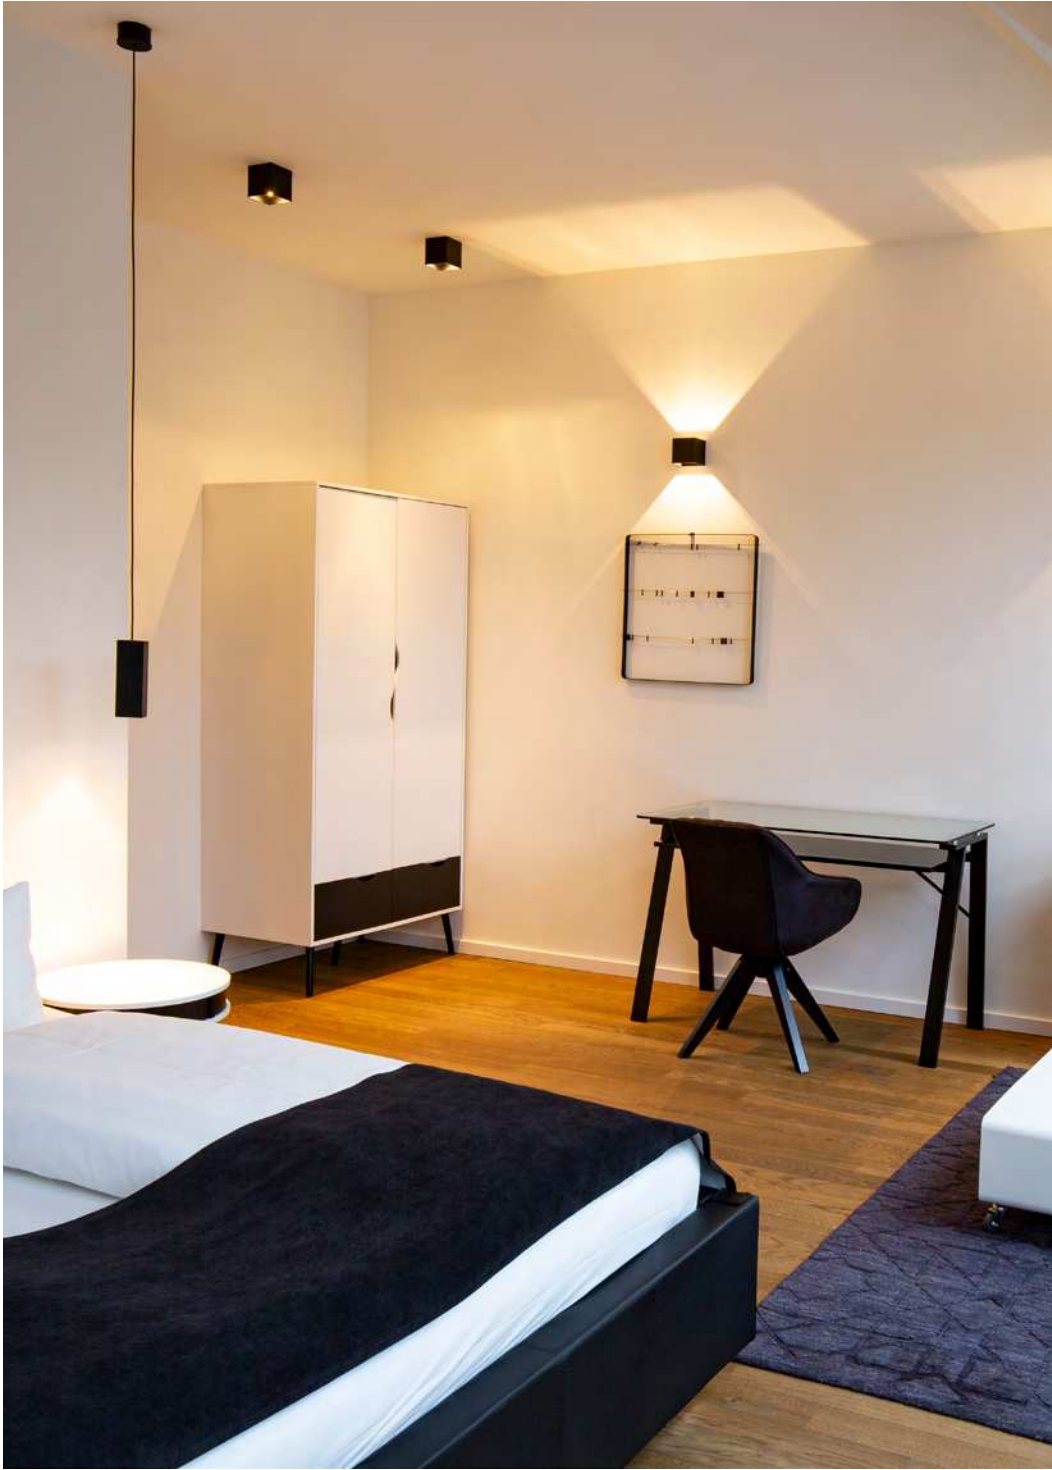

► DESIGN WITH LOVE



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.83kg


2.0	CODE
200mm	
	226164W
	226164L
	226164P
	226164B

3.0	CODE
300mm	
	226264W
	226264L
	226264P
	226264B

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K	570 >95	9

white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.76kg

2.0	CODE
200mm	
	227120W0
	227120L0
	227120P0
	227120B0

3.0	CODE
300mm	
	227220W0
	227220L0
	227220P0
	227220B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

BOX

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base up to max. 2 | 3 | 4 | 5 luminaires 600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014


F | Wall base incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted


IP20 36° SDCM2 L70|50K 0.66|0.82kg

2.0	CODE
200mm	
	226564W
	226564L
	226564G
	226564P
	226564B

3.0	CODE
300mm	
	226664W
	226664L
	226664G
	226664P
	226664B

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K	570 >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.72kg

2.0	CODE
200mm	
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0	CODE
300mm	
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

DOCUS

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	CODE
	90052022
	90052021

B Semi recessed single base	CODE
	90052026
	90052027



C Invisible single base plasterkit system	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	CODE
	90019195
	90019196

more information on page 408



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70/50K 0.66/0.82kg

2.0	CODE
200mm	
	226364G
	226364Q
	226364P
	226364B

3.0	CODE
300mm	
	226464G
	226464Q
	226464P
	226464B

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
2000-3000K	570 >95	9

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.58/0.74kg

2.0	CODE
200mm	
	227320G0
	227320Q0
	227320P0
	227320B0

3.0	CODE
300mm	
	227420G0
	227420Q0
	227420P0
	227420B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

HEXO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base up to max. 2 | 3 | 4 | 5 luminaires 600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014


F | Wall base incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

all colours are standard with black
cable | white cable on request





1.0 LED


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.36kg

1800-2850K | >90 CRI | 525lm

	CODE
	237188W9
	237188J9
	237188P9
	237188K9
	237188Z9

all colours are standard with black
cable | white cable on request



2.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.47kg

1800-2850K | >90 CRI | 525lm

	CODE
	237288W9
	237288J9
	237288P9
	237288K9
	237288Z9

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196


more information on page 408



reddot award 2017
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design




3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80/50K 0.60kg

1800-2850K | >90 CRI | 525lm

	CODE
	237388W9
	237388J9
	237388P9
	237388K9
	237388Z9



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.60kg

	CODE
	2343E0W0
	2343E0J0
	2343E0P0
	2343E0K0
	2343E0Z0

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K 800lm	9003E152

more options and specs on page 732

all colours are standard with black
cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm



	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



4.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80/50K 0.70kg

1800-2850K | >90 CRI | 525lm

	CODE
	237488W9
	237488J9
	237488P9
	237488K9
	237488Z9

4.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.70kg

	CODE
	2344E0W0
	2344E0J0
	2344E0P0
	2344E0K0
	2344E0Z0

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K 800lm	9003E152

more options and specs on page 732

all colours are standard with black
cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



all colours are standard with black cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	
	CODE
	90052022
	90052021

B Semi recessed single base	
	CODE
	90052026
	90052027

C Invisible single base plasterkit system	
	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	
	CODE
 max. 4	90052005
 max. 4	90052006
 max. 8	90052031
 max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	
	CODE
 max. 2	90052007
 max. 2	90052008
 max. 3	90052009
 max. 3	90052010
 max. 4	90052011
 max. 4	90052012
 max. 5	90052013
 max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	
	CODE
	90019195
	90019196
more information on page 408	

5.0 LED

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

 IP20 SDCM2 L80/50K 0.80kg

1800-2850K | >90 CRI | 525lm

	CODE
	237588W9
	237588J9
	237588P9
	237588K9
	237588Z9

5.0 E27

 A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

 IP20 0.80kg

	CODE
	2345E0W0
	2345E0J0
	2345E0P0
	2345E0K0
	2345E0Z0

OPTIONAL


A60 9W opal | E27 | phase-cut dim

	CODE
2700K 800lm	9003E152
more options and specs on page 732	



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

all colours are standard with black
cable | white cable on request




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

	CODE
	236188P9
	236188B9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

	CODE
	236288P9
	236288B9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

	CODE
	236388P9
	236388B9

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408




► DESIGN WITH LOVE





BAR OSLO | NORWAY

all colours are standard with black
cable | white cable on request




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

	CODE
	236188TS9
	236188TD9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

	CODE
	236288TS9
	236288TD9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

	CODE
	236388TS9
	236388TD9

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base


incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

3H DRAFT

back

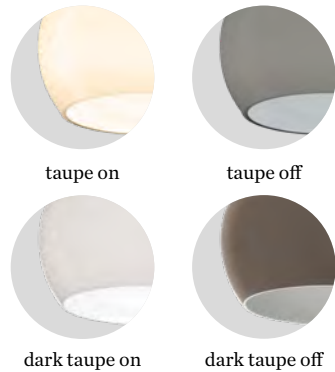

all colours are standard with black cable | white cable on request

1.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

 IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

CODE	
	236188TW9
	236188DW9

2.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

 IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

CODE	
	236288TW9
	236288DW9

3.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

 IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

CODE	
	236388TW9
	236388DW9

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

CODE	
	90052022
	90052021

B | Semi recessed single base

CODE	
	90052026
	90052027

C | Invisible single base plasterkit | system

CODE	
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

CODE	
 max. 4	90052005
 max. 4	90052006
 max. 8	90052031
 max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

CODE	
 max. 2	90052007
 max. 2	90052008
 max. 3	90052009
 max. 3	90052010
 max. 4	90052011
 max. 4	90052012
 max. 5	90052013
 max. 5	90052014

F | Wall base





incl. 2 wall-ceiling brackets

CODE	
	90019195
	90019196

more information on page 408



MORE COMBINATIONS
weverducre.com/odrey-configurator or
contact customer service



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.27kg

	CODE
	287120WW0
	287120GG0
	287120BB0
	287120WG0
	287120BG0
	287120GB0



always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.26kg

	CODE
	287320WW0
	287320GG0
	287320BB0
	287320WG0
	287320BG0
	287320GB0


always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



back

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm


	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base


incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



345 | 371



495




MORE COMBINATIONS
weverducre.com/odrey-configurator or
contact customer service

1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included

IP20 0.47kg

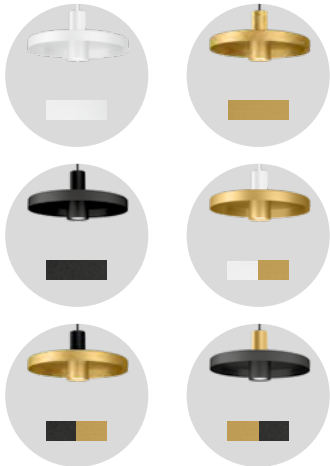

	CODE
	287220WW0
	287220GG0
	287220BB0
	287220WG0
	287220BG0
	287220GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm



	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets


	CODE
	90019195
	90019196

more information on page 408





MORE COMBINATIONS
weverducre.com/odrey-configurator or
contact customer service

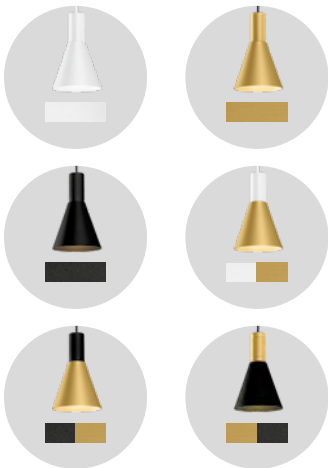

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

	CODE
	287420WW0
	287420GG0
	287420BB0
	287420WG0
	287420BG0
	287420GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more options and specs on page 731

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.32kg

	CODE
	287520WW0
	287520GG0
	287520BB0
	287520WG0
	287520BG0
	287520GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more options and specs on page 731

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.34kg

	CODE
	287620WW0
	287620GG0
	287620BB0
	287620WG0
	287620BG0
	287620GB0

always add a base
optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more options and specs on page 731

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
	max. 4 90052005
	max. 4 90052006
	max. 8 90052031
	max. 8 90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm



	CODE
	max. 2 90052007
	max. 2 90052008
	max. 3 90052009
	max. 3 90052010
	max. 4 90052011
	max. 4 90052012
	max. 5 90052013
	max. 5 90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196



more information on page 408





ETXE AUNDI JATETXEA | NORTH HOME STUDIO OÑATI | SPAIN






1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

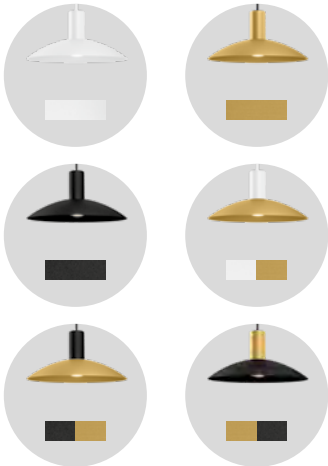

	CODE
	287720WW0
	287720GG0
	287720BB0
	287720WG0
	287720BG0
	287720GB0

always add a base
optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731

1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included

IP20 0.41kg

	CODE
	287820WW0
	287820GG0
	287820BB0
	287820WG0
	287820BG0
	287820GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 731



ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm



	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408






all colours are standard with black
cable | white cable on request



DINOR
CEILING SUSPENDED




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 0.90kg

1800-2850K >90 CRI 525lm	CODE
	255188GW9
	255188BG9
	255188BB9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 1.30kg

1800-2850K >90 CRI 525lm	CODE
	255288GW9
	255288BG9
	255288BB9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 2.30kg

1800-2850K >90 CRI 525lm	CODE
	255388GW9
	255388BG9
	255388BB9

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

more information on page 408



PRIVATE RESIDENCE | LANCO DESIGN BELGIUM



PRIVATE RESIDENCE | STUDIO LEEMAN BELGIUM





SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM



SOLLI

CEILING SUSPENDED



1.0

LED LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
glass handblown

IP20 SDCM2 L80|50K 0.48kg

CODE	
	238284FD_
	238284TD_
	238284WB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	215 >90	3
3000K	230 >90	5






white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request



STUBE

CEILING SUSPENDED



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted

IP20 25° SDCM2 L80|50K 0.26kg

	CODE
	170554W_
	170554G_
	170554B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted

IP20 25° SDCM2 L80|50K 0.36kg

	CODE
	170654W_
	170654G_
	170654B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5




► DESIGN WITH LOVE



CORK

CEILING SUSPENDED



1.0

LED PCB 4W
100-240VAC | 50-60Hz | incl. driver
aluminium powder coated
fits bottles inner ø16.5 - 19.5 mm

IP20 36° SDCM3 L80I60K 0.24kg

2700K | >80 CRI | 145lm


CODE
210363B2

OPTIONAL

	CODE
bottle 1	
75/174 glass	90019013
bottle 2	
87/323 glass	90019014




HOTEL LILLA ROBERTS | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

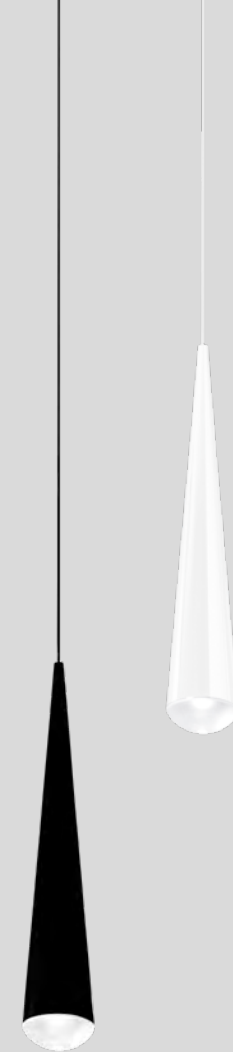

CONE

CEILING SUSPENDED



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
chrome plated | glass


IP20 38° SDCM2 L80|60K 0.55kg

2700K | >90 CRI | 405lm

CODE	
	200184W3
	200184B3



BISHOP
CEILING SUSPENDED



4.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 1.08kg


CODE	
	2184E0W0
	2184E0R0
	2184E0D0
	2184E0K0

6m suspension on request

OPTIONAL

G95 5.4W E27 phase-cut dim	
CODE	
2200K 450lm	9003E111

G95 11.2W E27 phase-cut dim	
CODE	
2700K 1100lm	9003E154
more options and specs on page 732	



6.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 2.62kg


CODE	
	2186E0W0
	2186E0R0
	2186E0D0
	2186E0K0

6m suspension on request

OPTIONAL

G95 5.4W E27 phase-cut dim	
CODE	
2200K 450lm	9003E111

G95 11.2W E27 phase-cut dim	
CODE	
2700K 1100lm	9003E154
more options and specs on page 732	



8.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 5.70kg

CODE	
	2188E0W0
	2188E0R0
	2188E0D0
	2188E0K0

6m suspension on request

OPTIONAL


G95 5.4W E27 phase-cut dim	
CODE	
2200K 450lm	9003E111

G95 11.2W E27 phase-cut dim	
CODE	
2700K 1100lm	9003E154
more options and specs on page 732	





RESTAURANT WARSAW | POLAND




2.0

LED 2x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 SDCM3 L80|50K 1.29kg

2700K | >90 CRI | 2x250lm

CODE	
	231264W3
	231264M3
	231264B3



4.0

LED 4x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 SDCM3 L80|50K 2.49kg

2700K | >90 CRI | 4x250lm

CODE	
	231464W3
	231464M3
	231464B3



MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED KAU TO SHAN | HONGKONG



ELLO


CEILING SUSPENDED




reddot award 2015
winner



DESIGN
AWARD
2015



391



13.0


LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|50K 2.00kg


3000K | >90 CRI | 1090lm

CODE

	500484W5
	500484B5



chrome endcap









► DESIGN WITH LOVE



GIGANT

CEILING SUSPENDED

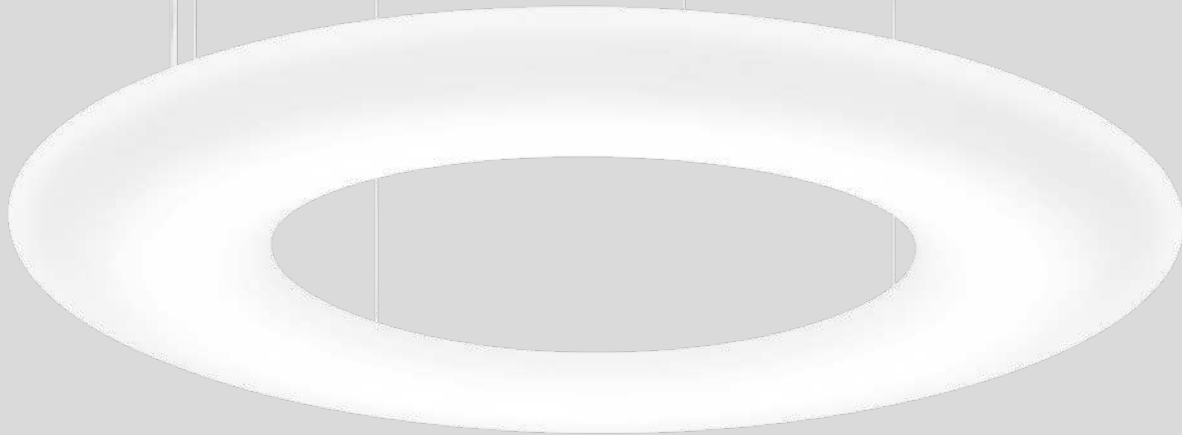

10.0

LED PCB 42W | DALI switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80/60K 8.80kg

3000K | >80 CRI | 5300lm


CODE
213385W4

4000K | >80 CRI | 5600lm

CODE
213385W6

OPTIONAL

CODE
suspension
set 4m 90015114
longer suspension on request



16.0

LED PCB 84W | DALI switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80/60K 15.30kg

3000K | >80 CRI | 10600lm

CODE
213485W4

4000K | >80 CRI | 11300lm


CODE
213485W6

OPTIONAL


CODE
suspension
set 4m 90015114
longer suspension on request



OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM

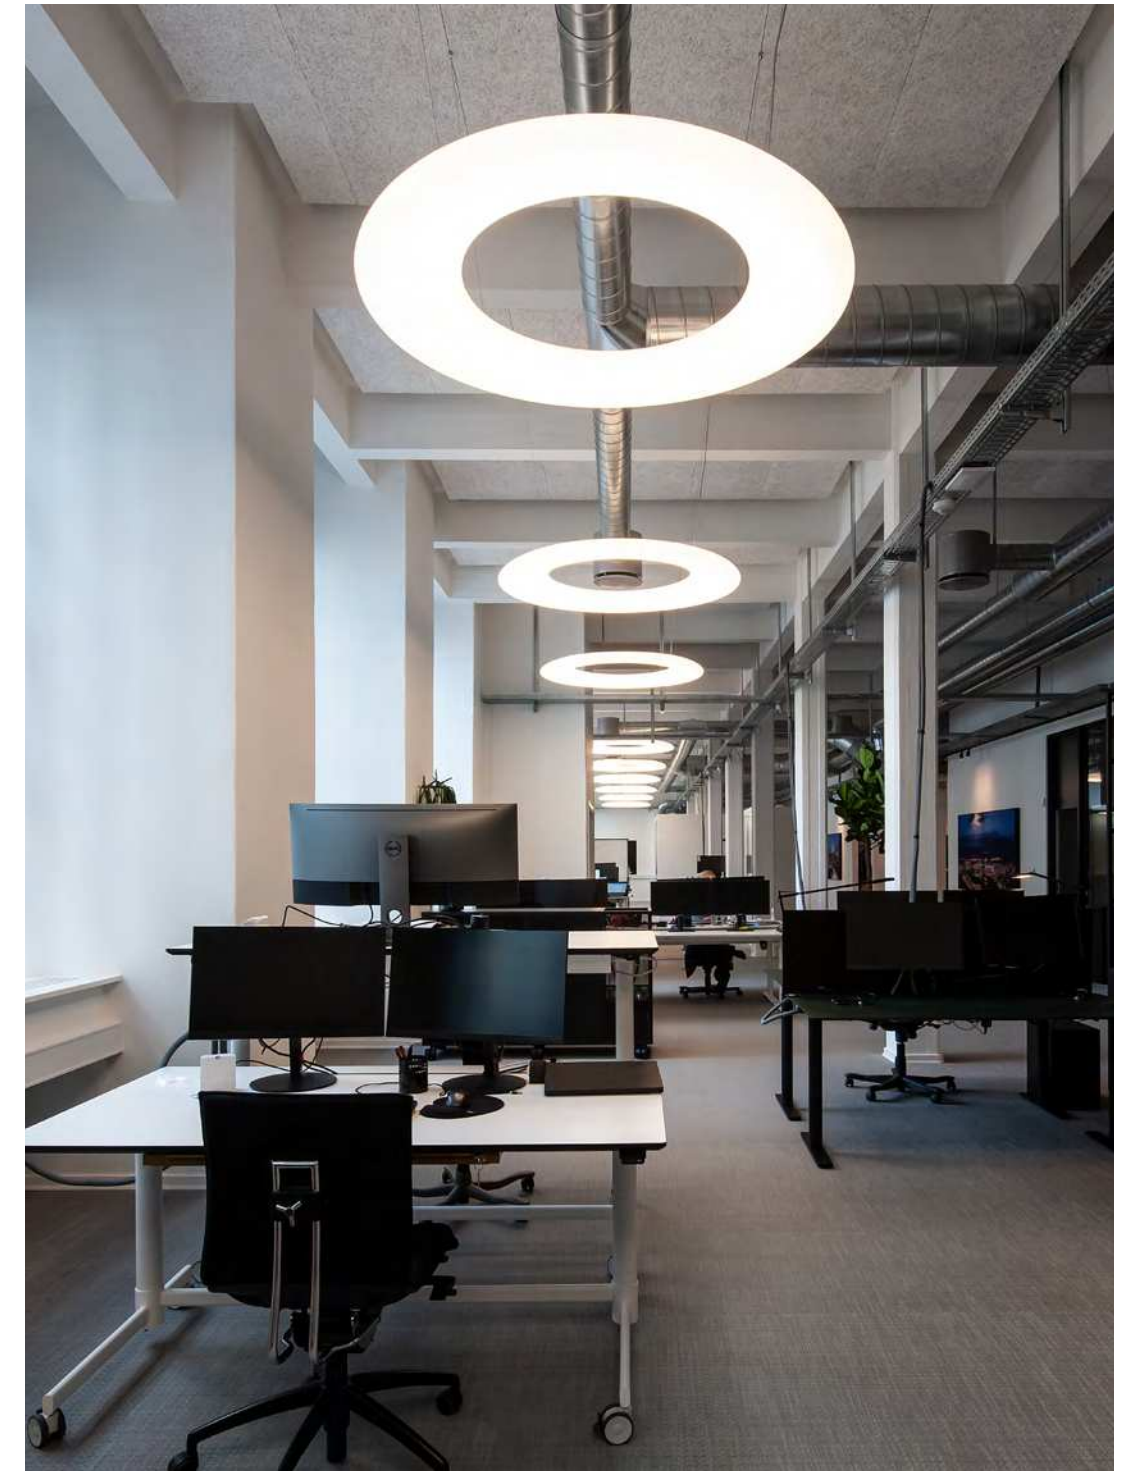

COLLIERS INTERNATIONAL | ARCHITECT HELLE NØHR | ANKER & CO COPENHAGEN | DENMARK



back

WALL RECESSED

476 — 489



WALL
RECESSED



RETO
479



LITO 1.0
481



LITO 2.0
481




STRIPE
483



STRANGE
485



THEMIS
487





ORIS
489



RETO

WALL RECESSED



0.8

LED PCB 3W | 350mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.27kg

66x66 40 4-40

3000K | >90 CRI | 130lm

	CODE
	345161W5
	345161B5

2.0

LED PCB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.41kg

47x182 40 4-40

3000K | >90 CRI | 490lm

	CODE
	345261W5
	345261B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
more options and specs on page 724	

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

ALWAYS USE

driver

	CODE
6W 350mA	90213202
more options and specs on page 724	

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042



specs on page 736





LITO

WALL RECESSED



1.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80/60K 0.09kg

70x70 35 min.12

3000K | >80 CRI | 145/200lm

	CODE
	145381W4
	145381A4
	145381B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 724

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in
combination with plasterkit

2.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80/60K 0.09kg

70x70 35 min.12

3000K | >80 CRI | 75/100lm

	CODE
	145481W4
	145481A4
	145481B4

ALWAYS USE

driver


	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 724

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119


recessed housing | always use in
combination with plasterkit





STRIPE

WALL RECESSED



0.4

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70/60K 0.09kg

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305451W4
	305451L4
	305451G4
	305451B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 736



0.7

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70/60K 0.10kg

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305551W4
	305551L4
	305551G4
	305551B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 736



2.2

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70/60K 0.27kg

25x170 40 8-18

3000K | >80 CRI | 17/27lm

	CODE
	305651W4
	305651L4
	305651G4
	305651B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 724

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012038

specs on page 736



1.7 | 2.7




1.7 | 2.7



STRANGE

WALL RECESSED



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.24kg

170x86 11.55 2-25

CODE			
			320771W_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver

CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 725



2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.31kg

270x86 11.55 2-25

CODE			
			320871W_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE


driver

CODE	
6W 500mA	90214201
6W 700mA	90215203



more options and specs on page 725



1.7 | 2.7



1.7 | 2.7



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.24kg

70x158 50 2-18

	CODE
	323771W_
	323771K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.31kg

70x258 50 2-18

	CODE
	323871W_
	323871K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver

	CODE
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 725

OPTIONAL

plasterkit

	CODE
	90017111

recessed housing incl. plasterkit

	CODE
	90012032

specs on page 734

ALWAYS USE

driver

	CODE
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 725

OPTIONAL

plasterkit

	CODE
	90017112

recessed housing incl. plasterkit


	CODE
	90012033

specs on page 734



ORIS

WALL RECESSED



0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.28kg

47x182 40° 12-40

3000K | >80 CRI | 55/80lm

	CODE
	327161W4
	327161B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 724

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 736



0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.15kg

66x66 40° 12-40

3000K | >80 CRI | 120/160lm

	CODE
	327461W4
	327461B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 724

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736



1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.34kg

115x117 40° 12-40

3000K | >80 CRI | 190/300lm

	CODE
	327661W4
	327661B4

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736

WALL
SURFACE
SPOTLIGHTS




ODREY 1.0
495



ODREY 2.0
497



RAY MINI
501



RAY
503



BOX MINI
509



BOX
511



DOCUS MINI
517



HEXO MINI
519



TRACE
521



TRAIN
525



CENTRAL
527



SARA SNOOZE
529



MATCH SNOOZE
533



MICK SNOOZE
535



MICK WALL 1.0
537


WALL
SURFACE
LUMINAIRES



LEENS
539



BENTO
541



DOMINO
543



SCAVA
545



DOT
547



FINLIN 1.0
551




FINLIN 4.0
551



CLEA
555



CLOCK
557



TAPIS
559




MILES ROUND
563




MILES CARRÉ
567



MILES 9.0
569



VENN
571



DARF
575

WALL
SURFACE
IP-RATED



MIRBA IP44
577



MIRBI LONG IP44
579

DESIGNER
FAMILIES



ROOMOR
37



MIRRO
59



DRO
75



WIRO
111



J.J.W.
119

WALL
SURFACE

490 — 579



MIX AND MATCH

weverducre.com/odrey-configurator



SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.


Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

CREATE YOUR VERY OWN ODREY ONLINE

MOUNTING + SHADES

MOUNTING

available in ● white, ● gold or ● black



1.0



2.0

SHADES

available in ● white, ● gold or ● black



3.0

ø 100



4.0

ø 124



5.0

ø 115




3.0 + 3.0
















4.0 + 4.0



5.0 + 5.0



back



WALL SURFACE










CAFE BREDA | NETHERLANDS

ODREY

WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.41kg

2.4


2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.50kg

2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.54kg

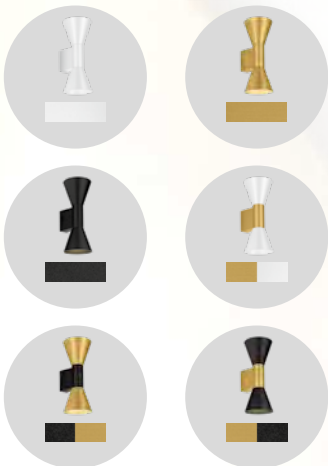

CODE	
387420WW0	
387420GG0	
387420BB0	
387420GW0	
387420BG0	
387420GB0	

CODE	
387520WW0	
387520GG0	
387520BB0	
387520GW0	
387520BG0	
387520GB0	

CODE	
387620WW0	
387620GG0	
387620BB0	
387620GW0	
387620BG0	
387620GB0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 731



MORE COMBINATIONS

weverducre.com/odrey-configurator



back


UNIVERSAL STARS

SIMPLE FORMALITY


Even if maths and angles were never your forte: You'll still love these four stunning geometric shapes. BOX, DOCUS, HEXO and RAY are hard to beat when it comes to elegance and flexibility. And it means they are suitable for almost any room situation. It doesn't matter whether you let them glitter from the ceiling or shine from the walls. As these simple, narrow luminaires do not just come in a great variety of colours, they are also available in many different finishes; including for outdoors. So, right from the entrance to your house, friends and family will experience that "Wow" effect. Who would have thought that geometry could be so illuminating?



BOX



DOCUS



HEXO



RAY



HAVE A LOOK

weverducre.com/universal-stars-configurator




Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in verschiedenen tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?





RAY mini

WALL SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.21kg


CODE	
	300220W0
	300220L0
	300220G0
	300220P0
	300220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 731



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.36kg

CODE	
	301220W0
	301220L0
	301220G0
	301220P0
	301220B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 731




RAY
WALL SURFACE



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted


IP20 0.62kg



1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.62kg



2.0 LED

2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.69kg

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0Q0
	3221G0P0
	3221G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K 250lm	9010G804

more lamps and specs on page 732

	CODE
	342168W_
	342168L_
	342168G_
	342168Q_
	342168P_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	440 >90	5
1800-2850K	400 >90	9


	CODE
	342148W_
	342148L_
	342148G_
	342148Q_
	342148P_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5
1800-2850K	2x200 >90	9




OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA

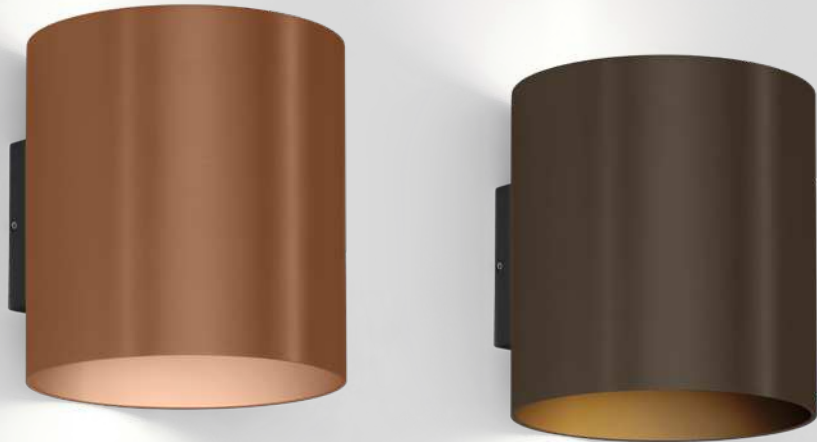

RAY

WALL SURFACE



4.0 LED


 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

 IP20  SDCM3  L70 | 50K 0.85kg

CODE	
	342248W
	342248L
	342248G
	342248Q
	342248P
	342248B

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5
1800-2850K	2x200 >90	9




231




377 | 389



411



599



633





BOX mini

WALL SURFACE

237

337

115

67

67

200

67

67

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕

IP20 0.24kg

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

more lamps and specs on page 731

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕

IP20 0.44kg

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

more lamps and specs on page 731


back

WEVER & DUCRÉ 508 — 509



BOX


WALL SURFACE



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted


IP20 0.66kg



1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.60kg



2.0 LED

2x LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.67kg

	CODE
	3211GOW0
	3211GOL0
	3211GOG0
	3211GOQ0
	3211GOP0
	3211GOB0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K 250lm	9010G804

more lamps and specs on page 732

	CODE
	341168W
	341168L
	341168G
	341168Q
	341168P
	341168B

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	440 >90	5
1800-2850K	400 >90	9

	CODE
	341148W
	341148L
	341148G
	341148Q
	341148P
	341148B

incl. adjustable flaps



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5
1800-2850K	2x200 >90	9





BOX

WALL SURFACE

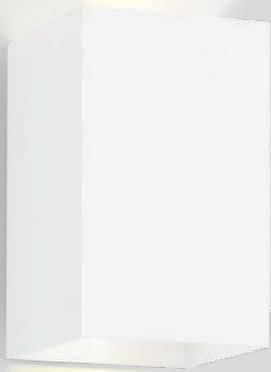

4.0 LED


LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L70|50K 0.86kg


CODE	
	341248W
	341248L
	341248G
	341248Q
	341248P
	341248B

incl. adjustable flaps


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5
1800-2850K	2x200 >90	9




239




413



605



653



PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 0.24kg

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

PAR16 6.5W | GU10 | phase-cut dim

		CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 731

WALL SURFACE

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 0.43kg

CODE	301320W0
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

PAR16 6.5W | GU10 | phase-cut dim



		CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 731





TRACE
WALL SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM3 180/50K 0.42kg

CODE	
333164W	
333164H	
333164CH	
333164B	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	564	>90	5

2.0


2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM3 180/50K 0.74kg

CODE	
333264W	
333264H	
333264CH	
333264B	



LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x500	>90	3
3000K	2x530	>90	5



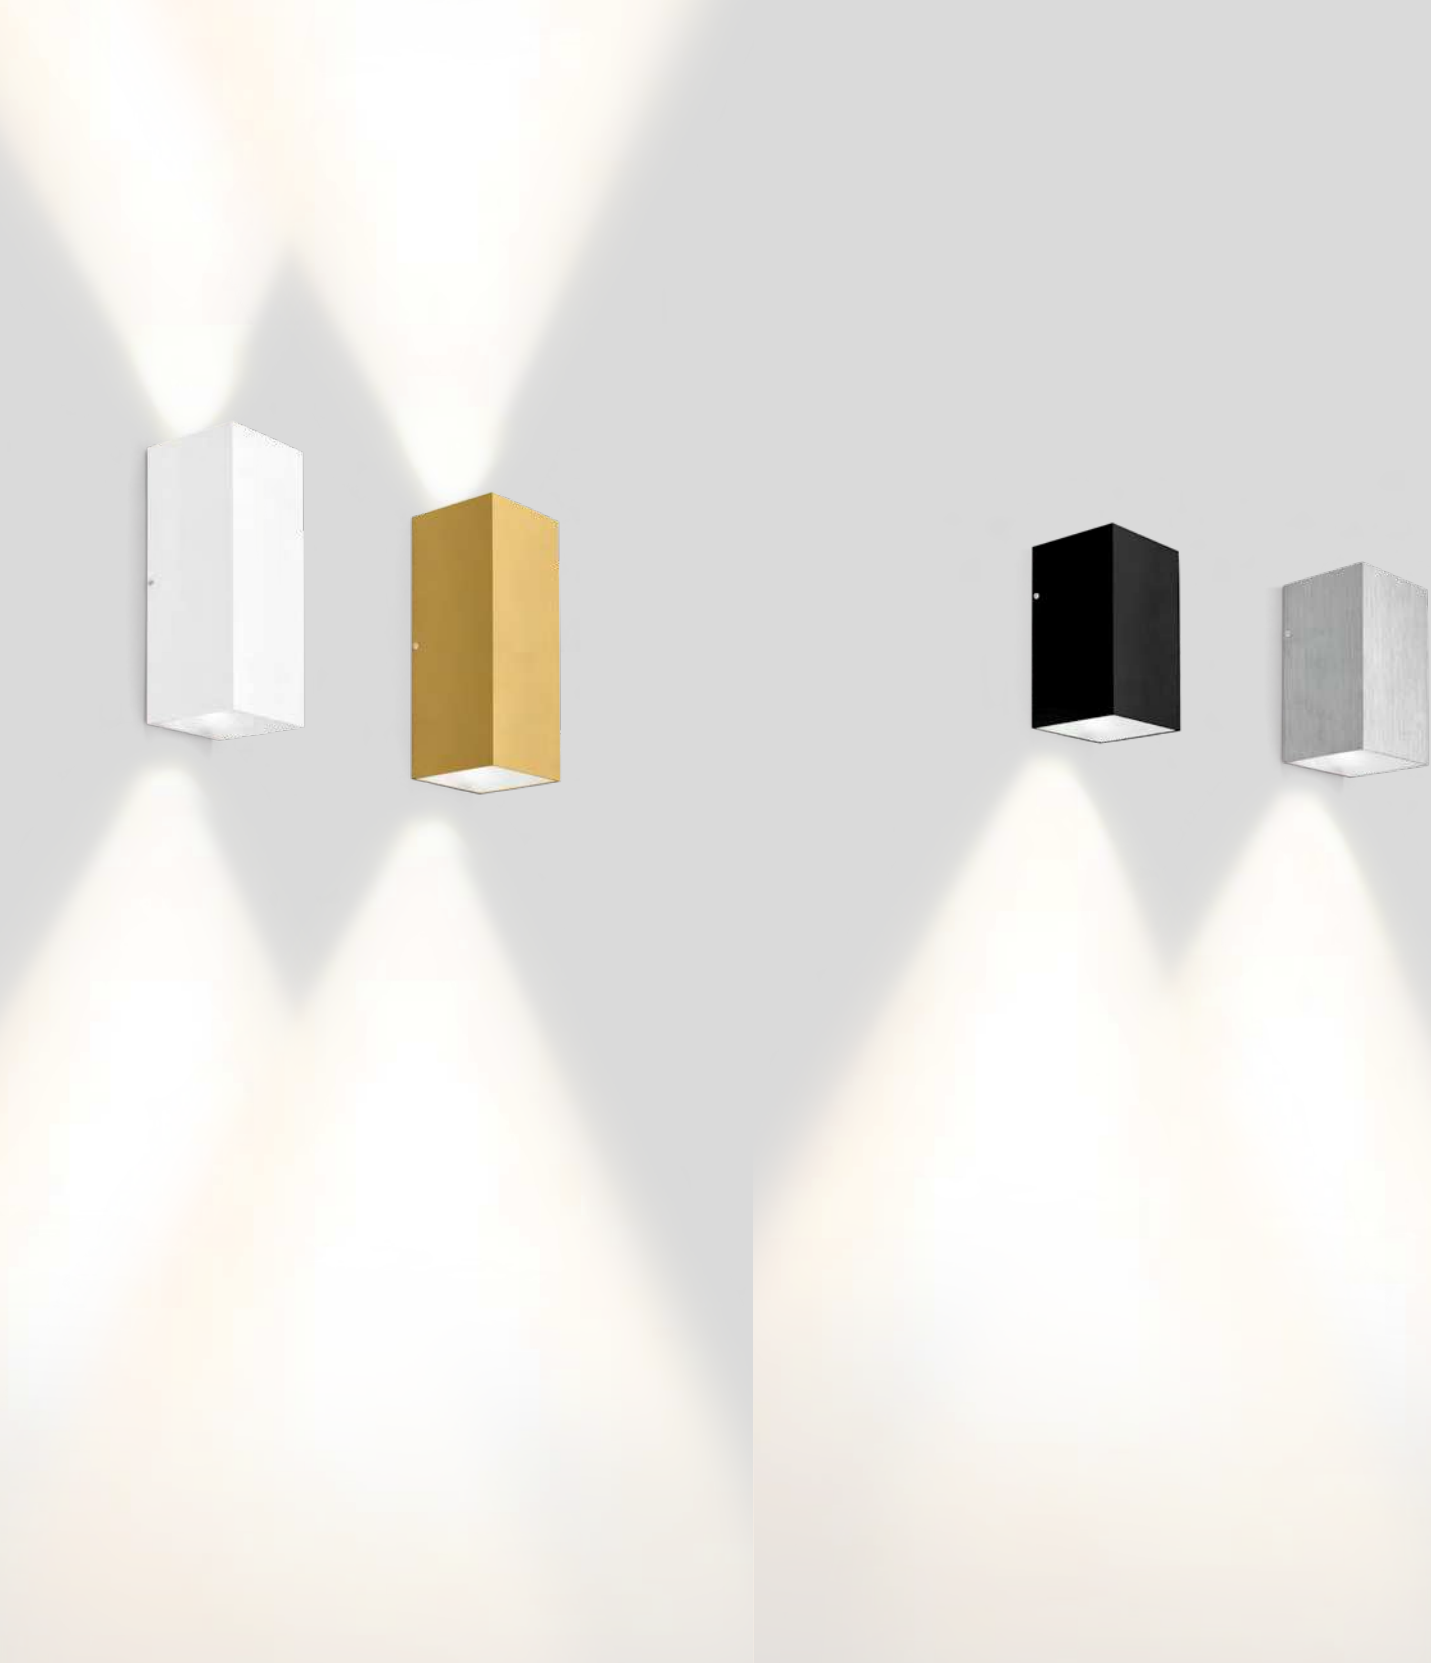

TRAIN

WALL SURFACE



1.0

 LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 ⚡ 36° SDCM3 L80|50K 0.24kg

2700K | >90 CRI | 390lm

CODE	
	306868W3
	306868G3
	306868B3

3000K | >90 CRI | 420lm

CODE	
	306868W5
	306868L5

2.0

 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted


⊕ IP20 ⚡ 36° SDCM3 L80|50K 0.35kg

2700K | >90 CRI | 2x245lm

CODE	
	306968W3
	306968G3
	306968B3

3000K | >90 CRI | 2x255lm


CODE	
	306968W5
	306968L5



601





635





CENTRAL

WALL SURFACE



1.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

 IP20 SDCM3 L80|60K 0.56kg

CODE	
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	520 >90	5

2.0

 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

 IP20 SDCM3 L80|60K 0.50kg

CODE	
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x270 >90	3
3000K	2x290 >90	5





HOTEL SALZBURG | AUSTRIA ALLEIN/RIEDEL



W




G



K




B




SARA snooze


WALL SURFACE



281



361



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

IP20 0°-90°/330° 0.33kg

CODE	
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.5W | GU10

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 731





MATCH snooze


WALL SURFACE




187



289



325



1.0

LED LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

⊕ IP20 0°-90°|350° ⚡ 25° SDCM2 L80|50K 0.24kg

CODE	
	177354W
	177354B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	330 >90	3
3000K	350 >90	5



MICK snooze


WALL SURFACE



reddot winner 2020
lighting design




DESIGN
AWARD
2021



295



331



1.0

LED LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off


⊕ IP20 0°-90°|350° ⚡ 18° SDCM2 L80|50K 0.39kg

		CODE
		159643J
		159643K

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	180	>90	3
3000K	200	>90	5




ETXE AUNDI JATETXEA | NORTH HOME STUDIO OÑATI | SPAIN

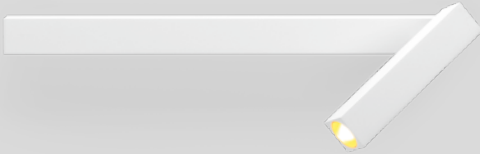


MICK
WALL SURFACE




reddot winner 2020
lighting design



295



331




1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.35kg

CODE		
159344J	159344K	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	225 >90	3
3000K	245 >90	5



2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated



IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

CODE		
159244J	159244K	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x225 >90	3
3000K	2x245 >90	5



LEENS
WALL SURFACE



1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L80/60K 1.11kg

3000K | >90 CRI | 425lm

CODE	
	311174W5
	311174L5
	311174B5



2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L80/60K 0.90kg

3000K | >90 CRI | 2x250lm

CODE	
	311274W5
	311274L5
	311274B5

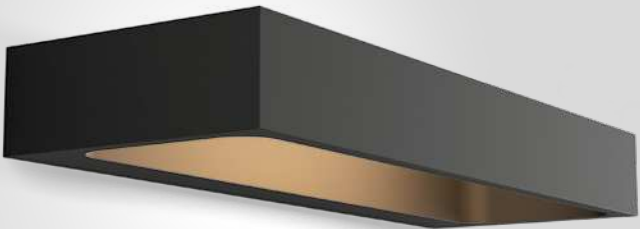


1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 270lm

	CODE
	309274W5
	309274B5



3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 1.48kg

3000K | >90 CRI | 270lm



	CODE
	309374W5
	309374B5



PRIVATE RESIDENCE BELGIUM

DOMINO

WALL SURFACE




1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 57° SDCM3 L80/50K 0.72kg

		CODE
		337174W
		337174B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1140 >80	2
3000K	1235 >80	4




back



PRIVATE RESIDENCE AUSTRIA

SCAVA
WALL SURFACE



1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PC cover

IP20 SDCM2 L80|50K 0.42kg

CODE	
	350188W
	350188K
	350188B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1880 >90	3
3000K	1960 >90	5






PRIVATE RESIDENCE ESTONIA



DOT

WALL SURFACE



2.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

 IP20 SDCM3 L80|50K 0.34kg

		CODE
		330164W_
		330164M_
		330164Q_
		330164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	420	>90	5

3.0

 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

 IP20 SDCM3 L80|50K 0.49kg

		CODE
		330264W_
		330264M_
		330264Q_
		330264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400	>90	3
3000K	2x420	>90	5

4.0

 3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

 IP20 SDCM3 L80|50K 0.67kg

		CODE
		330464W_
		330464M_
		330464Q_
		330464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x400	>90	3
3000K	3x420	>90	5






FINLIN
WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

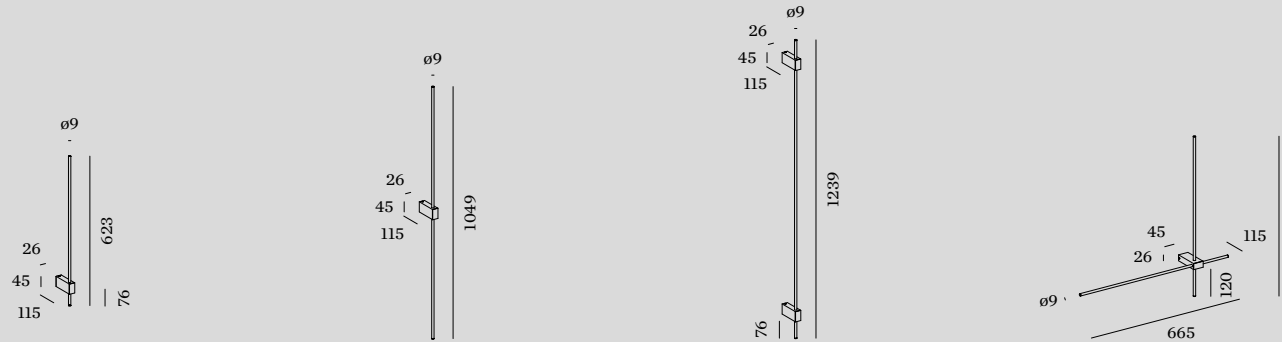

1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.15kg

CODE	
	370584K
	370584B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	380	>90	5

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.18kg

CODE	
	370684K
	370684B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.30kg

CODE	
	370784K
	370784B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5


4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.20kg

CODE	
	370884K
	370884B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5


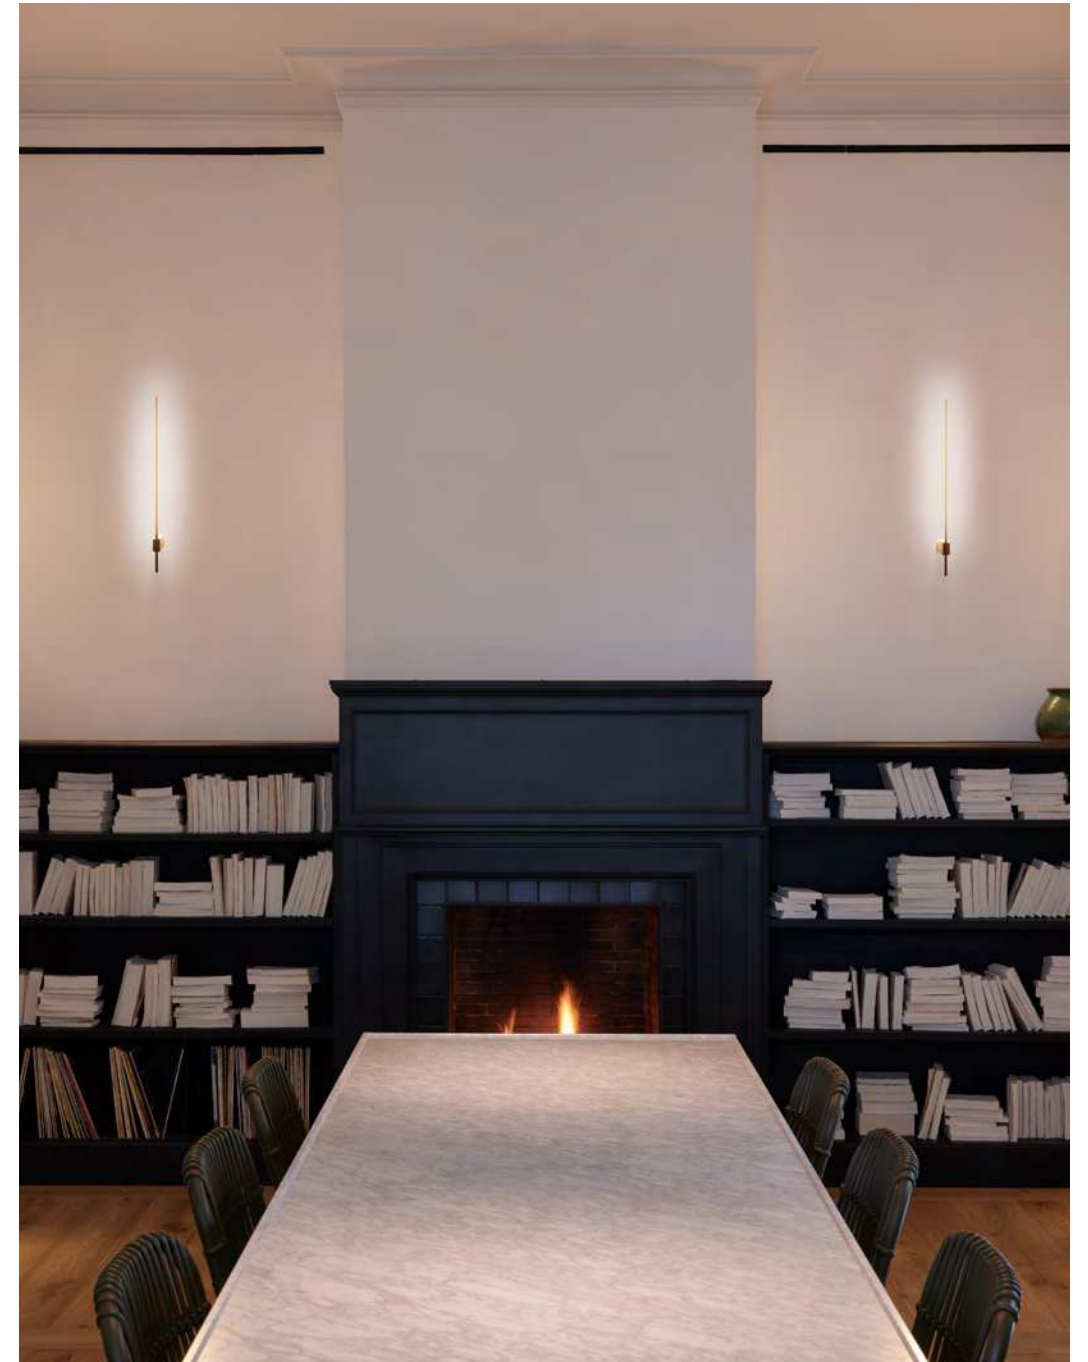


VILLA MAYFAIR BARCELONA | SPAIN



CLEA

WALL SURFACE

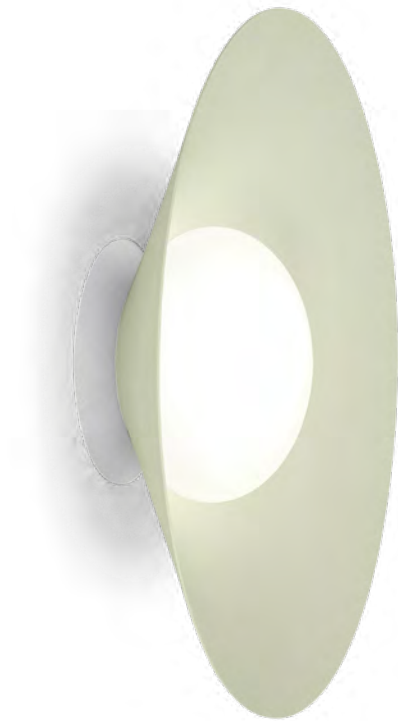


1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 0.78kg

CODE	
	181484W
	181484SG
	181484FJ
	181484B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5




2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 1.31kg

CODE	
	181584W
	181584SG
	181584FJ
	181584B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5



3.0


LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 2.09kg

CODE	
	181684W
	181684SG
	181684FJ
	181684B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	655	>90	5






1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

CODE			
182584B			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5




2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

CODE			
182684B			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5




3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

CODE			
182784B			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5




1.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

⊕ IP20 SDCM3 L80/50K 1.8kg

CODE			
	336164FJ_		
	336164MG_		
	336164PS_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5




2.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

⊕ IP20 SDCM3 L80/50K 1.95kg

CODE			
	336264FJ_		
	336264MG_		
	336264PS_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5



3.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

⊕ IP20 SDCM3 L80/50K 1.7kg

CODE			
	336364FJ_		
	336364MG_		
	336364PS_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5

TAPIS

WALL SURFACE







HOTEL VIENNA | AUSTRIA





MILES

WALL SURFACE



2.0 ROUND


LED LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.70kg | 1.24kg

3.0 ROUND

LED LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 1.07kg | 1.92kg



10mm cover
thickness
marble



5mm cover
thickness
aluminium

	CODE
	317578W_
	317578G_
	317578Q_
	317578P_
	317578B_
marble	317578MW_
marble	317578MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	525 >90	5

	CODE
	317778W_
	317778G_
	317778Q_
	317778P_
	317778B_
marble	317778MW_
marble	317778MB_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	525 >90	5





MILES


WALL SURFACE



2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted


IP20 SDCM2 L80|50K 1.01kg | 2.11kg




3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 1.56kg | 3.39kg



10mm cover
thickness
marble



5mm cover
thickness
aluminium

	CODE
	317478W_
	317478G_
	317478Q_
	317478P_
	317478B_
	marble 317478MW_
	marble 317478MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	525	>90	5


	CODE
	317678W_
	317678G_
	317678Q_
	317678P_
	317678B_
	marble 317678MW_
	marble 317678MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	525	>90	5



MILES


WALL SURFACE



9.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted


IP20 SDCM3 L80|50K 2.01kg



5mm cover
thickness
aluminium

CODE		
	317878W_	
	317878G_	
	317878B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1200 >90	3
3000K	1220 >90	5



12.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted



IP20 SDCM3 L80|50K 2.60kg

CODE		
	317978W_	
	317978G_	
	317978B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1560 >90	3
3000K	1580 >90	5



SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

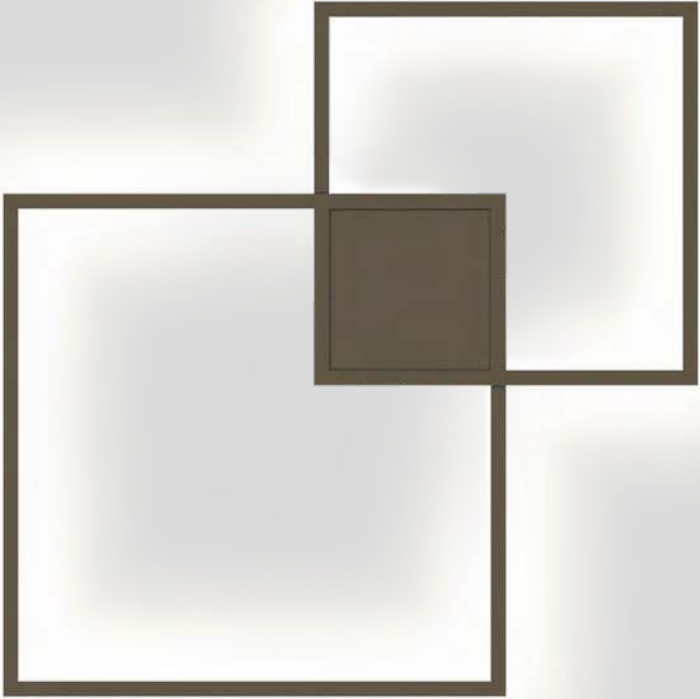


1.0

LED LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80|60K 2.50kg

CODE			
	149184W		
	149184Q		
	149184B		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4



2.0

LED LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80|60K 2.50kg

CODE			
	149284W		
	149284Q		
	149284B		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4




MORE OPTIONS
weverducre.com/venn-configurator

VENN


WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design








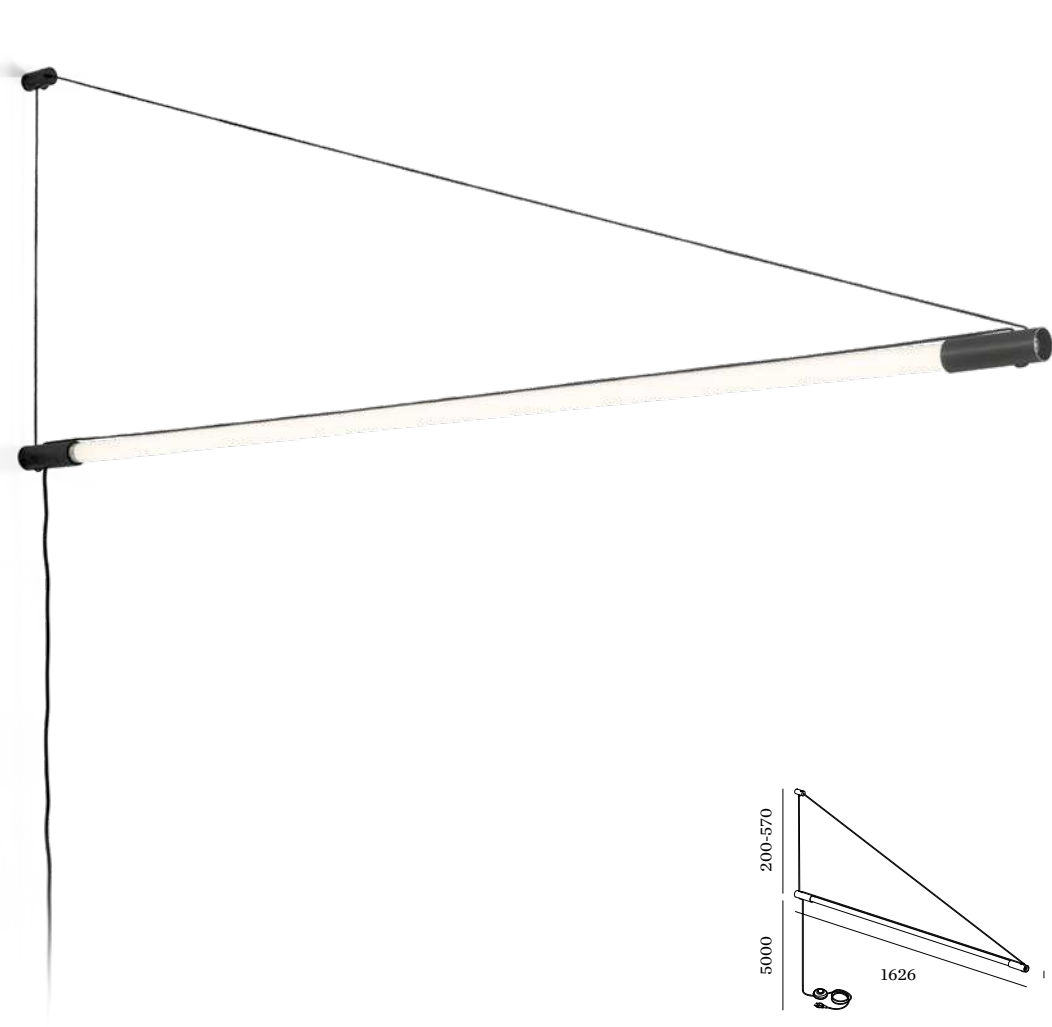

DARF

WALL SURFACE



1.1

LED LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
switch

IP20 SDCM5 L70|60K 0.33kg

3000K | >80 CRI | 3300lm

CODE

2563T7B4

4000K | >80 CRI | 3700lm

CODE

2563T7B6

1.2

LED LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
dimmer switch

IP20 SDCM5 L70|60K 0.33kg

2700K | >90 CRI | 1920lm

CODE


2563T8B3

3000K | >90 CRI | 2095lm


CODE

2563T8B5

project picture application
without cable



non-dim







phase-cut dim




RESTAURANT GOTHENBURG | SWEDEN

MIRBA IP44
WALL SURFACE



opal PMMA



E
black end cap
and black housing

1.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.51kg

CODE	
	328188W
	328188E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 560	>90	3
3000K	L 360/H 620	>90	5

2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.65kg

CODE	
	328288W
	328288E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 530/H 820	>90	3
3000K	L 590/H 900	>90	5


3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.69kg

CODE	
	328388W
	328388E

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 610/H 1050	>90	3
3000K	L 680/H 1150	>90	5



outside clear,
inside opal
PMMA

MIRBI long IP44


WALL SURFACE



223




313



1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


IP44 SDCM3 L70|50K 0.72kg



2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 1.53kg



3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 2.25kg

CODE			
			329188W

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 190/H 300	>90	3
3000K	L 210/H 330	>90	5

CODE			
			329288W

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 550	>90	3
3000K	L 365/H 620	>90	5

CODE			
			329388W

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 550/H 750	>90	3
3000K	L 610/H 840	>90	5

**OUT
DOOR**

CEILING RECESSED

582 — 589



CEILING
RECESSED



DEEP BIJOU IP65
585



DEEP IP65
585





TAI0 IP65
587



INTRA
589





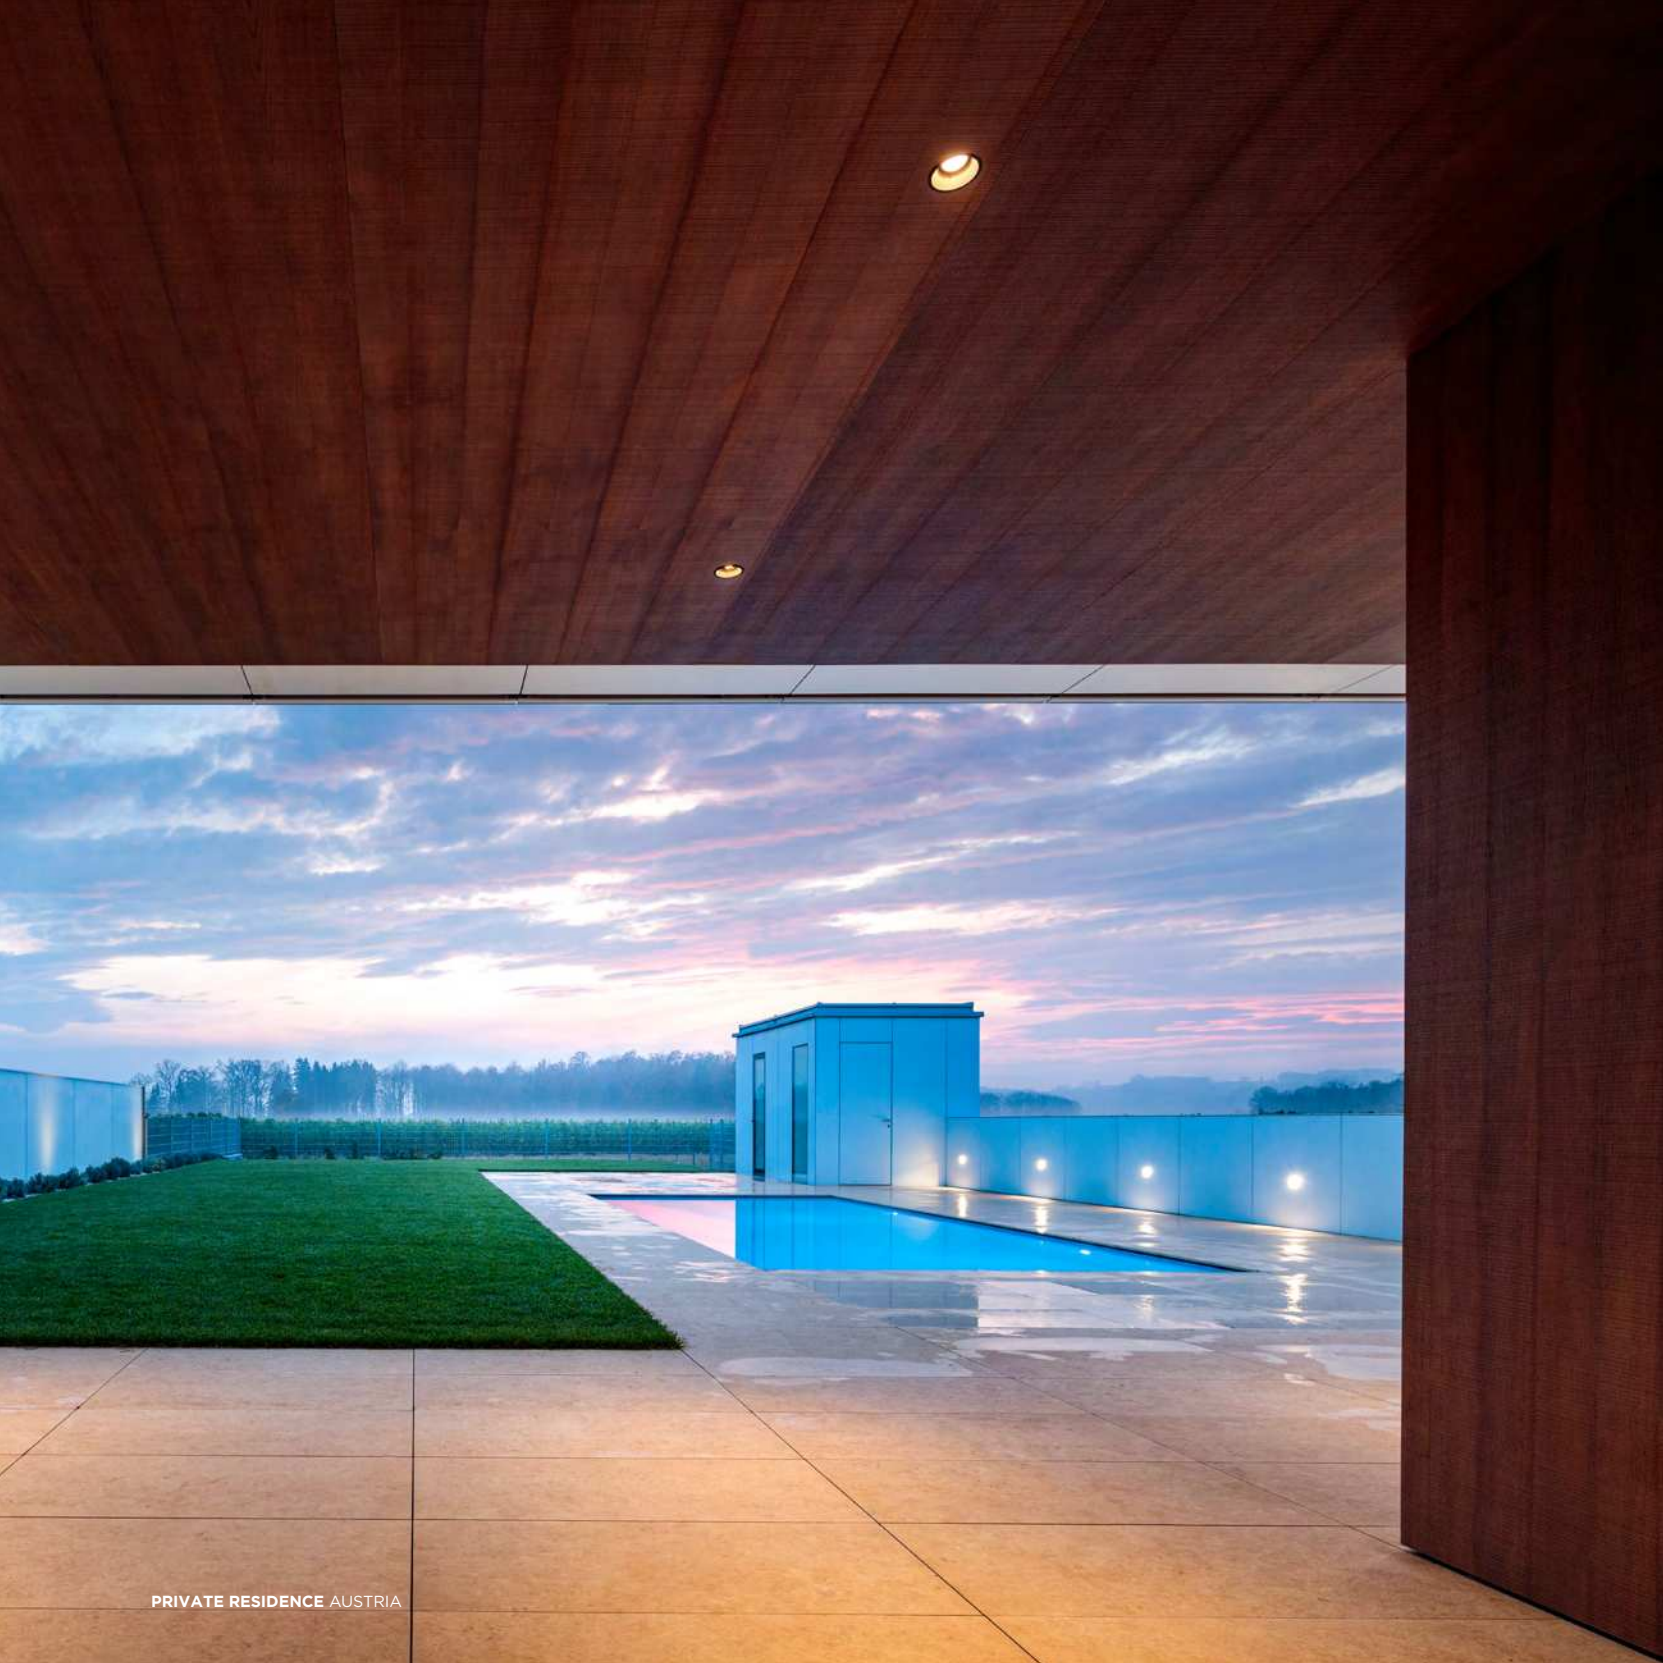

IC rated

DEEP bijou IP65 | DEEP IP65

OUTDOOR
CEILING RECESSED



1.0 BIJOU

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

ALWAYS USE

driver | IP67

	CODE
7W 500mA	90214301
more options and specs on page 724	

1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 80 min 4

	CODE
	184161W_
	184161B_

blade springs 86-89 80 min 4


	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | IP68

	CODE
17W 350mA	90213602
24W 500mA	90214702
more options and specs on page 724	




IC rated



back

TAIO IP65

OUTDOOR
CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 | 105° SDCM2 L80|50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W_
	180781G_
	180781B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	250/350 >90	3
3000K	270/380 >90	5

ALWAYS USE

driver | IP68

	CODE
17W 350mA	90213602
24W 500mA	90214702

more options and specs on page 724




213




311



597



631



1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 SDCM2 L70|60K 0.15kg


blade springs 76-79 70 8-25

3000K | CRI >90 | 350lm

	CODE
	733188W5
	733188A5
	733188B5

INTRA

OUTDOOR CEILING RECESSED



2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 38° SDCM3 L70|50K 0.15kg

blade springs 76-79 70 8-25

3000K | CRI >80 | 490lm

	CODE
	733268W4
	733268A4
	733268B4

CEILING
SURFACE
SPOTLIGHTS



TRAM
593



TUBE
595



TAIO
597



RAY
599



TRAIN
601



TUBE CARRÉ
603



BOX
605

CEILING
SURFACE
LUMINAIRES



ROB
609



BLAS 1.0
611



BLAS 2.0
611





PRIVATE RESIDENCE BELGIUM



TRAM
OUTDOOR
CEILING SURFACE




1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 490lm



	CODE
	747768W5
	747768A5
	747768Q5
	747768B5

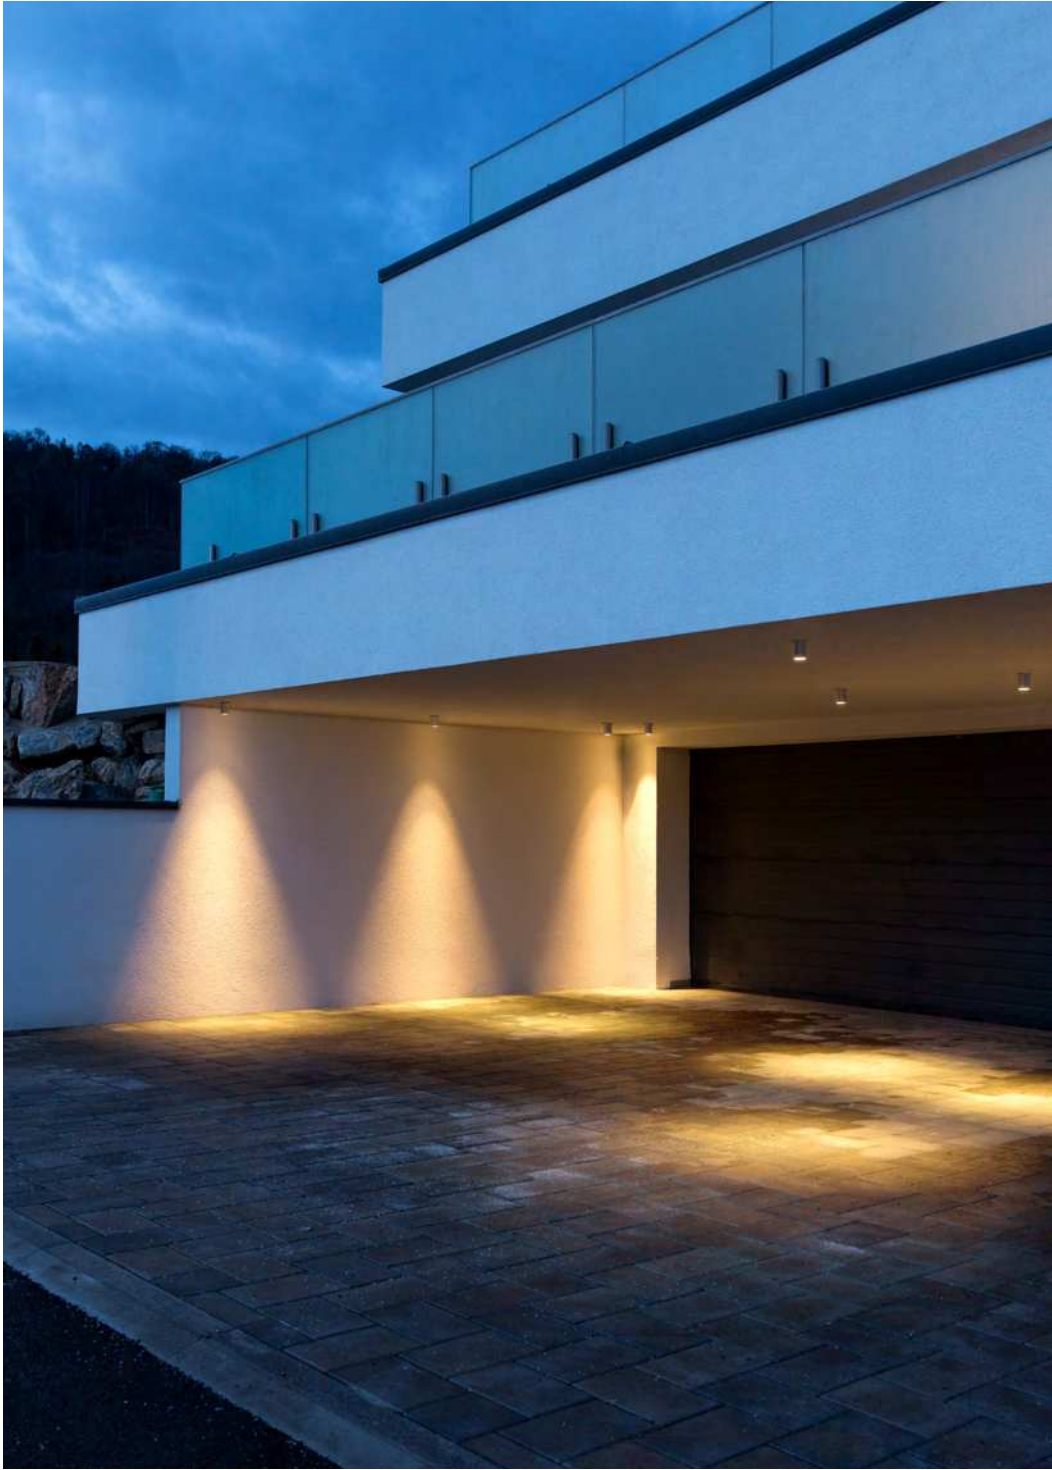

PRIVATE RESIDENCE AUSTRIA



TUBE
OUTDOOR
CEILING SURFACE



1.0 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.56kg

3000K | >90 CRI | 629lm

	CODE
	734364W5
	734364D5
	734364A5
	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	734120W0
	734120D0
	734120A0
	734120Q0
	734120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
 2700K 350lm	905227S2
 3000K 350lm	905227S4

more lamps and specs on page 731



reflector




back




PRIVATE RESIDENCE BELGIUM





TAIO
OUTDOOR
CEILING SURFACE




213



311



587



631

1.0

LED LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

⊕ IP65 ⚡ 105° SDCM2 L80/50K 0.55kg

	CODE
	180884W
	180884A
	180884Q
	180884B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	440	>90	5




back




RAY


OUTDOOR
CEILING SURFACE




231




377 | 389



411



ø114



503



inner cover

OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041A1
	911041B1


1.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

 IP65  32° SDCM2 L70|50K 0.63kg

	CODE
	735464W_
	735464D_
	735464A_
	735464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
2000-3000K	715 >95	9




633



PRIVATE RESIDENCE BELGIUM



TRAIN
OUTDOOR
CEILING SURFACE



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70 | 50K 0.26kg

3000K | >90 CRI | 490lm



CODE	
	718668W5
	718668A5
	718668Q5
	718668B5

back



TUBE CARRÉ

OUTDOOR
CEILING SURFACE



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.74kg

3000K | >90 CRI | 629lm

	CODE
	734464W5
	734464D5
	734464A5
	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg


	CODE
	734220W0
	734220D0
	734220A0
	734220Q0
	734220B0

OPTIONAL


PAR16 4.3W | GU10

	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 731



reflector



BOX

OUTDOOR
CEILING SURFACE





239




413



511



inner reflector



inner cover

OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 32° SDCM2 L70|50K 0.67kg

	CODE
	735264W_
	735264D_
	735264A_
	735264Q_
	735264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
2000-3000K	715 >95	9








ROB
OUTDOOR
CEILING SURFACE



305



1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

CODE			
701188W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1130	>90	3
3000K	1150	>90	5



CODE			
701288W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

CODE			
701388W			
LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5



BLAS

OUTDOOR
CEILING SURFACE



clear + frosted
glass

1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

	CODE
	736387W4
	736387B4

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

	CODE
	736487W4
	736487B4

WALL RECESSED

612 — 621

WALL
RECESSED



RETO 0.8
615



RETO 1.3
615



RETO 2.0
617



ORIS 0.7
619



ORIS 2.0
619



ORIS 0.8
621





ORIS 1.3
621





RETO

OUTDOOR
WALL RECESSED



0.8

LED PCB 6W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.27kg

66x66 40 4-40

3000K | >90 CRI | 105lm

	CODE
	745162A5
	745162Q5
	745162B5

1.3

LED PCB 6W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.43kg

115x117 40 4-40

3000K | >90 CRI | 145lm

	CODE
	745362A5
	745362Q5
	745362B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736



PRIVATE RESIDENCE AUSTRIA



A




Q



B

RETO

OUTDOOR
WALL RECESSED



2.0

LED PCB 10W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.41kg

47x182 40 4-40

3000K | >90 CRI | 505lm

	CODE
	745262A5
	745262Q5
	745262B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing


	CODE
	90012042

specs on page 736



ORIS

OUTDOOR WALL RECESSED



0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.28kg

47x182 40 12-40

3000K | >80 CRI | 55/80lm

	CODE
	709161W4
	709161D4
	709161B4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 724

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 736



2.0

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.42kg

115x185 40 12-40

3000K | >80 CRI | 190/300lm

	CODE
	709761W4
	709761D4
	709761B4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043


concrete housing

	CODE
	90012042

specs on page 736



PRIVATE RESIDENCE AUSTRIA




W




D



A





Q



B

ORIS
OUTDOOR
WALL RECESSED



0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.15kg

66x66 40 12-40

3000K | >80 CRI | 120/160lm

	CODE
	709461W4
	709461A4
	709461Q4
	709461B4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.34kg

115x117 40 12-40

3000K | >80 CRI | 190/300lm

	CODE
	709661W4
	709661D4
	709661A4
	709661Q4
	709661B4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736

WALL
SURFACE
SPOTLIGHTS



TRAM
625



TUBE 1.0
627



TUBE 2.0
629



TAIO
631



RAY
633



TRAIN
635



CENTRAL
639




STATION
641



TUBE CARRÉ 1.0
643



TUBE CARRÉ 2.0
645




BOX 1.0
649



BOX 3.0
653



BOXX
655



X-BEAM
657

WALL
SURFACE
LUMINAIRES



RETO
659



PALOS 1.0
661



PALOS 2.0
661



PALOS 3.0
661



TAPE
663



SWAM
665



GETTON 2.0
667



GETTON 3.0
667


WALL
SURFACE

622 — 667







PRIVATE RESIDENCE AUSTRIA





1.0



1.0



2.0



593

1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ⚡ 36° SDCM3 L70|50K 0.25kg

3000K | >90 CRI | 490lm

	CODE
	747568W5
	747568Q5
	747568A5
	747568B5


2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ⚡ 36° SDCM3 L70|50K 0.30kg

3000K | >90 CRI | 2x290lm

	CODE
	747668W5
	747668Q5
	747668A5
	747668B5



W



A



Q



B



back



TUBE
OUTDOOR
WALL SURFACE



W



D



A





Q



B



reflector



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.53kg

3000K | >90 CRI | 629lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL

PAR16 4.3W | GU10



	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 731



TUBE

OUTDOOR
WALL SURFACE



2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.88kg

3000K | >90 CRI | 2x629lm

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg



W



A



D



Q



B

CODE

	711464W5
	711464D5
	711464A5
	711464B5

CODE

	711220W0
	711220D0
	711220A0
	711220Q0
	711220B0

OPTIONAL

PAR16 4.3W | GU10


CODE

2700K 350lm	905227S2
3000K 350lm	905227S4


more lamps and specs on page 731




PRIVATE RESIDENCE BELGIUM





1.0



1.0



2.0



1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

IP65 105° SDCM2 L80/50K 0.48kg

CODE	
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	410 >90	3
3000K	440 >90	5

2.0

2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass


IP65 105° SDCM2 L80/50K 0.81kg

CODE	
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x410 >90	3
3000K	2x440 >90	5



RAY
OUTDOOR
WALL SURFACE



1.0


LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

CODE			
	749168W_		
	749168B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5



2.0


LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

CODE			
	749148W_		
	749148B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5



3.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

CODE			
	749268W_		
	749268B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5



4.0


LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg


CODE			
	749248W_		
	749248B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5



231




377 | 389



411



503



599




632 | 633




PRIVATE RESIDENCE | MOVING HOUSE | PILZARCHITEKTUR AUSTRIA


TRAIN
OUTDOOR
WALL SURFACE




1.0



1.0



2.0




1.0 NARROW

LED LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up or narrow down lens

⊕ IP65 ∠ 46°x5° SDCM3 L70|60K 0.24kg

3000K | >80 CRI | 120lm

	CODE
	718143D4
	718143B4




2.0 NARROW

LED 2x LED PCB 3W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up | narrow down lens

⊕ IP65 ∠ 46°x5° SDCM3 L70|60K 0.35kg

3000K | >80 CRI | 2x75lm

	CODE
	718243D4
	718243B4




1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ∠ 38° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 420lm

	CODE
	718868W5
	718868D5
	718868B5




2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated


⊕ IP65 ∠ 38° SDCM3 L70|50K 0.35kg

3000K | >90 CRI | 2x255lm

	CODE
	718968W5
	718968D5
	718968B5



525



601








PRIVATE RESIDENCE CZECH REPUBLIC





CENTRAL
OUTDOOR
WALL SURFACE

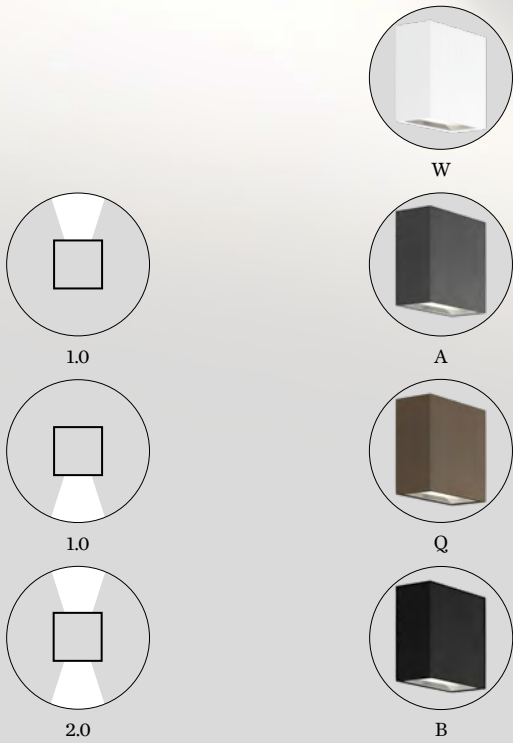

1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.58kg

3000K | >90 CRI | 520lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.52kg


3000K | >90 CRI | 2x290lm

	CODE
	313874W5
	313874A5
	313874Q5
	313874B5




STATION


OUTDOOR
WALL SURFACE




1.0



1.0





2.0



A



B



1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.54kg

3000K | >90 CRI | 520lm

	CODE
	314774A5
	314774B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated



IP65 SDCM3 L80/60K 0.52kg

3000K | >90 CRI | 2x290lm

	CODE
	314874A5
	314874B5



PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | TECLUX OY + SIGGE ARCHITECTS, ANTTI KORPI FINLAND



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP65 36° SDCM3 L80I60K 0.71kg

3000K | >90 CRI | 629lm

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.64kg

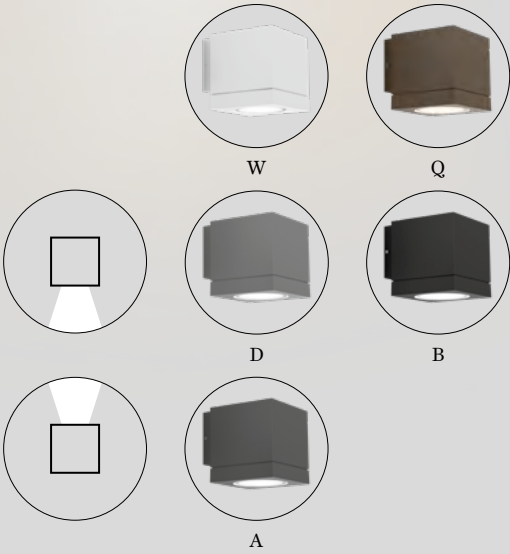

	CODE
	744364W5
	744364D5
	744364A5
	744364B5

	CODE
	744120W0
	744120D0
	744120A0
	744120Q0
	744120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4



more lamps and specs on page 731



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

OUTDOOR
WALL SURFACE



2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 1.13kg

3000K | >90 CRI | 2x629lm



W



Q



D



B



A

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.94kg

	CODE
	744220W0
	744220D0
	744220A0
	744220Q0
	744220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 731






PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM






BOX
OUTDOOR
WALL SURFACE



W



Q



D



B



A

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.60kg

	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	440 >90	5

2.0

2x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.66kg

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5





BOX


OUTDOOR
WALL SURFACE



3.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated


IP65 SDCM3 L70|50K 0.67kg




W



D



Q



B

	CODE
	748268W
	748268D
	748268Q
	748268B

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	440 >90	5

4.0




2x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

	CODE
	748248W
	748248D
	748248Q
	748248B

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x200 >90	3
3000K	2x220 >90	5






PRIVATE RESIDENCE | REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE




1.0

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.93kg



W




B

CODE	
	739174W_
	739174B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x495 >90	5





X-BEAM

OUTDOOR
WALL SURFACE




OPTIONAL

snoot




CODE

90019023




D



A



B



1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80l60K 1.19kg



3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4




PRIVATE RESIDENCE BELGIUM


RETO
OUTDOOR
WALL SURFACE




A



Q



B




1.3

 LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80|50K 0.63kg

3000K | >90 CRI | 210lm

	CODE
	745564A5
	745564Q5
	745564B5




2.0


 LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80|50K 0.65kg


3000K | >90 CRI | 490lm

	CODE
	745664A5
	745664Q5
	745664B5






1.0




2.0



3.0

PALOS

OUTDOOR
WALL SURFACE




1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

CODE			
	4161A4A		
	4161A4Q		
	4161A4B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	520	>80	4




2.0

2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.10kg

CODE			
	4162A4A		
	4162A4Q		
	4162A4B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>80	2
3000K	2x505	>80	4



3.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.98kg

CODE			
	4163A4A		
	4163A4Q		
	4163A4B		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>80	2
3000K	670	>80	4



PRIVATE RESIDENCE AUSTRIA


TAPE

OUTDOOR
WALL SURFACE







W




D



A



B



1.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM2 L80|60K 0.73kg

3000K | >90 CRI | 420lm

CODE

722174W5

722174D5

722174A5

722174B5



back

WEVER & DUCRÉ 662 – 663




711




SWAM

OUTDOOR
WALL SURFACE



1.0



2.0




Q



K



B




1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.95kg

2700K | >90 CRI | 210lm

CODE	
	746278Q3
	746278K3
	746278B3




2.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.95kg

2700K | >90 CRI | 350lm


CODE	
	746378Q3
	746378K3
	746378B3





PRIVATE RESIDENCE AUSTRIA

GETTON
OUTDOOR
WALL SURFACE

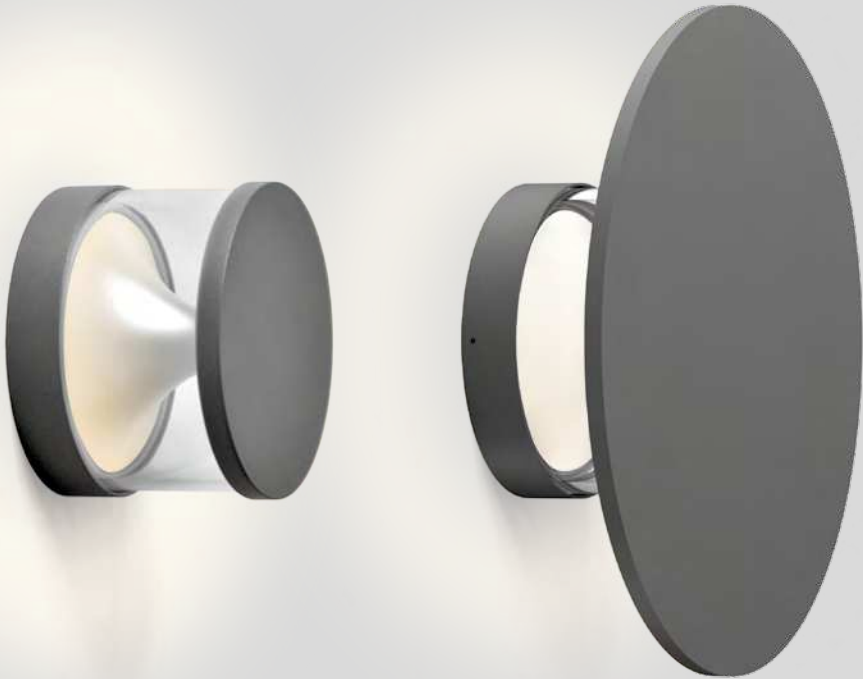


2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80/60K 0.83kg

3000K | >80 CRI | 755lm

CODE
717374A4




3.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80/60K 1.69kg

3000K | >80 CRI | 755lm

CODE
717774A4



FLOOR RECESSED

668 — 681

FLOOR
RECESSED



CARD 0.1
671



CARD 0.2
671



MAP
673



MAP ASYM
677




CHART
679



CHART ASYM
681





CARD

OUTDOOR
FLOOR RECESSED




0.1

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70/60K 0.05kg

3000K | >80 CRI | 70lm 22-24 60
CODE
750141I4



0.2

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70/60K 0.06kg

3000K | >80 CRI | 70lm 22-24 60
CODE
750241I4

ALWAYS USE

driver | IP66
CODE
3W | 350mA 90213101
more options and specs on page 724




ALWAYS USE

driver | IP66
CODE
3W | 350mA 90213101
more options and specs on page 724



MAP
OUTDOOR
FLOOR RECESSED



0.6


LED COB 5W
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.38kg

38-40 100

3000K | >80 CRI | 275lm

CODE
751168I4



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08g 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >80 CRI | 550lm

CODE
751268I4



1.2


LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.01kg

72-74 120

3000K | >80 CRI | 815lm

CODE
751368I4



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 41° SDCM2 L70|50K 1.01kg

91-93 185

3000K | >80 CRI | 1025lm

CODE
751468I4

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 737

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 737

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 737





PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED



1.2


LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.06kg

72-74 160

3000K | >80 CRI | 485lm

CODE
751558I4



1.6

LED LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.72kg

91-93 185

3000K | >80 CRI | 690lm

CODE
751658I4

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737

OPTIONAL

recessed ground housing

CODE
90012204


more options and specs on page 737





CHART

OUTDOOR
FLOOR RECESSED



0.6

LED COB 5W
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.39kg

38-40 118

3000K | >80 CRI | 275lm


CODE
752168I4

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 737



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >80 CRI | 550lm


CODE
752268I4

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 737



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.05kg

72-74 175

3000K | >80 CRI | 815lm


CODE
752368I4

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 41° SDCM2 L70|50K 1.05kg

91-93 185

3000K | >80 CRI | 1025lm

CODE
752468I4

OPTIONAL

recessed ground housing


CODE
90012204

more options and specs on page 737



CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.10kg

72-74 160

3000K | >80 CRI | 485lm


CODE
752558I4

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.83kg

91-93 185

3000K | >80 CRI | 690lm

CODE
752658I4

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 737



FLOOR
SURFACE
PROJECTOR



STIPO 1.0
685



STIPO 4.0
685



STAKE
687



STAKE FOLD
687



X-BEAM
689

FLOOR
SURFACE
BOLLARD



SWAM
691



PACE
695



LINUS
697



PALOS ROUND 1.0
699



PALOS CARRÉ 2.0
701



FIFTY FIFTY
703



SWAY
705



GETTON
707



PALLUZ
709



TAPE
711

FLOOR
SURFACE
LUMINAIRES



COSTA 1.0
713



COSTA 1.0
713



COSTA 2.0
715




COSTA 2.0
715





STIPO
OUTDOOR
FLOOR PROJECTOR




1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.59kg

3000K | >90 CRI | 450lm

	CODE
	737168A5
	737168Q5




2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.56kg

3000K | >90 CRI | 500lm

	CODE
	737268A5
	737268Q5



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.53kg

3000K | >90 CRI | 450lm

	CODE
	737368A5
	737368Q5

ALWAYS USE

pole

	CODE
200	910062A0
200	910062Q0
400	910064A0
400	910064Q0
600	910066A0
600	910066Q0

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746

OPTIONAL

ground spike

	CODE
	90013106


specs on page 746

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746



4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.52kg

3000K | >90 CRI | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

	CODE
200	910062A0
200	910062Q0
400	910064A0
400	910064Q0
600	910066A0
600	910066Q0

order spike separately


OPTIONAL

ground spike

	CODE
	90013106

specs on page 746






snoot

STAKE | STAKE FOLD

OUTDOOR
FLOOR PROJECTOR



1.0 STAKE

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80l60K 0.53kg

3000K | >90 CRI | 395lm

	CODE
	727174A5
	727174B5

OPTIONAL


ground spike

	CODE
	90013106

snoot

	CODE
	90019004

specs on page 743



1.0 STAKE FOLD

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80l60K 0.79kg

3000K | >90 CRI | 395lm

	CODE
	727274A5
	727274B5

OPTIONAL

ground spike

	CODE
	90013107

snoot

	CODE
	90019004


specs on page 743





X-BEAM

OUTDOOR FLOOR PROJECTOR



1.0

 LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 0-110°  120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4

OPTIONAL


ground spike

	CODE
	90013115


snoot

	CODE
	90019023


specs on page 743



snoot



back




657





SWAM

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

2700K | >90 CRI | 170lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike


	CODE
400	910090Q0
400	910090B0
600	910091Q0
600	910091B0
800	910092Q0
800	910092B0

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 746



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

2700K | >90 CRI | 170lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093Q0
400	910093B0
600	910094Q0
600	910094B0
800	910095Q0
800	910095B0

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 746




HOTEL BRITANNIA | S-CONSULTANCY KNOCKE-HEIST | BELGIUM





PACE

OUTDOOR FLOOR SURFACE



4.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80/60K 1.01kg

3000K | >90 CRI | 360lm


	CODE
	723174D5
	723174B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746



6.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80/60K 1.27kg

3000K | >90 CRI | 360lm


	CODE
	723274D5
	723274B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746



8.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80/60K 1.56kg

3000K | >90 CRI | 360lm

	CODE
	723374D5
	723374B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746






PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN



OPTIONAL

ground spike	
	CODE
	90013103
ground fixation	
	CODE
	90013302
specs on page 746	



1.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 1.12kg

3000K | >80 CRI | 230lm


	CODE
	726178D4
	726178A4
	726178Q4

ALWAYS USE

pole	
	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



2.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
PMMA diffuser

IP65 SDCM2 L70|50K 1.10kg

3000K | >80 CRI | 235lm


	CODE
	726288D4
	726288A4
	726288Q4

ALWAYS USE

pole	
	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 0.69kg

3000K | >80 CRI | 230lm

	CODE
	726378D4
	726378A4
	726378Q4

ALWAYS USE

pole	
	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q


order spike or fixation separately





PALOS ROUND

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.70kg

	CODE
	4166A4A
	4166A4Q
	4166A4B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >80	2
3000K	580 >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.70kg

	CODE
	4166A4A
	4166A4Q
	4166A4B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >80	2
3000K	580 >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.16kg

	CODE
	4167A4A
	4167A4Q
	4167A4B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x550 >80	2
3000K	2x590 >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.16kg

	CODE
	4167A4A
	4167A4Q
	4167A4B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x550 >80	2
3000K	2x590 >80	4

ALWAYS USE

pole with concrete fixation


	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B






URBANIZACIÓN SANTA ÀGUEDA | ALONSO + SOSA ARCHITECTS | RAFAEL GAVIRA Y EMILIO PELLEJERO
LAS PALMAS | SPAIN




1.0



2.0

PALOS CARRÉ

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.65kg

	CODE
	4164A4A
	4164A4Q
	4164A4B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>80	2
3000K	580	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.65kg

	CODE
	4164A4A
	4164A4Q
	4164A4B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>80	2
3000K	580	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

	CODE
	4165A4A
	4165A4Q
	4165A4B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>80	2
3000K	2x590	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

	CODE
	4165A4A
	4165A4Q
	4165A4B


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>80	2
3000K	2x590	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



661



back




PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA



FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80/60K 1.23kg

3000K | >80 CRI | 310lm


CODE	
	756174D4
	756174A4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	D
	A



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80/60K 1.23kg

3000K | >80 CRI | 310lm

CODE	
	756174D4
	756174A4


ALWAYS USE

pole with concrete fixation

CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	D
	A





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.36kg

3000K | >80 CRI | 445lm


	CODE
	720374D4
	720374A4
	720374Q4

ALWAYS USE

pole with fixation plate

	CODE
pole 170	910013_0
pole 270	910014_0
pole 470	910016_0
pole 670	910018_0
pole 870	910010_0

	CODE
	D
	A
	Q



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.36kg

3000K | >80 CRI | 445lm


	CODE
	720374D4
	720374A4
	720374Q4

ALWAYS USE

pole with concrete fixation

	CODE
pole 170	910073_0
pole 270	910074_0
pole 470	910076_0
pole 670	910078_0
pole 870	910070_0

	CODE
	D
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.21kg

3000K | >80 CRI | 2x445lm


	CODE
	720474D4
	720474A4
	720474Q4

ALWAYS USE

pole with fixation plate

	CODE
pole 170	910013_0
pole 270	910014_0
pole 470	910016_0
pole 670	910018_0
pole 870	910010_0

	CODE
	D
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.21kg

3000K | >80 CRI | 2x445lm

	CODE
	720474D4
	720474A4
	720474Q4

ALWAYS USE

pole with concrete fixation

	CODE
pole 170	910073_0
pole 270	910074_0
pole 470	910076_0
pole 670	910078_0
pole 870	910070_0


	CODE
	D
	A
	Q





GETTON

OUTDOOR
FLOOR SURFACE



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
aluminium reflector | clear glass

IP65 SDCM3 L80/60K 1.21kg

3000K | >80 CRI | 755lm

CODE
717674A4

ALWAYS USE

pole

CODE
275 910052A0
475 910054A0
675 910058A0


order spike separately

OPTIONAL

ground spike



CODE
90013101

specs on page 746





PALLUZ
OUTDOOR
FLOOR SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass

IP65 SDCM3 L80|60K 2.13kg

3000K | >80 CRI | 510lm

CODE	
	724384D4

ALWAYS USE

pole

CODE	
100	910033D0
470	910036D0
670	910038D0

OPTIONAL

ground fixation | pole 100 | 470 | 670

CODE	
	90013303

specs on page 746

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 2.14kg

3000K | >80 CRI | 560lm

CODE	
	724474D4

ALWAYS USE

pole

CODE	
100	910033D0
470	910036D0
670	910038D0

OPTIONAL

ground fixation | pole 100 | 470 | 670


CODE	
	90013303

specs on page 746





TAPE
OUTDOOR
FLOOR SURFACE



4.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.82kg

3000K | >90 CRI | 420lm


CODE
722274D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746



6.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 2.42kg

3000K | >90 CRI | 420lm


CODE
722374D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746



8.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 3.12kg

3000K | >90 CRI | 420lm


CODE
722474D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746





colour change
via push button



1.0 yellow



1.0 orange



1.0 light blue



1.0 black



1.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.00kg

handle colour


	CODE
	865186YE9
	865186OR9
	865186SB9
	865186OB9



OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

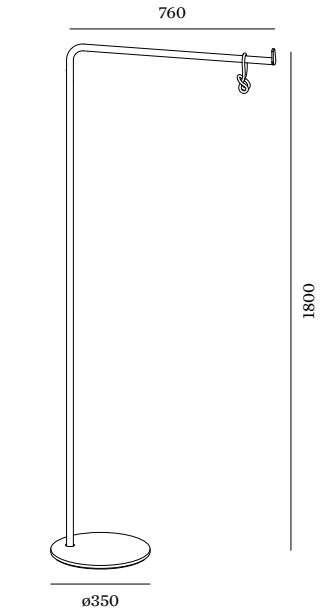

OPTIONAL

inox pole powder coated

	CODE
	90056001






HOTEL YURBBAN BARCELONA | SPAIN



colour change
via push button




2.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80/60K 1.10kg


handle colour		CODE
		865286YE9
		865286OR9
		865286SB9
		865286B9



OPTIONAL

2.0 rope


		CODE
		90057192
		90057191
		90057193
		90057190



OPTIONAL

2.1 cage

		CODE
		90057182
		90057181
		90057183
		90057180

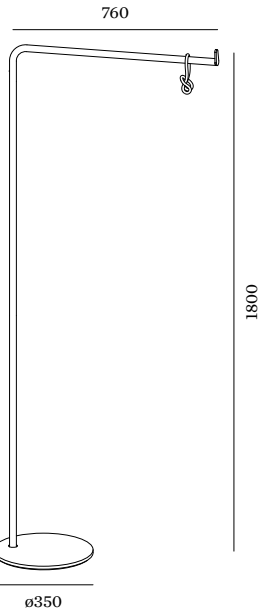

OPTIONAL


inox pole powder coated	CODE
	90056001





TECH
NICAL

IF YOU ARE WEARING RED, SHAKE YOUR HEAD




CRI 80+

AREA OF APPLICATION

Offices and restaurants
for average use

ANWENDUNGSBEREICH

*Büro und Restaurants mit
durchschnittlichen Anwendungen*



CRI 90+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDUNGSBEREICH

*Privaträume, Büros
und Verkaufsbereiche*




CRI 95+

AREA OF APPLICATION


Museums, galleries, fine dining,
and exclusive products in stores

ANWENDUNGSBEREICH


*Museen, Gallerien, exquisites Essen und
Qualitätsprodukte in Shops*

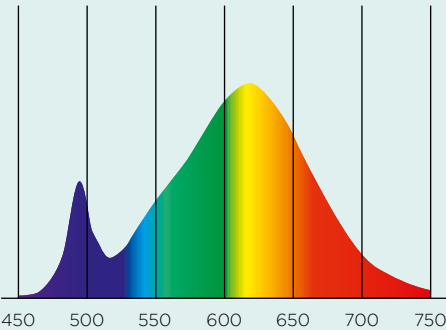

Wavelength (nm) / Wellenlänge (nm)

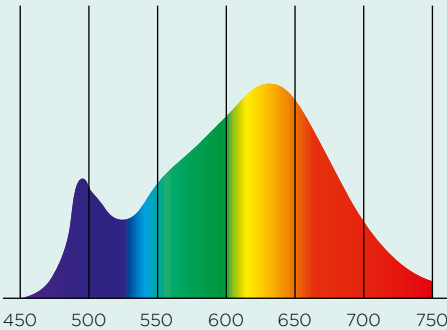

Wavelength (nm) / Wellenlänge (nm)

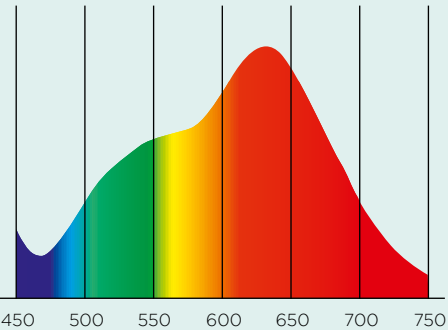

Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, measures the ability of an artificial light to accurately reproduce colours. The higher this value – and 100 CRI would be possible in theory – the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC


What sets a romantic mood faster than tea lights? That's right – our selection of dimming variants that easily control the light intensity. Not just with analogue dimming, but also digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via phase-cut dim is the perfect solution for you. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Don't forget to get two more cables and keep an eye on the correct polarity. Or keep things completely care-free and cable-free via Bluetooth. Simply install the Bluetooth dimmer, download the app and off you go.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere verschiedenen Dimming-Varianten, mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer phase-cut dim die perfekte Lösung für Sie. Alles, was Sie dafür brachen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten. Oder komplett sorgen- und kabelfrei via Bluetooth. Hier einfach den Bluetooth Dimmer einbauen, die App downloaden und schon geht's los.


PHASE-CUT DIM

Triac (Analogue)




1-10V DIM

Analogue




DALI DIM

Digital




BLUETOOTH

Digital



more specs on page 729

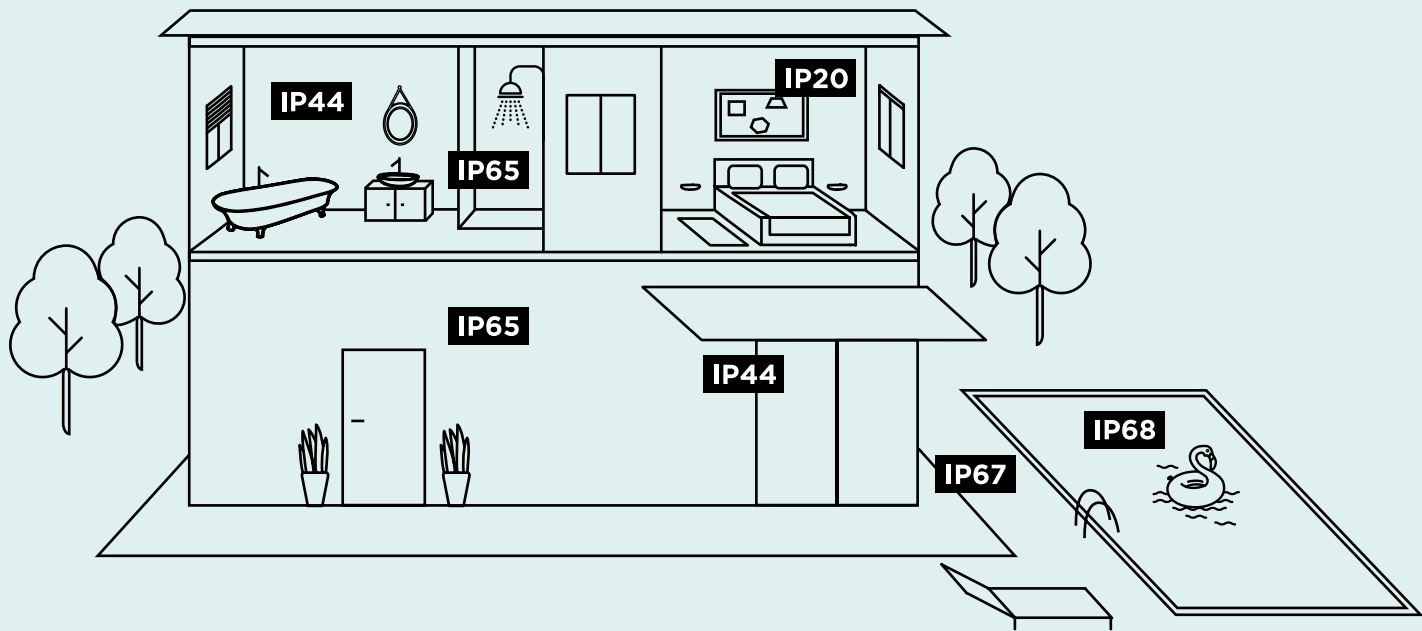

GENERAL INFORMATION

We advise having the lighting devices installed by a qualified electrician only. If the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.


SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against solids

Schutz gegen Festkörper



No protection
Kein Schutz



Protected against solid
objects over 50 mm Ø
*Geschützt vor festen
Gegenständen über 50 mm Ø*



Protected against solid
objects over 12 mm Ø
*Geschützt vor festen
Gegenständen über 12 mm Ø*



Protected against solid
objects over 2.5mm Ø
*Geschützt vor festen
Gegenständen über 2,5mm Ø*



Protected against solid
objects over 1.0 mm Ø
*Geschützt vor festen
Gegenständen über 1,0 mm Ø*



Dust-proof
Staubgeschützt



Dust-tight
Staubdicht

SECOND DIGIT

Protection against liquids

Schutz gegen Flüssigkeiten



No protection
Kein Wasserschutz



Protected against vertically
dripping water
*Geschützt vor senkrecht
fallendem Tropfwasser*



Protected against water
dripping at an angle (up to 15°)
*Geschützt vor schräg fallen-
dem Tropfwasser (bis 15°)*



Protected against
spraying water
*Geschützt vor
Sprühwasser*



Protected against water
splashing from all
directions
*Geschützt vor Spritzwasser
aus allen Richtungen*



Protected against
water jets
*Geschützt vor
Strahlwasser*



Protected against
strong water jets
*Geschützt vor starkem
Strahlwasser*



Protected against
penetrating water when
temporarily immersed
*Geschützt vor eindringendem
Wasser beim kurzzeitigen
Eintauchen*



Protected against penetrating
water when submerged
*Geschützt vor eindringendem
Wasser beim Untertauchen*

DRIVER 250mA 10W DIM

10W | preset at 250mA | 16-29V
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 125x41x23
☐ IP20 0.094kg **CE** 

DEEP BIJOU 1.0

CODE
90226401

DRIVER 250mA 10W DALI

10W | 250mA | 6-40V | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
☐ IP20 0.08kg **CE** 

DEEP BIJOU 1.0, 2.0

CODE
90249402

DRIVER 250mA 15W DIM

15W | preset at 250mA | 26-42V |
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.096kg **CE** 

DEEP BIJOU 2.0

CODE
90226501

DRIVER 350mA 3W IP66

3W | 350mA | 3-15V
Driver 90-264VAC | 50-60Hz
L/W/H 52x30x23
☐ IP66 0.05kg **CE**  

ORIS 0.7, 0.8, 1.3, 2.0 | **CARD**

CODE
90213101

DRIVER 350mA 17W IP68

17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
☐ IP68 0.25kg **CE** 

DEEP IP65 | **TAIO**

CODE
90213602

DRIVER 350mA 20W DALI

20W | 350mA | 3-45V | DALI DT6 –
push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
☐ IP20 0.16kg **CE** 

PLANO PETIT 2.0

CODE
90243602

DRIVER 350mA 30W

30W | 350mA | 43-86V
220-240VAC | 50-60Hz
L/W/H 127x43x30
☐ IP20 0.15kg **CE** 

CODE
90213701

DRIVER 350/500/700mA
17-32W DIM

350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz
L/W/H 166x46x34
☐ IP20 0.19kg **CE** 

CODE
90228801

DRIVER 350mA 4W

4W | 350mA | 4-12V
100-240VAC | 50-60Hz
L/W/H 53x27x22
☐ IP20 0.05kg **CE**  

DRIVER 350mA 6W

6W | 350mA | 3-22V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg **CE**  

LITO | ORIS 0.7, 0.8, 1.3 | **STRIPE**
RETO indoor

DRIVER 350mA 7W IP67

7W | 350mA | 10-20V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.05kg **CE** 

DRIVER 350mA 10W
1-10V DIM

10W | 350mA | 14-28V | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 

DEEP PETIT | **DEEP ADJUST**
PETIT | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0

CODE
90223401

DRIVER 350/500/700mA
17.5-20W

350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 

DEEP ADJUST 2.0 | **PLANO**
PETIT 2.0 | **RON** 2.0 | **STRANGE**
PETIT 2.0 | **STRANGE** 2.0 | **SNEAK**
TRIM 2.0 | **SNEAK TRIMLESS** 2.0

CODE
90218601

DRIVER 500mA 6W

6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg **CE**  

THEMIS | **STRANGE** wall
LITO

CODE
90214201

DRIVER 500mA 6.5W DIM

6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.07kg **CE** 

DEEP BIJOU IP65 | **PIRRO** 1.0

CODE
90224301

DRIVER 500mA 7W IP67

7W | 500mA | 5-14.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.15kg **CE** 

DEEP BIJOU IP65 | **ORIS** 0.7, 0.8,
1.3, 2.0

CODE
90214301

DRIVER 350mA 10W DALI

10W | 350mA | 2.5-26V | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
☐ IP20 0.08kg **CE** 

CENO 1.0 semi-recessed, 1.0, 1.1
MATCH 1.0 trimless, 1.0

CODE
90243401

DRIVER 350mA 10W DIM

10W | 350mA | 12-28V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x38x21
☐ IP20 0.09kg **CE** 

DEEP PETIT | **DEEP ADJUST**
PETIT | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0 | **MATCH**
1.0 trimless, 1.0 | **CENO** 1.0 semi-
recessed, 1.0, 1.1

CODE
90223402

DRIVER 350mA 15W DIM

15W | 350mA | 27-42V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x49x29
☐ IP20 0.09kg **CE** 

LED MODULES HO 73240577 |
73240682 | 73240542 | 73240681 |
73241320 | 73241321
PLANO PETIT 2.0

CODE
90223403

DRIVER 350mA 17W DALI

17W | 350mA | 10-49V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 108x52x22
☐ IP20 0.106kg **CE** 

DEEP PETIT | **DEEP** | **DEEP IP44**
DEEPER | **DEEPER IP44** | **DEEP**
ADJUST PETIT | **DEEP ADJUST**
1.0 | **DEEP ADJUST TRIMLESS**
DEEP ASYM ADJUST | **TAIO IP65**
RONY | **RON** | **PLANO PETIT** 1.0, 3.0
PLANO | **PLANO IP44** | **STRANGE**
PETIT 1.0, 3.0 | **STRANGE** | **SNEAK**
TRIM | **SNEAK TRIMLESS** | **BLIEK**
RINI | **SNEAK IP44** | **PLANO IP44**

CODE
90243601

DRIVER 500mA 10W

10W | 500mA | 11-20V
220-240VAC | 50Hz
L/W/H 100x43x23
☐ IP20 0.116kg **CE** 

DEEP ADJUST 1.0 | **DEEP ADJUST**
TRIMLESS | **DEEP ASYM ADJUST**
DEEP | **DEEPER** | **DEEP IP65**
DEEPER IP44 | **BLIEK** | **RINI**
SNEAK IP44 | **RON** 1.0 | **RONY**
STRANGE 1.0 | **PLANO** 1.0 | **PLANO**
IP44 | **TAIO IP65** | **SNEAK TRIM**
1.0 | **SNEAK TRIMLESS** 1.0

CODE
90214405

DRIVER 500mA 10W DIM

10W | 500mA | 3-20V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
☐ 0.08kg IP20 **CE** 

DEEP ADJUST 1.0 | **DEEP ADJUST**
TRIMLESS | **DEEP ASYM ADJUST**
DEEP | **DEEPER** | **DEEP IP65**
DEEPER IP44 | **BLIEK** | **PLANO** 1.0
PLANO IP44 | **RON** 1.0 | **RINI**
SNEAK IP44 | **RONY** | **SNEAK**
TRIM 1.0 | **SNEAK TRIMLESS** 1.0 |
STRANGE 1.0 | **TAIO IP65**

CODE
90224402

DRIVER 500mA 10W
1-10V DIM

10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 102x51x30
☐ IP20 0.06kg **CE**  

CODE
90234401

DRIVER 500mA 10W DALI

10W | 500mA | 2.5-20V
220-240VAC | 50-60Hz
L/W/H 124x31x21
☐ IP20 0.058kg **CE**  

CODE
90244401

DRIVER 500mA 10W DIM

10W | preset at 500mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.08kg **CE** 

PIRRO 2.0

DRIVER 500mA 20W DALI

20W | 500mA | 5-40V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
☐ IP20 0.106kg **CE** 

DRIVER 500mA 20W DIM

20W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
☐ IP20 0.0125kg **CE** 

DEEP ADJUST 2.0 | PIRRO 4.0, 6.0
PLANO 2.0 | RON 2.0 | STRANGE 2.0 | SNEAK TRIM 2.0 | SNEAK TRIMLESS 2.0

DRIVER 500mA 20W DALI

20W | 500mA | 3-40V | DALI DT6 –
push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
☐ IP20 0.16kg **CE** 

DEEP | DEEPER | DEEP ADJUST
DEEP ADJUST TRIMLESS | DEEP
ASYM ADJUST | RONY | PIRRO
RON | PLANO | STRANGE | SNEAK
TRIM | SNEAK TRIMLESS | BLIEK
RINI SNEAK IP44 | PLANO IP44

DRIVER 700mA 10W DALI

10W | 700mA | 2.5-14V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
☐ IP20 0.08kg **CE** 

BLIEK ROUND PETIT 1.0

DRIVER 700mA 15W DIM

15W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x44x23
☐ IP20 0.08kg **CE** 

PLANO PETIT 2.0 | STRANGE
PETIT 2.0 | MATCH 2.0 | CENO 2.0
BLIEK ROUND PETIT 2.0

DRIVER 700mA 20W DIM

20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
☐ IP20 0.105kg **CE** 

CENO 3.0

DRIVER 700mA 20W DIM

20W | 700mA | 16-28V
phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
☐ IP20 0.11kg **CE** 

CODE
90224503

CODE
90244602

CODE
90224602

CODE
90244604

CODE
90245401

CODE
90225502

CODE
90225604

CODE
90225603

DRIVER 500mA 21W DIM

21W | 500mA | 16-42V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
☐ IP20 0.11kg **CE** 

DRIVER 500mA 21W DIM

21W | 500mA | 28-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 

DRIVER 500mA 24W IP68

24W | 500mA | 5-48V
220-240VAC | 50-60Hz
L/W/H 122x54x26
☐ IP68 0.25kg **CE** 

DEEP IP65 | DEEPER IP44
TAIO IP65

DRIVER 500mA 25W DALI

25W | 350-1050mA | preset at 500mA
20-50V | DSI | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 130x43x30
☐ IP20 0.17kg **CE** 

DRIVER 700mA 20W DALI

20W | 700mA | 3-28V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
☐ IP20 0.106kg **CE** 

PLANO PETIT 2.0 | STRANGE
PETIT 2.0

DRIVER 700mA 25W DIM

25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 145x51x30
☐ IP20 0.12kg **CE** 

DRIVER 700mA 30W DIM

30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
☐ IP20 0.14kg **CE** 

DEEP ADJUST FORT
PLANO FORT

DRIVER 700mA 30W DALI
1-10V DIM

30W | preset at 700mA | 9-42V
push dim | DALI | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 103x67x22
☐ IP20 0.142kg **CE** 

CODE
90224702

CODE
90224701

CODE
90214702

CODE
90254603

CODE
90245602

CODE
90225701

CODE
90225702

CODE
90245703

DRIVER 700mA 3W IP66

3W | 700mA | 3-6V
90-264VAC | 50-60Hz
L/W/H 52x30x23
☐ IP66 0.09kg **CE**  

DRIVER 700mA 6W

6W | 700mA | 3-8.4V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg **CE**  

STRIPE | THEMIS | STRANGE wall
ORIS 0.7, 0.8, 1.3

DRIVER 700mA 7W IP67

7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.07kg **CE**  

ORIS 0.7, 0.8, 1.3, 2.0

DRIVER 700mA 10W DIM

10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.08kg **CE** 

BLIEK ROUND PETIT 1.0

DRIVER 700mA 35W DALI

35W preset at 700mA | 9-40V
DALI DT6 – push dim with memory
function | 220-240VAC | 50-60Hz
L/W/H 136x42.5x24
☐ IP20 0.21kg **CE** 

DEEP ADJUST FORT | CENO
2.0, 3.0 | PLANO FORT | BLIEK
ROUND PETIT 2.0 | MATCH 2.0

DRIVER 12V/10W

10W | 12V | leading + trailing edge
220-240VAC | 50-60Hz | 3-10VA
L/W/H 102x51x30
☐ IP20 0.1kg **CE** 

DRIVER 12V/25W

25W | 12V | leading + trailing edge
220-240VAC | 50-60Hz | 8-25VA
L/W/H 145x51x29.5
☐ IP20 0.1kg **CE** 

DRIVER 12V/70W

70W | 12V | leading + trailing edge
230-240VAC | 50-60Hz | 20-70VA
L/W/H 108x52x33
☐ IP20 0.12kg **CE** 

CODE
90215101

CODE
90215203

CODE
90215301
















CODE
90225402

CODE
90245801

CODE
90221401

CODE
90221701

CODE
90221904

DRIVER 12V/105W 105W 12V leading + trailing edge 230-240VAC 50-60Hz 35-105VA L/W/H 108x52x33  IP20 0.12kg  		DRIVER 24V/25W 0-24W 24V phase-cut dim 220-240VAC 50-60Hz L/W/H 137x50x15,5  IP20 0.90 kg  		DRIVER 24V/35W 35W 24V PWM dim 220-240VAC 50-60Hz L/W/H 142x43x30  IP20 0.14 kg  	
ILANE		ILANE		ILANE	
					
CODE 90221905		CODE 90222701		CODE 90212801	
DRIVER 24V/35W IP67 35W 24V 100-277VAC 50-60Hz L/W/H 175x31x42.5  IP67 0.56kg  		DRIVER 24V/50W 12-50W 24V phase-cut dim 220-240VAC 50-60Hz L/W/H 166x52x24  IP20 0.95 kg  		DRIVER 24V/100W 100W 24V PWM dim 220-240VAC 50-60Hz L/W/H 295x43x30  IP20 0.23kg  	
RETO outdoor		ILANE		ILANE	
					
CODE 90212802		CODE 90222901		CODE 90212902	
DRIVER 24V/100W IP67 100W 24V 100-277VAC 50-60Hz L/W/H 178x68x39  IP67 0.83 kg  		DRIVER 48V/100W 100W 48V 220-240VAC 50-60Hz L/W/H 350x30x18  IP20 0.18 kg  		DRIVER 48V/150W 150W 48V 220-240VAC 50-60Hz L/W/H 350x30x18  IP20 0.28 kg  	
RETO outdoor		STREX SYSTEM		STREX SYSTEM	
					
CODE 90212903		CODE 90218901		CODE 90218902	
DRIVER 24V/100W DALI 100W 24V DALI 220-240VAC 50-60Hz L/W/H 295x43x30  IP20 0.25 kg  		PAR16 FLAT HEAD PAR16 GU10 220-240VAC 50-60Hz IP20 0.06kg 		DALI TO PHASE-CUT DIMMING MODULE for converting a DALI signal to phase-cut dim LED 10-300W 230V L/W/H 120x30x22  IP20 	
					
CODE 90059125		CODE 90270901		CONNECTION BOX 3P PAR16 incl. strain relief 3 pole push connector incl. PAR16 socket incl. through-wiring L/W/H 75x35x25 	
					
CODE 90242901		CODE 90059126		CODE 90059120	
DRIVER 48V/250W 250W 48V 220-240VAC 50-60Hz L/W/H 400x40x22  IP20 0.50 kg  		DIMMER DIN RAIL max. 200W LED 230V DIM leading /trailing edge L/W/H 17x55x90 IP30 		DIMMER BLUETOOTH FOR SWITCH LED 3-200W incandescent 15-200W phase-cut dim 220-240V 50Hz L/W/H 44x23x44 IP20 	
					
CODE 90019018		CODE 90019100		DIMMER FOR SWITCH DIM leading /trailing edge max. 200W LED 230V L/W/H 48x17.5x46 IP30 	
					
CODE 90019107		CODE 90019194		DALI DIMMER FOR SWITCH 230V 50-60Hz L/W/H 48x49x22  IP20 0.036kg  	

LED LAMPS

ACCESSORIES

LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | >90 CRI | 1050lm
compatibility on request
IP20 0.06kg CEE 26°



CODE	
	905251W9
	905251B9

LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | >90 CRI | 1340lm
compatibility on request
IP20 0.06kg CEE 26°



CODE	
	905251W3
	905251B3

LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | >90 CRI | 1410lm
compatibility on request
IP20 0.06kg CEE 26°



CODE	
	905251W5
	905251B5

LED MODULE HO 4000K

12W | 350mA | 35Vf
4000K | >90 CRI | 1420lm
compatibility on request
IP20 0.06kg CEE 26°



CODE	
	905251W7
	905251B7

PAR16 LED 2700K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
2700K | >90 CRI | 460lm
IP20 0.06kg CEE 35°



CODE	
	901228W3

PAR16 LED 2700K


6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 437lm |
IP20 0.06kg CEE 35°



CODE	
	901228B3

PAR16 LED 3000K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
3000K | >90 CRI | 500lm
IP20 0.06kg CEE 35°



CODE	
	901228W5

PAR16 LED 3000K


6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
3000K | >90 CRI | 457lm
IP20 0.06kg CEE 35°



CODE	
	901228B5

LED AC MODULE 2700K


8W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 2700K | 515lm
compatibility on request
IP20 0.08kg CEE 31°



CODE	
	901268W3
	901268B3

LED AC MODULE 3000K

8W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 3000K | 535lm
compatibility on request
IP20 0.08kg CEE 31°



CODE	
	901268W5
	901268B5

PAR16 LED 2700K


4.3W | GU10
220-240VAC | 50-60Hz
2700K | >80 CRI | 350lm
IP20 0.06kg CEE 36°



CODE	
	905227S2

PAR16 LED 3000K

4.3W | GU10
220-240VAC | 50-60Hz
3000K | >80 CRI | 350lm
IP20 0.06kg CEE 36°



CODE	
	905227S4

METAL SPRING CLIP

alternative front lamp fixation spring
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO STRANGE ceiling
SPINEO | SOLID



CODE	
	90019700

SPRING CLIP

lamp fixation | push-in system
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO | STRANGE ceiling
SPINEO | SOLID

CODE	
	900198W0
	900198S0
	900198G0
	900198Q0
	900198B0

LED LAMPS

ACCESSORIES

QT14 LED 3000K

3W | G9 | 220-240VAC | 50Hz
3000K | >80 CRI | 300lm
RAY wall | **BOX** wall
IP20 0.03kg **CE**



clear
CODE 9019G703

QT14 LED 3000K

3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | 80 CRI | 250lm
DRO 1.0
IP20 0.03kg **CE**



opal
CODE 9010G804

C35 LED 2700K

5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | >90 CRI | 450lm
DRO 2.0
IP20 0.03kg **CE**



opal
CODE 9003C103

A60 LED 2700K


9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 800lm
DRO 3.0 | **ROOMOR** suspended
SHIEK
IP20 0.04kg **CE**



opal
CODE 9003E152

A65 LED 2700K


14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1378lm
DRO 4.0
IP20 0.04kg **CE**



opal
CODE 9003E153

G95 LED 2700K


11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1100lm
BISHOP
IP20 0.11kg **CE**



opal
CODE 9003E154

A60 LED 2200K

6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 400lm
MIRRO 1.0
IP20 0.04kg **CE**



gold mirror
CODE 9003E155

A60 LED 2700K


5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 495lm
MIRRO 1.0
IP20 0.04kg **CE**



gold mirror
CODE 9003E139

A60 LED 2700K

5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 418lm
MIRRO 1.0
IP20 0.04kg **CE**



silver mirror
CODE 9003E140

G95 LED 2200K


5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 377lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg **CE**



gold mirror
CODE 9003E156

G95 LED 2700K

5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >95 CRI | 464lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg **CE**



gold mirror
CODE 9003E142
silver mirror
CODE 9003E157

T30-225 LED 2200K

5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 428lm
WIRO 1.8, 3.8 | wall | **CONE**
DIAMOND | **GLOBE** 4.0
IP20 0.06kg **CE**



gold tinted
CODE 9003E129

T30-225 LED 2700K


5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >80 CRI | 506lm
WIRO 1.8, 3.8, 6.1, 6.5 | wall
CONE | **GLOBE** 4.0
IP20 0.06kg **CE**



gold tinted
CODE 9003E136

A60 LED 2200K


3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95CRI | 247lm
WIRO 2.0, 3.8, 6.1, 6.5
CONE 1.0, 2.0, 3.0 | **J.J.W.**
IP20 0.04kg **CE**



gold tinted
CODE 9003E109

A60 LED 2700K DIM


5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 602lm
WIRO 2.0, 3.8, 6.1, 6.5
GLOBE 1.0, 2.0 | **J.J.W.**
IP20 0.04kg **CE**



clear
CODE 9003E138

ST64 LED 2200K DIM


5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 532lm
IP20 0.05kg **CE**



gold tinted
CODE 9003E110

G125 LED 2200K

5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 388lm
IP20 0.11kg **CE**



gold tinted
CODE 9003E112

T30-300 LED 2200K

7W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 582lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg **CE**



gold tinted
CODE 9003E130

T30-300 LED 2700K

6.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 632lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg **CE**



gold tinted
CODE 9003E135

												</					

PLASTERKITS

ACCESSORIES

RECESSED HOUSING

ACCESSORIES

LITO

always use in combination with
plasterkit


122x90 45



THEMIS 1.7

always use in combination with
plasterkit


272x160 85



THEMIS 2.7

always use in combination with
plasterkit

372x160 85



CODE

90012027

CODE

90012032


CODE

90012033

DEEP ADJUST TRIMLESS

plasterkit


105-110 12.5, 15, 20, 25



ORIS 0.7

recessed housing incl. plasterkit


191x58 60



ORIS 0.8 | RETO 0.8

recessed housing incl. plasterkit


72x72 60



ORIS 0.7

concrete housing

192x58 60



ORIS 0.8 | RETO 0.8

concrete housing


72x72 60



ORIS 1.3 | RETO 1.3

concrete housing


121x121 60



ORIS 2.0 | RETO 2.0

concrete housing

123x191 60



CODE

90012044

CODE

90012046

CODE

90012040


CODE

90012042

ORIS 1.3 | RETO 1.3

recessed housing incl. plasterkit


122x122 60



ORIS 2.0 | RETO 2.0

recessed housing incl. plasterkit


123x191 60



STRIPE 0.4 | 0.7

recessed housing incl. plasterkit


75x75 55



STRIPE 2.2

recessed housing incl. plasterkit


251x76 55



MAP 0.6 | CHART 0.6

ground housing

137 110



MAP 0.9 | CHART 0.9

ground housing


137 130



MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART
ASYM 1.2

ground housing


190 158



MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART
ASYM 1.6

ground housing

220 184



CODE

90012041

CODE

90012043

CODE

90012037

CODE

90012038

CODE

90012201

CODE

90012202

CODE

90012203

CODE

90012204

ILANE

ACCESSORIES

BLACK DIFFUSER COVER ILANE

only for 1.0

BLACK DIFFUSER COVER ILANE

only for 3.0

MINI CONNECTOR | ILANE


strip to strip - continuous

MINI CONNECTOR | ILANE


strip to wire

MINI CONNECTOR | ILANE


strip to strip



	CODE
IP20	90014272




	CODE
IP20	90014268



	CODE
IP20	90014269

BLANK COVER




	CODE
1m	911001W0
1m	911001B0

2m	911002W0
2m	911002B0

3m	911003W0
3m	911003B0

RECESSED

track | custom cuts | 48V | 15A | DALI



	CODE
< 1m	90014187CC
< 1m	90014188CC
< 2m	90014189CC
< 2m	90014190CC

< 3m	90014191CC
< 3m	90014192CC


CC = for lengths specifications please
add four digits in mm

DALI SELV DEVICE

for 48V system | max. 300W

48VDC


L/W/H 213x37x25



	CODE
	90019193

SURFACE

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	90014181CC
< 1m	90014182CC
< 2m	90014183CC
< 2m	90014184CC

< 3m	90014185CC
< 3m	90014186CC

CC = for lengths specifications please
add four digits in mm


NON ELECTRICAL L-CONNECTOR RECESSED



	CODE
	90014256
	90014257

SUSPENDED

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	90014181CC
< 1m	90014182CC
< 2m	90014183CC
< 2m	90014184CC

< 3m	90014185CC
< 3m	90014186CC

CC = for lengths specifications please
add four digits in mm

NON ELECTRICAL L-CONNECTOR SURFACE




	CODE
	90014258
	90014259

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI

with indirect light



	CODE
< 2m	900140W_CC
< 2m	900140B_CC
< 3m	900141W_CC
< 3m	900141B_CC

LIGHT COLOUR	LUMEN CRI	CODE
3000K 14W/m	950/m >90	5

CC = for lengths specifications please
add four digits in mm

1-PHASE TRACK

ACCESSORIES

TRACK ADAPTER 1.0


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg



	CODE
	90014044
	90014043


TRACK ADAPTER 2.0

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 3kg



	CODE
	90014277
	90014278


ADJUSTABLE CORNER



	CODE
	90014042
	90014041

COVERPLATE I/L/T/X

only use with recessed tracks



	CODE
	90014126
	90014127

COVERPLATE END FEEDS


only use with recessed tracks



	CODE
	90014124
	90014125

X-CONNECTOR

can be used as feed




	CODE
	90014049
	90014050

T-CONNECTOR 1.0

can be used as feed

top view




	CODE
	90014010
	90014011

T-CONNECTOR 2.0

can be used as feed

top view




	CODE
	90014012
	90014013

T-CONNECTOR 3.0

can be used as feed

top view




	CODE
	90014014
	90014015

T-CONNECTOR 4.0

can be used as feed

top view




	CODE
	90014016
	90014017

T-CONNECTOR 1.0

can be used as feed

top view




	CODE
	90014228
	90014229

T-CONNECTOR 2.0

can be used as feed

top view




	CODE
	90014230
	90014231

T-CONNECTOR 3.0

can be used as feed

top view




	CODE
	90014232
	90014233

T-CONNECTOR 4.0

can be used as feed

top view




	CODE
	90014234
	90014235

3-PHASE TRACK

ACCESSORIES

CUTTING TOOL

for cutting the inner copper cables of
3-phase track and 48V track
CE TÜV



	CODE
	90014165


TRACK ADAPTER

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 5kg



	CODE
	90014279
	90014280


FLEXIBLE CONNECTOR



	CODE
	90014288
	90014289

X-CONNECTOR

can be used as feed




	CODE
	90014248
	90014249

SUSPENSION OPTIONS


ACCESSORIES

HOOK
standard multi suspension hook
for ø5 plugs




	CODE
	90052025
	90052024

WIRO
cable wall bracket
only for WIRO textile cable




	CODE
	90052062

HOOK
optional multi suspension hook
for ø6 plugs




	CODE
	90052066
	90052065

WIRO
ceiling hook



	CODE
	90052061

STRAIN RELIEF
accessory for WIRO suspension or
for textile cables




	CODE
	90052064

SHIEK 4.0 | 5.0
cable ring for 3 luminaires



	CODE
	90059123
	90059121

**CABLE WALL-
CEILING BRACKET**
for cable 4.25-5.5mm diameter



	CODE
	90019197
	90019198

SHIEK 4.0 | 5.0
cable ring for 4 luminaires




	CODE
	90059124
	90059122

ODREY
inner cover for 1.6 | 1.7



	CODE
	911420W0
	911420G0
	911420B0

BOX | RAY
flaps for adjustable beam angle
powder coated white




	CODE
	900401W0

HONEYCOMB
CENO | PIRRO
BLIEK ROUND PETIT




	CODE
	90051130
	90051131

CORK
bottle 1 | clear glass




	CODE
	90019013

STAKE
snoot



	CODE
	90019004

HONEYCOMB
CENO FORT ON TRACK 3 PHASE




	CODE
	90051132

CORK
bottle 2 | clear glass with closing cap



	CODE
	90019014

X-BEAM
snoot




	CODE
	90019023

GROUND FIXATION


ACCESSORIES

POLE 200
STIPO 3.0, 4.0




CODE	
	910062A0
	910062Q0

POLE 400
STIPO 3.0, 4.0




CODE	
	910064A0
	910064Q0

POLE 600
STIPO 3.0, 4.0




CODE	
	910066A0
	910066Q0

POLE 170
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910073D0
	910073A0
	910073Q0
	910073B0

POLE 170
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910013D0
	910013A0
	910013Q0
	910013B0

POLE 400
straight pole | incl. ground spike
SWAM




CODE	
	910090Q0
	910090B0

POLE 600
straight pole | incl. ground spike
SWAM




CODE	
	910091Q0
	910091B0

POLE 800
straight pole | incl. ground spike
SWAM




CODE	
	910092Q0
	910092B0

POLE 270
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910014D0
	910014A0
	910014Q0
	910014B0

POLE 470
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910016D0
	910016A0
	910016Q0
	910016B0

POLE 670
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910018D0
	910018A0
	910018Q0
	910018B0

POLE 870
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910010D0
	910010A0
	910010Q0
	910010B0

POLE 400
curved pole | incl. ground spike
SWAM




CODE	
	910093Q0
	910093B0

POLE 600
curved pole | incl. ground spike
SWAM




CODE	
	910094Q0
	910094B0

POLE 800
curved pole | incl. ground spike
SWAM




CODE	
	910095Q0
	910095B0

POLE 270
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910074D0
	910074A0
	910074Q0
	910074B0

POLE 470
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910076D0
	910076A0
	910076Q0
	910076B0

POLE 670
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



CODE	
	910078D0
	910078A0
	910078Q0
	910078B0

POLE 870
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
	910070D0
	910070A0
	910070Q0
	910070B0

GROUND FIXATION

ACCESSORIES

X-BEAM
ground spike




CODE
90013115

SWAM
ground fixation




CODE
90019019

TAPE | PACE
ground spike




CODE
90013102

PALLUZ 100




CODE
910033D0

GETTON
ground spike




CODE
90013101

LINUS
ground spike




CODE
90013103

LINUS
ground fixation




CODE
90013302

PALLUZ 470




CODE
910036D0

PALLUZ 670




CODE
910038D0

LINUS 150




CODE
910024D0
910024A0
910024Q0

LINUS 350




CODE
910026D0
910026A0
910026Q0

PALLUZ
ground fixation




CODE
90013303

STAKE 1.0 | STIPO
ground spike




CODE
90013106

STAKE FOLD
ground spike




CODE
90013107

LINUS 550




CODE
910028D0
910028A0
910028Q0

GETTON 275




CODE
910052A0

GETTON 475



CODE
910054A0

GETTON 675



CODE
910058A0

NO MORE MISUNDERSTANDINGS

ICONS AND STANDARDS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Rotatable vertically horizontally	Drehbar vertikal horizontal	Draaibaar verticaal horizontaal	Orientable verticalement horizontalement	Orientable en vertical horizontal	Girevole in verticale orizzontale	Наклонный по вертикали горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол светового луча
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Светильник класса 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Светильник класса 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Светильник класса 3
	IP rating	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Степень защиты IP
	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating	Ударопрочность IK
	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Luce compatibile con le postazioni di lavoro	Освещение, подходящее для рабочего места с монитором
	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante	Степень защиты IC: может быть покрыт изолирующим материалом
	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE	соответствие CE

Standard Service Life of Wever & Ducré products

The standard service life for Wever & Ducré luminaires is at least L70/B50 after 50000 hours of operation.
Nach der Standardlebensdauer von 50.000 Stunden erfüllen die Leuchten von Wever & Ducré mindestens die Anforderungen der Klasse L70/B50.
De standaard levensduur van Wever & Ducré armaturen is minstens L70/B50 na 50.000 branduren.
La durée de vie standard de nos appareils Wever & Ducré est de 50.000 heures et satisfont aux exigences de la classe L70/B50.
La vida útil estándar de las luminarias Wever & Ducré corresponde como mínimo al factor L70/B50 tras 50.000 horas de funcionamiento.
Dopo la durata standard di 50.000 ore, gli apparecchi di Wever & Ducré soddisfano almeno i requisiti della classe L70/B50.
После стандартного срока службы светильников в 50 000 часов светильники Wever & Ducré как минимум соответствуют требованиям класса L70/B50.

LED Quality Standard of Wever & Ducré products

The Standard of all our LED is defined by a minimun of a SDCM 3 (3-step MacAdam ANSI binning).
Der Standard unserer LEDs entspricht mindestens SDCM 3 (ANSI-Norm mit 3-stufigem MacAdam-Binning).
Onze leds voldoen minimal aan 3 SDCM (3-step MacAdam ANSI binning).
Le standard de toutes nos leds correspond au minimum à SDCM 3 (3-step MacAdam ANSI binning).
El estándar de todos nuestros LED corresponde al menos a SDCM 3 (norma ANSI con binning de MacAdam en 3 etapas).
Lo standard di tutti i nostri LED corrisponde almeno a SDCM 3 (standard ANSI con binning MacAdam a 3 livelli).
Характеристики всех наших светодиодов соответствуют как минимум SDCM 3 (3-ступенчатой сортировке Макадама по стандарту ANSI).

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC	Сертификат ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL	Сертификат UL
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)	Травмоопасность (удушение)
	Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Цветовая температура
	Blue lines	Part not included	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Не входит в комплект
	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energie-etiketterings-verordening	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica	Маркировка потребления энергии
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron door eindgebruiker te vervangen	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituable por el usuario	Sorgente luminosa sostituibile dall'utente finale	Замена лампы возможна для конечного пользователя
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet te vervangen	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile	Замена лампы невозможна
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Besturing door eindgebruiker te vervangen	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituable por el usuario	Dispositivo di controllo sostituibile dall'utente finale	Замена устройства управления возможна для конечного пользователя
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Besturing niet te vervangen	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile	Замена устройства управления невозможна
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron door erkende vakmensen te vervangen	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituable por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati autorizzati	Замена лампы возможна для уполномоченных специалистов
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Besturing door erkende vakmensen te vervangen	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de control sustituable por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati autorizzati	Замена устройства управления возможна для уполномоченных специалистов

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SWITZERLAND

Kellerstraße 22
6005 Lucerne
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

WEVER & DUCRÉ SPAIN

Gran Via de les Corts Catalanes, 654
08010 Barcelona
Spain
Phone +34 931 205 928
office.es@weverducre.com

WEVER & DUCRÉ FINLAND

Sörnäistenkatu 1
00580 Helsinki
Finland
Phone: +358 50 506 71 82
office.fi@weverducre.com

WEVER & DUCRÉ NORWAY

Drammensveien 288
0283 Oslo
Norway
Phone +47 24 07 61 11
office.no@weverducre.com

WEVER & DUCRÉ MIDDLE EAST

Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

WEVER & DUCRÉ AUSTRIA

Marxergasse 1B
1030 Vienna
Austria
Phone +43 1 526 47 84
showroom.at@weverducre.com

SHOWROOMS

WEVER & DUCRÉ GERMANY

Schanzenstraße 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 130 649 60
Fax +49 221 130 649 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE

10, Rue Pecquay
75004 Paris
France
Phone +33 1 402 981 01
office.fr@weverducre.com

WEVER & DUCRÉ FRANCE

36, Rue Juliette Récamier
69006 Lyon
France
Phone +33 4 72 811 199
office.fr@weverducre.com

WEVER & DUCRÉ SWEDEN

Härdvallsgatan 18
115 46 Stockholm
Sweden
Phone +46 73 045 76 39
office.se@weverducre.com

WEVER & DUCRÉ ITALY

Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Italy
Phone +39 0421 177 83 88
office.it@weverducre.com

WEVER & DUCRÉ UK

23 Batemans Row
EC2A 3HH London
United Kingdom
Phone +44 203 174 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND

Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Poland
Phone +48 730 330 358
office.pl@weverducre.com

WEVER & DUCRÉ AUSTRIA

Gleisdorfer Gasse 15
8010 Graz
Austria
Phone +43 316 317 085 91
showroom.at@weverducre.com

WEVER & DUCRÉ NETHERLANDS

info.nl@weverducre.com

WEVER & DUCRÉ RUSSIA

russia@weverducre.com

©WEVER & DUCRÉ® BV

1ST EDITION, MAY 2022

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an V

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PROJECT MANAGEMENT

PRINTING

PHOTOGRAPHY

Jonas Devacht, Wever & Ducré, Evolis 118, 8530 Harelbeke, Belgium

Carina Erlach, Valerie Thaller, Sara Wilfling

Valerie Thaller, René Zavadilik

Carina Erlach, Lukas Hochenwarter

Tanja Petschnig, Renate Buzzi

Volker Waldhauser


Renate Buzzi, Sabrina Schrauf



Drukarnia Perfekt S.A., Warsaw, Poland


- Apresvino - (p. 460-461) | © nina Struve for VRAI interior architecture (p. 90) | © stella (p. 8-10, 16, 19-21, 752) | Aikon Producties-bvba (p. 92) | Aleksandr Dal Cero (p. 232) | Alexander Maria Lohmann (p. 230) | Álvaro Valdecantos (p. 688, 696, 700) | Andrea Badrutt Fotografie (p. 306) | Christoph Panzer (p. 430-431) | Andrei Valeriu Radulescu (p. 250) | Architekturfotografie Oliver Hallwirth (p. 424) | B.C. Gassner (p. 608) | Biderbost Photo (p. 442-443, 536) | Bob Reijnders (p. 192-193, 326, 342) | Catherine Roider (p. 34, 100) | Christian Brandstätter (p. 618) | Christian Repnik (p. 712) | Christoph Steinbauer (p. 364, 482, 588, 594, 662, 702) | Corinna Unterkofler/Joachim Grubelnik (p. 412, 656, 684) | Dani Rovira Fotografia (p. 714) | Davide Perbellini (p. 52, 384-385) | Edgar Navarre (p. 514-516) | Elena Egger (p. 88-89) | Ella Kuhn Photography (p. 152) | Erich Sinzinger 2019 (p. 158) | Erik Đuriš (p. 62-63) | Evgenij Avramenko (p. 284) | Georges Leroux (p. 115) | Gerald Van Rafelghem (p. 670) | Hanne Joosen fotografie (p. 72, 252) | Harald Eisenberger (p. 108) | Jack Lovel (p. 502) | Jaro van Meerten - The Art of Living magazine (p. 178, 388) | Jean Marc Manson (p. 238) | Jiří Dymáček (p. 636-637) | Joachim Grothus/Herford/Germany (p. 272) | Jurrit van der Waal - The Art of Living magazine (p. 510) | KAPFHAMMER (p. 50) | Kim Forssén (p. 456, 642) | Kris Dekeijser (p. 11, 26, 38-39, 48, 54-58, 66, 70, 73, 76-78, 94, 98-99, 104-106, 112, 116-118, 121, 124-132, 138-151, 156, 160, 168-174, 176, 182, 188, 194, 200, 204-211, 216-220, 224, 228, 240- 244, 248, 254, 258-262, 266-269, 270, 282, 285-288, 302-304, 312, 324, 330, 336, 360-363, 376-382, 400, 402, 404, 410, 414-420, 426-428, 434, 446, 448-452, 458, 466, 470- 475, 486-488, 508, 518, 532, 542, 562-565, 570, 592-593, 596-600, 604, 614, 628-630, 640, 646-648, 658, 664, 676-678, 686, 690-693) | Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (p. 538) | Kurt Hoerbst (p. 484, 606) | Kurt Kuball (p. 120, 584, 620, 624, 644, 672, 694, 698) | Lukas Jahn (p. 616, 716) | Marc Díez (p. 36) | Marc Hadden Photography (p. 422) | Marco Richter Photography (p. 572-573) | Martin Baitinger (p. 102-103) | Mattila Aquila (p. 246) | Miquel Llonch (p. 553) | Miriam Raneburger (p. 610) | nunofoto.com (p. 632) | Patricia Goijens (p. 28) | Paul Karalius (p. 652, 704) | paul ott fotografiert (p. 634, 666) | Paula Beetlestone (p. 638) | Philip Kottlorz Fotografie (p. 32, 44, 368) | Robin Bonnier with KREW COLLECTIVE (Cover, p. 14-15) | Salvatore Guido (p. 18, 30, 40-43, 46, 60-61, 64-65, 68, 74, 80-82, 110, 164, 186, 190, 196, 212, 222, 256, 264-265, 274-279, 290-300, 310, 328-329, 332-334, 338, 350-357, 366, 386, 398, 432, 436-440, 444, 462, 478, 494-500, 520-523, 528-531, 534, 540, 544-552, 554-561, 568, 574-578) | SCHWARZ - LICHT / fotografie + kommunikation (p. 395, 454) | Selma Hengeveld (p. 96) | Sergey Bezuglov (p. 180, 280) | Sergio Camplone (p. 198, 383) | Studio Ciao (p. 154, 464) | Studio Erick Sallet (p. 162) | Thomas De Bruyne | cafeine.be (p. 449) | Walters Media (p. 504-507) | Wide Shot Photography - Alexandre Van Battel (p. 122) | www.foto-stoebich.com (p. 308) | Zvonimir Mihaljek (p. 626)

INSPIRED BY THE ARCHITECTURE OF BELGIUM

COLOURS AND MATERIALS

	SG	Silk Grey wet painted RAL 7044
	PS	Stay together similar to RAL 000 75 00
	MG	Give warmth similar to RAL 080 80 10
	FJ	Feel Jade similar to NCS S 2005 – G90Y
	TS	Taupe Striped Glass handblown
	TW	Taupe White Glass handblown
	DW	Dark Taupe Glass handblown
	TD	Taupe Diamond Glass handblown
	FD	Frosted Opal Opal glass handblown
	Y	Brown Opal glass handblown
	B	Smoked Glass handblown
	WB	White Opal glass handblown
	MB	Black Marble
	MW	White Marble
	I	Inox 304 Stainless steel electro polished

	C	Chrome Steel glossy chrome plated
	V	Rust Steel varnished rusted
	S	Silver Aluminium powder coated without texture
	RW	Coral Red and White Texture Aluminium wet painted
	OR	Traffic Orange Polypropylene RAL 2009
	SB	Water Blue Polypropylene RAL 5021
	YE	Colza Yellow Polypropylene RAL 1021
	W	White LLDPE
	F	Grey Recycled PET felt
	D	Dark Grey Texture Composite material wet painted
	LB	Black glossy aluminium
	GB	Black/Light Gold Composite material
	NB	Black/Black Chrome Composite material
	A	Aluminium anodised
	GW	Cement Grey and White Aluminium wet painted
	A	Anthracite Grey Aluminium powder coated texture RAL 7016

	B	Black matt Aluminium powder coated wet painted*
	G	Gold Aluminium painted/brushed
	P	Copper Steel varnished lacquered
	Q	Bronze Aluminium painted/brushed
	W	White matt Aluminium or steel powder coated wet painted*
	L	Aluminium brushed
	M	Champagne
	BQ	Black Texture and Bronze Aluminium
	Z	Black Texture and Copper Aluminium powder coated
	K	Black Texture and Gold Aluminium wet painted
	GB	Gold Aluminium wet painted Black Texture
	J	White Texture and Gold Aluminium wet painted
	E	White Texture and Black Aluminium powder coated brushed
	CH	Black Champagne
	H	Champagne Black



*for specific information on colour and finishes please refer to weverducre.com/materials

