

FROM BELGIUM WITH LOVE



WEVER & DUCRÉ
LIGHTING

**LIFE IS
TOO SHORT
FOR BORING
LIGHTING**








WEVER & DUCRÉ
LIGHTING

INDOOR

CEILING RECESSED 42 — 135								
								
DEEP BIJOU	DEEP PETIT	DEEP	DEEPER	DEEP ADJUST PETIT	DEEP ADJUST	DEEP ADJUST TRIMLESS	DEEP ASYM ADJUST	
47	49	51	53	55	57	61	63	
								
DEEP ADJUST FORT	SPINEO	RONY	RON	PIRRO PETIT	PIRRO	PLANO PETIT	PLANO	PLANO FORT
65	67	69	71	75	77	79	81	83
								
STRANGE PETIT	STRANGE	SNEAK TRIM	SNEAK TRIMLESS	MATCH POINT	MATCH	MATCH STICK TRIMLESS	CENO 1.0	CENO 2.0
85	87	89	91	93	95	97	99	101
								
BLIEK PETIT TRIMLESS	BLIEK PETIT	BLIEK ROUND	BLIEK SQUARE	RUVI	MATCH POINT IP44	DEEP POINT IP44	DEEP BIJOU IP65	DEEP IP44 IP65
103	103	105	109	111	93	115	117	119
								
DEEPER IP44	TAIO IP65	RINI SNEAK IP44	LUNA ROUND IP44	LUNA SQUARE IP44	PLANO IP44	MIRBI IP44 1.0	MIRBI IP44 2.0	CITY IP44
121	123	125	127	129	131	133	133	135
CEILING SURFACE 136 — 237								
								
BOX MINI	BOX	DOCUS MINI	DOCUS	HEXO MINI	HEXO	RAY MINI	RAY	
141	143	147	149	153	155	159	161	
								
SOLID BIJOU	SOLID PETIT	SOLID	TRACE	PIRRO PETIT	PIRRO SPOT	PIRRO OPAL	PLANO PETIT	PLANO
165	167	169	173	175	177	181	183	185

INDOOR

								
SIRRO	SARA ON BASE	SQUBE ON BASE	MATCH	CENO	BLIEK PETIT	MICK	DRO	CLOCK
187	191	193	199	201	205	207	211	213
								
WIRO	MIRRO	CLEA	J.J.W.	ROOMOR OFFICE	FINLIN	VENN	TAIO IP65	MIRBI IP44 1.0
215	217	219	221	223	225	227	229	231
				STREX TRACKS 242 — 275				
MIRBI IP44 2.0	ROB IP44	ROBY IP44	TOWNA IP44	STREX TRACKS				
231	233	235	237	242 — 275				
								
DOCUS	HEXO	RAY	MATCH	CENO	MICK	MATCH	ODREY	SOLLI
253	255	257	259	261	265	267	269	275
1-PHASE TRACKS 276 — 293								
								
1-PHASE TRACKS	PIRRO	SARA	SQUBE	DRO	HEXO	RAY	ODREY	
277	279	281	285	287	289	289	291	
3-PHASE TRACKS 294 — 305								
						SYSTEMS 308 — 317		
3-PHASE TRACKS	SQUBE	CENO FORT	HEXO	RAY	ROOMOR OFFICE	SYSTEMS		
295	297	299	303	303	305	308 — 317		
		CEILING SUSPENDED 318 — 431						
ELLO SYSTEM	ILANE	CEILING SUSPENDED			BOX	BOX MULTI	DOCUS	DOCUS MULTI
311	315	318 — 431			323	323	325	325
						MORE ON THE NEXT PAGE		
					HEXO	MORE ON THE NEXT PAGE		
					327			


INDOOR

									
HEXO MULTI 327	RAY 331	RAY MULTI 331	ODREY 333	ODREY MULTI 333	WETRO 341	WETRO MULTI 341	SHIEK 2.0 347	SHIEK MULTI 347	
									
SHIEK 3.0 349	SHIEK 4.0 351	DINOR 1.0 355	DINOR 2.0 355	DINOR 3.0 355	TRACE 1.1 357	TRACE 2.0 359	TRACE CHANDELIER 361	CONE 365	
									
CORK 367	MATCH 369	SOLLI 371	DRO 373	WIRO CONE 379	WIRO 383	WIRO DIAMOND 385	WIRO GLOBE 393	MIRRO 397	
									
J.J.W. 399	ROOMOR 407	ROOMOR OFFICE 411	BISHOP 413	FINLIN 417	NET 419	FIL 421	ELLO 423	DARF 425	
	WALL RECESSED 432 — 445								
GIGANT 429			RETO 435	LITO 1.0 437	LITO 2.0 437	STRIPE 439	STRANGE 441	THEMIS 443	ORIS 445
WALL SURFACE 446 — 571									
		BOX MINI 451	BOX 453	DOCUS MINI 459	HEXO MINI 461	RAY MINI 463	RAY 465	TRAIN 469	CENTRAL 471
									
TRACE SLIM 473	TRACE 475	SARA SNOOZE 479	MATCH SNOOZE 483	MATCH 485	CENO 487	ODREY 491	MICK SNOOZE 495	MICK WALL 497	

INDOOR

								
DOMINO 499	LEENS 501	BENTO 503	SCAVA 505	DOT 507	DRO 511	DRO 511	CLOCK 515	WIRO 517
								
MIRRO 519	MIRRO 523	CLEA 525	ROOMOR 527	ROOMOR 535	J.J.W. 537	TAPIS 543	MILES 547	MILES 551
								
MILES 553	FINLIN 1.0 555	FINLIN 4.0 555	FINLIN ROUND 559	VENN 561	DARF 565	RUVI IP44 567	MIRBA IP44 569	MIRBI LONG IP44 571

TABLE 572 – 583					
	DRO 575	DRO 577	MIRRO 579	ROOMOR 581	REVER 583
FLOOR SURFACE 584 – 589					
	DRO 585	DRO 585	MIRRO 587	ROOMOR 589	

CEILING RECESSED				CEILING SURFACE				WALL RECESSED																											
592 — 599				600 — 621				622 — 631																											
 DEEP BIJOU IP65 595				 DEEP IP65 595				 TAIO IP65 597				 INTRA 599				 TRAM 603				 TUBE 605				 TAIO 607											
 RAY 609				 TRAIN 611				 TUBE CARRÉ 613				 BOX 615				 ROB 619				 BLAS 1.0 621				 BLAS 2.0 621				 RETO 625							
 ORIS 629				WALL SURFACE				 TRAM 635				 TUBE 637				 TAIO 641				 RAY 643				 TRAIN 645				 KIOSK 647				 CENTRAL 649			
 STATION 651				 TUBE CARRÉ 1.0 653				 BOX 659				 BOXX 665				 X-BEAM 667				 RETO 669				 PALOS 671				 BLAS 673				 GETTON 675			
 TAPE 677				 SWAM 679				FLOOR RECESSED				 CARD 0.1 683				 CARD 0.2 683				 BLINK 685				 MAP 687				 MAP ASYM 691				 CHART 693			
 CHART ASYM 695				FLOOR SURFACE				 KIOSK 699				 TAPE 701				 SWAM 703				 STIPO 707				 STAKE 709				 STAKE FOLD 709				 X-BEAM 711			
 LINUS 713				 PALOS ROUND 715				 PALOS CARRÉ 717				 FIFTY FIFTY 719				 SWAY 721				 GETTON 723				 COSTA 1.0 725				 COSTA 2.0 727							

I'LL TAKE THE BIKE

HOMETOWN GLORY
KORTRIJK



How about some delicious chocolate? Grab your bike and pedal on down to Kortrijk. You can rent one on pretty much every corner in 2020's Best Bike City. Get from A to B incredibly quickly and without hurting the environment. We think it's great – and can't imagine a better place for sustainable ideas. Our lights are so much more than just an amazing design – their inner values count, too. We make sure every item limits resource use and avoids disposable packaging. Who inspires us? People like you. People who care about a clean environment as much as they care about elegant design. People who see plastic as yesterday's news.

Wie wäre es mit wundervoller Schokolade? Dann schwingen Sie sich in Kortrijk am besten aufs Rad. Das kann man in der „Best Bike City 2020“ nämlich fast an jeder Straßenecke mieten. Und sich so schnell und umweltschonend von A nach B bewegen. Tolle Sache, finden wir und können uns keinen Ort vorstellen, an dem sich nachhaltige Ideen besser umsetzen ließen. Schließlich sollen unsere Leuchten nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punkten. Also achten wir bei jedem Stück darauf, dass Ressourcen geschont und Einwegverpackungen vermieden werden. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die auf edles Design ebenso viel Wert legen wie auf eine saubere Umwelt. Und für die Plastik echt von gestern ist.





HQ SHOWROOM

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

Evolis 118
8530 Harelbeke
Belgium



JOIN US VIRTUALLY
weverducre.com/showroom-tour




WELCOME TO OUR HEADQUARTERS

FROM HERE TO EVERYWHERE

A little tip before you start out: The easiest way to find our new warehouse is to head towards the four large wind turbines. They can be clearly seen from a distance in Kortrijk. And they are something we are especially proud of. As it is a combination of these gentle giants and 360 solar panels that ultimately ensures our headquarters are powered by sustainable energy. And if you think that is a good thing: Then, what about the 1,400 m² bee meadow or our new company bikes? We would be pleased to tell you more about our sustainability projects, on a tour of our premium showroom, where you can get to know Wever & Ducré close up.

Ein kleiner Tipp vorweg: Den Weg zu unserem neuen Warehouse finden Sie am leichtesten, wenn Sie den vier großen Windrädern folgen. Die sieht man in Kortrijk nämlich schon von weitem. Und das macht uns richtig stolz. Schließlich sorgen die sanften Riesen gemeinsam mit 360 Solarkollektoren dafür, dass unser Headquarter mit nachhaltiger Energie betrieben wird. Sie finden das gut? Dann erzählen wir Ihnen gerne mehr über unsere nachhaltigen Projekte, wie die 1.400 m² große Bienenwiese oder unsere neuen Firmen-Bikes. Und zwar bei einer Tour durch unseren Premium-Showroom, bei der Sie Wever & Ducré hautnah kennenlernen können.

EXPLORE KORTRIJK
weverducre.com/kortrijk



BARCELONA
Plaça Duc de Medinaceli 5
08002 Barcelona
+34 93 5112 189
Spain




BRUSSELS
Gare Maritime, Picardstraat 7, bus 304
1000 Brussel
+32 56 492 800
Belgium



COLOGNE
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 130 649 60
Germany



FRANKFURT
Europa-Allee 18
60327 Frankfurt am Main
+49 69 2102959 0
Germany




GRAZ
Gleisdorfer Gasse 15
8010 Graz
+43 316 317 085 91
Austria




HELSINKI
Sörnäistenkatu 1
00580 Helsinki
+358 50 506 71 82
Finland




HONG KONG
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
+852 211 069 24
Hong Kong



LONDON
23 Batemans Row
EC2A 3HH London
+44 203 174 01 77
United Kingdom



LYON
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 811 199
France



PARIS
10, Rue Pecquay
75004 Paris
+33 1 402 981 01
France



STOCKHOLM
Härdvallsgatan 18
115 46 Stockholm
+46 73 045 76 39
Sweden



VENICE
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 177 83 88
Italy



VIENNA
Marxergasse 1B
1030 Vienna
+43 1 526 47 84
Austria



WARSAW
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 358
Poland

WITH YOU, I AM HOME

SHOWROOMS AROUND THE WORLD

What makes Wever & Ducré luminaires so fantastic? Simply that they feel at home in 60 countries around the world. They shine just as comfortably in a London rooftop bar as in an ultra-modern high-rise apartment in Hong Kong. What is the secret of their success? Exceptional design and high-quality materials give each luminaire a personal appeal for everyone. Sounds perfect? Then you will be delighted to learn not just about the super-fast delivery for our products but also about the plastic-free packaging for shipping we have been using for years, even for the smallest screws. Just cast an eye to the left and select one of the various showrooms. Our new collection is ready and waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl wie in einem trendigen City-Apartment in Hong Kong. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblingsstück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach links werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.

REPRESENTATIVE OFFICES

AMSTERDAM

Design Post Amsterdam, Cruquiusweg 111L | 1019, AG Amsterdam
+31 20 229 6001 | Netherlands

DUBAI

Office No. 704, HDS Business Center, Cluster M
Jumeirah Lakes Towers, DMCC | PO Box 336603 Dubai
+971 4 436 23 47 | United Arab Emirates

LUCERNE

Kellerstraße 22 | 6005 Lucerne | +41 41 361 60 60 | Switzerland

OSLO

Drammensveien 288 | 0283 Oslo | +47 24 07 61 11 | Norway



GET IN CONTACT

weverducre.com/locations



SUSTAINABLE BY FUNCTION

WE ARE COMMITTED

The key for us is to give you luminaires that still have a friendly glow even after many years of service. How do we do that? By ensuring product quality that meets the standards of the Ecodesign Directive and making spare parts available for a particularly long lifespan. So should you ever need to replace your LED engine, you can do so for 20 years without any problems. Sounds like a fair deal? Then you will also be pleased to know that on every product we give you a 5-year guarantee* and that your luminaire comes to you in 100% plastic-free packaging.

*The applicable conditions of guarantee are available to view at weverducre.com
Es gelten die auf weverducre.com verfügbaren Garantiebedingungen




Das Wichtigste für uns sind Leuchten, die Ihnen auch nach vielen Jahren noch freundlich entgegenstrahlen. Wie wir das hinbekommen? Mit einer Produktqualität, die den Standards der Ökodesign-Richtlinie entspricht und Ersatzteilen, die besonders lange verfügbar sind. Sollten Sie Ihre LED-Engine also einmal austauschen müssen, ist das 20 Jahre lang problemlos möglich. Klingt nach einem fairen Deal? Dann wird es Sie auch freuen, dass wir Ihnen auf jedes Produkt 5 Jahre Garantie* gewähren und Ihre Leuchte in einer 100 % plastikfreien Verpackung zu Ihnen kommt.

“Making products with a long life time is part of our sustainability concept.”

JOHAN DE SMEDT
MANAGING DIRECTOR



weverducre.com/sustainability

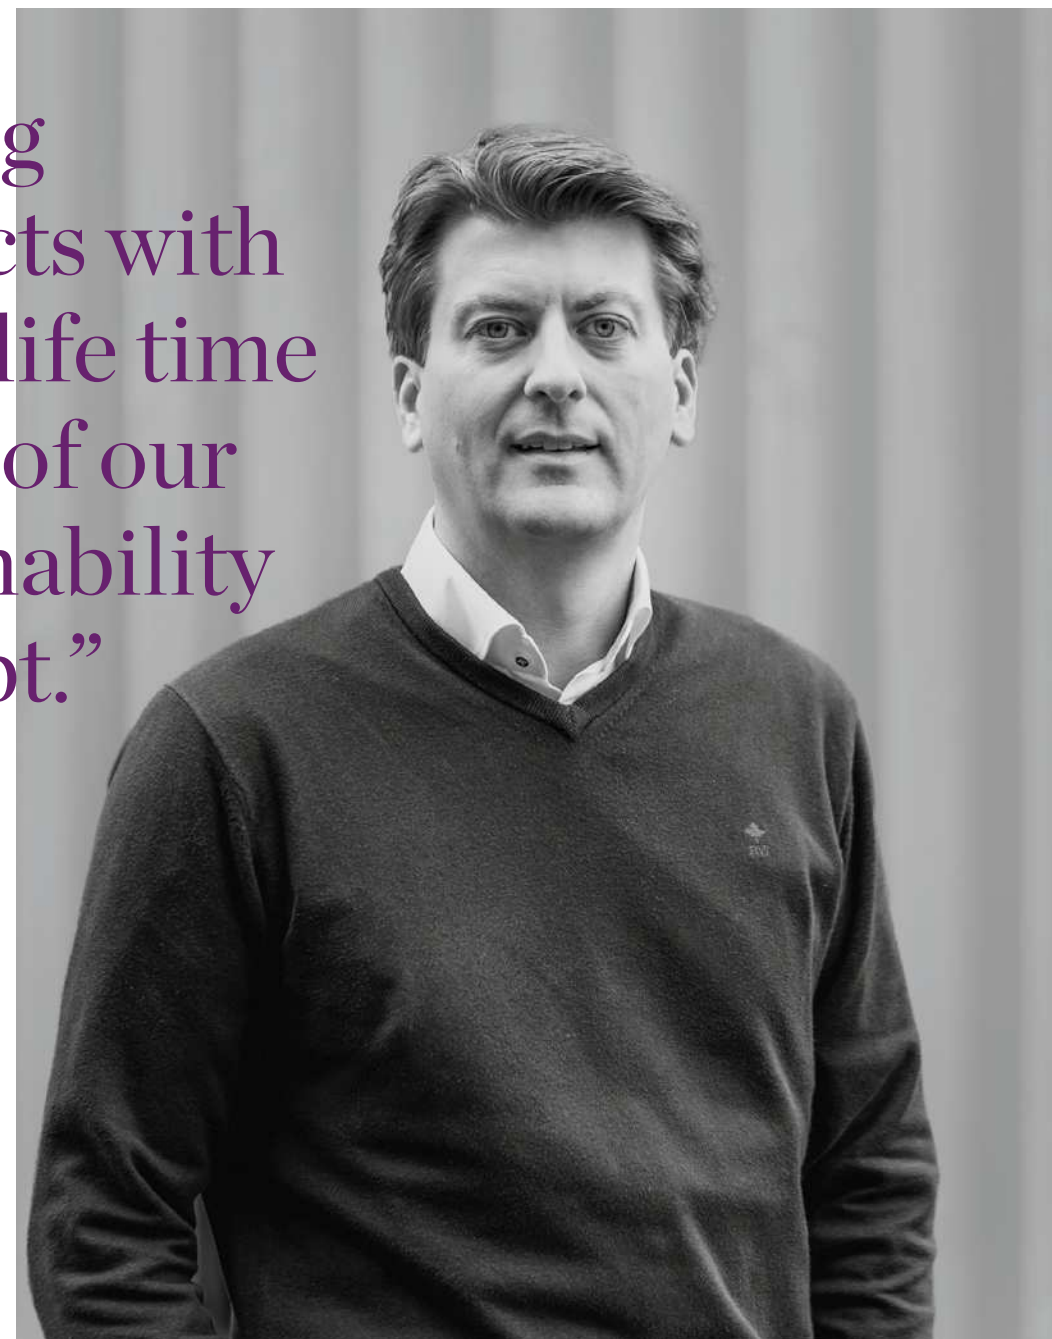


“A Sustained Colour
is characterised
by long-term
validity and
versatility.”

OLIVER MÄRSCH
INTERNATIONAL SALES DIRECTOR
MEMBER OF COLORNETWORK®



weverducre.com/sustainability-products

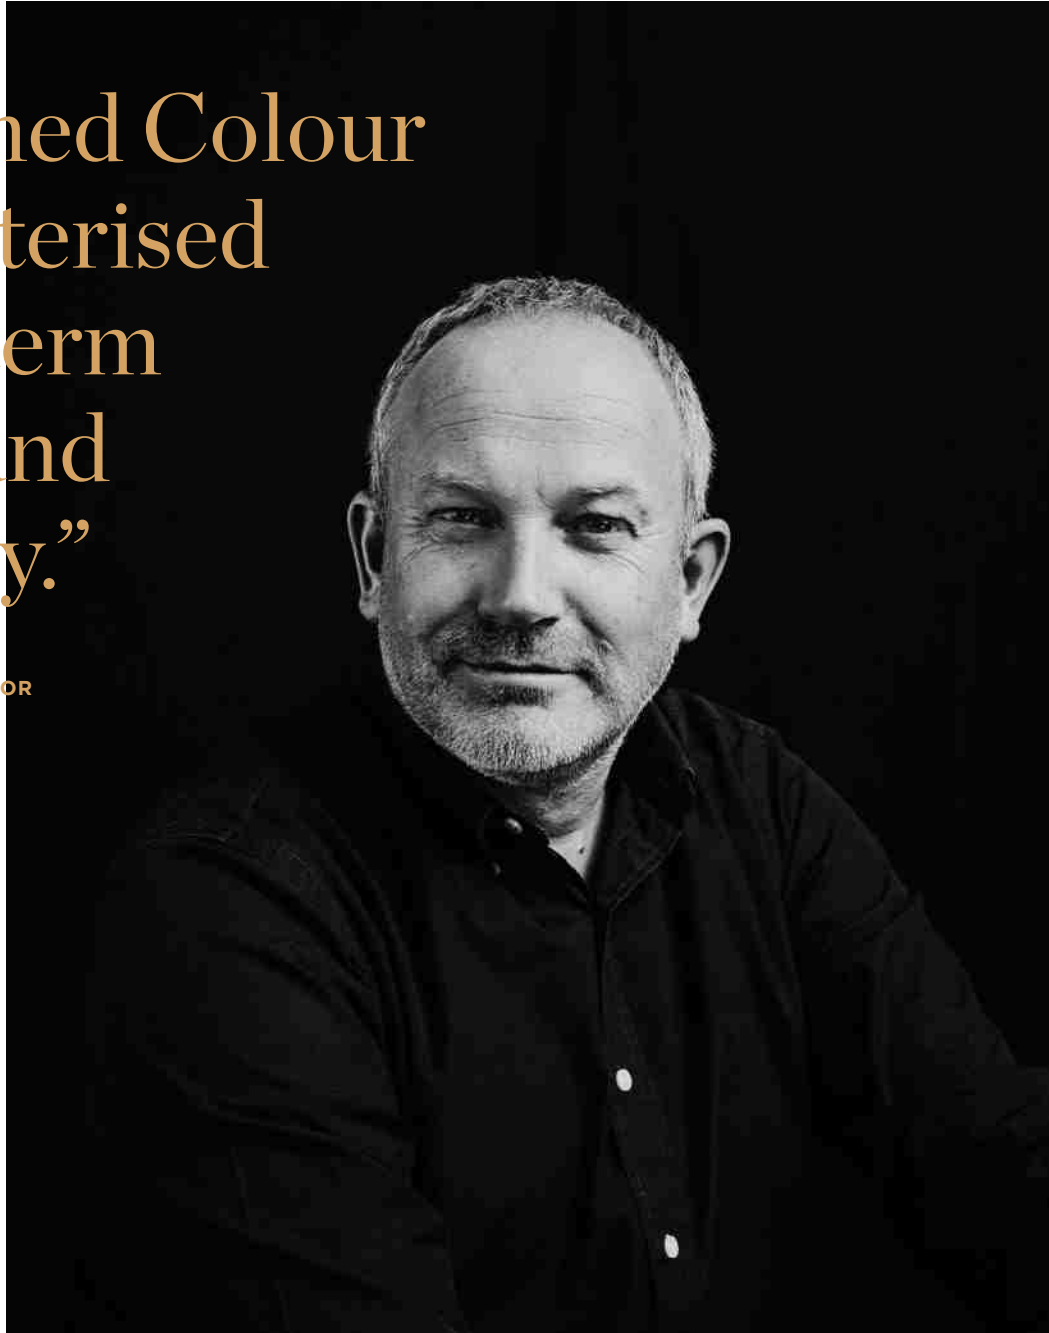

SUSTAINABLE BY COLOUR


WE ARE COMMITTED



Can colour be more than just a passing trend?
It can: At least according to COLORNETWORK®.
The interior design collective specialises entirely
in sustainable colours and materials. We loved this
idea so much that we included it in our luminaire
collections. Certain luminaires are exclusively avail-
able in the Sustained Colours, so they can therefore
combine particularly well with other products of
this type of colour. Incidentally, this is equally true
of our standard collection of luminaires, which also
blend harmoniously into the colourful world of
Sustained Colours.

Kann Farbe mehr sein, als nur ein flüchtiger Trend?
Sie kann. Zumindest wenn es nach dem Interieur-
Kollektiv COLORNETWORK® geht, das sich ganz
auf nachhaltige Farben und Materialien spezialisiert
hat. Eine Idee, die wir so toll fanden, dass wir sie in
unsere Leuchtenkollektionen aufgenommen haben.
Manche Leuchten sind exklusiv in den „Sustained
Colours“ erhältlich und lassen sich so besonders gut
mit anderen Produkten dieses Farbtyps kombinieren.
Das funktioniert übrigens auch mit den Leuchten
unserer Standard-Kollektion, die sich harmonisch in
die Farbwelt der „Sustained Colours“ einfügen.

COLOR
NET
WORK®

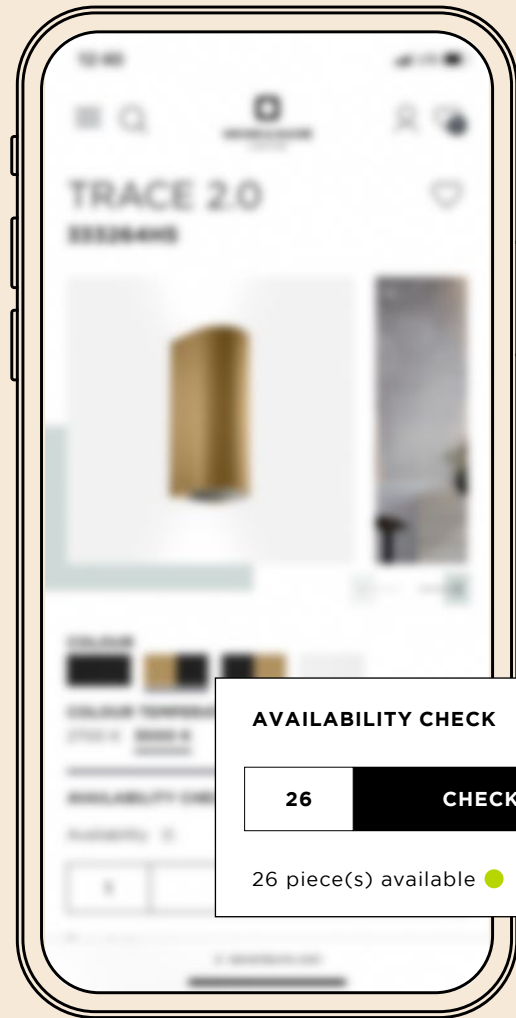

“Great,
see you in
two days.”

MARGOT HUYSENTRUYT

AVAILABILITY IS THE BEST ABILITY

READY FOR AN ONLINE DATE

Well, that’s how it is when you have a “product crush”: When there is a luminaire you simply can’t resist, then you have to have it right away. The good news is: That is not a problem with our super-fast delivery service. Because 90% of the collection can be shipped directly from our warehouse in Kortrijk. Without a long waiting time. And, of course, without any plastic packaging. If you want to find out more exact details: Then simply check the availability of your favourite product online. In the meantime, sit back and put the champagne to chill.

Tja, so ist das mit dem „Product Crush“: Hat man sich erst mal in eine Leuchte verliebt, will man sie natürlich sofort bei sich haben. Die gute Nachricht: Mit unserem superschnellen Lieferservice ist das kein Problem. Denn 90 % der Kollektion kann direkt von unserem Lager in Kortrijk aus versandt werden. Ohne lange Wartezeiten. Und natürlich ganz ohne Plastikverpackung. Sie möchten’s genau wissen? Dann checken Sie die Verfügbarkeit Ihres Lieblings doch einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.




weverducre.com/products



AN INFINITE LOVE STORY

WITH OUR LOCAL PLANET

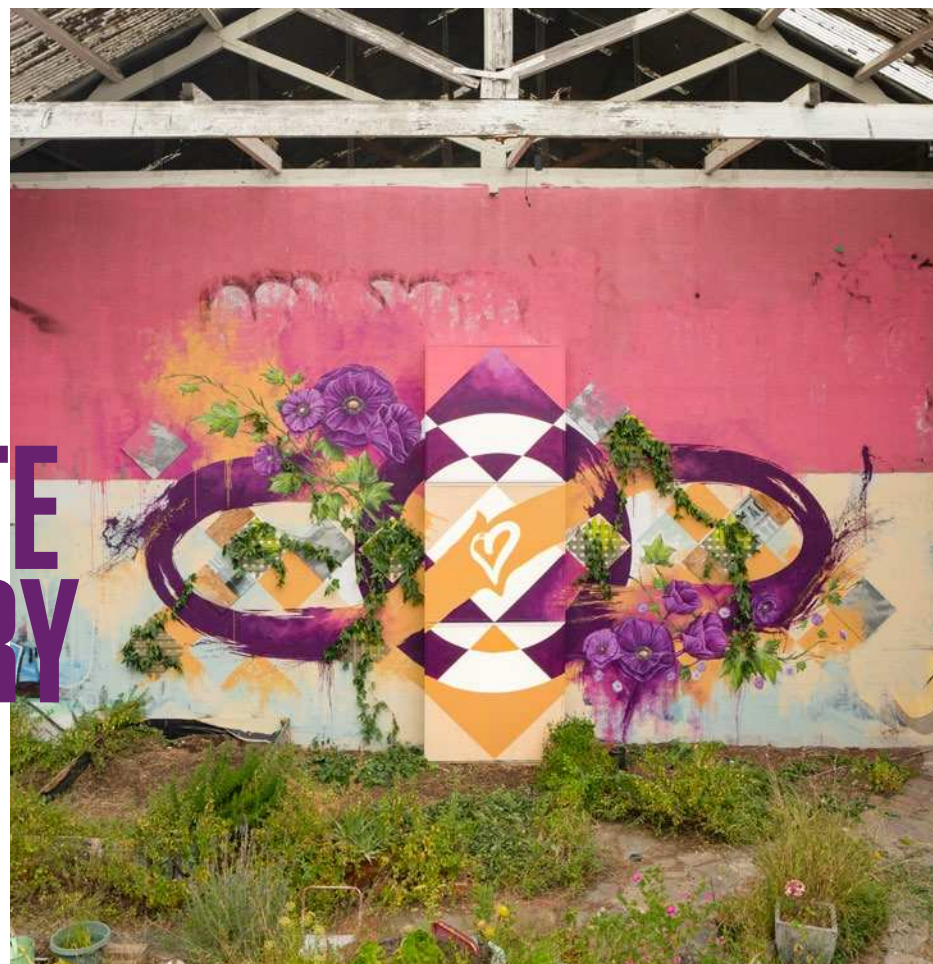

“In nature, everything is in flux,” states Meggs. “It’s an eternal cycle of growth and decay in which we are also involved.” This mural is created in a disused factory site where flowers and grass are slowly growing back again. “Creating the piece in an abandoned location further adds to the story of growth and life cycles. I combined rigid, geometric shapes with organic floral elements and added another dimension to the mural using repurposed materials found on site.” Meggs has thus created a work that powerfully expresses our connection with nature. The use of bright colours can remind us how important it is to treat the planet with care.

„In der Natur ist alles im Fluss“, sagt Meggs. „Es ist ein ewiger Kreislauf aus Werden und Vergehen in den auch wir mit eingebunden sind.“ Deshalb hat sein Mural auch einen ganz besonderen Platz. Ein altes Fabrikgelände, in dem langsam wieder Blumen und Gräser wachsen. „Ich wollte diesen Ort unbedingt miteinbeziehen. Also habe ich strenge, geometrische Formen mit floralen Elementen kombiniert. Und dem Mural mit realen Fundstücken eine weitere Dimension hinzugefügt.“ So hat Meggs ein Werk geschaffen, das unsere Verbundenheit mit der Natur eindringlich zum Ausdruck bringt. Und uns in leuchtenden Farben daran erinnert, wie wichtig ein sorgsamer Umgang mit dem Planeten ist.



„Nature is an eternal cycle of growth and decay.“

DAVID “MEGGS” HOOKE
MELBOURNE | AUSTRALIA



„Light offers
endless
possibilities
to a designer.“

ANNA AND CLEMENS

SAY HELLO TO SOME OF OUR DESIGNERS ANNA BERRUEZO SOLER AND CLEMENS HAMMER

NEWS FROM OUR DESIGN DEPARTMENT





With their clear, minimalist style, Anna Berruezo Soler and Clemens Hammer are among the most interesting newcomers of their generation. That's why these amiable designers are a perfect match for Wever & Ducré. Here they are working together with a team of external and internal designers on innovative, new products, which are attractive, in particular, due to the restrained style. From where do Anna and Clemens get most of their inspiration? "From all the odds and ends lying on our desk," notes Clemens with a smile. "They have often given us new ideas."

Mit ihrem klaren, minimalistischen Stil gehören Anna Berruezo Soler und Clemens Hammer zu den interessantesten Newcomern ihrer Generation. Deshalb passen die sympathischen Designer auch perfekt zu Wever & Ducré. Hier arbeiten sie gemeinsam mit einem Team aus externen und internen Designern an innovativen, neuen Produkten, die vor allem durch ihre zurückhaltende Form bestechen. Wovon sich Anna und Clemens dabei am meisten inspirieren lassen? „Von dem vielen Kleinkram auf unserem Schreibtisch,“ lacht Clemens. „Der hat uns schon oft auf neue Ideen gebracht.“

WE ARE MORE THAN ONE

Have you discovered our family icon? Yay! Then you know your favourite luminaire is at least available in three versions.

Sie haben unser Family-Icon entdeckt? Yey! Dann ist Ihre Lieblingsleuchte in mindestens drei Varianten erhältlich.

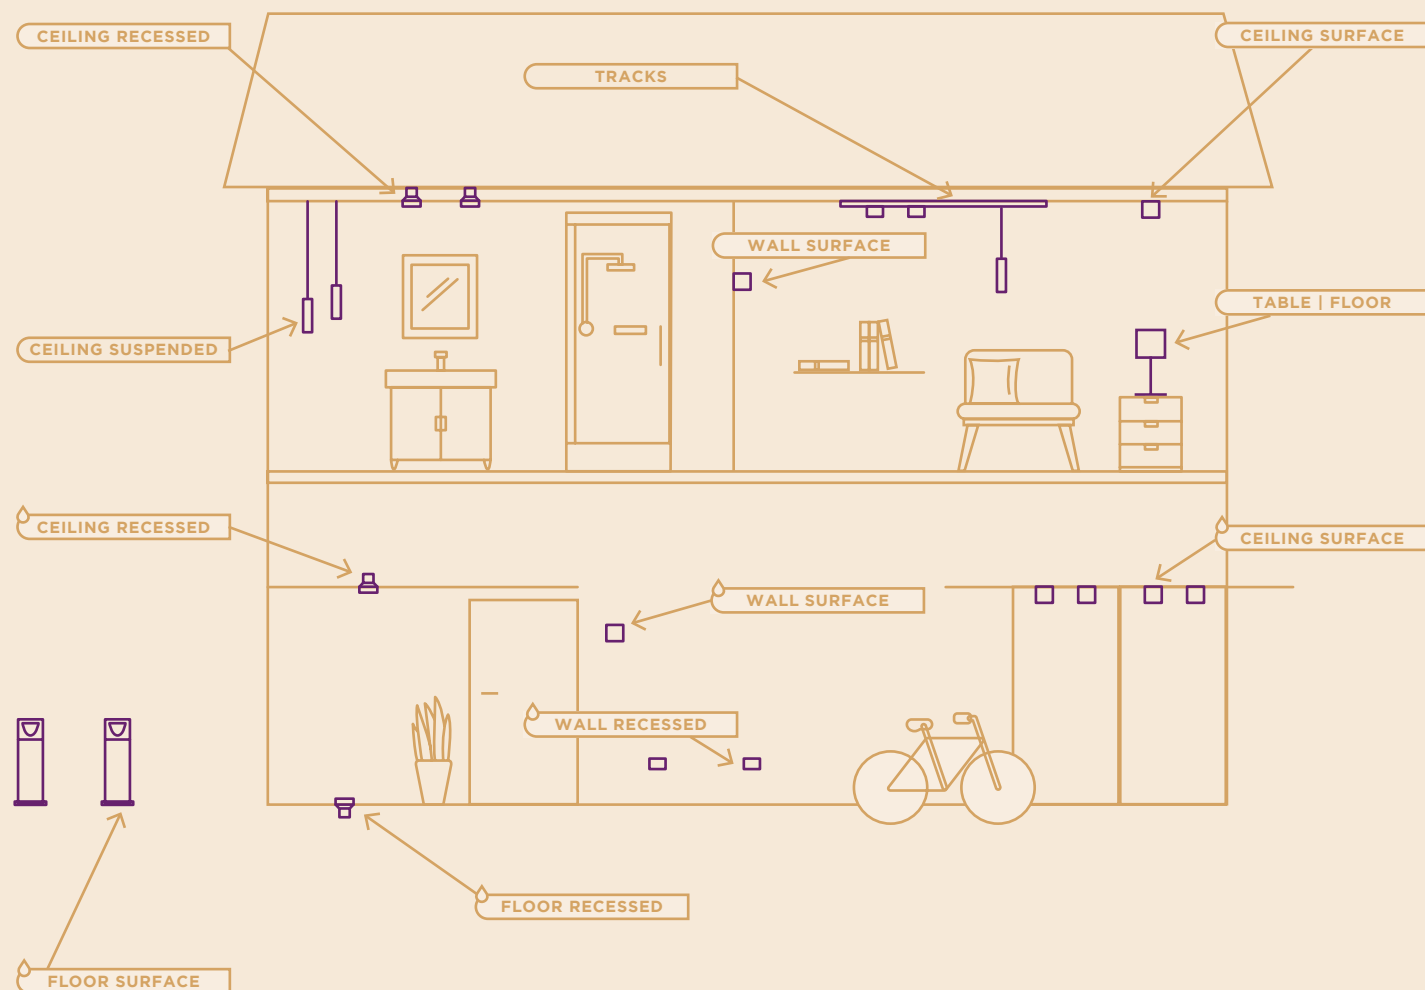

WE THOUGHT THAT

THREE OF US IS A PRODUCT FAMILY

Have you got a design that you just love and wish you had it all around you? That's easy. Just take a quick look to see if you recognise the family icon and you can realise your wish. After all, luminaires with this symbol come in at least three versions. This means rooms can be designed with a completely uniform style. And by the way: You can, of course, also pursue your design for harmony outdoors. Our outdoor versions make this equally possible.

Sie haben sich so sehr in ein Design verliebt, dass Sie es am liebsten ständig um sich hätten? Kein Problem. Einfach kurz nachsehen, ob Sie das Family-Icon entdecken und schon steht Ihrem Wunsch nichts mehr im Wege. Schließlich sind Leuchten mit dieser Kennung in mindestens drei Varianten erhältlich. So lassen sich Räume in einem ganz einheitlichen Stil gestalten. Übrigens: Ihrem Harmoniebedürfnis können Sie natürlich auch im Außenbereich nachgehen. Unsere Outdoor-Versionen machen's möglich.

PRODUCT FAMILIES

CEILING RECESSED

CEILING SURFACE

TRACKS

CEILING SUSPENDED

WALL RECESSED

WALL SURFACE

TABLE | FLOOR

CEILING RECESSED

CEILING SURFACE

WALL RECESSED

WALL SURFACE

FLOOR RECESSED

FLOOR SURFACE

HIGHLIGHT FAMILIES

CENO								
	1.0 RECESSED 99	2.0 RECESSED 101	2.0 CEILING 201	4.1 CEILING 203	ON STREX 261	FORT ON 3-PHASE TRACK 299	WALL 487	
MATCH								
	POINT 93	RECESSED 95	STICK TRIMLESS 97	CEILING 199	ON STREX 259	SUSPENDED 369	SNOOZE 483	WALL 485
PIRRO								
	PETIT RECESSED 75	RECESSED 77	PETIT CEILING 175	SPOT 1.0 CEILING 177	SPOT 4.1 CEILING 177	OPAL CEILING 181	ON 1-PHASE TRACK 279	SYSTEM 309
TRACE								
	CEILING 173	1.1 SUSPENDED 357	2.0 SUSPENDED 359	CHANDELIER 361	SLIM 473	WALL 475		
FINLIN								
	CEILING 225	SUSPENDED 417	WALL 1.0 555	WALL 4.0 555	WALL ROUND 559			
ODREY								
	ON STREX 269	ON 1-PHASE TRACK 291	SUSPENDED 333	MULTI 333	WALL 491			

HIGHLIGHT FAMILIES

ROOMOR 32 – 33	 OFFICE CEILING 223	 OFFICE ON TRACK 305	 SUSPENDED 407	 OFFICE SUSPENDED 411	 WALL 527	 WALL 535	 TABLE 581	 FLOOR 589
DRO 34 – 35	 CEILING 211	 ON TRACK 287	 SUSPENDED 373	 WALL 511	 WALL 511	 TABLE 575	 TABLE / FLOOR 577	 FLOOR 585
MIRRO 34 – 35	 CEILING 217	 SUSPENDED 397	 WALL 519	 WALL 523	 TABLE 579	 FLOOR 587		
WIRO 36 – 37	 CEILING 215	 CONE 379	 WIRO 381	 DIAMOND 385	 GLOBE 393	 WALL 517		
J.J.W. 38 – 39	 CEILING 221	 SUSPENDED 399	 SUSPENDED 401	 WALL 537	 WALL 539			





CENO
ON TRACK



OH, HOW SWEET OUR CENO FAMILY

SMALL SPOTS MASSIVE IMPACT

While the CENO family of spots are very discreet, that doesn't mean they are bashful. Our designers simply wanted to create luminaires that make even small or angled rooms shine with minimal effort. For this reason, CENOs come in a wide range of surface and recessed versions and even as inset for our STREX system. If you are looking for a discreet wall luminaire: Then we recommend the Wall Edition with indirect light. Like all CENOs, it is also available in a wide variety of colours.

Dass die Spots der CENO-Family so dezent sind, hat nichts mit Schüchternheit zu tun. Unsere Designer wollten einfach nur Leuchten entwerfen, die selbst kleine oder verwinkelte Räume mühelos zum Strahlen bringen. Deshalb gibt's unsere CENOs auch in vielen Auf- und Einbauvarianten und sogar als Insets für unser STREX-System. Sie suchen nach einer dezenten Wandleuchte? Dann empfehlen wir die Wall Edition mit indirektem Licht. Auch sie ist, wie alle CENOs, in vielen Farben erhältlich.



weverducre.com/ceno

PIRRO 4.0
OPAL | SPOT
ON 1-PHASE TRACK

PERFECT ANGLES WITH PIRRO FAMILY

WE LOVE SHARP LINES

Especially when they look as great as in the PIRRO family. Which is why the luminaire designed in Bauhaus style is one of our absolute favourites. This also applies to the flexible track system as well as the stylish recessed and surface versions. How do these versions work? Regardless of whether a SPOT or OPAL, the insets are individually put together on the pre-assembled track as a SYSTEM to create a small work of art on the ceiling. If you don't want to limit yourself at all, you can also simply combine the various insets with a 1-phase track. Everything is possible.

Vor allem, wenn sie so toll aussehen wie bei der PIRRO Family. Deshalb gehört die im Bauhaus-Stil designte Leuchte auch zu unseren absoluten Favourites. Und zwar nicht nur in der formschönen Ein- oder Aufbauvariante, sondern auch als flexibles Schienensystem. Wie's funktioniert? Einfach Insets, ob SPOT oder OPAL, individuell und auf der vorgefertigten Schiene als SYSTEM zusammenstellen und schon entsteht ein kleines Kunstwerk an der Decke. Wer sich gar nicht einschränken will, kann die verschiedenen Insets auch einfach mit einer Stromschiene kombinieren. Alles ist möglich.



weverducre.com/pirro



75 | 77



175 | 177



279 | 309



ROOMOR OFFICE
CABLE SUSPENDED



ROOMOR FAMILY HAS IT

A TRUE ALLROUNDER

The rumours are true: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire or discreet table lamp. And because ROOMOR can be fully adapted to its surroundings when it comes to materials, all of the shade designs are offered in powder-coated aluminium and some also in finely textured felt. And to make things a little more fun in the office, ROOMOR is now also available as a glare-free office light with an UGR value ≤ 19 . Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen in pulverbeschichtetem Aluminium und manche auch in fein strukturiertem Filz erhältlich. Und damit es auch im Büro etwas abwechslungsreicher wird, gibt es ROOMOR nun auch als blendfreie Leuchte mit einem UGR Wert ≤ 19 . Flexibler geht's nicht.



weverducre.com/roomor



223



305



407 | 411



527



581

ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN

PRODUCTS WITH EMOTIONAL ADDED VALUE



At Studio 13&9, Anastasija and Martin Lesjak focus entirely on “transferring the creative energy of a brand to the product”. This approach is also reflected in all the collections that the Austrian designer team has designed exclusively for Wever & Ducré. DRO stands out in particular, where the designer duo has been able to take the fleeting beauty of a dewdrop and capture it permanently. But the source of inspiration for 13&9 does not just come from nature, but many other creative areas, like the arts, fashion and architecture. It is a transdisciplinary approach, which is expressed in a particularly attractive manner in the MIRRO collection, designed together with the designer Sabrina Stadlober. The metallic, reflective surface of the luminaires allows both the viewer and the surroundings to be reflected at the same time. An artisan’s device, used in this instance by 13&9, to closely connect the user with the product. And it is just such details, in the pieces designed by 13&9, that draw the fascination of everyone.

Anastasija und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in allen Kollektionen wider, die das österreichische Designteam exklusiv für Wever & Ducré entworfen hat. Allen voran: DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallischreflektierenden Oberfläche der Leuchten spiegeln. Ein gekannter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.



weverducre.com/dro





BERND STEINHUBER


TIME TO MAKE A STATEMENT

And with WIRO, Bernd Steinhuber has accomplished exactly that. What is the greatest inspiration of this Austrian designer born in 1972? Simply put: Everything. That's why his little sketchbook is his constant companion. "Ideas are fleeting," he says, "and they don't stick to office hours." That's an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.



weverducre.com/wiro-configurator

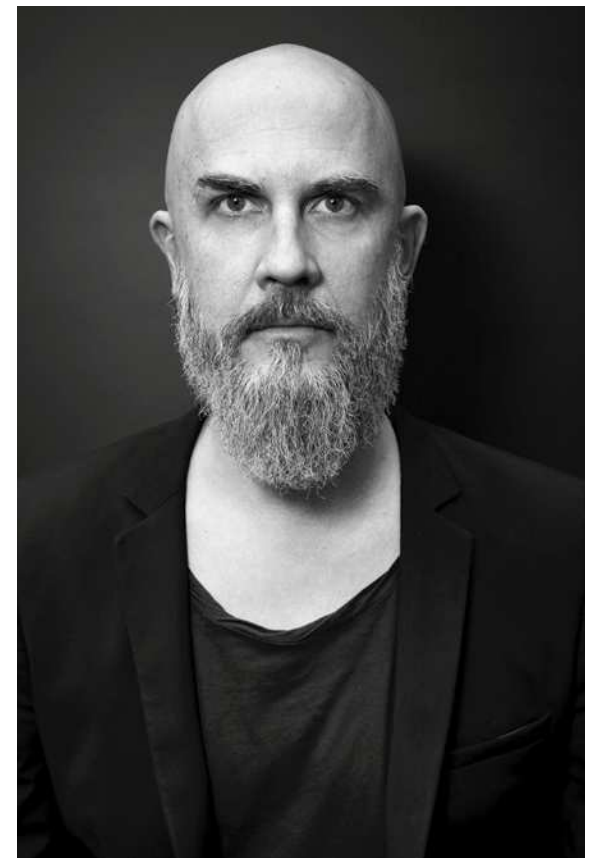


J.J.W. BY JULES WABBES

ELEGANT AND TIMELESS

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

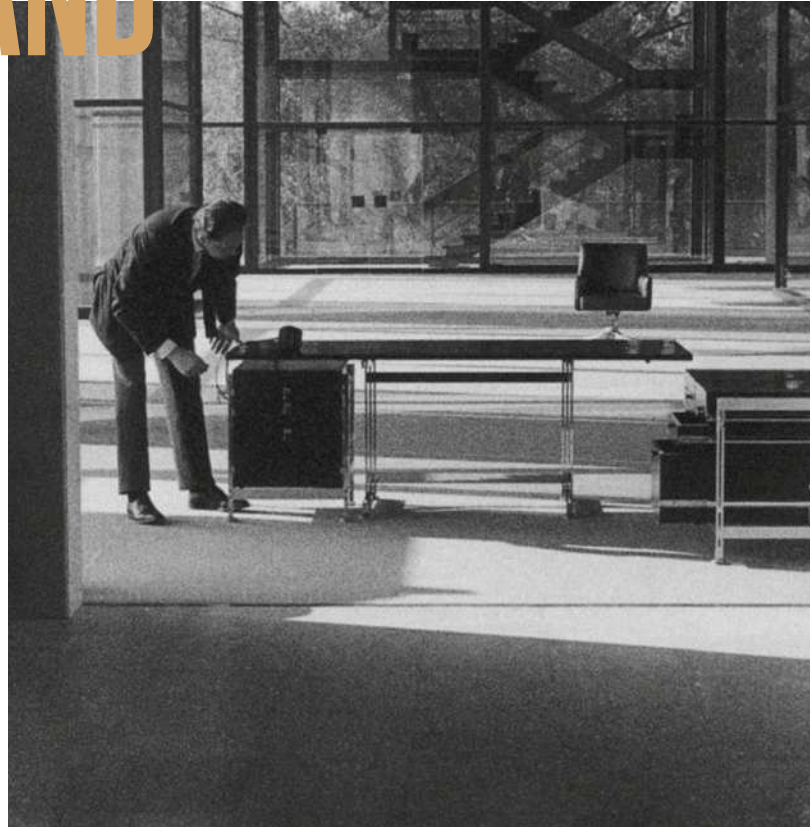

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971,
©Wabbes Sofam, Brussels, 2017.



weverducre.com/jjw



IN

DOOR

CEILING
RECESSED
SPOTLIGHTS



DEEP BIJOU
47



DEEP PETIT
49



DEEP
51



DEEPER
53



DEEP ADJUST
PETIT
55



DEEP ADJUST
57



DEEP ADJUST
TRIMLESS
61



DEEP ASYM
ADJUST
63



DEEP ADJUST
FORT
65



SPINEO
67



RONY
69



RON
71



PIRRO PETIT
75



PIRRO
77



PLANO PETIT
79



PLANO
81




PLANO FORT
83




STRANGE PETIT
85



STRANGE
87



SNEAK TRIM
89



SNEAK TRIMLESS
91



MATCH POINT
93

CEILING SEMI-
RECESSED
LUMINAIRES



MATCH
95



NEW

MATCH STICK
TRIMLESS
97



CENO 1.0
99



CENO 2.0
101



NEW

BLIEK PETIT
TRIMLESS
103



BLIEK PETIT
103



BLIEK ROUND
105



BLIEK SQUARE
109



RUVI
111

CEILING
RECESSED
IP-RATED



NEW

MATCH POINT IP44
93



NEW

DEEP POINT IP44
115



DEEP BIJOU IP65
117



DEEP IP44 | IP65
119



DEEPER IP44
121



TAO IP65
123



RINI SNEAK IP44
125



LUNA ROUND |
SQUARE IP44
127



PLANO IP44
131



MIRBI IP44 1.0 | 2.0
133



CITY IP44
135

CEILING
RECESSED

42 – 135

HOW DEEP IS YOUR DEEP?

DEEP

FIX



bijou 1.0
LED




bijou 2.0
LED




petit 1.0
LED



1.0
LED | MR16 | PAR16



point IP44 1.0
LED




bijou IP65 1.0
LED



IP44 / IP65 1.0
LED | MR16 | PAR16

DEEP ADJUST

ADJUSTABLE




petit 1.0
LED




1.0
LED | MR16 | PAR16



trimless 1.0
LED | MR16 | PAR16



2.0
LED | PAR16



fort 1.0
LED

DEEPER

FIX



1.0
LED | MR16 | PAR16



IP44 1.0
LED | MR16 | PAR16


DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and emit their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP is available in different versions and a variety of sizes. And as an IP44 variant with splash protection as well as an IP65 variant with protection against water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEPER is also available as an IP44 variant, which disappears into your ceiling and is virtually invisible. Practical – the entire DEEP family can be controlled via smartphone.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante spritzwasser- und als IP65-Variante strahl-wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die gesamte DEEP Familie kann via Smartphone gesteuert werden.

DEEP ASYM

ADJUSTABLE



1.0
LED | PAR16


DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can wander around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ASYM is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ASYM die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.



HAVE A LOOK

weverducre.com/deep



DEEP bijou

CEILING RECESSED



1.0

LED LED COB 5W | 250mA | 17V
excl. driver
aluminium powder coated

IP20 A 30° SDCM2 L80I50K 0.065kg

wire springs 50-52 85 4-25

	CODE
	165161W_
	165161M_
	165161G_
	165161B_

blade springs 51-54 85 min. 4

	CODE
	165161W_C
	165161M_C
	165161G_C
	165161B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	380 >90	5

ALWAYS USE

driver | 250mA

	CODE
7.2W dim	90226401
10W DALI	90249402

more options and specs on page 736

2.0

LED 2x LED COB 5W | 250mA | 34V
excl. driver
aluminium powder coated

IP20 A 30° SDCM2 L80I50K 0.15kg

wire springs 50-52x100-104 60 4-25

	CODE
	165261W_
	165261M_
	165261G_
	165261B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5



ALWAYS USE

driver | 250mA | only 1x needed

	CODE
10.5W dim	90226501
10W DALI	90249402

more options and specs on page 736





DEEP petit

CEILING RECESSED



1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 34° SDCM2 L80|50K 0.04kg

wire springs 68-70 50 4-23

		CODE
		153561W_
		153561S_
		153561M_
		153561G_
		153561B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 16V	440 >90	9

ALWAYS USE

driver | 350mA

		CODE
10W		90223401
10W dim		90223402
17W DALI		90243601

more options and specs on page 736



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80150K 0.31kg

wire springs 76-79 90 4-27

CODE	
	184261W_
	184261S_
	184261M_
	184261G_
	184261B_

blade springs 76-79 90 min 10

CODE	
	184261W_C
	184261B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
4000K	615/825 >90	7
2000-3000K	380/560 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 736

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.25kg

wire springs 76-79 90 4-27

CODE	
	112110W0
	112110S0
	112110M0
	112110G0
	112110B0

blade springs 76-79 90 min 10

CODE	
	112110W0C
	112110B0C

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.29kg

wire springs 76-79 105 4-27

CODE	
	112120W0
	112120S0
	112120M0
	112120G0
	112120B0

blade springs 76-79 105 min 10

CODE	
	112120W0C
	112120B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743

DEEP

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

	CODE
	152361W_
	152361S_
	152361G_
	152361Q_
	152361B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	505/685 >90	3
3000K	550/740 >90	5
2000-3000K	380/560 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.11kg

wire springs 76-79 100 4-38


	CODE
	152110W0
	152110S0
	152110G0
	152110Q0
	152110B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.15kg

wire springs 76-79 115 4-38

	CODE
	152120W0
	152120S0
	152120G0
	152120Q0
	152120B0

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743




SHOWROOM JEUDAN | JEUDAN DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK



DEEP ADJUST petit

CEILING RECESSED



1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°/355° A-34° SDCM2 L70/50K 0.05kg

wire springs 68-70 65 4-23

	CODE
	153661W_
	153661M_
	153661G_
	153661Q_
	153661B_

blade springs 69-71 65 min 8

	CODE
	153661W_C
	153661B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 16V	440 >90	9


ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°/355° A 36° SDCM2 L80/50K 0.23kg

wire springs 86-89 90 4-23

CODE	
	184361W_
	184361S_
	184361M_
	184361G_
	184361Q_
	184361B_

blade springs 86-89 90 min 6

CODE	
	184361W_C
	184361B_C


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K	380/560 >90	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°/355° 0.17kg

wire springs 86-89 90 4-23

CODE	
	112310W0
	112310S0
	112310M0
	112310G0
	112310Q0
	112310B0

blade springs 86-89 90 min 6

CODE	
	112310W0C
	112310B0C

ALWAYS USE


driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739

DEEP ADJUST

CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°/355° 0.21kg

wire springs 86-89 105 4-23

CODE	
	112320W0
	112320S0
	112320M0
	112320G0
	112320Q0
	112320B0

blade springs 86-89 105 min 6

CODE	
	112320W0C
	112320B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim



CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



DEEP ADJUST

CEILING RECESSED



2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.61kg

wire springs 89x172-178 90 4-23

	CODE
	184761W_
	184761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/715	>90	3
3000K	2x575/775	>90	5
4000K	2x620/830	>90	7
2000-3000K	2x380/560	>90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.42kg

wire springs 89x172-178 105 4-23

	CODE
	112720W0
	112720B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° A-36° SDCM2 L80|50K 0.23kg

	CODE
	184861W_
	184861G_
	184861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K	380/560 >90	9

ALWAYS USE


alu plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE


alu plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

alu plasterkit 105-110 110 12.5, 15, 20, 25

	CODE
	90017209

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 743





DEEP ASYM adjust

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° SDCM2 L80|50K 0.25kg

wire springs 87-88 100 4-25

	CODE
	1844A1W_
	1844A1S_
	1844A1G_
	1844A1B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460/615 >90	3
3000K	495/665 >90	5
2000-3000K	330/485 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.23kg

wire springs 87-88 115 4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 743



DEEP ADJUST fort

CEILING RECESSED

CEILING RECESSED



1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°/355° A 34° SDCM2 L80/50K 0.36kg

wire springs 126-130 130 4-25

CODE	
112961W	
112961B	

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2490 >90	5
4000K	2680 >90	7

ALWAYS USE

driver | 700mA

CODE	
30W dim	90225702
28W DALI	90245801

more options and specs on page 739





PRIVATE RESIDENCE BELGIUM



SPINEO
CEILING RECESSED



- 1.0**
- PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
- IP20 0°-35°|355° 0.18kg

wire springs	79-83 L.70 4-16
	CODE
	160120W0
	160120B0

blade springs	79-83 L.70 min 4
	CODE
	160120W0C
	160120B0C

OPTIONAL	
PAR16 6.5W GU10 phase-cut dim	
	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5
more lamps and specs on page 743	





1.0 LED

 LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.34kg

wire springs  102-104  90  4-25

	CODE
	110261W_
	110261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
2000-3000K	380/560 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.32kg

wire springs  102-104  100  4-25

	CODE
	110120W0
	110120B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5


more lamps and specs on page 743





RON

CEILING RECESSED



1.0 LED

 LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.36kg

wire springs  102-104  90  4-25

CODE	
	111461W_
	111461B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
2000-3000K	380/560 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



2.0 LED

 2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.73kg

wire springs  102x210  90  4-25

CODE	
	111561W_
	111561B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x530/710 >90	3
3000K	2x575/770 >90	5
2000-3000K	2x380/560 >90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737



1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.34kg

wire springs  102-104  100  4-25


CODE	
	11120W0
	11120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743



2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.69kg

wire springs  102x210  100  4-25

CODE	
	111220W0
	111220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743

HIDDEN CHAMPIONS

FLAT ‘N’ FANCY



Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some requirements you’ll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts. The solution? Extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specially designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.





DEEP bijou 2.0	p. 47	60 mm
DEEP petit	p. 49	50 mm
DEEP ADJUST petit	p. 55	65 mm
PIRRO petit	p. 75	60 mm
PIRRO 2.0 4.0 6.0	p. 77	60 mm
PLANO petit	p. 79	65 mm
STRANGE petit	p. 85	65 mm
MATCH point 1.0 trimless	p. 93	60 mm
MATCH 1.0 trimless 2.0	p. 95	60 mm

HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

MATCH stick 1.0 trimless	p. 97	60 mm
CENO 2.0 3.0	p. 101	60 mm
BLIEK petit	p. 103	60 mm
RINI SNEAK IP44	p. 125	46 mm
LUNA ROUND IP44 1.0 LED	p. 127	50 mm
LUNA SQUARE IP44 1.0 LED	p. 129	50 mm
MIRBI IP44	p. 133	50 mm
CITY IP44	p. 135	50 mm

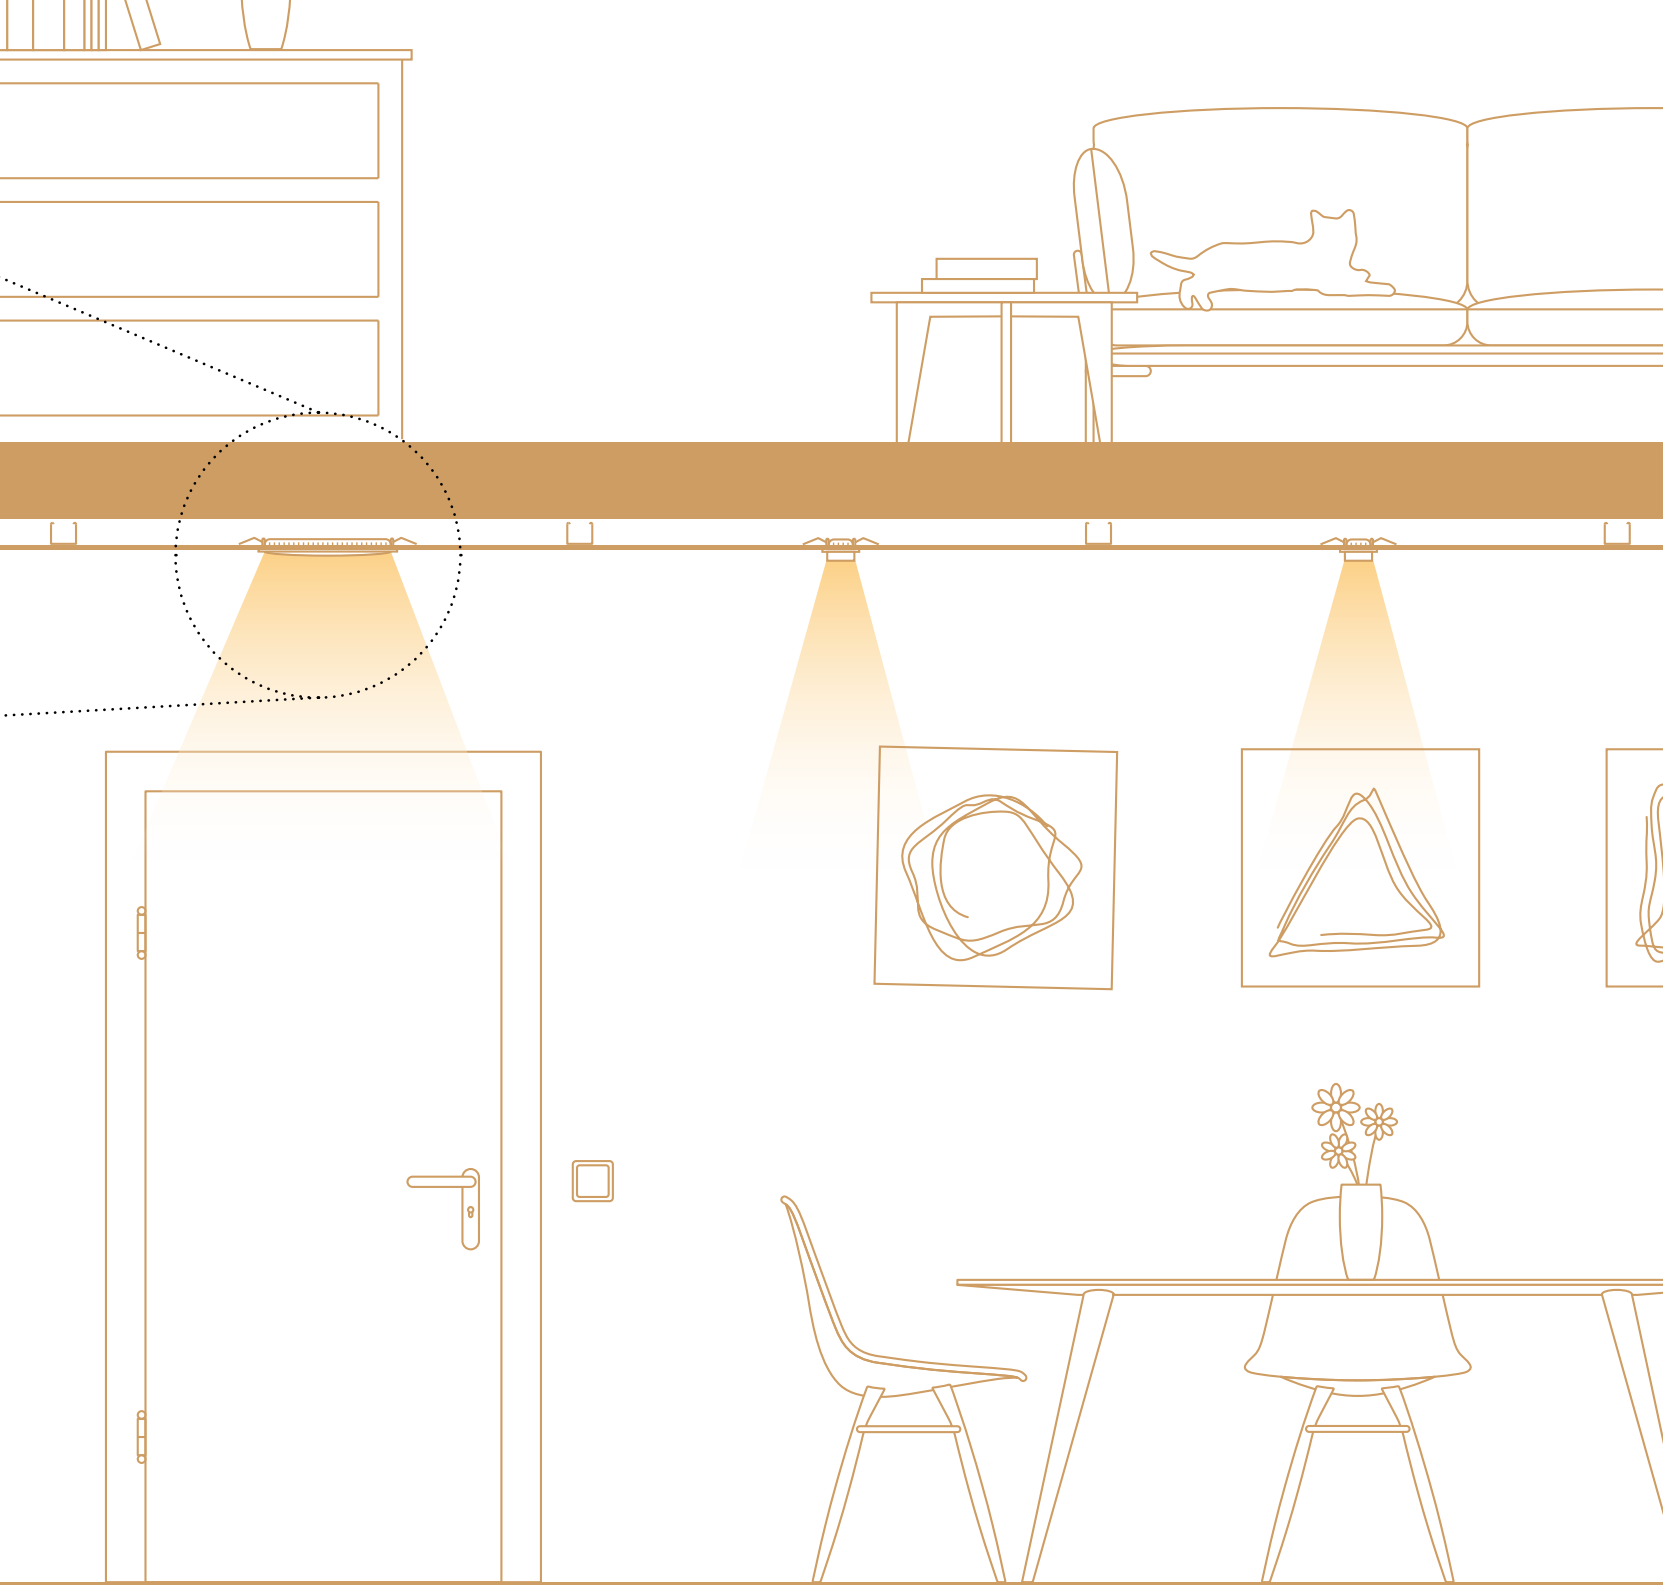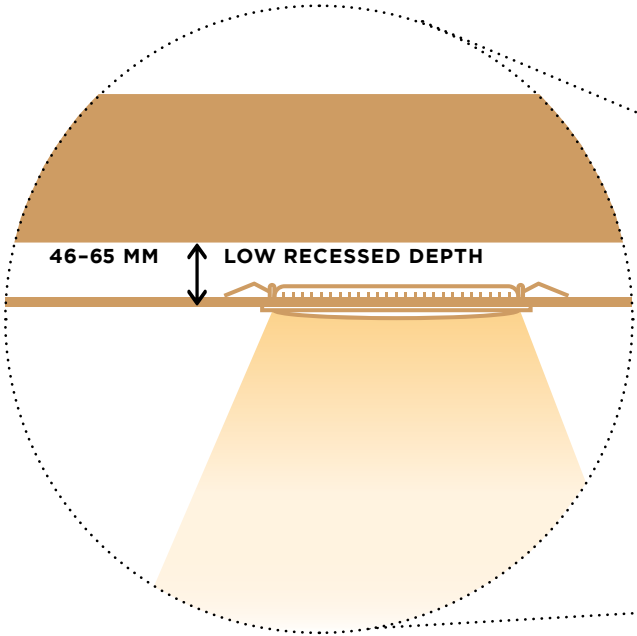

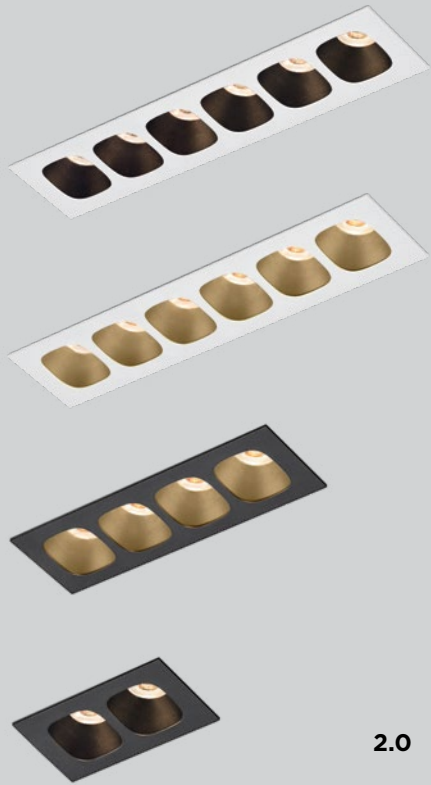

2.0

LED COB 5W | 350mA | 12V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80/50K 0.10kg

wire springs 60x33 60 4-25

CODE			
		129151E_	
		129151WM_	
		129151CH_	
		129151B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x170 >90	3
3000K	2x190 >90	5

ALWAYS USE

driver | 350mA

CODE	
4.5W dim	90223101
more options and specs on page 738	

4.0

LED COB 10W | 350mA | 24V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80/50K 0.17kg

wire springs 113x33 60 4-25

CODE			
		129251E_	
		129251WM_	
		129251CH_	
		129251B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x170 >90	3
3000K	4x190 >90	5

ALWAYS USE

driver | 350mA

CODE	
10W dim	90223402
more options and specs on page 738	

6.0

LED COB 14W | 350mA | 36V
excl. driver
aluminium powder coated

IP20 28° SDCM3 L80/50K 0.25kg

wire springs 166x33 60 4-25


CODE			
		129351E_	
		129351WM_	
		129351CH_	
		129351B_	



LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x170 >90	3
3000K	6x190 >90	5

ALWAYS USE

driver | 350mA



CODE	
15W dim	90223403
more options and specs on page 738	





OPTIONAL

honeycomb louver	CODE
	90051131

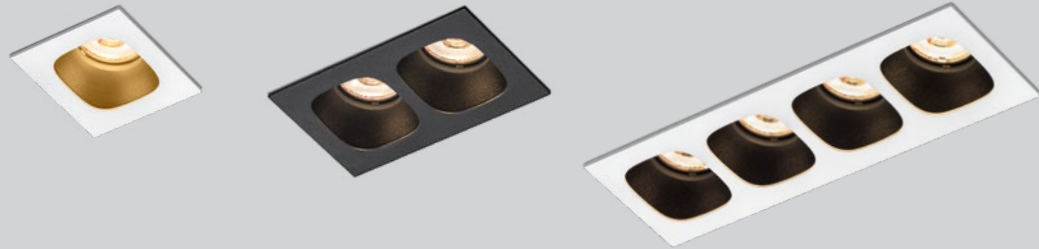

1.0

 LED COB 5W | 500mA | 9V
excl. driver
aluminium powder coated

 IP20  32° SDCM2 L70|55K 0.09kg


wire springs  50x50  85  4-25

	CODE
	150161E_
	150161J_
	150161K_
	150161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	420 >90	5

ALWAYS USE

driver 500mA	CODE
6.5W dim	90224301
20W DALI	90244604
more options and specs on page 737	



2.0

 2x LED COB 5W | 500mA | 18V
excl. driver
aluminium powder coated

 IP20  32° SDCM2 L70|55K 0.16kg


wire springs  93x50  60  4-25

	CODE
	150261E_
	150261J_
	150261K_
	150261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x420 >90	5

ALWAYS USE

driver 500mA only 1x needed	CODE
10W dim	90224503
20W DALI	90244604
more options and specs on page 738	



4.0

 4x LED COB 5W | 500mA | 36V
excl. driver
aluminium powder coated

 IP20  32° SDCM2 L70|55K 0.28kg


wire springs  181x50  60  4-25

	CODE
	150461E_
	150461J_
	150461K_
	150461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x400 >90	3
3000K	4x420 >90	5

ALWAYS USE

driver 500mA only 1x needed	CODE
20W dim	90224602
20W DALI	90244604
more options and specs on page 737	



6.0

 6x LED COB 5W | 500mA | 2x27V
excl. driver
aluminium powder coated

 IP20  32° SDCM2 L70|55K 0.40kg

wire springs  269x50  60  4-25

	CODE
	150661E_
	150661J_
	150661K_
	150661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x400 >90	3
3000K	6x420 >90	5

ALWAYS USE

driver 500mA 2x needed	CODE
20W dim	90224602
20W DALI	90244604
more options and specs on page 737	

PIRRO

CEILING RECESSED



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design




177




279 | 309

back

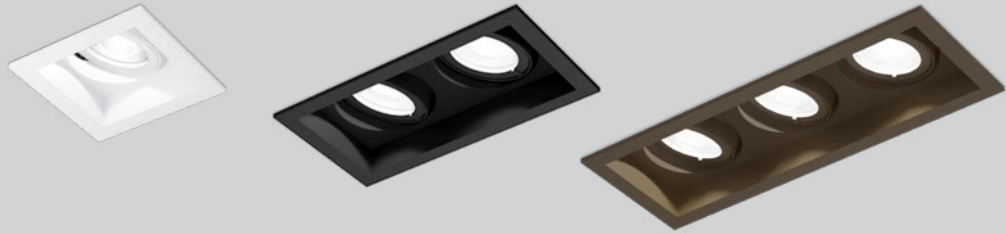

PLANO petit

CEILING RECESSED



1.0

LED LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° A-34° SDCM2 L70|55K 0.08kg

wire springs 54x59 1.65 2-22

	CODE
	162461W_
	162461Q_
	162461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 16V	440 >90	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736



2.0

LED 2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° A-34° SDCM2 L70|55K 0.15kg

wire springs 54x110 1.65 2-22

	CODE
	162561W_
	162561Q_
	162561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >90	3
3000K	2x570 >90	5
2000-3000K 16V	2x440 >90	9

ALWAYS USE

driver | 350mA | only 1x needed

	CODE
17.5W	90218601
15W dim	90223403
17W DALI	90243601

more options and specs on page 737



3.0

LED 3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° A-34° SDCM2 L70|55K 0.22kg

wire springs 54x162 1.65 2-22

	CODE
	162661W_
	162661Q_
	162661B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x540 >90	3
3000K	3x570 >90	5
2000-3000K 16V	3x440 >90	9


ALWAYS USE

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736





1.0 LED

 LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.26kg

wire springs  74x78  95  2-18

	CODE
	118561W_
	118561S_
	118561Q_
	118561B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/685 >90	3
3000K	550/740 >90	5
2000-3000K	365/535 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737



2.0 LED

 2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.48kg

wire springs  74x148  95  2-18

	CODE
	118661W_
	118661S_
	118661Q_
	118661B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x510/685 >90	3
3000K	2x550/740 >90	5
2000-3000K	2x365/535 >90	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737



1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.24kg

wire springs  74x78  120  2-18

	CODE
	118120W0
	118120S0
	118120Q0
	118120B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743

PLANO

CEILING RECESSED



2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.44kg

wire springs  74x148  120  2-18


	CODE
	118220W0
	118220S0
	118220Q0
	118220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743

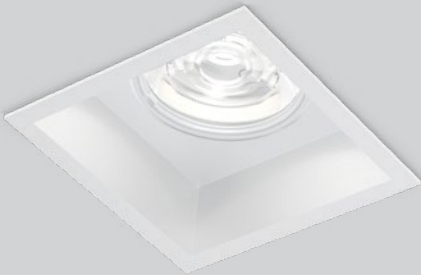

PLANO fort

CEILING RECESSED



1.0

LED LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

 IP20 0°-30°/355°  34° SDCM2 L70/50K 0.38kg

wire springs  11x11 L130  4.25

CODE	
	118961W_
	118961B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2490 >90	5
4000K	2680 >90	7



ALWAYS USE

driver | 700mA

CODE	
30W dim	90225702
28W DALI	90245801


more options and specs on page 739





STRANGE petit

CEILING RECESSED




1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°/355° A 34° SDCM2 L80/50K 0.07kg

CODE	
	163461W_
	163461M_
	163461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K	440 >90	9




2.0

2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°/355° A 34° SDCM2 L80/50K 0.13kg

CODE	
	163561W_
	163561M_
	163561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >90	3
3000K	2x570 >90	5
2000-3000K	2x440 >90	9



3.0

3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°/355° A 34° SDCM2 L80/50K 0.19kg

CODE	
	163661W_
	163661M_
	163661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x540 >90	3
3000K	3x570 >90	5
2000-3000K	3x440 >90	9

ALWAYS USE

alu plasterkit  64x64  7-32

CODE	
	90017202

driver | 350mA

CODE	
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 736

ALWAYS USE

alu plasterkit  64x117  7-32

CODE	
	90017205

driver | 350mA | only 1x needed

CODE	
17.5W	90218601
15W dim	90223403
17W DALI	90243601

more options and specs on page 737

ALWAYS USE


alu plasterkit  64x169  7-32


CODE	
	90017208

driver | 350mA | 3x needed

CODE	
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 737





1.0 LED

 LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.43kg

	CODE
	131461W_
	131461M_
	131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/685	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

ALWAYS USE


alu plasterkit  86x86  95  7-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 736



2.0 LED

 2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

 IP20 0°-35°|355°  36° SDCM2 L80|50K 0.74kg

	CODE
	131561W_
	131561M_
	131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/685	>90	3
3000K	2x550/740	>90	5
2000-3000K	2x365/535	>90	9

ALWAYS USE


alu plasterkit  86x156  95  7-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737



1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.41kg

	CODE
	131120W0
	131120M0
	131120B0

ALWAYS USE

alu plasterkit  86x86  120  7-32

	CODE
	90017120

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743

STRANGE

CEILING RECESSED



2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-35°|355° 0.70kg

	CODE
	131220W0
	131220M0
	131220B0

ALWAYS USE

alu plasterkit  86x156  120  7-32


	CODE
	90017121

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim



	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743

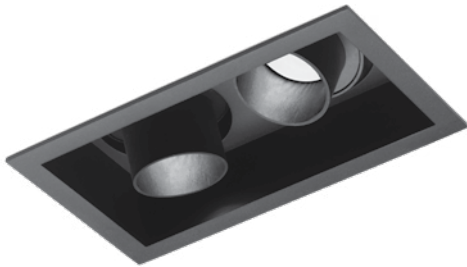

SNEAK trim

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° A 30° SDCM2 L80|50K 0.19 kg

wire springs 74x78 95 2-18

	CODE
	155751W_
	155751K_
	155751B_

LIGHT COLOUR	LUMEN CRI CODE
2700K	395/530 >90 3
3000K	425/570 >90 5
2000-3000K	200/290 >90 9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° A 30° SDCM2 L80|50K 0.34 kg

wire springs 74x148 95 2-18

	CODE
	155851W_
	155851K_
	155851B_

LIGHT COLOUR	LUMEN CRI CODE
2700K	2x395/530 >90 3
3000K	2x425/570 >90 5
2000-3000K	2x200/290 >90 9

ALWAYS USE

driver | 500mA | only 1x needed




	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737







PRIVATE RESIDENCE | WILLEM BENOIT BELGIUM



SNEAK trimless

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°/355° A 30° SDCM2 L80|50K 0.19kg

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°/355° A 30° SDCM2 L80|50K 0.34kg

CODE	
155551W_	
155551K_	
155551B_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395/530	>90	3
3000K	425/570	>90	5
2000-3000K	200/290	>90	9

ALWAYS USE

alu plasterkit 86x86 95 7.32

CODE	
90017120	

driver | 500mA

CODE	
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

CODE	
155651W_	
155651K_	
155651B_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395/530	>90	3
3000K	2x425/570	>90	5
2000-3000K	2x200/290	>90	9

ALWAYS USE

alu plasterkit 86x156 95 7.32


CODE	
90017121	

driver | 500mA | only 1x needed

CODE	
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 737





1.0 TRIMLESS

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP20 $\angle$ 32° SDCM2 L80|50K 0.75kg

45-47 60 4-26

CODE			
191861B_			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	300	>90	5

ALWAYS USE

driver | 250mA | revision opening
required

CODE	
7.2W dim	90226401
10W DALI	90249402

more options and specs on page 736



1.0

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP20 $\angle$ 32° SDCM2 L80|50K 0.60kg

wire springs 38-41 85 4-25

CODE			
191161W_			
191161B_			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	300	>90	3
3000K	330	>90	5

ALWAYS USE

driver | 250mA | *revision opening
required

CODE	
7.2W dim*	90226401
10W DALI	90249402

more options and specs on page 736



1.0 LED IP44

LED COB 5W | 250mA | 18V
excl. driver
aluminium powder coated

IP44 $\uparrow$ IP44 $\angle$ 32° SDCM2 L80|50K 0.60kg

wire springs 38-41 85 4-25

CODE			
191261W_			
191261B_			

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	250	>90	3
3000K	280	>90	5

ALWAYS USE

driver | 250mA | *revision opening
required

CODE	
7.2W dim*	90226401
10W DALI	90249402




more options and specs on page 736




MATCH point

TRIMLESS | CEILING RECESSED



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design





1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°/360° A 30° SDCM2 L80/50K 0.15kg

45-47 60 4-26

CODE		
	190851W_	
	190851BL_	
	190851B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	600 >90	5

ALWAYS USE

driver | 350mA | revision opening
required

CODE	
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

1.0

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°/350° A 30° SDCM2 L80/50K 0.16kg

wire springs 45-47 85 4-26

CODE		
	190151W_	
	190151BL_	
	190151CH_	
	190151B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	600 >90	5

ALWAYS USE

driver | 350mA

CODE	
10W dim	90223402
10W DALI	90243401

more options and specs on page 736

2.0

2x LED COB 6W | 700mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°/350° A 30° SDCM2 L80/50K 0.27kg

wire springs 105x30 60 4-26

CODE		
	190251W_	
	190251B_	



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x600 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE	
15W dim	90225502
28W DALI	90245801

more options and specs on page 739



MATCH

TRIMLESS | CEILING RECESSED



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



199



259 | 267




369



483


back



back

MATCH stick

TRIMLESS | CEILING RECESSED



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 0°-90°/360° Δ 30° SDCM2 L80/50K 0.37kg

45-47 60 4-26

CODE	
	190951W_
	190951BL_
	190951B_

aluminium brushed version comes
with black hinge


LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	600 >90	5

ALWAYS USE

driver | 350mA | revision opening
required

CODE	
10W dim	90223402
10W DALI	90243401

more options and specs on page 736



1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A31° SDCM2 L70|55K 0.14kg

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A39° SDCM2 L70|55K 0.12kg

wire springs 45-47 1.85 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161CH_
	176161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K A31°	470 >90	3
3000K A31°	500 >90	5
2000-3000K 16V	355 >90	9

ALWAYS USE

see installation sheet for driver
placement | 350mA

	CODE
10W dim	90223402
10W DALI	90243401
more options and specs on page 736	

ALWAYS USE

driver | 350mA




	CODE
10W dim	90223402
10W DALI	90243401
more options and specs on page 736	



OPTIONAL

honeycomb louver

	CODE
	90051131



OPTIONAL

honeycomb louver

CODE 90051131

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401
more options and specs on page 736	

ALWAYS USE




driver | 700mA | only 1x needed

	CODE
15W dim	90225502
28W DALI	90245801
more options and specs on page 739	

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W dim	90225604
28W DALI	90245801
more options and specs on page 739	



1.1

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A 3° SDCM2 L70|55K 0.13kg

blade springs 32x66 85 min. 4

	CODE
176461W	176461W
176461Q	176461Q
176461K	176461K
176461B	176461B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

2.0

2x LED COB 6W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A 3° SDCM2 L70|55K 0.26kg

blade springs 32x145 60 min. 4

	CODE
176261W	176261W
176261Q	176261Q
176261K	176261K
176261B	176261B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5

3.0







3x LED COB 6W | 700mA | 26V
excl. driver
aluminium powder coated

IP20 0°-90°|350° A 3° SDCM2 L70|55K 0.39kg

blade springs 32x221 60 min. 4

	CODE
176361W	176361W
176361Q	176361Q
176361K	176361K
176361B	176361B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x470 >90	3
3000K	3x500 >90	5

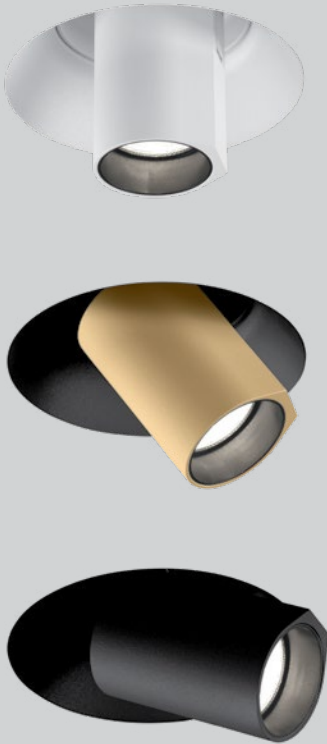

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° A 39° SDCM2 L70|55K 0.17kg

CODE	
	164561W_
	164561CH_
	164561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K A 31°	470 >90	3
3000K A 31°	500 >90	5
2000-3000K 16V	355 >90	9

ALWAYS USE

alu plasterkit 73-76 160 12.5, 15, 20, 25

CODE
90017210

driver | 350mA

CODE
10W dim 90223402
10W DALI 90243401

more options and specs on page 736

1.0

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° A 39° SDCM2 L70|55K 0.20kg

wire springs 86-89 160 4-23

CODE	
	164461W_
	164461CH_
	164461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K A 31°	470 >90	3
3000K A 31°	500 >90	5
2000-3000K 16V	355 >90	9

ALWAYS USE

driver | 350mA

CODE
10W dim 90223402
10W DALI 90243401

more options and specs on page 736

2.0

2x LED COB 6W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° A 31° SDCM2 L70|55K 0.40kg

wire springs 87x176 160 4-23

CODE	
	164261W_
	164261CH_
	164261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE
15W dim 90225502
28W DALI 90245801

more options and specs on page 739





APARTMENT RONDA SANT PERE | DANIEL NASSAR | ALSINASECH LIGHTING PROJECT | SPAIN



BLIEK ROUND

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°/355° A-36° SDCM2 L80/50K 0.45kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°/350° 0.42kg

wire springs 127 75 min 4

	CODE
	125361W_
	125361K_
	125361B_

blade springs 127 75 min 4

	CODE
	125361W_C
	125361K_C
	125361B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/735 >90	3
3000K	585/785 >90	5
4000K	625/840 >90	7
2000-3000K	390/580 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

wire springs 127 75 min 4

	CODE
	125120W0
	125120K0
	125120B0

blade springs 127 min 4

	CODE
	125120W0C
	125120K0C
	125120B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



more lamps and specs on page 743





BLIEK SQUARE

CEILING RECESSED



1.0 LED

LED LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°/355° A-36° SDCM2 L80/50K 0.47kg

wire springs 11x11 75 4-25

	CODE
	125461W_
	125461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/735 >90	3
3000K	585/785 >90	5
4000K	625/840 >90	7
2000-3000K	390/580 >90	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 737

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°/350° 0.45kg

wire springs 11x11 75 4-25

	CODE
	125220W0
	125220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



RUVI

CEILING RECESSED



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0.25kg

54-56 11.90 7.33

CODE

1671E0B0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

CODE

2700K | 464lm 9003E142

G95 5.1W | E27 | phase-cut dim
filament | gold mirror

CODE

2200K | 371lm 9003E156

G95 5.6W | E27 | phase-cut dim
filament | silver mirror

CODE

2700K | 464lm 9003E157

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

CODE

2200K | 380lm 9003E111

more lamps and specs on page 744

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.


MATCH point IP44	p. 93
DEEP point IP44	p. 115
DEEP BIJOU IP65	p. 117
DEEP IP44 IP65	p. 119
DEEPER IP44	p. 121
TAIO IP65	p. 123
RINI SNEAK IP44	p. 125
LUNA ROUND IP44	p. 127
LUNA SQUARE IP44	p. 129
PLANO IP44	p. 131

WASSERSCHEU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65 Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

MIRBI IP44	p. 133
CITY IP44	p. 135
MIRBI IP44	p. 231
TAIO IP65	p. 229
ROB IP44	p. 233
ROBY IP44	p. 235
TOWNA IP44	p. 237
RUVI IP44	p. 567
MIRBA IP44	p. 569
MIRBI LONG IP44	p. 571





DEEP point IP44

CEILING RECESSED



1.0

LED COB 6W | 250mA | 18V
excl. driver
aluminium powder coated

IP44 32° SDCM2 L80|50K 0.06kg

wire springs 38-41 85 4-25

		CODE
		185161W_
		185161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	370 >90	3
3000K	410 >90	5

ALWAYS USE


driver | 250mA | *revision opening
required

		CODE
7.2W dim*		90226401
10W DALI		90249402

more options and specs on page 736



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM



DEEP bijou IP65

CEILING RECESSED



1.0

LED LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 A 30° SDCM2 L80/50K 0.09kg



595

wire springs ⌀50-52 11.85 4-25

CODE	
	165361W_
	165361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

ALWAYS USE

driver | 500mA




CODE	
6.5W IP20 dim	90224301
7W IP67	90214301

more drivers on page 737



DEEP IP44 | IP65

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 90 4-27

CODE	
	184161W_
	184161B_

blade springs 86-89 90 min 4

CODE	
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.26kg

wire springs 86-89 90 4-25

CODE	
	112610W0
	112610B0

blade springs 86-89 90 min 8

CODE	
	112610W0C
	112610B0C

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.30kg

wire springs 86-89 105 4-25

CODE	
	112620W0
	112620B0

blade springs 86-89 105 min 8


CODE	
	112620W0C
	112620B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 743





DEEPER IP44

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

CODE	
152461W	
152461B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	440/600 >90	3
3000K	480/645 >90	5
2000-3000K	320/470 >90	9

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.11kg

wire springs 76-79 100 4-38


CODE	
152210W0	
152210B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.15kg

wire springs 76-79 115 4-38

CODE	
152220W0	
152220B0	


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743





TAIO IP65

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80/50K 0.13kg

wire springs 70 4-27

	CODE
	180781W
	180781G
	180781B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	340/455 >90	3
3000K	370/495 >90	5

ALWAYS USE

driver | 500mA

	CODE
10W IP20	90214405
10W IP20 dim	90224402
24W IP68	90214702


more options and specs on page 737





RINI SNEAK IP44

CEILING RECESSED



1.0 LED

LED COB 6,9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.18 kg

wire springs 76-79 46 4-25

CODE	
154461W	
154461B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	465/625 >90	3
3000K	505/675 >90	5
2000-3000K	335/495 >90	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W	90224402
20W DALI	90244604

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.12 kg

wire springs 76-79 55 4-25


CODE	
154210W0	
154210B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.16 kg

wire springs 76-79 80 4-25



CODE	
154220W0	
154220B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743






APARTMENT RONDA SANT PERE L DANIEL NASSAR L ALSINASECH LIGHTING PROJECTS | SPAIN



LUNA ROUND IP44
CEILING RECESSED



1.0 LED


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80I50K 0.18kg

blade springs 76-79 50 min. 8

3000K | CRI >90 | 440lm

CODE
114888W5
114888B5



1.0 MR16

QR-CBC51 max.10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

blade springs 76-83 100 min 4

CODE
114810W0
114810B0


ALWAYS USE

driver | 12V

CODE
10W dim 90221401
25W dim 90221701
70W dim 90221904
specs on page 739

OPTIONAL

CODE
plasterkit 90017101



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.24kg

blade springs 76-83 120 min 4

CODE
114820W0
114820B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE
2700K 460lm 901228W3
2700K 437lm 901228B3
3000K 500lm 901228W5
3000K 457lm 901228B5

more lamps and specs on page 743


OPTIONAL

CODE
plasterkit 90017101






PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

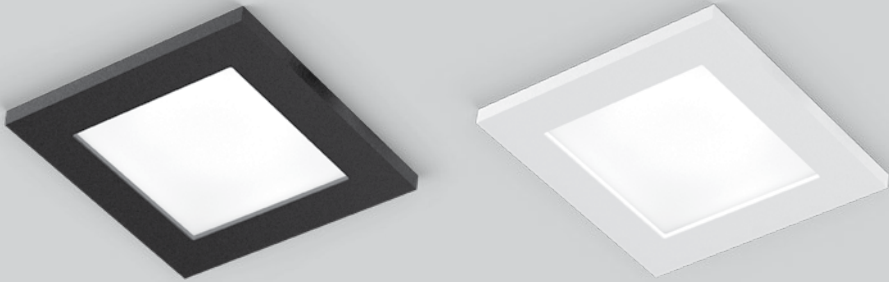

LUNA SQUARE IP44

CEILING RECESSED



1.0 LED


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

↑ IP44 SDCM2 L80|50K 0.19kg

blade springs 72x72 50 min. 8

3000K | CRI >90 | 500lm

	CODE
	114988W5
	114988B5



1.0 MR16

QR-CBC51 max. 10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

↑ IP44 0.28kg

wire springs 76x76 100 8-15

	CODE
	114910W0
	114910B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904
specs on page 739	

OPTIONAL

	CODE
plasterkit	90017102



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

↑ IP44 0.26kg

wire springs 76x76 120 8-15


	CODE
	114920W0
	114920B0

OPTIONAL

	CODE
PAR16 6.5W GU10 phase-cut dim	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5
more lamps and specs on page 743	

OPTIONAL


	CODE
plasterkit	90017102





PLANO IP44

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80I50K 0.21kg

wire springs 74x78 90 4-30

CODE	
118861W	
118861B	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/695 >90	3
3000K	550/740 >90	5
2000-3000K	365/535 >90	9

ALWAYS USE

driver | 500mA

CODE	
10W	90214405
10W	90224402
20W DALI	90244604

more options and specs on page 737



1.0 MR16

QR-CBC51 max. 35W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.15kg

wire springs 74x78 115 4-30


CODE	
118410W0	
118410B0	

ALWAYS USE

driver | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 739



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.19kg

wire springs 74x78 115 4-30

CODE	
118420W0	
118420B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743





MIRBI IP44



CEILING RECESSED



231



571



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.24kg

blade springs 76-79 50 min.8

3000K | CRI >90 | 660lm

CODE

17548805

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover




IP44 SDCM2 L70|60K 0.26kg

blade springs 72x72 50 min.8

3000K | CRI >90 | 660lm

CODE

17558805






HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM



CITY IP44
CEILING RECESSED



1.6


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

⊕ ↑ IP44 SDCM2 L70/60K 0.64 kg

wire springs ⌚ 202-205 ⌚ 50 ⌚ 4-22

3000K | CRI >90 | 1100lm

CODE	
	115488W5
	115488B5



2.6


LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

⊕ ↑ IP44 SDCM2 L70/60K 1.05 kg

wire springs ⌚ 297-300 ⌚ 50 ⌚ 4-22

3000K | CRI >90 | 1740lm

CODE	
	115588W5
	115588B5



CEILING SURFACE

136 — 237

CEILING SURFACE SPOTLIGHTS



BOX MINI
141



BOX
143



DOCUS MINI
147



DOCUS
149



HEXO MINI
153



HEXO
155



RAY MINI
159



RAY
161



SOLID BIJOU
165



SOLID PETIT
167



SOLID
169



NEW

TRACE
173



NEW

PIRRO PETIT
175



PIRRO SPOT
177



PIRRO OPAL
181



PLANO PETIT
183



PLANO
185



SIRRO
187



SARA ON BASE
191



SQUEBE ON BASE
193



MATCH
199



CENO 2.0
201



NEW

BLIEK PETIT
205



MICK
207

CEILING SURFACE LUMINAIRES



DRO
211



CLOCK
213



WIRO
215



MIRRO
217




CLEA
219



J.J.W.
221




ROOMOR OFFICE
223



NEW

FINLIN
225



VENN
227

CEILING SURFACE IP-RATED



TAIO IP65
229



MIRBI IP44
231



ROB IP44
233



ROBY IP44
235



TOWNA IP44
237

back

MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen.

SHADE COLOUR

INNER REFLECTOR COLOUR

INNER COVER COLOUR



HAVE A LOOK
weverducre.com/universalstars



BOX MINI
GOLD INNER REFLECTOR



BOX MINI
WITHOUT INSET



BOX MINI
WHITE INNER REFLECTOR




WITHOUT
INSET



BLACK
INNER COVER



GOLD
INNER COVER



WHITE
INNER REFLECTOR



BLACK
INNER REFLECTOR




GOLD
INNER REFLECTOR



BOX mini

CEILING SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.16kg



OPTIONAL



inner reflector max. 10W
wet painted polycarbonate

CODE	
	900199W1
	900199G1
	900199M1
	900199Q1
	900199B1

CODE	
	258120W0
	258120G0
	258120M0
	258120Q0
	258120B0

OPTIONAL	
PAR16 6.5W GU10 phase-cut dim	
CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



1.0 LED


LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70I50K 0.74kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.66kg




OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

CODE
911211W1
911211G1
911211M1
911211B1

inner cover max. 10W
aluminium powder coated brushed

CODE
911011W1
911011G1
911011M1
911011B1



phase-cut dim

CODE
186158W_
186158L_
186158G_
186158M_
186158Q_
186158P_
186158B_

DALI dim

CODE
186159W_
186159L_
186159G_
186159M_
186159Q_
186159P_
186159B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K*	470 >90	9

*only for phase-cut dim

CODE
146120W0
146120L0
146120G0
146120M0
146120Q0
146120P0
146120B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE
2700K 460lm
2700K 437lm
3000K 500lm
3000K 457lm



more lamps and specs on page 743

BOX

CEILING SURFACE

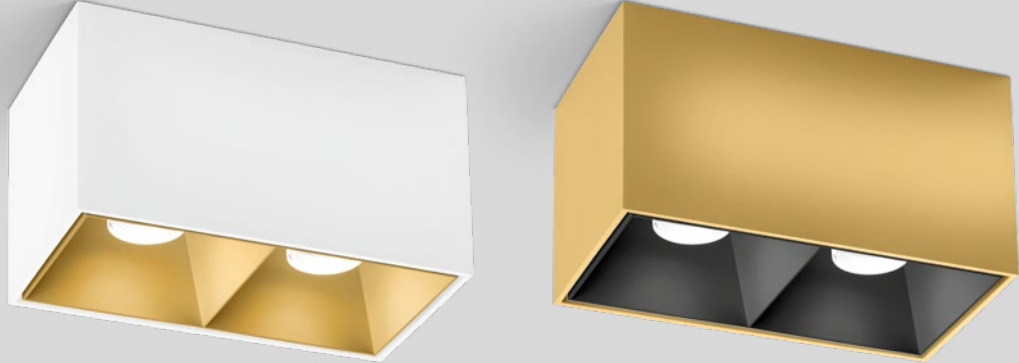

BOX
CEILING SURFACE



2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered



IP20 21° SDCM2 L70I50K 1.08kg

OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

	CODE
	911251W1
	911251G1
	911251M1
	911251B1

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911011W1
	911011G1
	911011M1
	911011B1

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.13kg

	CODE
	146220W0
	146220L0
	146220G0
	146220M0
	146220Q0
	146220P0
	146220B0

OPTIONAL


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



DOCUS mini

CEILING SURFACE



459

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.16kg



reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate



CODE	
900199W2	2700K 460lm
900199G2	3000K 500lm
900199B2	3000K 457lm

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
258320W0	2700K 460lm
258320G0	3000K 500lm
258320B0	3000K 457lm

more lamps and specs on page 743



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70|50K 0.63kg

phase-cut dim

	CODE
	186358W_
	186358L_
	186358G_
	186358P_
	186358B_

DALI dim

	CODE
	186359W_
	186359L_
	186359G_
	186359P_
	186359B_

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021GI
	911021B1

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.55kg

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743

DOCUS


CEILING SURFACE



253



325



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

⊕ IP20 1.01kg



inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	186458W_
	186458L_
	186458G_
	186458P_
	186458B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x670	>90	3
3000K	2x700	>90	5
2000-3000K	2x470	>90	9

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

		CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 743



PRIVATE RESIDENCE | TOM BEIGE/NESS* HUNGARY



HEXO mini

CEILING SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.15kg



OPTIONAL

inner reflector max. 10W
wet painted polycarbonate


CODE	
900199W3	2700K 460lm
900199G3	2700K 437lm
900199Q3	3000K 500lm
900199B3	3000K 457lm

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
258420W0	2700K 460lm
258420G0	2700K 437lm
258420Q0	3000K 500lm
258420B0	3000K 457lm



more lamps and specs on page 743



OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911031W1
	911031GI
	911031BI



1.0 LED

 LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20  27° SDCM2 L70|50K 0.72kg

phase-cut dim

	CODE
	186558W_
	186558G_
	186558Q_
	186558P_
	186558B_

DALI dim

	CODE
	186559W_
	186559G_
	186559Q_
	186559P_
	186559B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K*	470 >90	9

*only for phase-cut dim

1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

 IP20 0.63kg

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

more lamps and specs on page 743

HEXO


CEILING SURFACE



255 | 289 | 303





327

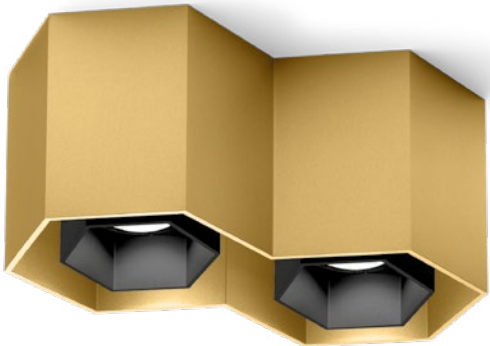

HEXO

CEILING SURFACE



2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 21° SDCM2 L70/50K 1.13kg



OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031GI
	911031BI

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.19kg

	CODE
	186658W_
	186658G_
	186658Q_
	186658P_
	186658B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x670 >90	3
3000K	2x700 >90	5
2000-3000K	2x470 >90	9


	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743

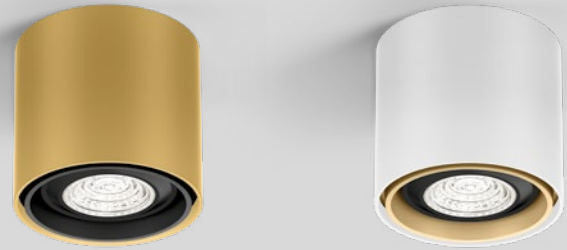

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

CODE	
	900199W4
	900199G4
	900199M4
	900199Q4
	900199B4

RAY mini
CEILING SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.14kg

CODE	
	258220W0
	258220G0
	258220M0
	258220Q0
	258220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743





SOLID bijou

CEILING SURFACE



1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.32kg

		CODE
		133864W_
		133864J_
		133864H_
		133864K_
		133864CH_
		133864B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	340 >90	5





SOLID petit

CEILING SURFACE



2.0

 LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-25° | 355°  34° SDCM2 L80 | 50K 0.42kg

CODE	
	133964W_
	133964J_
	133964H_
	133964K_
	133964CH_
	133964B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K	440 >90	9



back

WEVER & DUCRÉ 166 – 167



1.0 LED

LED COB 12W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°/355° 36° SDCM2 L80/50K 0.65kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-25°/355° 0.61kg


phase-cut dim

	CODE
	133764W_
	133764J_
	133764H_
	133764K_
	133764CH_
	133764P_
	133764Q_
	133764B_

DALI dim

	CODE
	133765W_
	133765J_
	133765H_
	133765K_
	133765CH_
	133765P_
	133765Q_
	133765B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	745 >90	3
3000K	800 >90	5
2000-3000K	560 >90	9

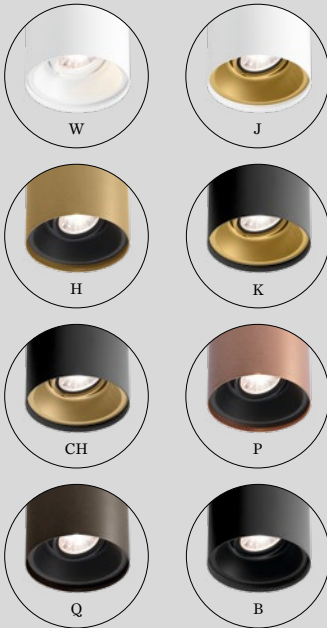

	CODE
	133120W0
	133120J0
	133120H0
	133120K0
	133120CH0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



IVAN ELTOFT NIELSEN REAL ESTATE AGENT | JULIE BRANDT HELLERUP | DENMARK




PRIVATE RESIDENCE L ANKER & CO COPENHAGEN L DENMARK



TRACE

CEILING SURFACE







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 A-32° SDCM2 180/50K 0.40kg

		CODE
		183164W_
		183164BL_
		183164CH_
		183164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	340 >90	5

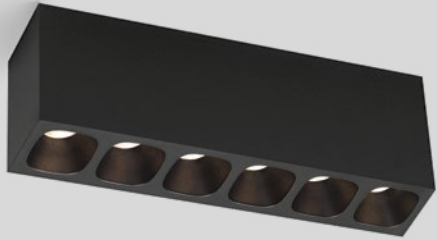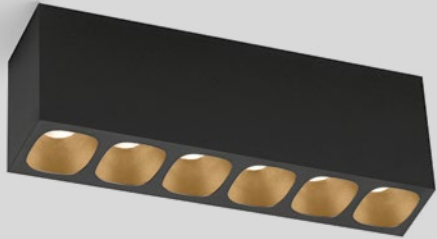

PIRRO petit

CEILING SURFACE



75



6.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 $\bar{A}$ 28° SDCM3 L80/50K 0.21kg

		CODE
		129854E_
		129854WM_
		129854CH_
		129854B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x170 >90	3
3000K	6x190 >90	5

12.0

LED LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 $\bar{A}$ 28° SDCM3 L80/50K 0.38kg

		CODE
		129954E_
		129954WM_
		129954CH_
		129954B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	12x170 >90	3
3000K	12x190 >90	5





PIRRO SPOT
CEILING SURFACE



77



279 | 309



1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 A-32° SDCM2 L70|55K 0.20kg



OPTIONAL

honeycomb louvers

CODE	90051131

CODE	151164E	151164J	151164K	151164B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	380 >90	5

4.1

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP20 A-32° SDCM2 L70|55K 0.50kg

CODE	151564E	151564J	151564K	151564B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5



HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO ITALY



2.0

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP20 $\angle 32^\circ$ SDCM2 L70|55K 0.30kg



OPTIONAL

honeycomb louver

	CODE
	90051131




4.0

4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 $\angle 32^\circ$ SDCM2 L70|55K 0.48kg

	CODE
	151464E
	151464J
	151464K
	151464B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5



6.0

6x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 $\angle 32^\circ$ SDCM2 L70|55K 0.80kg

	CODE
	151664E
	151664J
	151664K
	151664B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x360 >90	3
3000K	6x380 >90	5

PIRRO SPOT

CEILING SURFACE




77



279 | 309



PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND




2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80/60K 0.30kg

		CODE
		151284E_
		151284J_
		151284K_
		151284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	290 >90	5




4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80/60K 0.52kg

		CODE
		151484E_
		151484J_
		151484K_
		151484B_




LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5



PIRRO OPAL
CEILING SURFACE



279 | 309



PLANO petit

CEILING SURFACE



79



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.48kg

CODE	
	162564W_
	162564E_
	162564CH_
	162564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K 31°	490	>90	3
3000K 31°	530	>90	5
2700K-3000K 38°	380	>90	9

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.61kg

CODE	
	162664W_
	162664E_
	162664CH_
	162664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K 31°	2x490	>90	3
3000K 31°	2x530	>90	5
2700K-3000K 38°	2x380	>90	9


3.0

3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP20 0°-25°|355° 31° SDCM2 L70|55K 0.73kg

CODE	
	162764W_
	162764E_
	162764CH_
	162764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K 31°	3x490	>90	3
3000K 31°	3x530	>90	5
2700K-3000K 38°	3x380	>90	9



back

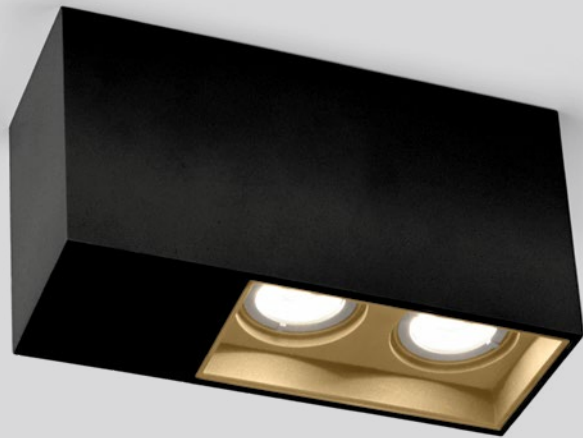


PLANO

CEILING SURFACE



81




1.0 LED

 LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-30°|355°  34° SDCM2 L80|50K 1.15kg

	CODE
	118564W_
	118564E_
	118564CH_
	118564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	570 >90	3
3000K	630 >90	5
2000K-3000K  42°	535 >90	9




2.0 LED

 2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-30°|355°  34° SDCM2 L80|50K 1.62kg

	CODE
	118664W_
	118664E_
	118664CH_
	118664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x570 >90	3
3000K	2x630 >90	5
2000K-3000K  42°	2x535 >90	9



1.0 PAR16

 PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-30°|355° 1.39kg


	CODE
	118520W0
	118520E0
	118520CH0
	118520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743



2.0 PAR16

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

 IP20 0°-30°|355° 1.51kg


	CODE
	118620W0
	118620E0
	118620CH0
	118620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5

more lamps and specs on page 743




back



FAIR BOOTH | BIS BEURS | GINO VANHOUTE GENT | BELGIUM




SIRRO
CEILING SURFACE



1.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°/355° 36° SDCM2 L80/50K 0.85kg




1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°/355° 0.81kg

CODE	
189164W_	
189164E_	
189164B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	715 >90	3
3000K	775 >90	5
2000-3000K	560 >90	9




CODE	
139120W0	
139120E0	
139120B0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more lamps and specs on page 743





SIRRO

CEILING SURFACE




2.0 LED

2x LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°/355° 36° SDCM2 180l/50K 1.57kg

CODE	
	189264W_
	189264E_
	189264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x715 >90	3
3000K	2x775 >90	5
2000-3000K	2x560 >90	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°/355° 1.51kg

CODE	
	139220W0
	139220E0
	139220B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
------	--

	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more lamps and specs on page 743



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°/355° 1.91kg

CODE	
	139320W0
	139320E0
	139320B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
------	--


	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more lamps and specs on page 743

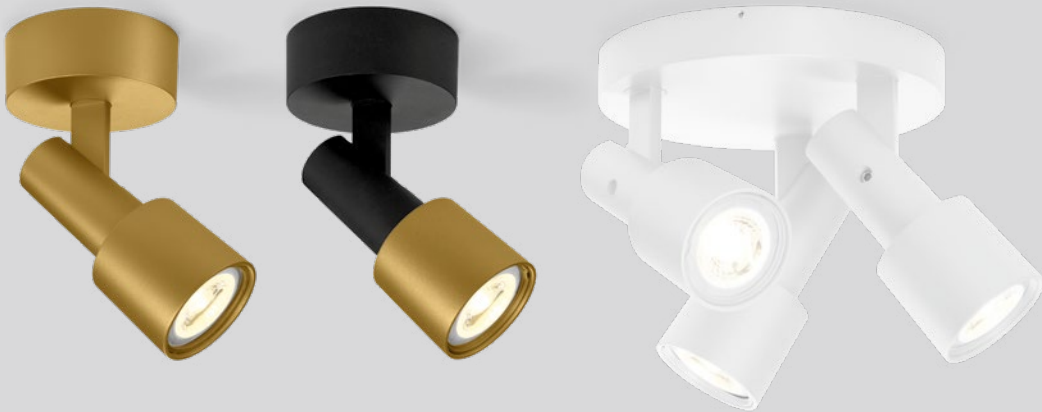

SARA on base

CEILING SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.23kg


	CODE
	157220W0
	157220G0
	157220K0
	157220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/330° 0.32kg


	CODE
	157420W0
	157420K0
	157420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/330° 0.74kg

	CODE
	157520W0
	157520K0
	157520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743




PRIVATE RESIDENCE | CBA & MAX BAUER - CBA.LU - BAUERGROUP.LU LUXEMBOURG





SQUBE on base

CEILING SURFACE



285 | 297



1.0 LED

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 39° SDCM3 L70|55K 0.43kg

CODE			
	144268W_		
	144268B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >80	9

1.1 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° SDCM3 L70|55K 0.44kg

CODE			
	144468W_		
	144468B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K 32°	940 >90	3
3000K 32°	970 >90	5
1800K-3000K 58°	640 >80	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.43kg

CODE			
	144220W0		
	144220B0		

OPTIONAL

CODE			
2700K 460lm	901228W3		
2700K 437lm	901228B3		
3000K 500lm	901228W5		
3000K 457lm	901228B5		

more lamps and specs on page 743






PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE



PRIVATE RESIDENCE | LINK ARCHITECTURE | ANKER & CO DENMARK


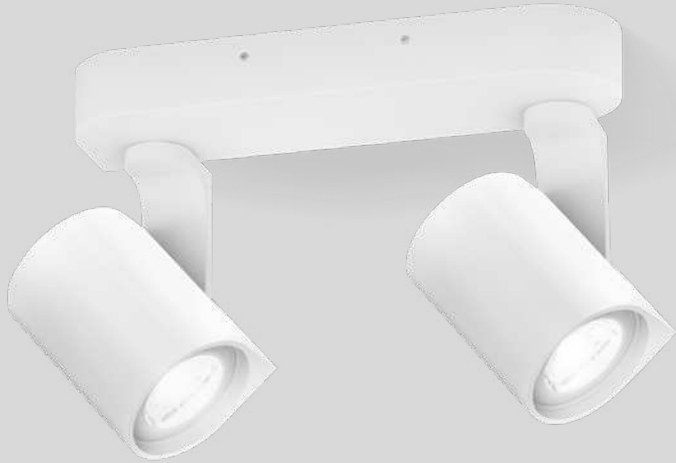


SQUBE on base

CEILING SURFACE



285 | 297



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/355° 0.58kg

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°/355° 0.93kg

CODE	
	144520W0
	144520B0

CODE	
	144620W0
	144620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more lamps and specs on page 743

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim
CODE

	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more lamps and specs on page 743





<



OPTIONAL

honeycomb louver

CODE	90051131



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°/350° A 31° SDCM2 L70|55K 0.21kg

CODE	176664W_	176664Q_	176664K_	176664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5


2.0

2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°/350° A 31° SDCM2 L70|55K 0.43kg

CODE	176764W_	176764Q_	176764K_	176764B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5



CENO
CEILING SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design




99



261 | 299



487

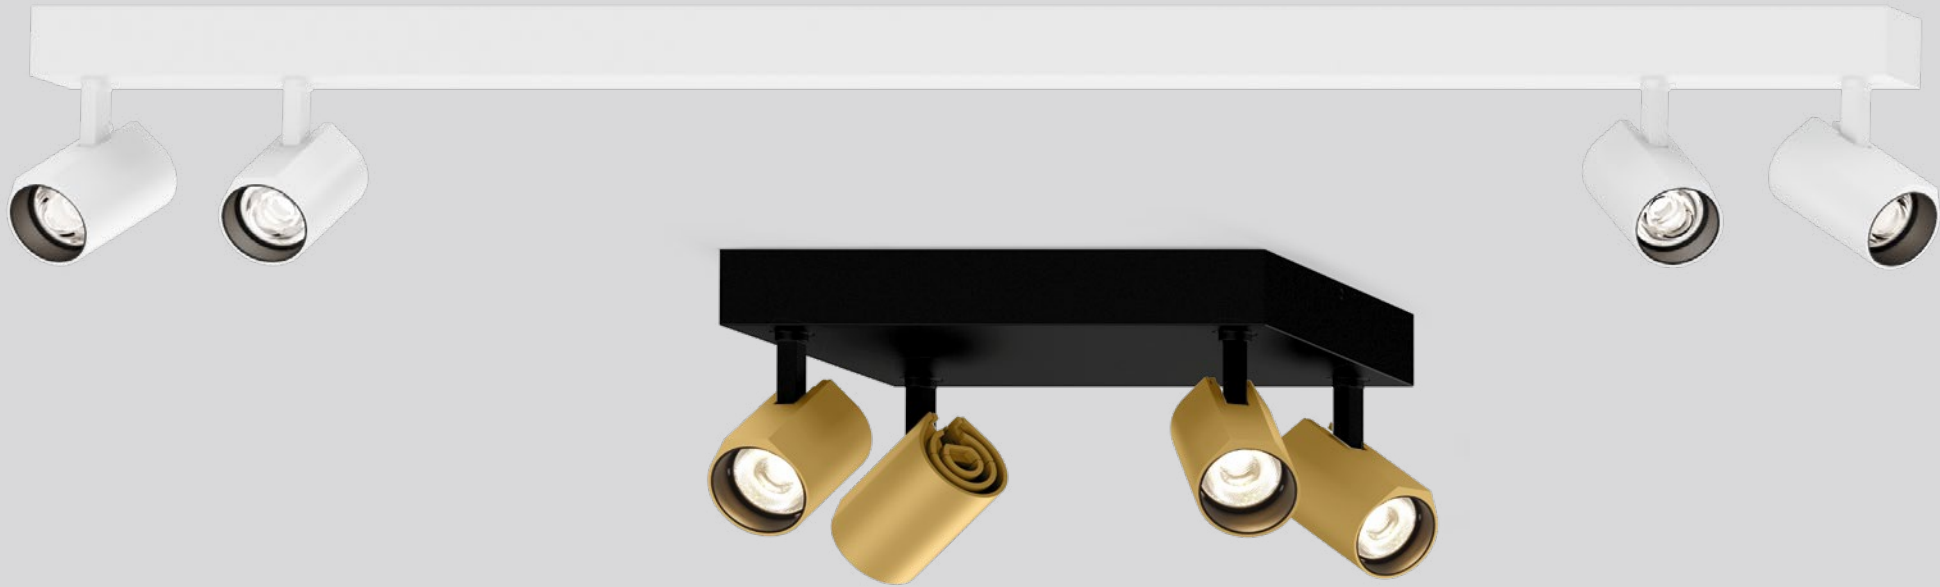

CENO

CEILING SURFACE





99



261 | 299



487



4.0

4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.95kg

4.1

4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.78kg



honeycomb

OPTIONAL

honeycomb louver


CODE 90051131

CODE			
	176864W_		
	176864Q_		
	176864K_		
	176864B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x470 >90	3
3000K	4x500 >90	5

CODE			
	176964W_		
	176964Q_		
	176964K_		
	176964B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x470 >90	3
3000K	4x500 >90	5

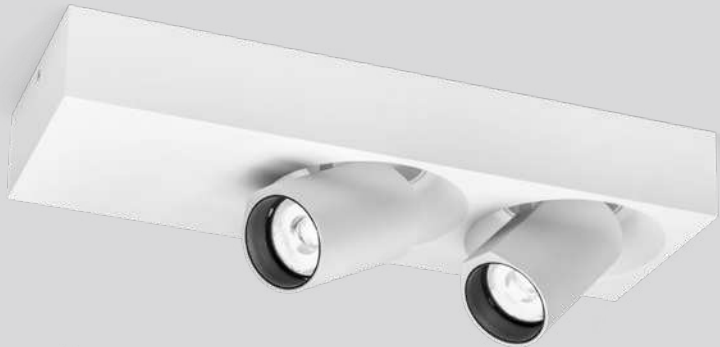


BLIEK petit

CEILING SURFACE



103



2.0

LED 2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-60°/355° A39° SDCM2 L70/55K 0.70kg



OPTIONAL

honeycomb louver



CODE

90051131

CODE

164664W_

164664CH_


164664B_

LIGHT COLOUR		LUMEN CRI		CODE
2700K	A31°	2x470	>90	3
3000K	A31°	2x500	>90	5
2000K-3000K		2x355	>90	9



back



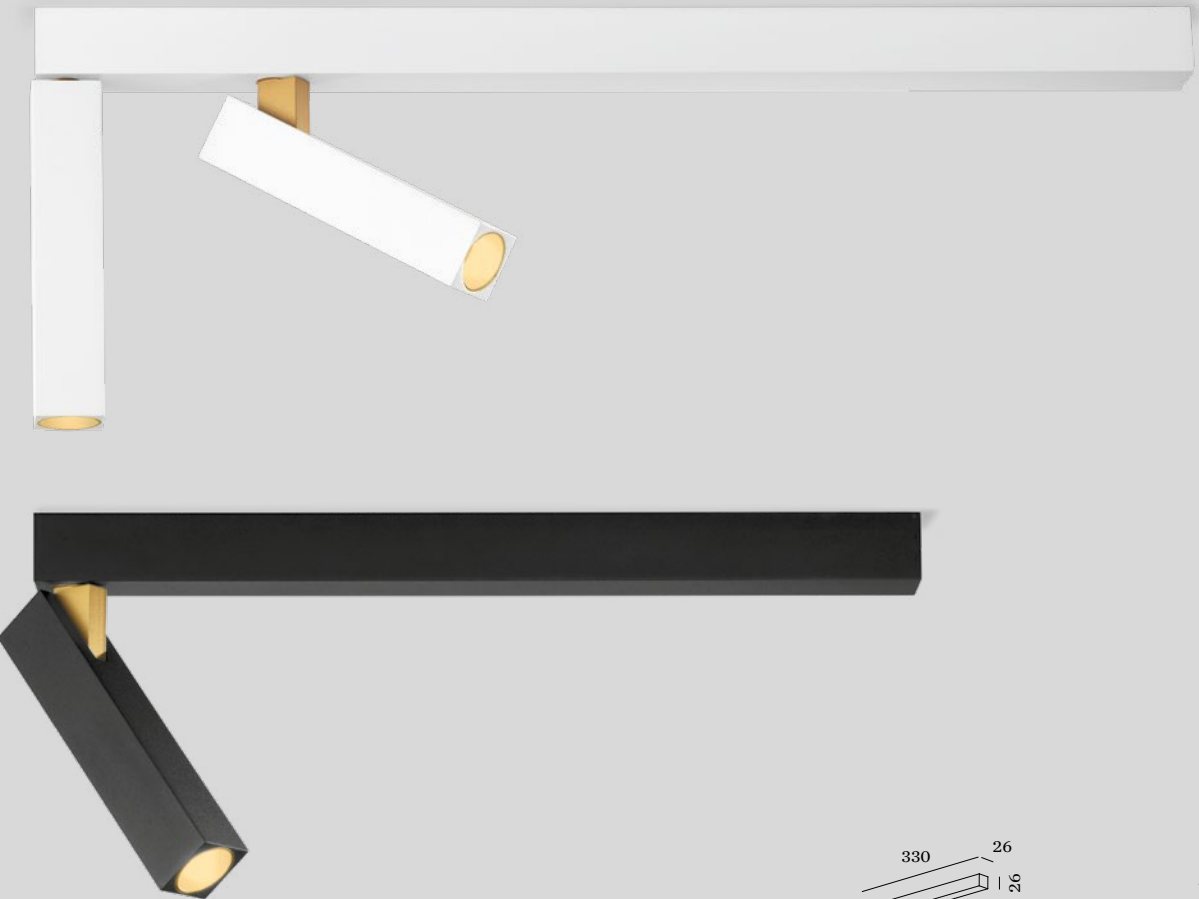



MICK

CEILING SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design





1.0

 LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-90°|350°  18° SDCM2 L80|50K 0.35kg



CODE
159144J_
159144K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	435 >90	5

2.0


 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP20 0°-90°|350°  18° SDCM2 L80|50K 0.62kg



CODE
159244J_
159244K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x225 >90	3
3000K	2x245 >90	5




back

S&R CORNELISSEN

WEVER & DUCRÉ 206 – 207




► DESIGN WITH LOVE




back



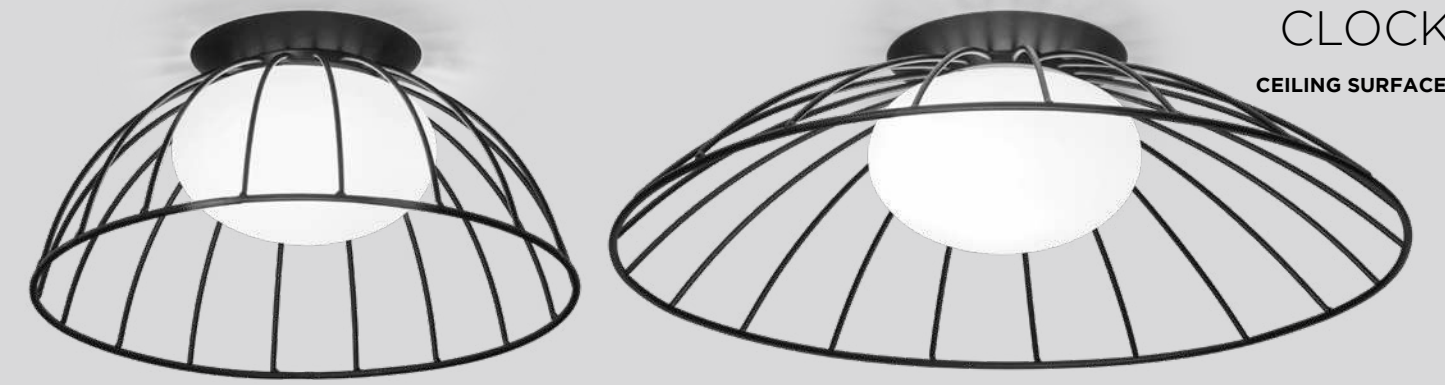

CLOCK


CEILING SURFACE



1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown


IP20 SDCM2 L80/50K 0.66kg



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 0.76kg



3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 1.00kg


CODE			
182184B_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	855 >90	3	
3000K	880 >90	5	

CODE			
182384B_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	855 >90	3	
3000K	880 >90	5	

CODE			
182484B_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	855 >90	3	
3000K	880 >90	5	



WIRO
CEILING SURFACE



2.0 WIRO


A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.78kg

	CODE
	2086E0V0
	2086E0B0

OPTIONAL

A60 3.8W/5.6W E27 phase-cut dim	
	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138
more lamps and specs on page 745	



1.8 WIRO


T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.66kg

	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.3W E27 phase-cut dim	
	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136
more lamps and specs on page 745	



1.0 CONE


T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.56kg

	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.3W E27 phase-cut dim	
	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136
more lamps and specs on page 745	



3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.71kg

	CODE
	2083E0V0
	2083E0B0

OPTIONAL

T30-225 5.3W E27 phase-cut dim	
	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136
more lamps and specs on page 745	



HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO | ITALY



MIRRO
CEILING SURFACE

</



CLEA

CEILING SURFACE

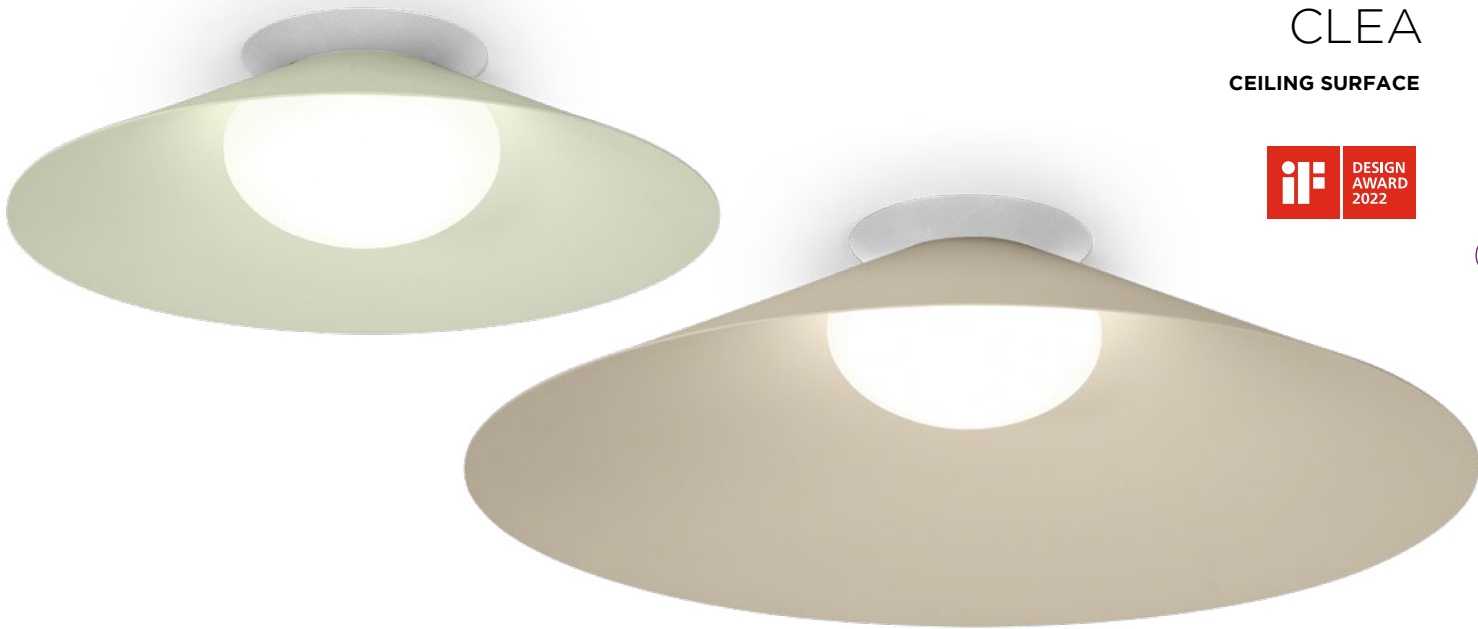


1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 0.78kg

CODE	
	181184W_
	181184SG_
	181184FJ_
	181184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5




2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 1.31kg

CODE	
	181284W_
	181284SG_
	181284FJ_
	181284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5



3.0


LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 2.09kg

CODE	
	181384W_
	181384SG_
	181384FJ_
	181384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5

back



💡 3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

CODE

OPTIONAL

CODE

more lamps and specs on page 745



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY



ROOMOR OFFICE



CEILING SURFACE



reddot winner 2021



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover


IP20 SDCM3 L80/60K UGR ≤ 19/65° 4.22kg

3000K | CRI >90 | 3660lm

	CODE
	1683M5W5
	1683M5B5

4000K | CRI >90 | 3660lm

	CODE
	1683M5W7
	1683M5B7



1.0 OPAL

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80/60K 4.22kg

3000K | CRI >90 | 3700lm

	CODE
	168385W5
	168385B5


4000K | CRI >90 | 3700lm

	CODE
	168385W7
	168385B7



FINLIN

CEILING SURFACE



1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

⊕ IP20 SDCM3 L80I50K 0.33kg

CODE		
	174184W_	
	174184CH_	
	174184B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	440 >90	5



2.0

LED LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

⊕ IP20 SDCM3 L80I50K 0.35kg

CODE		
	174284W_	
	174284CH_	
	174284B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >90	3
3000K	670 >90	5



3.0

LED LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

⊕ IP20 SDCM3 L80I50K 0.46kg

CODE		
	174384W_	
	174384CH_	
	174384B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	870 >90	3
3000K	890 >90	5




back




OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM



MORE OPTIONS
weverducre.com/venn-configurator

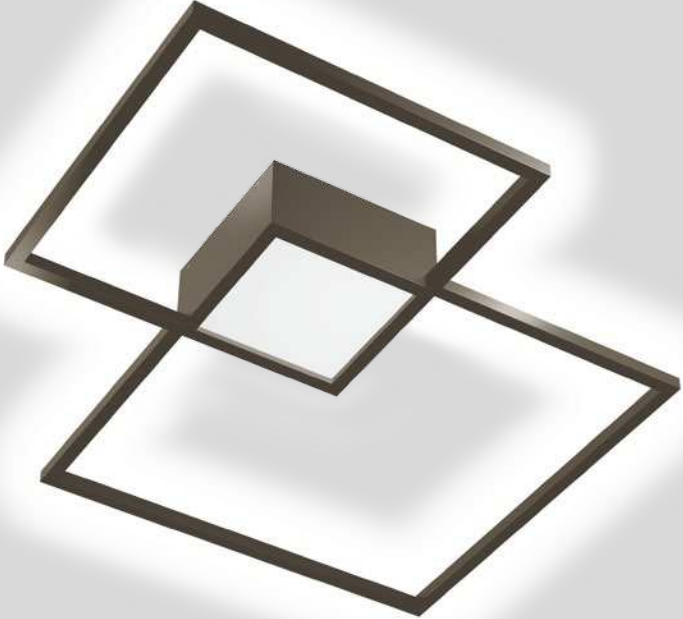

VENN
CEILING SURFACE




1.0

LED LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80l60K 2.50kg

CODE		
	149184W_	
	149184Q_	
	149184B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4



2.0

LED LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80l60K 2.50kg

CODE		
	149284W_	
	149284Q_	
	149284B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4



TAIO IP65

CEILING SURFACE



123



597



607



641

1.0


LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.55kg

CODE

180884W_
180884B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5



back



PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM

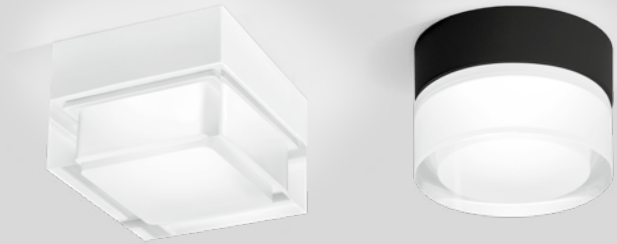


MIRBI IP44
CEILING SURFACE



133



571



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.4kg

3000K | CRI >90 | 660lm

CODE	
	175488W5
	175488E5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.5kg

3000K | CRI >90 | 660lm

CODE	
	175588W5
	175588E5



ROB IP44


CEILING SURFACE



1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover


IP44 SDCM2 L80|60K 0.70kg



2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover


IP44 SDCM2 L80|60K 1.20kg



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg



CODE			
701188W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	1200 >90	3	
3000K	1230 >90	5	


CODE			
701288W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	1850 >90	3	
3000K	1900 >90	5	

CODE			
701388W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	3535 >90	3	
3000K	3620 >90	5	



ROBY IP44

CEILING SURFACE



1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.00kg

CODE		
	135188W_	
	135188B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1040 >90	3
3000K	1100 >90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.55kg

CODE		
	135288W_	
	135288B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1750 >90	3
3000K	1850 >90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 2.45kg


CODE		
	135388W_	
	135388B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3235 >90	3
3000K	3430 >90	5



TOWNA IP44


CEILING SURFACE



1.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover


IP44 SDCM2 L80|60K 1.15kg



2.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover





IP44 SDCM2 L80|60K 1.90kg



3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 3.00kg



CODE			
			178188W_
			178188J_
			178188K_
			178188Z_
			178188B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1200 >90	3
3000K	1230 >90	5

CODE			
			178288W_
			178288J_
			178288K_
			178288Z_
			178288B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1850 >90	3
3000K	1900 >90	5

CODE			
			178388W_
			178388J_
			178388K_
			178388Z_
			178388B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3535 >90	3
3000K	3620 >90	5

TRACKS SYSTEMS

238 — 317

STREX
TRACKS




**48V
TRACKS**
243



**DOTS LIGHT
MODULE**
249



**OPAL LIGHT
MODULE**
249



BOX
251



DOCUS
253



HEXO
255



RAY
257



MATCH
259



CENO
261



MICK
265



MATCH
267



ODREY
269



SOLLI
275

1-PHASE
TRACKS



**1-PHASE
TRACKS**
277



PIRRO SPOT
279



PIRRO OPAL
279



SARA
281



SQUBE
285



DRO
287



HEXO
289



RAY
289



ODREY
291

3-PHASE
TRACKS




**3-PHASE
TRACKS**
295



SQUBE
297



CENO FORT
299



HEXO
303




RAY
303




ROOMOR OFFICE
305

PIRRO
SYSTEM

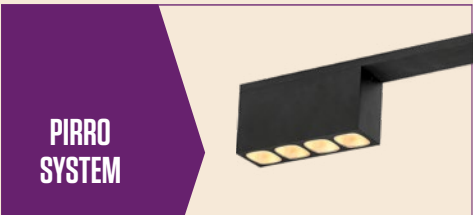


PIRRO SYSTEM
309

ELLO
SYSTEM

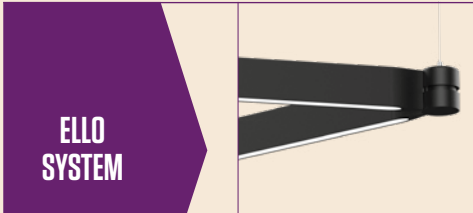

ELLO SYSTEM
311

ILANE

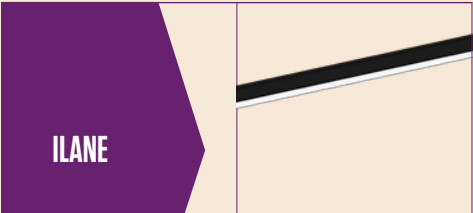

ILANE
315

ON THE RIGHT TRACK









THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets and suspended luminaires are connected and controlled separately. But there's also the 48-volt system. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung: Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Weiters im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.



HAVE A LOOK
weverducre.com/strex-configurator

	STREX TRACK SYSTEM 48V DALI p. 242	1-PHASE TRACK 220-240V p. 276	3-PHASE TRACK 220-240V p. 294
1	CHOOSE YOUR MOUNTING  recessed surface suspended suspended indirect light	 recessed surface suspended	 surface suspended
2	COMBINE IT WITH DIFFERENT INSETS 		
3	INSTALL IT IN YOUR FAVOURITE LAYOUT 		

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq



STREX SYSTEM


RECESSED | 48V DALI TRACKS

RECESSED EXAMPLES

configure your own STREX SYSTEM online at weverducre.com/strex-configurator



more on page 739 and weverducre.com/strex-custom

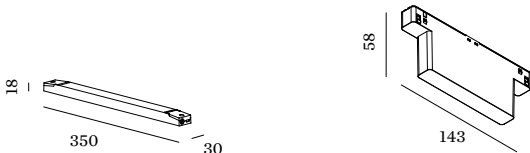

A1 | DRIVER


remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

220-240V		48V	CODE
100W 48V		90218901	
150W 48V		90218902	
for DALI SELV solution see page 740			

F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156




RECESSED

track 48V | 15A | DALI



	CODE		CODE
	1m	90014187	
	1m	90014188	
	2m	90014189	
	2m	90014190	
	3m	90014191	
	3m	90014192	




G | MOUNTING BRACKET

recessed mounting bracket




for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197

E | END CAP

	CODE
	90014149
	90014150



L | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right




	CODE
	90014251
	90014252

for 4 corner O shape, refer to mounting
instructions or online configurator



more on page 739 and
weverducre.com/strex-custom

Electrical components of champagne
and bronze connectors and drivers
will be black.



SURFACE

track 48V | 15A | DALI



	CODE
1m	90014181
1m	90014182

2m	90014183
2m	90014383
2m	90014384
2m	90014184

3m	90014185
3m	90014385
3m	90014386
3m	90014186

B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154

C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector



	CODE
	90014196
	90014197

E | END CAP

	CODE
	90014147
	90014347
	90014348
	90014148


SURFACE EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator

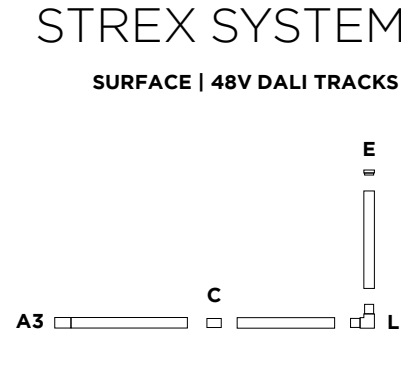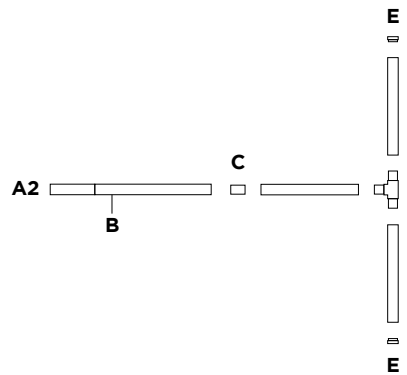

A1 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed




	CODE
100W 48V	90218901
150W 48V	90218902

for DALI SELV solution see page 740



A2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
connection to power feed | incl. DALI
through wiring | housing incl. driver



	CODE
100W	90014166
100W	90014167

150W	90014170
150W	90014171



L | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014198
	90014398
	90014399
	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator


T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014292
	90014293


A3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
with in line connection box



	CODE
100W	90014178
100W	90014378
100W	90014376
100W	90014176

250W	90014179
250W	90014379
250W	90014377
250W	90014177



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014295
	90014294


A4 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
with in track connection



	CODE
100W	90014144
100W	90014143


250W	90014146
250W	90014145



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups


	CODE
	90014155
	90014156





more on page 739 and
weverducre.com/strex-custom

Electrical components of champagne
and bronze connectors and drivers
will be black.



SUSPENDED

track 48V | 15A | DALI



	CODE
1m	90014181
1m	90014182
2m	90014183
2m	90014383
2m	90014384
2m	90014184
3m	90014185
3m	90014385
3m	90014386
3m	90014186

SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect
light | 3.0m suspension sets already
included | 15W/m



3000K >90 CRI 1900lm	
	CODE
2m	900140W5
2m	900140B5
3000K >90 CRI 2850lm	
	CODE
3m	900141W5
3m	900141B5

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket | not
needed for indirect light version

stainless steel colour

	CODE
max. 1.5m	90014160
max. 3m	90014161

black colour

	CODE
max. 1.5m	90014274
max. 3m	90014275

B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154


C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197


SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator



A1 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed
incl. DALI through wiring
suspended driver in line with profile




	CODE
100W	90014260
100W	90014261

150W	90014262
150W	90014263

A2 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed
incl. DALI through wiring
driver ceiling mounted




	CODE
100W	90014168
100W	90014169

150W	90014172
150W	90014173

A3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
including power feed
incl. 3m power cable
suspended driver in the profile





	CODE
100W	90014157
100W	90014174

250W	90014158
250W	90014175

STREX SYSTEM


SUSPENDED | 48V DALI TRACKS

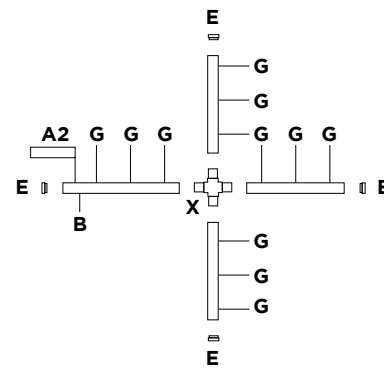

F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156




L | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014198
	90014398
	90014399
	90014199


for 4 corner O shape, refer to mounting
instructions or online configurator



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector


	CODE
	90014292
	90014293



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014295
	90014294





STREX MODULE

48V SYSTEM



1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 24° UGR≤19 SDCM3 L70|60K 0.11kg


non dim

	CODE
	171342W_
	171342B_

DALI dim

	CODE
	171345W_
	171345B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	790 >90	3
3000K	880 >90	5



1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.16kg


non dim

	CODE
	171382W_
	171382B_

DALI dim

	CODE
	171385W_
	171385B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	630 >90	5



2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.32kg

non dim


	CODE
	171482W_
	171482B_

DALI dim

	CODE
	171485W_
	171485B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1225 >90	3
3000K	1265 >90	5



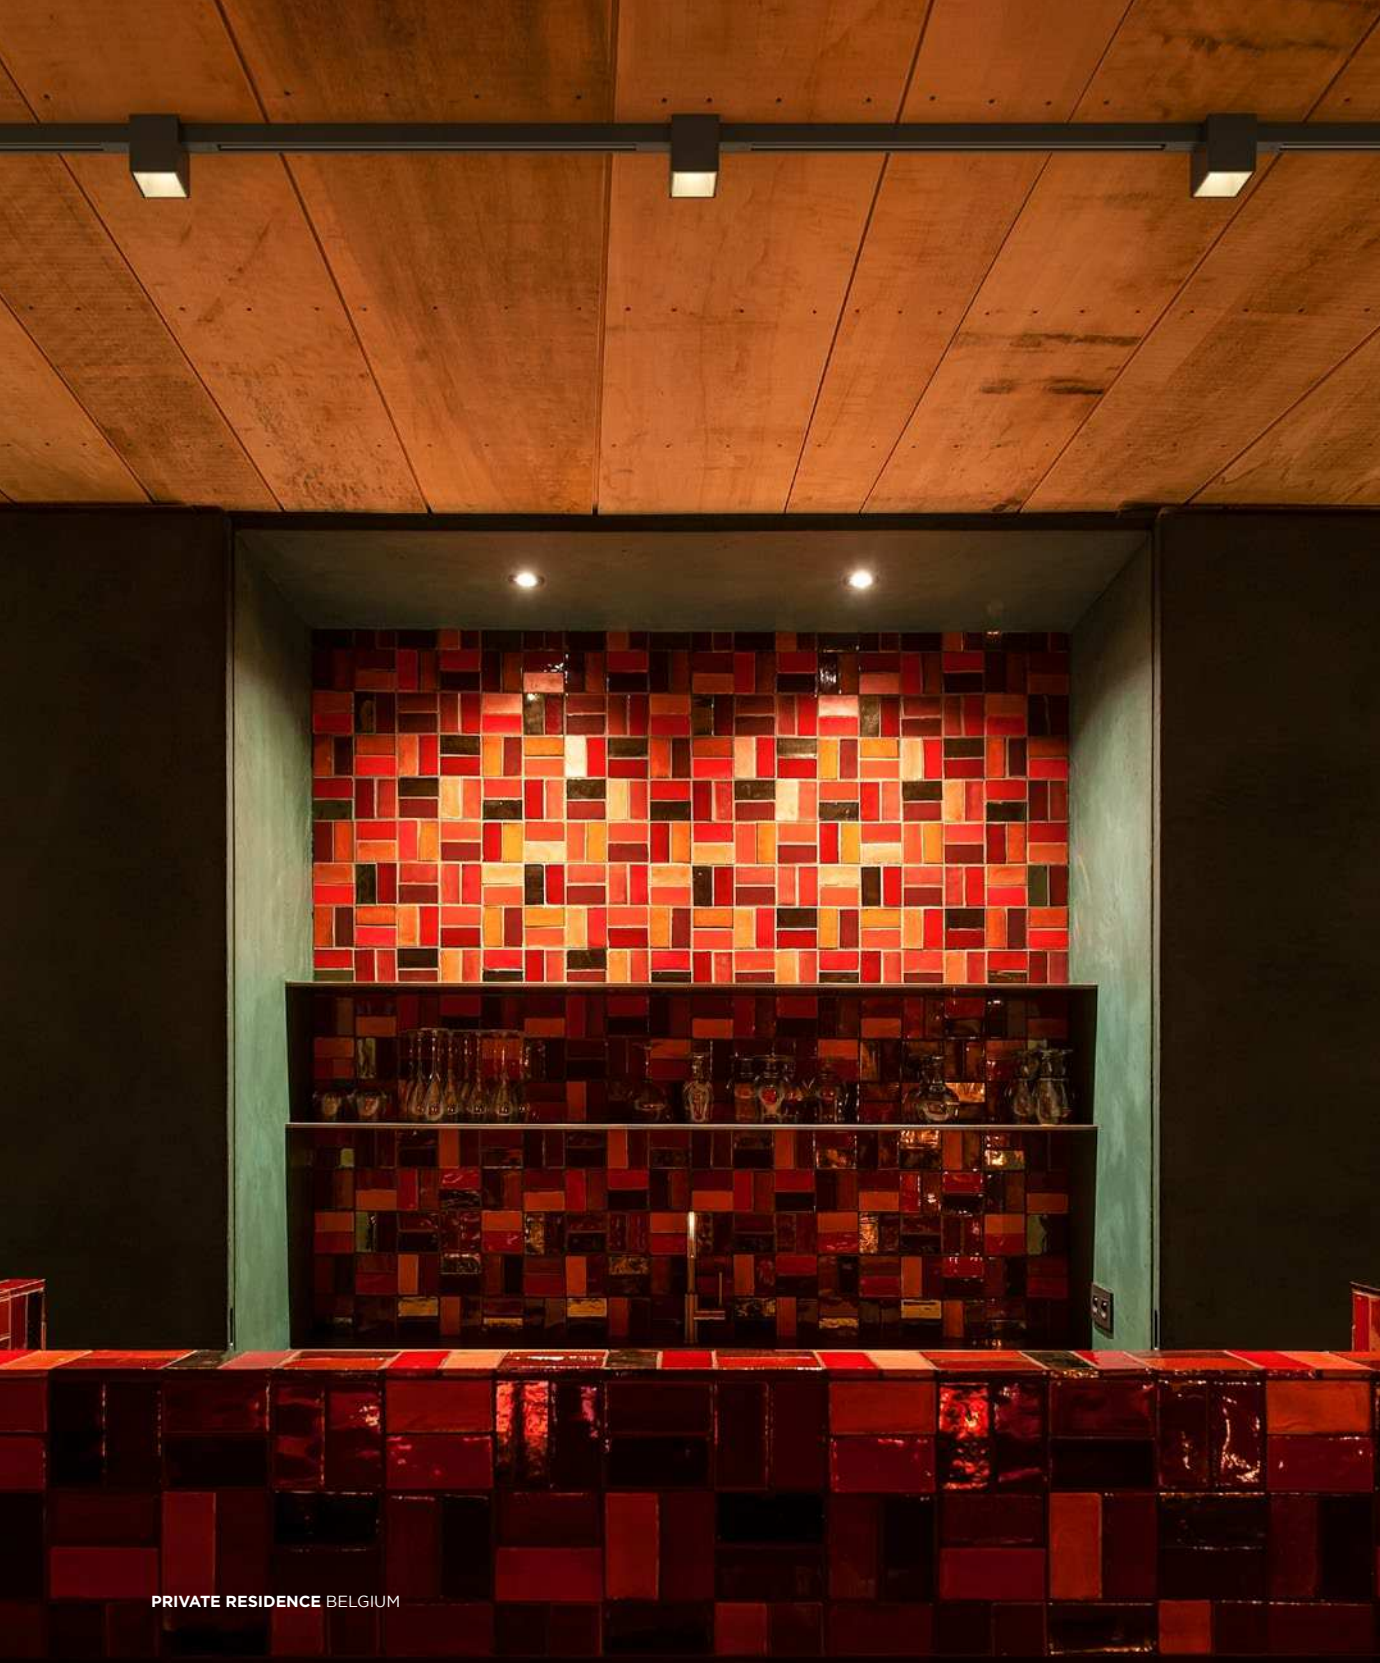

BOX on STREX

48V SYSTEM



1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.20kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258162W_3
	258162B_3
DALI	258165W_3
DALI	258165B_3


Adapter | 3000K | CRI >90 | 470lm

	CODE
	258162W_5
	258162B_5
DALI	258165W_5
DALI	258165B_5

housing | inner reflector colour

	CODE
	W
	WM
	E
	M
	H
	Q
	BQ
	CH
	B

only for ceiling surface and suspended tracks

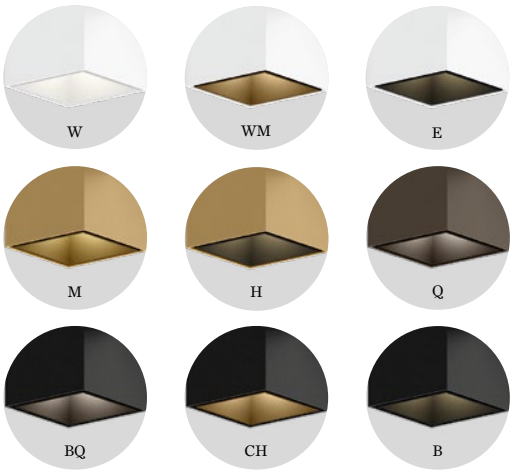



DOCUS on STREX

48V SYSTEM

82

70

70

171

149

325

1.0

LED

LED COB 7W | 48V

aluminium powder coated

brushed wet painted

IP20

25°

SDCM2

L70|50K

0.18kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258362W_3
	258362B_3
DALI	258365W_3
DALI	258365B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258362W_5
	258362B_5
DALI	258365W_5
DALI	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

only for ceiling surface and suspended tracks

back



WEVER & DUCRÉ

252 — 253



HEXO on STREX

48V SYSTEM



1.0

 LED COB 7W | 48V
aluminium powder coated
brushed wet painted

 IP20  25° SDCM2 L70|50K 0.18kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258462W_3
	258462B_3
	DALI 258465W_3
	DALI 258465B_3


Adapter | 3000K | CRI >90 | 470lm

	CODE
	258462W_5
	258462B_5
	DALI 258465W_5
	DALI 258465B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

only for ceiling surface and suspended tracks

 back

WEVER & DUCRÉ 254 — 255



RAY on STREX

48V SYSTEM

82 | 171
ø70

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 25° SDCM2 L70|50K 0.16kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258262W_3
	258262B_3
DALI	258265W_3
DALI	258265B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258262W_5
	258262B_5
DALI	258265W_5
DALI	258265B_5

housing | inner reflector colour

	CODE
	W
	WM
	E
	M
	H
	Q
	BQ
	CH
	B

only for ceiling surface and suspended tracks

[back](#)

WEVER & DUCRÉ 256 – 257

161

289 | 303

331

465

609

643




SHOWROOM QSINE KNOXKE | BELGIUM

MATCH on STREX

48V SYSTEM



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED COB8W | 48V
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 0-90°|360° A 30° SDCM2 L80|50K 0.14kg

non dim

	CODE
	179152W_
	179152BL_
	179152CH_
	179152B_

DALI dim

	CODE
	179155W_
	179155BL_
	179155CH_
	179155B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	600 >90	5

accessories on page 751



CENO on STREX

48V SYSTEM

115 | 171
55 / ø34

171
ø34 / 55

1.0

LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.11kg

non dim

	CODE
	166562W_
	166562BQ_
	166562K_
	166562CH_
	166562B_

DALI dim

	CODE
	166565W_
	166565BQ_
	166565K_
	166565CH_
	166565B_

OPTIONAL
honeycomb louver

	CODE
	90051131

accessories on page 751

2.0

2x LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.19kg

non dim

	CODE
	166662W_
	166662BQ_
	166662K_
	166662CH_
	166662B_

DALI dim

	CODE
	166665W_
	166665BQ_
	166665K_
	166665CH_
	166665B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

accessories on page 751

back

WEVER & DUCRÉ 260 – 261



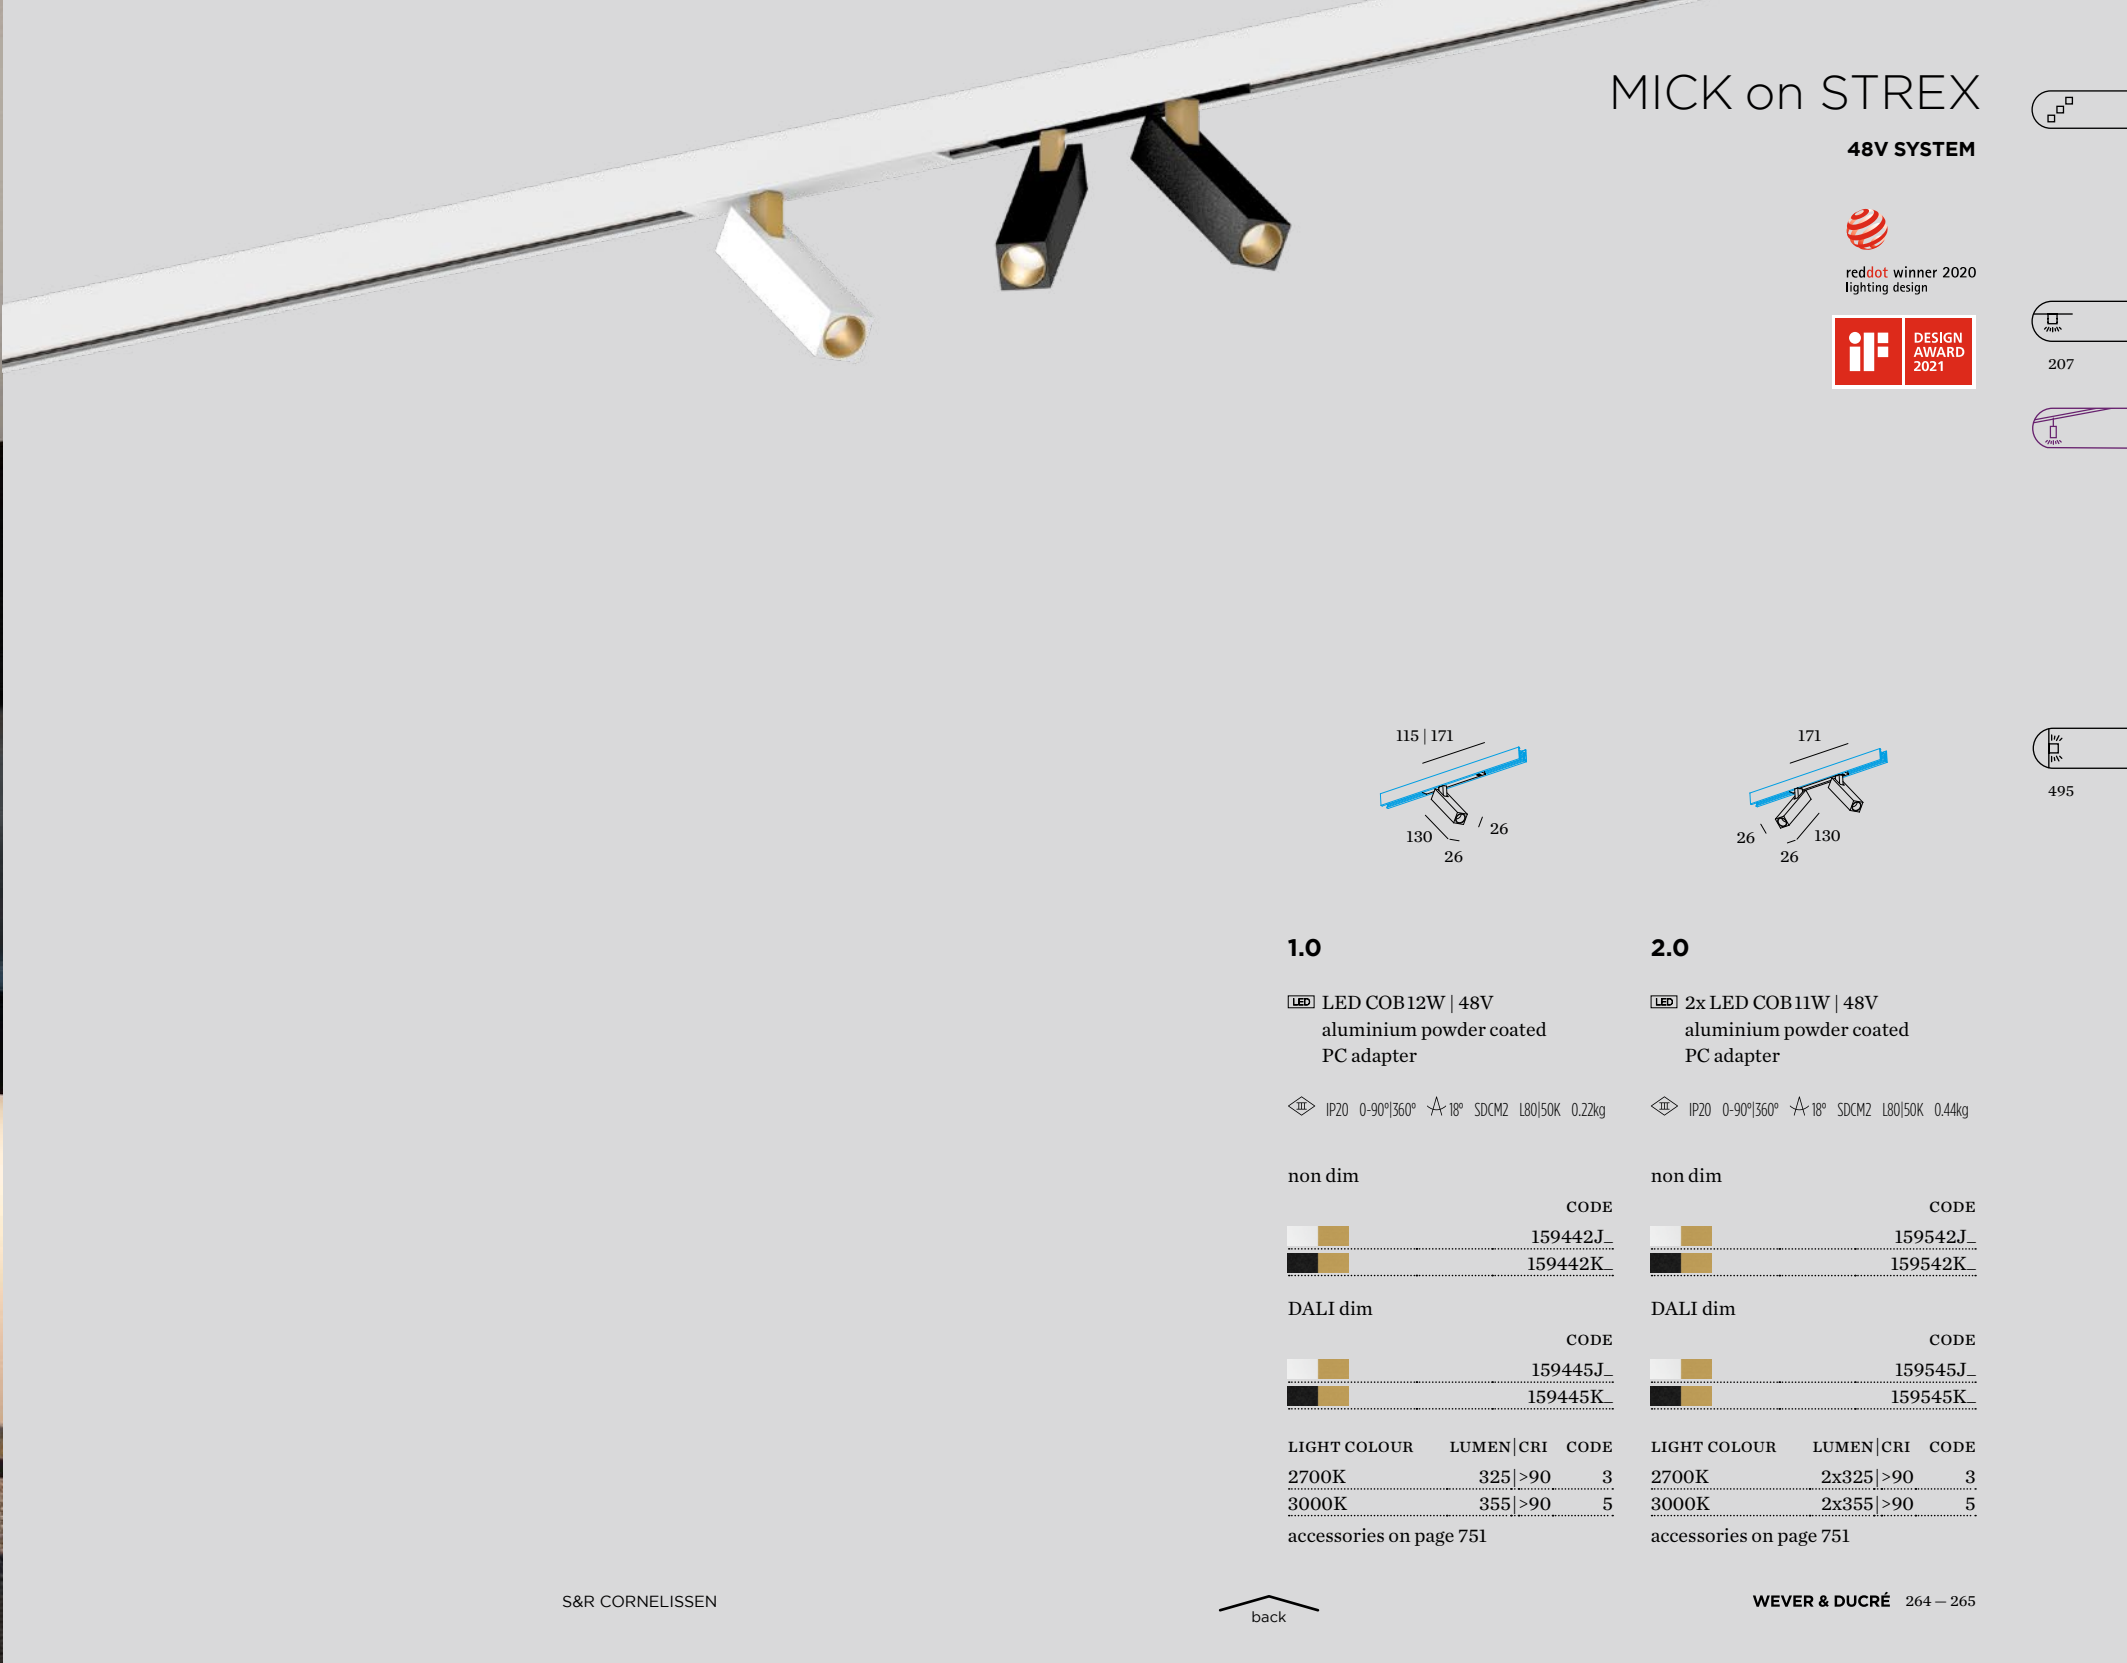

MICK on STREX

48V SYSTEM





reddot winner 2020
lighting design



207



495



1.0

LED LED COB12W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° A 18° SDCM2 L80|50K 0.22kg

non dim

	CODE
	159442J_
	159442K_

DALI dim

	CODE
	159445J_
	159445K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	355 >90	5

accessories on page 751

2.0

LED 2x LED COB11W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° A 18° SDCM2 L80|50K 0.44kg

non dim

	CODE
	159542J_
	159542K_

DALI dim


	CODE
	159545J_
	159545K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x355 >90	5

accessories on page 751



RESTAURANT PASSADIS DEL PEP | SILVIA FERNÁNDEZ BARCELONA | SPAIN

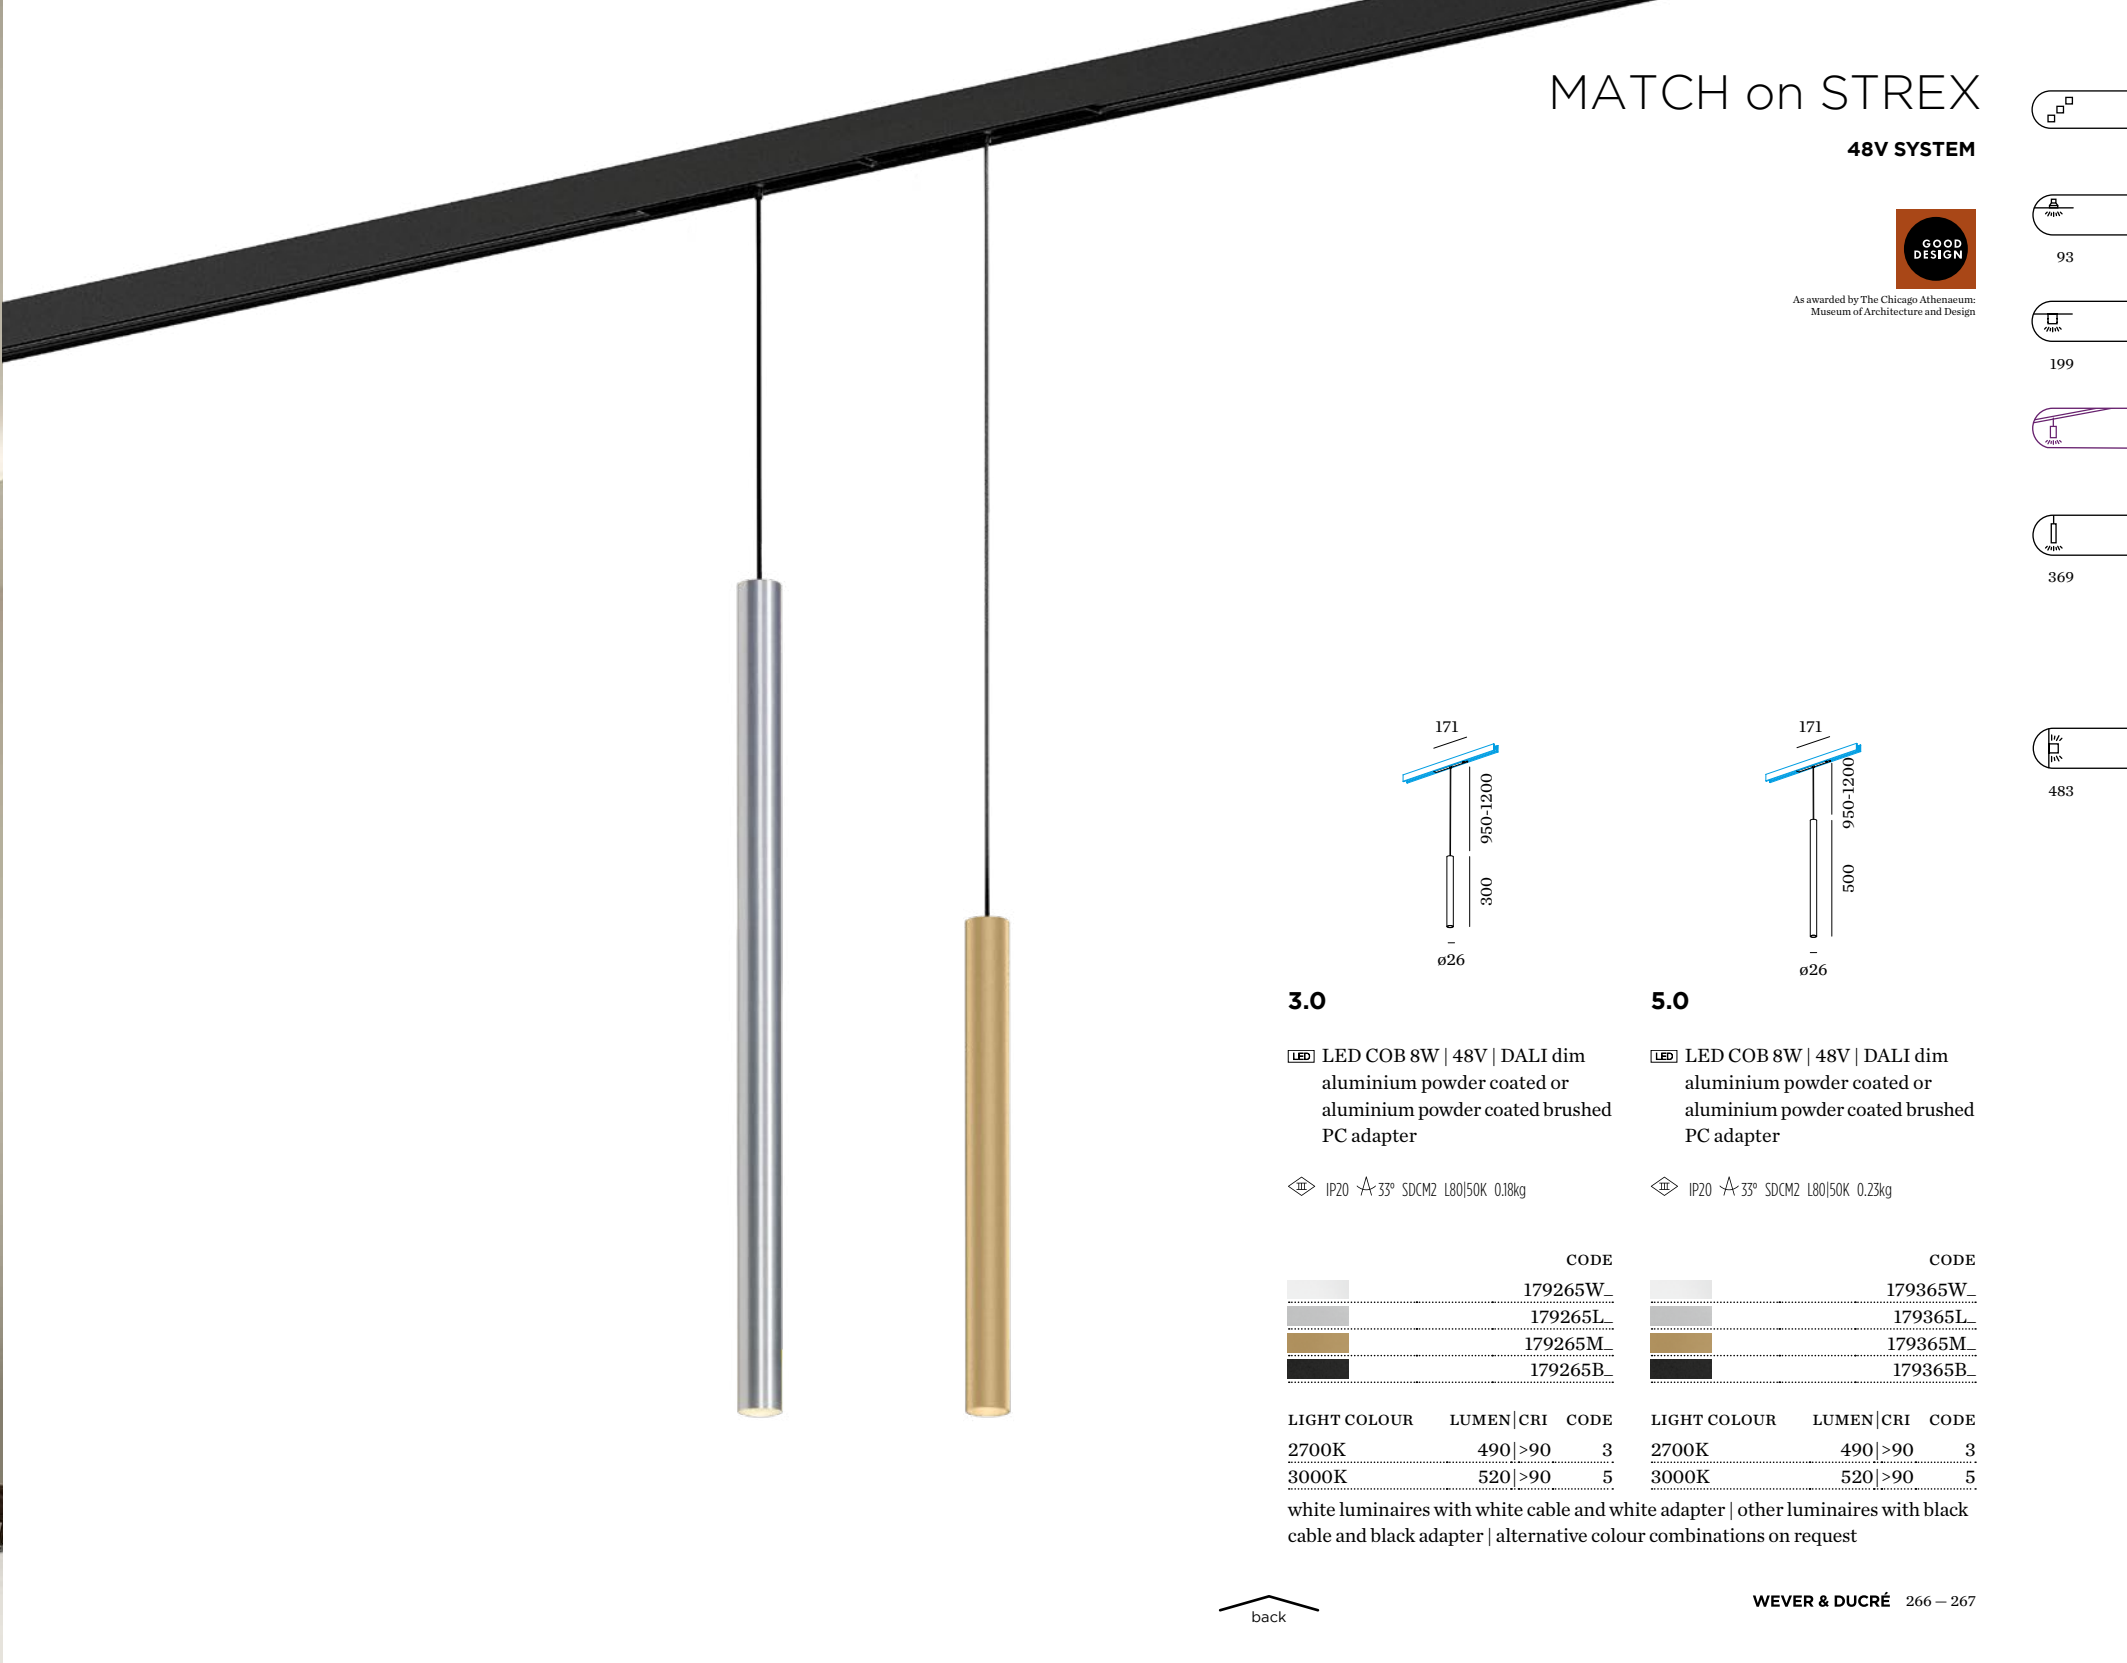


MATCH on STREX

48V SYSTEM



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



3.0


LED COB 8W | 48V | DALI dim
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 33° SDCM2 L80|50K 0.18kg

	CODE
	179265W_
	179265L_
	179265M_
	179265B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request






5.0

LED COB 8W | 48V | DALI dim
aluminium powder coated or
aluminium powder coated brushed
PC adapter

IP20 33° SDCM2 L80|50K 0.23kg

	CODE
	179365W_
	179365L_
	179365M_
	179365B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



weverducre.com/odrey-collection

1.1

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.28kg

		CODE	
		187165WW_	
		187165GG_	
		187165BB_	
		187165WG_	
		187165BG_	
		187165GB_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

1.2

LED COB 8W | 48V | DALI dim
aluminium wet painted | shade
matching inner cover included
PC adapter

IP20 32° SDCM2 L70|55K 0.48kg

		CODE	
		187265WW_	
		187265GG_	
		187265BB_	
		187265WG_	
		187265BG_	
		187265GB_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5


1.3

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|55K 0.27kg

		CODE	
		187365WW_	
		187365GG_	
		187365BB_	
		187365WG_	
		187365BG_	
		187365GB_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.4


LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 A 32° SDCM2 L70|55K 0.32kg



CODE			
	187465WW_		
	187465GG_		
	187465BB_		
	187465WG_		
	187465BG_		
	187465GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.6

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter


IP20 A 32° SDCM2 L70|55K 0.38kg



CODE			
	187665WW_		
	187665GG_		
	187665BB_		
	187665WG_		
	187665BG_		
	187665GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5


optional inner cover on page 755



1.7

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 A 32° SDCM2 L70|55K 0.34kg



CODE			
	187765WW_		
	187765GG_		
	187765BB_		
	187765WG_		
	187765BG_		
	187765GB_		

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

optional inner cover on page 755





SOLLI on STREX

48V SYSTEM

1.0

LED COB 5W | 48V | DALI dim
aluminium powder coated
black cable | PC adapter
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.70kg

CODE		
	238185FD_	
	238185TD_	
	238185WB_	

other cable lengths and colour combinations on request



LIGHT COLOUR	LUMEN CRI	CODE
2700K	215 >90	3
3000K	230 >90	5

back

WEVER & DUCRÉ 274 — 275

220-240V TRACKS | ACCESSORIES


configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

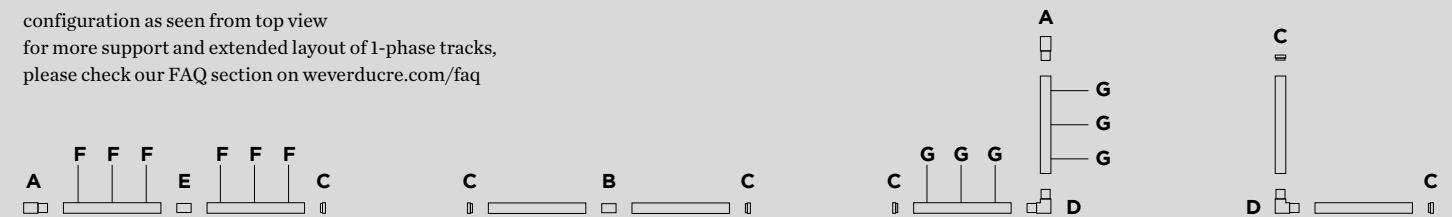

recessed | 220-240V | 16A




	CODE
 1m	90014118
 1m	90014119
 2m	90014120
 2m	90014121
 3m	90014122
 3m	90014123



for recessed fixation



CODE
90014100
for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



surface | suspended | 220-240V | 16A




		CODE
	1m	90014001
	1m	90014007
	2m	90014002
	2m	90014008
	3m	90014003
	3m	90014009




complete suspension set
incl. ceiling fixation bracket

		CODE
	max. 1.5m	90014101
	max. 1.5m	90014102
	max. 3m	90014103
	max. 3m	90014104


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014018
	90014019


220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014020
	90014021




straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037




CODE

	CODE
	90014028
	90014029

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025


220-240V | max. 3 x 1.5mm² - 16A

CODE
90014026
90014027



straight | 220-240V | 16A

CODE
90014022
90014023



only use with recessed tracks

CODE
90014124
90014125

more 1-phase track accessories on
page 752



PIRRO on track


1-PHASE



77



177




2.0 SPOT

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° A32° SDCM2 L70|55K 0.36kg

	CODE
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5




4.0 SPOT

4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° A32° SDCM2 L70|55K 0.58kg

	CODE
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° SDCM3 L80|60K 0.33kg

	CODE
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	290 >90	5




4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global®
track adapter

IP20 310° SDCM3 L80|60K 0.54kg

	CODE
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5



white luminaires come with a
white adapter | other colours are
standard with black adapter

back





ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKE-HEIST | BELGIUM



SARA on track

1-PHASE



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 34° SDCM3 L70|55K 0.24kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.16kg

	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >80	3
3000K	700 >80	5


	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

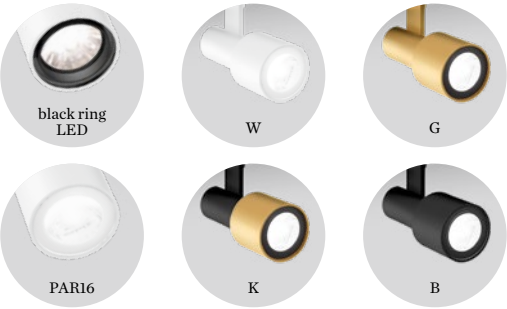



BRACE | HELLE FLOU | ANKER & CO COPENHAGEN | DENMARK



SHOWROOM JEUDAN | JEUDAN DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK



SQUBE on track

1-PHASE

77
100
107
ø55

77
100
107
ø55

1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 39° SDCM3 L70|55K 0.36kg

	CODE
	144168W_
	144168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144120W0
	144120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743

black ring
LED

PAR16

back

WEVER & DUCRÉ 284 — 285



DRO on track


1-PHASE



211



373



511



575 | 585

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20 0.60kg

CODE

1724G0WB0

1724G0YB0


OPTIONAL

QT14 3.1W | G9 | phase-cut dim

CODE

3000K | 280lm 9010G804


specs on page 744





RAY | HEXO on track

1-PHASE



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

⊕ IP20 0.58 | 0.74kg


2.0	CODE
200mm	
	215520G0
	215520Q0
	215520P0
	215520B0

3.0	CODE
300mm	
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743
white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

⊕ IP20 0.54 | 0.68kg


2.0	CODE
200mm	
	217520W0
	217520G0
	217520M0
	217520P0
	217520B0

3.0	CODE
300mm	
	217620W0
	217620G0
	217620M0
	217620P0
	217620B0


OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


more options and specs on page 743
white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request



155 | 161



327 | 331



465



609




643



ODREY on track

1-PHASE



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.29kg


	CODE
	187120WW0
	187120GG0
	187120BB0
	187120WG0
	187120BG0
	187120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included
incl. 1-phase Global® track adapter

IP20 0.49kg


	CODE
	187220WW0
	187220GG0
	187220BB0
	187220WG0
	187220BG0
	187220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.28kg


	CODE
	187320WW0
	187320GG0
	187320BB0
	187320WG0
	187320BG0
	187320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743




weverducre.com/odrey-collection



ODREY on track


1-PHASE



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter


IP20 0.33kg



1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.36kg



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.32kg



WW



GG



BB



WG



BG



GB

CODE	
	187420WW0
	187420GG0
	187420BB0
	187420WG0
	187420BG0
	187420GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743

CODE	
	187620WW0
	187620GG0
	187620BB0
	187620WG0
	187620BG0
	187620GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743

CODE	
	187720WW0
	187720GG0
	187720BB0
	187720WG0
	187720BG0
	187720GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more options and specs on page 743





3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

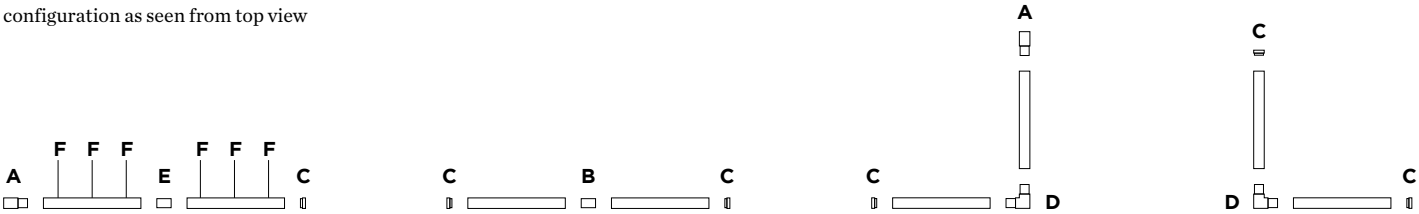

TRACK PROFILE

surface | suspended | DALI
220-240V | 16A




		CODE
	1m	90014200
	1m	90014201
	2m	90014202
	2m	90014203
	3m	90014204
	3m	90014205



F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


		CODE
	max. 1.5m	90014206
	max. 1.5m	90014207
	max. 3m	90014208
	max. 3m	90014209
for 1.0m - 2pcs needed		
for 2.0m - 3pcs needed		
for 3.0m - 4pcs needed		



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014240
	90014241



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014238
	90014239



B | MIDDLE FEED


straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT


	CODE
	90014216
	90014217



D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014220
	90014221



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014222
	90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

	CODE
1m	90014236
1m	90014237

more 3-phase track accessories on
page 753



SQUBE on track

3-PHASE

77

100

121

ø55

1.0 PAR16

PAR16 max. 12W | GU10

100-240VAC | 50-60Hz

aluminium powder coated

3-phase track adapter

⊕ IP20 0-90°|355° 0.32kg

CODE

144720W0

144720B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K | 460lm 901228W3

2700K | 437lm 901228B3

3000K | 500lm 901228W5

3000K | 457lm 901228B5

more options and specs on page 743

90

116

135

ø65

2.0 LED

LED LED COB 12W | phase-cut dim

220-240VAC | 50-60Hz

aluminium powder coated

3-phase track adapter

⊕ IP20 0-90°|355° SDCM2 L70|50K 0.40kg

CODE

144368W_

144368B_

LIGHT COLOUR

LUMEN|CRI

CODE

2700K | 32° 940|>90 3

3000K | 32° 970|>90 5

1800K-3000K | 58° 640|>90 9

110

140

162

ø80

3.0 LED

LED LED COB 16W | phase-cut dim

220-240VAC | 50-60Hz

aluminium powder coated

3-phase track adapter

⊕ IP20 0-90°|355° 27° SDCM2 L70|50K 0.75kg

CODE

144558W_

144558B_

LIGHT COLOUR

LUMEN|CRI

CODE

2700K 1520|>90 3

3000K 1565|>90 5

black ring LED

PAR16

back



CENO fort on track

3-PHASE

99

201

487

250

112

ø72

LED

LED COB 36W

220-240VAC | 50-60Hz

3-phase track adapter incl. driver

aluminium powder coated

IP20 0-90°|360°

24°

SDCM2

L80|50K

0.78kg

CODE

166963W_

166963B_

CODE

166965W_

166965B_

LIGHT COLOUR

LUMEN|CRI

CODE

3000K

2650|>90

5

4000K

2830|>90

7

honeycomb

OPTIONAL

honeycomb louver

CODE

90051132

back

WEVER & DUCRÉ 298 – 299





RAY | HEXO on track

3-PHASE

HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

⊕ IP20 0.58 | 0.74kg

2.0	CODE
200mm	215320G0
	215320Q0
	215320P0
	215320B0

3.0	CODE
300mm	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743
white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request

RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

⊕ IP20 0.54 | 0.68kg

2.0	CODE
200mm	217320W0
	217320G0
	217320M0
	217320P0
	217320B0

3.0	CODE
300mm	217420W0
	217420G0
	217420M0
	217420P0
	217420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743
white luminaires with white cable and white adapter | other luminaires with black cable and black adapter | alternative colour combinations on request

back

WEVER & DUCRÉ 302 – 303



ROOMOR OFFICE on track



3-PHASE



223



411



1.0 MICROPRISMATIC

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz
aluminium wet painted
microprismatic PMMA cover
3-phase track adapter incl. driver

IP20 SDCM3 L80/60K UGR ≤ 19 4.43kg

3000K | CRI >90 | 3660lm


CODE

1684M5W5
1684M5B5

4000K | CRI >90 | 3660lm

CODE

1684M5W7
1684M5B7



1.0 OPAL

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz
aluminium wet painted
opal PMMA cover
3-phase track adapter incl. driver

IP20 SDCM3 L80/60K 4.43kg

3000K | CRI >90 | 3700lm


CODE

168485W5
168485B5

4000K | CRI >90 | 3700lm

CODE

168485W7
168485B7

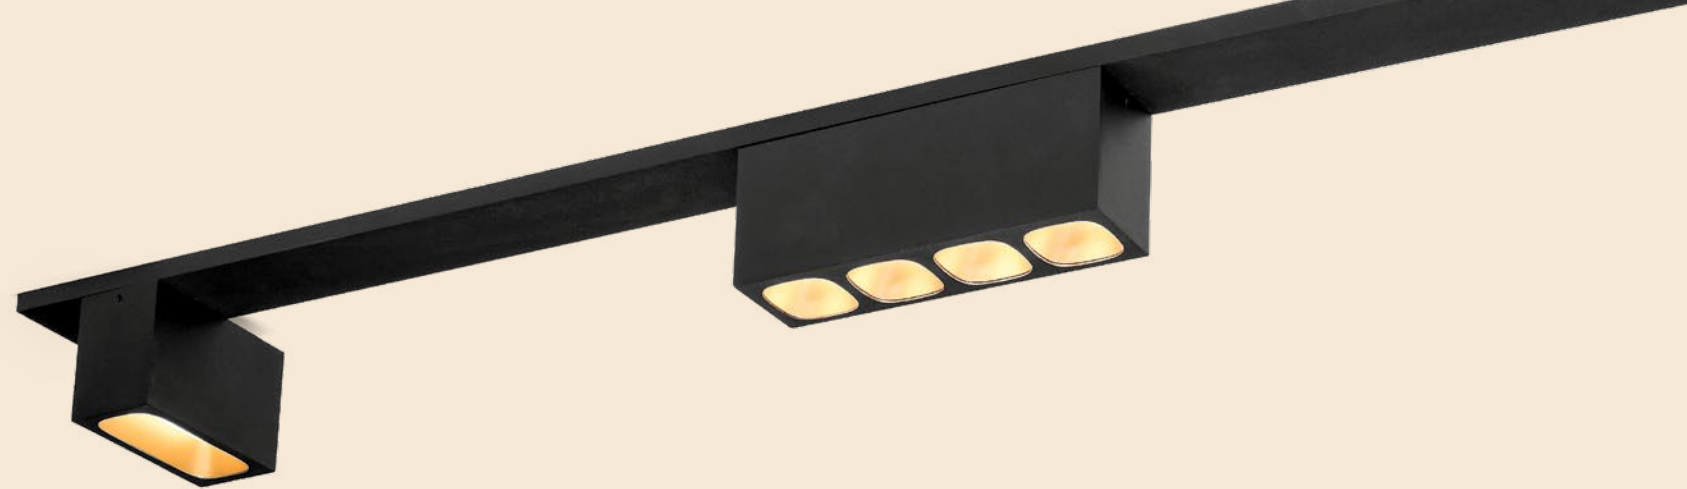

HOW TO COMBINE YOUR PIRRO SYSTEM

YEP, RIGHT THERE


SPOT LANDING FOR YOUR FAVOURITE LIGHT

There's certainly one question you no longer need to ask: Where is the power outlet? That's because this doesn't really matter with PIRRO SYSTEM. After all, lights can be optically positioned precisely where they look just right – perfect, in fact. How does it work? PIRRO opal and PIRRO spot insets can be attached to two rails of different lengths and in many different versions. This lets you create a small work of art on every ceiling reminiscent of well-known Bauhaus classics – and that's no coincidence. Serge Cornelissen used exactly those classics as models or his lamp creation, which above all sets itself apart with its functionality, style and minimalism. A true success story, if we do say to ourselves. We'd like to add that the PIRRO SYSTEM is available in subtle white, gold or black, and can be combined with insets in two sizes and four different colours.


Eine Frage müssen Sie sich ab sofort bestimmt nicht mehr stellen und zwar: Wo ist hier der Stromauslass? Denn das ist mit PIRRO SYSTEM ziemlich egal. Schließlich lassen sich Leuchten damit optisch punktgenau dort platzieren, wo sie einfach richtig und zwar richtig gut aussehen. Wie's funktioniert? PIRRO Opal und PIRRO Spot Insets können auf zwei unterschiedlich langen Schienen und in vielen verschiedenen Varianten angebracht werden. So entsteht an jeder Decke ein kleines Kunstwerk, das nicht umsonst an bekannte Bauhaus-Klassiker denken lässt. Genau die dienten Serge Cornelissen nämlich als Vorbild für seine Leuchten-Kreation, die vor allem durch Funktionalität, Stil und Minimalismus besticht. Echt gelungen, finden wir und fügen hinzu, dass PIRRO SYSTEM in dezentem Weiß, Gold oder Schwarz zu haben ist und mit Insets in zwei Größen und vier verschiedenen Farbvarianten kombiniert werden kann.

CEILING BASE SURFACE

available in ○ white, ● gold or ● black



1.0
754 mm



2.0
1150 mm

PIRRO OPAL OR SPOT INSETS

available in ● white and black, ● white and gold, ● black and gold or ● black



2.0
opal



2.0
spot




4.0
opal




4.0
spot

CREATE YOUR OWN DESIGN

some examples

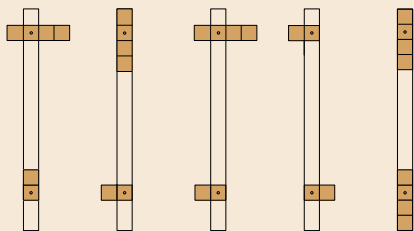

ceiling base 1.0 with insets
754 mm

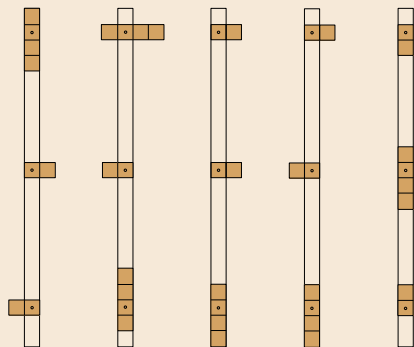

ceiling base 2.0 with insets
1150 mm




PIRRO SYSTEM

CEILING SURFACE




CHOOSE YOUR BASE

1.0 ceiling base
ceiling base for 2 insets
aluminium powder coated




	CODE
	90052072
	90052074
	90052073

2.0 ceiling base
ceiling base for 3 insets
aluminium powder coated



	CODE
	90052075
	90052077
	90052076




2.0 SPOT

 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

⊕ IP20 Λ 32° SDCM2 L70|55K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5




4.0 SPOT

 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

⊕ IP20 Λ 32° SDCM2 L70|55K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5




2.0 OPAL

 LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

⊕ IP20 SDCM3 L80|60K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240 >90	3
3000K	260 >90	5




4.0 OPAL

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

⊕ IP20 SDCM3 L80|60K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5



A 1.0	
LED PCB 18W dimmable 220-240VAC 50-60Hz aluminium powder coated opal PMMA cover	
IP20 SDCM3 L80/50K 1.70kg	
phase-cut dim 3000K >90 CRI 1090lm	
CODE	
	500384W5
	500384B5
DALI dim incl. driver 3000K >90 CRI 1090lm	
CODE	
	500385W5
	500385B5

B CONNECTOR POINT	
phase-cut dim up to max. 4 fixtures DALI dim up to max. 2 fixtures	
CODE	
	900190W1
	900190B1

C STEEL SUSPENSION CABLE	
CODE	
2.0m	90015102

D1 POWER FEEDER	
for phase-cut dim incl. steel suspension cable 2.0m max. 10 luminaires per power feeder	
CODE	
	90018010
	90018011


D2 POWER FEEDER	
for DALI dim incl. steel suspension cable 2.0m max. 10 luminaires per power feeder	
CODE	
	90018012
	90018013

ELLO SYSTEM

CEILING SURFACE | SUSPENDED


SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

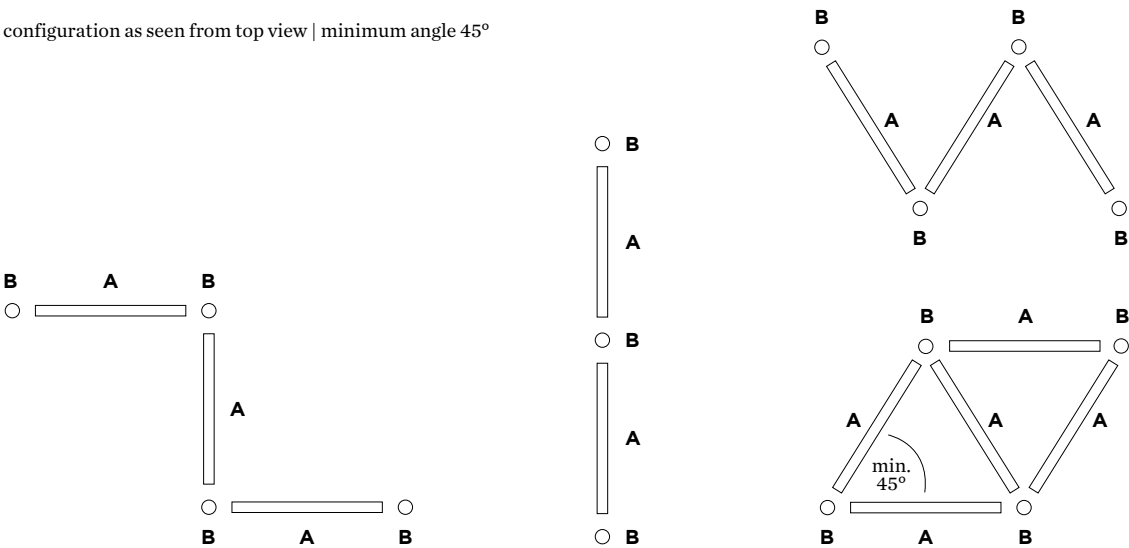

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

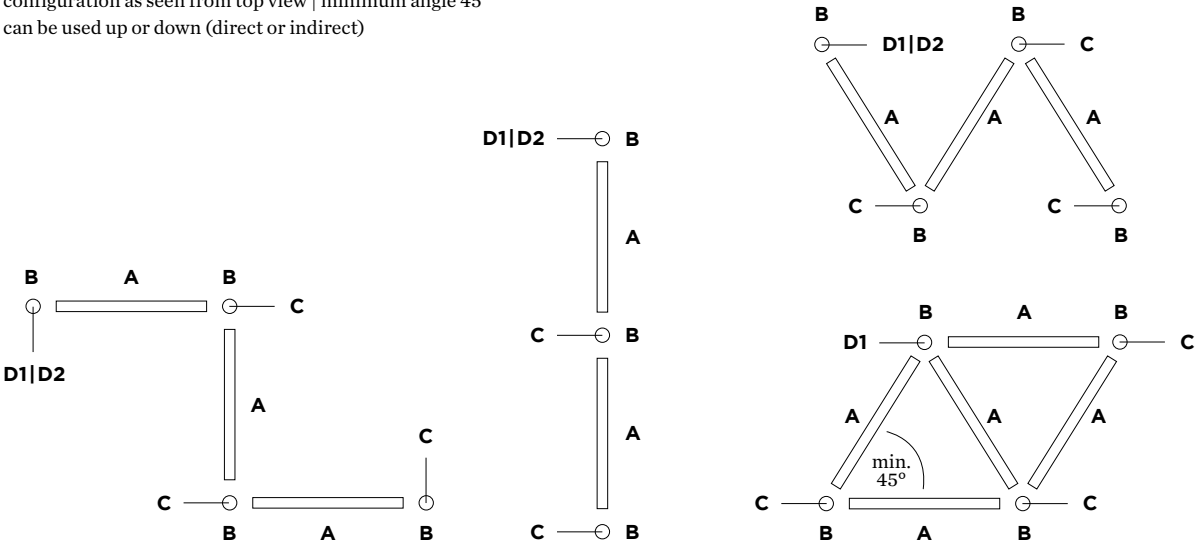






OFFICE KR PROPERTIES | H2A ARCHITECTURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA



OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY

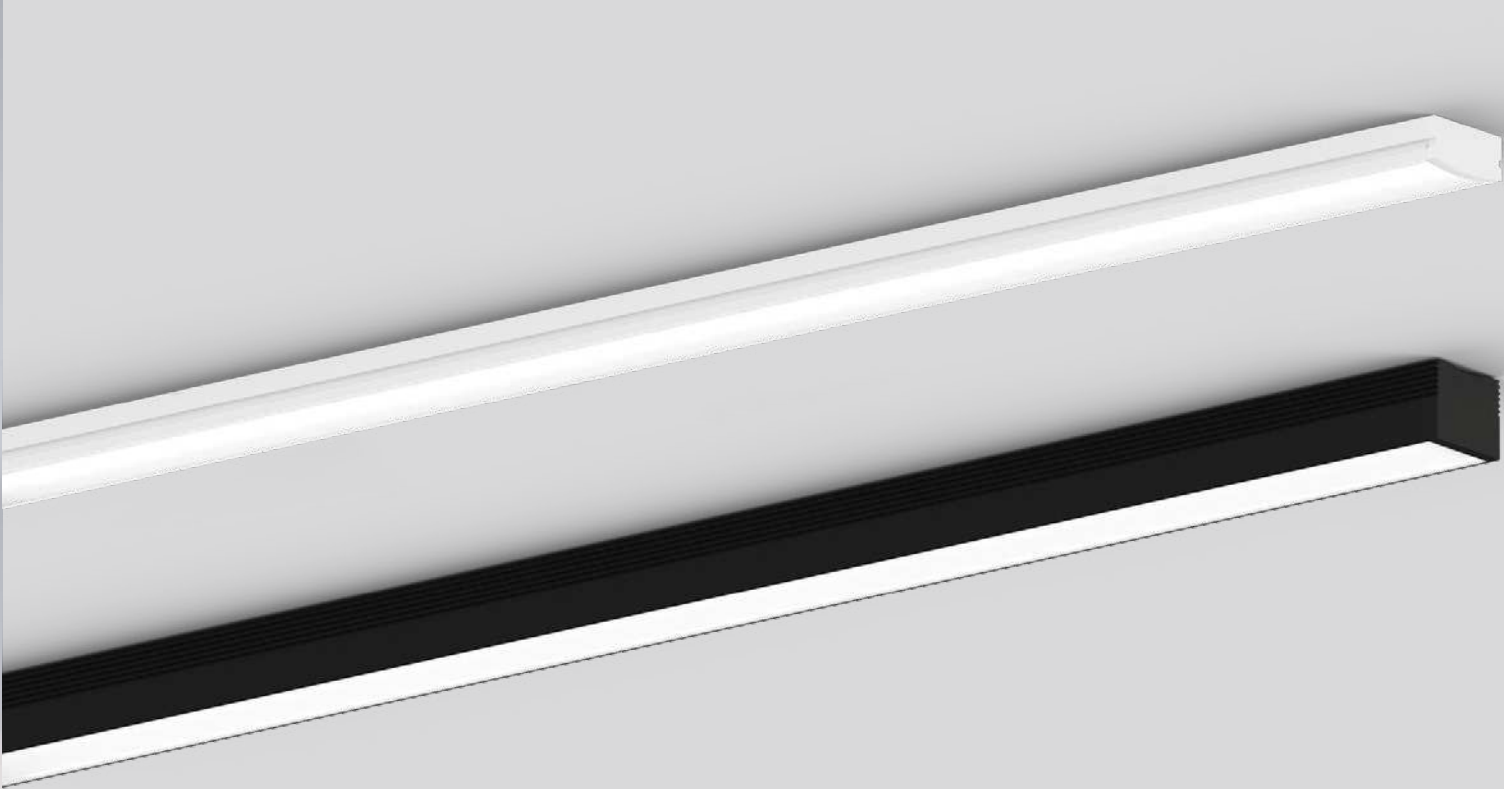

for net output of LED strip on profiles,
check weverducre.com/ilane




ILANE

CEILING SURFACE

1.0 PROFILE


aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911991W2
2m	911991B2
3m	911991W3
3m	911991B3

2.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911992W2
2m	911992B2
3m	911992W3
3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21_
30W 3m	9003S31_
50W 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22_
45W 3m	9003S32_
75W 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21_
30W 3m	9003S31_
50W 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m


CODE	
30W 2m	9003S22_
45W 3m	9003S32_
75W 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V


CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

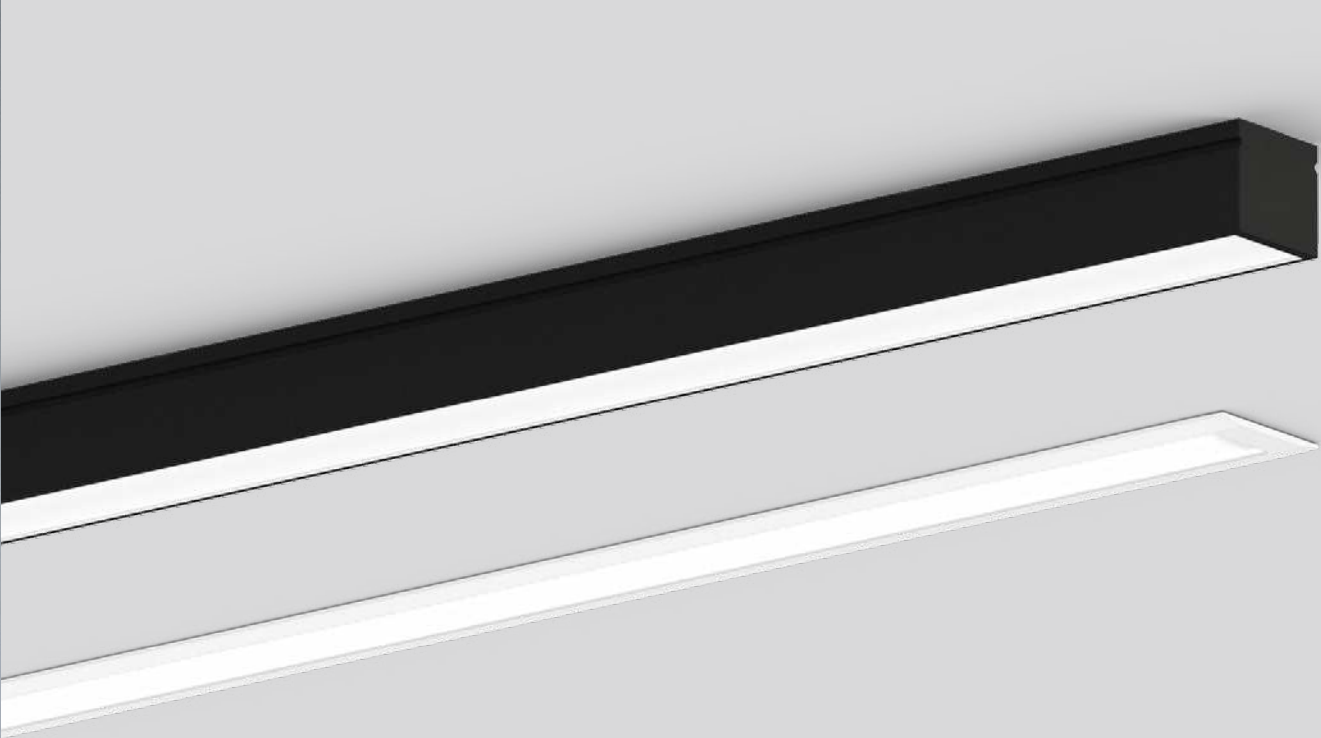

3.0 PROFILE


aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911993W2
2m	911993B2
3m	911993W3
3m	911993B3

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips



CODE	
2m	911994W2
2m	911994B2
3m	911994W3
3m	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21_
30W 3m	9003S31_
50W 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22_
45W 3m	9003S32_
75W 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21_
30W 3m	9003S31_
50W 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22_
45W 3m	9003S32_
75W 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 740

OPTIONAL


Black diffuser | only for 3.0

CODE	
2m	911912B1
3m	911913B1

Double side tape for profile fixation

CODE	
3m	90019199

more accessories on page 750



for net output of LED strip on profiles,
check weverducre.com/ilane

CEILING
SUSPENDED

318 — 431

CEILING
SUSPENDED
SINGLE



BOX
323



DOCUS
325



HEXO
327



RAY
331



ODREY
333



WETRO
341



SHIEK 1.0
347



SHIEK 3.0
349



SHIEK 4.0
351



DINOR 1.0
355



DINOR 2.0
355




DINOR 3.0
355



TRACE 1.1
357



TRACE 2.0
359



**TRACE
CHANDELIER**
361



CONE
365



CORK
367



MATCH
369



SOLLI
371



DRO
373



WIRO
379



MIRRO
397



J.J.W.
399



ROOMOR
407




**ROOMOR
OFFICE**
411



BISHOP
413




NEW
FINLIN
417



NET
419




NEW
FIL
421



ELLO
423




DARF
425



GIGANT
429

CEILING
SUSPENDED
MULTI



BOX MULTI
323



DOCUS MULTI
325




HEXO MULTI
327




RAY MULTI
331



ODREY MULTI
333



WETRO MULTI
341




SHIEK MULTI
347

CHOOSE YOUR BASE


IT’S A MATCH!

If you have fallen in love with one of our luminaires, but need a matching ceiling rose: Then perhaps we can act as a “dating agency”. The choice basically comes down to single or multiple pendant roses. For single pendants, they are either surface mounted, semi-recessed or invisible. The multiple pendant ceiling rose is available in a round or rectangular shape. And last but not least, there is also a wall version with an integrated light switch. Have you found your match? Then all that remains to do now is decide on a suitable lampshade and a suitable colour on the following pages.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen Einzel- oder Multiabhängung wählen. Bei der Einzelabhängung gibt es eine Aufbau-, eine Semi-Recessed oder eine Invisible Variante. Den Multibaldachin gibt es in runder oder gerader Form. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für einen passenden Lampenschirm auf den nächsten Seiten und eine passende Farbe entscheiden.

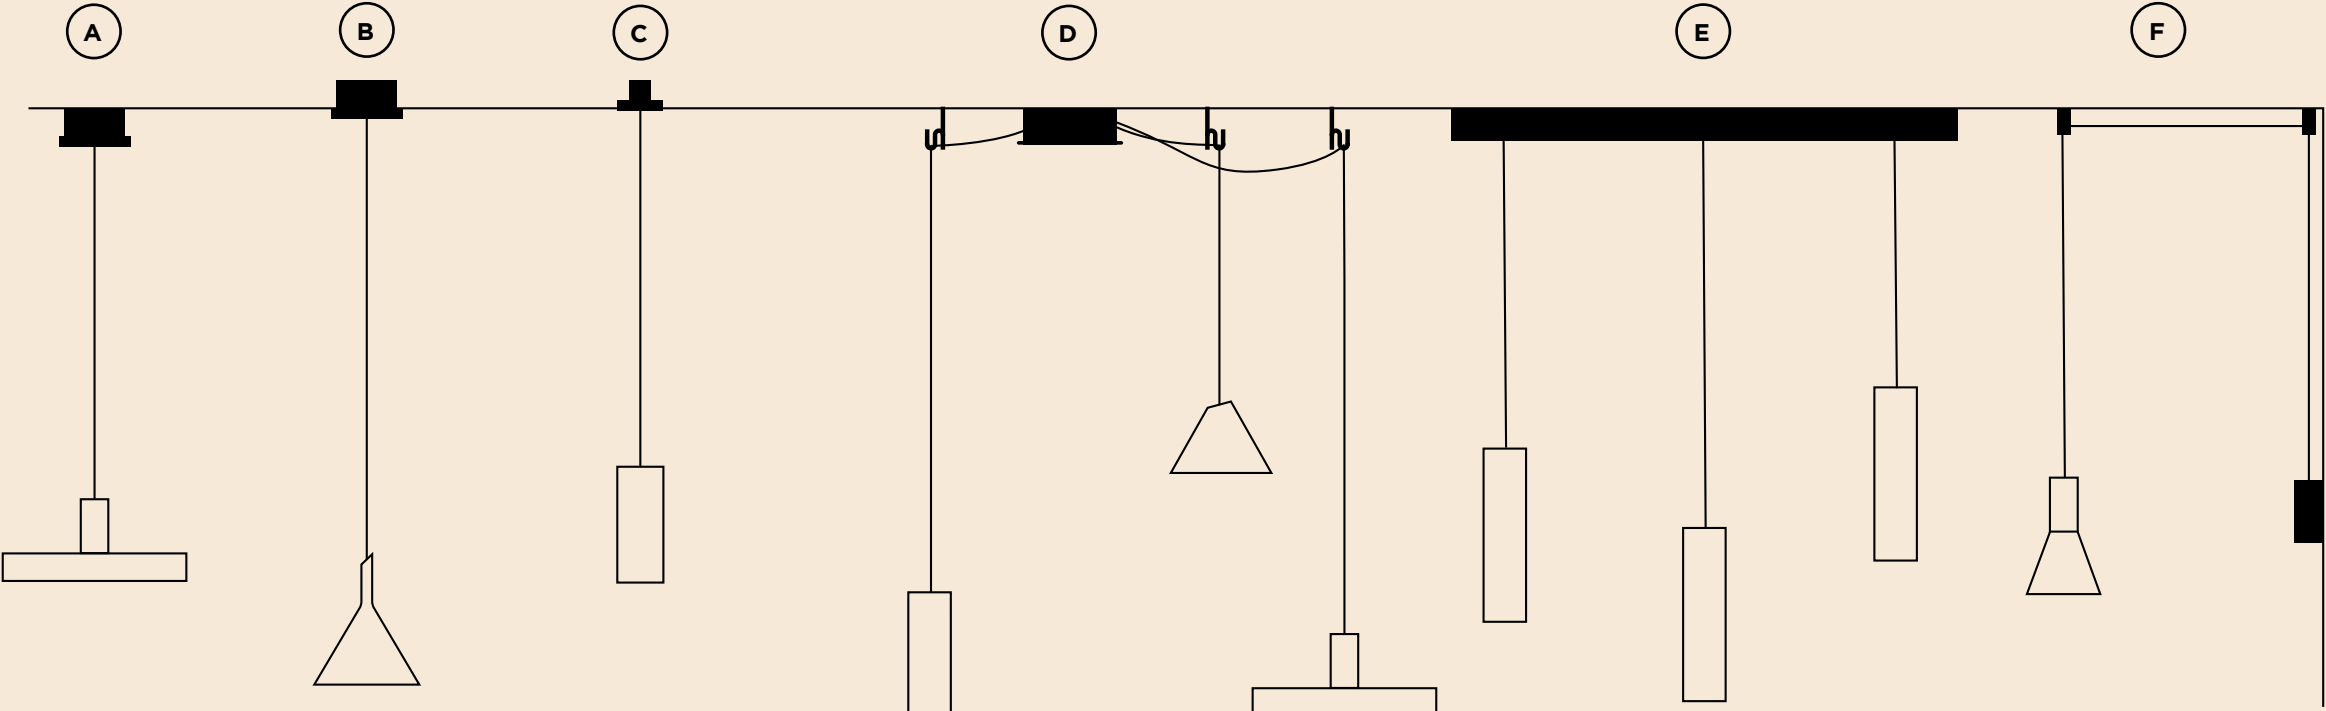

A



SINGLE BASE
ceiling base round

	CODE
	90052022
	90052021

B




SEMI RECESSED SINGLE BASE
for shades without steel wire only

⌚ 73-76 ⚙️ 70 ⚡ 10-35

	CODE
	90052026
	90052027

C




INVISIBLE SINGLE BASE
plasterkit | system - with fixation
and adjustment with or without steel
cable | max. 10kg

⌚ 68 ⚙️ 70 ⚡ 12.5-2750

	CODE
	90015196
	90015195


D



MULTIPLE BASE
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032


E



LINEAR MULTIPLE BASE
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F



WALL BASE
for 1 luminaire | incl. 2 wall-ceiling
brackets | for cable 4.25-5.5mm
diameter | incl. switch on/off


	CODE
	90019195
	90019196

wall - ceiling bracket

	CODE
	90019197
	90019198



► DESIGN WITH LOVE



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.83kg

2.0	CODE
200mm	
	226164W_
	226164L_
	226164M_
	226164P_
	226164B_

3.0	CODE
300mm	
	226264W_
	226264L_
	226264M_
	226264P_
	226264B_

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K 9W	570 >90	9

white luminaires with white cable and
white baldachin | other luminaires
with black cable and black baldachin
alternative colour combinations on
request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.76kg

2.0	CODE
200mm	
	227120W0
	227120L0
	227120M0
	227120P0
	227120B0

3.0	CODE
300mm	
	227220W0
	227220L0
	227220M0
	227220P0
	227220B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

BOX

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	CODE
	90052022
	90052021

B Semi recessed single base	CODE
	90052026
	90052027


C Invisible single base plasterkit system	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	CODE
	90019195
	90019196

more information on page 321



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg


2.0	CODE
200mm	
	226564W_
	226564L_
	226564G_
	226564P_
	226564B_

3.0	CODE
300mm	
	226664W_
	226664L_
	226664G_
	226664P_
	226664B_

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K 9W	570 >90	9

white luminaires with white cable and
white baldachin | other luminaires
with black cable and black baldachin
alternative colour combinations on
request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.72kg

2.0	CODE
200mm	
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0	CODE
300mm	
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

DOCUS

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	CODE
	90052022
	90052021

B Semi recessed single base	CODE
	90052026
	90052027


C Invisible single base plasterkit system	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	CODE
	90019195
	90019196

more information on page 321



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg


2.0	200mm	CODE
		226364G_
		226364Q_
		226364P_
		226364B_

3.0	300mm	CODE
		226464G_
		226464Q_
		226464P_
		226464B_

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
2000-3000K 9W	570 >90	9

white luminaires with white cable and
white baldachin | other luminaires
with black cable and black baldachin
alternative colour combinations on
request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.58|0.74kg

2.0	200mm	CODE
		227320G0
		227320Q0
		227320P0
		227320B0

3.0	300mm	CODE
		227420G0
		227420Q0
		227420P0
		227420B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

HEXO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base up to max. 2 | 3 | 4 | 5 luminaires 600mm | 900mm | 1200mm | 1500mm


	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321





2.0 | 3.0 LED

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.62|0.76kg


2.0	CODE
200mm	
	226764W_
	226764L_
	226764G_
	226764M_
	226764P_
	226764B_

3.0	CODE
300mm	
	226864W_
	226864L_
	226864G_
	226864M_
	226864P_
	226864B_

add your base from the right column

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K 9W	570 >90	9

white luminaires with white cable and
white baldachin | other luminaires
with black cable and black baldachin |
alternative colour combinations on
request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.54|0.68kg

2.0	CODE
200mm	
	227720W0
	227720L0
	227720G0
	227720M0
	227720P0
	227720B0

3.0	CODE
300mm	
	227820W0
	227820L0
	227820G0
	227820M0
	227820P0
	227820B0

add your base from the right column

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

RAY

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	CODE
	90052022
	90052021

B Semi recessed single base	CODE
	90052026
	90052027



C Invisible single base plasterkit system	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	CODE
	90019195
	90019196




more information on page 321



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.27kg



weverducre.com/odrey-collection

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.26kg

CODE	
	287320WW0
	287320GG0
	287320BB0
	287320WG0
	287320BG0
	287320GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

CODE	
	90052022
	90052021

B | Semi recessed single base

CODE	
	90052026
	90052027

C | Invisible single base plasterkit | system

CODE	
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

CODE	
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm


CODE	
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base


incl. 2 wall-ceiling brackets

CODE	
	90019195
	90019196

more information on page 321



back



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included

IP20 0.47kg



	CODE
	287220WW0
	287220GG0
	287220BB0
	287220WG0
	287220BG0
	287220GB0

add your base from the right column

OPTIONAL

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	CODE
	90052022
	90052021

B Semi recessed single base	CODE
	90052026
	90052027

C Invisible single base plasterkit system	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	CODE
	90019195
	90019196

more information on page 321



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

	CODE
	287420WW0
	287420GG0
	287420BB0
	287420WG0
	287420BG0
	287420GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.32kg

	CODE
	287520WW0
	287520GG0
	287520BB0
	287520WG0
	287520BG0
	287520GB0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.34kg

	CODE
	287620WW0
	287620GG0
	287620BB0
	287620WG0
	287620BG0
	287620GB0

add your base from the right column
optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more options and specs on page 743

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm



	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321



1.7
PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

1.8
PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade
matching inner cover included

IP20 0.41kg



	CODE
	287720WW0
	287720GG0
	287720BB0
	287720WG0
	287720BG0
	287720GB0

add your base from the right column
optional inner cover on page 755

OPTIONAL		
PAR16 6.5W GU10 phase-cut dim		
		CODE
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more options and specs on page 743

	CODE
	287820WW0
	287820GG0
	287820BB0
	287820WG0
	287820BG0
	287820GB0

add your base from the right column

OPTIONAL		
PAR16 6.5W GU10 phase-cut dim		
		CODE
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

more options and specs on page 743

ODREY

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	
	CODE
	90052022
	90052021

B Semi recessed single base	
	CODE
	90052026
	90052027

C Invisible single base plasterkit system	
	CODE
	90015196
	90015195


D Multiple base up to max. 4 8 luminaires	
	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	
	CODE

max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	
	CODE
	90019195
	90019196

more information on page 321





FASHION STORE 'T KAPELLEKE | BOSSUYT SHOP INTERIORS DEERLIJK | BELGIUM



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

1.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

 IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 375lm

 CODE
236188P9

1800-2850K | >90 CRI | 525lm

 CODE
236188B9

add your base from the right column

all luminaires are standard with black cable | white cable on request

2.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

 IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 385lm

 CODE
236288P9

1800-2850K | >90 CRI | 510lm

 CODE
236288B9

add your base from the right column

3.0

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

 IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 445lm

 CODE
236388P9

1800-2850K | >90 CRI | 530lm

 CODE
236388B9

add your base from the right column

3H DRAFT



WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
 max. 4	90052005
 max. 4	90052006
 max. 8	90052031
 max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm


	CODE
 max. 2	90052007
 max. 2	90052008
 max. 3	90052009
 max. 3	90052010
 max. 4	90052011
 max. 4	90052012
 max. 5	90052013
 max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321



1.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg


1800-2850K | >90 CRI | 615lm

	CODE
	236188TS9

1800-2850K | >90 CRI | 520lm

	CODE
	236188TD9

add your base from the right column
all luminaires are standard with black cable | white cable on request



2.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg


1800-2850K | >90 CRI | 510lm

	CODE
	236288TS9

1800-2850K | >90 CRI | 480lm

	CODE
	236288TD9

add your base from the right column



3.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 530lm

	CODE
	236388TS9

1800-2850K | >90 CRI | 500lm

	CODE
	236388TD9

add your base from the right column

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires

600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321



1.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 500lm
CODE
236188TW9

1800-2850K | >90 CRI | 460lm
CODE
236188DW9

add your base from the right column
all luminaires are standard with black cable | white cable on request

2.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 330lm
CODE
236288TW9

1800-2850K | >90 CRI | 420lm
CODE
236288DW9

add your base from the right column

3.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 470lm
CODE
236388TW9

1800-2850K | >90 CRI | 440lm
CODE
236388DW9

add your base from the right column

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	
	CODE
	90052022
	90052021


B Semi recessed single base	
	CODE
	90052026
	90052027

C Invisible single base plasterkit system	
	CODE
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	
	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	
	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	
	CODE
	90019195
	90019196
more information on page 321	



1.0 LED


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.36kg

1800-2850K | >90 CRI | 525lm

CODE	
	237188W9
	237188J9
	237188P9
	237188K9
	237188Z9

add your base from the right column
all luminaires are standard with black cable | white cable on request



2.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.47kg

1800-2850K | >90 CRI | 525lm

CODE	
	237288W9
	237288J9
	237288P9
	237288K9
	237288Z9

add your base from the right column
all luminaires are standard with black cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A Single base	
CODE	
	90052022
	90052021

B Semi recessed single base	
CODE	
	90052026
	90052027

C Invisible single base plasterkit system	
CODE	
	90015196
	90015195

D Multiple base up to max. 4 8 luminaires	
CODE	
 max. 4	90052005
 max. 4	90052006
 max. 8	90052031
 max. 8	90052032

E Linear multiple base up to max. 2 3 4 5 luminaires 600mm 900mm 1200mm 1500mm	
CODE	
 max. 2	90052007
 max. 2	90052008
 max. 3	90052009
 max. 3	90052010
 max. 4	90052011
 max. 4	90052012
 max. 5	90052013
 max. 5	90052014

F Wall base incl. 2 wall-ceiling brackets	
CODE	
	90019195
	90019196
more information on page 321	





PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM



reddot award 2017
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.60kg

1800-2850K | >90 CRI | 525lm

CODE	
	237388W9
	237388J9
	237388P9
	237388K9
	237388Z9

add your base from the right column

3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.60kg

CODE	
	2343E0W0
	2343E0J0
	2343E0P0
	2343E0K0
	2343E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

CODE	
2700K 800lm	9003E152

more options and specs on page 744

all luminaires are standard with black
cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

CODE	
	90052022
	90052021

B | Semi recessed single base

CODE	
	90052026
	90052027

C | Invisible single base plasterkit | system

CODE	
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

CODE	
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm



CODE	
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

CODE	
	90019195
	90019196

more information on page 321



4.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.70kg

1800-2850K | >90 CRI | 525lm

	CODE
	237488W9
	237488J9
	237488P9
	237488K9
	237488Z9

add your base from the right column

4.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.70kg

	CODE
	2344E0W0
	2344E0J0
	2344E0P0
	2344E0K0
	2344E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K 800lm	9003E152

more options and specs on page 744

all luminaires are standard with black cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



5.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.80kg

1800-2850K | >90 CRI | 525lm

	CODE
	237588W9
	237588J9
	237588P9
	237588K9
	237588Z9

add your base from the right column

5.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.80kg

	CODE
	2345E0W0
	2345E0J0
	2345E0P0
	2345E0K0
	2345E0Z0

add your base from the right column

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K 800lm	9003E152

more options and specs on page 744

all luminaires are standard with black cable | white cable on request

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base


incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 321



DINOR
CEILING SUSPENDED



1.0


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80I60K 0.90kg

1800-2850K | >90 CRI | 525lm

	CODE
	255188GW9
	255188BG9
	255188BB9

add your base from the right column
all luminaires are standard with black cable | white cable on request



2.0


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80I60K 1.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255288GW9
	255288BG9
	255288BB9

add your base from the right column



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM3 L80I60K 2.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255388GW9
	255388BG9
	255388BB9

add your base from the right column

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base


	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

more information on page 321

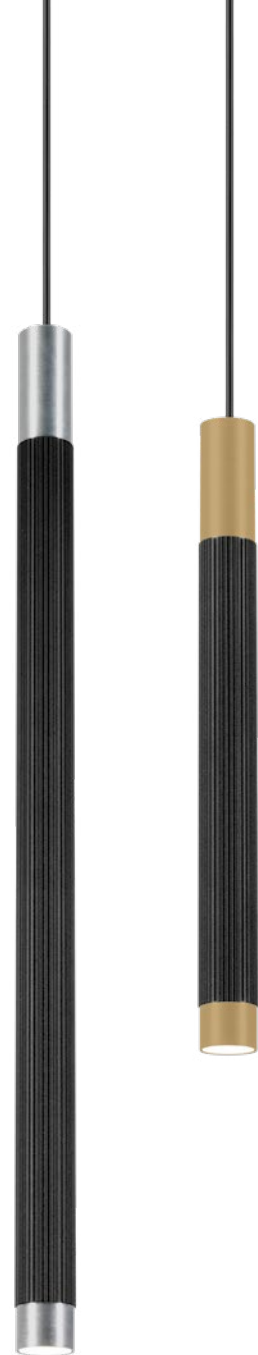

TRACE


CEILING SUSPENDED



173



473



1.1


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.33kg

	CODE
	253164W_
	253164BL_
	253164CH_
	253164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

white luminaires with white cable and white baldachin | other luminaires with
black cable and black baldachin | alternative colour combinations on request




1.2

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.42kg

	CODE
	253264W_
	253264BL_
	253264CH_
	253264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



2.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed


IP20 60° SDCM2 L80|50K 0.39kg

	CODE
	253474W_
	253474BL_
	253474CH_
	253474B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	440 >90	5

white luminaires with white cable and
white baldachin | other luminaires
with black cable and black baldachin
alternative colour combinations on
request

TRACE
CEILING SUSPENDED



2.0 E27

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated or
aluminium powder coated brushed

IP20 0.39kg

	CODE
	2533E0W0
	2533E0BL0
	2533E0CHO
	2533E0B0

OPTIONAL

G95 5.6W | E27 | phase-cut dim | clear
CODE

2700K | 483lm 9003E160

G95 5.4W | E27 | phase-cut dim
filament | gold tinted



CODE
2200K | 380lm 9003E111

more lamps and specs on page 745



TRACE CHANDELIER

CEILING SUSPENDED

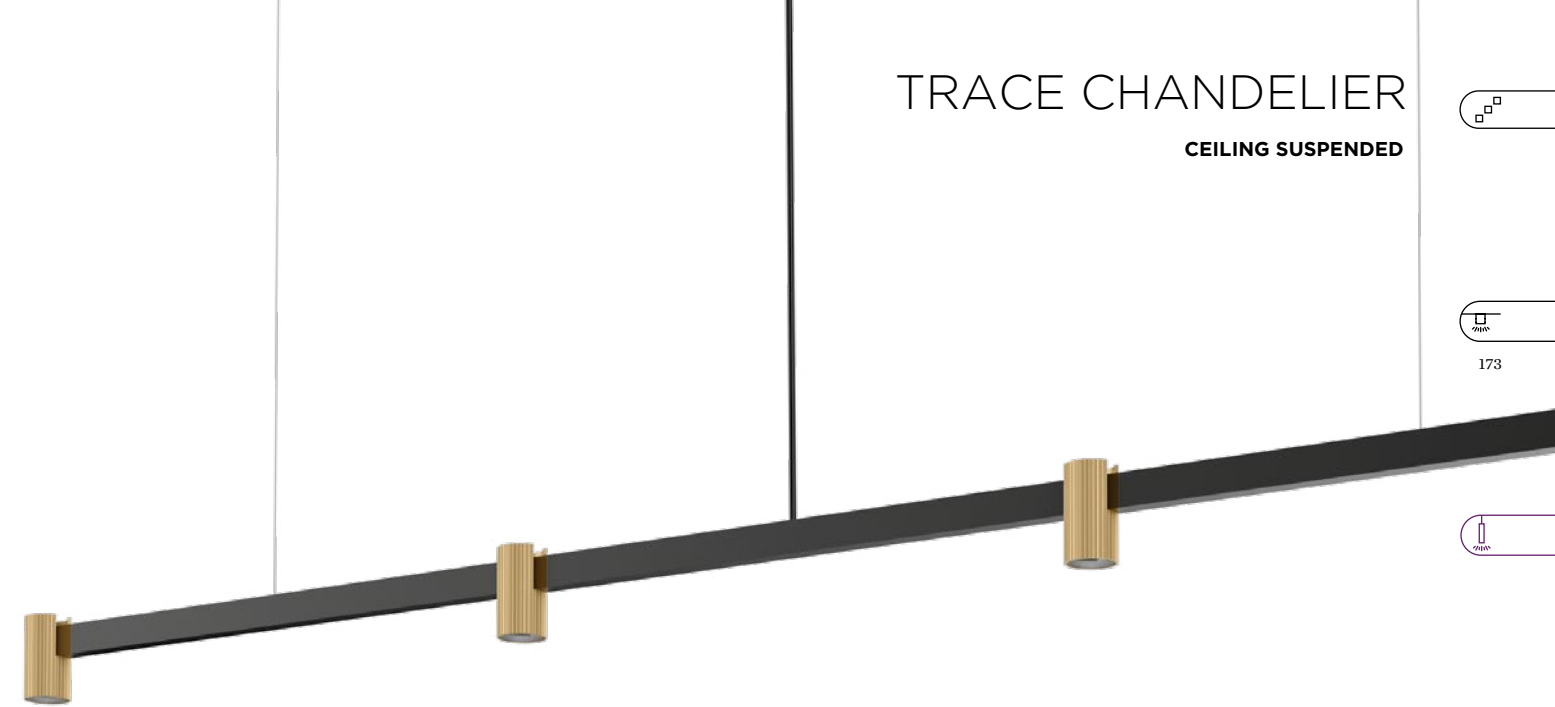


1.0

4x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.44kg

CODE	
253564CH	
253564B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x220 >90	3
3000K	4x250 >90	5



2.0

6x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.66kg


CODE	
253664CH	
253664B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x220 >90	3
3000K	6x250 >90	5






HOTEL LILLA ROBERTS | PUROPLAN OY | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

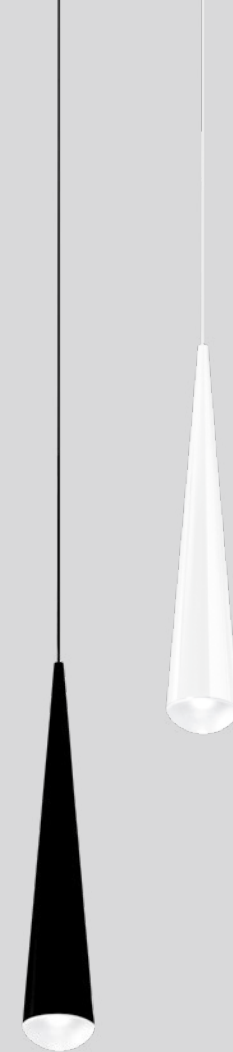

CONE

CEILING SUSPENDED



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
chrome plated | glass

IP20 38° SDCM2 L80|60K 0.55kg

2700K | >90 CRI | 405lm

CODE	
	200184W3
	200184B3




► DESIGN WITH LOVE



CORK

CEILING SUSPENDED



1.0

LED LED PCB 4W
100-240VAC | 50-60Hz | incl. driver
aluminium powder coated
fits bottles inner ø16.5 - 19.5 mm

⊕ IP20 ⚡ 36° SDCM3 180|60K 0.24kg

2700K | >80 CRI | 145lm



CODE
210363B2

OPTIONAL

CODE
bottle 1
75/174 glass 90019013
bottle 2
87/323 glass 90019014



MARBELLA DESIGN & ART FAIR | MV INTERIORISMO MARBELLA | SPAIN

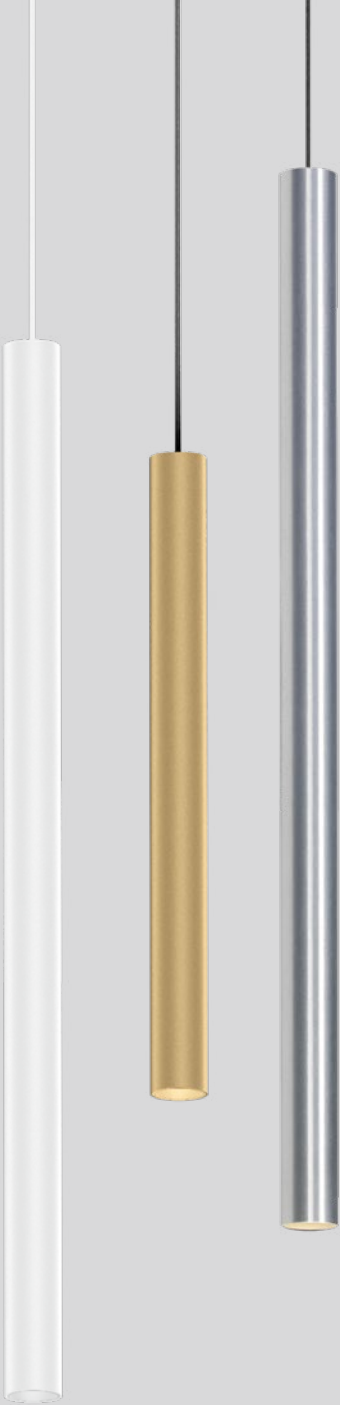

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.26kg

	CODE
	279264W_
	279264L_
	279264M_
	279264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

white luminaires with white cable and white baldachin | other luminaires with
black cable and black baldachin | alternative colour combinations on request

MATCH
CEILING SUSPENDED



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



5.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

IP20 33° SDCM2 L80|50K 0.36kg

	CODE
	279364W_
	279364L_
	279364M_
	279364B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM



SOLLI
CEILING SUSPENDED



1.0

LED LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.48kg

CODE	
	238284FD_
	238284TD_
	238284WB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	290 >90	3
3000K	310 >90	5



SHOWROOM VANDEWIELE | 5 AM MARKE | BELGIUM



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.50kg

CODE	
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim
CODE
3000K | 280lm 9010G804
more lamps and specs on page 744

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.07kg

CODE	
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
CODE
2700K | 450lm 9003C103
more lamps and specs on page 744

3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 2.20kg

CODE	
	2523E0WB0
	2523E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim
CODE
2700K | 800lm 9003E152
more lamps and specs on page 744

4.0





A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 3.25kg

CODE	
	2524E0WB0
	2524E0YB0

OPTIONAL

A65 14.6W | E27 | phase-cut dim
CODE
2700K | 1378lm 9003E153
more lamps and specs on page 744



DRO

CEILING SUSPENDED



211




287




511



575 | 585

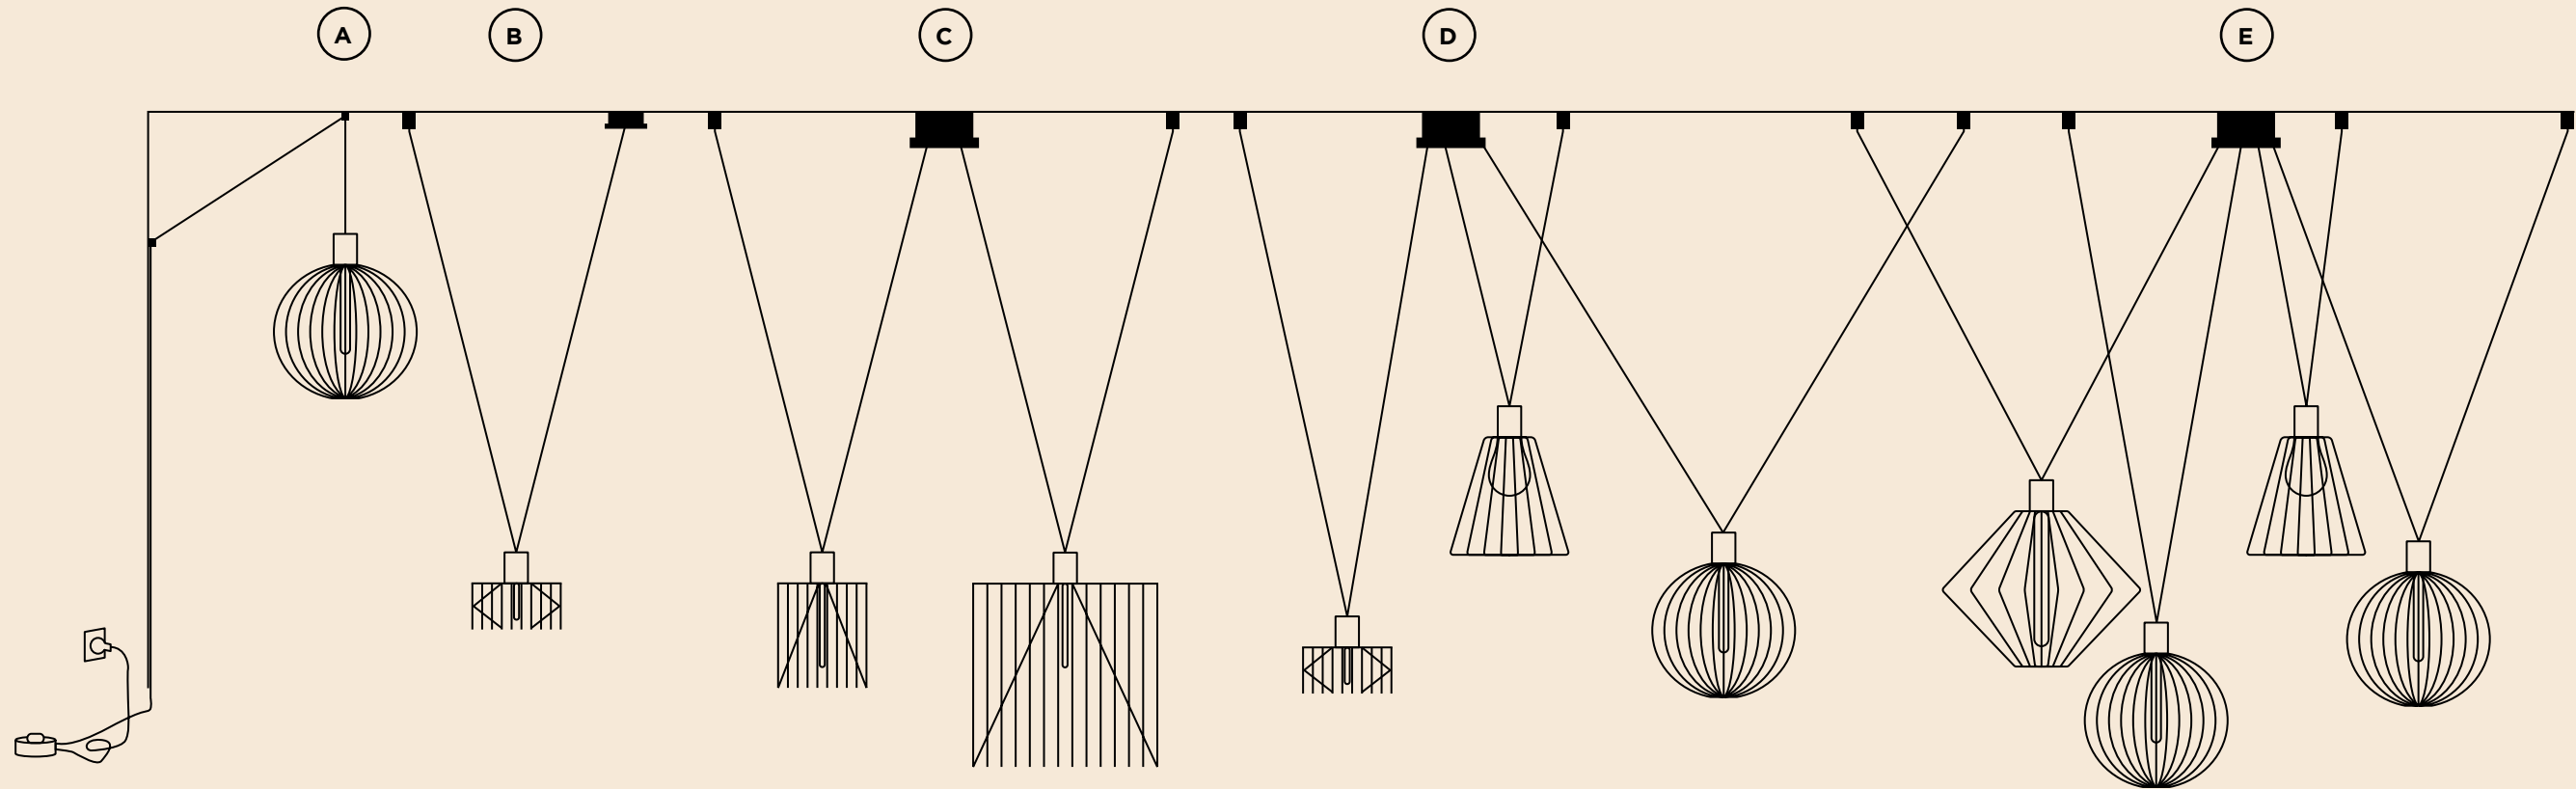


CHOOSE YOUR DECENTER



1.0 CONE

CODE	
	245100V0
	245100B0




2.0 WIRO

CODE	
	209600B0



1.8 WIRO

CODE	
	209200V0
	209200B0



3.8 WIRO

CODE	
	209300V0
	209300B0



1.1 DIAMOND

CODE	
	244100P0
	244100B0



4.0 GLOBE

CODE	
	243100B0

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included

CODE	
	8.5m 90015165

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

CODE	
	2.6m 90052050
	6m 90052051

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

CODE	
	2.6m 90052055
	6m 90052056

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

CODE	
	2.6m 90052060
	6m 90052063

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included


CODE	
	2.6m 90052067
	6m 90052078





RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

BERND STEINHUBER



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.60kg

	CODE
2.6m	2451E0V0
2.6m	2451E0B0
6m	2452E0V0
6m	2452E0B0

more suspension options on page 375

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745


WIRO
CEILING SUSPENDED



215



517



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.82kg

	CODE
2.6m	2096E0B0
6m	2091E0B0

more suspension options on page 375

OPTIONAL


A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138

more lamps and specs on page 745



back



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.70kg

	CODE
2.6m	2092E0V0
2.6m	2092E0B0
6m	2090E0V0
6m	2090E0B0

more suspension options on page 375

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138


T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745

WIRO

CEILING SUSPENDED



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.75kg

	CODE
2.6m	2093E0V0
2.6m	2093E0B0
6m	2097E0V0
6m	2097E0B0

more suspension options on page 375

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136


more lamps and specs on page 745



RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO

CEILING SUSPENDED



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.22kg

		CODE
2.6m		2094E0V0
2.6m		2094E0B0
6m		2098E0V0
6m		2098E0B0

OPTIONAL


A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

		CODE
2.6m		2095E0V0
2.6m		2095E0B0
6m		2099E0V0
6m		2099E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745






WIRO

CEILING SUSPENDED



As awarded by The Chicago Athenaeum
Museum of Architecture and Design



1.0 DIAMOND

- ☛ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

⊕ IP20 3.52kg


		CODE
	2.6m	2291E0P0
	2.6m	2291E0B0
	6m	2296E0P0
	6m	2296E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

		CODE
2200K	585lm	9003E130
2700K	613lm	9003E135

more lamps and specs on page 745



1.1 DIAMOND

- ☛ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

Ⓢ IP20 2.72kg

		CODE
	2.6m	2441E0P0
	2.6m	2441E0B0
	6m	2442E0P0
	6m	2442E0B0


more suspension options on page 375

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

		CODE
2200K	585lm	9003E130
2700K	613lm	9003E135

more lamps and specs on page 745





THINK URBAN | DEGRAER INTERIEURARCHITECTEN KORTRIJK | BELGIUM



KHV2 | ALFA DEVELOPMENT A/S | ANKER & CO COPENHAGEN | DENMARK



WIRO

CEILING SUSPENDED




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



215



517



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.62kg


	CODE
2.6m	2292E0P0
2.6m	2292E0B0
6m	2297E0P0
6m	2297E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 7.02kg

	CODE
2.6m	2293E0P0
2.6m	2293E0B0
6m	2298E0P0
6m	2298E0B0

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745






SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

BERND STEINHUBER

WIRO
CEILING SUSPENDED



1.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.92kg

	CODE
2.6m	2281E0B0
6m	2284E0B0

OPTIONAL


A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138

T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

	CODE
2.6m	2282E0B0
6m	2285E0B0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

	CODE
2200K 247lm	9003E109
2700K 483lm	9003E138


T30-300 7.2W/7.4W | E27
phase-cut dim

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745



WIRO
CEILING SUSPENDED



4.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.92kg

CODE	
2.6m	2431E0B0
6m	2434E0B0


more suspension options on page 375

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

CODE	
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745



5.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.32kg

CODE	
2.6m	2432E0B0
6m	2435E0B0

more suspension options on page 375

OPTIONAL

T30-300 7.2W/74W | E27 | phase-cut dim

CODE	
2200K 585lm	9003E130
2700K 613lm	9003E135

more lamps and specs on page 745



HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM



JULES WABBES




J.J.W.
CEILING SUSPENDED



221



537



04

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.50kg

CODE	
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 483lm	9003E138

more lamps and specs on page 745



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES



back


J.J.W.
CEILING SUSPENDED



221



537



042

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.10kg

CODE	
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 483lm	9003E138

more lamps and specs on page 745







MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT | VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES




J.J.W.
CEILING SUSPENDED



221



537



05

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.50kg

CODE

	2053E0S0
	2053E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim


CODE

2200K 247lm	9003E109
2700K 483lm	9003E138

more lamps and specs on page 745



APARTMENT RONDA SANT PERE L DANIEL NASSAR L ALSINASECH LIGHTING PROJECTS | SPAIN



1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.80kg


CODE		
2.5m		248120GG1
2.5m		248120BK1
2.5m		248120BB1
6m		248220GG1
6m		248220BK1
6m		248220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE		
2700K 460lm		901228W3
2700K 437lm		901228B3
3000K 500lm		901228W5
3000K 457lm		901228B5

more lamps and specs on page 743



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 0.84kg


CODE		
2.5m		2481E0GG1
2.5m		2481E0BK1
2.5m		2481E0BB1
6m		2482E0GG1
6m		2482E0BK1
6m		2482E0BB1

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE		
2700K 800lm		9003E152

more lamps and specs on page 744



1.2 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.07kg|0.89kg


CODE		
2.5m		248120BF2
2.5m		248120BK2
2.5m		248120BB2
6m		248220BF2
6m		248220BK2
6m		248220BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE		
2700K 437lm		901228B3
3000K 457lm		901228B5

more lamps and specs on page 743



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.11kg|0.90kg

CODE		
2.5m		2481E0BF2
2.5m		2481E0BK2
2.5m		2481E0BB2
6m		2482E0BF2
6m		2482E0BK2
6m		2482E0BB2

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE		
2700K 800lm		9003E152

more lamps and specs on page 744



reddot award 2019
winner lighting design



527



581 | 589



1.3 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.56kg|1.44kg

CODE	
2.5m	248120BF3
2.5m	248120BK3
2.5m	248120BB3
6m	248220BF3
6m	248220BK3
6m	248220BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 743

1.3 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.60kg|1.48kg

CODE	
2.5m	2481E0BF3
2.5m	2481E0BK3
2.5m	2481E0BB3
6m	2482E0BF3
6m	2482E0BK3
6m	2482E0BB3

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE	
2700K 800lm	9003E152

more lamps and specs on page 744

1.4 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 1.68kg

CODE	
2.5m	248120BK4
2.5m	248120BB4
6m	248220BK4
6m	248220BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 743

1.4 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.72kg

CODE	
2.5m	2481E0BK4
2.5m	2481E0BB4
6m	2482E0BK4
6m	2482E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE	
2700K 800lm	9003E152

more lamps and specs on page 744





ROOMOR OFFICE


CABLE SUSPENDED



reddot winner 2021



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover



IP20 SDCM3 L80/60K UGR ≤19 4.62kg

3000K | CRI >90 | 3660lm

CODE
1681M5W5
1681M5B5

4000K | CRI >90 | 3660lm

CODE
1681M5W7
1681M5B7



1.0 OPAL

LED PCB 36W | DALI | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80/60K 4.62kg

3000K | CRI >90 | 3700lm


CODE
168185W5
168185B5

4000K | CRI >90 | 3700lm

CODE
168185W7
168185B7



BISHOP
CEILING SUSPENDED



4.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 1.08kg

CODE	
	2184E0W0
	2184E0R0
	2184E0D0
	2184E0K0

6m suspension on request

OPTIONAL


G95 5.4W | E27 | phase-cut dim

CODE	
2200K 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

CODE	
2700K 1100lm	9003E154

more options and specs on page 744



6.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 2.62kg

CODE	
	2186E0W0
	2186E0R0
	2186E0D0
	2186E0K0

6m suspension on request

OPTIONAL


G95 5.4W | E27 | phase-cut dim

CODE	
2200K 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

CODE	
2700K 1100lm	9003E154

more options and specs on page 744



8.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 5.70kg

CODE	
	2188E0W0
	2188E0R0
	2188E0D0
	2188E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

CODE	
2200K 380lm	9003E111

G95 11.2W | E27 | phase-cut dim

CODE	
2700K 1100lm	9003E154

more options and specs on page 744



W



R




D



K

custom shade and suspension
set colour combination upon request






1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.21kg

CODE			
270184CH_			
270184B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	440 >90	5




2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.29kg

CODE			
270284CH_			
270284B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >90	3
3000K	670 >90	5



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|50K 0.37kg

CODE			
270384CH_			
270384B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	870 >90	3
3000K	890 >90	5

FINLIN


CEILING SUSPENDED



225




555

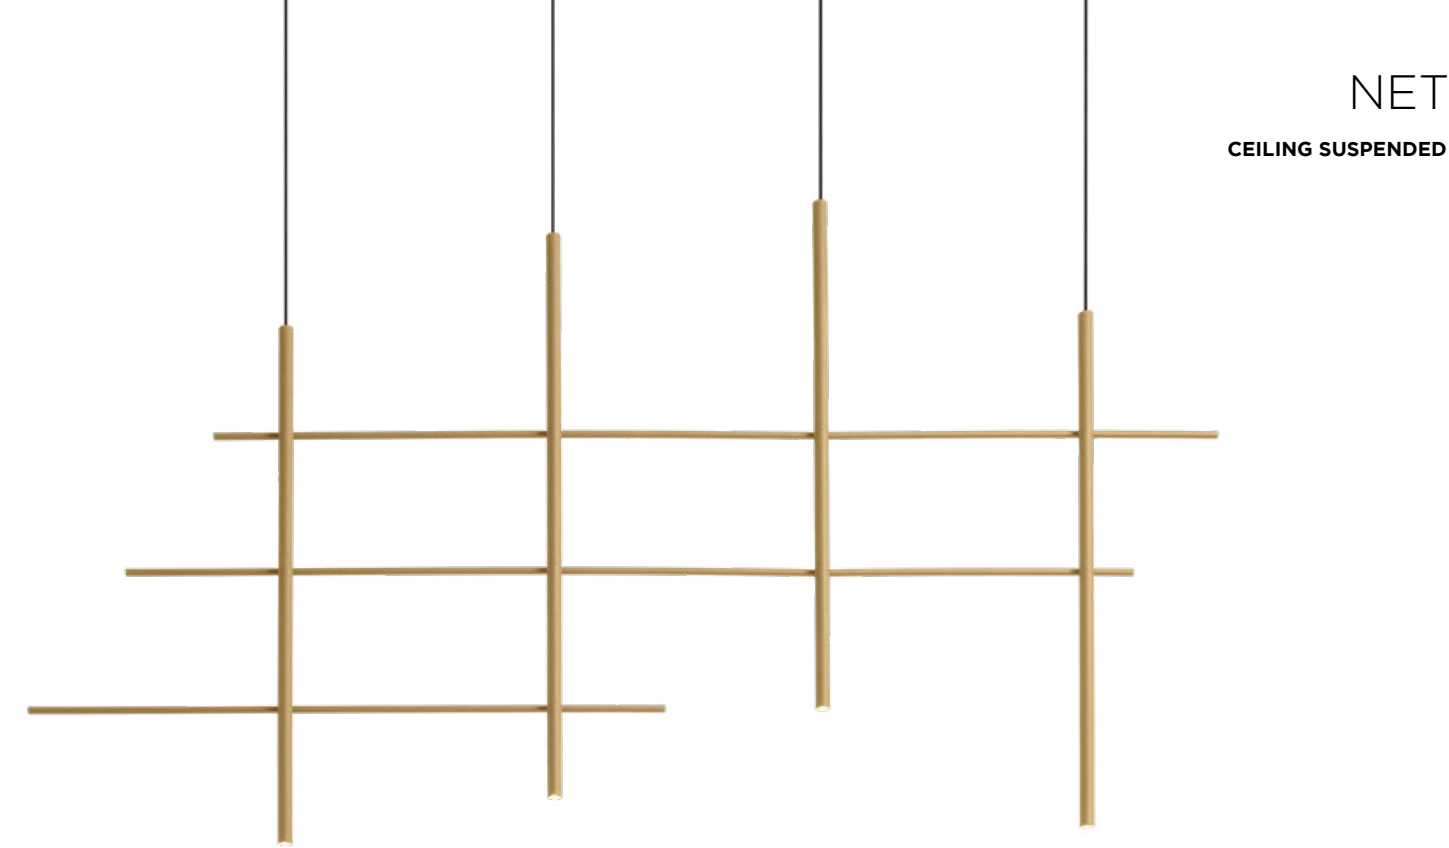

NET

CEILING SUSPENDED




2.0

LED 2x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 ⚡ 85° SDCM3 L80|50K 1.29kg

2700K | >90 CRI | 2x250lm

CODE	
	231264W3
	231264M3
	231264B3



4.0

LED 4x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 ⚡ 85° SDCM3 L80|50K 2.49kg



2700K | >90 CRI | 4x250lm

CODE	
	231464W3
	231464M3
	231464B3



FIL


CEILING SUSPENDED

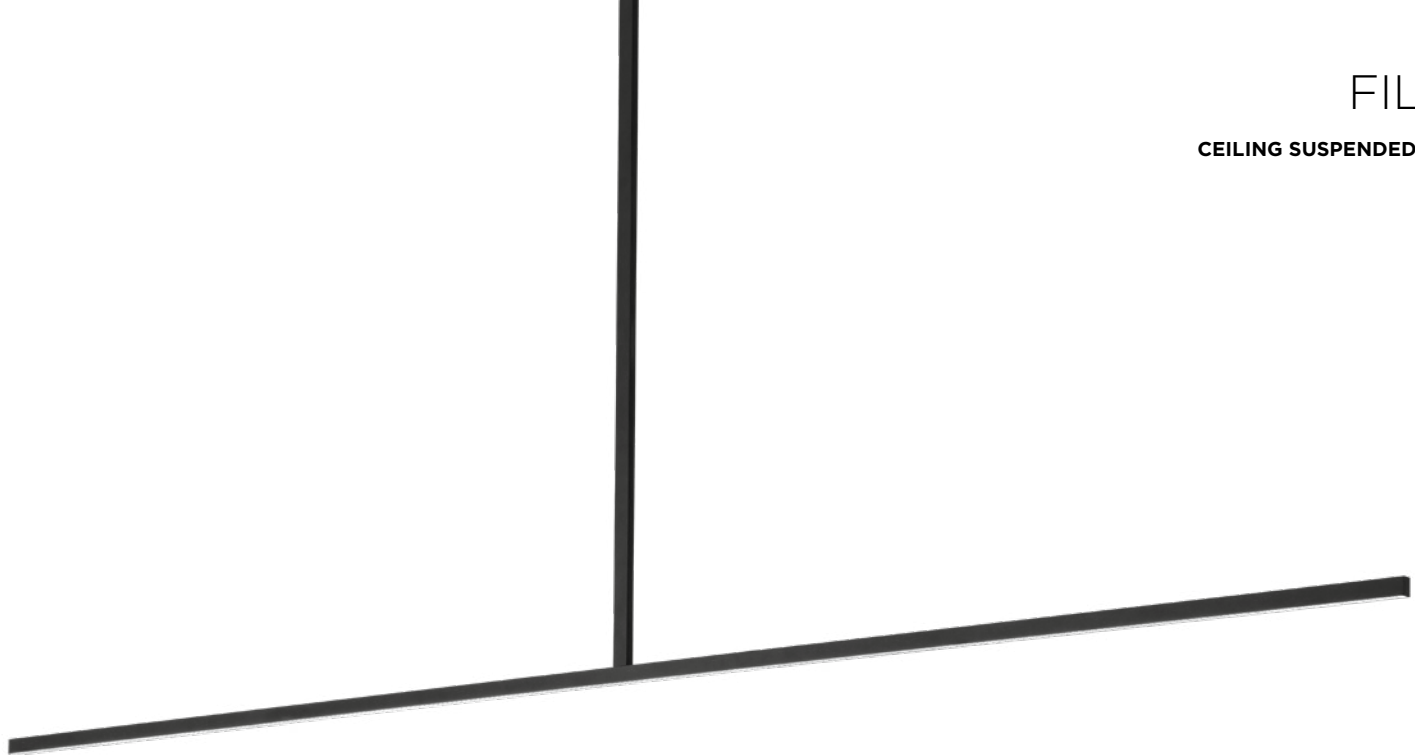

1.0

LED PCB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 1.34kg



2.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 1.42kg



CODE			
2543M4B_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	880 >90	3	
3000K	970 >90	5	

CODE			
2544M4B_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	1060 >90	3	
3000K	1170 >90	5	

back



MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED KAU TO SHAN | HONGKONG



ELLO


CEILING SUSPENDED




reddot award 2015
winner



DESIGN
AWARD
2015



311



13.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover


IP20 SDCM3 L80/50K 2.00kg

3000K | >90 CRI | 1090lm


CODE

500484W5

500484B5



end cap
chrome



back

WEVER & DUCRÉ 422 — 423



BENEDICTION | KKOL STUDIO SEOUL | SOUTH COREA

DARF

CEILING SUSPENDED

Ø24

max. 2000

Ø84

Ø33

1626

1.1

LED

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20

SDCM3 L70|60K 0.42kg

3000K | >80 CRI | 3300lm

CODE

2561T7B4

4000K | >80 CRI | 3700lm

CODE

2561T7B6

Ø24

max. 2000

Ø84

Ø33

1626

1.2

LED

LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20

SDCM3 L70|60K 0.42kg

2700K | >90 CRI | 1920lm

CODE

2561T8B3

3000K | >90 CRI | 2095lm

CODE

2561T8B5

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back

WEVER & DUCRÉ 424 — 425

565





► DESIGN WITH LOVE



GIGANT

CEILING SUSPENDED

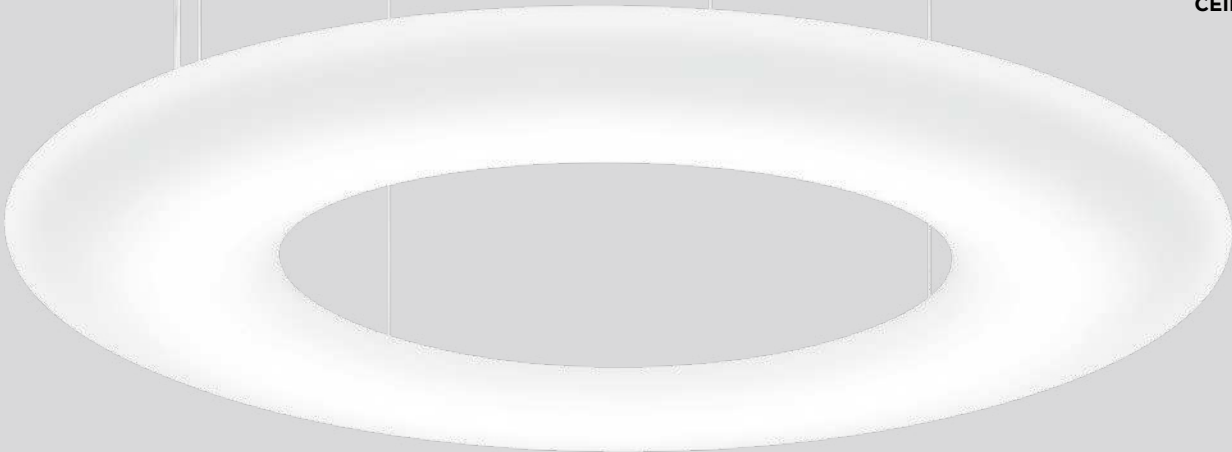

10.0

LED PCB 42W | DALI | switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 8.80kg

3000K | >80 CRI | 5300lm


CODE
213385W4

4000K | >80 CRI | 5600lm

CODE
213385W6

OPTIONAL

CODE
suspension
set 4m 90015114
longer suspension on request



16.0

LED PCB 84W | DALI | switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 15.30kg

3000K | >80 CRI | 10600lm


CODE
213485W4

4000K | >80 CRI | 11300lm

CODE
213485W6

OPTIONAL

CODE
suspension
set 4m 90015114
longer suspension on request

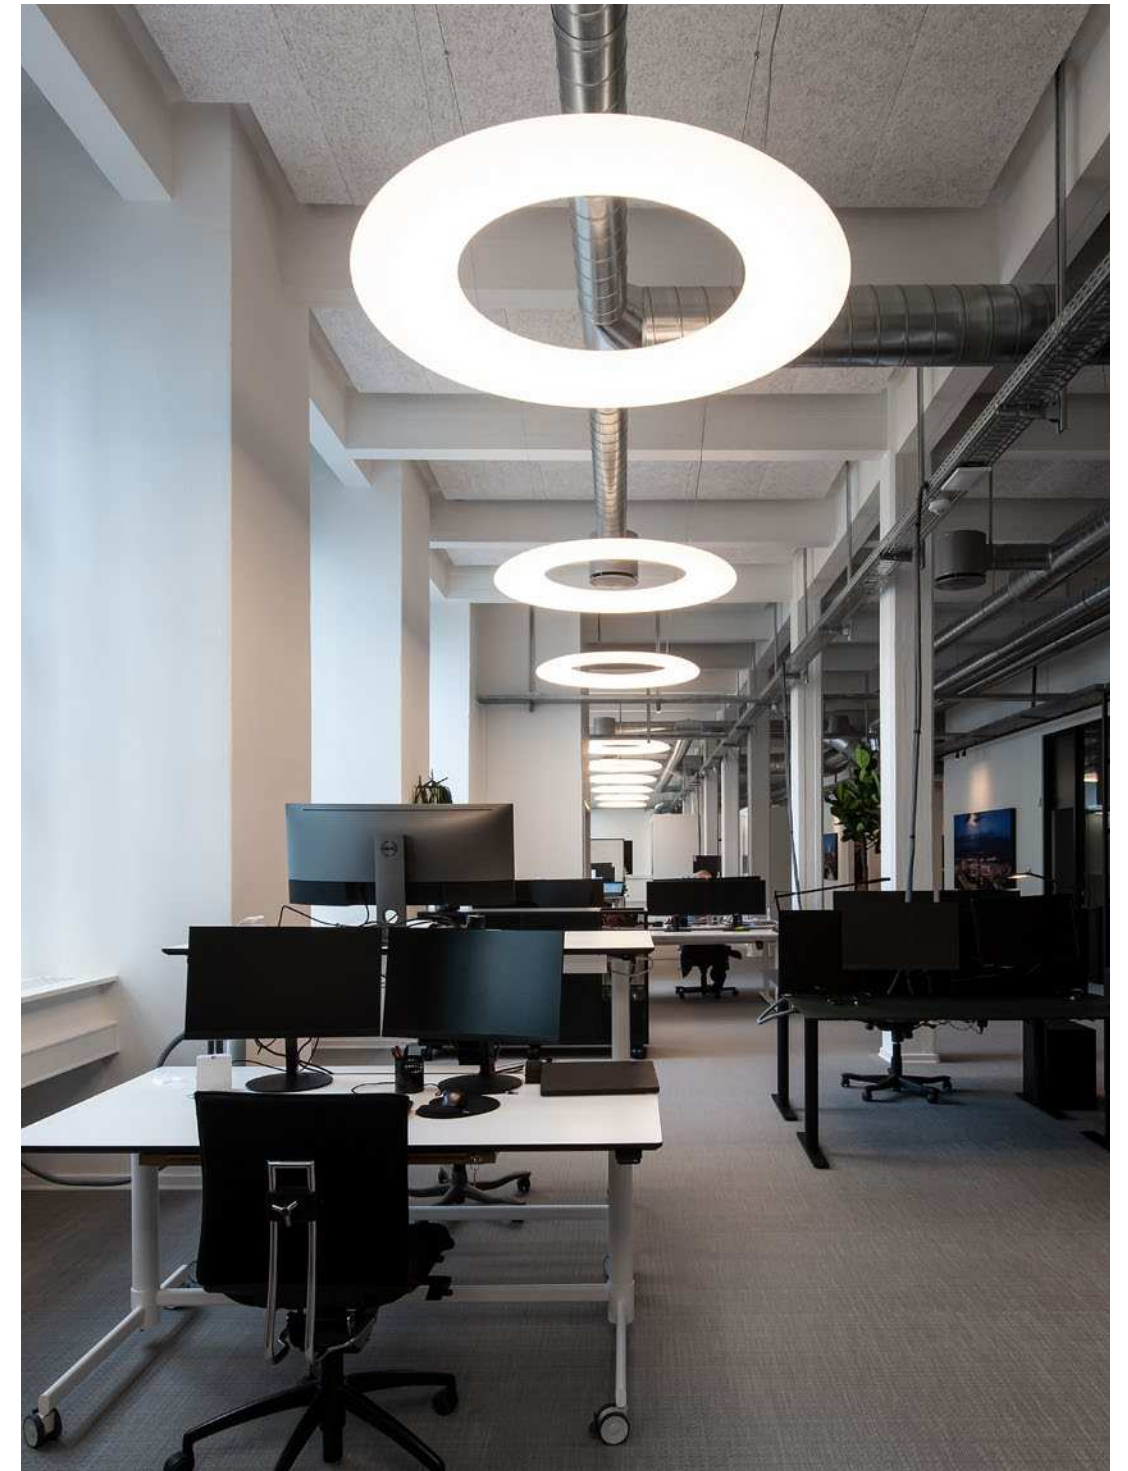

WALL RECESSED

432 — 445



WALL
RECESSED



RETO
435



LITO 1.0
437



LITO 2.0
437



STRIPE
439



STRANGE
441



THEMIS
443





ORIS
445



RETO

WALL RECESSED



0.8

LED PCB 3W | 350mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.27kg

66x66 40 min. 12

3000K | >90 CRI | 150lm

	CODE
	3451A1W5
	3451A1B5

2.0

LED PCB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.41kg

47x182 40 min. 12

3000K | >90 CRI | 490lm

	CODE
	3452A1W5
	3452A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
more options and specs on page 736	

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 749

ALWAYS USE

driver

	CODE
6W 350mA	90213202
more options and specs on page 736	

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044



specs on page 749





LITO

WALL RECESSED



1.0

LED LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80I60K 0.09kg

70x70 35 min. 12

3000K | >90 CRI | 145/200lm

	CODE
	145381W5
	145381A5
	145381B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 736

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in
combination with plasterkit

2.0

LED LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80I60K 0.09kg

70x70 35 min. 12

3000K | >90 CRI | 90/120lm

	CODE
	1454A1W5
	1454A1A5
	1454A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 736

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119


recessed housing | always use in
combination with plasterkit





STRIPE

WALL RECESSED



0.4

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.09kg

25x56 40 8-18

3000K | >80 CRI | 15/28lm

CODE	
	3054A1W4
	3054A1L4
	3054A1G4
	3054A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

CODE	
	90012037

specs on page 748



0.7

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.10kg

25x56 40 8-18

3000K | >80 CRI | 15/28lm

CODE	
	3055A1W4
	3055A1L4
	3055A1G4
	3055A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

CODE	
	90012037

specs on page 748



2.2

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.27kg

25x170 40 8-18

3000K | >80 CRI | 20/36lm

CODE	
	3056A1W4
	3056A1L4
	3056A1G4
	3056A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

CODE	
	90012038


specs on page 748





STRANGE

WALL RECESSED



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.24kg

170x86 55 2-25

CODE			
			3207A1W_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver

CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 737



2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.31kg

270x86 55 2-25

CODE			
			3208A1W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver

CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 737





SHOWROOM GRANDO KEUKENS BRUGGE | BELGIUM



THEMIS

WALL RECESSED



1.7

LED LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.24kg

70x158 50 2-18

CODE		
	3237A1W_	
	3237A1K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver

CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 737

OPTIONAL

CODE	
recessed housing	90012032
plasterkit	90017111

recessed housing | always use in
combination with plasterkit

2.7

LED LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.31kg

70x258 50 2-18

CODE		
	3238A1W_	
	3238A1K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	150/190 >80	2
3000K	165/210 >80	4

ALWAYS USE

driver


CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 737

OPTIONAL

CODE	
recessed housing	90012033
plasterkit	90017112

recessed housing | always use in
combination with plasterkit



0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.28kg

47x182 40 min. 12

3000K | >90 CRI | 70/115lm

	CODE
	3271A1W5
	3271A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 736

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 748



0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.15kg

66x66 40 min. 12

3000K | >90 CRI | 90/140lm

	CODE
	3274A1W5
	3274A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit


	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748

ORIS
WALL RECESSED



1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.34kg

115x117 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	3276A1W5
	3276A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
7W 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 748

WALL SURFACE

446 — 571

WALL SURFACE SPOTLIGHTS



BOX MINI
451



BOX
453



DOCUS MINI
459



HEXO MINI
461



RAY MINI
463



DRO
511



CLOCK
515



WIRO
517



MIRRO
519



RAY
465



TRAIN
469



CENTRAL
471



NEW

TRACE SLIM
473



TRACE
475



SARA SNOOZE
479



CLEA
525



ROOMOR
527



J.J.W.
537



TAPIS
543



MILES ROUND
547



MILES CARRÉ
551



**MATCH
SNOOZE**
483



NEW

MATCH
485



NEW

CENO
487



ODREY
491



MICK SNOOZE
495



MICK WALL 1.0
497



MILES 9.0
553




FINLIN
555




NEW

FINLIN ROUND
559



VENN
561



DARF
565

WALL SURFACE LUMINAIRES



DOMINO
499



LEENS
501



BENTO
503



SCAVA
505



DOT
507

WALL SURFACE IP-RATED



NEW

RUVI IP44
567



MIRBA IP44
569




MIRBI LONG IP44
571

back


UNIVERSAL STARS

SIMPLE FORMALITY


Even if maths and angles were never your forte: You'll still love these four stunning geometric shapes. BOX, DOCUS, HEXO and RAY are hard to beat when it comes to elegance and flexibility. And it means they are suitable for almost any room situation. It doesn't matter whether you let them glitter from the ceiling or shine from the walls. As these simple, narrow luminaires do not just come in a great variety of colours, they are also available in many different finishes; including for outdoors. So, right from the entrance to your house, friends and family will experience that "Wow" effect. Who would have thought that geometry could be so illuminating?



BOX



DOCUS



HEXO



RAY

HAVE A LOOK
weverducre.com/universalstars



Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in verschiedenen tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?





BOX mini

WALL SURFACE

141

67

67

115

1.0

PAR16 max. 12W | GU10

100-240VAC | 50-60Hz

aluminium powder coated

brushed wet painted

⊕

IP20 0.24kg

300120W0

300120L0

300120G0

300120M0

300120P0

300120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

2700K | 460lm

901228W3

2700K | 437lm

901228B3

3000K | 500lm

901228W5

3000K | 457lm

901228B5

more lamps and specs on page 743

67

67

200

2.0

2x PAR16 max. 12W | GU10

100-240VAC | 50-60Hz

aluminium powder coated

brushed wet painted

⊕

IP20 0.44kg

301120W0

301120L0

301120G0

301120M0

301120P0

301120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

2700K | 460lm

901228W3

2700K | 437lm

901228B3

3000K | 500lm

901228W5

3000K | 457lm

901228B5

more lamps and specs on page 743




back

WEVER & DUCRÉ 450 — 451



BOX

WALL SURFACE



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.66kg

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.60kg

2.0 LED

2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.67kg

	CODE
	3211GOW0
	3211GOL0
	3211GOG0
	3211GOM0
	3211GOQ0
	3211GOP0
	3211GOB0

	CODE
	341168W_
	341168L_
	341168G_
	341168M_
	341168Q_
	341168P_
	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K 280lm	9010G804

more lamps and specs on page 744

	CODE
	341148W_
	341148L_
	341148G_
	341148M_
	341148Q_
	341148P_
	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9



143



251



323




615



659





BOX

WALL SURFACE



143



251



323



4.0 LED

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L70l50K 0.86kg



615




659

	CODE
	341248W_
	341248L_
	341248G_
	341248M_
	341248Q_
	341248P_
	341248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5
1800-2850K	2x310 >90	9



PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

Ⓢ IP20 0.24kg

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

PAR16 6.5W | GU10 | phase-cut dim

		CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 743

147

 2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 0.43kg

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

PAR16 6.5W | GU10 | phase-cut dim

CODE		
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more lamps and specs on page 743





PRIVATE RESIDENCE | MARTIJN ENSINK - MAEN INTERIORS NETHERLANDS

HEXO mini

WALL SURFACE

153

67

77

115

1.0

PAR16 max. 12W | GU10

100-240VAC | 50-60Hz

aluminium powder coated

brushed wet painted

⊕

IP20 0.23kg

300420G0

300420Q0

300420P0

300420B0

CODE

67

77

200

2.0

2x PAR16 max. 12W | GU10

100-240VAC | 50-60Hz

aluminium powder coated

brushed wet painted

⊕

IP20 0.40kg

301420G0

301420Q0

301420P0

301420B0

CODE

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

2700K | 460lm

901228W3

2700K | 437lm

901228B3

3000K | 500lm

901228W5

3000K | 457lm

901228B5

more lamps and specs on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

2700K | 460lm

901228W3

2700K | 437lm

901228B3

3000K | 500lm

901228W5

3000K | 457lm

901228B5

more lamps and specs on page 743

back

WEVER & DUCRÉ 460 — 461





RAY mini

WALL SURFACE



159



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.21kg

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.36kg

CODE	
	300220W0
	300220L0
	300220G0
	300220M0
	300220P0
	300220B0

CODE	
	301220W0
	301220L0
	301220G0
	301220M0
	301220P0
	301220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm
	2700K 437lm
	3000K 500lm
	3000K 457lm

more lamps and specs on page 743

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm
	2700K 437lm
	3000K 500lm
	3000K 457lm

more lamps and specs on page 743



back

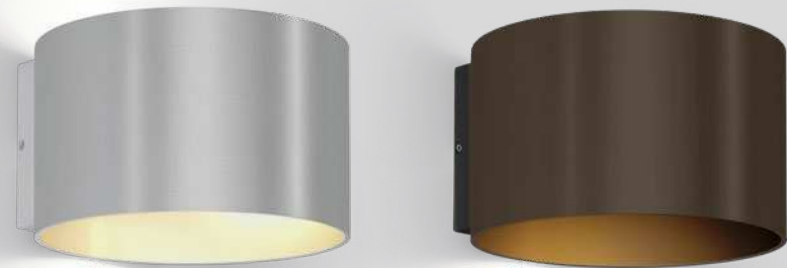

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.62kg

	CODE
	3221GOW0
	3221GOL0
	3221GOG0
	3221GOM0
	3221GOQ0
	3221GOP0
	3221GOB0

OPTIONAL


flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.1W | G9 | phase-cut dim

	CODE
3000K 280lm	9010G804

more lamps and specs on page 744



1.0 LED


LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.62kg

	CODE
	342168W_
	342168L_
	342168G_
	342168M_
	342168Q_
	342168P_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9



2.0 LED

2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.69kg

	CODE
	342148W_
	342148L_
	342148G_
	342148M_
	342148Q_
	342148P_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9

RAY
WALL SURFACE



161



257 | 289 | 303



331



609




643



OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA



RAY
WALL SURFACE



4.0 LED

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L70|50K 0.85kg

CODE	
	342248W_
	342248L_
	342248G_
	342248M_
	342248Q_
	342248P_
	342248B_




incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5
1800-2850K	2x310 >90	9



TRAIN

WALL SURFACE

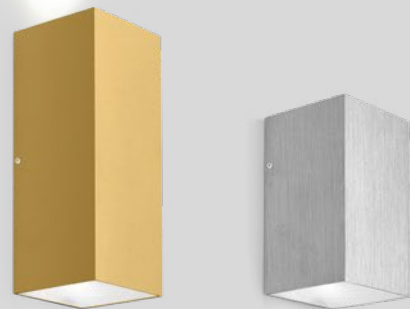

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80I50K 0.24kg

2700K | >90 CRI | 520lm

CODE
306868W3
306868G3
306868B3

3000K | >90 CRI | 570lm

CODE
306868W5
306868L5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80I50K 0.35kg

2700K | >90 CRI | 2x360lm

CODE
306968W3
306968G3
306968B3


3000K | >90 CRI | 2x375lm

CODE
306968W5
306968L5



CENTRAL

WALL SURFACE




1.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

 IP20 SDCM3 L80l60K 0.56kg

CODE	
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >90	3
3000K	620 >90	5



2.0

 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

 IP20 SDCM3 L80l60K 0.50kg





CODE	
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x315 >90	3
3000K	2x340 >90	5



TRACE SLIM

WALL SURFACE



1.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 A 33° SDCM2 L80|50K 0.28kg

CODE	
	333364CH_
	333364B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x490 >90	3
3000K	2x520 >90	5

2.0

LED 4x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 A 33° SDCM2 L80|50K 0.88kg

CODE	
	333464CH_
	333464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x490 >90	3
3000K	4x520 >90	5





TRACE
WALL SURFACE



173



357



1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 A-22° SDCM2 L80|50K 0.42kg

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 A-22° SDCM2 L80|50K 0.74kg

		CODE
		333164W_
		333164H_
		333164CH_
		333164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	560 >90	3
3000K	630 >90	5

		CODE
		333264W_
		333264H_
		333264CH_
		333264B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x560 >90	3
3000K	2x630 >90	5





SARA snooze

WALL SURFACE



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

IP20 0°-90°/330° 0.33kg

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743





PRIVATE RESIDENCE | IMORE. BELGIUM



MATCH snooze

WALL SURFACE



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



93




199



259 | 267



369




1.0

LED LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

⊕ IP20 0°-90°|350° $\sim$ A 30° SDCM2 L80|50K 0.24kg

CODE	
	177353W_
	177353B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	310 >90	3
3000K	330 >90	5

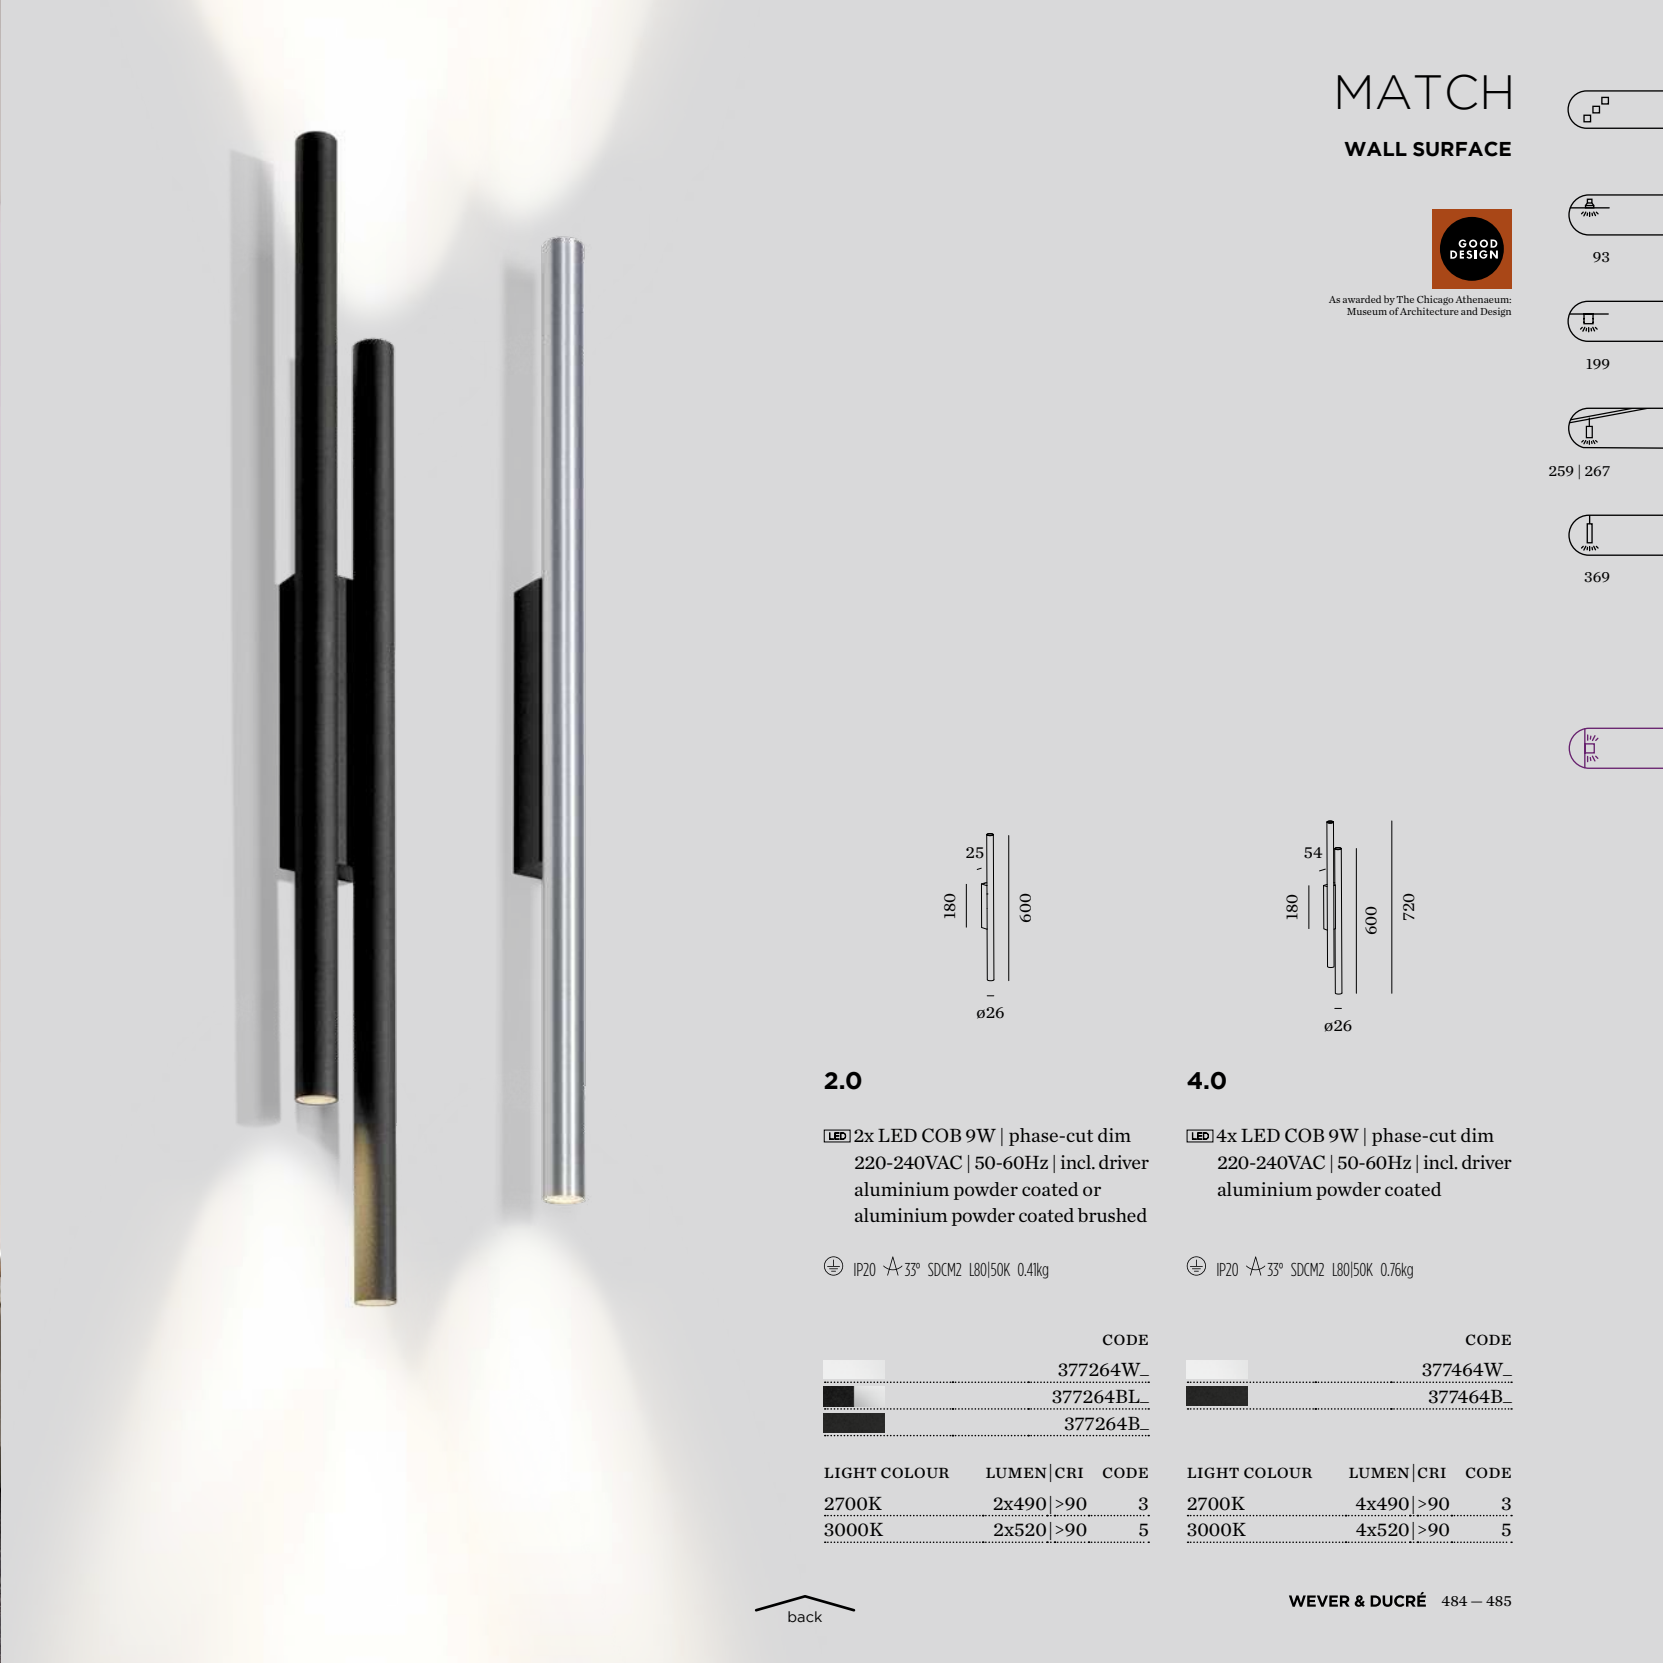

MATCH

WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



93





199



259 | 267



369



2.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated or
aluminium powder coated brushed

⊕ IP20 $\hat{A}$ 33° SDCM2 L80|50K 0.41kg

	CODE
	377264W_
	377264BL_
	377264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x490 >90	3
3000K	2x520 >90	5

4.0

LED 4x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 $\hat{A}$ 33° SDCM2 L80|50K 0.76kg

	CODE
	377464W_
	377464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x490 >90	3
3000K	4x520 >90	5



weverducre.com/odrey-collection



SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.


Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

CHOOSE YOUR VERY OWN ODREY

MOUNTING + SHADES

MOUNTING

available in white, gold or black



direct light



direct | indirect light



SHADES

available in white, gold or black



ø 100



ø 124



ø 115



ø 133




ø 145



ø 140



A diagram showing a light bulb hanging from a ceiling. The bulb is represented by a vertical rectangle with a circular base. Five short lines radiate from the base of the bulb, indicating light emission. The bulb is suspended by a single vertical line from a horizontal line representing the ceiling.



⊕ IP20 0.30kg



GG



BB



GW



BG




GB

 back




As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



269 | 291



333



2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.41kg



WW



GG



BB




GW



BG



GB



2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.50kg


CODE	
387520WW0	
387520GG0	
387520BB0	
387520GW0	
387520BG0	
387520GB0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.54kg

CODE	
387620WW0	
387620GG0	
387620BB0	
387620GW0	
387620BG0	
387620GB0	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

more lamps and specs on page 743



PRIVATE RESIDENCE | NORDIC STANDARD SPAIN

S&R CORNELISSEN

MICK snooze

WALL SURFACE




reddot winner 2020
lighting design



207



265



1.0

LED LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

⊕ IP20 0°-90°|350° ⚡ 18° SDCM2 L80|50K 0.39kg




CODE	
	159643J_
	159643K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	180 >90	3
3000K	200 >90	5





ETXE AUNDI JATETXEA | NORTH HOME STUDIO OÑATI | SPAIN

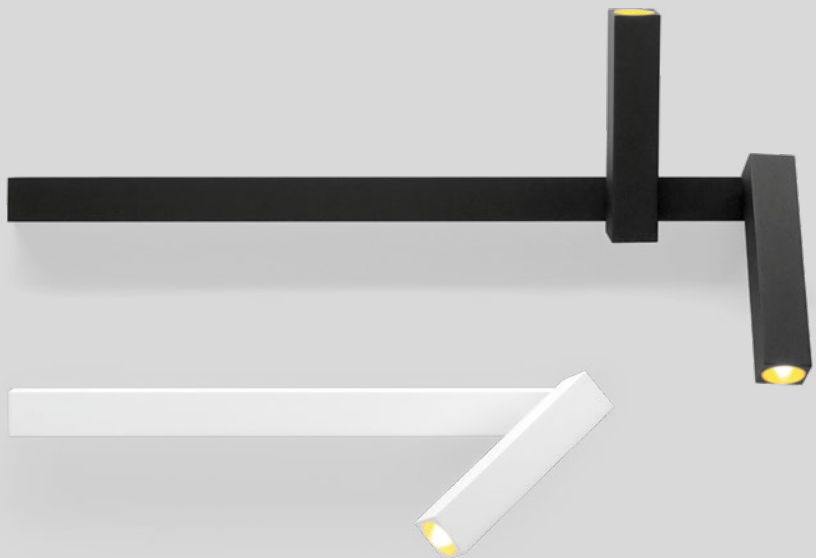

1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 0°-90°|350° ∠ 18° SDCM2 L80|50K 0.35kg

CODE		
	159344J_	
	159344K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	225 >90	3
3000K	245 >90	5

2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP20 0°-90°|350° ∠ 18° SDCM2 L80|50K 0.62kg

CODE		
	159244J_	
	159244K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x225 >90	3
3000K	2x245 >90	5

MICK
WALL SURFACE



207




265






BCL - BARCELONA CREATIVE LAB BARCELONA | SPAIN

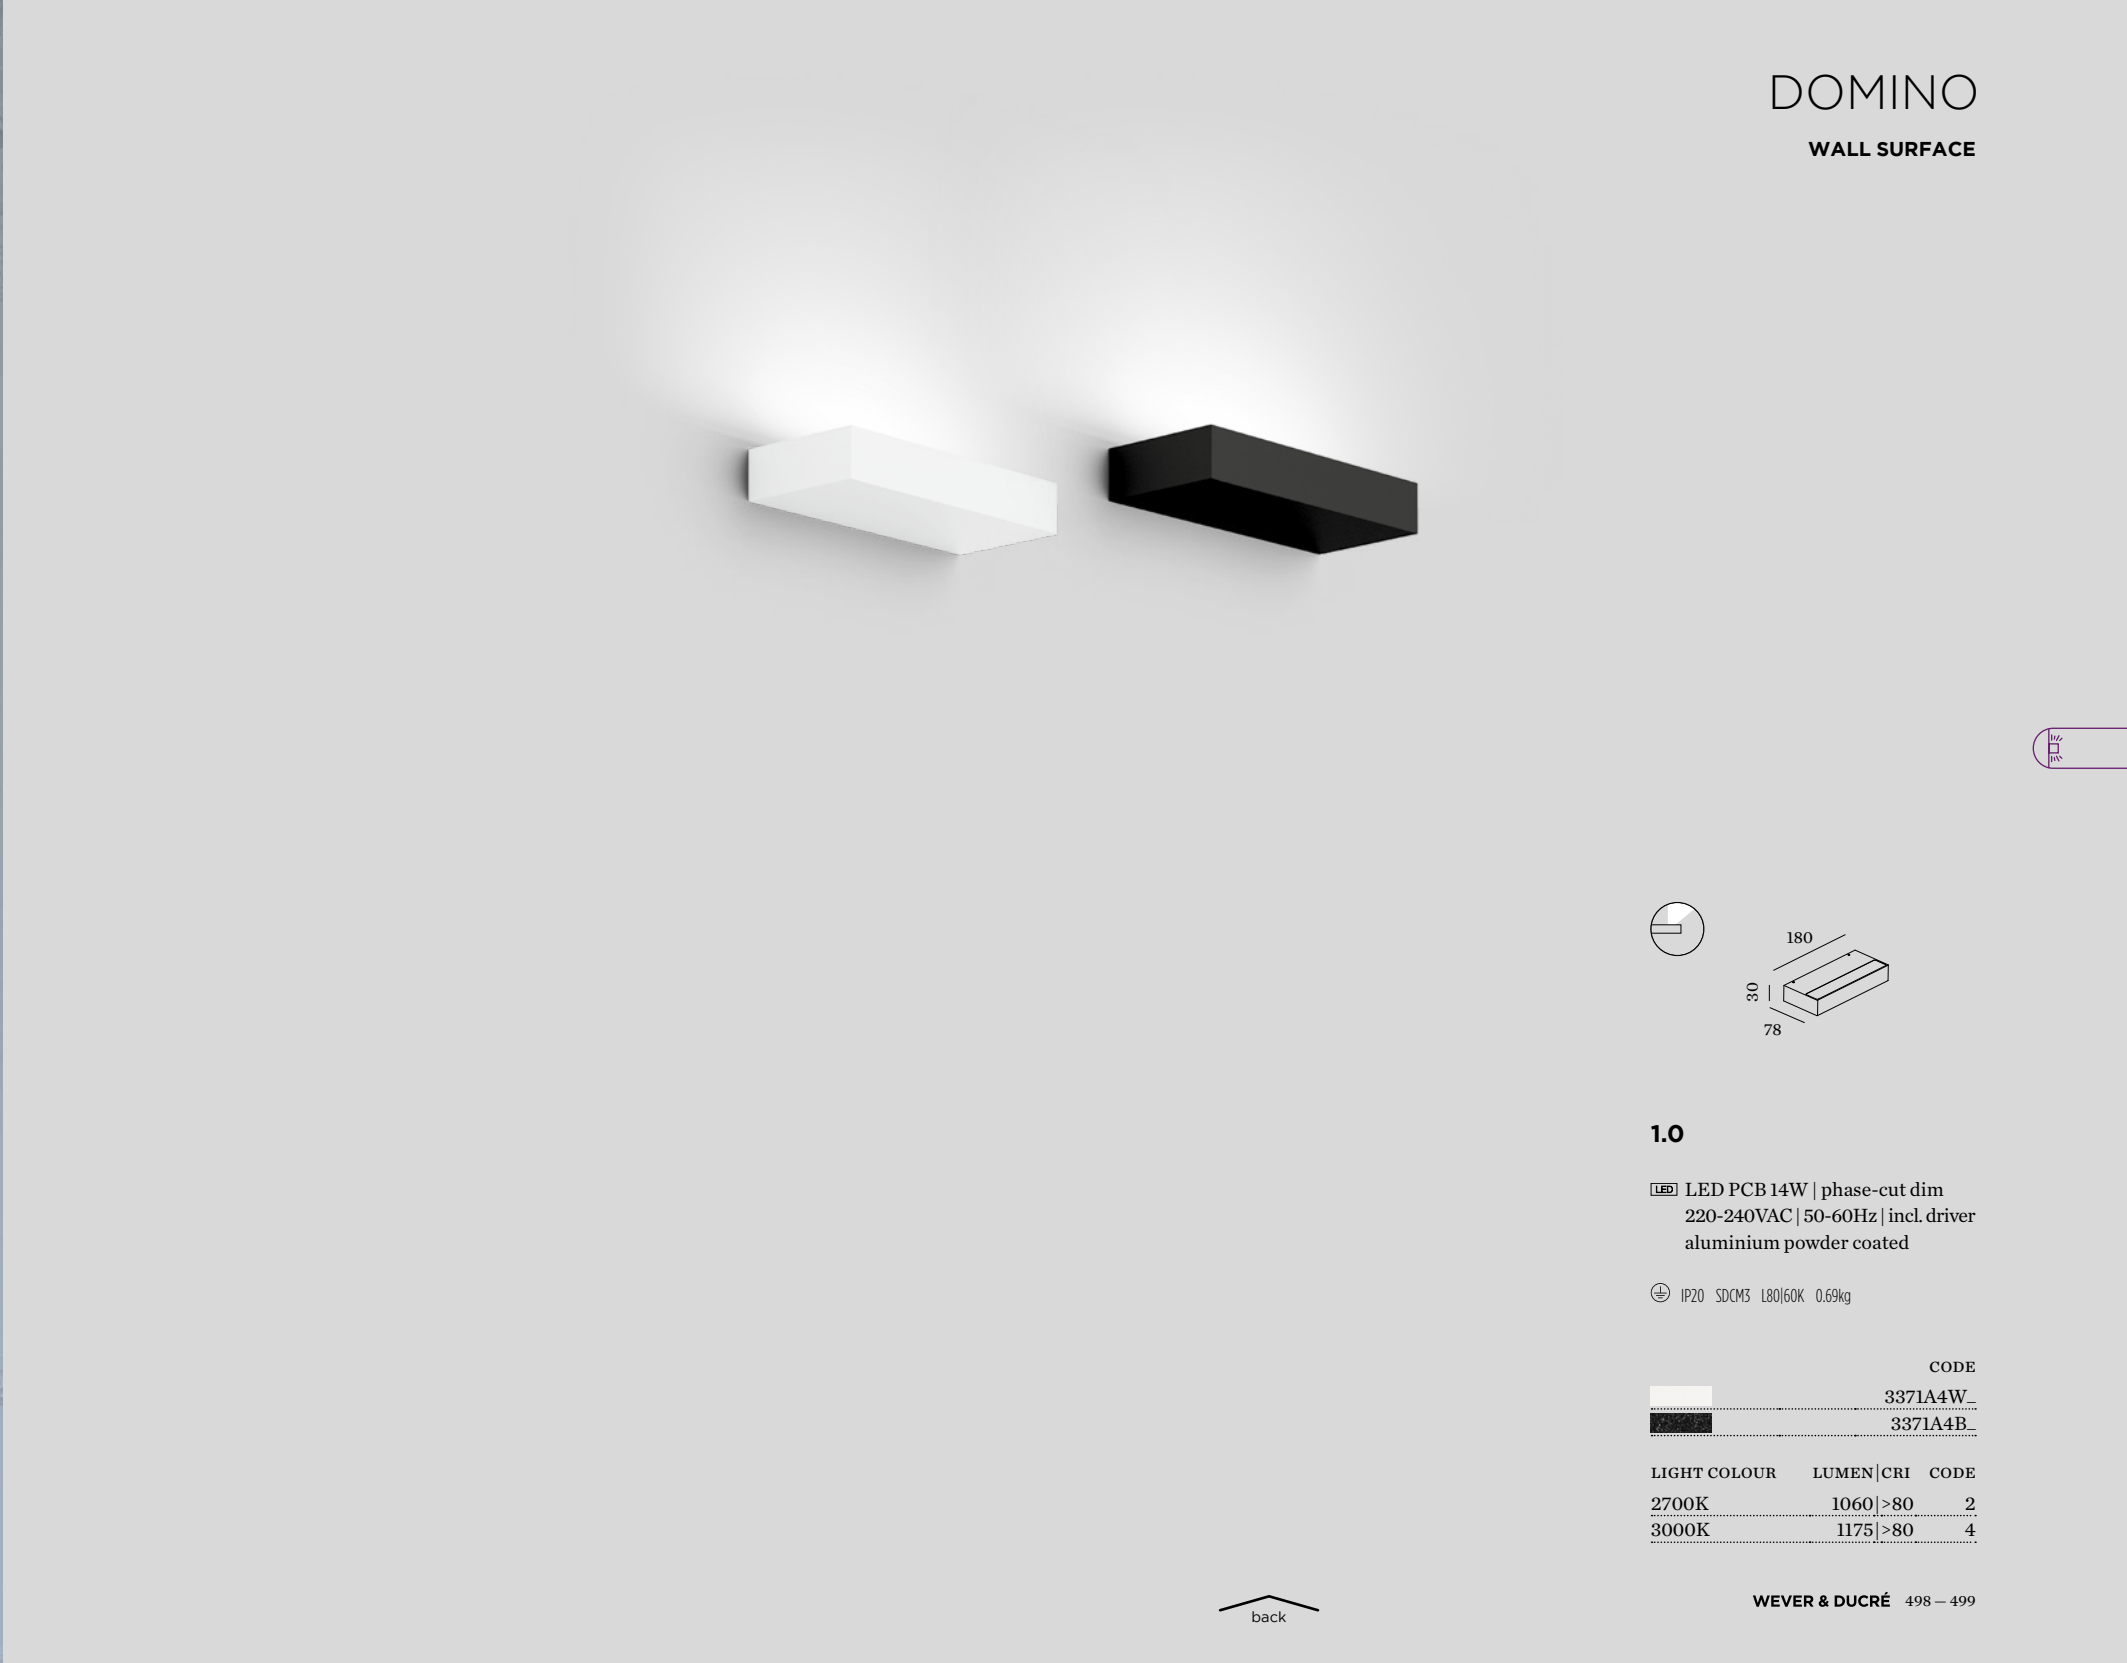

DOMINO

WALL SURFACE



1.0

LED LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated




⊕ IP20 SDCM3 L80|60K 0.69kg

CODE	
	3371A4W_
	3371A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1060 >80	2
3000K	1175 >80	4



LEENS
WALL SURFACE

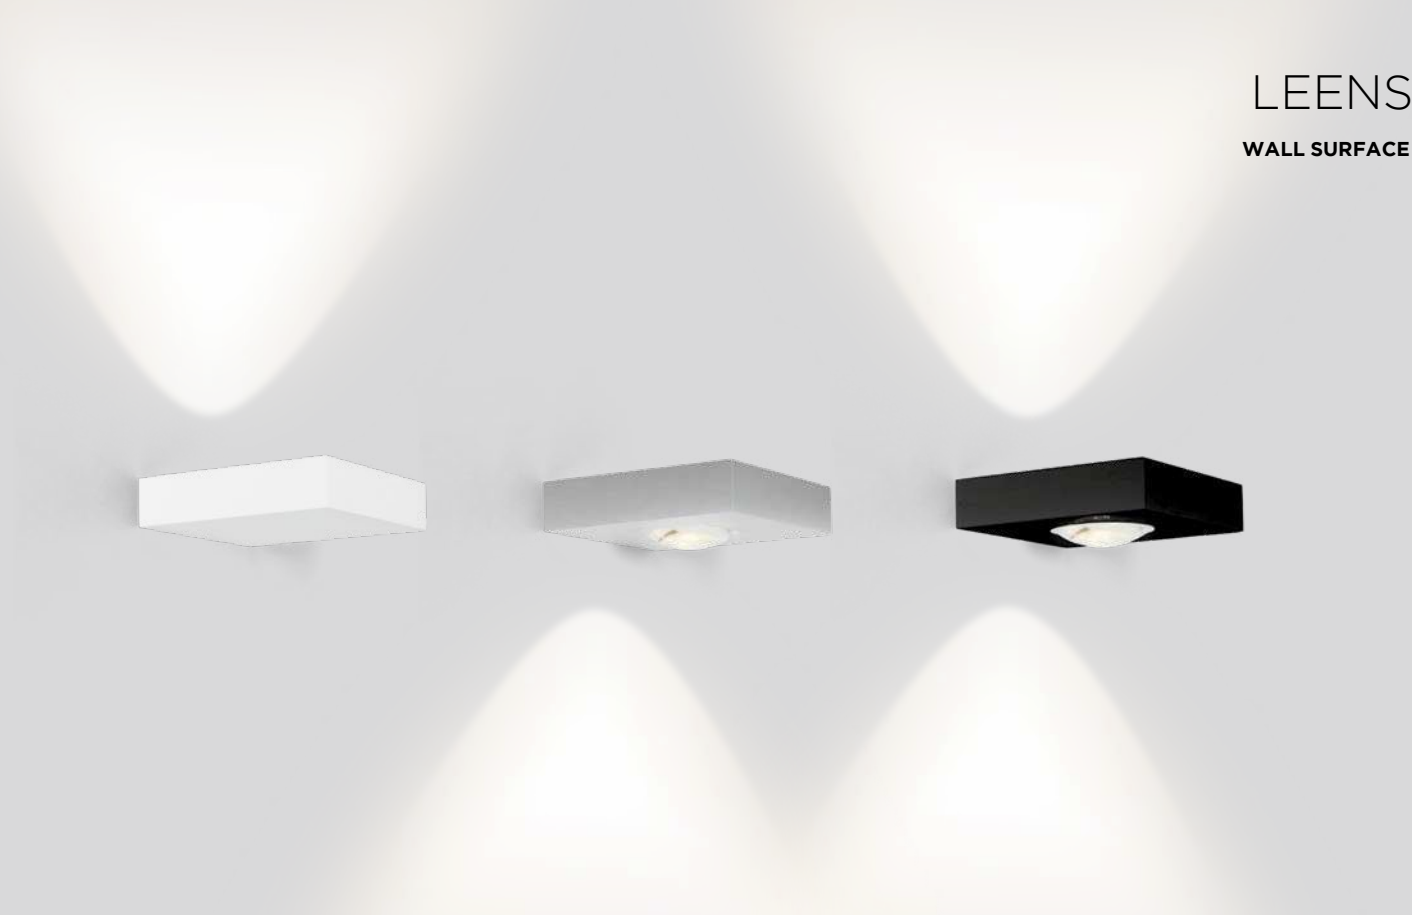

1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

⊕ IP20 SDCM3 L80l60K 1.1kg

3000K | >90 CRI | 425lm

CODE	
	311174W5
	311174L5
	311174B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted



⊕ IP20 SDCM3 L80l60K 0.90kg

3000K | >90 CRI | 2x250lm

CODE	
	311274W5
	311274L5
	311274B5



BENTO
WALL SURFACE

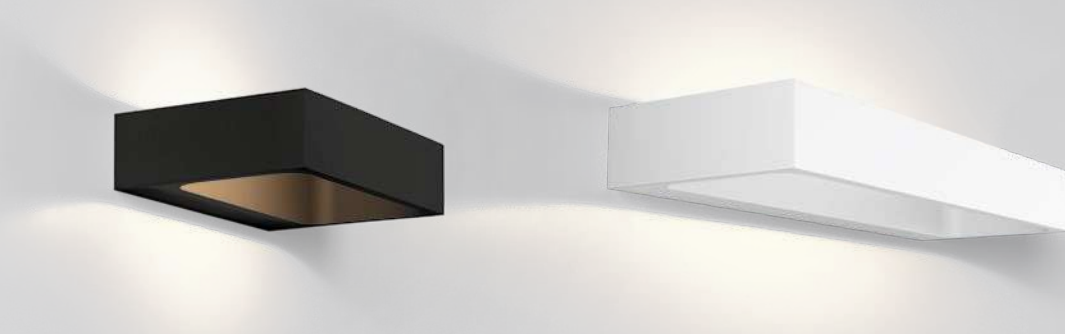


1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 270lm

	CODE
	309274W5
	309274B5



3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated



IP20 SDCM3 L80|60K 1.48kg

3000K | >90 CRI | 270lm

	CODE
	309374W5
	309374B5



SCAVA
WALL SURFACE

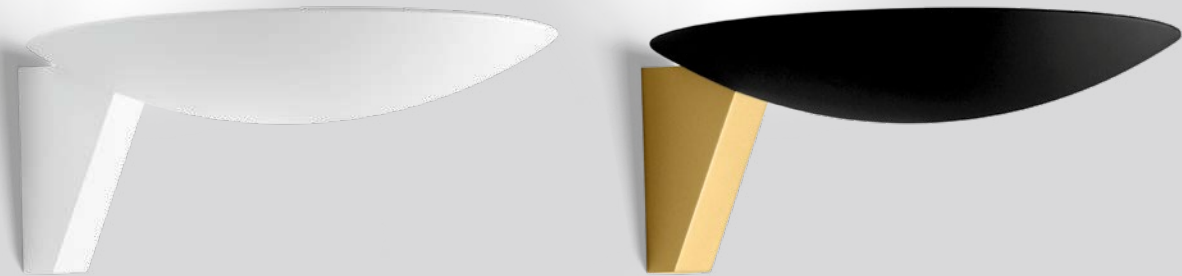

1.0

LED LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PC cover

⊕ IP20 SDCM2 L80|50K 0.42kg

CODE	
	350188W_
	350188K_
	350188B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1880 >90	3
3000K	1960 >90	5



DOT




WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



Delta Selection
ADI Awards 2022



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM2 L80/55K 0.40kg

CODE	
	330164W_
	330164M_
	330164Q_
	330164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	420 >90	5

3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM2 L80/55K 0.56kg

CODE	
	330264W_
	330264M_
	330264Q_
	330264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x420 >90	5

4.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover



IP20 SDCM2 L80/55K 0.73kg

CODE	
	330464W_
	330464M_
	330464Q_
	330464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x400 >90	3
3000K	3x420 >90	5

back





1.0

▣ QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass


⊕ IP44 0.60kg

CODE	
	3431G0W0
	3431G0Y0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

CODE	
3000K 280lm	9010G804
more lamps and specs on page 744	



2.0

▣ C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass


⊕ IP44 1.03kg

CODE	
	3432C0W0
	3432C0Y0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

CODE	
2700K 450lm	9003C103
more lamps and specs on page 744	



1.0 COMP

▣ 3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

⊠ IP20 0°-35° 3.06kg

CODE	
	3441G0WB0
	3441G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

CODE	
3000K 280lm	9010G804
more lamps and specs on page 744	

DRO
WALL SURFACE



211



287



373




575 | 585



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM






1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

CODE			
182584B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	645 >90	3
3000K	665 >90	5




2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

CODE			
182684B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	645 >90	3
3000K	665 >90	5




3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

CODE			
182784B_			

LIGHT COLOUR	LUMEN CRI	CODE
2700K	645 >90	3
3000K	665 >90	5



1.0 CONE

☐ T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

⊕ IP20 1.85kg

	CODE
	3341E0V0
	3341E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745



1.0 CONE PLUG

☐ T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
cable plug with dimmer switch

⊕ IP20 2.15kg


	CODE
	3343E0V0
	3343E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745



1.8 WIRO

☐ T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

⊕ IP20 1.95kg


	CODE
	3345E0V0
	3345E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745



1.8 WIRO PLUG

☐ T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
cable plug with dimmer switch

⊕ IP20 2.25kg

	CODE
	3346E0V0
	3346E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

more lamps and specs on page 745

WIRO

WALL SURFACE




215



379







HOTEL PARK | MICHAL STAŠKO PIESTANY | SLOVAKIA



► DESIGN WITH LOVE

back



MIRRO

WALL SURFACE

217

397

579 | 587

13&9 DESIGN

WEVER & DUCRÉ 522 — 523

1.0 EXTENDED

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 0.92kg

6331E0GB0
6331E0NB0
6331E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

CODE

2200K | 371lm 9003E155
2700K | 409lm 9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

CODE

2700K | 409lm 9003E140

2.0 EXTENDED

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 1.25kg

6332E0GB0
6332E0NB0
6332E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE

2200K | 371lm 9003E156
2700K | 464lm 9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE

2700K | 464lm 9003E157

back





CLEA

WALL SURFACE



219

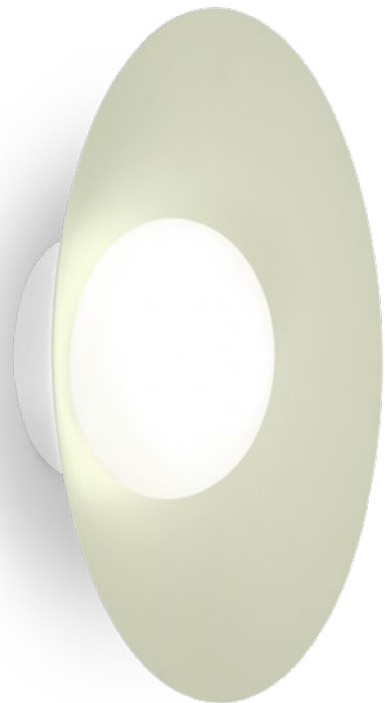


1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 0.78kg

CODE	
	181484W_
	181484SG_
	181484FJ_
	181484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5




2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 1.31kg

CODE	
	181584W_
	181584SG_
	181584FJ_
	181584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5




3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80/50K 2.09kg

CODE	
	181684W_
	181684SG_
	181684FJ_
	181684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5



back





ROOMOR

WALL SURFACE



reddot award 2019
winner lighting design

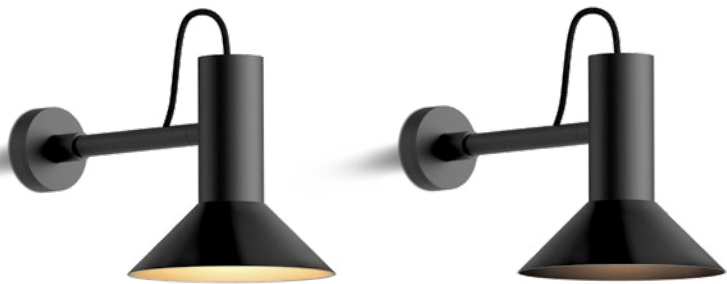

1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0°-45° 0.99kg

CODE	
	338120BK1
	338120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE	
 2700K 437lm	901228B3
 3000K 457lm	901228B5

more lamps and specs on page 743



KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK





3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch


IP20 0°-45°|0°-30° 1.36kg

CODE	
	339120BK1
	339120BB1

OPTIONAL

CODE	
 2700K 437lm	901228B3
 3000K 457lm	901228B5

more lamps and specs on page 743



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 1.29kg

CODE	
	339220BK1
	339220BB1

OPTIONAL

CODE	
 2700K 437lm	901228B3
 3000K 457lm	901228B5

more lamps and specs on page 743





PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

Ⓢ IP20 0°-45°|0°-30° 1.87kg|1.70kg

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

		CODE
■ 2700K 437lm		901228B3
■ 3000K 457lm		901228B5

more lamps and specs on page 743



PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

Ⓢ IP20 0°-45°|0°-30° 2.37kg|2.24kg

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE
 ■ 2700K | 437lm 901228B3
 ■ 3000K | 457lm 901228B5

more lamps and specs on page 743



PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

Ⓢ IP20 0°-45°|0°-30° 2.48kg


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 743



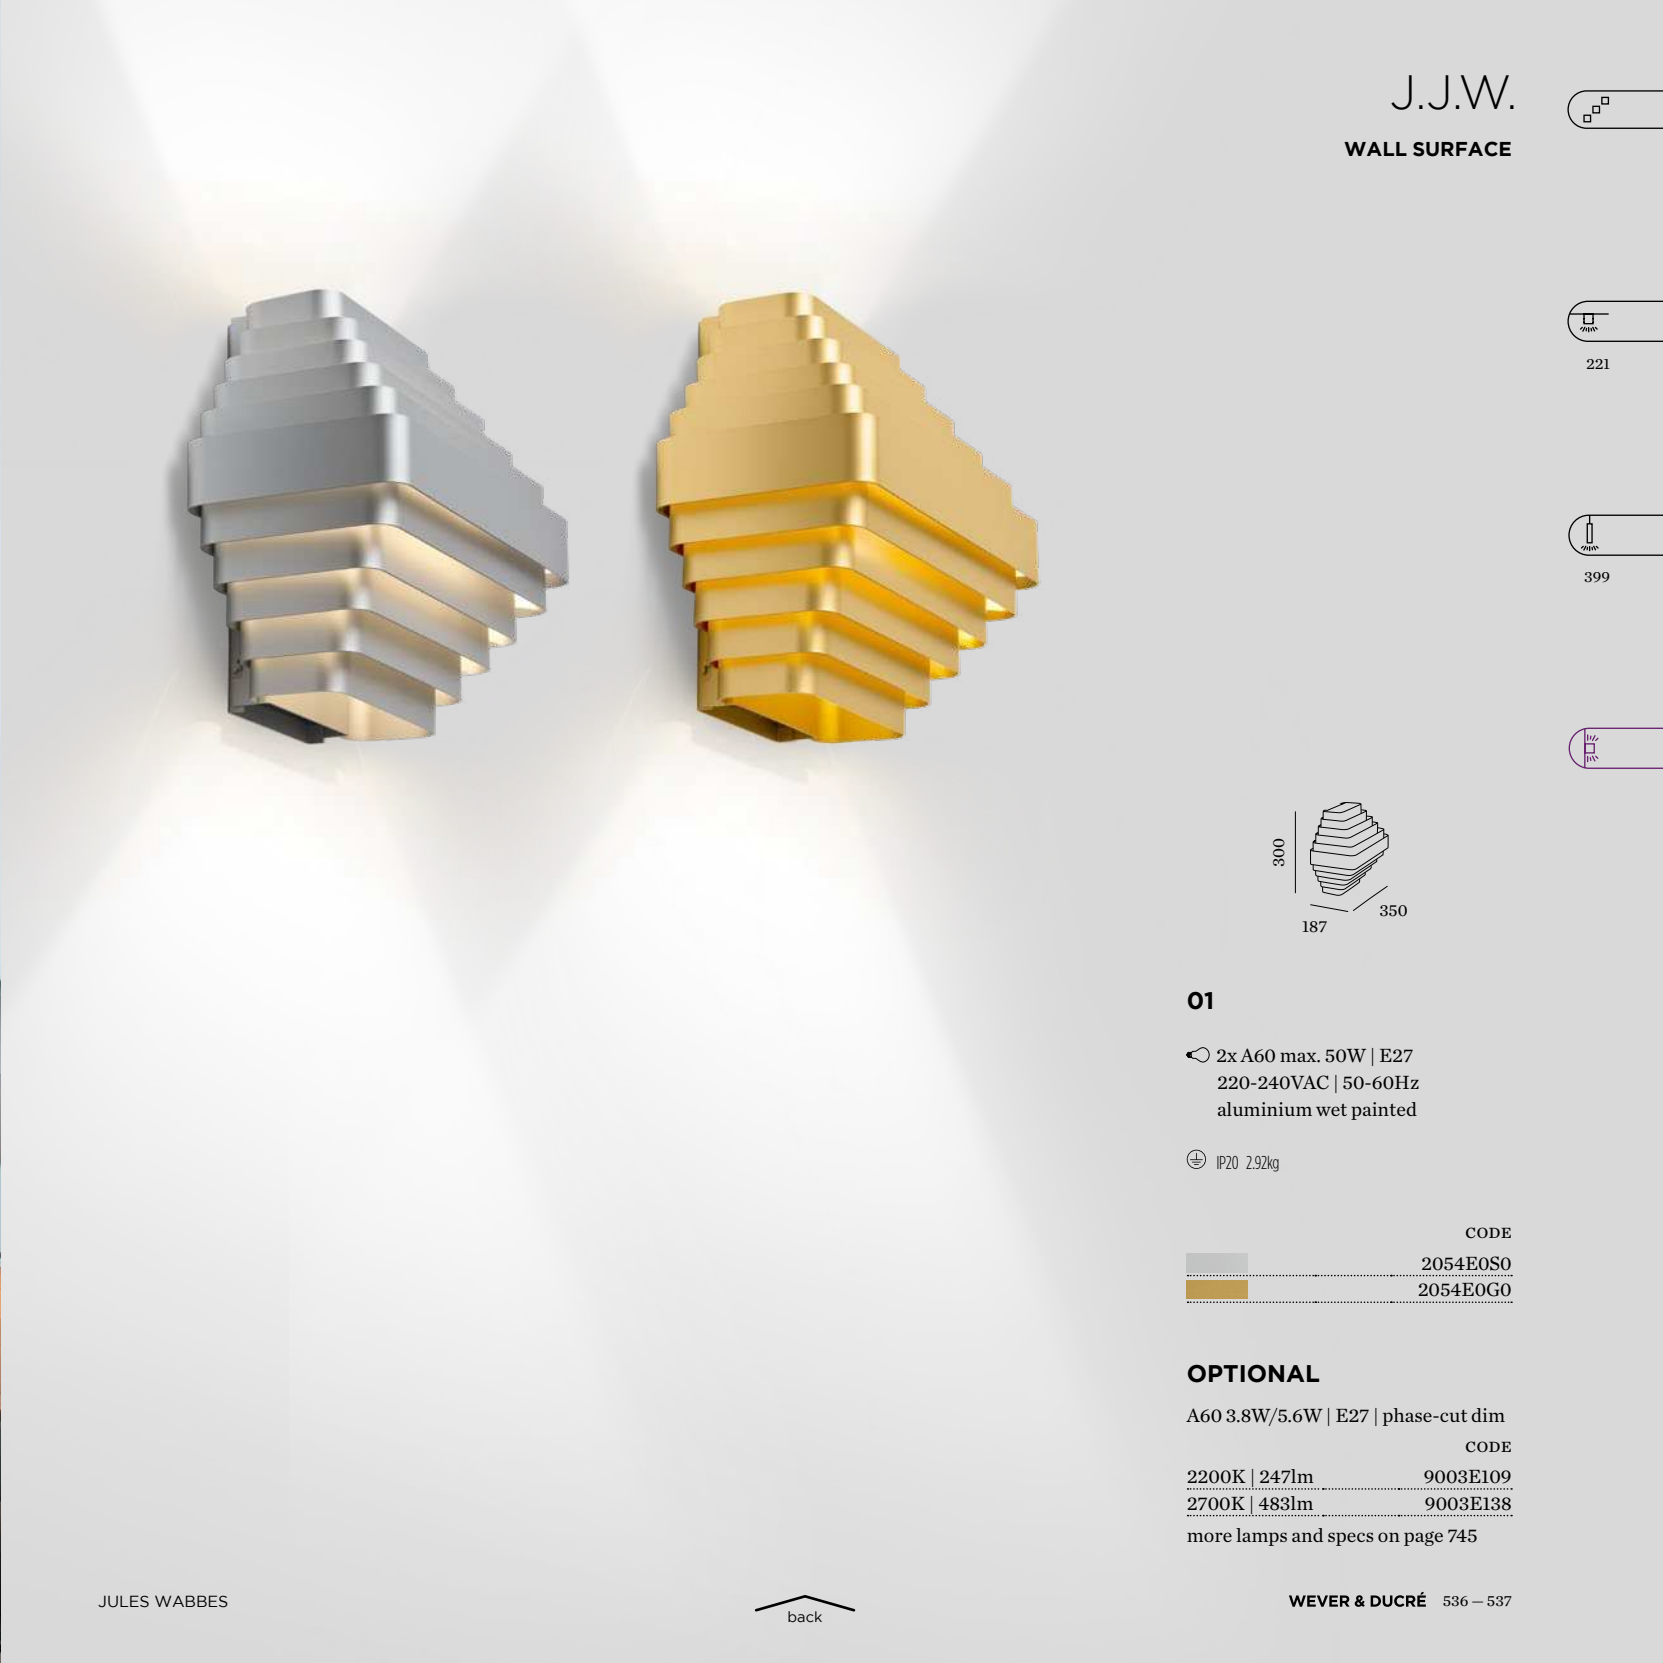


J.J.W.
WALL SURFACE



221



399



01

2x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 2.92kg

CODE	
	2054E0S0
	2054E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim


CODE	
2200K 247lm	9003E109
2700K 483lm	9003E138

more lamps and specs on page 745



RESTAURANT MISMO | FUTURE LIVING DIEGEM | BELGIUM

J.J.W.
WALL SURFACE



02

⌂ A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

⊕ IP20 1.02kg

CODE	
	2055E0S0
	2055E0Q0
	2055E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim

CODE	
2200K 247lm	9003E109
2700K 483lm	9003E138



more lamps and specs on page 745



PRIVATE RESIDENCE AUSTRIA



PRIVATE RESIDENCE | MAY HOME STYLE GERMANY

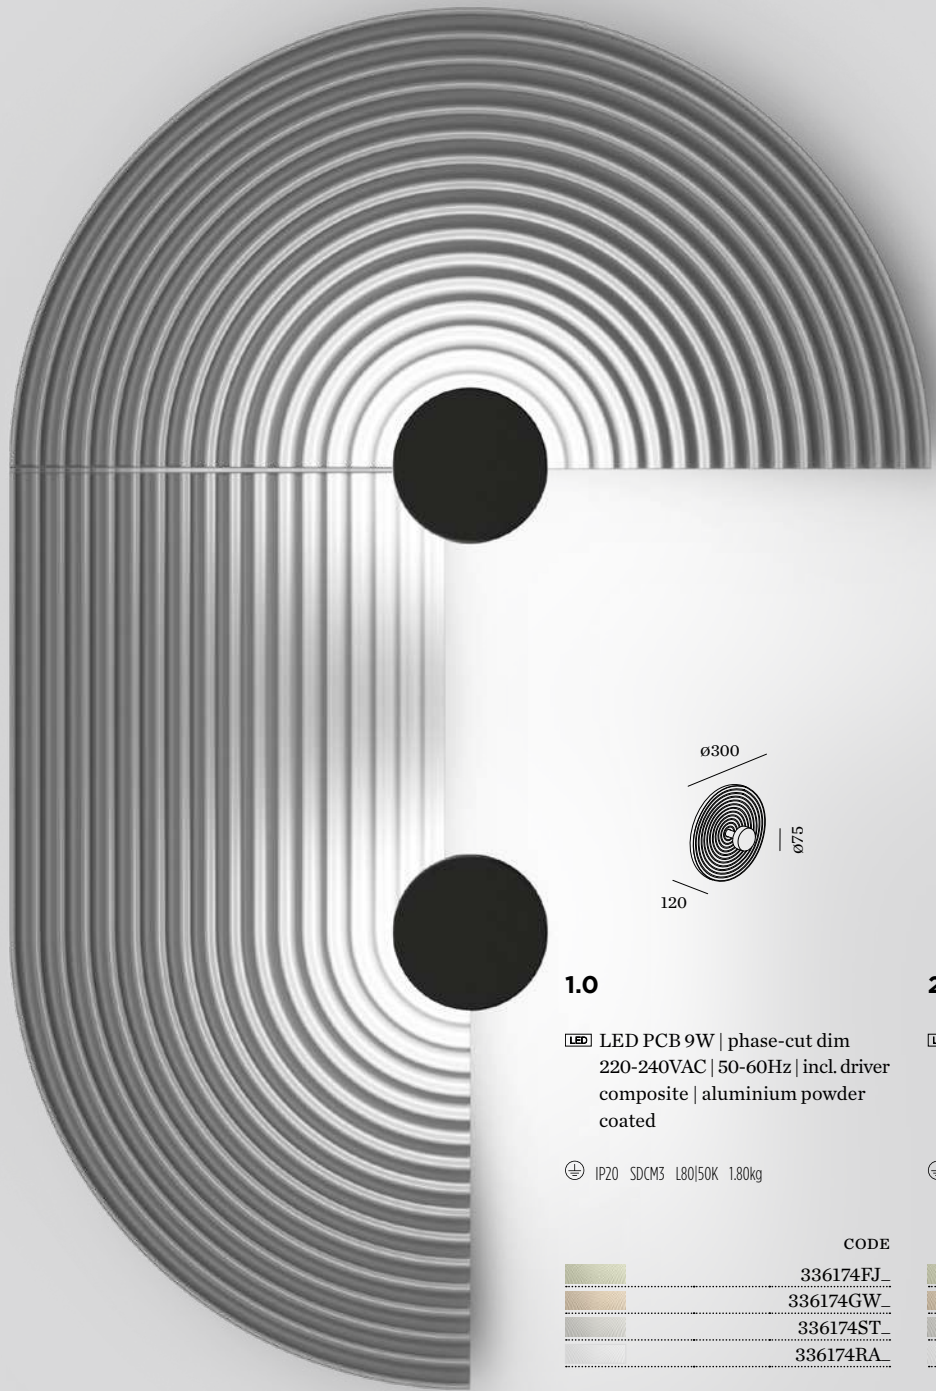


1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

IP20 SDCM3 L80/50K 1.80kg

CODE			
	336174FJ_		
	336174GW_		
	336174ST_		
	336174RA_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5




2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

IP20 SDCM3 L80/50K 1.95kg

CODE			
	336274FJ_		
	336274GW_		
	336274ST_		
	336274RA_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5



3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium powder
coated

IP20 SDCM3 L80/50K 1.70kg

CODE			
	336374FJ_		
	336374GW_		
	336374ST_		
	336374RA_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5


TAPIS
WALL SURFACE









PRIVATE RESIDENCE | BETTINA MEIER SWITZERLAND



2.0 ROUND


LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80I60K 0.70kg | 1.24kg



	CODE
	317578W_
	317578G_
	317578M_
	317578Q_
	317578P_
	317578CC_
	317578B_
marble	317578MW_
marble	317578MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	515 >90	3
3000K	525 >90	5



3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80I60K 1.07kg | 1.92kg

	CODE
	317778W_
	317778G_
	317778M_
	317778Q_
	317778P_
	317778CC_
	317778B_
marble	317778MW_
marble	317778MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	515 >90	3
3000K	525 >90	5



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM






ARGANA RESTAURANT | JOSE LARA INTERIORISMO MADRID | SPAIN



MILES

WALL SURFACE

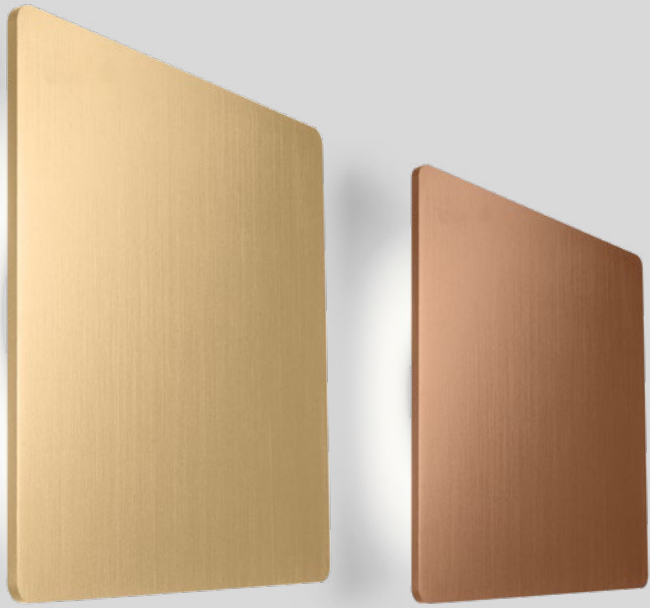

2.0 CARRÉ


LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.01kg | 2.11kg

3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.56kg | 3.39kg



CODE	
	317478W_
	317478G_
	317478M_
	317478Q_
	317478P_
	317478B_
	317478MW_
	317478MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	515 >90	3
3000K	525 >90	5



CODE	
	317678W_
	317678G_
	317678M_
	317678Q_
	317678P_
	317678B_
	317678MW_
	317678MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	515 >90	3
3000K	525 >90	5



MILES

WALL SURFACE



9.0


LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80I60K 2.01kg

12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80I60K 2.60kg




		CODE
		317878W_
		317878G_
		317878B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1560 >90	3
3000K	1580 >90	5

		CODE
		317978W_
		317978G_
		317978B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2130 >90	3
3000K	2160 >90	5

back



OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 755

1.0

 LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.15kg

	CODE
	370584CH_
	370584K_
	370584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	380 >90	5

4.0

 LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.20kg

	CODE
	370884CH_
	370884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	760 >90	5

FINLIN
WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



225



417





OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 755

2.0

 LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.18kg

	CODE
	370684CH_
	370684K_
	370684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	760 >90	5

3.0

 LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

 IP20 SDCM3 L80|50K 0.30kg

	CODE
	370784CH_
	370784B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	760 >90	5

FINLIN

WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



225




417




FINLIN



WALL SURFACE



225




417



1.0 ROUND

LED PCB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80I50K 0.32kg



OPTIONAL

spacer 10mm for overlapping

CODE
900196B0
specs on page 755

CODE	
371184CH	
371184B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1280 >90	3
3000K	1400 >90	5



back



SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM



MORE OPTIONS
weverducre.com/venn-configurator

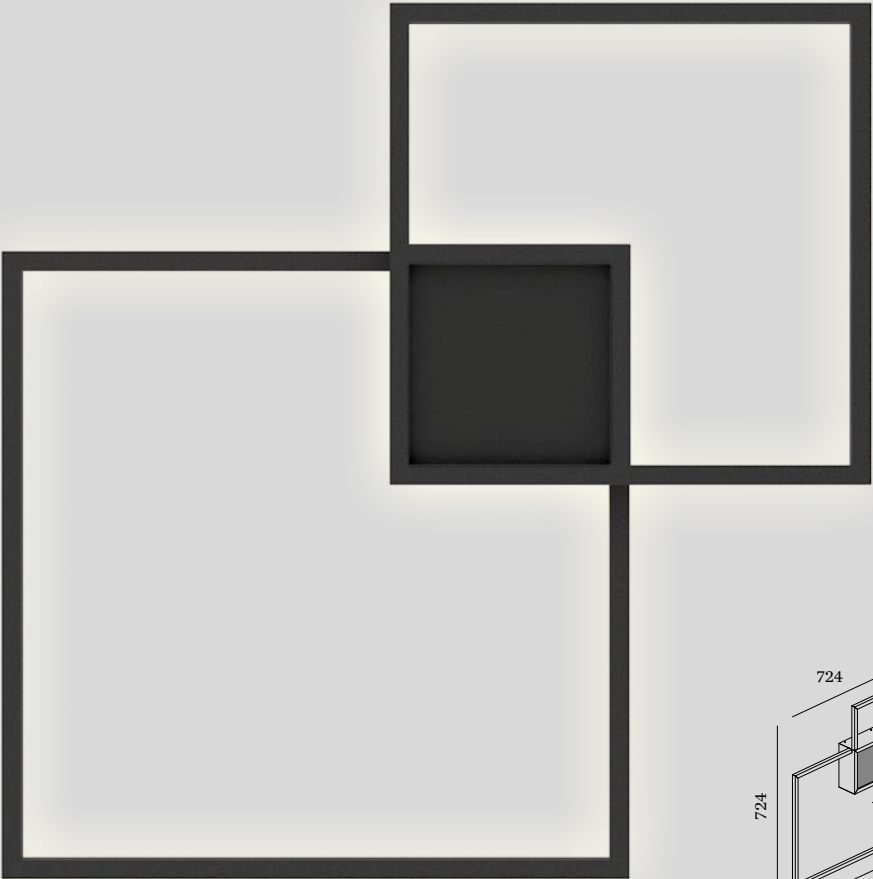


1.0

LED LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80I60K 2.50kg

CODE		
	149184W_	
	149184Q_	
	149184B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4



2.0

LED LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80I60K 2.50kg

CODE		
	149284W_	
	149284Q_	
	149284B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4

VENN

WALL SURFACE



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



227









DARF

WALL SURFACE

project picture application
without cable

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

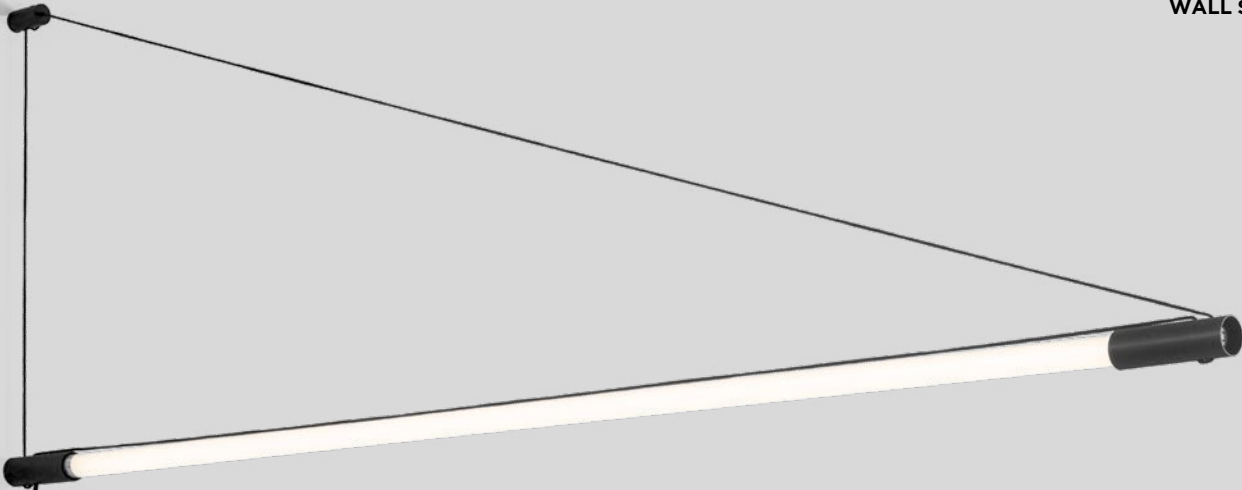

1.1

LED LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
switch

IP20 SDCM3 L70|60K 0.33kg

3000K | >80 CRI | 3300lm


CODE

2563T7B4

4000K | >80 CRI | 3700lm

CODE

2563T7B6



1.2

LED LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
dimmer switch

IP20 SDCM3 L70|60K 0.33kg

2700K | >90 CRI | 1920lm


CODE

2563T8B3


3000K | >90 CRI | 2095lm

CODE

2563T8B5





back

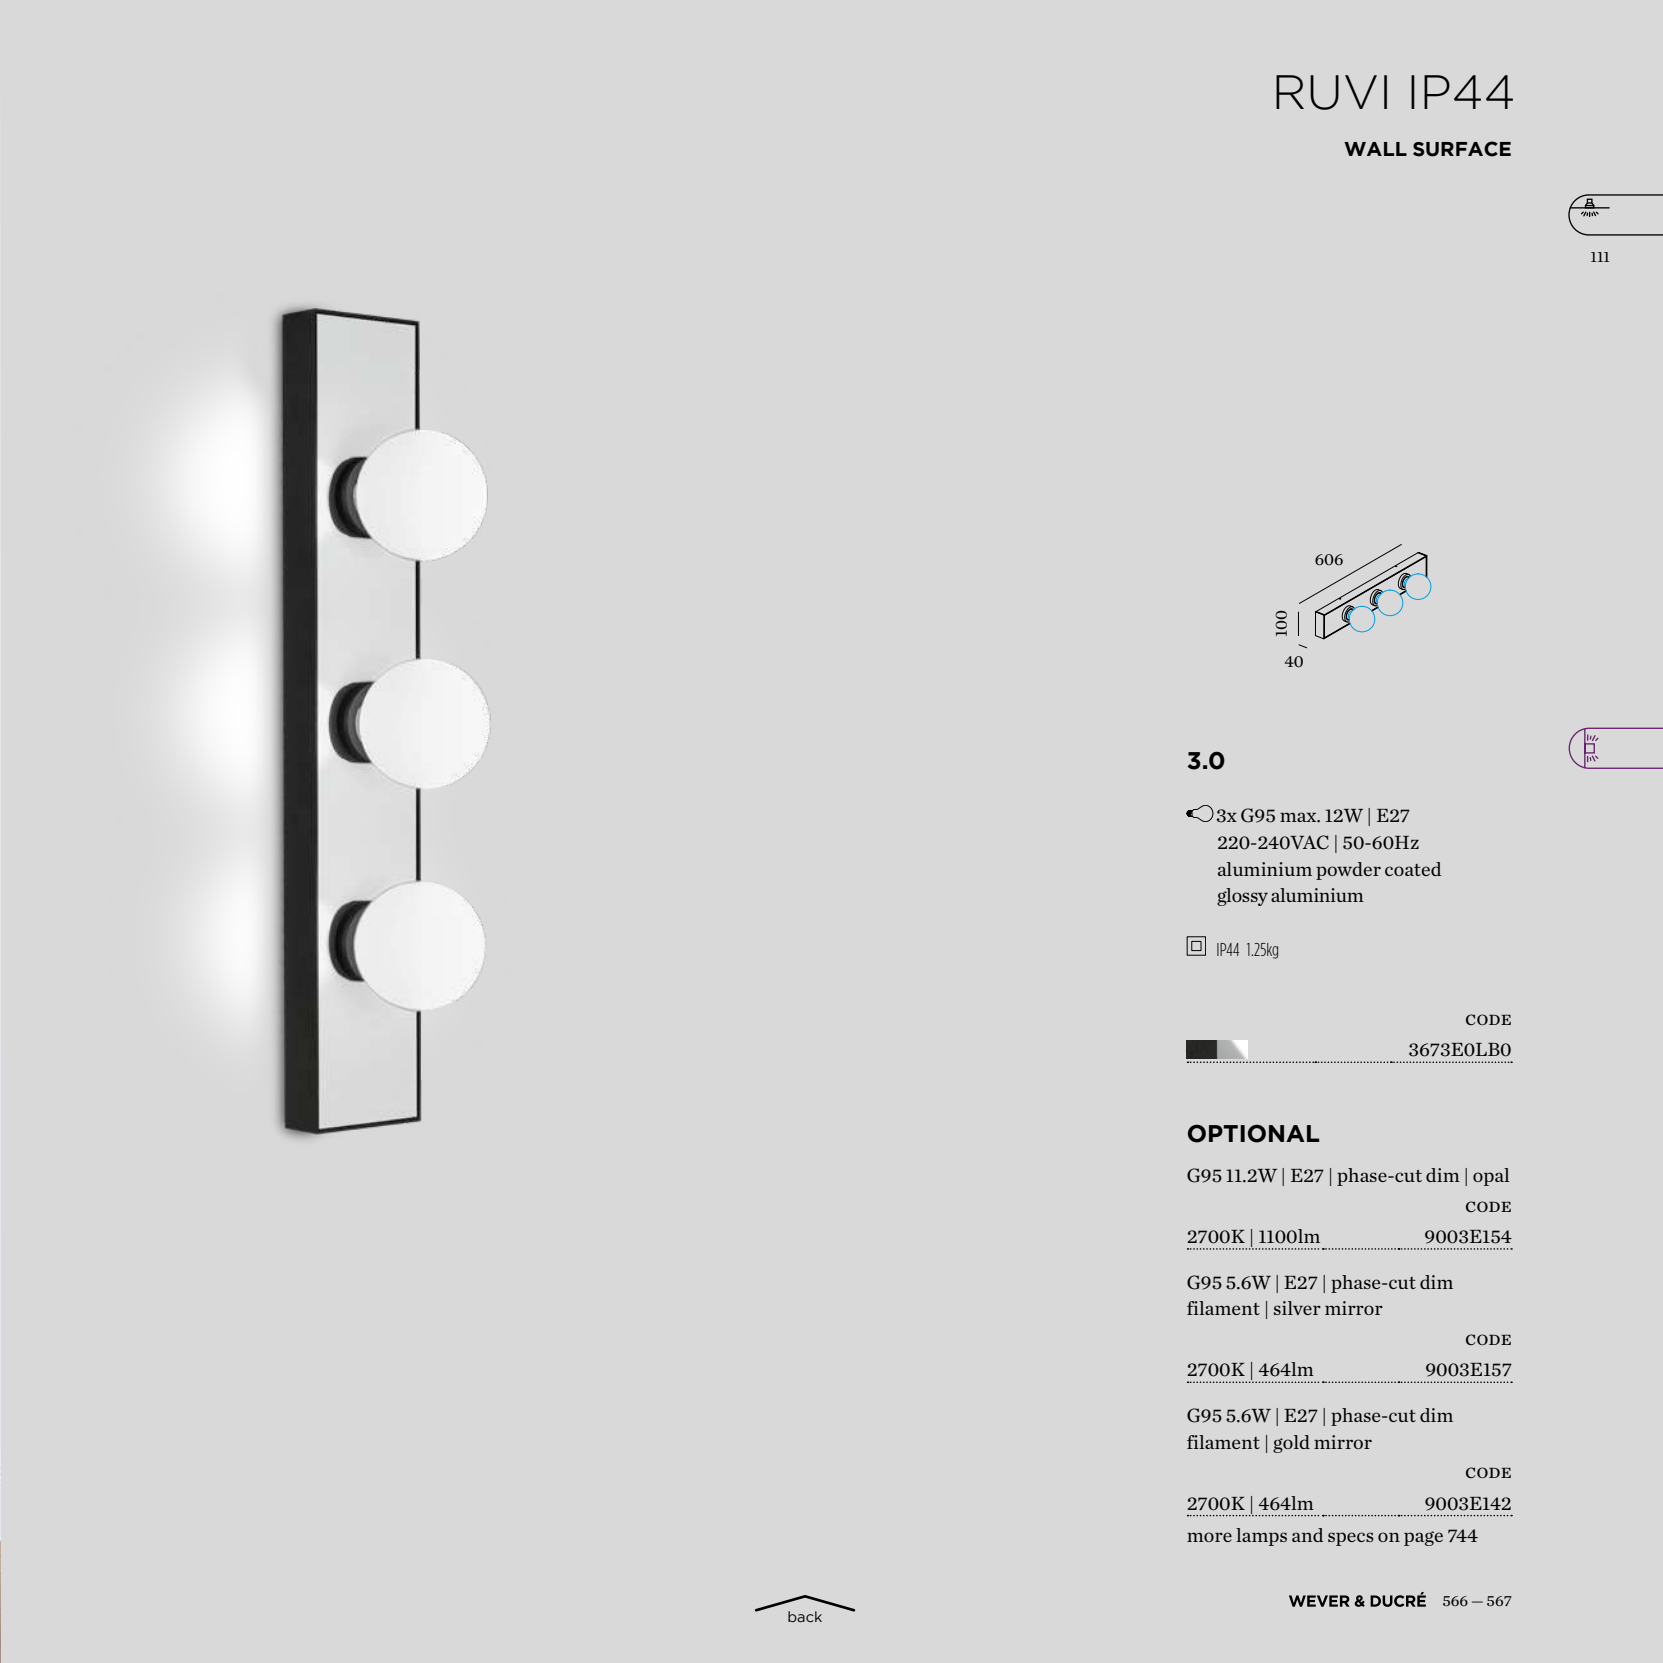

RUVI IP44

WALL SURFACE



3.0

3x G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
glossy aluminium

IP44 1.25kg

CODE



3673EOLB0

OPTIONAL

G95 11.2W | E27 | phase-cut dim | opal

CODE

2700K | 1100lm 9003E154

G95 5.6W | E27 | phase-cut dim
filament | silver mirror

CODE

2700K | 464lm 9003E157

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

CODE

2700K | 464lm 9003E142

more lamps and specs on page 744




back



MIRBA IP44


WALL SURFACE



1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


IP44 SDCM2 L70|60K 0.51kg



2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.65kg



3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.69kg

CODE	
	328188W_
	328188E_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 375/H 640 >90	3
3000K	L 400/H 670 >90	5

CODE	
	328288W_
	328288E_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 530/H 920 >90	3
3000K	L 570/H 960 >90	5


CODE	
	328388W_
	328388E_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 730/H 1290 >90	3
3000K	L 770/H 1350 >90	5



MIRBI long IP44


WALL SURFACE



1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


IP44 SDCM3 L70|50K 0.72kg



2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector


IP44 SDCM3 L70|50K 1.53kg



3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 2.25kg



CODE		
329188W_		
LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 250/H 410 >90	3
3000K	L 280/H 460 >90	5

CODE		
329288W_		
LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 320/H 550 >90	3
3000K	L 365/H 620 >90	5

CODE		
329388W_		
LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 550/H 750 >90	3
3000K	L 610/H 840 >90	5

TABLE | FLOOR

572 — 589

TABLE



DRO
575



DRO
577



MIRRO
579



ROOMOR
581



REVER
DINING
583


FLOOR



DRO
575



DRO
585



DRO
585



MIRRO
587



ROOMOR
589

back



 IP20 0.41kg

OPTIONAL

2.0



OPTIONAL

3.0



OPTIONAL

A60 9W | E27 | phase-cut dim

2700K | 800lm

more lamps and specs on page 744



DRO
TABLE



211




287



373




511



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switchh

IP20 2.70kg



3.0


A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 3.80kg

CODE	
	6432COWB0
	6432C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
CODE
2700K | 450lm 9003C103
more lamps and specs on page 744



CODE	
	6433E0WB0
	6433E0YB0

OPTIONAL


A60 9W | E27 | phase-cut dim
CODE
2700K | 800lm 9003E152
more lamps and specs on page 744



MIRRO
TABLE



217



397



519



1.0
A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 1.30kg

CODE	
	6301E0GB0
	6301E0NB0
	6301E0LB0

OPTIONAL

A60 5.1W/5.5W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E155
2700K 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

CODE	
2700K 409lm	9003E140



HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN



3H DRAFT



GG1



RR1



BK1



BB1




back

ROOMOR

TABLE



reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 2.35kg

CODE	
	637120GG1
	637120RR1
	637120BK1
	637120BB1

OPTIONAL

PAR16 6.5W | GU10

CODE	
	901228W3
	901228B3
	901228W5
	901228B5

more lamps and specs on page 743




REVER DINING

TABLE



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



ALWAYS USE



flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

	CODE
	90019163
	90019164



single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166

1.0

LED 1.5W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder coated
zink alloy | PMMA

IP23 SDCMS L80/60K 0.80kg

lamp body

	CODE
	655186Q
	655186B

LIGHT COLOUR	LUMEN	CRI	CODE
2200K	70	>80	1

lamp body

	CODE
	655186Q
	655186W
	655186B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	85	>80	2

OPTIONAL

multiple charging tray up to 4 fixtures	CODE
	90018007



DRO

FLOOR SURFACE

211

287

373

511

2500

ø300

1650

ø415

3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 8.25kg

CODE

6442E0WB0

6442E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

CODE

2700K | 800lm

9003E152

more lamps and specs on page 744

2500

1600

ø415

1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0°-35° 6.80kg

CODE

6443G0WB0

6443G0YB0

OPTIONAL

QT14 3.1W | G9 | phase-cut dim

CODE

3000K | 280lm

9010G804

more lamps and specs on page 744

ON

YB

OFF

YB

13&9 DESIGN


back

WEVER & DUCRÉ

584 — 585




PRIVATE RESIDENCE BELGIUM

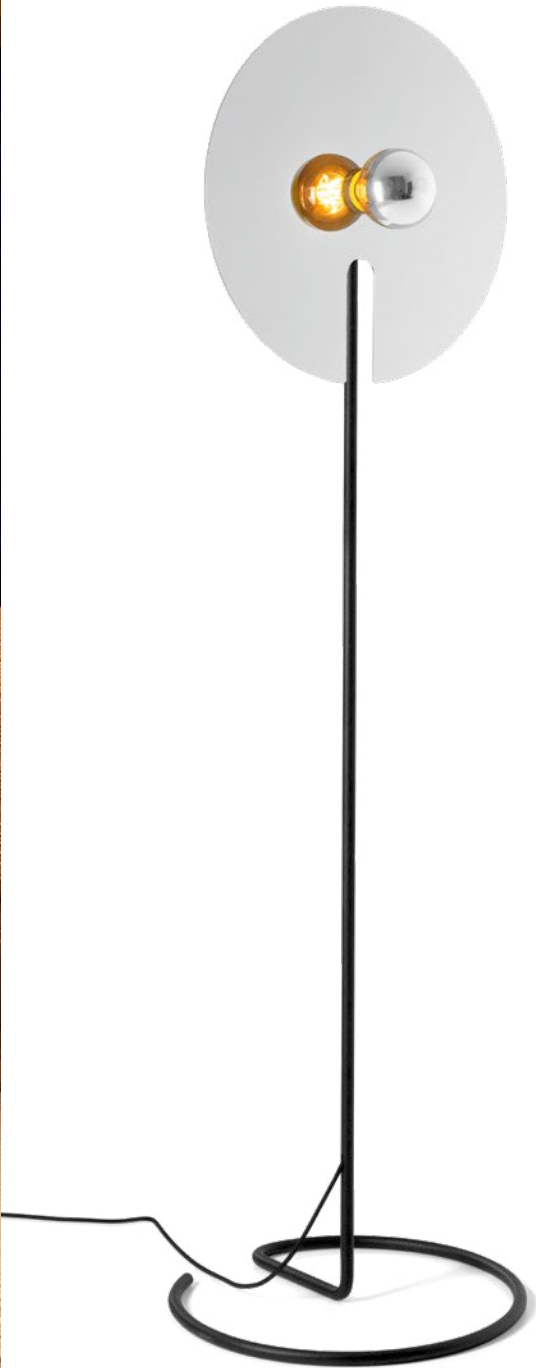

13&9 DESIGN

MIRRO

FLOOR SURFACE



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.30kg

CODE	
	6311EOGB0
	6311EONB0
	6311EOLB0


OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.70kg

CODE	
	6312EOGB0
	6312EONB0
	6312EOLB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror


CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157




PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

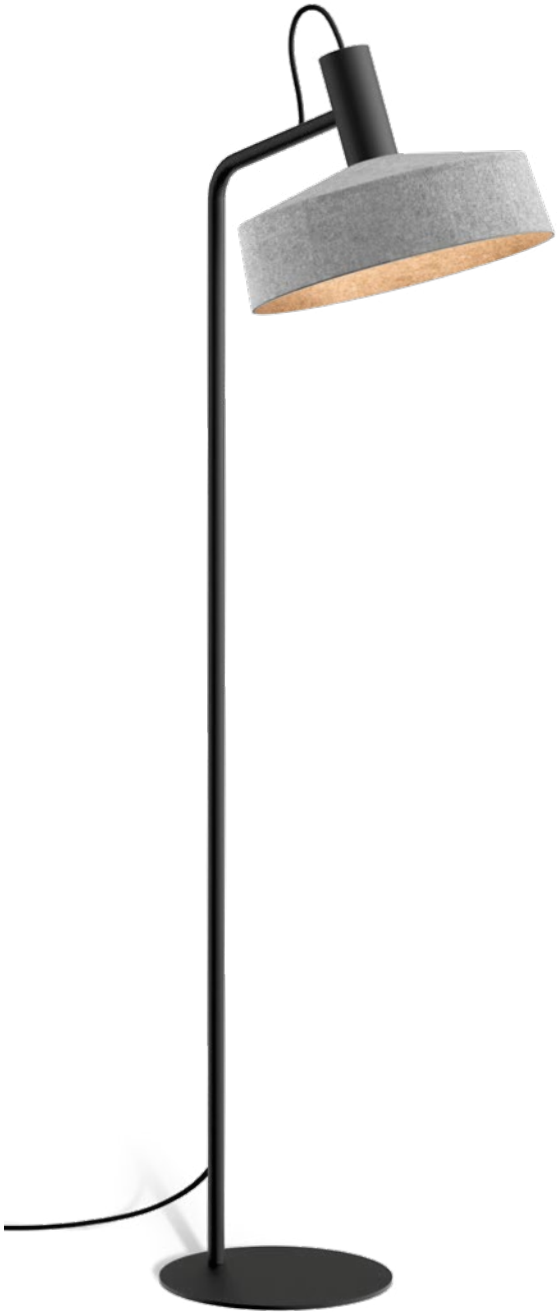

3H DRAFT

ROOMOR
FLOOR SURFACE



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

⊕ IP20 0°-45°|0°-30° 6.05kg|5.90kg


	CODE
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 743



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

⊕ IP20 0°-45°|0°-30° 6.54kg|6.39kg

	CODE
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 437lm	901228B3
3000K 457lm	901228B5

more lamps and specs on page 743



**OUT
DOOR**

CEILING RECESSED

592 — 599



CEILING
RECESSED



DEEP BIJOU IP65
595



DEEP IP65
595





TAIO IP65
597



INTRA
599




back

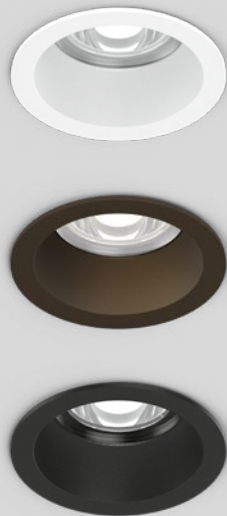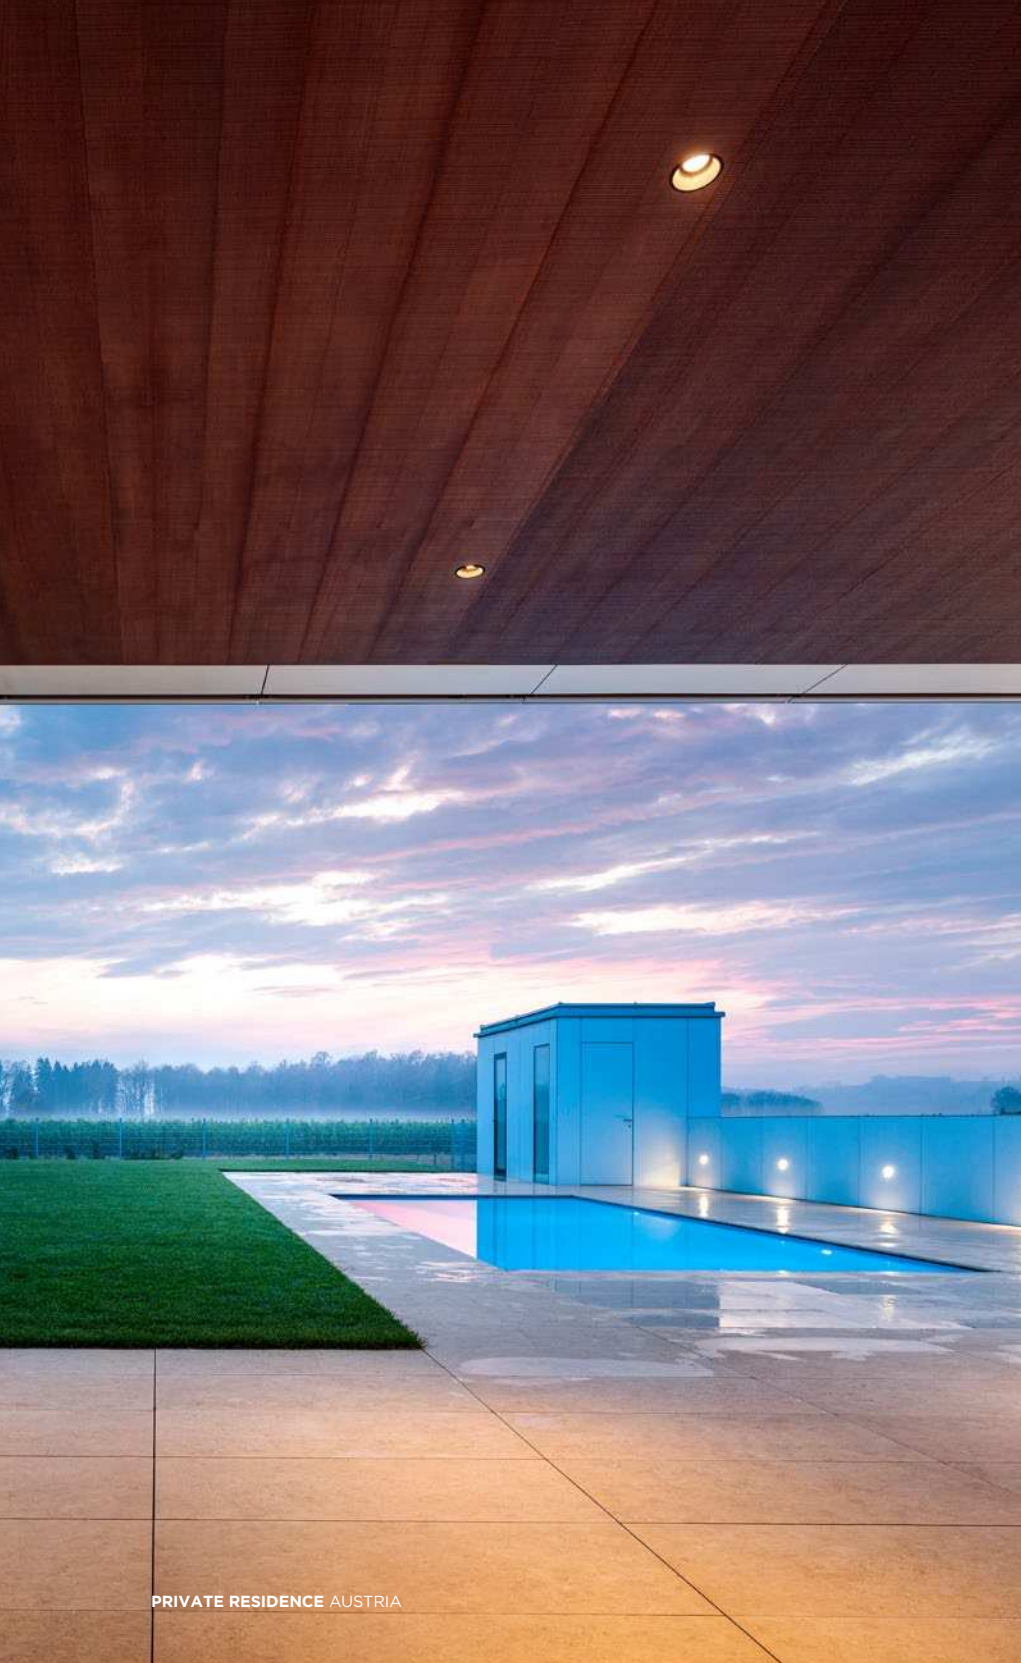

DEEP bijou IP65 | DEEP IP65

OUTDOOR
CEILING RECESSED



1.0 BIJOU

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

CODE	
165361W_	
165361Q_	
165361B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 80 min 4

CODE	
184161W_	
184161B_	

blade springs 86-89 80 min 4

CODE	
184161W_C	
184161B_C	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | IP67

CODE	
7W 500mA	90214301


more options and specs on page 737

ALWAYS USE

driver | IP68

CODE	
17W 350mA	90213602
24W 500mA	90214702

more options and specs on page 737





TAIO IP65

OUTDOOR
CEILING RECESSED



123



229



1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 | 105° | SDCM2 | L80/50K | 0.13kg

wire springs | 70 | 70 | 4-27

	CODE
	180781W_
	180781G_
	180781B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	340/455 >90	3
3000K	370/495 >90	5

ALWAYS USE

driver | IP68

	CODE
17W 350mA	90213602
24W 500mA	90214702

more options and specs on page 737



back




PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA



INTRA

OUTDOOR
CEILING RECESSED



1.0 OPAL


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 SDCM2 L70|60K 0.15kg

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

CODE	
	733188W5
	733188A5
	733188B5



2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 45° SDCM3 L70|50K 0.15kg

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

CODE	
	733268W5
	733268A5
	733268B5

CEILING SURFACE

600 – 621

CEILING SURFACE SPOTLIGHTS



TRAM
603



TUBE
605



TAIO
607



RAY
609



TRAIN
611



TUBE CARRÉ
613



BOX
615

CEILING SURFACE LUMINAIRES



ROB
619



BLAS 1.0
621



BLAS 2.0
621

back



PRIVATE RESIDENCE BELGIUM



TRAM
OUTDOOR
CEILING SURFACE




1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 560lm

CODE	
	747768W5
	747768A5
	747768Q5
	747768B5

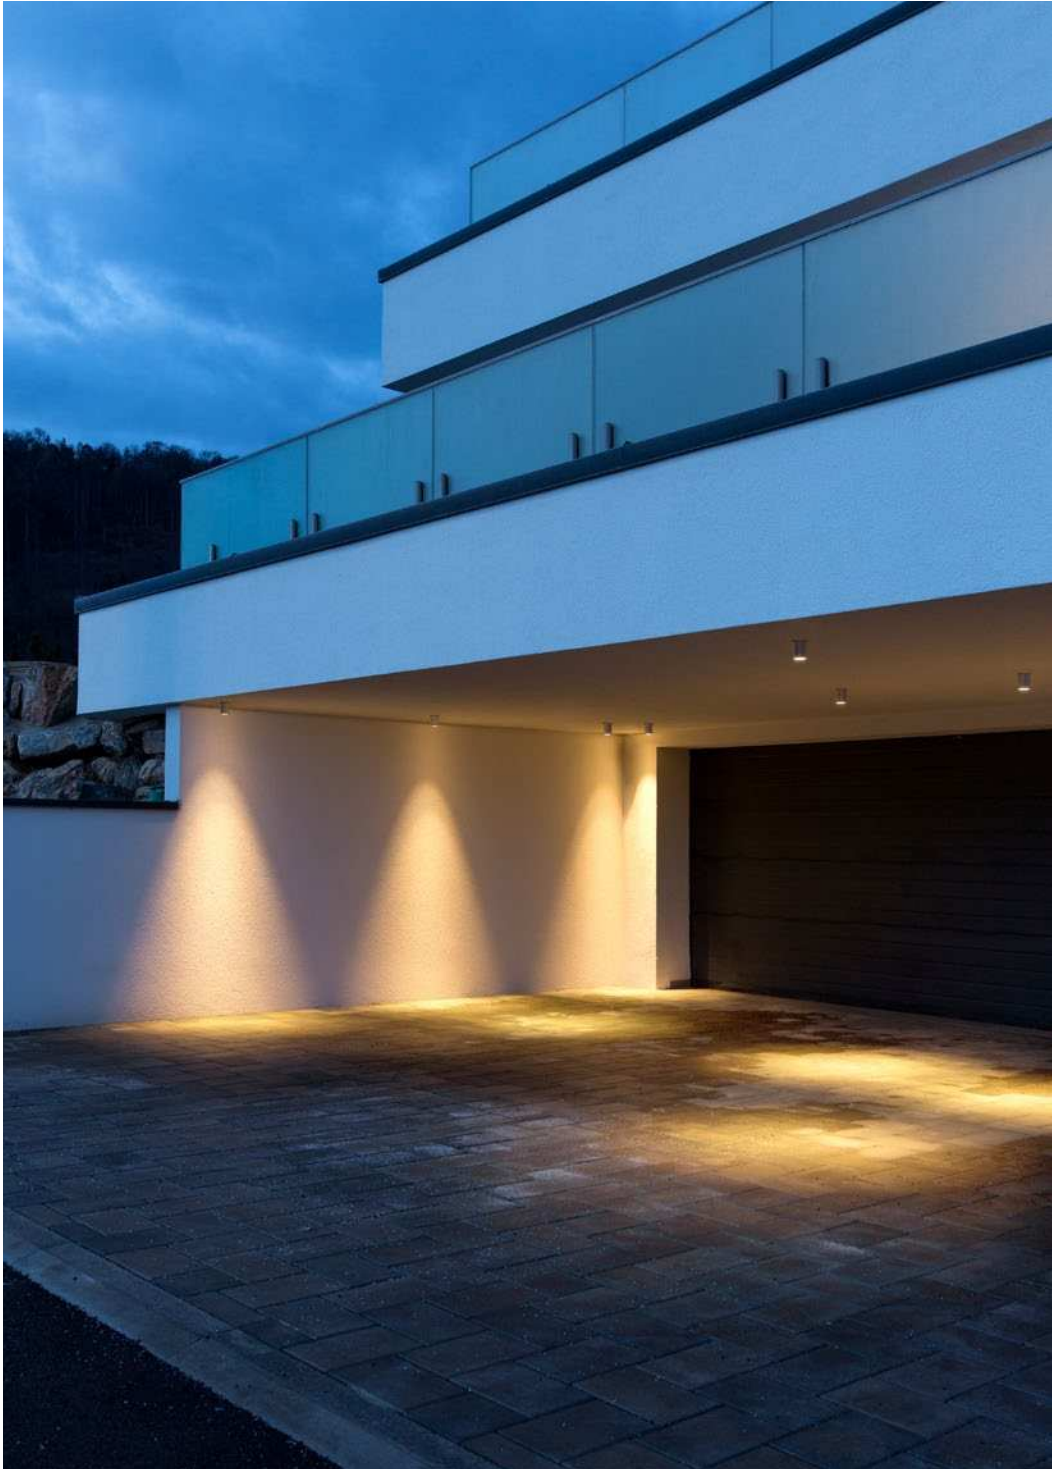

PRIVATE RESIDENCE AUSTRIA



TUBE
OUTDOOR
CEILING SURFACE



1.0 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

⊕ IP65 ⚡ 36° SDCM3 L80|60K 0.56kg

3000K | >90 CRI | 629lm

	CODE
	734364W5
	734364D5
	734364A5
	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 0.49kg

	CODE
	734120W0
	734120D0
	734120A0
	734120Q0
	734120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
 2700K 350lm	905227S2
 3000K 350lm	905227S4

more lamps and specs on page 743



PRIVATE RESIDENCE BELGIUM




TAIO
OUTDOOR
CEILING SURFACE



123



229



1.0

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.53kg

CODE	
180884W	
180884A	
180884Q	
180884B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5




597



641



641

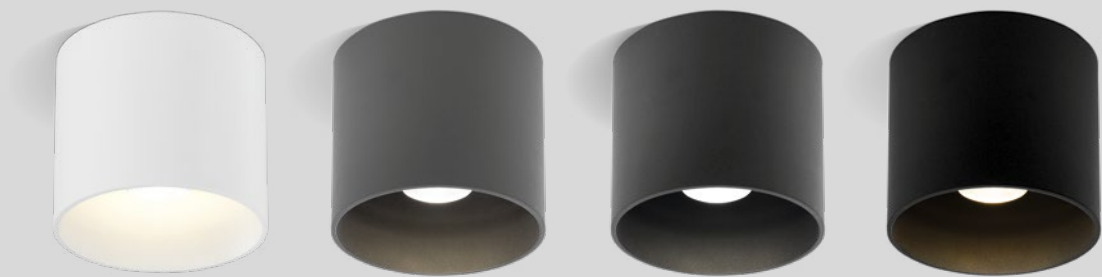

RAY
OUTDOOR
CEILING SURFACE



161




257 | 289 | 303



331



465



1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 21° SDCM2 L70|50K 0.63kg



cover


OPTIONAL

inner cover


	CODE
	911041W1
	911041D1
	911041A1
	911041B1

	CODE
	735458W_
	735458D_
	735458A_
	735458B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K	470 >90	9

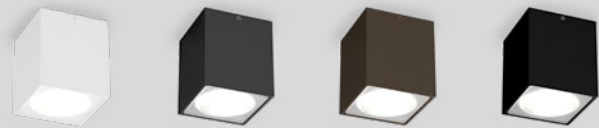

TRAIN
OUTDOOR
CEILING SURFACE



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ⚡ 36° SDCM3 L70|50K 0.26kg



3000K | >90 CRI | 570lm

	CODE
	718668W5
	718668A5
	718668Q5
	718668B5



TUBE CARRÉ

OUTDOOR
CEILING SURFACE



1.0 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 629lm

CODE	
	734464W5
	734464D5
	734464A5
	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

CODE	
	734220W0
	734220D0
	734220A0
	734220Q0
	734220B0

OPTIONAL


PAR16 4.3W | GU10

CODE	
	2700K 350lm 905227S2
	3000K 350lm 905227S4

more lamps and specs on page 743



PRIVATE RESIDENCE FRANCE

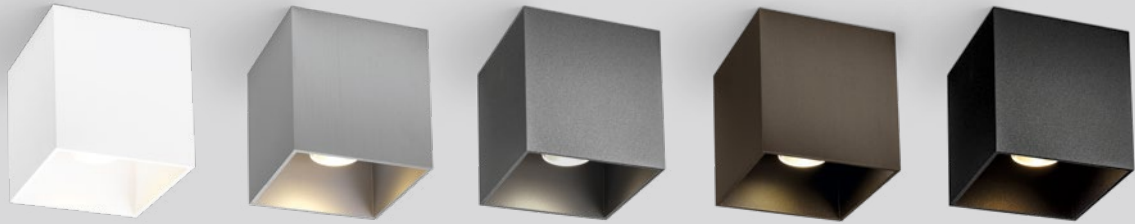

BOX
OUTDOOR
CEILING SURFACE



143




251



323



453



reflector



cover

OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 21° SDCM2 L70|50K 0.67kg

	CODE
	735258W_
	735258D_
	735258A_
	735258Q_
	735258B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K	470 >90	9






PRIVATE RESIDENCE BELGIUM



ROB
OUTDOOR
CEILING SURFACE



233




1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

CODE			
701188W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	1200 >90	3	
3000K	1230 >90	5	




2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

CODE			
701288W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	1850 >90	3	
3000K	1900 >90	5	



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover



IP44 SDCM2 L80|60K 1.90kg

CODE			
701388W_			
LIGHT COLOUR	LUMEN CRI	CODE	
2700K	3535 >90	3	
3000K	3620 >90	5	



BLAS

OUTDOOR
CEILING SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

CODE

	736387W4
	736387B4

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

CODE

	736487W4
	736487B4



clear + frosted
glass

WALL RECESSED

622 – 631


WALL RECESSED



RETO 0.8
625



RETO 1.3
625



RETO 2.0
627



ORIS 0.7
629



ORIS 2.0
629



ORIS 0.8
631



ORIS 1.3
631

back



RETO

OUTDOOR
WALL RECESSED

60

60

30

16

80

110

110

30

16

130

0.8

LED PCB 3W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.27kg

66x66 40 min. 12

3000K | >90 CRI | 80lm

	CODE
	7451A2A5
	7451A2Q5
	7451A2B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748

1.3

LED PCB 5W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.43kg

115x117 40 min. 12

3000K | >90 CRI | 160lm

	CODE
	7452A2A5
	7452A2Q5
	7452A2B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041


concrete housing

	CODE
	90012040


specs on page 748

back

WEVER & DUCRÉ 624 — 625

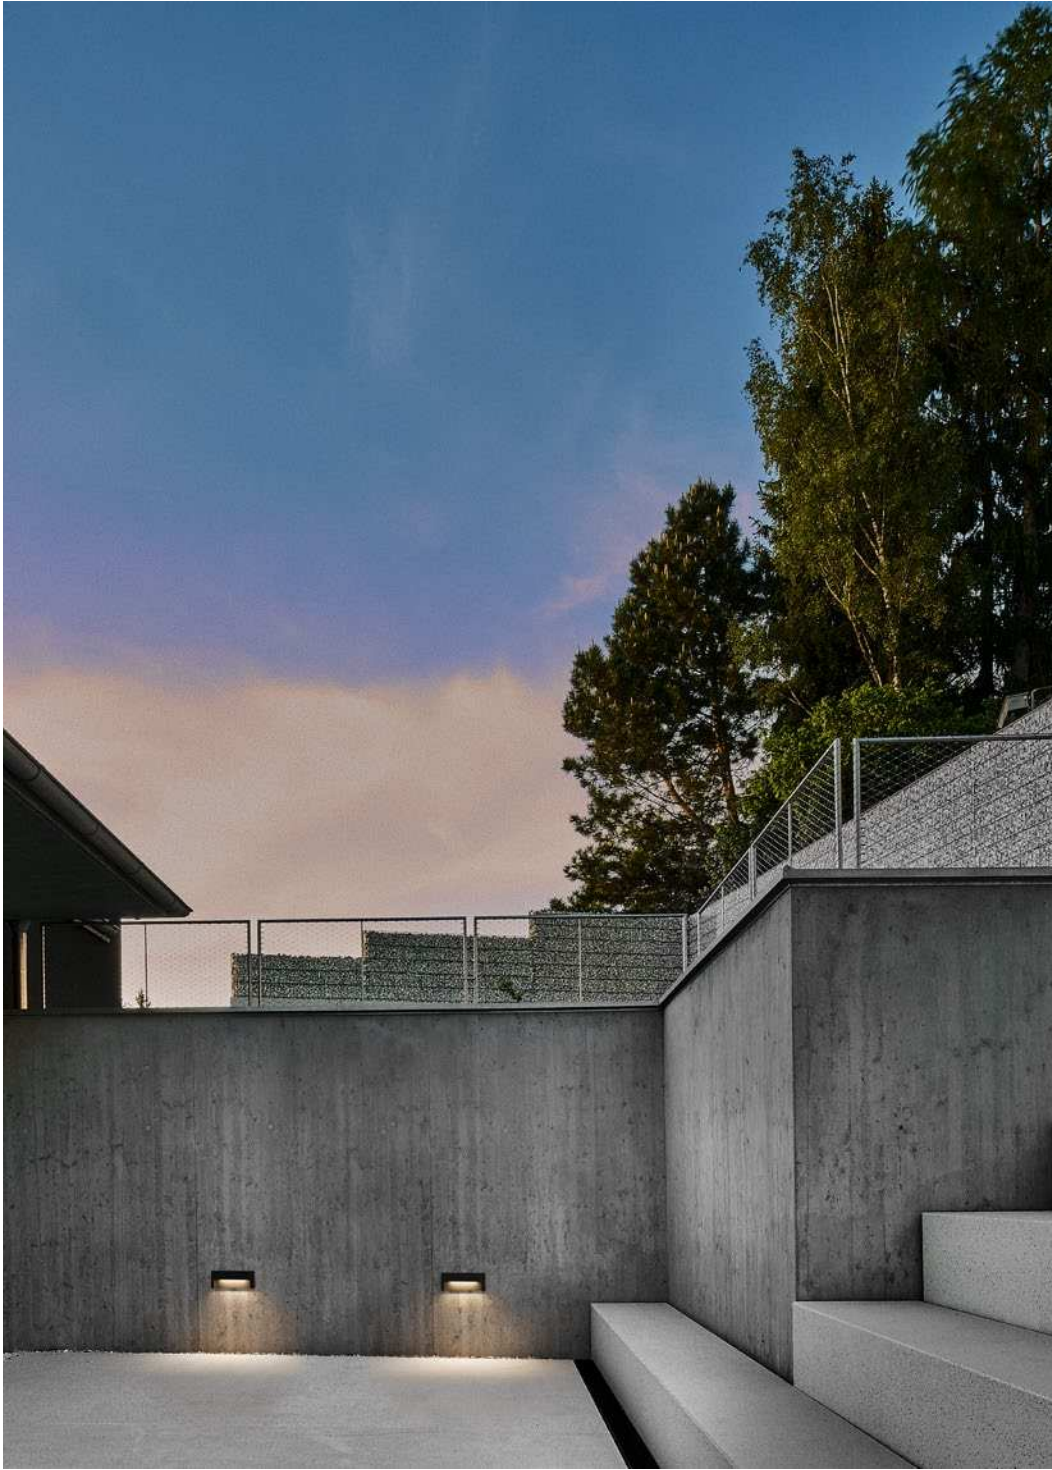


PRIVATE RESIDENCE AUSTRIA

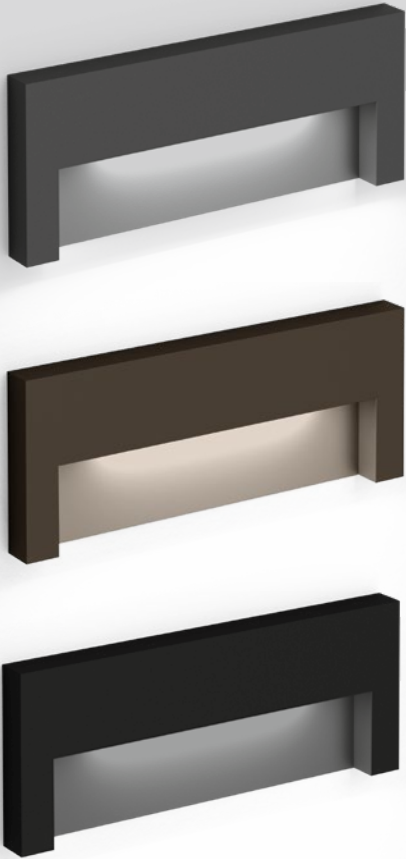

RETO

OUTDOOR
WALL RECESSED



2.0

LED PCB 7W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.41kg

47x182 40 min. 12

3000K | >90 CRI | 330lm

	CODE
	7453A2A5
	7453A2Q5
	7453A2B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 740

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing


	CODE
	90012044

specs on page 748



ORIS

OUTDOOR
WALL RECESSED



0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.28kg

47x182 40 min. 12

3000K | >90 CRI | 70/115lm

	CODE
	7091A1W5
	7091A1D5
	7091A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 736

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 748



2.0

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.42kg

115x185 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	7097A1W5
	7097A1D5
	7097A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042



specs on page 748



PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA | LIGHTVOLUTION SPAIN

ORIS

OUTDOOR
WALL RECESSED



0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.16kg

66x66 40 min. 12

3000K | >90 CRI | 90/140lm

	CODE
	7094A1W5
	7094A1A5
	7094A1Q5
	7094A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 748

1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70/60K 0.34kg

115x117 40 min. 12

3000K | >90 CRI | 140/220lm

	CODE
	7096A1W5
	7096A1D5
	7096A1A5
	7096A1Q5
	7096A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 748

WALL SURFACE

632 — 679

WALL
SURFACE
SPOTLIGHTS



TRAM
635



TUBE 1.0
637



TUBE 2.0
639



TAIO
641



RAY
643



TRAIN
645

NEW



KIOSK
647



CENTRAL
649



STATION
651



TUBE CARRÉ 1.0
653



TUBE CARRÉ 2.0
655



BOX 1.0
659



BOX 3.0
663



BOXX
665

NEW



X-BEAM ROUND
667



X-BEAM
667

WALL
SURFACE
LUMINAIRES



RETO
669



PALOS 1.0
671




PALOS 2.0
671



PALOS 3.0
671



BLAS
673



GETTON 2.0
675



GETTON 3.0
675



TAPE
677






SWAM
679





PRIVATE RESIDENCE AUSTRIA

TRAM
OUTDOOR
WALL SURFACE

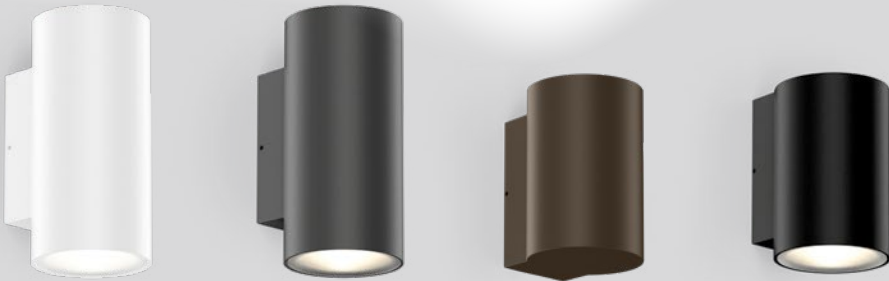

1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.25kg

3000K | >90 CRI | 560lm

CODE	
	747568W5
	747568A5
	747568Q5
	747568B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.30kg




3000K | >90 CRI | 2x360lm

CODE	
	747668W5
	747668A5
	747668Q5
	747668B5



HOTEL VALAMAR GIRANDELLA & TUI RESORT | STUDIO 92 RABAC | CROATIA

TUBE
OUTDOOR
WALL SURFACE

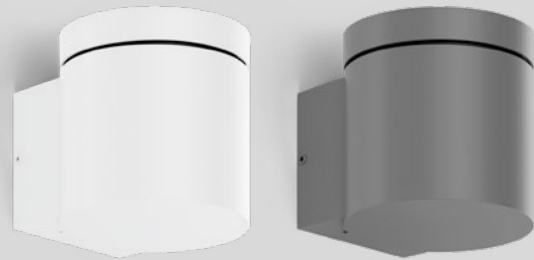

1.0 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.53kg

3000K | >90 CRI | 629lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 743





back



TUBE

OUTDOOR
WALL SURFACE






2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.88kg

3000K | >90 CRI | 2x629lm



2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

CODE	CODE
711464W5	711220W0
711464D5	711220D0
711464A5	711220A0
711464B5	711220Q0
	711220B0

OPTIONAL

PAR16 4.3W | GU10

CODE	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 743



PRIVATE RESIDENCE L GC ARCHITECTEN BELGIUM

TAIO

OUTDOOR
WALL SURFACE



1.0

 LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

 IP65  105° SDCM2 L80|50K 0.49kg

CODE	
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	460 >90	5

2.0

 2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass



 IP65  105° SDCM2 L80|50K 0.85kg

CODE	
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x430 >90	3
3000K	2x460 >90	5



RAY
OUTDOOR
WALL SURFACE

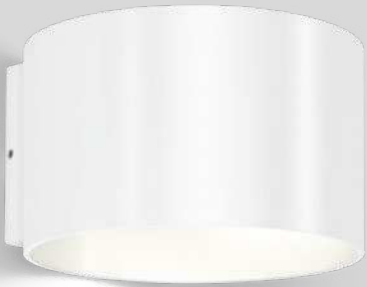

1.0


LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

CODE			
	749168W_		
	749168B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5



2.0

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

CODE			
	749148W_		
	749148B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5



3.0


LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

CODE			
	749268W_		
	749268B_		

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	260 >90	3
3000K	280 >90	5



4.0

LED 2x LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

CODE			
	749248W_		
	749248B_		





incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5



TRAIN

OUTDOOR
WALL SURFACE



1.0 NARROW

LED LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up or narrow down lens

⊕ IP65 ∠ 55°x5° SDCM3 L70|60K 0.24kg

3000K | >80 CRI | 170lm

	CODE
	718143A4
	718143B4

2.0 NARROW

LED 2x LED PCB 3W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up | narrow down lens

⊕ IP65 ∠ 55°x5° SDCM3 L70|60K 0.35kg

3000K | >80 CRI | 2x110lm

	CODE
	718243A4
	718243B4

1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ∠ 38° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 570lm

	CODE
	718868W5
	718868A5
	718868B5



2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

⊕ IP65 ∠ 38° SDCM3 L70|50K 0.35kg

3000K | >90 CRI | 2x360lm

	CODE
	718968W5
	718968A5
	718968B5

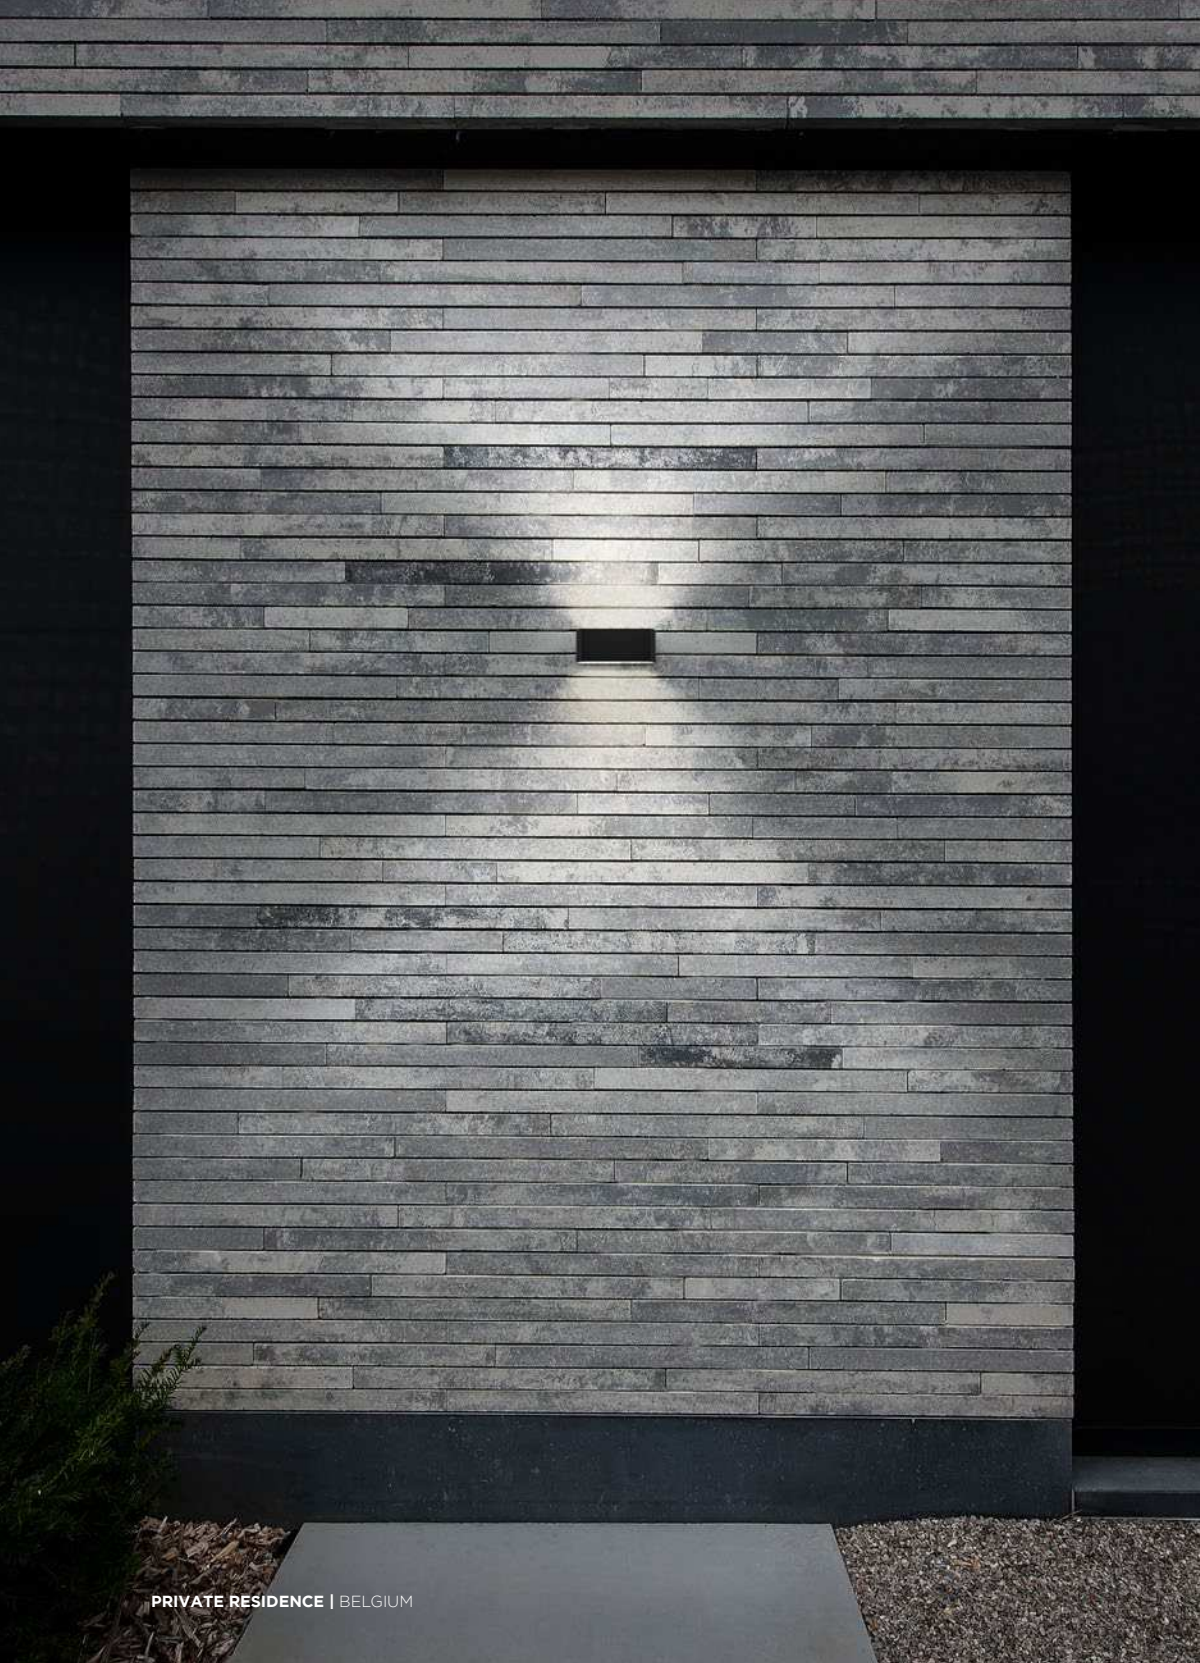

1.0

LED 2x LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 110° SDCM3 L80/50K 0.49kg

		CODE
		707174W
		707174A
		707174Q
		707174B



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x450 >80	2
3000K	2x500 >80	4





CENTRAL

OUTDOOR
WALL SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.58kg

3000K | >90 CRI | 620lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.52kg



3000K | >90 CRI | 2x340lm

	CODE
	313874W5
	313874A5
	313874Q5
	313874B5



STATION

OUTDOOR
WALL SURFACE



1.0

 LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80/60K 0.54kg

3000K | >90 CRI | 590lm

	CODE
	314774A5
	314774B5

2.0

 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

 IP65 SDCM3 L80/60K 0.52kg




3000K | >90 CRI | 2x320lm

	CODE
	314874A5
	314874B5



TUBE CARRÉ

OUTDOOR
WALL SURFACE

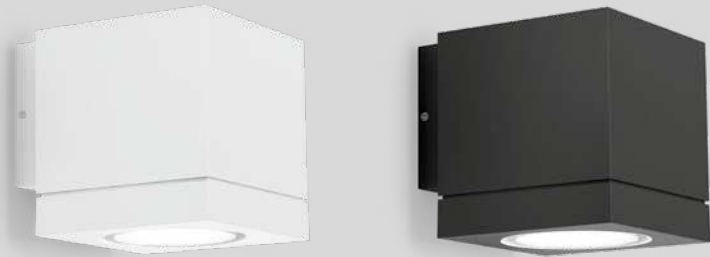

1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 0.71kg

3000K | >90 CRI | 629lm

	CODE
White	744364W5
Grey	744364D5
Dark Grey	744364A5
Black	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.64kg

	CODE
White	744120W0
Grey	744120D0
Dark Grey	744120A0
Black	744120Q0
Black	744120B0

OPTIONAL



PAR16 4.3W | GU10

	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 743



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA






2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80I60K 1.13kg

3000K | >90 CRI | 2x629lm



2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.94kg

	CODE
	744220W0
	744220D0
	744220A0
	744220Q0
	744220B0

OPTIONAL

PAR16 4.3W | GU10





	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4

more lamps and specs on page 743



PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM



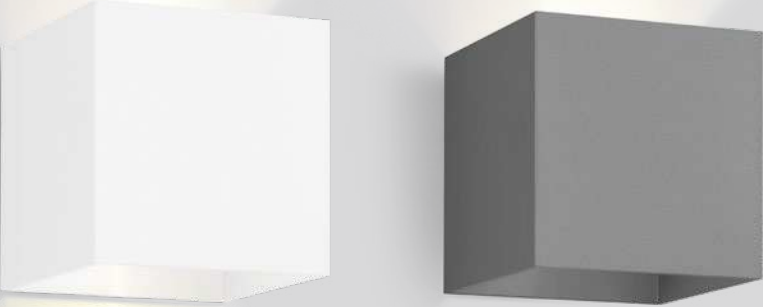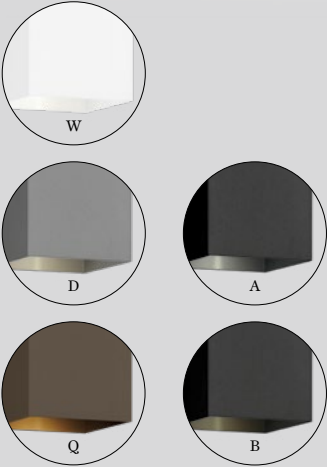

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.60kg

	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5

2.0

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.66kg

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5

BOX
OUTDOOR
WALL SURFACE



143



251



323



453



615









BOX


OUTDOOR
WALL SURFACE



3.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.67kg



	CODE
	748268W_
	748268D_
	748268Q_
	748268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	260 >90	3
3000K	280 >90	5

4.0

2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

	CODE
	748248W_
	748248D_
	748248Q_
	748248B_

incl. adjustable flaps



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5



PRIVATE RESIDENCE | REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE

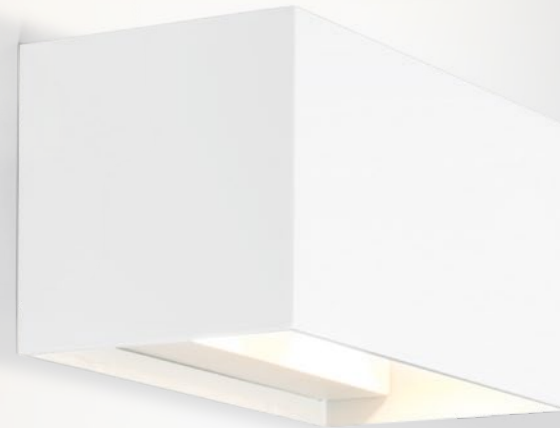

1.0

2x2x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.93kg

CODE

739174W_

739174B_



incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x2x235 >90	3
3000K	2x2x245 >90	5

back



X-BEAM
OUTDOOR
WALL SURFACE




OPTIONAL

snoot
CODE
90019023

snoot round
CODE
90019031

specs on page 755




1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80/60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4



1.0 ROUND

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80/60K 1.30kg

3000K | >80 CRI | 1600lm



	CODE
	700474Q4
	700474A4
	700474B4





RETO

OUTDOOR
WALL SURFACE

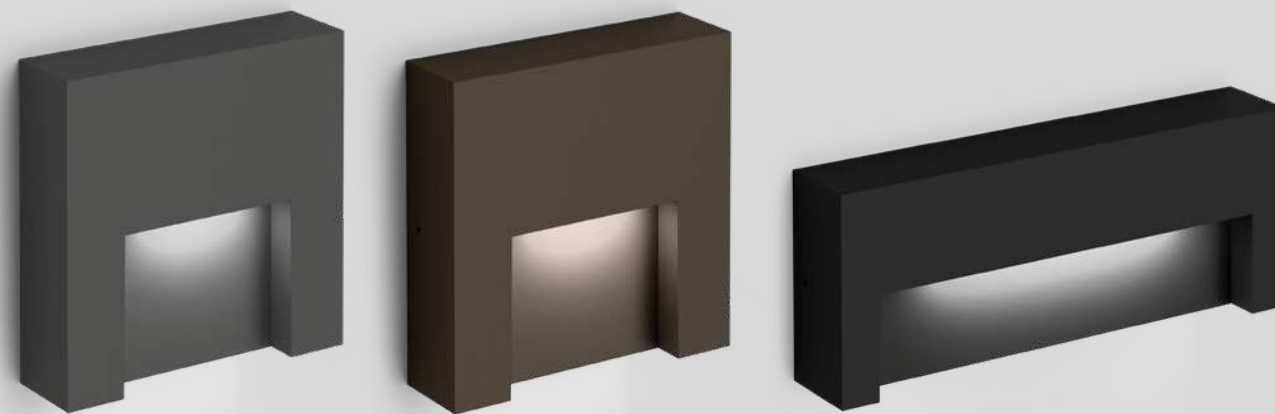


1.3

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.62kg

3000K | >90 CRI | 140lm

CODE	
	7455A4A5
	7455A4Q5
	7455A4B5



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP65 SDCM3 L80|50K 0.58kg

3000K | >90 CRI | 340lm

CODE	
	7456A4A5
	7456A4Q5
	7456A4B5




PALOS
OUTDOOR
WALL SURFACE



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated


IP65 SDCM3 L80|60K 0.86kg



2.0

2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.10kg



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.75kg

CODE			
	4161A4A_		
	4161A4Q_		
	4161A4B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

CODE			
	4162A4A_		
	4162A4Q_		
	4162A4B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4



CODE			
	4163A4A_		
	4163A4Q_		
	4163A4B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >80	2
3000K	770 >80	4





BLAS
OUTDOOR
WALL SURFACE



621

1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

	CODE
	736387W4
	736387B4

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

	CODE
	736487W4
	736487B4




clear + frosted
glass



PRIVATE RESIDENCE AUSTRIA

GETTON
OUTDOOR
WALL SURFACE

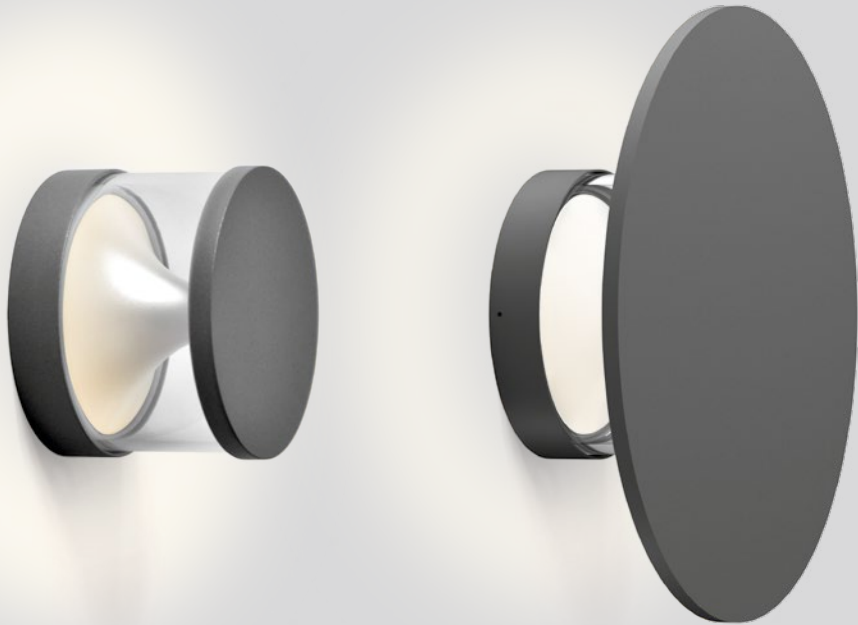

2.0


LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80/60K 0.83kg

3000K | >80 CRI | 755lm

CODE

717374A4



3.0

LED LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80/60K 1.69kg

3000K | >80 CRI | 755lm

CODE

717774A4





PRIVATE RESIDENCE AUSTRIA

TAPE

OUTDOOR
WALL SURFACE

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80l60K 0.73kg

3000K | >90 CRI | 420lm

	CODE
	722174W5
	722174D5
	722174A5
	722174B5

back



WEVER & DUCRÉ 676 – 677

701



SWAM

OUTDOOR
WALL SURFACE




1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80I60K 0.95kg

2700K | >90 CRI | 410lm

CODE	
	746278Q3
	746278K3
	746278B3



2.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80I60K 0.95kg

2700K | >90 CRI | 670lm

CODE	
	746378Q3
	746378K3
	746378B3



FLOOR RECESSED

680 — 695

FLOOR
RECESSED

NEW



CARD 0.1
683



CARD 0.2
683



BLINK
685



MAP
687



MAP ASYM
691



CHART
693



CHART ASYM
695





CARD

OUTDOOR
FLOOR RECESSED



0.1

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.05kg

22-24 60

3000K | >80 CRI | 90lm


	CODE
	750141I4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101

more options and specs on page 736



0.2

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.06kg

22-24 60

3000K | >80 CRI | 90lm

	CODE
	750241I4

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101


more options and specs on page 736





BLINK

OUTDOOR FLOOR RECESSED



1.0 TRIM

 LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated | glass

 IP65 IK08  32° SDCM2 L80I50K 0.65kg

 50-52  80

3000K | >80 CRI | 495lm

	CODE
	721161B4

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 737

OPTIONAL

recessed ground housing

	CODE
	90012207

more options and specs on page 749



1.0 TRIMLESS

 LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated | glass

 IP65 IK08  32° SDCM2 L80I50K 0.70kg

 50-52  82

3000K | >80 CRI | 495lm

	CODE
	721261B4

ALWAYS USE

driver | 500mA

	CODE
7W dim	90224301
7W IP67	90214301

more options and specs on page 737

OPTIONAL

recessed ground housing

	CODE
	90012207

more options and specs on page 749






PRIVATE RESIDENCE | ARTIO STUDIO/MARTA DE LOZOYA | LIGHTVOLUTION SPAIN

MAP

OUTDOOR
FLOOR RECESSED



0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 43° SDCM2 L70|50K 0.38kg

38-40 100

3000K | >90 CRI | 310lm


CODE
751168I5

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 749



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >90 CRI | 660lm

CODE
751268I5

OPTIONAL

recessed ground housing

CODE
90012202


more options and specs on page 749





MAP

OUTDOOR
FLOOR RECESSED



1.2


LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.01kg

72-74 120

3000K | >90 CRI | 995lm

CODE
751368I5



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 38° SDCM2 L70|50K 1.43kg

91-93 185

3000K | >90 CRI | 1025lm

CODE
751468I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749





PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70I50K 1.06kg

72-74 160

3000K | >90 CRI | 720lm

CODE
7515A8I5



1.6

LED LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70I50K 1.72kg

91-93 185

3000K | >90 CRI | 850lm

CODE
7516A8I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749


OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749



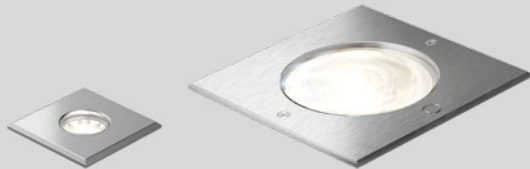

CHART

OUTDOOR FLOOR RECESSED



0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 43° SDCM2 L70|50K 0.39kg

38-40 118

3000K | >90 CRI | 310lm


CODE
752168I5

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 749



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >90 CRI | 660lm


CODE
752268I5

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 749



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.05kg

72-74 175

3000K | >90 CRI | 995lm


CODE
752368I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 38° SDCM2 L70|50K 1.45kg

91-93 185

3000K | >90 CRI | 1025lm

CODE
752468I5

OPTIONAL

recessed ground housing


CODE
90012204

more options and specs on page 749



CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.10kg

72-74 160

3000K | >90 CRI | 720lm


CODE
7525A8I5

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 749



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.83kg

91-93 185

3000K | >90 CRI | 850lm

CODE
7526A8I5

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 749



FLOOR SURFACE

696 — 729

FLOOR SURFACE LUMINAIRES



NEW

KIOSK 1.1
699



NEW

KIOSK 1.2
699



NEW

KIOSK 1.3
699



TAPE
701



SWAM
703



SWAM
703

FLOOR SURFACE PROJECTORS



STIPO 1.0
707



STIPO 4.0
707



STAKE
709



STAKE FOLD
709



X-BEAM ROUND
711

NEW



X-BEAM
711

FLOOR SURFACE BOLLARDS



LINUS
713



PALOS ROUND
715



PALOS CARRÉ
717



FIFTY FIFTY
719



SWAY
721



GETTON
723

FLOOR SURFACE BATTERY LUMINAIRES



COSTA 1.0
725



COSTA 1.0
725




COSTA 2.0
727



COSTA 2.0
727

back

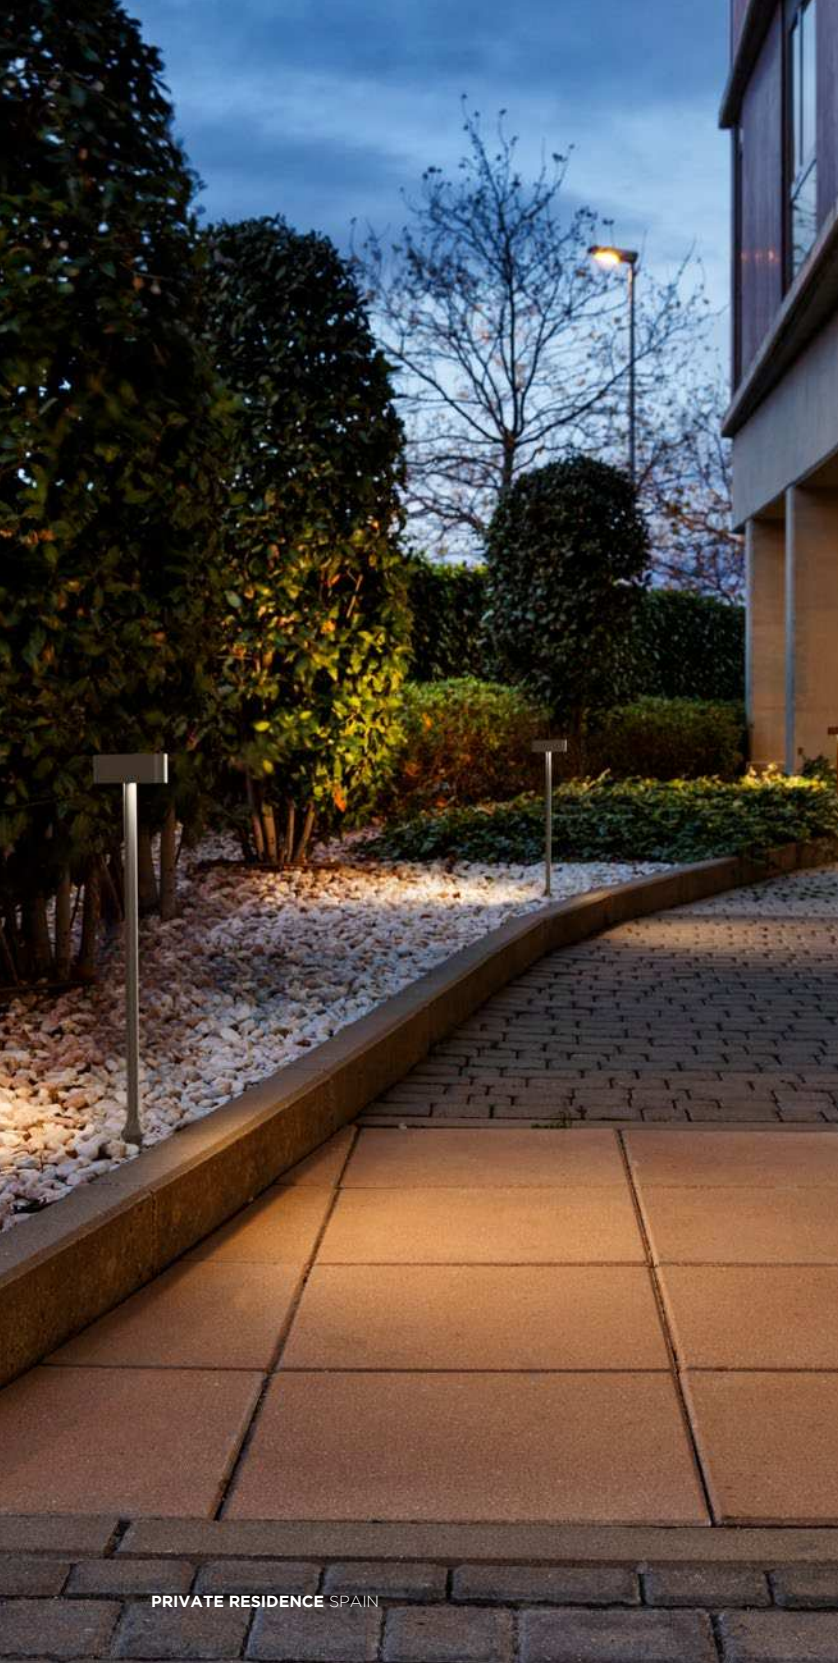

PRIVATE RESIDENCE SPAIN



KIOSK

FLOOR SURFACE



1.1

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.26kg

3000K | >80 CRI | 330lm

CODE	
	7072A4A4
	7072A4Q4

ALWAYS USE

pole | incl. ground spike

CODE	
400	910101_0
600	910102_0
800	910103_0

CODE	
	A
	Q


order fixation separately

OPTIONAL

ground fixation plate

CODE	
	90019019

specs on page 756



1.2

2x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.43kg

3000K | >80 CRI | 2x330lm

CODE	
	7073A4A4
	7073A4Q4

ALWAYS USE

pole | incl. ground spike

CODE	
400	910101_0
600	910102_0
800	910103_0

CODE	
	A
	Q


order fixation separately

OPTIONAL

ground fixation plate

CODE	
	90019019

specs on page 756



1.3

3x LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/50K 0.52kg

3000K | >80 CRI | 3x330lm

CODE	
	7074A4A4
	7074A4Q4

ALWAYS USE

pole | incl. ground spike

CODE	
400	910101_0
600	910102_0
800	910103_0

CODE	
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

CODE	
	90019019

specs on page 756






647





TAPE
OUTDOOR
FLOOR SURFACE



		
4.0	6.0	8.0
 LED COB 8W phase-cut dim 220-240VAC 50-60Hz incl. driver aluminium powder coated	 LED COB 8W phase-cut dim 220-240VAC 50-60Hz incl. driver aluminium powder coated	 LED COB 8W phase-cut dim 220-240VAC 50-60Hz incl. driver aluminium powder coated
 IP65 SDCM2 L80 60K 1.82kg	 IP65 SDCM2 L80 60K 2.42kg	 IP65 SDCM2 L80 60K 3.12kg
3000K >90 CRI 420lm	3000K >90 CRI 420lm	3000K >90 CRI 420lm
 CODE 722274D5	 CODE 722374D5	 CODE 722474D5
OPTIONAL ground spike	OPTIONAL ground spike	OPTIONAL ground spike
 CODE 90013102 specs on page 759	 CODE 90013102 specs on page 759	 CODE 90013102 specs on page 759






PRIVATE RESIDENCE | T'IN-LIJN INTERIEURARCHITECTUUR BELGIUM



SWAM

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

2700K | >90 CRI | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CODE
400	910090_0
600	910091_0
800	910092_0

	CODE
	B
	Q


order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L80|60K 0.97kg

2700K | >90 CRI | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093_0
600	910094_0
800	910095_0

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 756



HOTEL BRITANNIA | S-CONSULTANCY KNOCKE-HEIST | BELGIUM






SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA



STIPO
OUTDOOR
FLOOR PROJECTOR




1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.59kg

3000K | >90 CRI | 450lm

	CODE
	737168A5
	737168Q5




2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.56kg

3000K | >90 CRI | 500lm

	CODE
	737268A5
	737268Q5



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.53kg

3000K | >90 CRI | 450lm

	CODE
	737368A5
	737368Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758

OPTIONAL

ground spike

	CODE
	90013106


specs on page 758

OPTIONAL

ground spike

	CODE
	90013106

specs on page 758



4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.52kg

3000K | >90 CRI | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike


	CODE
	90013106

specs on page 758



STAKE | STAKE FOLD

OUTDOOR
FLOOR PROJECTOR




1.0 STAKE

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.53kg

3000K | >90 CRI | 590lm

	CODE
	727174A5
	727174B5



1.0 STAKE FOLD

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.79kg

3000K | >90 CRI | 590lm

	CODE
	727274A5
	727274B5

OPTIONAL

ground spike

	CODE
	90013106

snoot

	CODE
	90019004

specs on page 755 | 758

OPTIONAL

ground spike

	CODE
	90013107

snoot

	CODE
	90019004

specs on page 755 | 758



PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN



X-BEAM
OUTDOOR
FLOOR PROJECTOR



OPTIONAL

ground spike



snoot



snoot round



specs on page 759 | 755





1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4





1.0 ROUND

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.30kg


3000K | >80 CRI | 1600lm

	CODE
	700474Q4
	700474A4
	700474B4

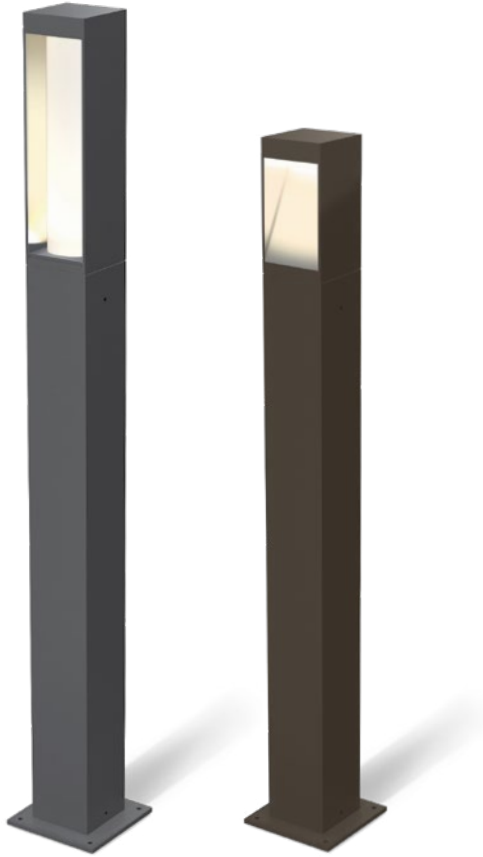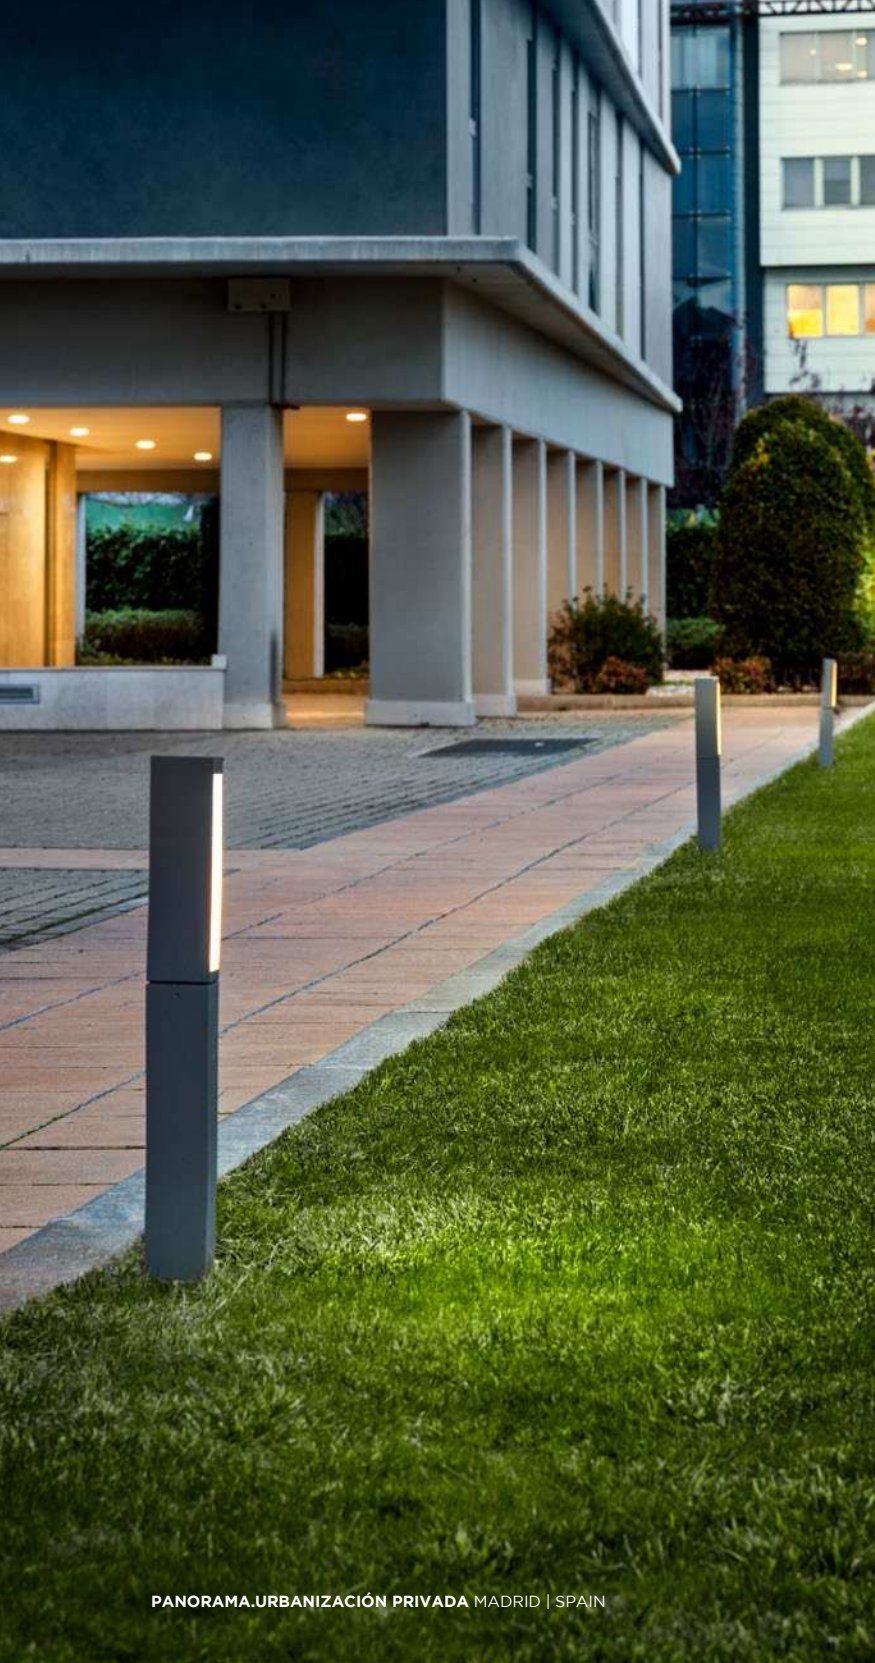

OPTIONAL

ground spike	CODE	
	150	910024_0
	350	910026_0
ground fixation	CODE	
	150	910024_0
	350	910026_0
specs on page 758	CODE	
	150	910024_0
	350	910026_0



1.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 1.12kg

3000K | >90 CRI | 230lm


CODE	
	726178D5
	726178A5
	726178Q5

ALWAYS USE

pole	
CODE	
150	910024_0
350	910026_0
550	910028_0

CODE	
	D
	A
	Q

order spike or fixation separately



2.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
PMMA diffuser

IP65 SDCM2 L70|50K 1.10kg

3000K | >90 CRI | 230lm


CODE	
	726288D5
	726288A5
	726288Q5

ALWAYS USE

pole	
CODE	
150	910024_0
350	910026_0
550	910028_0

CODE	
	D
	A
	Q

order spike or fixation separately



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 0.69kg

3000K | >90 CRI | 230lm

CODE	
	726378D5
	726378A5
	726378Q5

ALWAYS USE

pole	
CODE	
150	910024_0
350	910026_0
550	910028_0

CODE	
	D
	A
	Q

order spike or fixation separately



PALOS ROUND

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.70kg

	CODE
	4166A4A
	4166A4Q
	4166A4B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.70kg

	CODE
	4166A4A
	4166A4Q
	4166A4B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605	>80	2
3000K	650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 1.16kg

	CODE
	4167A4A
	4167A4Q
	4167A4B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 1.16kg

	CODE
	4167A4A
	4167A4Q
	4167A4B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x605	>80	2
3000K	2x650	>80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B




URBANIZACIÓN SANTA ÀGUEDA | ALONSO + SOSA ARCHITECTS | RAFAEL GAVIRA Y EMILIO PELLEJERO
LAS PALMAS | SPAIN



PALOS CARRÉ

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

2x LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80/60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B




671





FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80I60K 1.23kg


3000K | >80 CRI | 310lm

CODE	
	756174A4

ALWAYS USE

pole with fixation plate

CODE	
170	910013A0
270	910014A0
470	910016A0
670	910018A0
870	910010A0



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80I60K 1.23kg

3000K | >80 CRI | 310lm

CODE	
	756174A4

ALWAYS USE


pole with concrete fixation

CODE	
170	910073A0
270	910074A0
470	910076A0
670	910078A0
870	910070A0



SWAY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.36kg

3000K | >80 CRI | 445lm


CODE	
	720374A4
	720374Q4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	A
	Q



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.36kg

3000K | >80 CRI | 445lm


CODE	
	720374A4
	720374Q4

ALWAYS USE

pole with concrete fixation

CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.21kg

3000K | >80 CRI | 2x445lm


CODE	
	720474A4
	720474Q4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	A
	Q



2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80/60K 1.21kg

3000K | >80 CRI | 2x445lm

CODE	
	720474A4
	720474Q4

ALWAYS USE

pole with concrete fixation


CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	A
	Q



GETTON

OUTDOOR
FLOOR SURFACE



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
aluminium reflector | clear glass

IP65 SDCM3 L80/60K 1.21kg

3000K | >80 CRI | 755lm

CODE
717674A4

ALWAYS USE

pole

CODE
275 910052A0
475 910054A0
675 910058A0


order spike separately

OPTIONAL

ground spike

CODE
90013101


specs on page 759

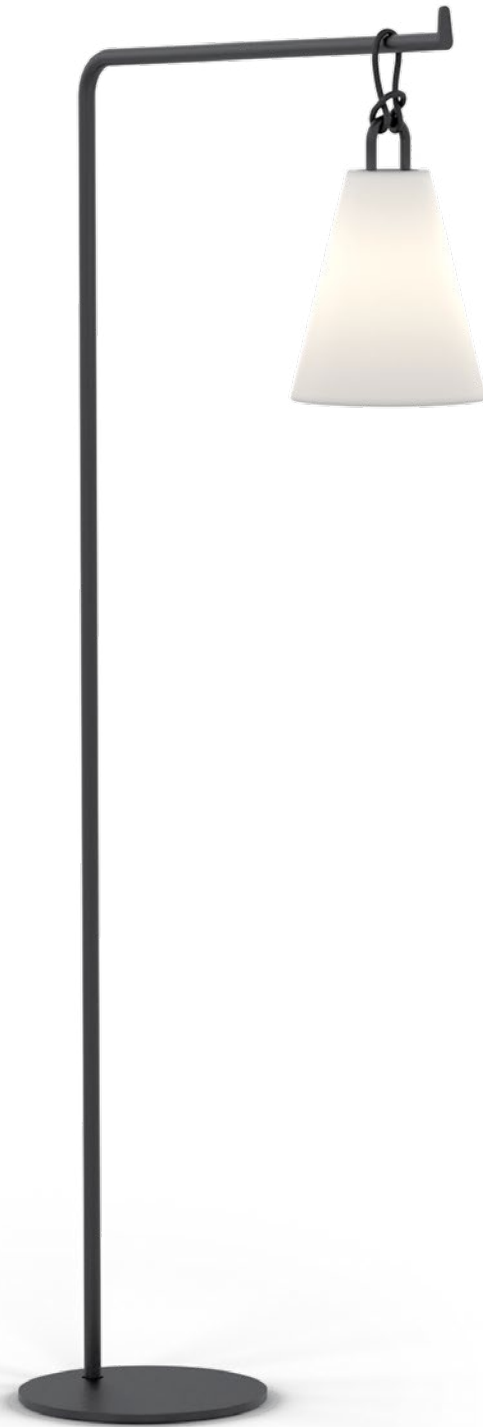

inox pole powder coated

CODE

90056001

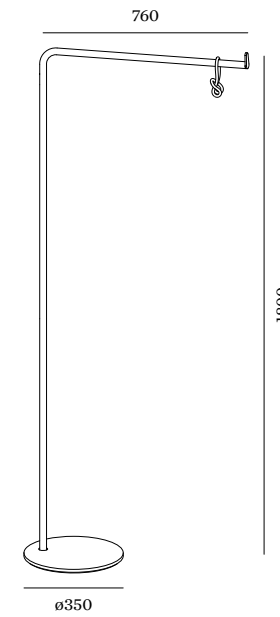

1.0 rope


CODE

90057171

90057170

COSTA

**OUTDOOR
FLOOR SURFACE**



LED 2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K |
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

III IP65 SDCM3 L80|60K 1.00kg

handle colour


CODE

865186YE9

865186OR9

865186SB9

8651860B9



OPTIONAL

1.0 rope

CODE

90057171

90057170



HOTEL YURBBAN BARCELONA | SPAIN

OPTIONAL

inox pole powder coated

	CODE
	90056001

OPTIONAL

2.1 cage

	CODE
	90057182
	90057181
	90057183
	90057180

OPTIONAL

2.0 rope

	CODE
	90057192
	90057191
	90057193
	90057190

COSTA

**OUTDOOR
FLOOR SURFACE**

**DESIGN
AWARD
2019**

2.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.10kg

handle colour

	CODE
	865286YE9
	865286OR9
	865286SB9
	865286OB9


back

WEVER & DUCRÉ 726 – 727



TECHNI CAL

LET’S PAINT THE TOWN RED



CRI 80+

AREA OF APPLICATION

Offices and restaurants
for average use

ANWENDUNGSBEREICH

*Büro und Restaurants mit
durchschnittlichen Anwendungen*



CRI 90+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDUNGSBEREICH

*Privaträume, Büros
und Verkaufsbereiche*




CRI 95+

AREA OF APPLICATION


Museums, galleries, fine dining,
and exclusive products in stores

ANWENDUNGSBEREICH


*Museen, Gallerien, exquisites Essen und
Qualitätsprodukte in Shops*

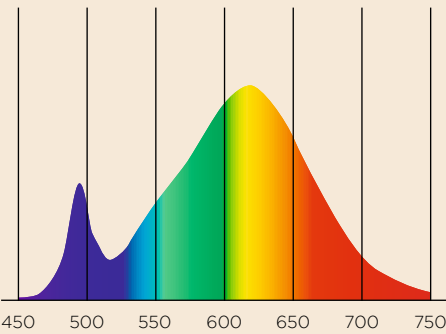

Wavelength (nm) / Wellenlänge (nm)

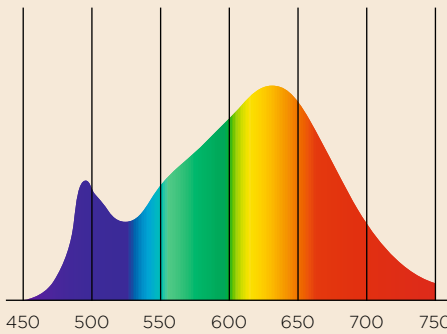

Wavelength (nm) / Wellenlänge (nm)

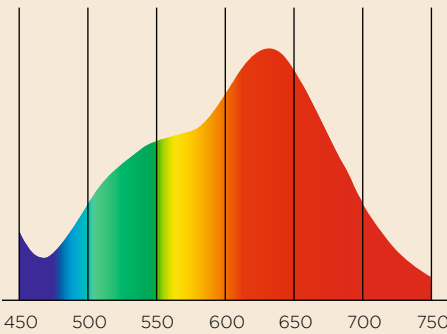

Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You’re probably thinking “Okay...”. But what exactly does that mean? The colour rendering index, the CRI, measures the ability of an artificial light to accurately reproduce colours. The higher this value – and 100 CRI would be possible in theory – the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC


What sets a romantic mood faster than tea lights? That’s right – our selection of dimming variants that easily control the light intensity. Not just with analogue dimming, but also digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You’re renovating and don’t want to change the wiring? Then adjusting the light level via phase-cut dim is the perfect solution for you. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Don’t forget to get two more cables and keep an eye on the correct polarity.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere verschiedenen Dimming-Varianten, mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer “phase-cut dim” die perfekte Lösung für Sie. Alles, was Sie dafür brauchen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten.


PHASE-CUT DIM

Triac (Analogue)




1-10V DIM


Analogue



DALI DIM

Digital



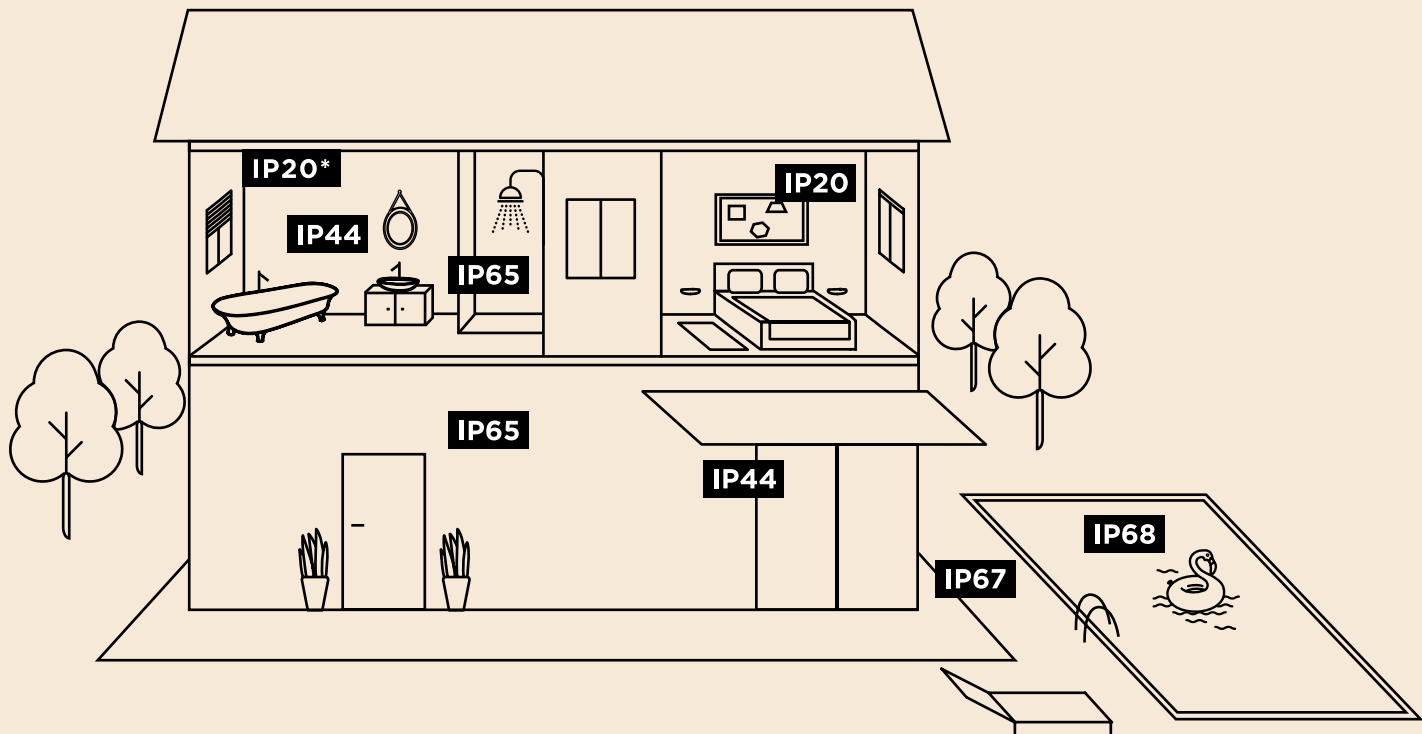

GENERAL INFORMATION

We advise having the lighting devices installed by a qualified electrician only. If the area is cleaned with water jets, then a minimum of IP65 is required.

*It is possible to use IP20 luminaires in bathrooms if there is a minimum distance of 60cm to the bathtub or water tap.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einer Elektrofachkraft installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

*IP20 Leuchten sind in Badezimmern dann möglich, wenn ein Mindestabstand von 60cm zu Badewanne oder Wasserhahn gegeben ist.


SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against solids

Schutz gegen Festkörper



No protection
Kein Schutz



Protected against solid
objects over 50 mm Ø
*Geschützt vor festen
Gegenständen über 50 mm Ø*



Protected against solid
objects over 12 mm Ø
*Geschützt vor festen
Gegenständen über 12 mm Ø*



Protected against solid
objects over 2.5mm Ø
*Geschützt vor festen
Gegenständen über 2,5mm Ø*



Protected against solid
objects over 1.0 mm Ø
*Geschützt vor festen
Gegenständen über 1,0 mm Ø*



Dust-proof
Staubgeschützt



Dust-tight
Staubdicht

SECOND DIGIT

Protection against liquids

Schutz gegen Flüssigkeiten



No water protection
Kein Wasserschutz



Protected against vertically
dripping water
*Geschützt vor senkrecht
fallendem Tropfwasser*



Protected against water
dripping at an angle (up to 15°)
*Geschützt vor schräg fallen-
dem Tropfwasser (bis 15°)*



Protected against
spraying water
*Geschützt vor
Sprühwasser*



Protected against water
splashing from all
directions
*Geschützt vor Spritzwasser
aus allen Richtungen*



Protected against
water jets
*Geschützt vor
Strahlwasser*



Protected against
strong water jets
*Geschützt vor starkem
Strahlwasser*



Protected against
penetrating water when
temporarily immersed
*Geschützt vor eindringendem
Wasser beim kurzzeitigen
Eintauchen*



Protected against penetrating
water when submerged
*Geschützt vor eindringendem
Wasser beim Untertauchen*

DRIVER 250mA 7.2W DIM
7.2W | preset at 250mA | 16-29V
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.094kg **CE** 
DEEP BIJOU 1.0 | **MATCH POINT**
1.0 trimless, 1.0, 1.0 IP44 | **DEEP POINT IP44**

DRIVER 250mA 10W DALI
10W | 250mA | 6-40V | push dim | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
☐ IP20 0.08kg **CE** 
DEEP BIJOU 1.0, 2.0 | **MATCH POINT** 1.0 trimless, 1.0, 1.0 IP44 | **DEEP POINT IP44**

DRIVER 250mA 10.5W DIM
10.5W | preset at 250mA | 26-42V |
phase-cut dim | 220-240VAC | 50-60Hz 10-100%
L/W/H 122x41x23
☐ IP20 0.096kg **CE** 
DEEP BIJOU 2.0

DRIVER 350mA 3W IP66
3W | 350mA | 3-15V
90-264VAC | 50-60Hz
L/W/H 52x30x23
☐ IP66 0.05kg **CE**  
ORIS 0.7, 0.8, 1.3, 2.0 | **CARD**

DRIVER 350mA 17W DALI
17W | 350mA | 10-49V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 108x52x22
☐ IP20 0.106kg **CE** 
DEEP PETIT | **DEEP DEEP IP44 DEEPER** | **DEEPER IP44** | **DEEP ADJUST PETIT** | **DEEP ADJUST** 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** | **TAIO IP65 RONY** | **RON** | **PLANO PETIT** 1.0, 3.0 | **PLANO** | **PLANO IP44** | **STRANGE PETIT** 1.0, 3.0 | **STRANGE** | **SNEAK TRIM** | **SNEAK TRIMLESS** | **BLIEK RINI** | **SNEAK IP44**

DRIVER 350mA 17W IP68
17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
☐ IP68 0.25kg **CE** 
DEEP IP65 | **TAIO**

DRIVER 350mA 16W DALI
16W | 350mA | 3-45V | DALI | push
dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
☐ IP20 0.16kg **CE** 
PLANO PETIT 2.0

DRIVER 350mA 30W
30W | 350mA | 43-86V
220-240VAC | 50-60Hz
L/W/H 127x43x30
☐ IP20 0.15kg **CE** 

CODE
90226401

CODE
90249402

CODE
90226501

CODE
90213101

CODE
90243601

CODE
90213602

CODE
90243602

CODE
90213701

DRIVER 350mA 4W IP66
4W | 350mA | 3-12V
100-240VAC | 50-60Hz
L/W/H 53x27x22
☐ IP66 0.05kg **CE**  

DRIVER 350mA 4.5W DIM
4.5W | 350mA | 8-12V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 48.2x30x20
☐ IP44 0.05kg **CE**  
PIRRO PETIT 2.0

DRIVER 350mA 6W
6W | 350mA | 3-22V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg **CE**  
LITO | **ORIS** 0.7, 0.8, 1.3 | **STRIPE RETO** indoor

DRIVER 350mA 7W IP67
7W | 350mA | 10-20V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.05kg **CE** 

DRIVER 350/500/700mA 17-32W DIM
350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz
L/W/H 166x46x34
☐ IP20 0.19kg **CE** 

DRIVER 350/500/700mA 17.5-20W
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 
DEEP ADJUST 2.0 | **PLANO PETIT** 2.0 | **RON** 2.0 | **STRANGE PETIT** 2.0 | **STRANGE** 2.0 | **SNEAK TRIM** 2.0 | **SNEAK TRIMLESS** 2.0

DRIVER 500mA 6W
6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg **CE**  
THEMIS | **STRANGE** wall
LITO

DRIVER 500mA 6.5W DIM
6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.07kg **CE** 
DEEP BIJOU IP65 | **PIRRO** 1.0

CODE
90213201

CODE
90223101

CODE
90213202

CODE
90213301

CODE
90228801

CODE
90218601

CODE
90214201

CODE
90224301

DRIVER 350mA 10W 1-10V DIM
10W | 350mA | 14-28V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 
DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0

DRIVER 350mA 10W DALI
10W | 350mA | 5-29V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
☐ IP20 0.08kg **CE** 
CENO 1.0 semi-recessed, 1.0, 1.1
MATCH 1.0 trimless, 1.0 | **MATCH STICK** | **BLIEK ROUND PETIT** 1.0 trimless, 1.0

DRIVER 350mA 10W DIM
10W | 350mA | 12-28V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x38x21
☐ IP20 0.09kg **CE** 
DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0 | **MATCH** 1.0 trimless, 1.0 | **CENO** 1.0 semi-recessed, 1.0, 1.1 | **MATCH STICK** | **BLIEK ROUND PETIT** 1.0 trimless, 1.0 | **PIRRO PETIT** 4.0

DRIVER 350mA 15W DIM
15W | 350mA | 27-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
☐ IP20 0.09kg **CE** 
LED MODULES HO 905251W3 | 905251B3 | 905251W5 | 905251B5 | 905251B9 | 905251W9
PLANO PETIT 2.0 | **PIRRO PETIT** 6.0

DRIVER 500mA 7W IP67
7W | 500mA | 5-14.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.15kg **CE** 
DEEP BIJOU IP65 | **ORIS** 0.7, 0.8, 1.3, 2.0

DRIVER 500mA 10W
10W | 500mA | 11-20V
220-240VAC | 50Hz
L/W/H 100x43x23
☐ IP20 0.116kg **CE** 
DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** | **DEEP DEEPER** | **DEEP IP65 DEEPER IP44** | **BLIEK** | **RINI SNEAK IP44** | **RON** 1.0 | **RONY STRANGE** 1.0 | **PLANO** 1.0 | **PLANO IP44** | **TAIO IP65** | **SNEAK TRIM** 1.0 | **SNEAK TRIMLESS** 1.0

DRIVER 500mA 10W DIM
10W | 500mA | 3-20V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
☐ 0.08kg IP20 **CE** 
DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** | **DEEP DEEPER** | **DEEP IP65 DEEPER IP44** | **BLIEK** | **PLANO** 1.0 | **PLANO IP44** | **RON** 1.0 | **RINI SNEAK IP44** | **RONY** | **SNEAK TRIM** 1.0 | **SNEAK TRIMLESS** 1.0 | **STRANGE** 1.0 | **TAIO IP65**

DRIVER 500mA 10W 1-10V DIM
10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
☐ IP20 0.06kg **CE**  

CODE
90223401

CODE
90243401

CODE
90223402

CODE
90223403

CODE
90214301

CODE
90214405

CODE
90224402

CODE
90234401

DRIVER 500mA 10W DALI

10W | 500mA | 2.5-20V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%

L/W/H 124x31x21
☐ IP20 0.058kg **CE**  

DRIVER 500mA 10W DIM

10W | preset at 500mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 122x41x23
☐ IP20 0.08kg **CE** 

PIRRO 2.0

DRIVER 500mA 20W DALI

20W | 500mA | 5-40V | DALI
220-240VAC | 50-60Hz | 0-100%

L/W/H 108x52x22
☐ IP20 0.106kg **CE** 

DRIVER 500mA 20W DIM

20W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 138x44x30
☐ IP20 0.0125kg **CE** 

DEEP ADJUST 2.0 | PIRRO 4.0, 6.0
PLANO 2.0 | RON 2.0 | STRANGE
2.0 | SNEAK TRIM 2.0 | SNEAK
TRIMLESS 2.0

DRIVER 700mA 10W DIM

10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 122x41x23
☐ IP20 0.08kg **CE** 

DRIVER 700mA 10W DALI

10W | 700mA | 2.5-14V | push dim | DALI
220-240VAC | 50-60Hz | 1-100%

L/W/H 124x31x21
☐ IP20 0.08kg **CE** 

DRIVER 700mA 15W DIM

15W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 122x41x23
☐ IP20 0.08kg **CE** 

PLANO PETIT 2.0 | STRANGE
PETIT 2.0 | MATCH 2.0 | CENO 2.0
BLIEK ROUND PETIT 2.0

DRIVER 700mA 20W DIM

20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 137.6x44x30
☐ IP20 0.105kg **CE** 

CENO 3.0

CODE
90244401

DRIVER 500mA 20W DALI

20W | 500mA | 3-40V | DALI | push
dim with memory function
220-240VAC | 50-60Hz

L/W/H 116x40.5x22
☐ IP20 0.16kg **CE** 

DEEP | DEEPER | DEEP ADJUST
DEEP ADJUST TRIMLESS | DEEP
ASYM ADJUST | RONY | PIRRO
RON | PLANO | STRANGE | SNEAK
TRIM | SNEAK TRIMLESS | BLIEK
RINI SNEAK IP44 | PLANO IP44

CODE
90244604

DRIVER 500mA 25W DALI

25W | 350-1050mA | preset at 500mA
20-50V | DSI | push dim | DALI
220-240VAC | 50-60Hz | 1-100%

L/W/H 130x43x30
☐ IP20 0.17kg **CE** 

CODE
90224503

DRIVER 500mA 21W DIM

21W | 500mA | 16-42V | phase-cut dim
220-240VAC | 50-60Hz

L/W/H 110x52x22
☐ IP20 0.11kg **CE** 

CODE
90244602

DRIVER 500mA 21W DIM

21W | 500mA | 28-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%

L/W/H 101.5x51x29.5
☐ IP20 0.09kg **CE** 

CODE
90224602

DRIVER 500mA 24W IP68

24W | 500mA | 5-49V
220-240VAC | 50-60Hz

L/W/H 122x54x26
☐ IP68 0.25kg **CE** 

DEEP IP65 | DEEPER IP44

TAIO IP65

CODE
90225402

DRIVER 700mA 20W DIM

20W | 700mA | 16-28V
phase-cut dim
220-240VAC | 50-60Hz

L/W/H 110x52x22
☐ IP20 0.11kg **CE** 

CODE
90245401

DRIVER 700mA 20W DALI

20W | 700mA | 3-28V | DALI
220-240VAC | 50-60Hz | 0-100%

L/W/H 108x52x22
☐ IP20 0.106kg **CE** 

PLANO PETIT 2.0 | STRANGE

PETIT 2.0

CODE
90225502

DRIVER 700mA 25W DIM

25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%

L/W/H 145x51x30
☐ IP20 0.12kg **CE** 

CODE
90225604

DRIVER 700mA 30W DIM

30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 137.6x44x30
☐ IP20 0.14kg **CE** 

DEEP ADJUST FORT
PLANO FORT

CODE
90244604

CODE
90224702

DRIVER 700mA 3W IP66

3W | 700mA | 3-4.5V
90-264VAC | 50-60Hz

L/W/H 52x30x23
☐ IP66 0.09kg **CE**  

CODE
90224701

DRIVER 700mA 6W

6W | 700mA | 3-8.4V
90-264VAC | 50-60Hz

L/W/H 68x35x21
☐ IP20 0.04kg **CE**  

STRIPE | THEMIS | STRANGE wall

ORIS 0.7, 0.8

CODE
90214702

DRIVER 700mA 7W IP67

7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz

L/W/H 57x41x24
☐ IP67 0.07kg **CE**  

ORIS 0.7, 0.8, 1.3, 2.0

CODE
90225603

DRIVER 700mA 30W DALI
1-10V DIM

30W | preset at 700mA | 9-42V
push dim | DALI | 1-10V dim
220-240VAC | 50-60Hz | 0-100%

L/W/H 103x67x22
☐ IP20 0.142kg **CE** 

CODE
90245602

DRIVER 700mA 28W DALI
1-10V DIM

28W | preset at 700mA | 3-40V
DALI | push dim with memory
function | 220-240VAC | 50-60Hz

2-100%
L/W/H 136x42.5x24
☐ IP20 0.21kg **CE** 

DEEP ADJUST FORT | CENO
2.0, 3.0 | PLANO FORT | BLIEK
ROUND PETIT 2.0 | MATCH 2.0

CODE
90225701

DRIVER 12V/10W

10W | 12V | phase-cut dim
220-240VAC | 50-60Hz | 3-10VA

L/W/H 102x51x30
☐ IP20 0.1kg **CE** 

CODE
90225702

DRIVER 12V/25W

25W | 12V | phase-cut dim
220-240VAC | 50-60Hz | 8-25VA

L/W/H 145x51x29.5
☐ IP20 0.1kg **CE** 

CODE
90254603

CODE
90215101

CODE
90215203

CODE
90215301

CODE
90245703

CODE
90245801

CODE
90221401

CODE
90221701

DRIVER 12V/70W

70W | 12V | phase-cut dim
230-240VAC | 50-60Hz | 20-70VA
L/W/H 108x52x33
☐ IP20 0.12kg **CE** 

DRIVER 12V/105W

105W | 12V | phase-cut dim
230-240VAC | 50-60Hz | 35-105VA
L/W/H 108x52x33
☐ IP20 0.12kg **CE** 

DRIVER 24V/25W

2,4-25W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 137x50x15,5
☐ IP20 0.90 kg **CE** 
ILANE

DRIVER 24V/35W

35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
☐ IP20 0.14 kg **CE** 
ILANE

CODE
90221904

CODE
90221905

CODE
90222701

CODE
90212801

DRIVER 24V/35W IP67

35W | 24V
100-277VAC | 50-60Hz
L/W/H 175x31x42.5
☐ IP67 0.56 kg **CE** 
RETO outdoor

DRIVER 24V/50W

12-50W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 166x52x24
☐ IP20 0.95 kg **CE** 
ILANE

DRIVER 24V/100W

100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
☐ IP20 0.23 kg **CE** 
ILANE

DRIVER 24V/100W DALI

100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
☐ IP20 0.25 kg **CE** 
ILANE

PAR16 FLAT HEAD

PAR16 | GU10
220-240VAC | 50-60Hz
IP20 0.06kg **CE**




CODE
90059125

DALI TO PHASE-CUT
DIMMING MODULE

for converting a DALI signal
to phase-cut dim
LED | 10-300W | 230V
L/W/H 120x30x22
☐ IP20 **CE**

DIMMER DIN RAIL


max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30 **CE**



CODE
90019018

CONNECTION BOX 3P
PAR16

incl. strain relief | 3 pole push
connector | incl. PAR16 socket
incl. through-wiring
L/W/H 75x35x25



CODE
90059126

DIMMER FOR SWITCH


max. 200W LED | 230V
phase-cut dim
L/W/H 48x17.5x46
IP30 **CE**



CODE
90019017

CONNECTION BOX 5P


incl. strain relief | 5 pole push
connector | incl. through-wiring
L/W/H 70x60x30



CODE
90059120

DALI DIMMER FOR SWITCH

230V | 50-60Hz
L/W/H 48x22x49
☐ IP20 0.036kg **CE** 



CODE
90019194

LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | >90 CRI | 1050lm
compatibility on request
IP20 0.06kg CE A 26°



	CODE
	905251W9
	905251B9

LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | >90 CRI | 1340lm
compatibility on request
IP20 0.06kg CE A 26°



	CODE
	905251W3
	905251B3

LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | >90 CRI | 1410lm
compatibility on request
IP20 0.06kg CE A 26°



	CODE
	905251W5
	905251B5

LED MODULE HO 4000K

12W | 350mA | 35Vf
4000K | >90 CRI | 1420lm
compatibility on request
IP20 0.06kg CE A 26°



	CODE
	905251W7
	905251B7

PAR16 LED 2700K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
2700K | >90 CRI | 460lm
IP20 0.06kg CE A 35°



	CODE
	901228W3

PAR16 LED 2700K


6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 437lm |
IP20 0.06kg CE A 35°



	CODE
	901228B3

PAR16 LED 3000K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
3000K | >90 CRI | 500lm
IP20 0.06kg CE A 35°



	CODE
	901228W5

PAR16 LED 3000K


6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
3000K | >90 CRI | 457lm
IP20 0.06kg CE A 35°



	CODE
	901228B5

LED MODULE CABLE


extension cable between LED module
and driver



	CODE
1m	90019200
2m	90019201
3m	90019202

LED AC MODULE 2700K


7.5W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 2700K | 480lm
compatibility on request
IP20 0.08kg CE A 32°



	CODE
	901268W3
	901268B3

LED AC MODULE 3000K


7.5W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 3000K | 490lm
compatibility on request
IP20 0.08kg CE A 32°



	CODE
	901268W5
	901268B5

PAR16 LED 2700K


4.3W | GU10
220-240VAC | 50-60Hz
2700K | >80 CRI | 350lm
IP20 0.06kg CE A 36°



	CODE
	905227S2

PAR16 LED 3000K

4.3W | GU10
220-240VAC | 50-60Hz
3000K | >80 CRI | 350lm
IP20 0.06kg CE A 36°



	CODE
	905227S4

METAL SPRING CLIP

alternative front lamp fixation spring
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO | STRANGE
ceiling | **SPINEO | SOLID**



	CODE
	90019700

SPRING CLIP

lamp fixation | push-in system
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO | STRANGE
ceiling | **SPINEO | SOLID**

	CODE
	900198W0
	900198S0
	900198G0
	900198M0
	900198Q0
	900198B0

QT14 LED 3000K

3W | G9 | 220-240VAC | 50Hz
3000K | >80 CRI | 300lm
RAY wall | **BOX** wall
IP20 0.03kg **€€**



CODE
9019G703

QT14 LED 3000K


3.1W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | 80 CRI | 280lm
DRO 1.0
IP20 0.03kg **€€**



CODE
9010G804

C35 LED 2700K

5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | >90 CRI | 450lm
DRO 2.0
IP20 0.03kg **€€**



CODE
9003C103

A60 LED 2700K

9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 800lm
DRO 3.0 | **ROOMOR** suspended
SHIEK
IP20 0.04kg **€€**



CODE
9003E152

A60 LED 2700K


5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 409lm
MIRRO 1.0
IP20 0.04kg **€€**



CODE
9003E139
gold mirror
9003E140
silver mirror

A65 LED 2700K


14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1378lm
DRO 4.0
IP20 0.04kg **€€**



CODE
9003E153

G95 LED 2200K


5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 371lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg **€€**



CODE
9003E142
gold mirror
9003E156
silver mirror

G95 LED 2700K


11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1100lm
BISHOP
IP20 0.11kg **€€**



CODE
9003E154

G95 LED 2700K


5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 464lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg **€€**



CODE
9003E142
gold mirror
9003E157
silver mirror

G95 LED 2200K


5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 380lm
RUVI | **BISHOP**
IP20 0.07kg **€€**



CODE
9003E111
gold tinted

G95 LED 2700K


5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 483lm
TRACE SUSPENDED 2.1
IP20 0.07kg **€€**



CODE
9003E160
clear

T30-225 LED 2200K


5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >90 CRI | 382lm
WIRO 1.8, 3.8 | wall | **CONE**
DIAMOND | **GLOBE** 4.0
IP20 0.06kg **€€**



CODE
9003E129
gold tinted

T30-225 LED 2700K


5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 425lm
WIRO 1.8, 3.8, 6.1, 6.5 | wall
CONE | **GLOBE** 4.0
IP20 0.06kg **€€**



CODE
9003E136
gold tinted

A60 LED 2200K


3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95CRI | 247lm
WIRO 2.0, 3.8, 6.1, 6.5
CONE 1.0, 2.0, 3.0 | **J.J.W.**
IP20 0.04kg **€€**



CODE
9003E109
gold tinted

ST64 LED 2200K DIM

5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 433lm
IP20 0.05kg **€€**



CODE
9003E110
gold tinted

T30-300 LED 2200K

7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >90 CRI | 585lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg **€€**



CODE
9003E130
gold tinted

A60 LED 2700K DIM


5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 483lm
WIRO 2.0, 3.8, 6.1, 6.5
GLOBE 1.0, 2.0 | **J.J.W.**
IP20 0.04kg **€€**



CODE
9003E138
clear

G125 LED 2200K

6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 450lm
IP20 0.11kg **€€**



CODE
9003E112
gold tinted


T30-300 LED 2700K

7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 613lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg **€€**




CODE
9003E135
gold tinted

PLANO 1.0
plasterkit




CODE
90017104

PLANO 2.0
plasterkit




CODE
90017105

LUNA 1.0 ROUND
plasterkit
not compatible with
LUNA ROUND IP44 1.0 LED HV
140x100 115




CODE
90017101

LUNA 1.0 SQUARE
plasterkit
not compatible with
LUNA SQUARE IP44 1.0 LED HV
140x100 115




CODE
90017102

LITO
plasterkit




CODE
90017119

THEMIS 1.7
plasterkit




CODE
90017111

THEMIS 2.7
plasterkit




CODE
90017112

STRANGE PETIT 1.0
aluminium plasterkit
64x64 7-32




CODE
90017202

STRANGE PETIT 2.0
aluminium plasterkit
64x117 7-32




CODE
90017205

STRANGE PETIT 3.0
aluminium plasterkit
64x169 7-32




CODE
90017208

STRANGE 1.0 | SNEAK
TRIMLESS 1.0
aluminium plasterkit
86x86 7-32



CODE
90017120

STRANGE 2.0 | SNEAK
TRIMLESS 2.0
aluminium plasterkit
156x86 7-32




CODE
90017121

ILANE

ACCESSORIES

BLACK DIFFUSER COVER ILANE


only for 1.0



	CODE
2m	911902B1
3m	911903B1

BLACK DIFFUSER COVER ILANE


only for 3.0



	CODE
2m	911912B1
3m	911913B1

MINI CONNECTOR | ILANE


strip to strip - continuous



	CODE
IP20	90014272

MINI CONNECTOR | ILANE


strip to wire



	CODE
IP20	90014268


MINI CONNECTOR | ILANE

strip to strip



	CODE
IP20	90014269

BLANK COVER




	CODE
1m	911001W0
1m	911001B0

2m	911002W0
2m	911002B0

3m	911003W0
3m	911003B0

RECESSED

track | custom cuts | 48V | 15A | DALI



	CODE
< 1m	90014187CC
< 1m	90014188CC

< 2m	90014189CC
< 2m	90014190CC

< 3m	90014191CC
< 3m	90014192CC


CC = for lengths specifications please
add four digits in mm

DALI SELV DEVICE

for 48V system | max. 300W

48VDC


L/W/H 213x37x25



	CODE
	90019193

SURFACE

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	90014181CC
< 1m	90014182CC

< 2m	90014183CC
< 2m	90014383CC
< 2m	90014384CC
< 2m	90014184CC

< 3m	90014185CC
< 3m	90014385CC
< 3m	90014386CC
< 3m	90014186CC

CC = for lengths specifications please
add four digits in mm


NON ELECTRICAL L-CONNECTOR RECESSED



	CODE
	90014256
	90014257

SUSPENDED

track | custom cuts | 48V | 15A | DALI




	CODE
< 1m	90014181CC
< 1m	90014182CC

< 2m	90014183CC
< 2m	90014383CC
< 2m	90014384CC
< 2m	90014184CC

< 3m	90014185CC
< 3m	90014385CC
< 3m	90014386CC
< 3m	90014186CC

CC = for lengths specifications please
add four digits in mm

NON ELECTRICAL L-CONNECTOR SURFACE




	CODE
	90014258
	90014259

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI

with indirect light



	CODE
< 2m	900140W_CC
< 2m	900140B_CC

< 3m	900141W_CC
< 3m	900141B_CC

3000K 14W/m	950/m >90	5
---------------	-------------	---

CC = for lengths specifications please
add four digits in mm

1-PHASE TRACK

ACCESSORIES

TRACK ADAPTER 1.0


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg



	CODE
	90014044
	90014043


TRACK ADAPTER 2.0

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 3kg



	CODE
	90014277
	90014278


ADJUSTABLE CORNER



	CODE
	90014042
	90014041

COVERPLATE I/L/T/X

only use with recessed tracks



	CODE
	90014126
	90014127


COVERPLATE END FEEDS

only use with recessed tracks



	CODE
	90014124
	90014125


X-FEED



	CODE
	90014049
	90014050

T-FEED 1.0


top view



	CODE
	90014010
	90014011

T-FEED 2.0


top view



	CODE
	90014012
	90014013

T-FEED 3.0


top view



	CODE
	90014014
	90014015

T-FEED 4.0


top view



	CODE
	90014016
	90014017

T-FEED 1.0


top view



	CODE
	90014228
	90014229

T-FEED 2.0


top view



	CODE
	90014230
	90014231

T-FEED 3.0


top view



	CODE
	90014232
	90014233

T-FEED 4.0

top view




	CODE
	90014234
	90014235

3-PHASE TRACK

ACCESSORIES

CUTTING TOOL

for cutting the inner copper cables of
3-phase track and 48V track
CE TÜV



	CODE
	90014165


TRACK ADAPTER

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 5kg




	CODE
	90014279
	90014280

FLEXIBLE CONNECTOR



	CODE
	90014288
	90014289

X-FEED




	CODE
	90014248
	90014249

SUSPENSION OPTIONS

ACCESSORIES

HOOK


standard multi suspension hook
for ø5 plugs



	CODE
	90052025
	90052024

HOOK


optional multi suspension hook
for ø6 plugs



	CODE
	90052066
	90052065

HOOK


for cable 4.25-5.5mm diameter | for
single and multi suspension | also for
textile cable



	CODE
	90052079
	90052080

STRAIN RELIEF


for suspended luminaire power cable
fixation in base



	CODE
	90052064

CABLE WALL- CEILING BRACKET


for cable 4.25-5.5mm diameter



	CODE
	90019197
	90019198

CORK

bottle 1 | clear glass



	CODE
	90019013

HONEYCOMB LOUVER CENO | PIRRO BLIEK ROUND PETIT



	CODE
	90051131

HONEYCOMB LOUVER CENO FORT



	CODE
	90051132

ODREY

inner cover for 1.6 | 1.7



	CODE
	911420W0
	911420G0
	911420B0

FINLIN

wall-/base-spacer for overlapping
luminaires



	CODE
	900195B0

FINLIN ROUND


wall-/base-spacer for overlapping
luminaires



	CODE
	900196B0

WIRO

cable wall bracket
only for WIRO textile cable



	CODE
	90052062

SHIEK 4.0 | 5.0

cable ring for 3 luminaires



	CODE
	90059123
	90059121

SHIEK 4.0 | 5.0


cable ring for 4 luminaires



	CODE
	90059124
	90059122

BOX | RAY

flaps for adjustable beam angle
powder coated white | for BOX | RAY
QT14 only



	CODE
	900401W0

STAKE


snoot



	CODE
	90019004

X-BEAM


snoot



	CODE
	90019023

X-BEAM

snoot round




	CODE
	90019031

ACCESSORIES

KIOSK POLE 400


straight pole | incl. ground spike



CODE	
 400	910101A0
 400	910101Q0

KIOSK POLE 600


straight pole | incl. ground spike



CODE	
 600	910102A0
 600	910102Q0

KIOSK POLE 800


straight pole | incl. ground spike



CODE	
 800	910103A0
 800	910103Q0

SWAM POLE 400


straight pole | incl. ground spike



CODE	
 400	910090Q0
 400	910090B0

SWAM POLE 600


straight pole | incl. ground spike



CODE	
 600	910091Q0
 600	910091B0

SWAM POLE 800


straight pole | incl. ground spike



CODE	
 800	910092Q0
 800	910092B0

SWAM POLE 400


curved pole | incl. ground spike



CODE	
 400	910093Q0
 400	910093B0

SWAM POLE 600


curved pole | incl. ground spike



CODE	
 600	910094Q0
 600	910094B0

SWAM POLE 800

curved pole | incl. ground spike



CODE	
 800	910095Q0
 800	910095B0

KIOSK | SWAM

fixation plate




CODE	
	90019019

POLE 170

with fixation plate

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 170	910013A0
 170	910013Q0
 170	910013B0

POLE 170

with concrete ground fixation

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 170	910073A0
 170	910073Q0
 170	910073B0

POLE 270

with fixation plate

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 270	910014A0
 270	910014Q0
 270	910014B0

POLE 270

with concrete ground fixation

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 270	910074A0
 270	910074Q0
 270	910074B0

POLE 470

with fixation plate

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 470	910016A0
 470	910016Q0
 470	910016B0

POLE 470

with concrete ground fixation

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 470	910076A0
 470	910076Q0
 470	910076B0

POLE 670

with fixation plate

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 670	910018A0
 670	910018Q0
 670	910018B0

POLE 670

with concrete ground fixation

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 670	910078A0
 670	910078Q0
 670	910078B0

POLE 870

with fixation plate

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 870	910010A0
 870	910010Q0
 870	910010B0

POLE 870

with concrete ground fixation

FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ




CODE	
 870	910070A0
 870	910070Q0
 870	910070B0

POLE | GROUND FIXATION


ACCESSORIES

LINUS POLE 150
with fixation plate




	CODE
	910024D0
	910024A0
	910024Q0

LINUS
ground spike




	CODE
	90013103

LINUS POLE 350
with fixation plate




	CODE
	910026D0
	910026A0
	910026Q0

LINUS
concrete ground fixation




	CODE
	90013302

LINUS POLE 550
with fixation plate




	CODE
	910028D0
	910028A0
	910028Q0

STIPO
ground spike




	CODE
	90013106

GETTON POLE 275
with fixation plate




	CODE
	910052A0

GETTON
ground spike




	CODE
	90013101

GETTON POLE 475
with fixation plate




	CODE
	910054A0

STAKE FOLD
ground spike




	CODE
	90013107

GETTON POLE 675
with fixation plate




	CODE
	910058A0

X-BEAM
ground spike



	CODE
	90013115

TAPE
ground spike



	CODE
	90013102



back

NO MORE MISUNDERSTANDINGS

ICONS AND STANDARDS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore
	Rotatable vertically horizontally	Drehbar vertikal horizontal	Draaibaar verticaal horizontaal	Orientable verticalement horizontalement	Orientable en vertical horizontal	Orientabile in verticale orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Fascio luminoso
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
IP 20	IP rating	IP Bewertung	IP rating	Indice de protection	Grado IP	Grado di protezione IP
↑ IP 44	Frontal IP rating	Frontale IP Bewertung	Frontale IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
IK 06	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating
UGR ≤ 19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro uffici
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie; kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
180 50K	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 uur is minimaal 80%	Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento
SDCM2	Standard Deviation Colour Matching	Standardabweichung des Farbabgleichs	Standaarddeviatie van kleurafstemming	Écart-type de la correspondance des couleurs	Desviación estándar de la coincidencia de colores	Deviazione standard del bilanciamento del colore

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN
CE	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
Blue lines	Part not included	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energie-etiketterings-verordening	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull'etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron door eindgebruiker te vervangen	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituable por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet te vervangen	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Besturing door eindgebruiker te vervangen	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituible por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Besturing niet te vervangen	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron door erkende vakmensen te vervangen	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituable por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Besturing door erkende vakmensen te vervangen	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de control sustituible por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati
NEW	Check product availability on weverducre.com	Informationen zur Verfügbarkeit der Produkte finden Sie auf weverducre.com	Controleer de productbeschikbaarheid op weverducre.com	Vérifier la disponibilité des produits sur weverducre.com	Compruebe la disponibilidad de los productos en weverducre.com	Le informazioni relative alla disponibilità dei prodotti sono consultabili su weverducre.com

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

MIDDLE EAST

Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

NETHERLANDS

Design Post Amsterdam
Cruquiusweg 111L
1019, AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

NORWAY

Drammensveien 288
0283 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

SWITZERLAND

Kellerstraße 22
6005 Lucerne
Phone +41 41 361 60 60
office.ch@weverducre.com

SHOWROOMS

ASIA PACIFIC

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point | Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

AUSTRIA

Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B

1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

BELGIUM

Gare Maritime
Picardstraat 7, bus 304
1000 Brussel
+32 56 492 800
office@weverducre.com

FINLAND

Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 506 71 82
office.fi@weverducre.com

FRANCE

36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72 811 199
office.fr@weverducre.com

10, Rue Pecquay

75004 Paris
Phone +33 1 402 981 01
office.fr@weverducre.com

GERMANY

Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 2102959 0
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B

51063 Cologne
Phone +49 221 130 649 60
office.de@weverducre.com

ITALY

Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

SWEDEN

Hårdvallsgatan 18
115 46 Stockholm
Phone +46 73 045 76 39
office.se@weverducre.com

SPAIN

Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

UK

23 Batemans Row
EC2A 3HH London
Phone +44 203 174 01 77
info.uk@weverducre.com

POLAND

Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

1ST EDITION, MARCH 2023

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an 

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PROJECT MANAGEMENT

PRINTING

PHOTOGRAPHY

David "MEGGS" Hooke, Collingwood, Melbourne, Australia

Carina Erlach, Carola Friedrich, Laura Gautsch

Carola Friedrich, René Zavadilik

Carina Erlach, Lukas Hochenwarter

Tanja Petschnig, Renate Buzzi

Volker Waldhauser

Renate Buzzi, Sabrina Schrauf, Rebecca Hebenstreit

Drukarnia Perfekt S.A., Warsaw, Poland

- Apresvino - (p. 414-415) | @ nina Struve for VRAI interior architecture (p. 380) | @ nomadic.den p. 104, 126, 406 | @ sabrina golob / 2021 p. 546 | © stella (p. 8-9, 11, 16, 19)
Aikon Producties-bvba (p. 378) | Aleksandr Dal Cero (p. 162-163) | Alexander Maria Lohmann (p. 160) | Álvaro Valdecantos (p. 580, 716) | Andrea Badrutt Fotografie (p. 234)
Andrei Valeriu Radulescu (p. 152) | Architekturfotografie Oliver Hallwirth (p. 350) | Ben Kwanten p. (166-167) | Biderbost Photo (p. 496) | Bob Reijnders (p. 100, 248, 260)
Capture Photography (p. 98) | Catherine Roider (p. 304, 388) | Christian Brandstätter (p. 628) | Christian Jungwirth (p. 34) | Christian Repnik (p. 724) | Christoph Steinbauer
(p. 284, 438, 598, 604, 676, 718-720) | Corinna Unterkofler/Joachim Grubelnik (p. 666, 706) | Dani Rovira Fotografia (p. 726) | David Aebi (p. 722) | Davide Perbellini (p. 178, 216) | Edgar Navarre (p. 456-458) | Elena Egger (p. 376-377) | Elia Kuhn Photographie (p. 58) | Erich Sinzinger 2019 (p. 64) | Erik Ćuriš (p. 520-521) | Evgenij Avramenko
(p. 194) | Footoo Stijn De Graeve (p. 264) | Flare Department (p. 28) | Hanne Joosen Fotografie (p. 154) | Hannelore Veelaert (p. 556) | Hannes Otté (p. 10, 15) | HEINEN AG
(p. 384) | In-Between Architects Limited (p. 478) | Ingo Rasp Photography (p. 436) | Jack Lovel (p. 464) | Jaro van Meerten - The Art of Living magazine (p. 86, 302) | Jim
Van Loo (p. 538) | Joachim Grothus/Herford/Germany (p. 188) | Jurrit van der Waal - The Art of Living magazine (p. 452) | Kim Donggyu (p. 424) | Kim Forssén (p. 364, 652)
Kris Dekeijser (p. 32-35, 39, 48, 50, 52, 54, 56, 62, 66, 70, 74, 78, 80, 82, 84, 90, 92, 102, 106, 110, 116-120, 124, 128-130, 134, 142-146, 150, 156-158, 164, 168-174, 186, 195-198, 202,
226, 230-232, 236, 250, 258, 266, 280-283, 288, 296, 300, 314, 322-330, 340, 344-346, 352-354, 370-372, 382, 386-387, 392-404, 426-431, 442-444, 450, 460, 470, 482, 486,
490-492, 512-513, 518, 522, 528-529, 536, 548, 560, 568, 574, 582, 586-588, 602, 606, 608, 610-614, 618, 624, 630, 638-640, 650, 656-658, 668, 672, 678, 682-684, 686, 690-692,
702-705, 708, 714) | Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (p. 500) | Kurt Hoerbst (p. 440, 616) | Kurt Kuball (p. 540, 594, 634, 654) | Lloyd Knowles (p. 20-21)
Lukas Jahn (p. 626, 728) | Marc Díez (p. 526) | Marc Hadden Photography (p. 348) | Marco Richter Photography (p. 562-563) | Martin Baitinger (p. 390 - 391) | Matteo
Michelino (p. 410) | Mattila Aquila (p. 148) | Maxi Conesa (p. 190) | Miquel Llloch (p. 14, 22-23, 498) | Miriam Raneburger (p. 620) | nunofoto.com (p. 642) | Paloma Pacheco
Turnes (p. 368, 549) | Patricia Goijens (p. 408) | Paul Karalius (p. 662) | paul ott fotografiert (p. 412, 644, 674) | Paula Beetlestone (p. 648) | Petri Immonen (p. 180) | Philip
Kottlorz Fotografie (p. 222, 286, 534) | Salvatore Guido (p. 17, 30, 46, 76, 94-96, 114, 122, 176, 182-184, 200, 204-214, 218, 228, 252-256, 262 -263, 274, 278, 298, 308, 332-334,
338, 342, 356-363, 416-420, 434, 462, 472-477, 480-481, 484, 502-510, 514-516, 524, 530-533, 542-545, 552-554, 558, 564-566, 570, 576-579,584) | SCHWARZ-LICHT /
fotografie + kommunikation (p. 313, 366) | Sergey Bezuglov (p. 88) | Sergio Camplone (p. 108, 301, 336) | Studio Ciao (p. 60, 422) | Studio Erick Salliet (p. 68) | Supereal.LU
(p. 192) | Victor Sajara Photography (p. 698, 710-712) | Walters Media (p. 466) | Wide Shot Photography - Alexandre Van Battel (p. 220) | Zvonimir Mihaljek (p. 636)

INDEX

WITH GROUPED PRODUCT FAMILIES

1-PHASE TRACKS	277
3-PHASE TRACKS	295
BENTO	503
BISHOP	413
BLAS CEILING SURFACE	621
BLAS WALL SURFACE	673
BLIEK PETIT	103
BLIEK ROUND	105
BLIEK SQUARE	109
BLINK	685

BOX

BOX CEILING SURFACE	143
BOX CEILING SURFACE EXTERIOR	615
BOX CEILING SUSPENDED	323
BOX MULTI	323
BOX MINI CEILING SURFACE	141
BOX MINI WALL SURFACE	451
BOX ON STREX	251
BOX WALL SURFACE	453
BOX WALL SURFACE EXTERIOR	659
BOXX	665

CARD	683
------	-----

CENO

CENO CEILING RECESSED	99
CENO CEILING SURFACE	201
CENO FORT ON 3-PHASE TRACK	299
CENO ON STREX	261
CENO WALL SURFACE	487

CENTRAL	471
CENTRAL EXTERIOR	649
CHART	693
CHART ASYM	695
CITY IP44	135
CLEA CEILING SURFACE	219
CLEA WALL SURFACE	525

CLOCK CEILING SURFACE	213
CLOCK WALL SURFACE	515
CONE	365
CORK	367
COSTA	725
DARF CEILING SUSPENDED	425
DARF WALL SURFACE	565

DEEP

DEEP	51
DEEP ADJUST	57
DEEP ADJUST FORT	65
DEEP ADJUST PETIT	55
DEEP ADJUST TRIMLESS	61
DEEP ASYM ADJUST	63
DEEP BIJOU	47
DEEP BIJOU IP65	117
DEEP BIJOU IP65 EXTERIOR	595
DEEPER	53
DEEPER IP44	121
DEEP IP44 IP65	119
DEEP IP65 EXTERIOR	595
DEEP PETIT	49
DEEP POINT IP44	115

DINOR	355
-------	-----

DOCUS

DOCUS CEILING SUSPENDED	325
DOCUS CEILING SURFACE	149
DOCUS MINI CEILING SURFACE	147
DOCUS MINI WALL SURFACE	459
DOCUS MULTI	325
DOCUS ON STREX	253

DOMINO	499
DOT	507

DRO

DRO CEILING SURFACE	211
DRO CEILING SUSPENDED	373
DRO FLOOR SURFACE	585
DRO ON 1-PHASE TRACK	287
DRO TABLE	575
DRO TABLE FLOOR SURFACE	577
DRO WALL SURFACE	511

ELLO CEILING SUSPENDED	423
ELLO SYSTEM	311
FIFTY FIFTY FLOOR SURFACE EXTERIOR	719
FIL	421

FINLIN

FINLIN ROUND	559
FINLIN SURFACE	225
FINLIN SUSPENDED	417
FINLIN WALL	555

GETTON FLOOR SURFACE	723
GETTON WALL SURFACE	675
GIGANT	429

HEXO

HEXO CEILING SURFACE	155
HEXO CEILING SUSPENDED	327
HEXO MINI CEILING SURFACE	153
HEXO MINI WALL SURFACE	461
HEXO MULTI	327
HEXO ON 1-PHASE TRACK	289
HEXO ON 3-PHASE TRACK	303
HEXO ON STREX	255

ILANE	315
INTRA	599

J.J.W.

J.J.W. CEILING SURFACE	221
J.J.W. CEILING SUSPENDED	399
J.J.W. WALL SURFACE	537

KIOSK WALL SURFACE EXTERIOR	647
KIOSK FLOOR SURFACE EXTERIOR	699
LEENS	501
LINUS	713
LITO	437
LUNA ROUND IP44	127
LUNA SQUARE IP44	129
MAP	687
MAP ASYM	691

MATCH

MATCH CEILING RECESSED	95
MATCH CEILING SURFACE	199
MATCH CEILING SUSPENDED	369
MATCH POINT	93
MATCH SNOOZE	483
MATCH STICK TRIMLESS	97
MATCH SURFACE ON STREX	259
MATCH SUSPENDED ON STREX	267
MATCH WALL	485

MICK

MICK CEILING SURFACE	207
MICK ON STREX	265
MICK SNOOZE	495
MICK WALL SURFACE	497

MILES	547
MIRBA IP44	569

MIRBI

MIRBI IP44 CEILING RECESSED	133
MIRBI IP44 CEILING SURFACE	231
MIRBI LONG IP44	571

MIRRO

MIRRO CEILING SURFACE	217
MIRRO CEILING SUSPENDED	397
MIRRO FLOOR SURFACE	587
MIRRO TABLE	579
MIRRO WALL SURFACE	519

NET	419
-----	-----

ODREY

ODREY CEILING SUSPENDED	333
ODREY MULTI	333
ODREY ON 1-PHASE TRACK	291
ODREY ON STREX	269
ODREY WALL SURFACE	491

ORIS	445
ORIS EXTERIOR	629
PALOS WALL SURFACE EXTERIOR	671
PALOS CARRÉ FLOOR SURFACE EXTERIOR	717
PALOS ROUND FLOOR SURFACE EXTERIOR	715

PIRRO

PIRRO CEILING RECESSED	77
PIRRO ON 1-PHASE TRACK	279
PIRRO OPAL	181
PIRRO PETIT CEILING RECESSED	75
PIRRO PETIT CEILING SURFACE	175

WITH GROUPED PRODUCT FAMILIES

PIRRO SPOT CEILING	177
PIRRO SYSTEM	309

PLANO PETIT CEILING RECESSED	79
PLANO CEILING RECESSED	81
PLANO FORT CEILING RECESSED	83
PLANO IP44 CEILING RECESSED	131
PLANO PETIT CEILING SURFACE	183
PLANO CEILING SURFACE	185

RAY

RAY CEILING SURFACE	161
RAY CEILING SURFACE EXTERIOR	609
RAY CEILING SUSPENDED	331
RAY MINI CEILING SURFACE	159
RAY MINI WALL SURFACE	463
RAY MULTI	331
RAY ON 1-PHASE TRACK	289
RAY ON 3-PHASE TRACK	303
RAY ON STREX	257
RAY WALL SURFACE	465
RAY WALL SURFACE EXTERIOR	643

RETO

RETO WALL RECESSED	435
RETO WALL RECESSED EXTERIOR	625
RETO WALL SURFACE EXTERIOR	669

REVER DINING	583
RINI SNEAK IP44	125
ROB EXTERIOR	619
ROB IP44	233
ROBY IP44	235
RONY	69
RON	71

More product families on next page

INDEX

INDEX

WITH GROUPED PRODUCT FAMILIES

ROOMOR

ROOMOR CABLE SUSPENDED	407
ROOMOR FLOOR SURFACE	589
ROOMOR OFFICE CABLE SUSPENDED	411
ROOMOR OFFICE CEILING SURFACE	223
ROOMOR OFFICE ON TRACK	305
ROOMOR TABLE	581
ROOMOR WALL SURFACE	527

RUVI CEILING RECESSED	111
RUVI IP44 WALL SURFACE	567

SARA

SARA ON 1-PHASE TRACK	281
SARA ON BASE	191
SARA SNOOZE	479

SCAVA	505
SHIEK	347
SHIEK MULTI	347
SIRRO	187
SNEAK TRIM	89
SNEAK TRIMLESS	91
SOLID BIJOU	165
SOLID CEILING SURFACE	169
SOLID PETIT	167
SPINEO	67
SQUBE ON BASE	193
SQUBE ON 1-PHASE TRACK	285
SQUBE ON 3-PHASE TRACK	297
STAKE	709
STAKE FOLD	709
STATION EXTERIOR	651
STIPO EXTERIOR	707
STRANGE CEILING RECESSED	87
STRANGE PETIT	85
STRANGE WALL RECESSED	441

STREX MODULE DOT	249
STREX MODULE OPAL	249
STREX SYSTEM 48V	243
STRIPE	439
SWAM FLOOR SURFACE	703
SWAM WALL SURFACE	679
SWAY	721

TAIO

TAIO CEILING RECESSED EXTERIOR	597
TAIO CEILING SURFACE EXTERIOR	607
TAIO IP65 CEILING RECESSED	123
TAIO IP65 CEILING SURFACE	229
TAIO WALL SURFACE EXTERIOR	641

TAPE FLOOR SURFACE	701
TAPE WALL SURFACE	677
TAPIS	543
THEMIS	443
TOWNA IP44	237

TRACE

TRACE CEILING SURFACE	173
TRACE CEILING SUSPENDED	357
TRACE CHANDELIER	361
TRACE SLIM	473
TRACE WALL	475

TRAIN

TRAIN	469
TRAIN CEILING SURFACE EXTERIOR	611
TRAIN WALL SURFACE EXTERIOR	645

TRAM CEILING SURFACE EXTERIOR	603
TRAM WALL SURFACE EXTERIOR	635
TUBE CARRÉ CEILING SURFACE EXTERIOR	613
TUBE CARRÉ WALL SURFACE EXTERIOR	653
TUBE CEILING SURFACE EXTERIOR	605
TUBE WALL SURFACE EXTERIOR	637
VENN CEILING SURFACE	227
VENN WALL SURFACE	561
WETRO	341
WETRO MULTI	341

WIRO



WIRO CEILING SURFACE	215
WIRO CEILING SUSPENDED	379
WIRO CONE	379
WIRO DIAMOND	385
WIRO GLOBE	393
WIRO WALL SURFACE	517

X-BEAM WALL SURFACE	667
X-BEAM FLOOR PROJECTOR	711

THIS
IS NOT
THE
END




INSPIRED BY THE ARCHITECTURE OF BELGIUM

COLOURS AND MATERIALS

	SG	Silk Grey wet painted RAL 7044
	RA	Raw material for custom paint
	ST	Stay together similar to RAL 000 75 00
	GW	Give warmth similar to RAL 080 80 10
	FJ	Feel Jade similar to NCS S 2005 – G90Y
	TS	Smoked Striped Glass handblown
	TW	Taupe White Glass handblown
	DW	Dark Taupe White Glass handblown
	TD	Smoked Diamond Glass handblown
	FD	Frosted Diamond Opal glass handblown
	P	Copper Plated Glass handblown
	Y	Brown Opal glass handblown
	B	Smoked Glass handblown
	W	White Opal glass handblown
	MB	Black Marble
	MW	White Marble



*for specific information on colour and finishes please refer to weverducre.com/materials

	I	Inox 304 Stainless steel electro polished
	V	Rust Powder coated corten steel look
	S	Silver Aluminium powder coated smooth RAL 9006
	RR	Coral Red RAL 3016 and White Aluminium wet painted
	CC	Come closer RAL 050 60 20
	OR	Traffic Orange Polypropylene RAL 2009
	SB	Water Blue Polypropylene RAL 5021
	YE	Colza Yellow Polypropylene RAL 1021
	W	White LLDPE
	F	Grey Recycled PET felt
	D	Grey Texture RAL 9007 Composite material wet painted
	LB	Black/Glossy Aluminium Aluminium Composite material
	GB	Black/Light Gold Aluminium Composite material
	NB	Black/Black Chrome Aluminium Composite material
	A	Aluminium anodised
	GW	Cement Grey RAL7033 and White Aluminium wet painted
	A	Anthracite Grey Aluminium powder coated texture RAL 7016
	D	Grey Texture RAL 9007 Aluminium powder coated texture
	B	Black matt Aluminium powder coated wet painted*
	P	Copper Steel varnished lacquered
	Q	Bronze Aluminium painted/brushed
	W	White matt Aluminium or steel powder coated wet painted*
	L	Aluminium wet painted brushed
	G	Gold Aluminium painted/brushed
	M	Champagne Aluminium wet painted smooth
	Z	Black Texture and Copper Aluminium powder coated
	BQ	Black Texture and Bronze Aluminium powder coated
	K	Black Texture and Gold Aluminium wet painted
	CH	Black and Champagne Aluminium powder coated/ brushed
	GB	Gold Aluminium wet painted and Black Texture
	H	Champagne and Black Texture
	J	White Texture and Gold Aluminium wet painted
	WM	White Texture and Champagne
	E	White Texture and Black Aluminium powder coated brushed
	BL	Black and Aluminium wet painted brushed

