

 DELTALIGHT®

The Lighting Bible®
FIFTEEN

**We are
Delta Light**

Let's journey into the world of Delta Light with **the Lighting Bible 15**. Let's journey into the world of Delta Light with the Lighting Bible 15. Get inspired by new product families, innovative integrations and technical advancements. This illustrated catalogue is a testament to our craft, where light and creativity collide. Lighting Bible 15 bridges the gap between print and digital. This book will give you a deeper understanding of our architectural lighting solutions, as well as access to more technical information presented through sketches and informative tables.

In need of a visual representation with fitting project photography? Seamlessly switch to our website via QR-codes and visual cues. We provide everything you need: **create on paper, imagine online.**

NEW DELTA LIGHT WEBSITE

In the ever-evolving digital landscape, we at Delta Light find better ways to service our customers. A well-designed website can serve as a powerful tool to piece together your architectural narrative or design project.

By reducing the use of printed materials and focusing on potent digital tools, we are adjusting our course to more sustainable communication channels. We believe it is more than just a trend- it's a crucial step on our path towards a sustainable future.

The latest version of our website has many helpful functionalities. Gather inspiration via the effective search function, collect your favorite projects and products with pins and share them with whoever you want. It is super easy to cross reference technical data from the Lighting Bible to applications on the new website and vice versa.

With this new **synergy between online and offline** we provide a comprehensive and easily accessible toolset for our clients, helping them to bring their visions to life and make their mark on their world.

**welcome
to our
world.**

We develop lighting solutions to improve people's quality of life. We offer our lighting expertise to architects, interior designers and lighting designers to help them achieve their vision and create a lighting display that integrates into the architecture. Using the right lighting, in the right way enhances and complements architectural concepts.

We strive to be the best in everything we do. With our extensive experience in product development, manufacturing, and design, we approach the future of lighting with ambition and confidence. We continuously invest in people, new markets, production technologies and our infrastructure. And we do this to improve our service; expand our R&D department, test facilities and laboratory; increase the level of warehouse automation and expand the House of Light training center. We like sharing our passion, creativity, and dedication. Our aim is to inspire people all over the world. As a family business, we have a personal stake in making your project a success.


we make light

Paul Ameloot

Entrepreneur Visionary Designer

Paul Ameloot created Delta Light in 1989 in the Belgian city of Roeselare, achieving his dream to design and manufacture architectural lighting. This local success story soon went global, with the participation in international events from the get-go. Today Delta Light is active on all continents, but still honors its local roots.

"I started out designing and developing all products myself. Even though today we have a team of 35 engineers, I still contribute my vision and ideas. Because once a player, it's hard to become a fan sitting on the bench at the side of the pitch and watching the game. My dream – that was made possible by working together with my wife Katrien – really came true. Our sons, Peter and Jan, continue to make that dream grow."

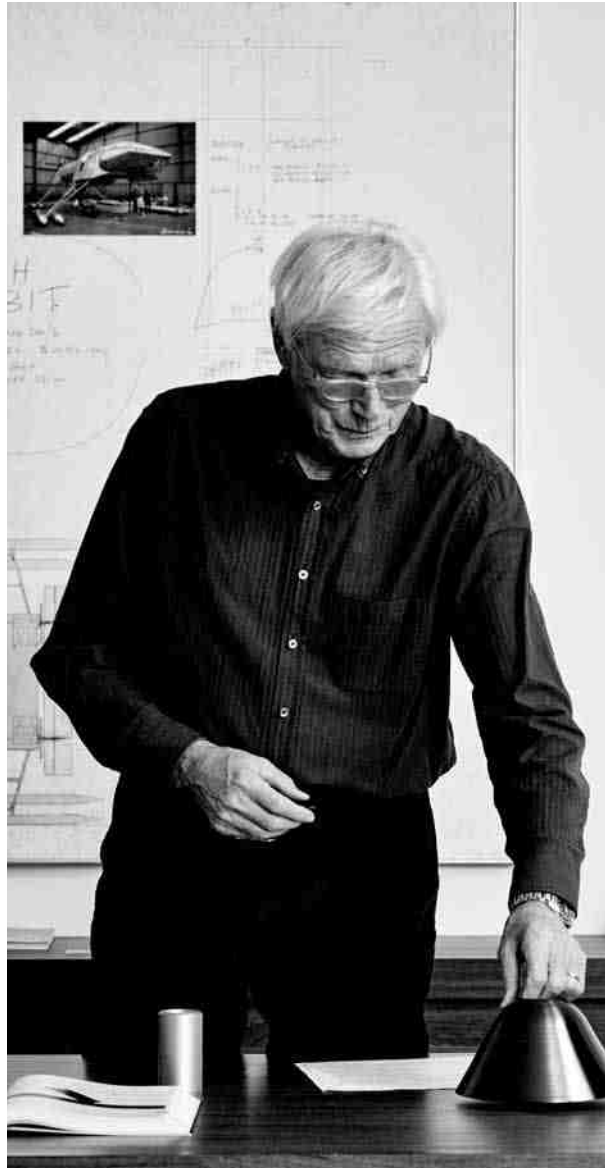

Paul Ameloot
Entrepreneur Visionary Designer



Purity is key in this latest edition of The Lighting Bible. You will find pure lighting pleasure deep in the core of our DNA, it is our leitmotif.

The Lighting Bible 15 brings you a collection of pure lighting experiences with a language of its own to enhance the human experience of architecture and nature. Our luminaires offer the building blocks for unique creations of brightness, atmosphere, and emotion.

Sophistication in technology, and purity in design unite in our collection. We offer lighting that pushes the boundaries of technology and engineering, whilst bringing a feeling of comfort, elegance, excitement and purity. Explore our complete collection of lighting solutions and experience pure lighting pleasure.

pure lighting

d pleasure.

**Light that
makes you
see.**

**Light that
makes you
look.**

**Light that
animates
the world,
around you.**

Since 1989, we have grown from a small Belgian company to a global business that offers lighting solutions and services in 120 countries worldwide.

In addition to the Belgian headquarters we have Delta Light branch offices and partners on all continents and in key design capitals, from Sydney to New York, Amsterdam, Bogota, Hong Kong, Copenhagen, Miami, London, Milan, Cape Town, Los Angeles and many more. Our goal is to support the international projects personally and locally.

Delta Light caters to some of the world's most well-known brands and architects, providing sophisticated and value add lighting solutions to residential, office, hospitality, retail, landscaping, showroom, and public projects. From small to super large scale, Delta Light has the product range, experience, and knowledge to meet the functional and aesthetic needs of your projects.

Each project requires a customised approach, and as such Delta Light recognises this with an exceptional package of services and design tools. Our global team works with all stakeholders involved to achieve the best possible results.

Starting with initial concept lighting support to the installation process and project follow-up, and everything in between. Be it for technical or application questions, performance and energy saving studies, custom designs, and made-to-measure solutions, rendering or graphics, or any other lighting support needs ... Delta Light provides a one-stop-shopping solution for your projects.

Global



Jan & Peter Ameloot

CEO's




Lighting spaces, indoor and outdoor

Delta Light stands for a high-quality range of contemporary architectural interior lighting solutions. A legacy we carry with pride and that we will continue to build upon with determination. From residential to hospitality, whether small or large, Delta Light has the technical expertise, product range, and practical experience to meet both the functional and aesthetic requirements of your interior project.

For the past 20 years we have been expanding our Delta Light outdoor range. We can proudly say that all that effort, and the vision behind it, has resulted in an extensive and complete range of Delta Light outdoor luminaires. These lights are of high quality and the product excellence is evident in the sublime lighting experience, enhanced durability and state-of-the-art finishes. More than ever, we are determined to make our outdoor range as renowned as our indoor range, based on the same pillars: contemporary design, excellent quality, innovative product development and a solid production and finish.



**lighting
spaces**



R&D

CONTINUOUS RESEARCH & INNOVATION

Delta Light has been at the forefront of lighting technology for over 30 years now, and we continue to push boundaries, both in interior and exterior lighting. Our investment in R&D, production and innovation aims to deliver outstanding luminaires, blending contemporary design with high-quality materials, advanced engineering, the very best performance and a long lifespan.

CUTTING-EDGE LED TECHNOLOGY

As luminaire designers and manufacturers, we always strive to create the best possible thermal conditions in the luminaire, to ensure the LEDs operate at their optimum. From the design of the LED circuit boards and heat sink, to the selection of materials, to the assembly process

and installation

techniques ...

everything is

engineered to reach

optimal life expectancy

and maximum

efficiency.

By partnering with the

best LED suppliers in

the world, we ensure a

consistent

LED selection with

colour uniformity across all product ranges. A minimum of

MacAdam Step 2 is standard throughout our collection, whilst

many of our new collection LEDs offer MacAdam Step 1.

CERTIFIED LABORATORY TESTING

Product quality and safety testing within our Delta Light laboratory conform to the International Electrotechnical Commission

standards. The close cooperation and CTF stage 3 acceptance with our certifying partners SGS-CEBEC and INTERTEK leads to

CE, ENEC and CB certifications for European and IEC member countries www.members.iecee.org/

Our laboratory also covers the certification of products for the North American market by being certified as a level 4 satellite laboratory for INTERTEK.

This allows us to efficiently obtain the cETLus listing for our standard North American product range and provide exceptional service for even the most demanding customer specific solutions.

www.intertek.com/directories/etl-listed-mark/

The lighting industry is constantly evolving, providing both challenge and opportunity.

It fascinates us to keep on bringing new designs and lighting solutions to the market. You could consider it a passion to continuously surprise and inspire people with new lighting languages.

An essential attribute in Delta Light's creative process is the extensive in-house design, development, testing, engineering, and manufacturing of all products. This enables us to achieve our short idea-to-market philosophy, resulting in extensive new collections being launched on a regular basis.

Our in-house design team crafts cuttingedge lighting solutions, that combine an architectural design language, a minimalist approach, and a boldness that challenges the boundaries of technology.

In-house design is the foundation of our product portfolio, but we also love to collaborate with architects and designers, from different industries to create and innovate.

Delta Light's extensive design and R&D teams are constantly discovering future trends, both in terms of design and use of materials, whilst remaining focused on the power of imagination. Its creative statement is supported by the opinion of expert panels, resulting in prestigious awards for our collection of products, including IF Design Award, Good Design Award, Red Dot Design Award plus many more ..

We are focused on the detail. The looks, how a fixture moves, how it can be specified and installed, the ease of enjoying the light and so much more. With a surprising visual simplicity, our products are the result of extensive research and testing, fusing advanced technology with timeless design and sustainable materials.

in-ho
des

ADVANCED OPTICS

Delta Light's team of engineers and optics experts are on a continuous quest to match the company's credo for design with energy-efficiency and optimal quality of light. Delta Light's collection is ready to meet the needs of today's architecture, interior and landscape design, and to illuminate with impact. We offer different precision light distributions to fulfil various requirements, with high uniformity, for demanding applications. CAD-engineered and precision manufactured lenses deliver a tightly controlled light distribution.

The variety of optics, beams and other features enable designers to meet the various illumination needs.

STATE OF THE ART DEVELOPMENT

TECHNIQUES

An important feature in Delta Light's creative process is the use of state-of-the-art development techniques. The intensive use of 3D printing, early stage FMEA (Failure Mode and Effect analysis), goniophotometer measurement and an in-house third party recognised lab (SMT/CTF/satellite data acceptance) result in a fast, efficient and 'first time right' development process.

As such, it is an essential attribute in the company's

short idea-to-market philosophy. Throughout the entire production process Delta Light distinguishes itself by handling the strictest quality parameters, to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process has a routine quality procedure, covering both product quality and testing. Every single product that leaves Delta Light, has been inspected and tested thoroughly, resulting in minimal returns and maximum efficiency.

HIGH-QUALITY

Delta Light's proprietary process creates luminaires for both indoor and outdoor use. The quality of the outdoor range is based on the five factors, including basic materials, pre-treatment, powder coating, hardware, and process control. The company

uses selected alloys for the lowest grade of corrosion-inducing contaminants. Stainless steel components are made in 316 grade, a steel composition that ensures medical-grade corrosion resistance.

The pre-treatment process creates a high corrosion-resistant product in seven steps, including alkaline degreasing, etching, titanium passivation, and hot air drying. After pre-treatment, a UV-resistant polyester thermosetting powder coating is applied, certified according to European fire and fume regulations, and is solvent-free. The hardware used for outdoor luminaires is made from high-quality stainless steel to assure the entire quality of the product, and protection compounds avoid electrochemical corrosion.

This dedicated treatment is even reinforced by two individual trademarks: Delta Light Quali Protect® and Delta Light Supreme Texture®. The former covers the protective non-organic pre-treatment applied to the most suitable alloys to ensure long-term corrosion resistance, while the latter covers the final finish of the product in terms of both weather and UV resistance.

5 YEAR GUARANTEE



Throughout the entire design and production process,

Delta Light handles the strictest quality parameters to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process undergoes an extensive quality procedure, covering both product quality and testing. As such, each product that leaves Delta Light has been thoroughly inspected and tested, resulting in minimal returns and maximum efficiency. Product quality and safety testing according to the international IEC standards is done in our Delta Light Laboratory.


To stand by this quality promise, Delta Light offers a five-year guarantee on its entire indoor and outdoor lighting range.

Thanks to this initiative, customers can be sure that by choosing lighting solutions from Delta Light, they are investing in the future.

ouse sign

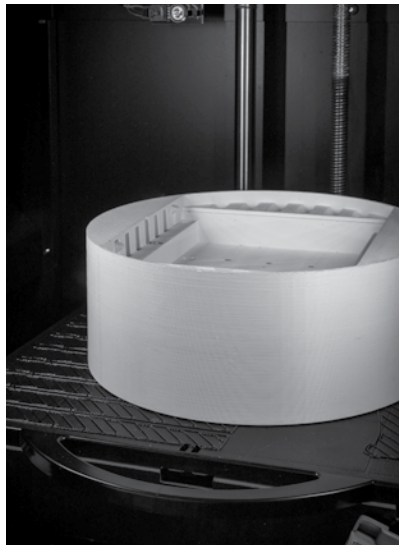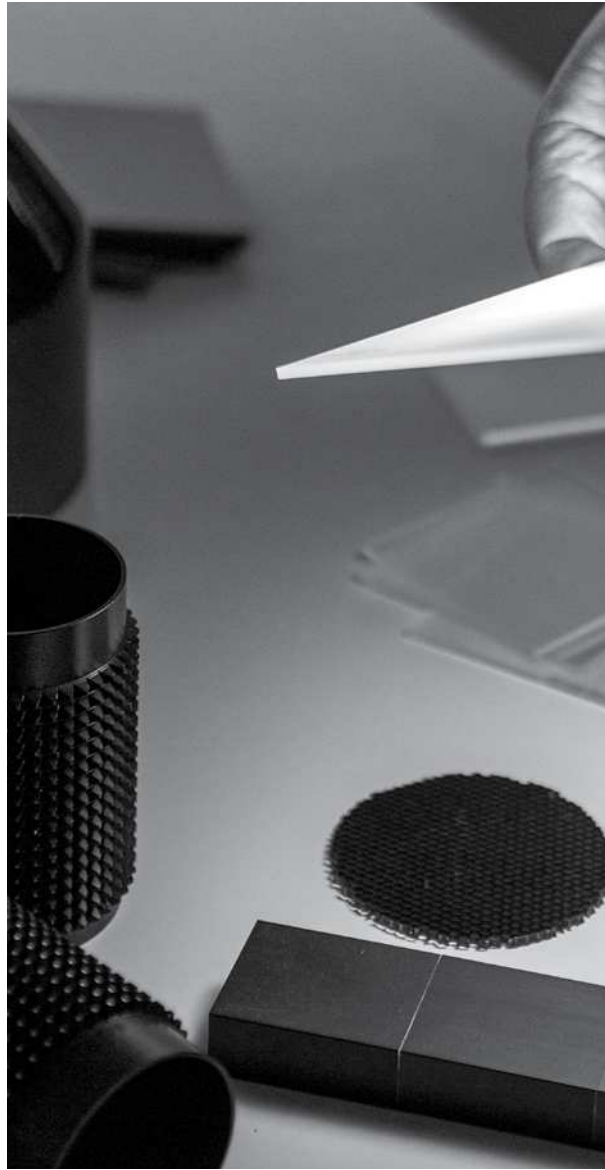



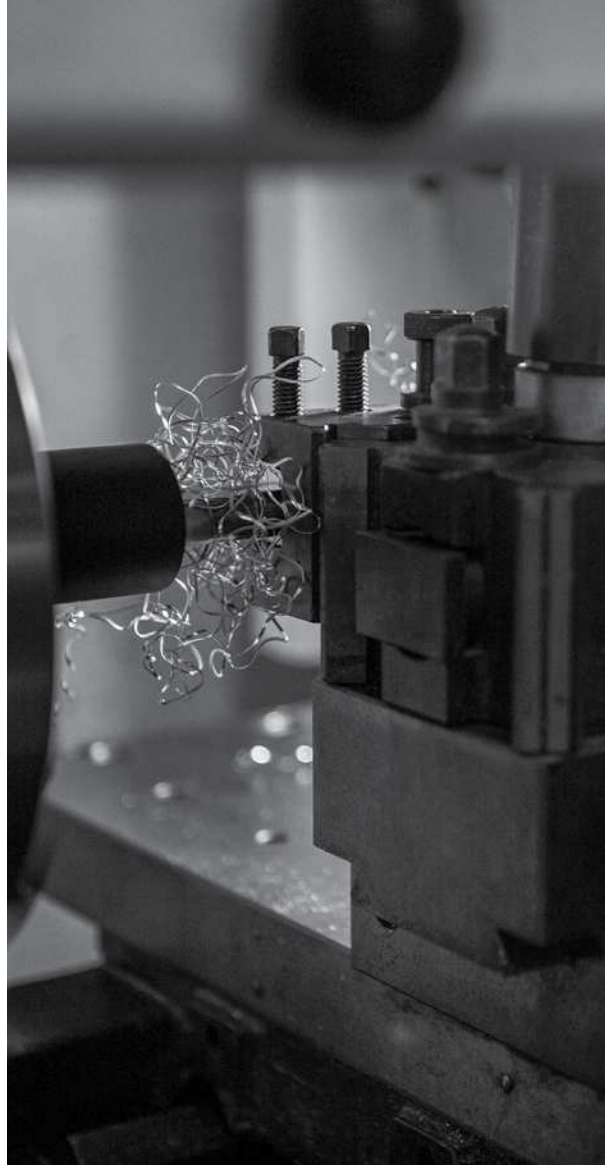



At Delta Light, we recognise that our business activities have an impact on the environment, and we take this responsibility seriously. We place great importance on ecological awareness and sustainability. Our goal is to produce light fittings that are inventive, efficient and also environmentally friendly. We constantly strive to improve our products and operations in terms of efficiency, longevity and sustainability.

With each new collection, we integrate the latest technological developments wherever possible, make improvements in recyclability and pay close attention to efficient use of materials, production and transport.

Our commitment has been recognised with prestigious awards such as the Lighting For Good Awards in 2019 and 2020. Our commitment to sustainability does not only extend to our production processes. Our headquarters in Belgium are equipped with solar panels that produce enough renewable energy to power our entire production line and our office site. We also pay a lot of attention

to recycling and waste management. Many of our luminaires are made of aluminium profiles and we make sure that they are manufactured optimally, thus minimising waste. And all that aluminium waste is collected and recycled, as aluminium is 100% reusable.

But we are also upcycling. In the autumn of 2022, together with Dutch company MVRDV, we launched High Profile, a collection of colourful lighting fixtures based on aluminium

cutting remnants from profiles. A refreshing and sustainable design that was awarded the dezeen award for best in lighting of the year 2022, an honourable mention we cherish.

We are also quite proud to offer our employees a healthy, safe and harmonious environment, both in our global offices and in our Belgian headquarters. Our sustainability efforts and commitment to the well-being of our employees earned us the bronze Ecovadis medal in 2019, and the silver in 2020, 2021 and 2022.

Just as the digital revolution has drastically changed the way we live and work, so will sustainability in the near future. Sustainability will create added value and drive economic growth, it will permeate everything we do and that will have its consequences. What consequences then? That's what we at Delta Light are looking for every day. Sustainability is not so much a destination of one big goal, but rather a path with an accumulation of smaller initiatives, where every effort counts to achieve that bigger collective result.

sustainability

is the new digital

design collabs

Throughout our history we've focused on creating lighting solutions that can enhance any building or setting. For some of these collections we have collaborated with external designers, opening up new exciting adventures in lighting. Merging the vision and concepts of these leading architects and designers with our in-house R&D and production expertise, exemplifies how Delta Light, hand-in-hand with them, continues to step into the future.





MVRDV



DELTA LIGHT®

MVRDV introduced the idea to develop a new design with Delta Light's waste material, instead of inventing a completely new product. The name stems from profile lighting as a key part of architecture which often produces offcuts as a residual product – these scrap elements became the starting point of the design. The resultant design looks critically at the manufacturing process, finding not only opportunity but also beauty in elements that are normally discarded as waste.

HIGH PROFILE

The High Profile series is a range of luminaires inspired by leftover aluminum profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast aside. The industrial look is softened by giving the profiles a colour dip; the series comes in pink, white, turquoise and random, adding MVRDV's well-known use of expressive colours to Delta Light's typical colour range. The High Profile series is a range of luminaires inspired by leftover aluminum profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast as metal."

Winner: Lighting design of the year 2022. MVRDV and Delta Light have produced a series inspired by the beauty in elements normally discarded as waste.

Judges comments: "High Profile is an ingenious use of discarded materials to create a very strong narrative. The lamp fits into a range of different aesthetics, whether you are going for pastel or metal."

dezeen
awards 2022




XY180


OMA is an international practice founded by Rem Koolhaas, operating within the traditional boundaries of architecture and urbanism. AMO, a research and design studio, applies architectural thinking to domains beyond. XY180 is a 3-piece collection of luminaires designed by OMA. The collection was born from a fascination with point, line and surface, key characters in the discourse of architecture. The collection uses precise geometry proportions. The base elements, which include a tube light and a spotlight, can be combined with a hinge, to general countless light conditions, both essential and complex.



OMA




Niteo Lighting

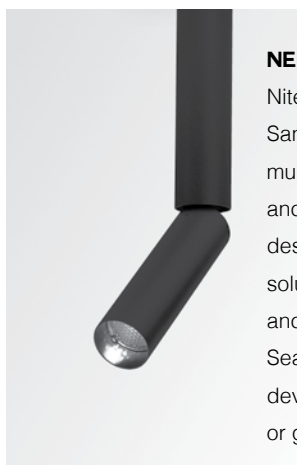

NEEDLE

Niteo is a premiere lighting design studio with offices in Seattle, San Francisco, and Singapore. With a portfolio ranging from museums to personal art collections, corporate offices to retail, and landscapes to art displays, their intimate engagement through design attention to detail is evident. Niteo delivers elegant lighting solutions via leveraging decades of experience in a collaborative and technically savvy way. Delta Light collaborated with Niteo's Seattle office to develop the Needle. This bespoke luminaire was devised to provide a playful solution in an elegant form. As a single or grouping of multiple fixtures, the slender and flexible design permits it to blend into ceilings, peek around corners, or demurely clamor attention.

Dean Skira

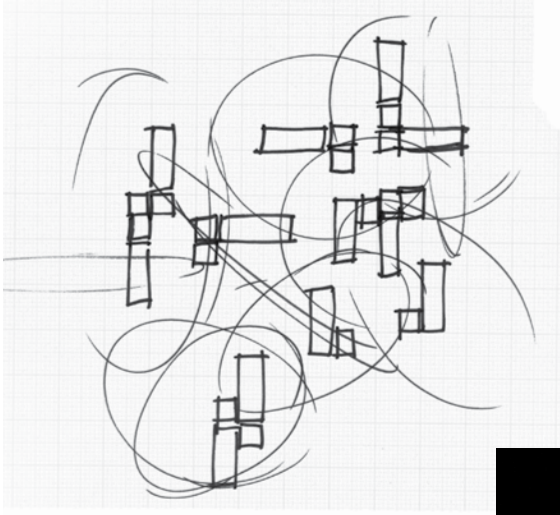

NIME - POLESANO - CONFORM

Dean Skira is the founder of Skira, an award-winning practice based in Pula (Croatia) with projects also in the EU, Middle East, Russia, Canada, and the United Kingdom. For the past 30 years, he is building and creating mostly with intangible forms while working with investors, architects, and designers to create meaningful lighting experiences.



UNStudio

SOLISCAPE

An extremely versatile and flexible system, specifically designed to create human-centric environments. Developed together with UNStudio, Soliscape combines lighting, acoustics and IOT into an aesthetically appealing solution. Soliscape presents a toolbox with flexible components to architects and designers, to create unique constellations in human-centric environments.



**Create on paper.
Imagine online.**

Impressions.



Obin.

Based on the patented ERS (Ex-Centrig Rotation System) and equipped with flat lenses, Obin fuses ultimate flexibility with supreme user comfort in a minimalistic surface mounted lighting fixture.

By adjusting the rounded backside - using the ERS system - Obin is 360° rotatable and 45° tiltable without the need of an additional hinge. On the frontside, the sleek lenses create a sense of depth without the need of real physical space. Combining both results in free space on the inside to house a DALI power supply, perfect for an easy individual controllable surface mounted lighting scheme.

I'm new
to the
range.



**Cute outside,
Functional inside**


Nime.

BY DELTA LIGHT & DEAN SKIRA

Invisible. Yet tangible.

The black hole reflects no light, but the light of Nime finds its way out.


The tangible part disappears inside its heart, and the intangible part illuminates the object. An hole of mere 10mm, a whole lot of options.

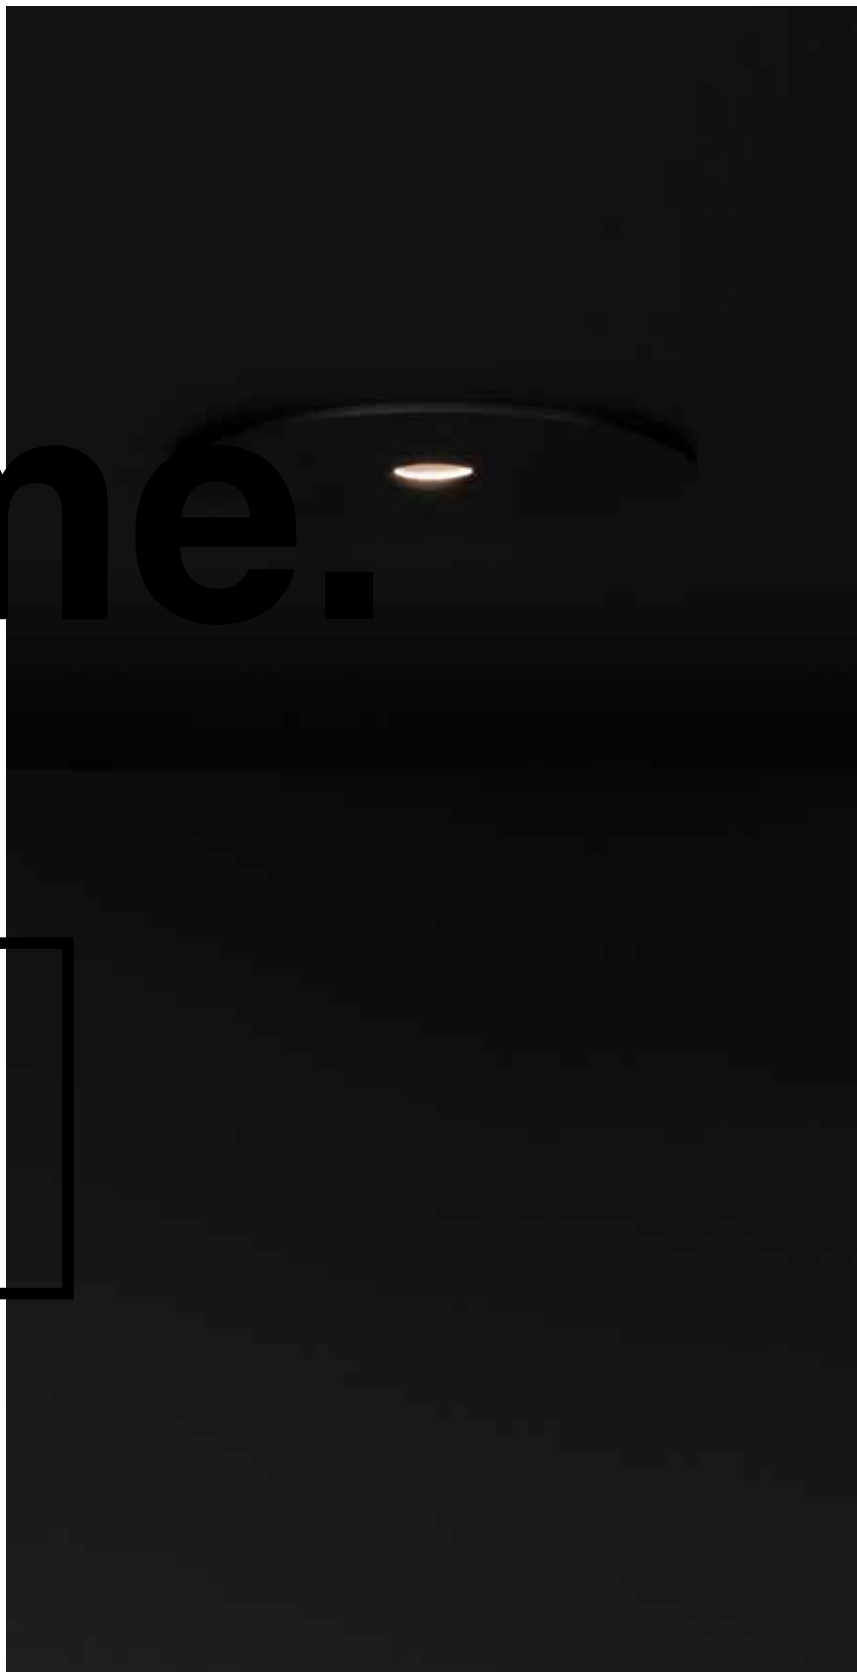



Deep





Light is important, influencing the passer-by in many ways. It impacts the inner mood, the physical health, the mental state of mind. We care for that, we study this impact and we implement our findings into our luminaires. Soft Dim technology to set the mood, state-of-the-art LEDs that help to focus during the day and relax in the evening or careful positioning of the LEDs within the design of our luminaires to enhance the human visual comfort are some examples that show we care.

Visual comfort

Gold is sunny.
Gold is joyful.
Gold is rich.
Gold is energy.
Gold highlights.
Gold stimulates.
Gold is warm.
Gold draws
attention.

Gold

unveils



Size matters*

Mini.

**Deep
Ringo**

Although we like to stand out, we like to fit in just as much. Fit in the concept, fit in the lighting design, fit in the architecture. Our miniature lighting fixtures do just that. They are designed to perform and designed to fit in. Unnoted to the eye and seamlessly integrated into any ceiling.

* this quote is open to interpretation



Gyn.

A ROUND OR SQUARE
GYPSUM LUMINAIRE.

We shed light on the architectural story of the project. Architects and interior architects are inspired by design, and the conceptual idea that goes along with it. Illuminating that story is what we are happy to support by offering aesthetically pleasing, clever and practical ways to make lighting work brilliantly.


Some examples?

Our Gyn family fully integrates into wall or ceiling and can be finished on site in any desired colour.

Our **▲IR** range combines lighting and ventilation into 1 aesthetically appealing blend.

Our trimless fixtures can be integrated in many types of ceiling, even warm or cold stretched ones.



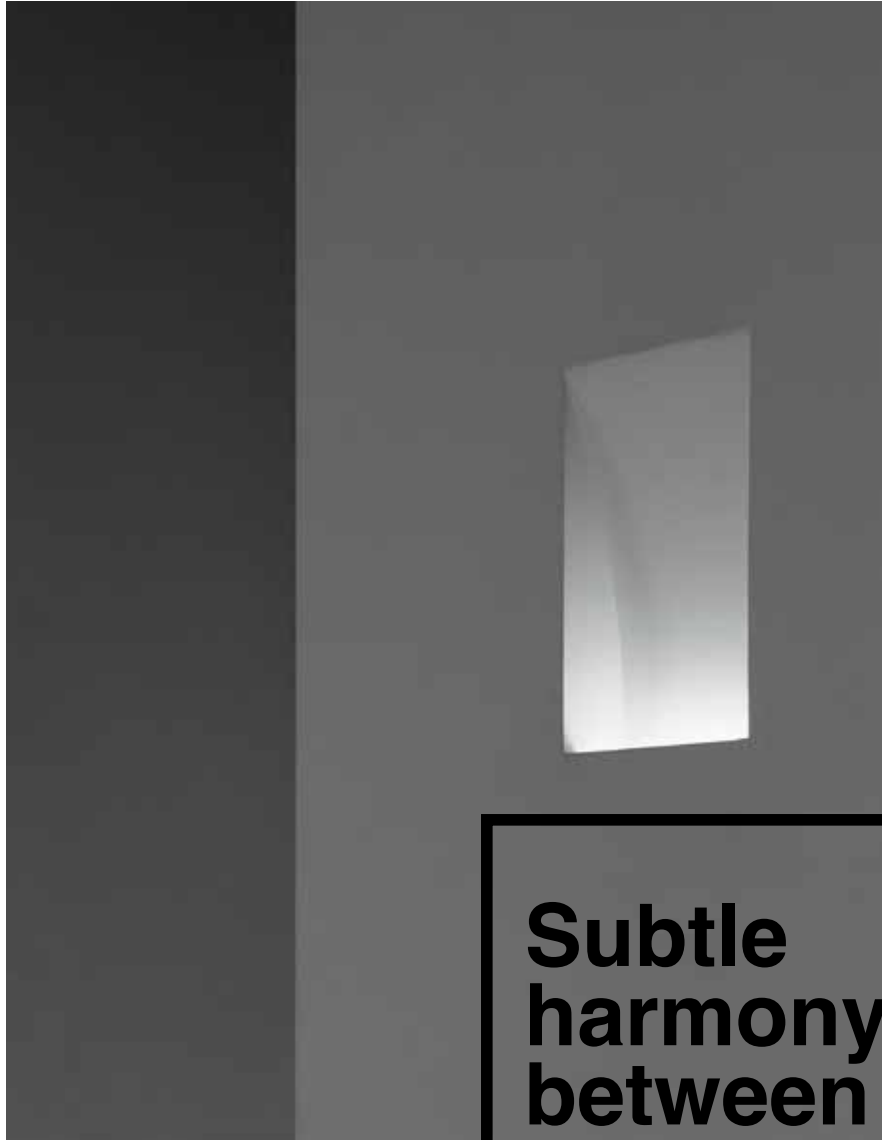

**Subtle
harmony
between
architecture
and lighting.**



BLA

is t



BLACK

the new black.

Black is mystery.
Black is shadow.
Black is power.
Black is the unknown.
Black absorbs.
Black empowers.
Black is formal.
Black is elegant.



Punk.

Step away from brave, alter yourself and dare to dare. This spiked design family breathes creativity and allows you to play with light and texture. Available in Black, Gold Coloured and Black Pure, a Black coloured finish with pure aluminum topped spikes.



Boxy.

We love a challenge and we don't step away from them. Reinventing our evergreens is one of those. Take Boxy, once a single surface mounted cube for halogen lamps, now an elaborate family of cylindrical and cubic shaped fixtures that even fit on our magnetic profile range. We strive to be one step ahead and build on what you love.





**We keep renewing
our Evergreens
because we love
them as much as
you do.**

Bowie

**Keep
your eye
on the
ball**



Twist and turn, tilt and aim, Bowie will always look the same, whatever its direction and no matter the angle you look at it.

Bowie in pure white or black easily fits in any interior and adds a touch of richness to the room.

A vertical, dark-colored light fixture is shown against a dark background. It features two circular, glowing LED lights stacked vertically. The lights are bright and create a soft glow around them. The fixture itself is a simple, rectangular profile.

Dot.Com

Since 2004

First introduced in 2004 as a single LED luminaire, upscaled in 2008 as a multiple LED luminaire with 4 or 6 LED dots, implemented in the profile section in 2010 as a module with 4 or 6 LEDs, the history of Dot.Com within the Delta Light range goes way back.






Designed around its flat optics, Haloscan combines ultraminimalistic looks with a pleasurable light effect. The light is softly spread by the plane lens and to smoothly turn and tilt, Haloscan uses the Ex-Centric Rotation System combining rotating and tilting in one swift move.



Haloscan

Play with light,
shape and
texture

**Initially created as
an XXL version of
our award winning
Tweeter.**

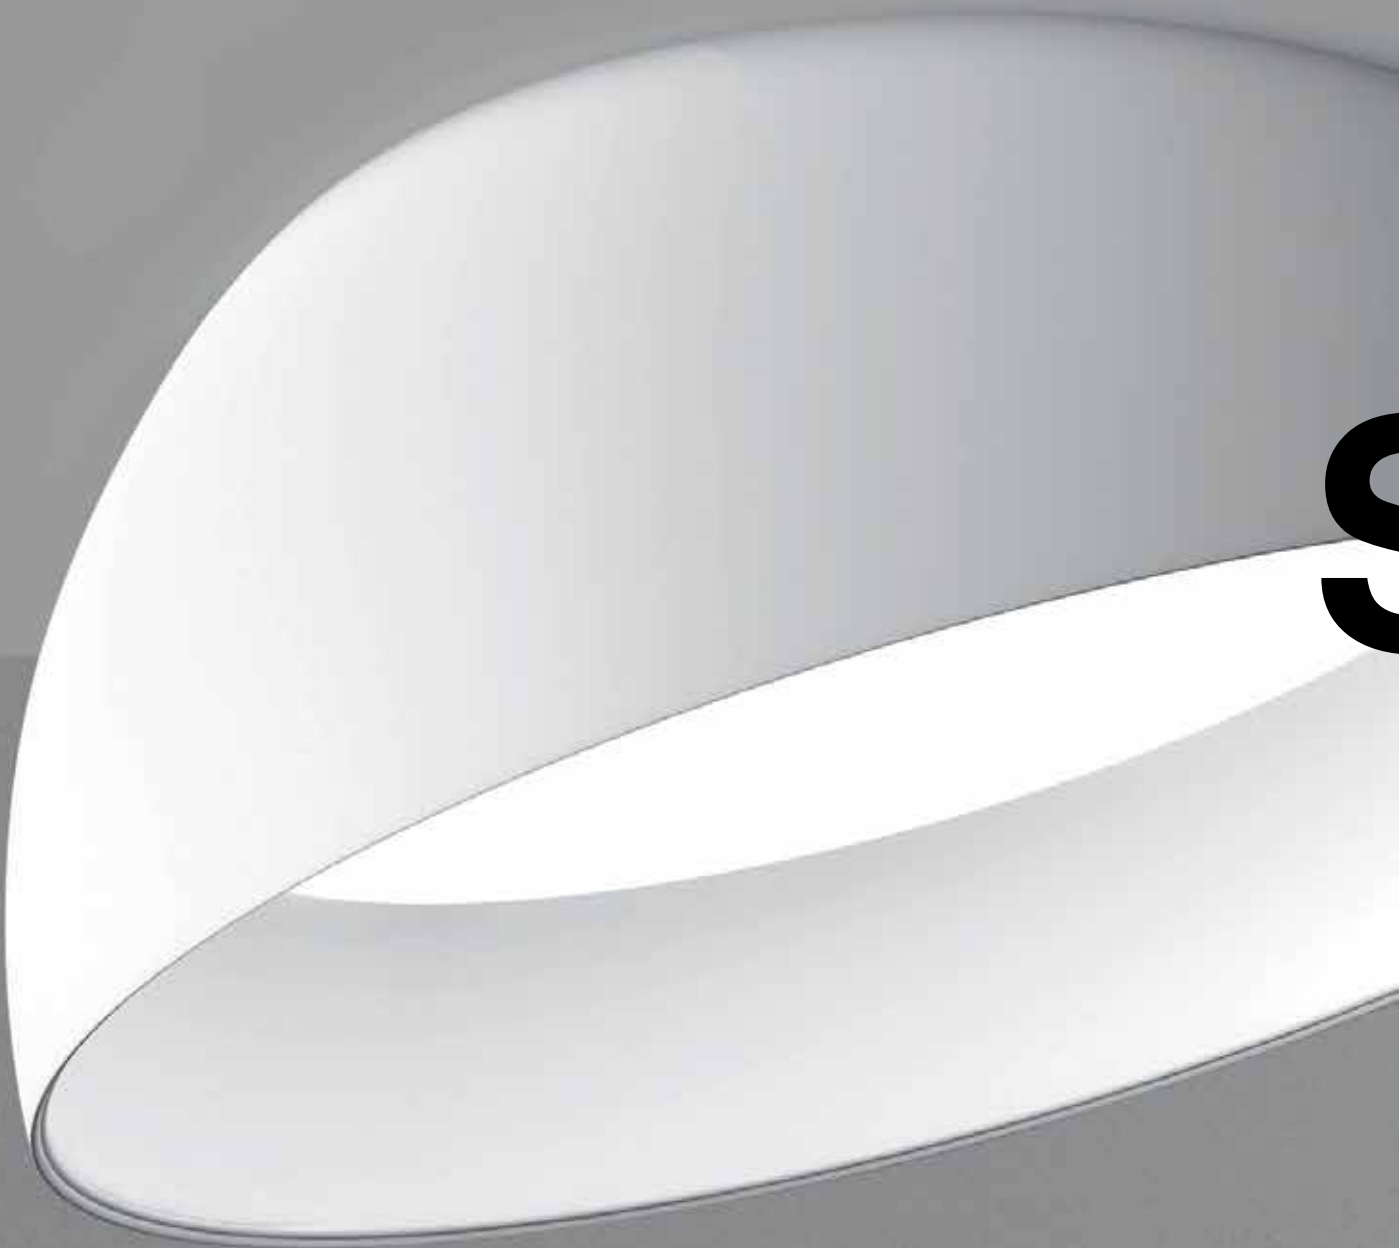




Superdome



is a powerful
and luminous
explosion of a
star

Supernova

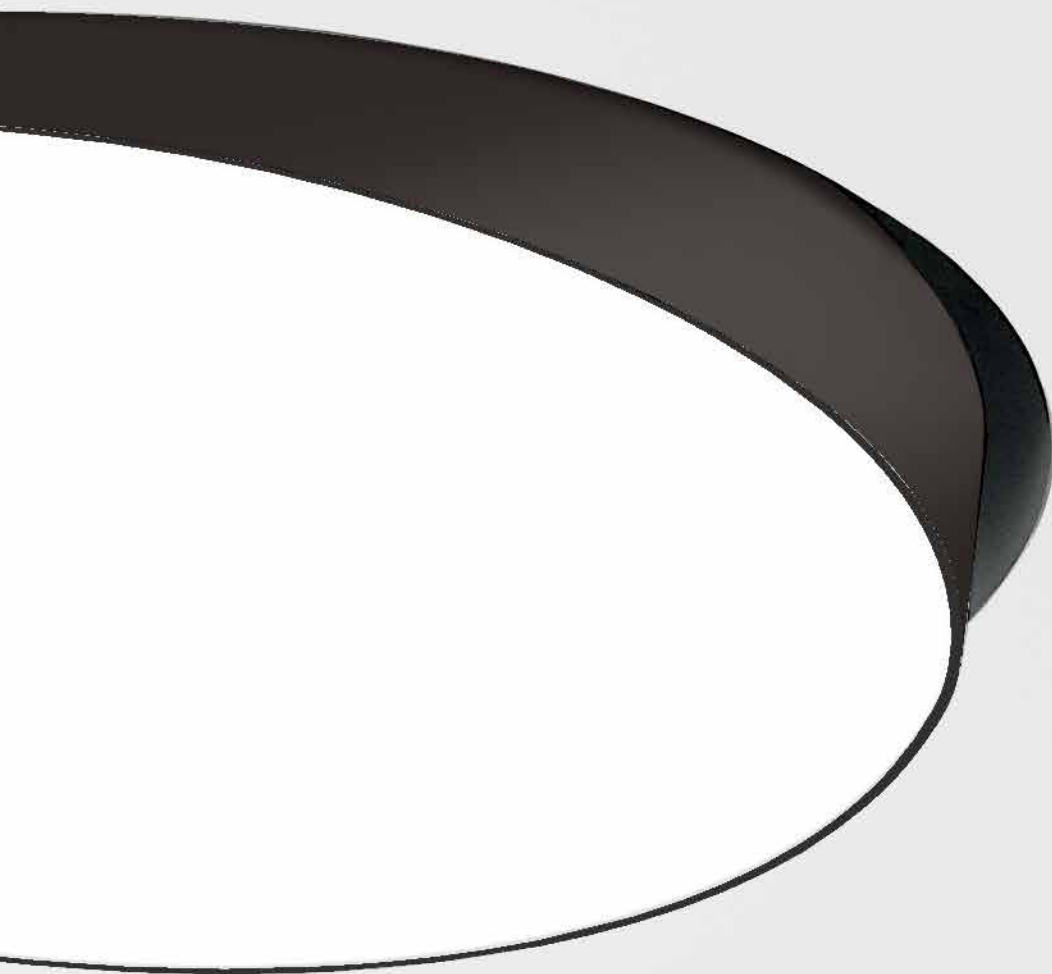


And a star it is! Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.



**The double shell
design prevents
ceiling exposure,
while the flexible
inner shell tailors
for any lighting
need.**

With Tweeter Delta Light introduced the ERS – Ex-centric Rotation System®, characterized by an asymmetrical hinge joint, combining extreme rotation and tilting abilities, all in one swift whirling motion.

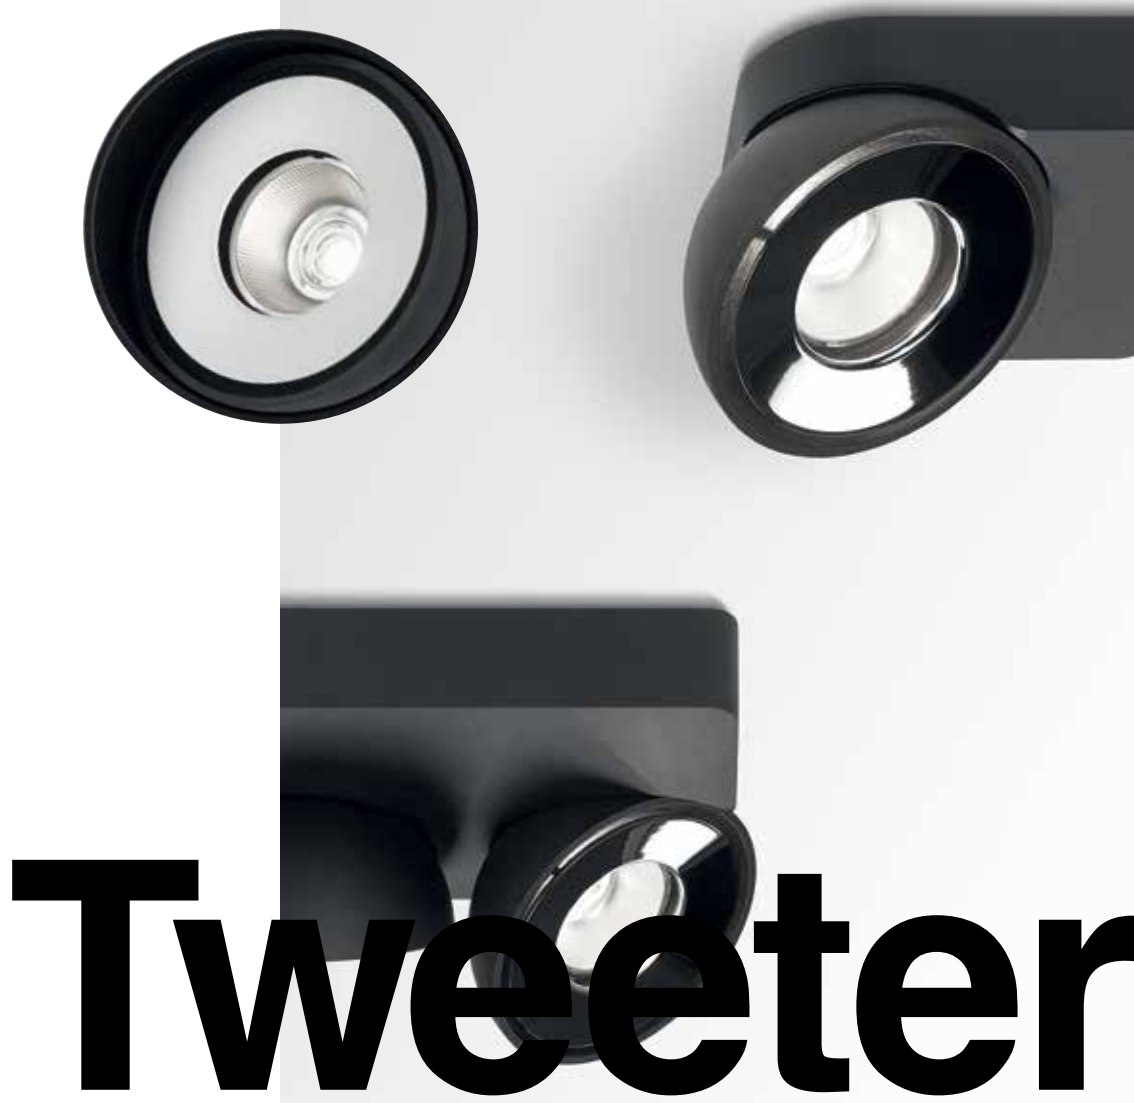

Tweeter



DAO

One And Only

Powerful blend of
form and function



A peculiar profile, both functional as decorative. The soft glow of the light along the sides of the profile makes One-And-Only float through the air, a powerful blend of form and function for an eye-catching look.

A collection of 4 purely handcrafted glass shapes, each in 4 different colours, each recognizable yet unique in all respects.
A family of suspensions that play on the visual contrast between the coloured and white blown glass, combined with different shapes and colours, also ideal for multiple compositions.
All shapes and finishes are inspired by the interplay of opacity, translucency and transparency.

Miles



**Inspired by
the interplay of
opacity,
translucency and
transparency**





SOLISCAPE



**Ben van Berkel
UNSTUDIO**




 **DELTALIGHT®**

UNStudio and **Delta Light** have joined forces to endeavour to improve the wellbeing of people in our rapidly changing work environments, where human health and the war on talent have become a primary focus for employers. Soliscape is an extremely versatile and flexible system, specifically designed to create human-centric environments.

The base of this family is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics.



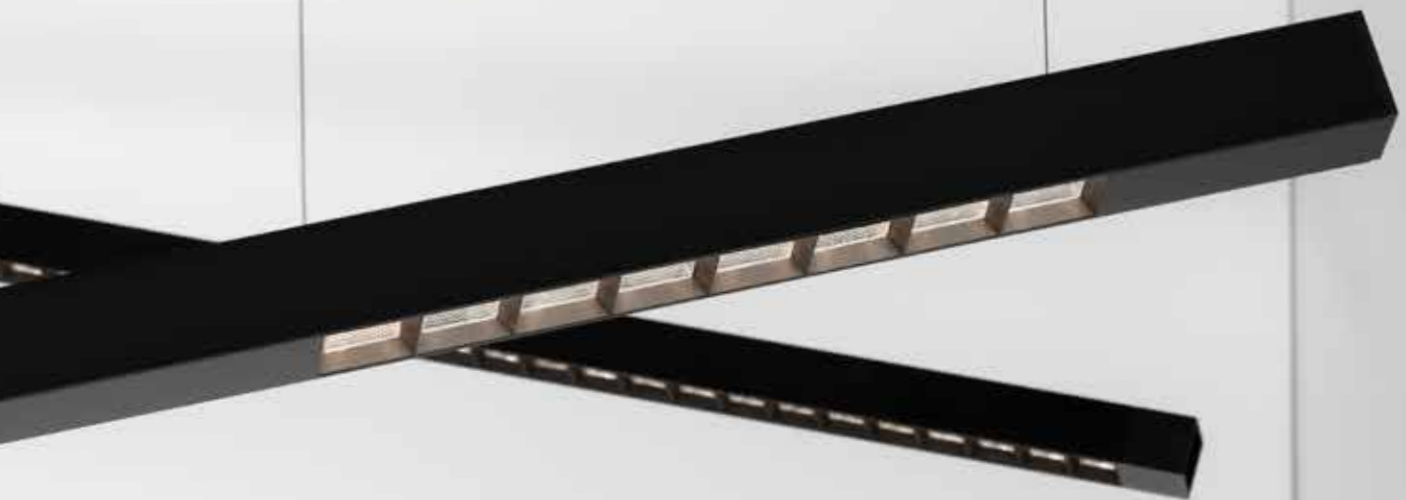

The Inform family is an extensive range of linear and curved lighting solutions, designed to be used in applications that include task areas, like landscape offices, meeting rooms, reception desks, home office,... Areas which need technical architectural lighting at its best: eye for design, eye for the user and eye for performance.

Inform

As a set of tools, Mikaline let's you paint lines of light without limits, with the room as a blank canvas and the wall, floor or ceiling as a starting point, you can go any direction you want. Create frameworks that light up the room completely, opt for a cosy setting with only indirect light towards the wall or go for a pure linear pattern with dedicated task lighting, possibilities are endless and customizable to individual preferences.

Mikaline

Like brush strokes on a blank canvas

FIND ME
ON PAGE 264

I'm new
to the
range.





Lines of light

Have a look at our profile range. It's not only about linear lighting, it's about the right linear light matching the needs of the project. How we contribute to this? By offering various designs, small guidance light or big performers, continuous light without interruptions or combined with spotlights, cut to the exact length you prefer.





Femtoline

The range of Femtoline profiles is very extensive, with each family member having its own specific design and application area. Small or wider profile design, down or down-up lighting, wall, ceiling or floor mounted, flush or tilted plexi; ... the Femtoline family offers a solution to any lighting problem. As diverse applications ask for diverse optics, Femtoline 35F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside.



**Diverse
applications
ask for
diverse
optics**



1 + 1 = 3

The combination of ultimate flexibility with the fine line of light running next to it adds to possible applications for the Shiftline M26 H, as accent lights can be combined with general light without limitations. Boost your creativity by plugging in any light module you want in the magnetic profile without interrupting the continuous light of Tagline that runs along.
A perfect example of $1 + 1 = 3$.


Go for **ALL ON** and light up all light modules at the same time, including the linear Tagline
Go for **ONLY ACCENT** to switch on the magnetic modules and create a cosy setting by highlighting the accents you prefer
Go for **ONLY GENERAL** and use the fine line of light for a soft general light effect

I'm new
to the
range.



SLM26H

+ SBL




Our Splitline and Shiftline profiles combine refinement and clean lines with a boost of flexibility thanks to the magnetic mounting of the light modules. All modules - spots, linear LED lines and pendants - can easily be positioned or repositioned into the profile without the need of any tools. But flexibility is also visible within the profiles itself as they can be used to draw various sets of black lines into the ceiling: multiple curves, corners, T- and X-sections allow the user to freely create any desired structure.

Splitline

**Curves in
all the right
places**





Make it your own. Our SLM26 F builds on the endless flexibility of our magnetic profiles, which allow a simple toolfree (re) positioning of the lights onto your ceiling. Now also available as stand-alone solution, you can easily personalize the room to your preferences. Opt for simple accent lighting or combine with indirect light for the more cosy settings, your choice!

SLMF

I'm new
to the
range.



**A personalized
floor lamp**



Panache

Put some dash into it! We've added some colours for you to explore and to experiment with. 5 new brushed colours ranging from grey to copper, accompanied with the shiny Piano Black finish. Allowing you to play with finishes, be it for a more classy look and feel or to create a modern twist within contemporary architecture.

**Flamboyant
confidence of style**





Layers of light

Shape your wall into a piece of art. The layers of light generated by Band-Oh! provide a sense of depth onto the surface its being installed on. The light not only hits the wall for a V-shaped down-up light effect, it also creates a play of light on the fixture itself.

FIND ME
ON PAGE 334

I'm new
to the
range.



Band-Oh!



A highly original ~~interpretation of an~~ archetypical concept

The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet.



Montur



Skov

Light
as a
Guide



The combination of a recessed LED array with the specific design of Skov generates visibility along the path without being obtrusive for the passer-by. The light leaving the luminaire gently falls onto the veil of Skov, revealing a soft light effect to guide you wherever the path may take you.

**A soft glow
of light during
golden hour,
at the end of
a sky-blue
summers day**

I'm new
to the
range.



Oono

Built in first instance as a family of exterior products,
Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect.
It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes.
It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.





XY180

OMA

×

DELTA LIGHT®

Inspired by
a fascination with
point, line and
surface

XY180 is a 3-piece lighting collection designed by OMA. The collection was inspired by a fascination with point, line and surface; key architectural elements. The floor, wall and ceiling lights are meant for individual and shared workspaces, but can also be applied to domestic and public interior spaces.



Octav

However you look at it, Octav draws the attention. Its design catches the eye, and after a first glimpse for sure you will be intrigued to look at it again. Depending on the inclination angle of the adjustable spotlight, other design elements stand out.



**You will be
intrigued to look
at it again**

**Showing off its
slim cylindrical
contour**



L

A photograph of a Lass-Oh! lighting fixture, which is a long, thin, cylindrical tube with a warm white glow. It is shown in a curved, snake-like shape against a dark background. The tube has a slightly textured surface and a small gap in the middle.

Lass-Oh!

Lass-Oh! glides through the room as a snake sliding through the greensward, showing off its slim cylindrical contours in combination with the miniature LED clusters hidden inside its body. The variety in shape - straight lines, circles or curved rectangles - in combination with the optional shades make of Lass-Oh! a very decorative lighting solution.



I'm new
to the
range.



Light and ambiance not only fit indoors, by combining light and architecture, outdoor settings also remains vibrant at night. With 7 different light effects and multiple installation options, Frax has been designed for every aspect of the urban architecture: any form, any material or any composition.

Frax P

Optical precision




As a range of full IP65 wall fixtures, Nocta is the example that form and function can be merged into one. Build around 4 types of optics, Nocta is available in a cylindrical or cubical design, both with a down or down-up light emission. The cubical version also has a wider brother with double light beams, a way to add a more decorative touch onto the wall.

I'm new
to the
range.



Nocta

Variety in
shapes and
optics

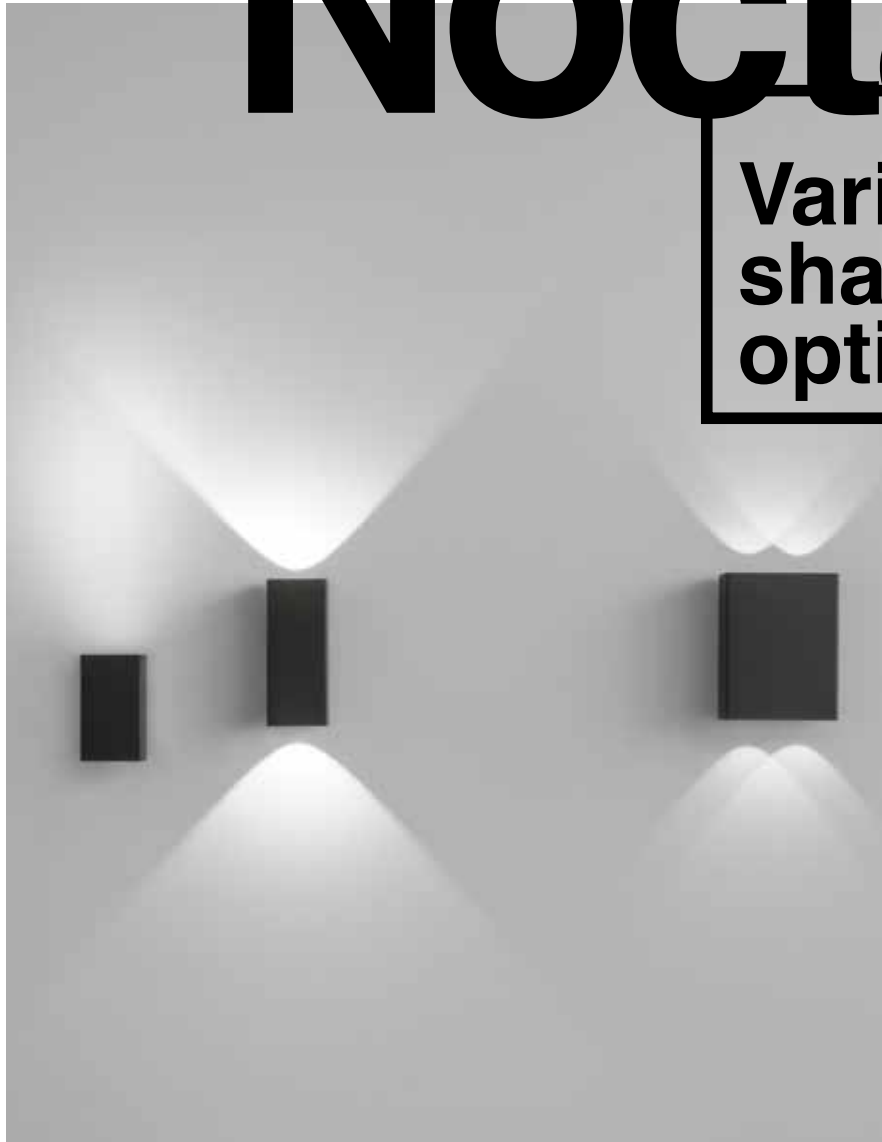

**Like a spear
thrown into
the lawn**

Stievie



Stievie is not your typical lighting bollard. The sharp pin underneath the luminaire allows you to install it in many different ways, like a spear has been thrown into the lawn. Its linear light generates a pleasant and warm light effect.







Green is fertility
Green is yellow, green is blue
Green is growth
Green is young, green is fresh
Green is calming
Green is life
Green is new,
Pine Green is new

Pine

**Green, the prime
colour of the
world**



Logic

I'm new
to the
range.



Our Logic extensions are the perfect example of our continuous quest to innovate. A range that breaths quality, shows our idea of family thinking, makes use of clever design and most of all adds to our Delta Light outdoor range. With the Logic 190 R OK as masterpiece - fully adjustable on-site without the need of opening the luminaire.

**Smart, clever,
Logic!**

Logic Linear

Based on the same principles as Logic 190 R, Logic Linear offers additional options in linear uplighting. As an individual projector or installed in a continuous line, these fittings are perfect to install around facades or other architectural elements. With its wallgrazing optics, Logic Linear easily lights up structured vertical surfaces to enhance the sense of depth of the structure and make them more lively.

**Brings any
architecture to life**

FIND ME
ON PAGE 500

I'm new
to the
range.



SAND / SOLI-SHHH

SCARLET / SOLI-SHHH

PINK GLASS

ARCTIC / SOLI-SHHH

LILAC / SOLI-SHHH

SMOKE GLASS

DARK GREY / SOLI-SHHH

LIGHT GREY / SOLI-SHHH

OPAL / MIST

AMBER GLASS

LIGHT GREY / PET FELT

DARK GREY / PET FELT

The Delta Light range has more to it than light alone. We play with light that seems intangible and combine it with materials and textures to make it tangible. Only like that it is possible to talk about "look and feel", "a touch of light" or "light that embraces you". We give an extra dimension to light.

Tactile

Play with light
and textures





BRB / BRUSHED BRONZE

PA / POLISHED ALU

ANO / ANODIZED

GC / GOLD COLOURED

W / WHITE RAL 9003

BL / BARRIER BLUE

G / GREY BROWN

PGR / PINE GREEN

BP / BLACK PURE

MMAT / GOLD MATT

GM / GOLD MARBLED

B / BLACK RAL 9005

FBR / FLEMISH BRONZE

FG / FLEMISH GOLD

AM / ALU MARBLED

BBR / BLACK BRONZE

A / ALU GREY

PB / PIANO BLACK

BRAT / BRUSHED ANTHRACITE

BRA / BRUSHED ALU

BRG / BRUSHED GOLD

BRQB / BRUSHED OLD BRONZE

BRCU / BRUSHED COPPER

N / DARK GREY

RW / RAW WHITE

**It's also
about how
good the
light looks**

Finish

Light means a lot, and light can do a lot. Light is there to create an atmosphere, light can energize and light can calm down. Light can lift up a space, light can make you feel good. Light can make you look good. But who thinks about the light? It's not only about how the light makes you look, it's also about how good the light looks.



Index.

Impressions.

**Have a look on
page 3-86 to see product details,
finishing colours & to get a first
impression of our latest
novelties.**

**Create on paper.
Imagine online.**

Projects.

**Browse to page 571-634
to get an idea on how our
products are being
applied into residential, hos-
pitality, office, retail and
public settings,
both in- and outdoors.**

INDEX

Interior Ceiling Recessed

New members to the family!



New members to the family!



New members to the family!



Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



MULTINOVA P 164



SUPERNOVA P 172



SUPERDOME P 182



DOT.COM P 206



HALOSCAN P 212



TWEETER P 218




New members to the family!

SPY P 226



UHO P 224

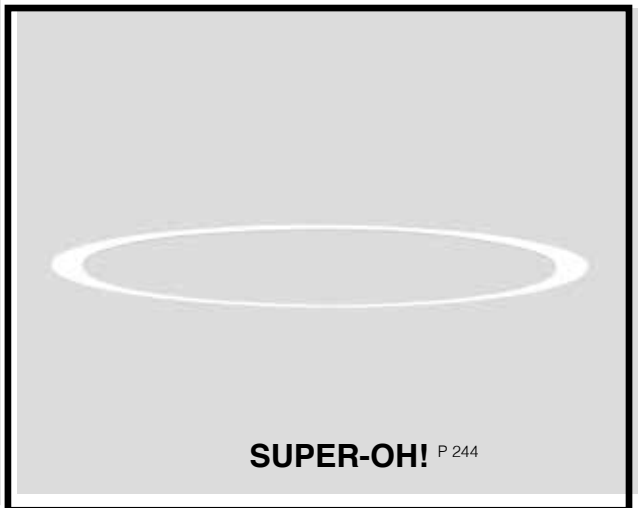

SUPER-OH! P 244



New members to the family!

INFORM P 280



D-LINER P 294

I'm not alone. You can find me in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface



DIRO SBL P 156



XY180 P 184



PUNK P 188



VIZIR P 190



HEDRA P 192



OCTAV P 196



NEEDLE P 198



BOXY P 200



DOT.COM P 206



HALOSCAN P 212



OONO P 216



TWEETER P 218



OBIN P 220



ODRON P 222



BOWIE P 222



UHO P 224



New members to the family!

SPY P 226

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



RAND P 242



SUPER-OH! P 244



SUPERLOOP P 250



SUPERNOVA P 172



GRID P 158



LASS-OH! P 262



MULTINOVA P 164



Hi! I'm new to the range.

MIKALINE P 264



SOLISCAPE P 268

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface



INFORM P 280



CONFORM P 304



ONE-AND-ONLY P 306



GIBBO P 308



STILL P 310



MILES P 312



MANTELLO P 314



CUPPA P 316



SOIREE P 318



ZOOVER P 320



HIGH PROFILE P 372


Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.




**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**

INDEX

Interior Wall Recessed

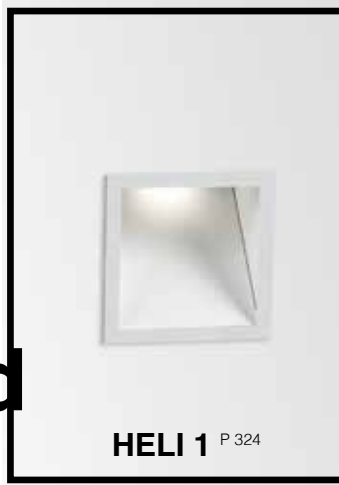

HELI 1 P 324

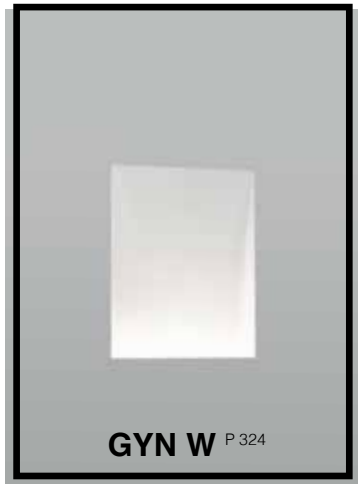

GYN W P 324



LOGIC W P 326



INLET P 328

INDEX

Interior Wall Surface



MONTUR 1 P 330




OONO W P 332



BAND-OH! P 334

Hi!
I'm new
to the
range.

I'm
new
also!

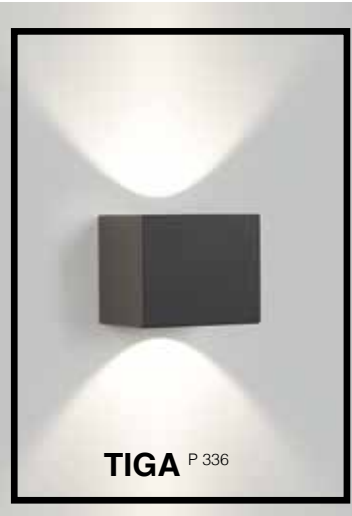

TIGA P 336



WANT-IT P 336



GALA P 336



ORIBIT P 338

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.



HEDRA P 338




VISION P 340



TOPIX P 340



BACKSPACE P 342

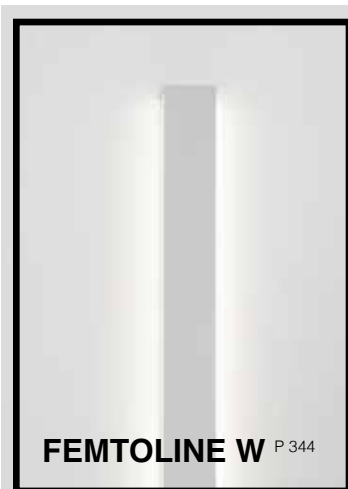

FEMTOLINE W P 344



FEMTOLINE TP P 344



Hi!
I'm new
to the
range.

HIGH PROFILE P 372



INDEX

Interior Track Lighting



INDEX

Interior Floor

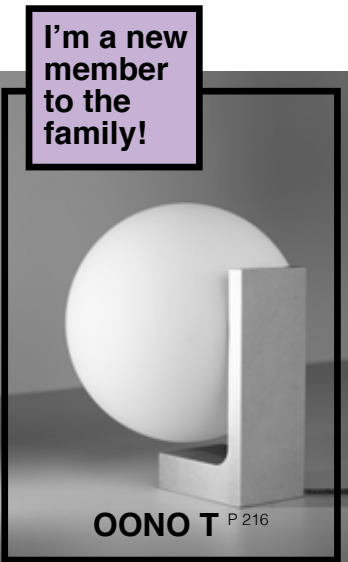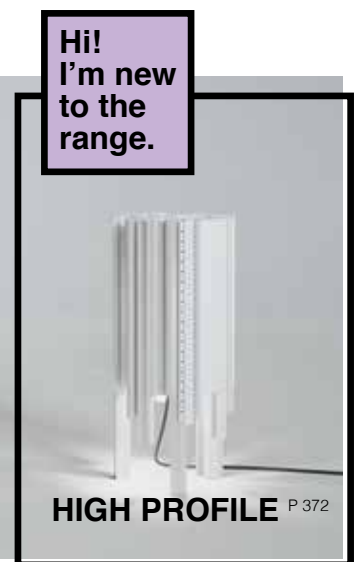


Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**


INDEX

Profiles




SPLITLINE M P 380


New members to the family!




SHIFTLINE M P 384




SPLITLINE 14
SHIFTLINE 19 P 406




SPLIT-IT P 410




TAGLINE P 414




CONNECT P 418



DOT.COM P 420



FEMTOLINE 25 P 424



FEMTOLINE 35 P 426




FEMTOLINE 35 P 430
WALLGRAZER



FEMTOLINE 35 P 424
TR / TRW


New members to the family!



FEMTOLINE W P 432



FEMTOLINE 45 P 432



ONE AND ONLY P 438



BORDERLINE P 434


Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.




OUTLINER P 436



SHEFLINE P 440



MICROLINE P 442



STREAMLINER P 446



Find out what we create with leftovers of our made-to-measure profiles P 372

I'm not alone. You can find me in other chapters within this Lighting Bible.


INDEX

Exterior Ceiling Recessed



INDEX

Exterior Ceiling Surface

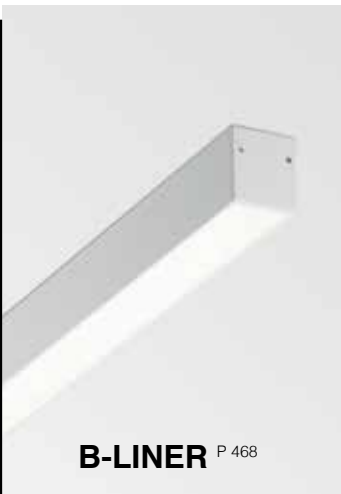


Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**


INDEX

Exterior Wall Recessed

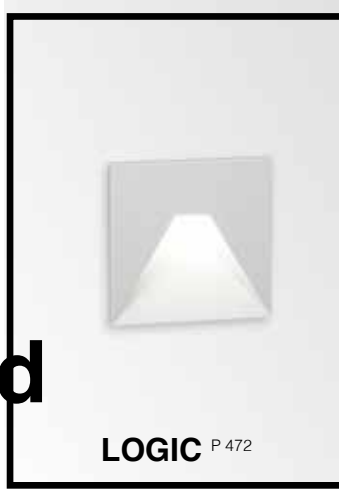

INDEX

Exterior Wall Surface

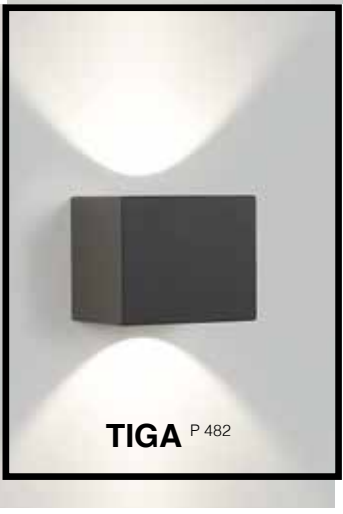

Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.

Hi!
I'm new
to the
range.

NOCTA P 484

BACKSPACE P 488

WALKER P 488

MONTUR P 490

SPY 39W P 492

KIX P 494

SOIREE P 496


POLESANO W P 536

INDEX

Exterior Floor Recessed



Hi!
We are
new to the
range.

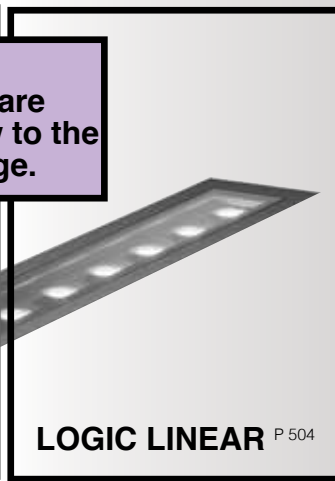

INDEX

Exterior Floor Surface



New
members
to the
family!



Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.



ELBO P 526



WALKER P 526



OBLIX P 528



STRIPER P 530



MONOPOL P 530



BAZIL P 532



POLESANO P 534

1

2

Interior

INDEX

Interior Ceiling Recessed

New members to the family!



New members to the family!




New members to the family!



Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



New members to the family!

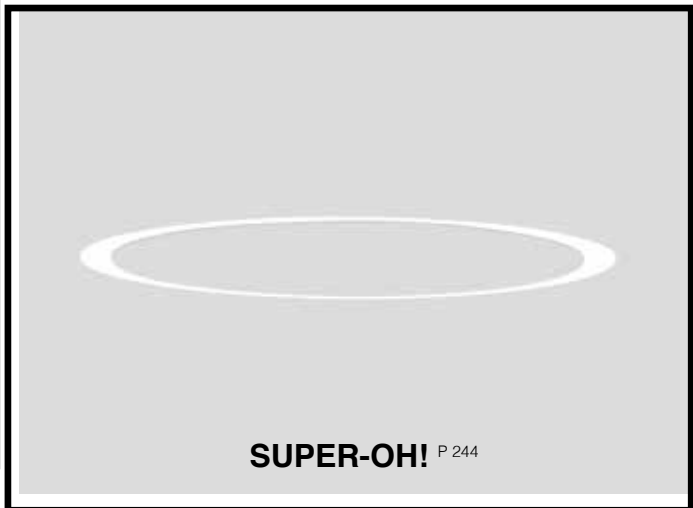

New members to the family!



I'm not alone. You can find me in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface



DIRO SBL P 156



XY180 P 184



PUNK P 188



VIZIR P 190



HEDRA P 192



OCTAV P 196



NEEDLE P 198



BOXY P 200



DOT.COM P 206



HALOSCAN P 212

New
members
to the
family!



OONO P 216



TWEETER P 218



Hi!
I'm new
to the
range.

OBIN P 220



ODRON P 222



BOWIE P 222



UHO P 224



New members to the family!

SPY P 226

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



RAND P 242



SUPER-OH! P 244



SUPERLOOP P 250



SUPERNOVA P 172



GRID P 158



LASS-OH! P 262



MULTINOVA P 164



Hi! I'm new to the range.

MIKALINE P 264



SOLISCAPE P 268

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface



INFORM P 280



CONFORM P 304



ONE-AND-ONLY P 306



GIBBO P 308



STILL P 310



MILES P 312



MANTELLO P 314



CUPPA P 316



SOIREE P 318



ZOOVER P 320



HIGH PROFILE P 372

Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**

NIME PATENTED

Design by **DEAN SKIRA** & Delta Light

The black hole reflects no light, but the light of Nime finds its way out. The tangible part disappears inside its heart, and the intangible part illuminates the object.

www.deltalight.com/nime



The fifth form of light


The first form of light is in the source.

The second is the invisible form of light itself.


The third is the form of the object revealed by light before it touches it, the fourth is the form of the shadow.

And the fifth is the form of the consequence that comprises all the previous four forms, as well as the way we feel and experience the space considering the four forms.


FOCUS




Requires acces above ceiling
 ⓘ Ø54 x 90
 max.9,5-12,5




ⓘ ØKIT x 90
 0-30° 355°



ⓘ Ø67 x 90
 max.12,5



ⓘ ØKIT x 90



ⓘ ØKIT x 150
 0-30° 355°

NIME

	NEW	NEW	NEW	NEW	
	II TRIMLESS	II TRIMLESS OK	II	II AIR	TRIMLESS

3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	35°			26412 9320 ◇	
	LED [E] 8.2W / 677lm / 700mA		26413 9320 ◇	26415 9320 ◇	26414 9320 ◇	
	LED [E] 5.7W / 519lm / 500mA	52°			26412 9330 ◇	
	LED [E] 8.2W / 677lm / 700mA		26413 9330 ◇	26415 9330 ◇	26414 9330 ◇	
	LED [E] 10.7W / 814lm / 900mA	FOCUS 20°-50°				26411 9300 ◇
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA	35°			26412 9220 ◇	
	LED [E] 8.2W / 677lm / 700mA		26413 9220 ◇	26415 9220 ◇	26414 9220 ◇	
	LED [E] 5.7W / 519lm / 500mA	52°			26412 9230 ◇	
	LED [E] 8.2W / 677lm / 700mA		26413 9230 ◇	26415 9230 ◇	26414 9230 ◇	
	LED [E] 10.7W / 814lm / 900mA	FOCUS 20°-50°				26411 9200 ◇
			◇ PRIM	◇ PRIM	◇ B ● / W ○	◇ PRIM




The absence in its presence, the presence in its absence.

A GLIMPSE OF ME
ON PAGE 6



FIND ME ONLINE

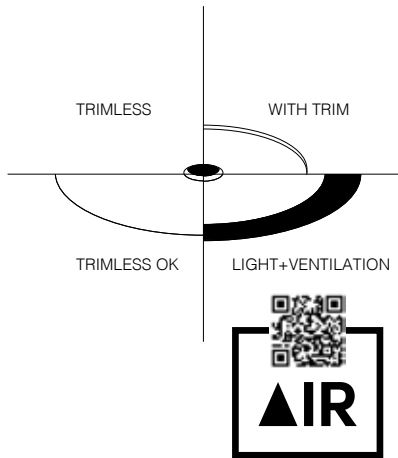

INTERIOR CEILING

Better not underestimate Nime, as the aperture of only 10mm is only the façade that hides away a host of possibilities to control your beam. Within the same opening and thanks to an ingenious set of custom optics, Nime allows you to focus the beam from 20° up to 40° and offers rotation up to 355° and tilting up to 30°, without changing its looks. With this magic trick, Nime lets you: Emphasize objects on vertical and horizontal surfaces, without visual appearance of the fitting or its source

Light up small to large objects, even when they are not aligned with the luminaire.

Perfectly address the light where it is needed, even in slope ceilings.

Create equal circles of light from both low and higher ceilings.

Furthermore Nime can also be used as light unit in our **AIR** range, a toolset that combines light and ventilation in one.



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			NIME				
			II TRIMLESS	II TRIMLESS OK	II	II AIR	TRIMLESS
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	21012 0298	<i>i</i> min. 55	R *	R	R	R *	R
1-10V DIM 15	300 90 124	<i>i</i> min. 55	R *	R	R	R *	R
DALI DIM 14	300 90 125	<i>i</i> min. 55	R *	R	R	R *	R
MOUNTING KIT TRIMLESS							
CONCRETE / PLASTERBOARD	26410 0010			R			R
MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR							
PLASTERBOARD SIDE AIR	29810 0110	Light+Ventilation				R	
	29810 0120	Light				R	
	29810 0100	Ventilation				O	
CONCRETE TOP AIR	29810 0130	Light+Ventilation				R	
	29810 0120	Light				R	
	29810 0200	Ventilation				O	

* REMOTE INSTALLATION





ENTERO

FAMILY

Inside. Outside.


Entero is engineered to perfection, both for interior and exterior applications. It enables architects and designers to achieve style continuity throughout the entire project, applying the same clean sightlines and minimal appearance to damp locations, outside ceilings and cantilevers.

Intense Energy.

Entero was designed as an answer to the energy of creation. Crafted to add value to spaces and experiences, bringing intensity to lighting schemes. A fusion of power and elegance, comfort and precision. One single range of luminaires to illuminate with power or for atmosphere, from low and high.


Furthermore Entero can also be used as light unit in our ▲IR range, a toolset that combines light and ventilation in one.

www.deltalight.com/entero

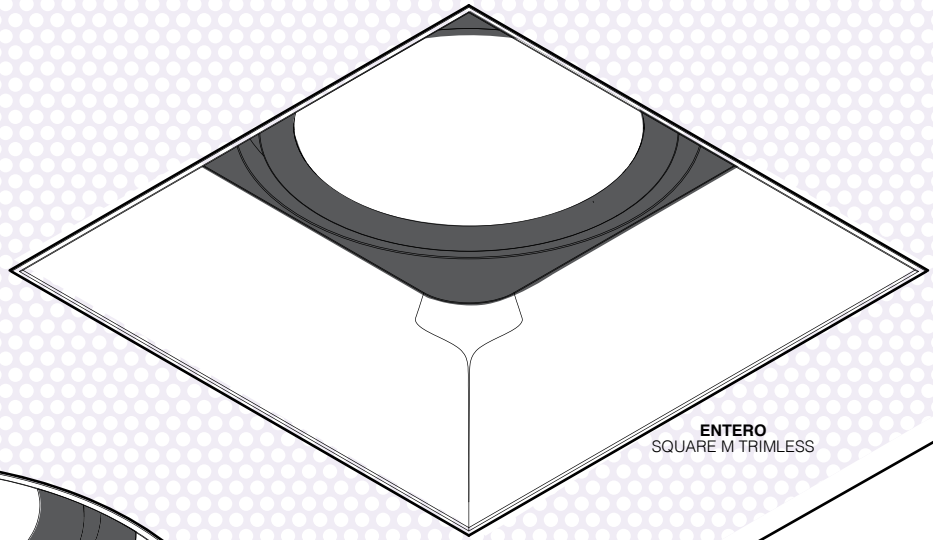

ENTERO
SQUARE M TRIMLESS

1/1



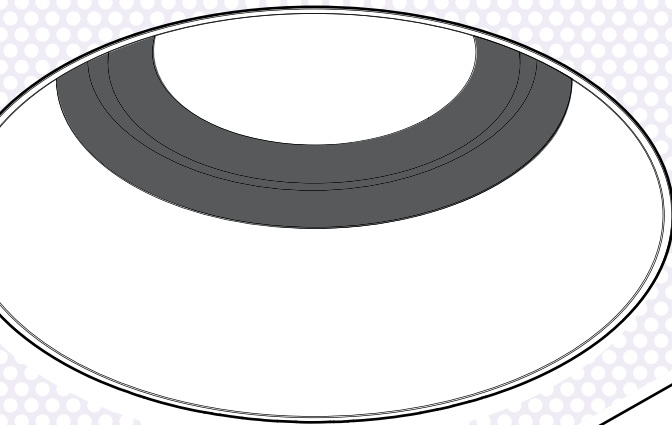


ENTERO
ROUND M TRIMLESS

What if there is only one?

One for All.

Entero is a set of lighting tools enabling architects and designers to create discrete but diverse lighting schemes, using only one luminaire type throughout the entire project. Any project. Retail, residential, public, hospitality, art... Any need. Any size. Anywhere. It is the most complete family, created to excel in any environment.

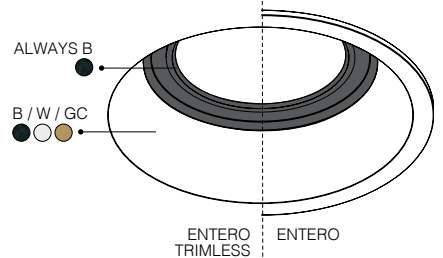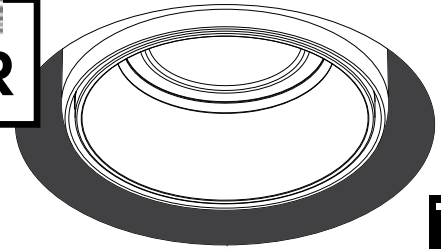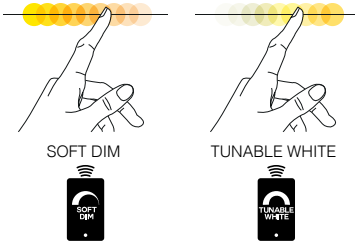


INTERIOR CEILING

	ENTERO S	ENTERO M	ENTERO L
LIGHT EFFECT			
LED	5,7W - 519lm 8,6W - 1089lm 12,4W - 1467lm	8,2W - 677lm 17,1W - 2125lm 24,6W - 2907lm	10,7W - 814lm 36,5W - 4579lm
OPTICS			
10°	•	•	•
18°		•	•
20°	•		
30°		•	•
45°	•	•	•
WALLWASH	•	•	•
COLOUR TEMPERATURE			
2700K	•	•	•
3000K	•	•	•
SOFT DIM 3000-1800K	•	•	•
TUNABLE WHITE 1800-4000K	•	•	•
TUNABLE WHITE 2700-6500K	•	•	•
CONTROL			
EXCL. POWER SUPPLY	•	•	•
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
COLOUR			
WHITE ○	•	•	•
BLACK ●	•	•	•
GOLD COLOURED ●		•	•
SHAPE			
ROUND	•	•	•
SQUARE	•	•	•
INSTALLATION			
INTERIOR	RECESSED	•	•
	RECESSED TRIMLESS	•	•
EXTERIOR	RECESSED	•	•
IP VALUE			
IP20 - SUITABLE FOR DRY LOCATIONS	•	•	•
IP44 - SUITABLE FOR DAMP LOCATION	•	•	•
IP65 - SUITABLE FOR EXTERIOR	•	•	•
ACCESSORIES			
HONEYCOMB	•	•	•
SPREAD LENS	•	•	•
LINEAR SPREAD LENS	•	•	•
SOFTENING LENS	•	•	•
GLASS SANDBLASTED SBL	•	•	•
MOUNTING KITS			
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)	•	•	•
DEEP CURVED (PLASTERBOARD)	•		
▲IR (LIGHT + VENTILATION)	•		
CSC (COLD STRETCHED CEILING)	•	•	•
WSC (WARM STRETCHED CEILING)	•	•	•


R & S

IP20
IP44
IP65

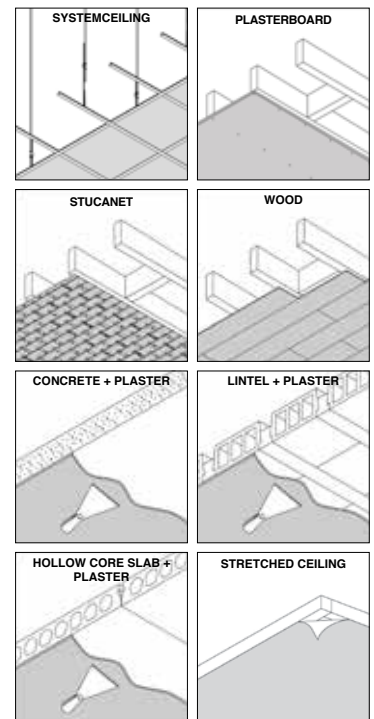


• STANDARD
• NOT FOR ALL VERSIONS

ENTERO S




ØKIT x 105



Ø76 x 100 / max.16



KIT x 110




76 x 76 x 100 / max.12,5 or 25




ENTERO SMALL

		ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	28424 9310 ◊	28401 9310 ◊	28524 9310 ◊	28501 9310 ◊
	LED [U] 8.6W / 1089lm / 500mA	28425 9320 ◊	28402 9320 ◊	28525 9320 ◊	28502 9320 ◊
	LED [U] 12.4W / 1467lm / 700mA	28425 9330 ◊	28402 9330 ◊	28525 9330 ◊	28502 9330 ◊
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA	28424 9210 ◊	28401 9210 ◊	28524 9210 ◊	28501 9210 ◊
	LED [U] 8.6W / 1041lm / 500mA	28425 9220 ◊	28402 9220 ◊	28525 9220 ◊	28502 9220 ◊
	LED [U] 12.4W / 1403lm / 700mA	28425 9230 ◊	28402 9230 ◊	28525 9230 ◊	28502 9230 ◊
SOFT DIM	3000-1800K / CRI>90	28482 9020 ◊	28480 9020 ◊	28582 9020 ◊	28580 9020 ◊
	LED [X] 10.2W / 1038lm / 500mA	28482 9030 ◊	28480 9030 ◊	28582 9030 ◊	28580 9030 ◊
	4000-1800K / CRI>90	28464 9020 ◊	28456 9020 ◊	28564 9020 ◊	28556 9020 ◊
TUNABLE WHITE	LED [Y] 9W / 979lm / 500mA	28464 9030 ◊	28456 9030 ◊	28564 9030 ◊	28556 9030 ◊
	6500-2700K / CRI>90	28427 9020 ◊	28404 9020 ◊	28527 9020 ◊	28504 9020 ◊
	LED [Y] 9W / 1087lm / 500mA	28427 9030 ◊	28404 9030 ◊	28527 9030 ◊	28504 9030 ◊


◊ B ● / GC ● / W ○




ØKIT x 115



Ø76 x 115 / max.16



KIT x 120




76 x 76 x 115 / max.12,5 or 25




ENTERO SMALL IP

		ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	28450 9320 ◊	28406 9320 ◊	28550 9320 ◊	28506 9320 ◊
	LED [U] 12.4W / 1467lm / 700mA	28450 9330 ◊	28406 9330 ◊	28550 9330 ◊	28506 9330 ◊
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA	28450 9220 ◊	28406 9220 ◊	28550 9220 ◊	28506 9220 ◊
	LED [U] 12.4W / 1403lm / 700mA	28450 9230 ◊	28406 9230 ◊	28550 9230 ◊	28506 9230 ◊
SOFT DIM	3000-1800K / CRI>90	28484 9020 ◊	28481 9020 ◊	28584 9020 ◊	28581 9020 ◊
	LED [X] 10.2W / 1038lm / 500mA	28484 9030 ◊	28481 9030 ◊	28584 9030 ◊	28581 9030 ◊
TUNABLE WHITE	4000-1800K / CRI>90	28472 9020 ◊	28459 9020 ◊	28572 9020 ◊	28559 9020 ◊
	LED [Y] 9W / 979lm / 500mA	28472 9030 ◊	28459 9030 ◊	28572 9030 ◊	28559 9030 ◊
	6500-2700K / CRI>90	28452 9020 ◊	28408 9020 ◊	28552 9020 ◊	28508 9020 ◊
	LED [Y] 9W / 1087lm / 500mA	28452 9030 ◊	28408 9030 ◊	28552 9030 ◊	28508 9030 ◊


◊ B ● / GC ● / W ○




ØKIT x 95



Ø76 x 95 / max.16



KIT x 95




76 x 76 x 95 / max.12,5 or 25




ENTERO SMALL WALLWASH

		ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	28428 9300 ◊	28405 9300 ◊	28528 9300 ◊	28505 9300 ◊
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA	28428 9200 ◊	28405 9200 ◊	28528 9200 ◊	28505 9200 ◊
	4000-1800K / CRI>90	28465 9000 ◊	28457 9000 ◊	28565 9000 ◊	28557 9000 ◊
TUNABLE WHITE	LED [Y] 9W / 979lm / 500mA	28465 9000 ◊	28457 9000 ◊	28565 9000 ◊	28557 9000 ◊
	6500-2700K / CRI>90	28466 9000 ◊	28458 9000 ◊	28566 9000 ◊	28558 9000 ◊
LED [Y] 9W / 1087lm / 500mA	28466 9000 ◊	28458 9000 ◊	28566 9000 ◊	28558 9000 ◊	


◊ B ● / GC ● / W ○

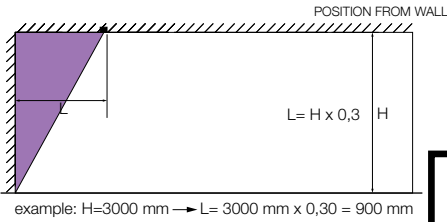


WALLWASH

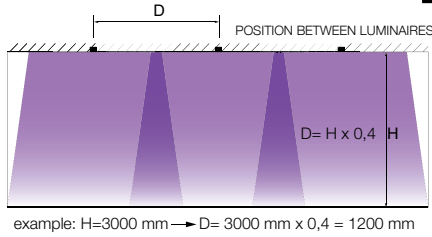

CURVED

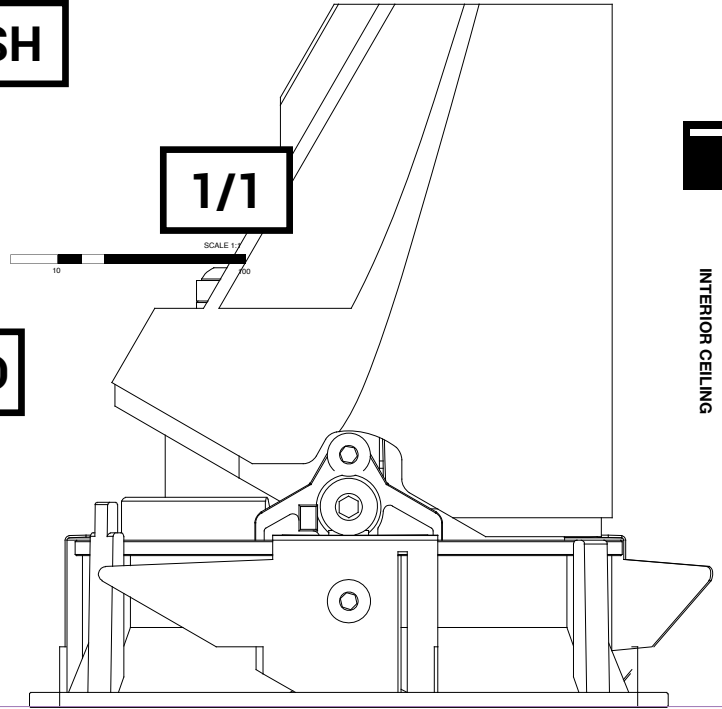

INTERIOR CEILING

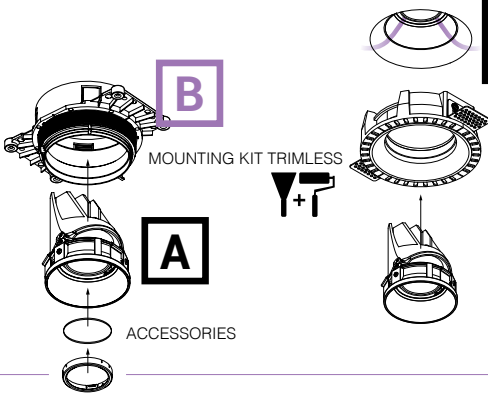

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SMALL		SMALL IP				SMALL WALLWASH			
TRIMLESS		TRIMLESS				TRIMLESS			

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE)	21012 0298	min. 55	R	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM	300 90 124	min. 55	R	R	R	R	R	R	R	R	R	R	R	R	R
DALI DIM	300 90 125	min. 55	R	R	R	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8	21012 0355	min. 86	R	R	R	R	R	R	R	R	R	R	R	R	R

MOUNTING KIT TRIMLESS

CONCRETE / PLASTERBOARD	28400 0010		R				R			R			
	28400 0040			R				R			R		
PLASTERBOARD	28500 0220	Curved shaped	R					R			R		
	28400 0070		R					R			R		
COLD STRETCHED CEILING	28400 0100			R				R			R		
	28400 0130		R					R			R		
WARM STRETCHED CEILING	28400 0160			R				R			R		

or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER

PLASTERBOARD SIDE AIR	29810 0110	Light+Ventilation	R					R			R		
	29810 0120	Light	R					R			R		
	29810 0100	Ventilation	O					O			O		
	29810 0130	Light+Ventilation	R								R		
CONCRETE TOP AIR	29810 0120	Light	R								R		
	29810 0200	Ventilation	O								O		

HONEYCOMB / GLASS / LENS

HONEYCOMB SINGLE USE	28500 0050 B	Max.500mA	A	A	A	A							
HONEYCOMB DOUBLE USE	28500 0060 B	Max.500mA	A*	A*	A*	A*							
LINEAR SPREAD LENS	28500 0010	Max.500mA	A*	A*	A*	A*							
SPREAD LENS	28500 0020	Max.500mA	A*	A*	A*	A*							
SOFTENING LENS	28500 0030	Max.500mA	A*	A*	A*	A*							
GLASS SBL	28500 0040	Max.500mA	A*	A*	A*	A*							




INSTALLATION

MOUNTING SET S2 FOR CONCRETE	28500 0190					O					O			O
------------------------------	------------	--	--	--	--	---	--	--	--	--	---	--	--	---

* NOT FOR 10° BEAM ANGLE

B

ENTERO M



NEW

ØKIT x 135

Ø92 x 130 / max.16

KIT x 130

92 x 92 x 130 / 12,5 or 25

ENTERO MEDIUM

ROUND TRIMLESS





ROUND

SQUARE TRIMLESS

SQUARE

3000K CRI>90	LED [E] 8.2W / 677lm / 700mA	IP20	10°	28429 9310 ◇	28409 9310 ◇	28529 9310 ◇	28509 9310 ◇
LED [R] 17.2W / 2101lm / 500mA LED [R] 25W / 2811lm / 700mA	18°		28430 9310 ◇	28410 9310 ◇	28530 9310 ◇	28510 9310 ◇	
	30°		28430 9320 ◇	28410 9320 ◇	28530 9320 ◇	28510 9320 ◇	
	45°		28430 9330 ◇	28410 9330 ◇	28530 9330 ◇	28510 9330 ◇	
LED [E] 8.2W / 677lm / 700mA	10°		28429 9210 ◇	28409 9210 ◇	28529 9210 ◇	28509 9210 ◇	
	18°		28430 9210 ◇	28410 9210 ◇	28530 9210 ◇	28510 9210 ◇	
	30°		28430 9220 ◇	28410 9220 ◇	28530 9220 ◇	28510 9220 ◇	
LED [R] 17.2W / 2009lm / 500mA LED [R] 25W / 2688lm / 700mA	45°		28430 9230 ◇	28410 9230 ◇	28530 9230 ◇	28510 9230 ◇	
	18°		28431 9010 ◇	28411 9010 ◇	28531 9010 ◇	28511 9010 ◇	
	30°		28431 9020 ◇	28411 9020 ◇	28531 9020 ◇	28511 9020 ◇	
SOFT DM 3000-1800K / CRI>90 LED [X] 16.1W / 1618lm / 450mA	45°	28431 9030 ◇	28411 9030 ◇	28531 9030 ◇	28511 9030 ◇		
	18°	28467 9010 ◇	28460 9010 ◇	28567 9010 ◇	28560 9010 ◇		
	30°	28467 9020 ◇	28460 9020 ◇	28567 9020 ◇	28560 9020 ◇		
TUNABLE WHITE 4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA	45°	28467 9030 ◇	28460 9030 ◇	28567 9030 ◇	28560 9030 ◇		
	18°	28432 9010 ◇	28412 9010 ◇	28532 9010 ◇	28512 9010 ◇		
	30°	28432 9020 ◇	28412 9020 ◇	28532 9020 ◇	28512 9020 ◇		
6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA	45°	28432 9030 ◇	28412 9030 ◇	28532 9030 ◇	28512 9030 ◇		

◇ B ● / GC ● / W ○



NEW

ØKIT x 150

Ø92 x 145 / max.16

KIT x 150

92 x 92 x 145 / 12,5 or 25

ENTERO MEDIUM IP

ROUND TRIMLESS





ROUND

SQUARE TRIMLESS

SQUARE

3000K CRI>90	LED [R] 17.2W / 2101lm / 500mA	IP44	18°	28453 9310 ◇	28414 9310 ◇	28553 9310 ◇	28514 9310 ◇
LED [R] 17.2W / 2101lm / 500mA	LED [R] 25W / 2811lm / 700mA		30°	28453 9320 ◇	28414 9320 ◇	28553 9320 ◇	28514 9320 ◇
			18°	28453 9210 ◇	28414 9210 ◇	28553 9210 ◇	28514 9210 ◇
LED [R] 17.2W / 2009lm / 500mA	LED [R] 25W / 2688lm / 700mA		30°	28453 9220 ◇	28414 9220 ◇	28553 9220 ◇	28514 9220 ◇
			18°	28454 9010 ◇	28415 9010 ◇	28554 9010 ◇	28515 9010 ◇
SOFT DM 3000-1800K / CRI>90 LED [X] 16.1W / 1618lm / 450mA	LED [X] 25W / 2811lm / 700mA		30°	28454 9020 ◇	28415 9020 ◇	28554 9020 ◇	28515 9020 ◇
			18°	28473 9010 ◇	28463 9010 ◇	28573 9010 ◇	28563 9010 ◇
			30°	28473 9020 ◇	28463 9020 ◇	28573 9020 ◇	28563 9020 ◇
TUNABLE WHITE 4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA	LED [Y] 25W / 2688lm / 700mA		18°	28455 9010 ◇	28416 9010 ◇	28555 9010 ◇	28516 9010 ◇
			30°	28455 9020 ◇	28416 9020 ◇	28555 9020 ◇	28516 9020 ◇
		18°	28455 9010 ◇	28416 9010 ◇	28555 9010 ◇	28516 9010 ◇	
6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA	LED [Y] 25W / 2811lm / 700mA	30°	28455 9020 ◇	28416 9020 ◇	28555 9020 ◇	28516 9020 ◇	

◇ B ● / GC ● / W ○



NEW

ØKIT x 95

Ø92 x 95 / max.16

KIT x 95

92 x 92 x 95 / 12,5 or 25

ENTERO MEDIUM WALLWASH

ROUND TRIMLESS



ROUND

SQUARE TRIMLESS


SQUARE

3000K CRI>90	LED [U] 12.4W / 1467lm / 700mA	IP20	WALL-WASH	28433 9300 ◇	28413 9300 ◇	28533 9300 ◇	28513 9300 ◇
LED [U] 12.4W / 1403lm / 700mA	LED [U] 25W / 2811lm / 700mA			28433 9200 ◇	28413 9200 ◇	28533 9200 ◇	28513 9200 ◇
				28468 9000 ◇	28461 9000 ◇	28568 9000 ◇	28561 9000 ◇
SOFT DM 4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA	LED [Y] 25W / 2811lm / 700mA			28469 9000 ◇	28462 9000 ◇	28569 9000 ◇	28562 9000 ◇
		6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA					


◇ B ● / GC ● / W ○

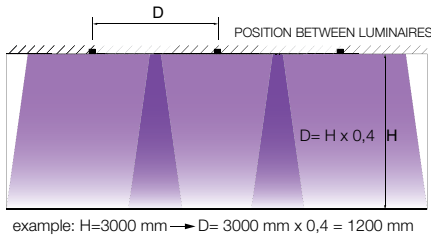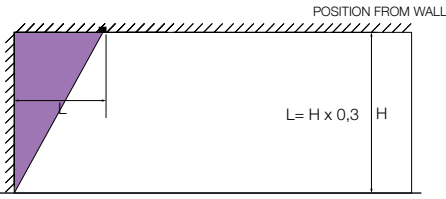

WALLWASH

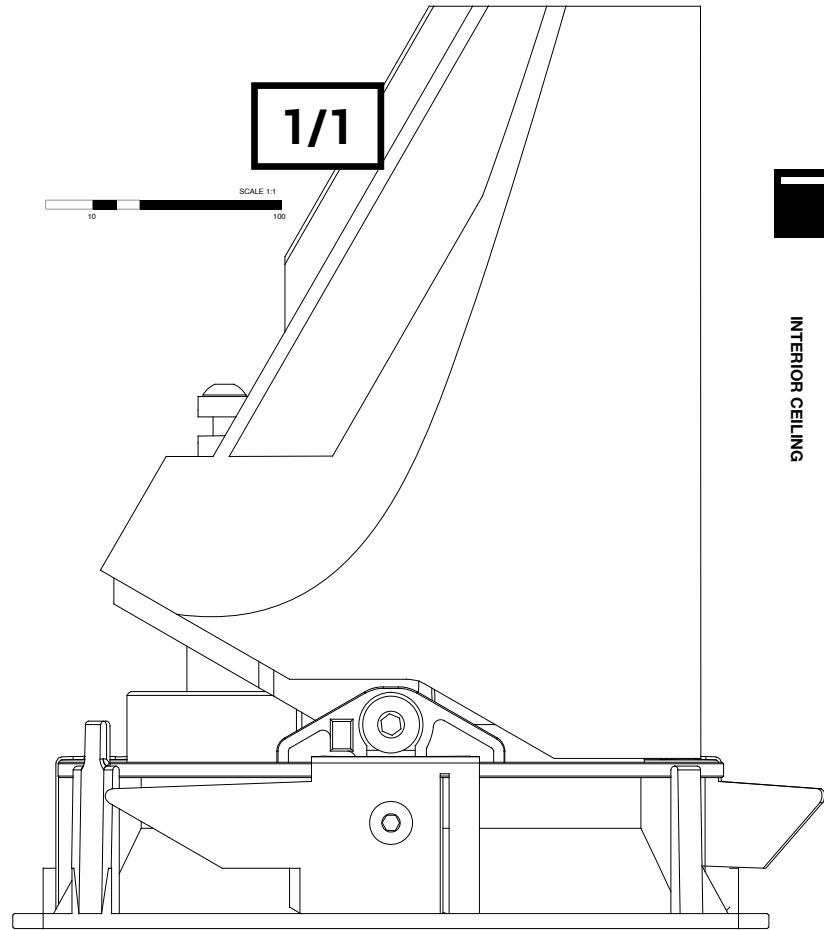

INTERIOR CEILING

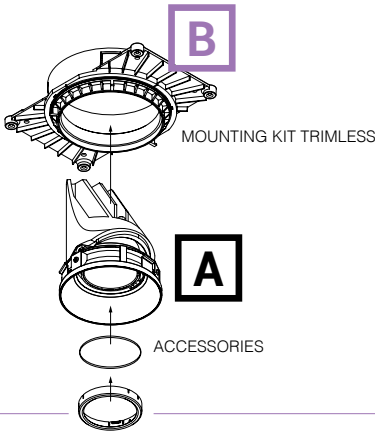

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		MEDIUM		MEDIUM IP		MEDIUM WALLWASH	
		TRIMLESS		TRIMLESS		TRIMLESS	
●	■	●	■	●	■	●	■

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE)	Code	Min. 55	R	R	R	R	R	R	R	R	R	R	R	R
11	21012 0298	Min. 55	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM	15	300 90 124	Min. 55	R	R	R	R	R	R	R	R	R	R	R
DALI DIM	14	300 90 125	Min. 55	R	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8	20	21012 0355	Min. 86	R	R	R	R	R	R	R	R	R	R	R

MOUNTING KIT TRIMLESS

CONCRETE / PLASTERBOARD	Code	R				R				R			
	28400 0020	R				R				R			
	28400 0050		R				R				R		
COLD STRETCHED CEILING	28400 0080	R				R				R			
	28400 0110		R				R				R		
WARM STRETCHED CEILING	28400 0140	R				R				R			
	28400 0170		R				R				R		

HONEYCOMB / GLASS / LENS

HONEYCOMB SINGLE USE	Code	A	A	A	A								
	28500 0110 B	A	A	A	A								
HONEYCOMB DOUBLE USE	28500 0120 B	A*	A*	A*	A*								
LINEAR SPREAD LENS	28500 0070	A*	A*	A*	A*								
SPREAD LENS	28500 0080	A*	A*	A*	A*								
SOFTENING LENS	28500 0090	A*	A*	A*	A*								
GLASS SBL	28500 0100	A*	A*	A*	A*								





INSTALLATION

MOUNTING SET S2 FOR CONCRETE	Code					O						O		
	28500 0200					O						O		

* NOT FOR 10° BEAM ANGLE

B

ENTERO L



NEW

ENTERO LARGE

ØKIT x 165

KIT x 165



Ø112 x 160 / max.16

112 x 112 x 160 / 12,5 or 25

TRIMLESS ROUND	TRIMLESS SQUARE	ROUND	SQUARE
----------------	-----------------	-------	--------

Color	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4380lm / 1050mA	IP20	Beam Angle	Trimless Round	Trimless Square	Round	Square
3000K CRI>90	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4380lm / 1050mA	IP20	10°	28434 9310	28534 9310	28417 9310	28517 9310
						18°	28435 9310	28535 9310	28418 9310	28518 9310
						30°	28435 9320	28535 9320	28418 9320	28518 9320
						45°	28435 9330	28535 9330	28418 9330	28518 9330
2700K CRI>90	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4380lm / 1050mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4380lm / 1050mA	IP20	10°	28434 9210	28534 9210	28417 9210	28517 9210
						18°	28435 9210	28535 9210	28418 9210	28518 9210
						30°	28435 9220	28535 9220	28418 9220	28518 9220
						45°	28435 9230	28535 9230	28418 9230	28518 9230
TUNABLE WHITE	6500-2700K / CRI>90	LED [Z] 17.8W / 2054lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4380lm / 1050mA	IP20	18°	28437 9010	28537 9010	28420 9010	28520 9010
						30°	28437 9020	28537 9020	28420 9020	28520 9020
						45°	28437 9030	28537 9030	28420 9030	28520 9030

◇ B ● / GC ● / W ○



NEW

ENTERO LARGE IP


Ø112 x 180 / max.16

112 x 112 x 180 / 12,5 or 25

ROUND	SQUARE
-------	--------

Color	LED [I] 30.8W / 3974lm / 900mA	LED [I] 30.8W / 3802lm / 900mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP44	Beam Angle	Round	Square
3000K CRI>90	LED [I] 30.8W / 3974lm / 900mA	LED [I] 30.8W / 3802lm / 900mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP44	18°	28421 9310	28521 9310
						30°	28421 9320	28521 9320
2700K CRI>90	LED [I] 30.8W / 3974lm / 900mA	LED [I] 30.8W / 3802lm / 900mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP44	18°	28421 9210	28521 9210
						30°	28421 9220	28521 9220
TUNABLE WHITE	6500-2700K / CRI>90	LED [Z] 17.8W / 2054lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP44	18°	28423 9010	28523 9010
						30°	28423 9020	28523 9020

◇ B ● / GC ● / W ○



NEW

ENTERO LARGE WALLWASH


ØKIT x 165

Ø112 x 160 / max.16


TRIMLESS ROUND	ROUND
----------------	-------

Color	LED [I] 16.4W / 2294lm / 500mA	LED [I] 16.4W / 2195lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP20 WALL-WASH	Beam Angle	Trimless Round	Round
3000K CRI>90	LED [I] 16.4W / 2294lm / 500mA	LED [I] 16.4W / 2195lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP20 WALL-WASH		28477 9300	28474 9300
							28477 9200	28474 9200
2700K CRI>90	LED [I] 16.4W / 2294lm / 500mA	LED [I] 16.4W / 2195lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP20 WALL-WASH		28477 9300	28474 9300
							28477 9200	28474 9200
TUNABLE WHITE	6500-2700K / CRI>90	LED [Z] 17.8W / 2054lm / 500mA	LED [E] 10.7W / 814lm / 900mA	LED [I] 36.5W / 4579lm / 1050mA	IP20 WALL-WASH		28479 9000	28476 9000

◇ B ● / GC ● / W ○


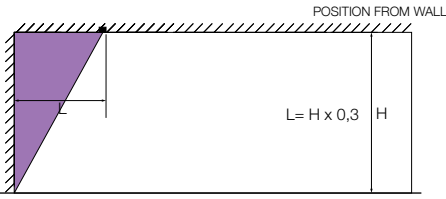


example: $H=3000\text{ mm} \rightarrow L= 3000\text{ mm} \times 0,30 = 900\text{ mm}$

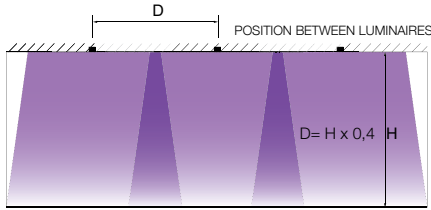

example: $H=3000\text{ mm} \rightarrow D= 3000\text{ mm} \times 0,4 = 1200\text{ mm}$

WALLWASH

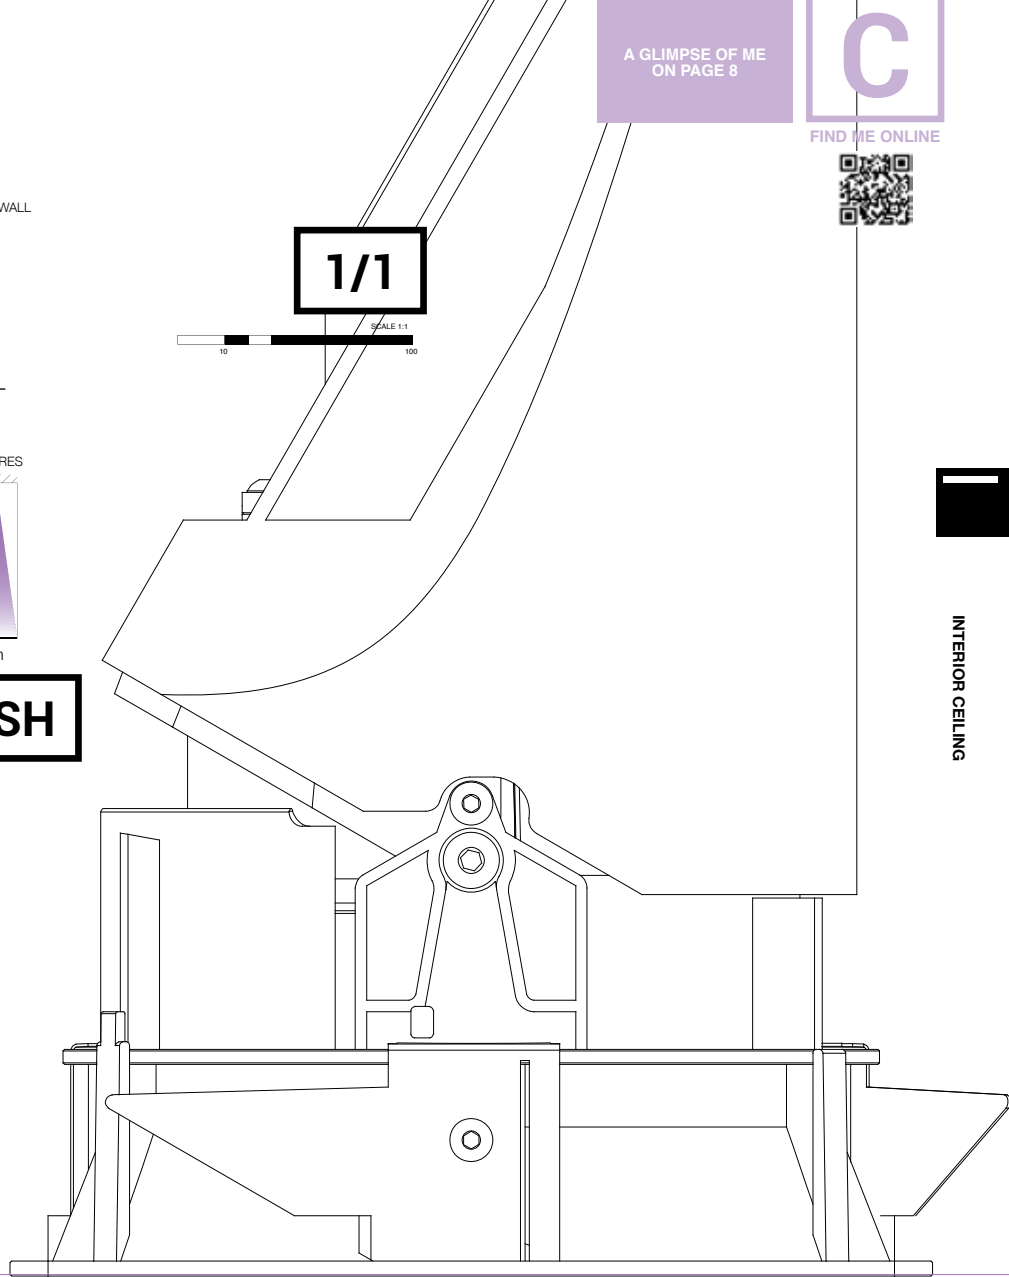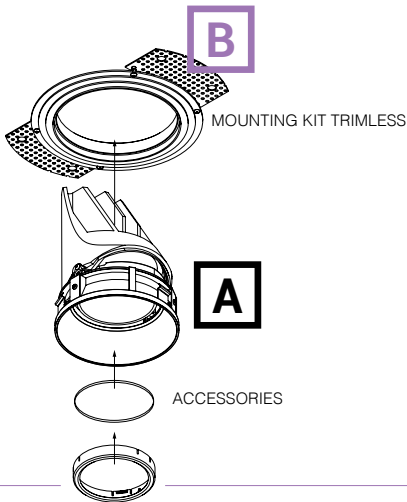

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	REQUIREMENT / OPTION / ACCESSORY											
	LARGE				LARGE IP				LARGE WALLWASH			
	TRIMLESS				TRIMLESS				TRIMLESS			
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
1-10V DIM 16	300 90 63	ⓘ min. 84	R	R	R	R	R	R	R	R	R	R
DALI DIM 16	300 90 63	ⓘ min. 84	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8 20	21012 0355	ⓘ min. 86	R	R	R	R	R	R	R	R	R	R
MOUNTING KIT TRIMLESS												
CONCRETE / PLASTERBOARD	28400 0030		R				R			R		
	28400 0060			R			R					
COLD STRETCHED CEILING	28400 0090		R				R			R		
	28400 0120			R			R					
WARM STRETCHED CEILING	28400 0150		R				R			R		
	28400 0180			R			R					
HONEYCOMB / GLASS / LENS												
HONEYCOMB SINGLE USE	28500 0170 B			A	A	A	A					
HONEYCOMB DOUBLE USE	28500 0180 B	Max.900mA for 1 accessory	A*	A*	A*	A*						
LINEAR SPREAD LENS	28500 0130		A*	A*	A*	A*						
SPREAD LENS	28500 0140	Max.800mA for 2 accessories	A*	A*	A*	A*						
SOFTENING LENS	28500 0150		A*	A*	A*	A*						
GLASS SBL	28500 0160		A*	A*	A*	A*						
INSTALLATION												
MOUNTING SET S2 FOR CONCRETE	28500 0210					O				O		O

* NOT FOR 10° BEAM ANGLE


B

IMAX


Where the initial evolution in LED and optics focused on better output, smaller chips and longer lifetime, the second evolution is again shifting to user comfort with more precise optics and better light control. As the purpose of the iMax II family is to provide the best visual comfort to the user - thanks to its recessed LED engine - this range is perfect to build further on this evolution: improved efficiency, improved beam angles and the possibility to combine all versions as they use uniform LED engines.

www.deltalight.com/imax

FAMILY

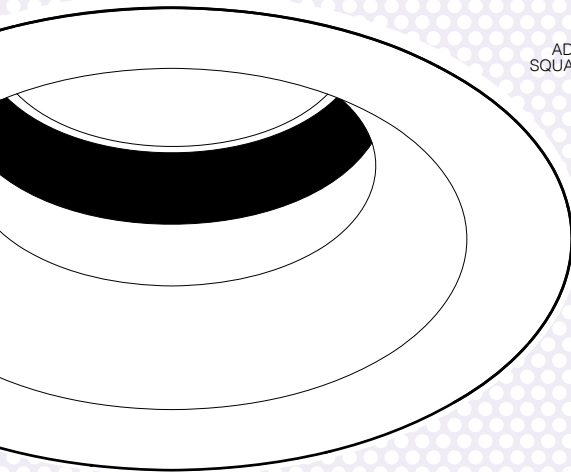

IMAX II
ADJUSTABLE ROUND

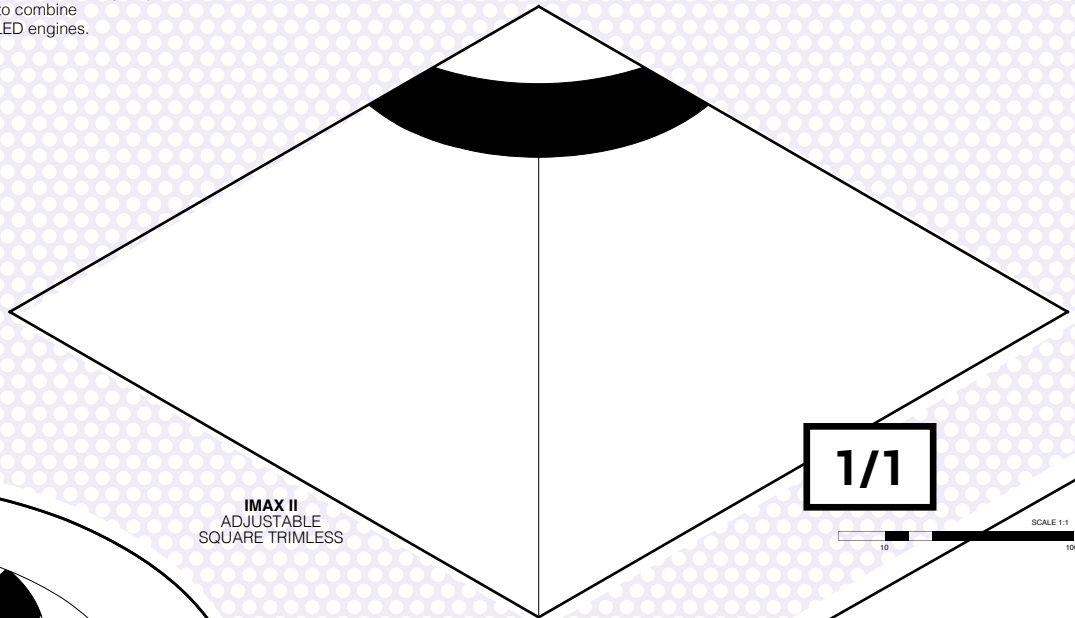


IMAX II
ADJUSTABLE
SQUARE TRIMLESS

1/1



The round versions with trim within the range are available with a clear glass, offering IP54. This enables you to continue minimalism and uniformity throughout bathrooms, wellness areas and other indoor damp locations.

iMax II fits in The Soft Ceiling concept from Delta Light, as it focuses on minimal appearance, giving focus to the light instead of the fixture. As such, the collection fuses Delta Light's aspirations for design sophistication and attention to detail, with precise engineering and premium materials, resulting in minimal fixtures with maximum impact. The interchangeable tubes and colour finishes allow you to apply luminaires that disappear into the background.W



SOFT DIM



	IMAX II ADJUSTABLE		
	CL	LP	MP
LIGHT SOURCE			
LED	3,2W - 319lm	6,1W - 775lm 9W - 1076lm	11,7W - 1522lm 17,1W - 2125lm
OPTICS			
6°	•		
12°		•	
18°			•
20°		•	
26°			•
33°		•	
39°			•
45°			•
COLOUR TEMPERATURE			
2700K	•	•	•
3000K	•	•	•
SOFT DIM 3000-1800K			•
CONTROL			
EXCL. POWER SUPPLY	•	•	•
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
SHAPE			
ROUND	•	•	•
SQUARE	•	•	•
COLOUR LUMINAIRE			
WHITE ○	•	•	•
BLACK ●	•	•	•
COLOUR TUBE			
WHITE ○	•	•	•
BLACK ●	•	•	•
GOLD MATT ●	•	•	•
INSTALLATION			
INTERIOR	RECESSED	•	•
	RECESSED TRIMLESS	•	•
IP VALUE			
IP20 - FOR DRY LOCATIONS	•	•	•
IP54 - FOR DAMP LOCATIONS (+IP TUBE)	•	•	•
ACCESSORIES			
HONEYCOMB	•	•	•
SPREAD LENS		•	•
LINEAR SPREAD LENS		•	•
SOFTENING LENS		•	•
GLASS SBL		•	•
MOUNTING KITS			
O.F.A. ONE FOR ALL	•	•	•
CSC COLD STRETCHED CEILING	•	•	•
WSC WARM STRETCHED CEILING	•	•	•

• STANDARD
• NOT FOR ALL VERSIONS


HIGH EFFICIENCY

Apart from the high light transmission of the lens for optimum efficiency, its specific construction creates a focal point that is not inside the luminaire, but at the height of the opening in the ceiling. In this way, every single ray of light produced by the LED engine is being directed through the lens towards the opening of the iMax II luminaire. This reduces the spill light inside the luminaire and increases its efficiency.

EFFICIENCY OF LED +
HEATSINK +
OPTICAL SYSTEM

87%

NO SPILL LIGHT
INSIDE THE LUMINAIRE

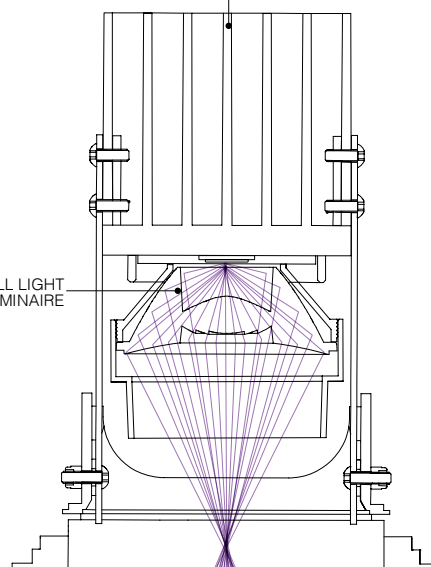

80%

EFFICIENCY
OF LUMINAIRE



UGR
<16

VISUAL COMFORT

INTERIOR CEILING

IMAX

The iMax II range combines premium LED engines with precise optics, delivering high performance, maximum efficacy and high quality illumination. iMax II is using lenses out of plexiglass HW55, a material able to withstand high temperatures and allowing lumen packages up to 2000lm. Next to the high output, the lenses allow for a perfect control of the beam angle and a high uniformity on the light emitting surface, which results in reduced glare. Furthermore, if a different beam angle is required, the lenses can easily be interchanged.



Ø98 x 125 / max.25

Min. recessed volume 200 x 200 x 125mm

Ø98 x 125 / max.25

Min. recessed volume 200 x 200 x 125mm

ØKIT x 160

Min. recessed volume 180 x 180 x 160mm

IMAX II ADJUSTABLE LP

UCR <16




ROUND

SQUARE

TRIMLESS

3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	12°	24210 9310 ◊	24217 9310 ◊	24214 9310
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		20°	24210 9320 ◊	24217 9320 ◊	24214 9320
			33°	24210 9330 ◊	24217 9330 ◊	24214 9330
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	12°	24210 9210 ◊	24217 9210 ◊	24214 9210	
		20°	24210 9220 ◊	24217 9220 ◊	24214 9220	
		33°	24210 9230 ◊	24217 9230 ◊	24214 9230	
		45°	24227 9030 ◊	24229 9030 ◊	24231 9030	

◊ B ● / W ○



Ø98 x 155 / max.25

Min. recessed volume 350 x 350 x 155mm

Ø98 x 155 / max.25

Min. recessed volume 350 x 350 x 155mm

ØKIT x 190

Min. recessed volume 300 x 300 x 190mm

IMAX II ADJUSTABLE MP

UCR <16




ROUND

SQUARE

TRIMLESS

3000K CRI>90	LED [R] 11.6W / 1524lm / 350mA LED [R] 17.2W / 2101lm / 500mA	IP20	18°	24211 9310 ◊	24218 9310 ◊	24215 9310
2700K CRI>90	LED [R] 11.6W / 1458lm / 350mA LED [R] 17.2W / 2009lm / 500mA		26°	24211 9320 ◊	24218 9320 ◊	24215 9320
			39°	24211 9330 ◊	24218 9330 ◊	24215 9330
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	18°	24211 9210 ◊	24218 9210 ◊	24215 9210	
		26°	24211 9220 ◊	24218 9220 ◊	24215 9220	
		39°	24211 9230 ◊	24218 9230 ◊	24215 9230	

◊ B ● / W ○



Ø98 x 110 / max.25

Ø98 x 110 / max.25

ØKIT x 145

IMAX II ADJUSTABLE CL

UCR <16

ROUND


SQUARE

TRIMLESS

3000K CRI>90	LED [F] 3.2W / 319lm / 1050mA	IP20	6°	24220 9310 ◊	24225 9310 ◊	24224 9310
2700K CRI>90	LED [F] 3.2W / 280lm / 1050mA		6°	24220 9210 ◊	24225 9210 ◊	24224 9210

◊ B ● / W ○



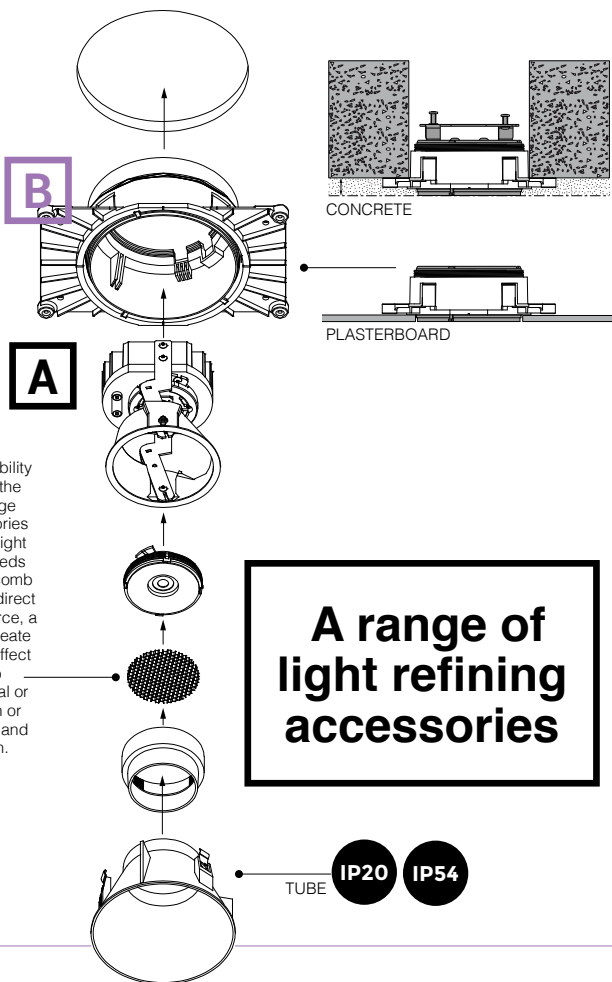

To offer even more flexibility and design freedom to the lighting designer, a range of light refining accessories is available to alter the light effect to the specific needs of the setting. A honeycomb to further minimize the direct glare from the light source, a sandblasted glass to create a diffuse general light effect and 3 specific lenses to either create a more oval or a wider light distribution or to smoothen the edges and create a softer transition.

A range of light refining accessories

INTERIOR CEILING

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		ADJUSTABLE LP		ADJUSTABLE MP		ADJUSTABLE CL	
		TRIMLESS		TRIMLESS		TRIMLESS	
●	■	●	■	●	■	●	■

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE)	Code	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM	21012 0298	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM	300 90 63	min. 84									R	R	R	R
1-10V DIM	300 90 124	min. 55	R	R	R	R	R	R	R	R				
DALI DIM	300 90 63	min. 84									R	R	R	R
DALI DIM	300 90 125	min. 55	R	R	R	R	R	R	R	R				

FINISH

iMAX II TUBE ROUND or iMAX II TUBE ROUND IP	24213 0010 B/MMAT/W		R				R				R			
	24213 0040 B/MMAT/W		R				R				R			
iMAX II TUBE ROUND TRIMLESS	24213 0020 B/MMAT/W				R			R					R	
iMAX II TUBE SQUARE	24213 0080 B/MMAT/W			R			R				R			
iMAX II TUBE SQUARE TRIMLESS	24213 0030 B/MMAT/W				R			R					R	

MOUNTING KIT TRIMLESS

CONCRETE / PLASTERBOARD	15212 2010				R			R					R	
	400 92 00 OFA				R			R					R	
PLASTERBOARD	400 92 00				R			R					R	
COLD STRETCHED CEILING	15212 0090			R				R					R	
WARM STRETCHED CEILING	15212 0170			R				R					R	


HONEYCOMB / GLASS / LENS

HONEYCOMB	24213 0050 B	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*
	400 03 01 B													
LINEAR SPREAD LENS	24213 0070	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*
SPREAD LENS	24213 0100	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*
SOFTENING LENS	24213 0090	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*
GLASS SBL	24213 0060	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*	A*

* MAX. 350MA FOR 39° BEAM ANGLE




HOLE IN ONE

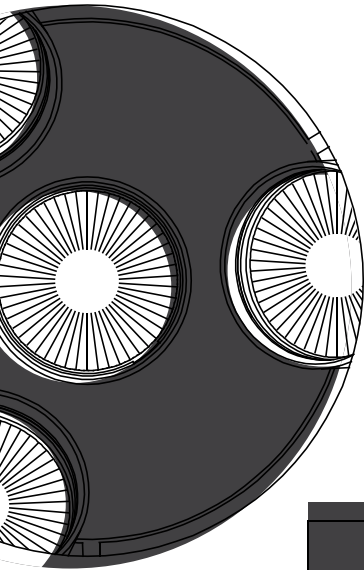



The name of this product says it all. The Hole In One - available in both rectangular, square and circular shape - lets you see a hole in the ceiling and nothing else. That is as long as you don't stand underneath this lighting fixture. This fitting offers enough space for different modules being able to point at different directions, all from within the same hole in your ceiling, making it very discreet.

Light and space are inextricably linked with one another, something that the Hole In One plays on so ingeniously. Intended in the first place to be functional lighting, this contemporary design pokes a little fun at its surroundings at the same time. The black background in the fitting creates the illusion of an unfathomable unendingness around the light source. The magnetic mounting of the modules makes it easy to quickly adapt the lighting to a new setting.



www.deltalight.com/hole-in-one

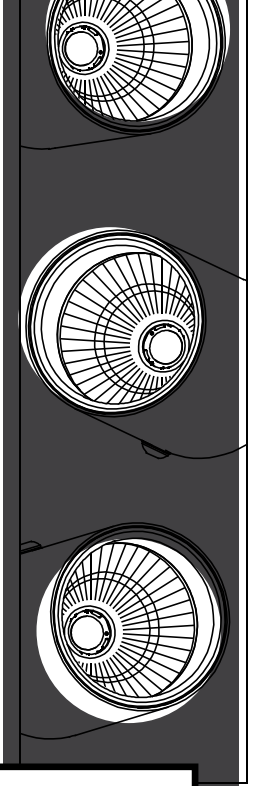

Unfathomable unendingness a.k.a. black box :-)

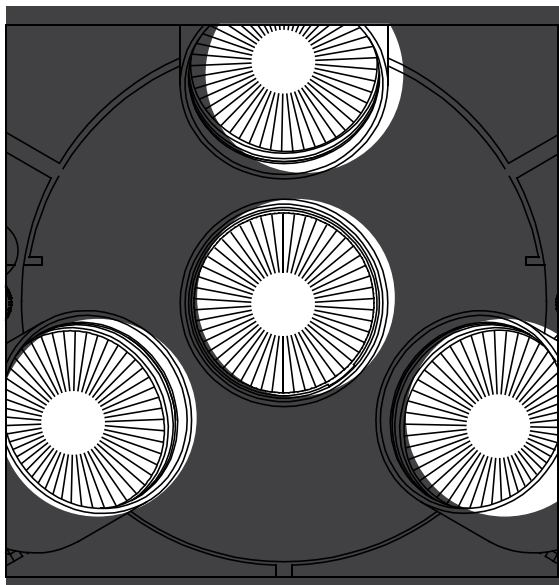

A




PUT

MAGNETIC 20° MAGNETIC 6° CENTER 20° CENTER 6° S6 MAGNETIC


3000K CRI>90	LED [F] 3.2W / 319lm / 1050mA LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP20	6°		202 913 939		202 914 939	
			20°	202 911 811 939				
	24°					12817 9320		
	40°					12817 9330		
2700K CRI>90	LED [F] 3.2W / 280lm / 1050mA LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP20	6°		202 913 929		202 914 929	
			20°	202 911 811 929		202 912 811 929		
	24°					12817 9220		
	40°					12817 9230		



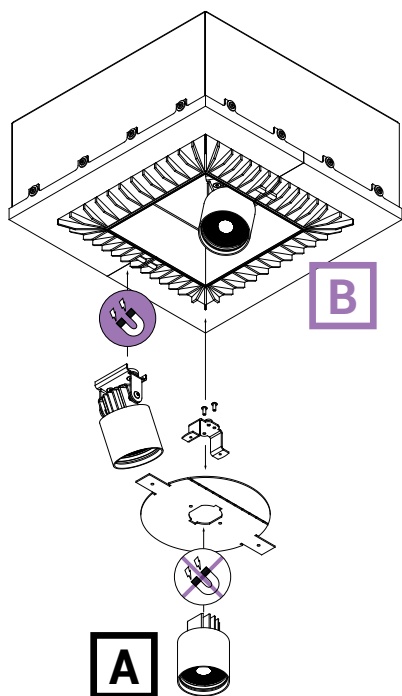


HOLE IN ONE
R15

222 x 145 +
(50 for PUT CENTER)
max.12




HOLE IN ONE
S6



222 x 222 x 145 +
(50 for PUT CENTER)
max.12

HOLE IN ONE
S15

310 x 170 x 105



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

PUT

MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
--------------	-------------	------------	-----------	-------------

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE)	Code	min. dim.	MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
1-10V DIM	11	21012 0298	min. 55	R		R	R
1-10V DIM	16	300 90 63	min. 84		R		
1-10V DIM	15	300 90 124	min. 55	R		R	R
DALI DIM	16	300 90 63	min. 84		R		R
DALI DIM	14	300 90 125	min. 55	R		R	R

MOUNTING KIT TRIMLESS

HOLE IN ONE R15 or HOLE IN ONE S15	Code	MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
HOLE IN ONE R15	202 91 97 01		R*	R*	R*	R*
HOLE IN ONE S15	202 91 97 11		R*	R*	R*	R*
HOLE IN ONE S6	12816 0000					R**

HONEYCOMB / GLASS / LENS

HONEYCOMB	Code	MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
HONEYCOMB	413 03 01 B	A	A	A	A	
HONEYCOMB	12820 0050 B					A
SOFTENING LENS	12820 0090					A
CONE PUT LED	201 50 50 B	A		A		

* MAX.6 PUT LED 350 OR 1050mA-DC - MAX.4 PUT LED 500mA-DC
** MAX.3 PUT S6



SPLITBOX

Splitbox is a trimless integrated lighting system, with the full flexibility of surface mounted lighting.


A black minimalistic cove of 80mm wide and 225mm or 315mm long can be equipped with one, two or three highly flexible spot modules. These Spy modules can remain encapsulated in the ceiling or emerge in its entirety and be tilted 90° while rotate 355°, allowing focused illumination in one swift move.

The black background inside the cove creates an illusion of unendingness around the light spots, enforcing the fully integrated architectural lighting concept. A range of light refining accessories is available to guarantee optimal optic performance and maximum eye comfort. The outside of the Spy modules is available either black or white, which can be combined with exchangeable inserts in multiple colour finishes.


www.deltalight.com/splitbox

SPLITBOX
3 SPY 52


all out




275 x 150 x 180 / max.12



275 x 150 x 180 / max.12



365 x 150 x 180 / max.12



365 x 150 x 180 / max.12

SPLITBOX

2 SPY 52


2 SPY FOCUS LP







3 SPY 52

3 SPY FOCUS LP

		IP20		2 SPY 52		2 SPY FOCUS LP		3 SPY 52		3 SPY FOCUS LP	
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	20°		100070 9320				100074 9320			
	LED [U] 12.4W / 1467lm / 700mA	45°		100070 9330				100074 9330			
2700K CRI>90	LED [Q] 5.8W / 734lm / 350mA	8-43°			100069 9300					100073 9300	
	LED [Q] 8.6W / 1018lm / 500mA	20°		100070 9220				100074 9220			
	LED [U] 12.4W / 1403lm / 700mA	45°		100070 9230				100074 9230			
SOFT DIM	LED [Q] 5.8W / 702lm / 350mA	8-43°			100069 9200					100073 9200	
	LED [Q] 8.6W / 974lm / 500mA	20°		100071 9020				100075 9020			
	LED [X] 10.2W / 1038lm / 500mA	45°		100071 9030				100075 9030			
TUNABLE WHITE	6500-2700K / CRI>90	20°		100072 9020				100076 9020			
	LED [Y] 9W / 1087lm / 500mA	45°		100072 9030				100076 9030			

◇ B ● / W ○



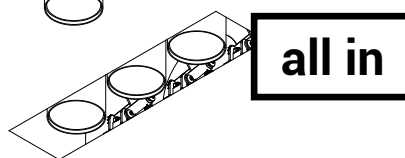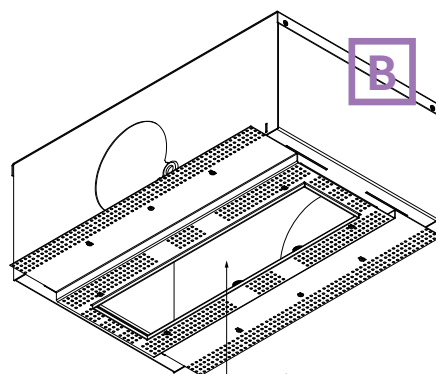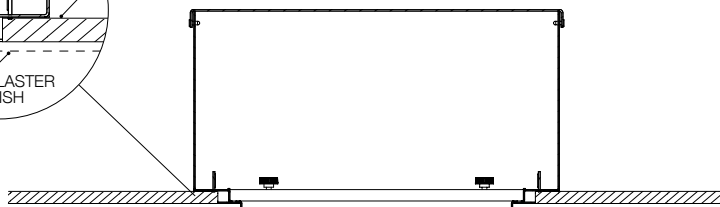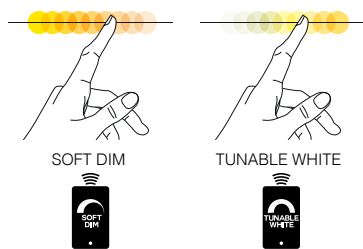

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				SPLITBOX			
				SPY 52 2	SPY FOCUS LP 2	SPY 52 3	SPY FOCUS LP 3
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	21012 0298	ⓘ min. 55	R	R	2 x R	2 x R	
1-10V DIM 15	300 90 124	ⓘ min. 55	R	R	2 x R	2 x R	
DALI DIM 14	300 90 125	ⓘ min. 55	R	R	2 x R	2 x R	
TUNABLE WHITE DALI DT8 20	21012 0355	ⓘ min. 86	2 x R		3 x R		
FINISH							
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W		R		R		
HONEYCOMB / GLASS / LENS							
HONEYCOMB SINGLE USE	19810 0010 B		A*		A*		
HONEYCOMB DOUBLE USE	19810 0060 B		A*		A*		
LINEAR SPREAD LENS	19810 0020		A*		A*		
SPREAD LENS	19810 0030		A*		A*		
SOFTENING LENS	19810 0040		A*		A*		
GLASS SBL	19810 0050		A*		A*		

* MAX. 500mA

B

CARREE

The Carree range is Delta Light's answer for easy-to-install, timeless and functional recessed spots, as it has been a Delta Light classic for many years. This family of square recessed luminaires offers refined solutions with integrated LED, either with or without trim. The straight lines in the design make a contemporary spot out of Carree, not only useful in modern architecture but also in many other applications. Carree can be used throughout the entire project, as it also includes IP44 solutions for bathrooms and even IP65 luminaires for outdoor use


www.deltalight.com/carree

IP23 IP44


FIX VS OK
OK = SHORT FOR ADJUSTABLE

CARREE
ST OK LED


1/1




∅ KIT x 75



∅ KIT x 85



75 x 75 x 80 / max.35




75 x 75 x 80 / max.35

CARREE


TRIMLESS LED IP TRIMLESS OK LED ST LED IP ST OK LED

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	202 511 811 932 ◊		11045 9320 ◊	
	LED [H] 10.4W / 1128lm / 500mA	IP23			202 510 811 932 ◊		11046 9320 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44	45°	202 511 811 922 ◊		11045 9220 ◊	
	LED [H] 10.4W / 1083lm / 500mA	IP23			202 510 811 922 ◊		11046 9220 ◊
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23		11049 9030 ◊			11048 9030 ◊
				◊ W ○	◊ B ● / W ○	◊ W ○	◊ B ● / W ○





SOFT DIM

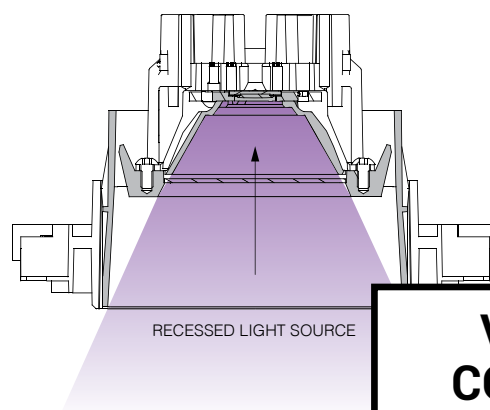


RECESSED LIGHT SOURCE

INTERIOR CEILING

VISUAL COMFORT

B

O.F.A.
ONE FOR ALL
MOUNTING KIT TRIMLESS
FOR CONCRETE
& PLASTERBOARD



TRIMLESS WITH TRIM

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			CARREE			
			TRIMLESS		ST	
			LED IP	OK LED	LED IP	OK LED
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	<i>i</i> min. 55	R	R	R	R
1-10V DIM 15	300 90 124	<i>i</i> min. 55	R	R	R	R
DALI DIM 14	300 90 125	<i>i</i> min. 55	R	R	R	R
MOUNTING KIT TRIMLESS						
CONCRETE / PLASTERBOARD	202 01 75 OFA		R	R		
	202 01 75		R	R		
PLASTERBOARD	202 00 75				O	O
INSTALLATION						
PLASTERKIT	207 01 161				O	O
CONCRETE BOX	270 11 161				O	O

REO

FAMILY

The Reo collection is more than one product, it is a family which offers a solution for many lighting demands, from residential to hotel, restaurant to retail and much more. In line with this philosophy, Reo comes in single and double fixtures, round or square, orientable or fixed, in multiple finishing colours, for both indoor and outdoor use. The design of these recessed conical spots delivers a hardly visible transition from the intense light to the ceiling, resulting in a halo-like effect, ideal to give the space an extra dimension.

MICRO REO

Being the smallest member of the family, Micro Reo excels in minimalism in design and excellence in performance as it offers a 7,1W LED solution. It comes as an IP20 version and as a luminaire with higher IP-rating that can be used in bathrooms and other wet areas.

MINI REO


Mini Reo offers a multitude of lighting solutions, as it combines multiple beam angles in both non-adjustable and adjustable luminaires. Spot, Medium or Flood can be combined to fit the specific needs of the project.


REO

Similar to Mini Reo, Reo offers adjustable and non-adjustable downlights in multiple beam angles. With an output up to 10,4W, Reo can easily be integrated into hospitality and residential projects, especially when using the Soft Dim version which creates a warm and cosy atmosphere when dimming down the luminaire. Reo comes in a round and square design.

www.deltalight.com/reo

REO
2 S OK

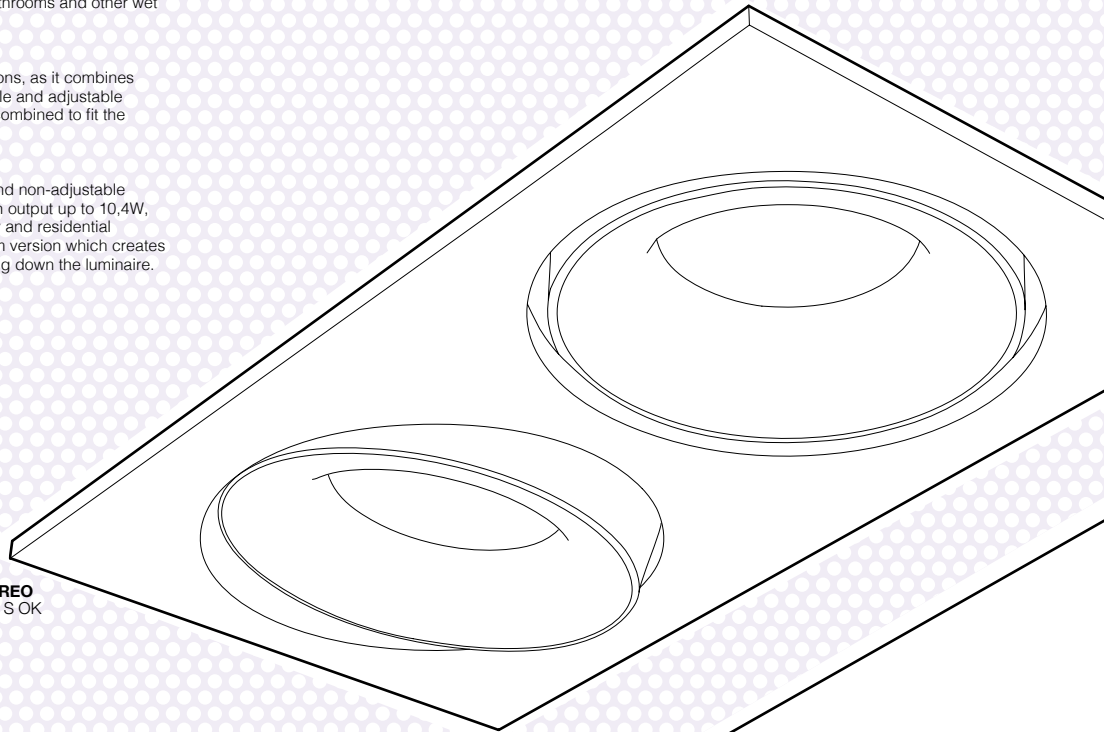







SOFT DIM



1/1

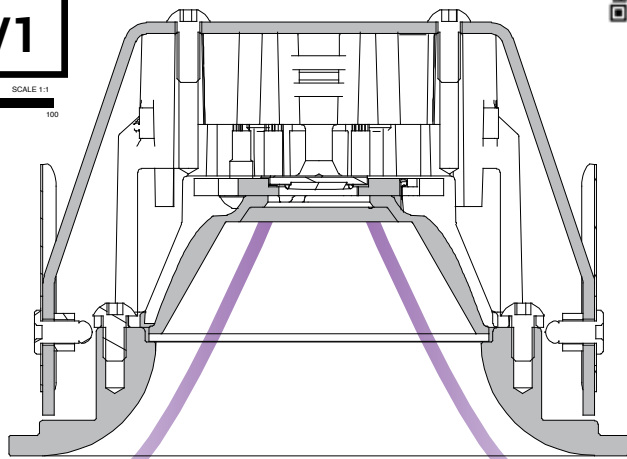

CURVES
a halo-like effect




INTERIOR CEILING


	MICRO REO	MINI REO		REO	
	FIX	FIX	ADJUSTABLE	FIX	ADJUSTABLE
LIGHT SOURCE					
LED	7,1W - 812lm	6,1W - 775lm 9W - 1076lm		7,1W - 812lm 10,4W - 1128lm	
OPTICS					
18°		•	•		
25°		•	•		
33°					
35°	•			•	•
37°		•	•		
40°				•	•
50°				•	•
COLOUR TEMPERATURE					
2700K	•	•	•	•	•
3000K	•	•	•	•	•
SOFT DIM 3000-1800K				•	•
CONTROL					
EXCL. POWER SUPPLY	•	•	•	•	•
NON DIM					
MAINS DIM					
1-10V DIM					
DALI DIM					
WIRELESS DIM					
SHAPE					
ROUND	•	•	•	•	•
SQUARE					•
COLOUR					
WHITE ○	•	•	•	•	•
BLACK ●	•	•	•	•	•
INSTALLATION					
INTERIOR	RECESSED	•	•	•	•
EXTERIOR	RECESSED	•	•	•	•

• STANDARD
• NOT FOR ALL VERSIONS


REO




46 x 90 / min.5



46 x 90 / min.5



Ø56x 60 / min.5



Ø70x 60 / min.5


MICRO REO / MINI REO

				MICRO REO	MICRO REO X	MINI REO II	MINI REO II OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20 IP43	35°	302 22 811 932 ◊			
			18°		302 23 811 932 ◊		
	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mr	IP20	25°			19351 9310 ◊	19353 9310 ◊
			37°			19351 9320 ◊	19353 9320 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP20 IP43	35°	302 22 811 922 ◊			
			18°		302 23 811 922 ◊		
	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500m²	IP20	25°			19351 9210 ◊	19353 9210 ◊
			37°			19351 9220 ◊	19353 9220 ◊
					19351 9230 ◊	19353 9230 ◊	


◊ B ● / W ○



A




76 x 55 / max.22



76 x 55



98 x 65 / max.30




98 x 65


REO

				S1	S2	OK S1	OK S2
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP43 IP23 IP43	33°	202 26 811 932 ◊	202 262 811 932 ◊	202 37 811 932 ◊	202 372 811 932 ◊
			50°	202 26 811 933 ◊	202 262 811 933 ◊	202 37 811 933 ◊	202 372 811 933 ◊
						202 37 811 933 ◊	202 372 811 933 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP43 IP23 IP43 IP23	33°	202 26 811 922 ◊	202 262 811 922 ◊	202 37 811 922 ◊	202 372 811 922 ◊
			50°	202 26 811 923 ◊	202 262 811 923 ◊	202 37 811 923 ◊	202 372 811 923 ◊
						202 37 811 923 ◊	202 372 811 923 ◊
	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP43 IP23	45°	15411 9030 ◊	15412 9030 ◊	15413 9030 ◊	15414 9030 ◊
						15413 9030 ◊	15414 9030 ◊

◊ B ● / W ○



98 x 70 / max.30




190 x 98 x 70 / max.30

REO

				S OK	2 S OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP23	33°	202 38 811 932 ◊	202 38 812 932 ◊
			50°	202 38 811 933 ◊	202 38 812 933 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP23	33°	202 38 811 922 ◊	202 38 812 922 ◊
			50°	202 38 811 923 ◊	202 38 812 923 ◊

◊ W ○



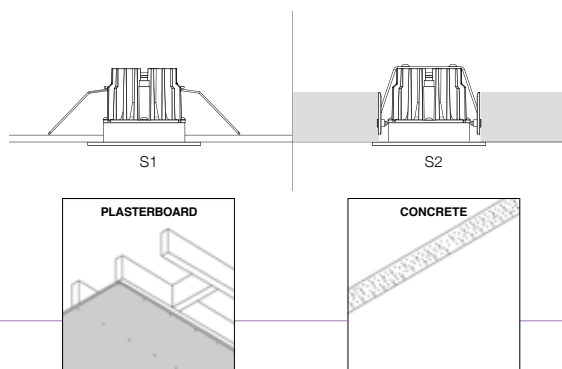

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			MICRO REO		MINI REO		REO						
			X	II	II OK	S1	S2	OK S1	OKS2	S OK	2 S OK		
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT													
MAINS DIM (FE) 11	21012 0298	min. 55	R*	R*	R	R	R	R	R	R	R	R	R
1-10V DIM 15	300 90 124	min. 55	R*	R*	R	R	R	R	R	R	R	R	R
DALI DIM 14	300 90 125	min. 55	R*	R*	R	R	R	R	R	R	R	R	R
INSTALLATION													
PLASTERKIT	202 11 19						O						
	207 01 170								O		O		

* REMOTE INSTALLATION

ARTUUR

FAMILY

Everything about Artuur catches the eye, be it its design, its optical compartment or its small protrusion when installed into the ceiling. Artuur comes as a downlight with sloping edges towards the center, both round and square. The design twist is in the asymmetrical square version, easily deceiving the eye but inspiring you to present creative layouts.


Another design element is the sophisticated lens on top of the deeply placed LED. While offering an outstanding quality of light, its remarkable aesthetics wow you, even when Artuur is not turned on.

Additionally, Artuur can combine pleasant general lighting with uniform wall washing, as a secondary LED module softly throws its light on vertical surfaces.


When installed into the ceiling, Artuur adds depth into the room owing to its gentle protruding ring. Small enough to be noticed, big enough to make a difference. Put the complete luminaire into a recessing kit and Artuur goes from protruding to trimless, refinement at best!

www.deltalight.com/artuur



1/1

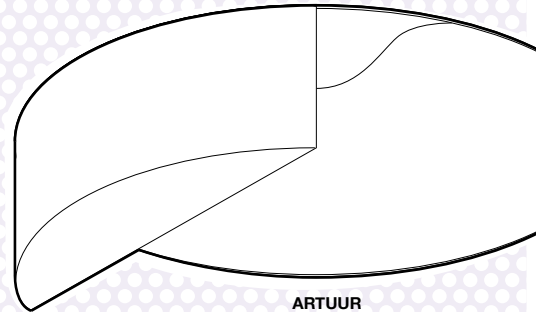

ARTUUR
R WALLWASH

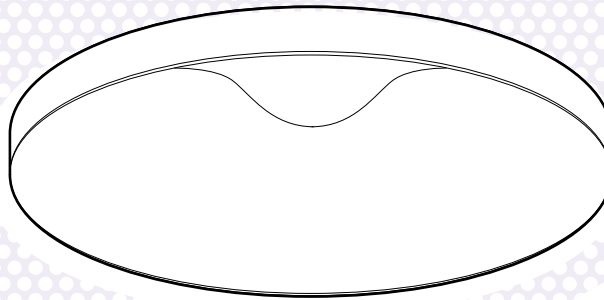


ARTUUR
R

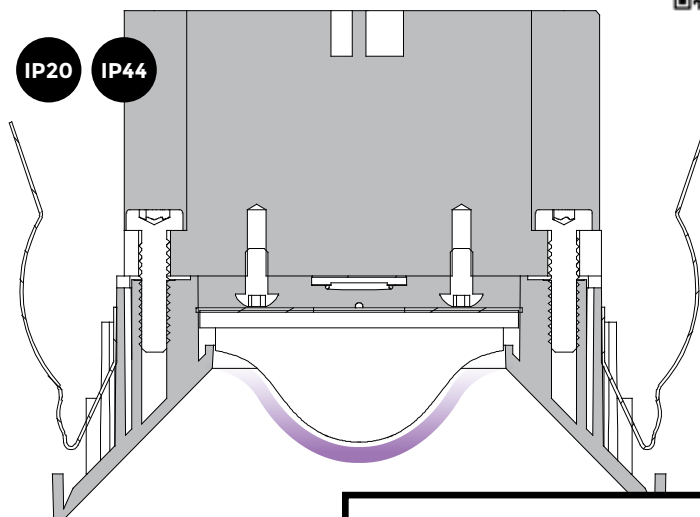


**Plane-Convex
Aspherical
lens**

INTERIOR CEILING


	ARTUUR		
	DOWN	DOWN + WALLWASH	
LIGHT SOURCE			
LED	5,8W - 787lm 8,6W - 1089lm	5,8W - 787lm 8,6W - 1089lm + 5,8W - 787lm	
OPTICS			
30°	•		
60°	•		
50° by 105°	•		
30° + WALLWASH		•	
COLOUR TEMPERATURE			
2700K	•	•	
3000K	•	•	
SOFT DIM 3000-1800K	•		
CONTROL			
EXCL. POWER SUPPLY	•	•	
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
SHAPE			
ROUND	•	•	
SQUARE	•	•	
COLOUR			
WHITE ○	•	•	
BLACK ●	•	•	
GOLD COLOURED ●	•	•	
INSTALLATION			
INTERIOR	RECESSED	•	•
	RECESSED TRIMLESS	•	•
IP VALUE			
IP20 - FOR DRY LOCATIONS	•	•	
IP44 - FOR DAMP LOCATIONS	•	•	
MOUNTING KITS			
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)	•	•	



SQUARE SYMMETRIC



SQUARE ASYMMETRIC




RECESSED


RECESSED TRIMLESS

• STANDARD
• NOT FOR ALL VERSIONS


ARTUUR



72 x 70 / min.5



72 x 72 x 70 / min.5




72 x 72 x 70 / min.5


ARTUUR

				R	S	SA
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA	IP20	30°	27711 9310 ◊	27719 9310 ◊	27723 9310 ◊
			60°	27711 9320 ◊	27719 9320 ◊	27723 9320 ◊
			50-105**	27711 9330 ◊	27719 9330 ◊	27723 9330 ◊
		IP44	30°	27713 9310 ◊	27721 9310 ◊	27725 9310 ◊
			60°	27713 9320 ◊	27721 9320 ◊	27725 9320 ◊
			50-105**	27713 9330 ◊	27721 9330 ◊	27725 9330 ◊
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	IP20	30°	27711 9210 ◊	27719 9210 ◊	27723 9210 ◊
			60°	27711 9220 ◊	27719 9220 ◊	27723 9220 ◊
			50-105**	27711 9230 ◊	27719 9230 ◊	27723 9230 ◊
		IP44	30°	27713 9210 ◊	27721 9210 ◊	27725 9210 ◊
			60°	27713 9220 ◊	27721 9220 ◊	27725 9220 ◊
			50-105**	27713 9230 ◊	27721 9230 ◊	27725 9230 ◊
SOFT DIM	3000-1800K / CRI>90 LED [W] 6W / 623lm / 350mA	IP20	60°	27712 9020 ◊	27720 9020 ◊	27724 9020 ◊
		IP44		27714 9020 ◊	27722 9020 ◊	27726 9020 ◊

◊ B ● / GC ● / W ○



72 x 70 / min.5



72 x 72 x 70 / min.5




ARTUUR WALLWASH

				R	S
3000K CRI>90	DOWN: LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA + WALLWASH: LED [U] 5.8W / 787lm / 350mA	IP20	30°	27715 9310 ◊	27727 9310 ◊
		IP44		27717 9310 ◊	27729 9310 ◊
2700K CRI>90	DOWN: LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA + WALLWASH: LED [U] 5.8W / 753lm / 350mA	IP20		27715 9210 ◊	27727 9210 ◊
		IP44		27717 9210 ◊	27729 9210 ◊


◊ B ● / GC ● / W ○



WALLWASH

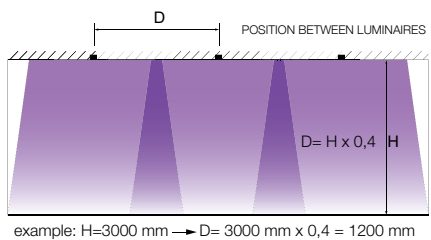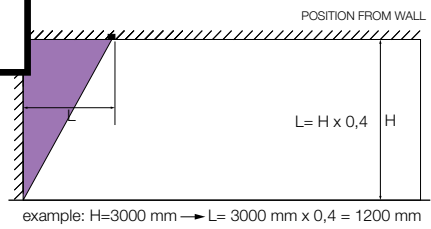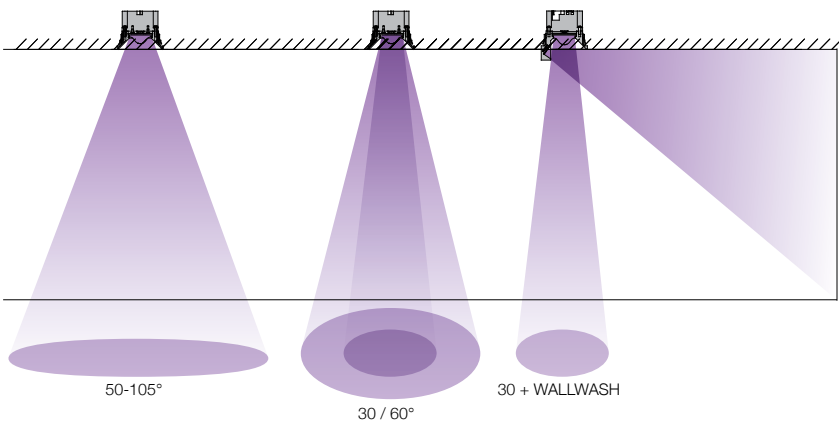

INTERIOR CEILING

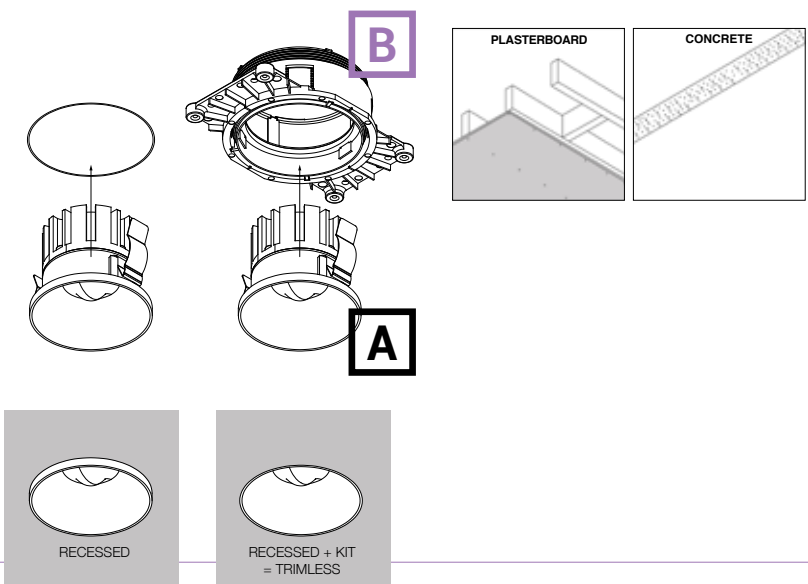

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT


	ARTUUR			ARTUUR WALLWASH			
	R	S	SA	R	S		
MAINS DIM (FE) 11	21012 0298	<i>i</i> min. 55	R	R	R	R	R
1-10V DIM 15	300 90 124	<i>i</i> min. 55	R	R	R	R	R
DALI DIM 14	300 90 125	<i>i</i> min. 55	R	R	R	R	R

MOUNTING KIT TRIMLESS

CONCRETE / PLASTERBOARD	27710 0010		O			O	
	27710 0020			O	O		O

B

PLAT-OH!

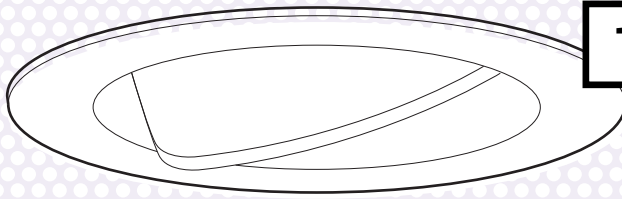


1/1




PLAT-OH!



PLAT-OH!
TRIMLESS



∅ KIT x 55 / max.12,5



∅ 76 x 55 / max.12,5

NEW


PLAT-OH!

PLAT-OH! TRIMLESS

PLAT-OH!

		IP20		23°		36°	
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20		29513 9310	29511 9310		
	LED [U] 8.6W / 1089lm / 500mA			29513 9320	29511 9320		
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA			29513 9210	29511 9210		
	LED [U] 8.6W / 1041lm / 500mA			29513 9220	29511 9220		
SOFT DIM	3000-1800K / CRI>90			29514 9010	29512 9010		
	LED [W] 6W / 623lm / 350mA			29514 9020	29512 9020		
				◇ B ● / GC ● / W ○	◇ B-B ●● / B-GC ●● / W-W ○○		



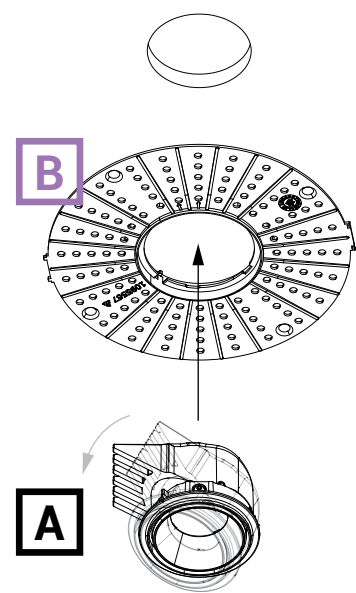


INTERIOR CEILING

Our Plat-Oh! family is the answer to a present-day problem. The constant evolution within the world of construction on the level of energy savings, sustainability and legislation forces changes in the way there is being build. One of the results is building more compact, and compact in size means less room in installation depth also when using hollow ceilings.

Plat-Oh! is designed to fit in these new building concepts as it offers a family of tiltable downlights that only require 55mm of recessing depth. Even within these limits, Plat-Oh! can be tilted up to 30°. Together with its 2 different beam angles, 3 finishing colours and the choice between trimless or with trim, Plat-Oh! offers a flexible lighting solution for demanding environments.

www.deltalight.com/plat-oh

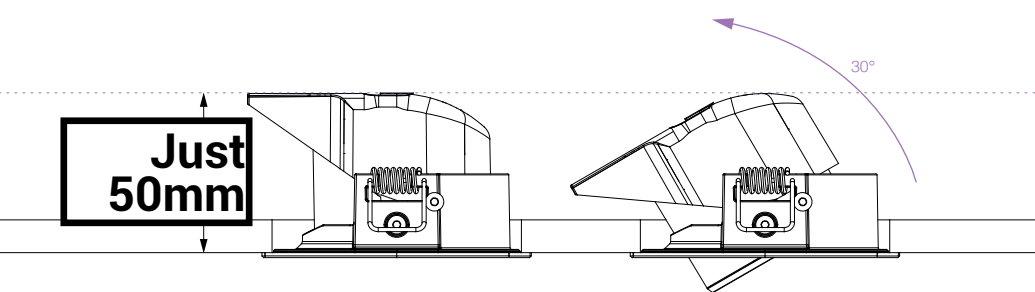

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

			PLAT-OH! TRIMLESS	PLAT-OH!
MAINS DIM (FE) 11	21012 0298	i min. 55	R	R
1-10V DIM 15	300 90 124	i min. 55	R	R
DALI DIM 14	300 90 125	i min. 55	R	R
MOUNTING KIT TRIMLESS				
PLASTERBOARD	29510 0020		R	

DEEP RINGO

FAMILY

The conical shaped design of the Deep Ringo fixtures and its deeper placed LED source make sure that glare is reduced to a minimum when Deep Ringo is installed in the ceiling. The small trim gives a refined touch to this elegant luminaire. Available in 3 sizes, with trim or trimless, fix or adjustable, a range of beam angles and multiple finishing colours, Deep Ringo is an easy-to-use downlight throughout the project. Its golden or bronze finish is perfect to add a sniff of luxury to the room.

MINI DEEP RINGO


Mini Deep Ringo is playful, as it comes in a multitude of finishing colours, has 3 different beam angles to choose from and can be fix or adjustable. A range of possibilities in a slender design.

DEEP RINGO

Deep Ringo is the most elaborate of the family, offering LED and halogen solutions, for use in both dry and wet areas. Similar as the Reo family, Deep Ringo also offers a ribbed version that reduces the glare thanks to its cascading transition from light source to ceiling.


Furthermore Deep Ringo can also be used as light unit in our **▲IR** range, a toolset that combines light and ventilation in one.

www.detalight.com/deepringo

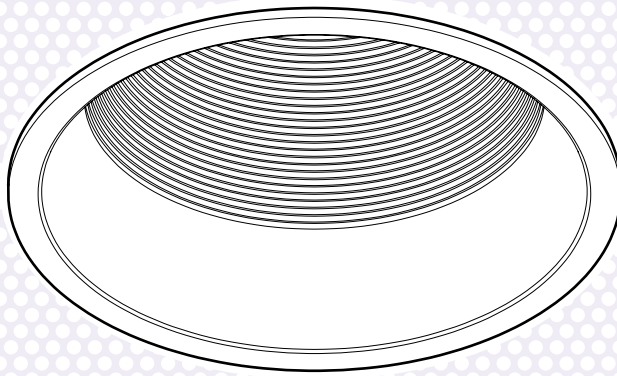


DEEP RINGO
RIBS

1/1

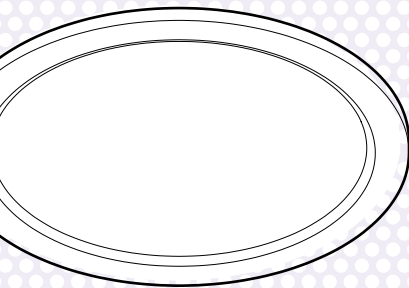

MINI
DEEP RINGO II



VISUAL
COMFORT



RECESSED LIGHT SOURCE



TR VS ST

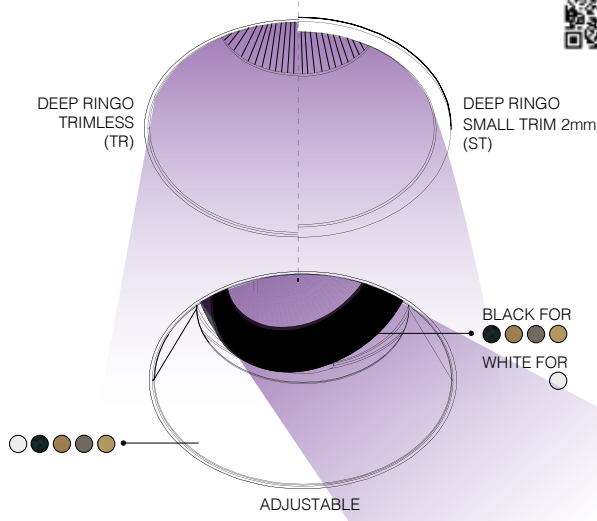


INTERIOR CEILING

	MINI		LED		RIBS	HI
	FIX	ADJUSTABLE	FIX	ADJUSTABLE	FIX	FIX
LIGHT SOURCE						
LED	6,1W - 775lm 9W - 1076lm		7,1W - 812lm 10,4W - 1128lm		7,1W - 812lm 10,4W - 1128lm	
GU10						•
OPTICS						
18°	•	•				
25°	•	•				
33°			•	•	•	
37°	•	•				
40°			•	•	•	
COLOUR TEMPERATURE						
2700K	•	•	•	•	•	
3000K	•	•	•	•	•	
SOFT DIM 3000-1800K			•	•	•	
CONTROL						
EXCL. POWER SUPPLY	•	•	•	•	•	
NON DIM						
MAINS DIM						•
1-10V DIM						
DALI DIM						
WIRELESS DIM						
COLOUR						
WHITE ○	•	•	•	•	•	•
BLACK ●	•	•	•	•	•	•
FLEMISH GOLD ●	•	•	•	•	•	
FLEMISH BRONZE ●	•	•	•	•	•	
GOLD COLOURED ●	•	•	•	•	•	
BRUSHED GREY ●			•	•		
BRUSHED COPPER ●			•	•		
BRUSHED GOLD ●			•	•		
BRUSHED OLD BRONZE ●			•	•		
BRUSHED ANTHRACITE ●			•	•		
PIANO BLACK ●			•	•		
INSTALLATION						
INTERIOR	RECESSED	•	•	•	•	•
	RECESSED TRIMLESS	•	•	•	•	
EXTERIOR	RECESSED	•	•	•		
IP VALUE						
IP20 - FOR DRY LOCATIONS	•		•		•	•
IP44 - FOR DAMP LOCATIONS	•		•		•	•
MOUNTING KITS						
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)			•	•		
CSC (COLD STRETCHED CEILING)			•	•		
WSC (WARM STRETCHED CEILING)			•	•		
▲IR (LIGHT + VENTILATION)			•	•		


• STANDARD
* NOT FOR ALL VERSIONS

DEEP RINGO




NEW

ØKIT x 95



56 x 80 / min.5



71 x 80 / min.5

MINI DEEP RINGO

II TRIMLESS



II

II OK

Color Temperature	LED [Q]	Beam Angle	IP	Product Code
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mr	18°	IP20	19423 9310 ◇
		25°		19423 9320 ◇
		37°		19439 9330 ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500m ²	18°	IP20	19423 9210 ◇
		25°		19423 9220 ◇
		37°		19439 9230 ◇

◇ B ● / W ○

◇ B ● / FBR ● / FG ● / W ○



ØKIT x 95

ØKIT x 105

76 x 90 / min.5

76 x 100 / min.5

76 x 90 / min.5

DEEP RINGO

TRIMLESS

TRIMLESS OK

LED


LED OK

RIBS


Color Temperature	LED [H]	Beam Angle	IP	Product Code
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	33°	IP20	202 145 811 932 ◇
			IP23	202 144 811 932 ◇ **
			IP43	202 272 811 932 ◇ **
			IP44	202 273 811 932 ◇ **
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	33°	IP20	202 145 811 922 ◇
			IP23	202 144 811 922 ◇ **
			IP43	202 272 811 922 ◇ **
			IP44	202 273 811 922 ◇ **
SOFT DIM 3000-1800K / CRI>90	LED [X] 10.2W / 1038lm / 500mA	45°	IP23	19436 9030 ◇ **
			IP43	19437 9030 ◇ **

◇ B ● / FBR ● / FG ● / GC ● / W ○ (GC NOT FOR DEEP RINGO RIBS)

** + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●



76 x 105 / max.15



76 x 105

DEEP RINGO

HI S1

HI S2

Power	IP	Product Code
QPAR51 max.35W	IP20	202 11 26 ◇
	IP44	202 01 26 ◇


◇ B ● / W ○

GU10 / 100-240V / 50-60Hz







TRIMLESS INSTALLATION

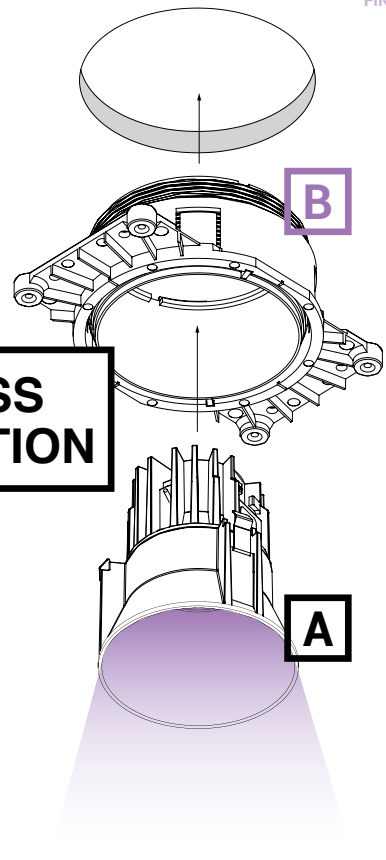

INTERIOR CEILING

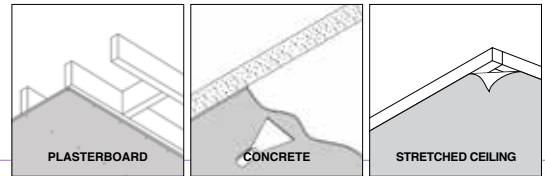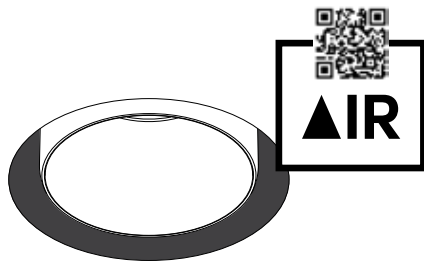

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			MINI DEEP RINGO		DEEP RINGO							
			II TR	II	II OK	TR	TR OK	LED	LED OK	RIBS	HI S1	HI S2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
MAINS DIM (FE) 11	21012 0298	min. 55	R*	R	R	R	R	R	R	R		
1-10V DIM 15	300 90 124	min. 55	R*	R	R	R	R	R	R	R		
DALI DIM 14	300 90 125	min. 55	R*	R	R	R	R	R	R	R		
FINISH												
SPY 52 TUBE II	19810 0230 FBR/FG/GC		O									
MOUNTING KIT TRIMLESS												
CONCRETE / PLASTERBOARD	19410 0010		R									
	15212 2000					R	R					
COLD STRETCHED CEILING	15212 0070				R	R						
WARM STRETCHED CEILING	15212 0150				R	R						
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER												
PLASTERBOARD SIDE AIR	29810 0010	Light+Ventilation				R						
	29810 0050	Light				R						
	29810 0020	Light+Ventilation					R					
	29810 0060	Light					R					
	29810 0100	Ventilation				O	O					
CONCRETE TOP AIR	29810 0210	Light+Ventilation				R						
	29810 0050	Light				R						
	29810 0220	Light+Ventilation					R					
	29810 0060	Light					R					
29810 0200	Ventilation				O	O						
INSTALLATION												
PLASTERKIT 101	202 11 19										O	
LED LAMP MORE INFO TECHNICAL CHAPTER												
											O	O

* REMOTE INSTALLATION

B


GYN

The Gyn family is a range of gypsum luminaires that complete Delta Light's elaborate range of downlights. The possibility of finishing these products on site in any desired colour makes them suitable for many applications.

The curved shape of the Gyn frame provides a smooth transition from ceiling to luminaire. When Gyn is turned on, the curve provides a soft glow on the ceiling, similar to Reo fixtures.

As a round or square gypsum luminaire, Gyn D steps away from the curved edges and goes straight into the ceiling. With a deeply recessed LED module, Gyn D offers additional visual comfort as it shields off the light source from directly being looked into.


www.deltalight.com/gyn

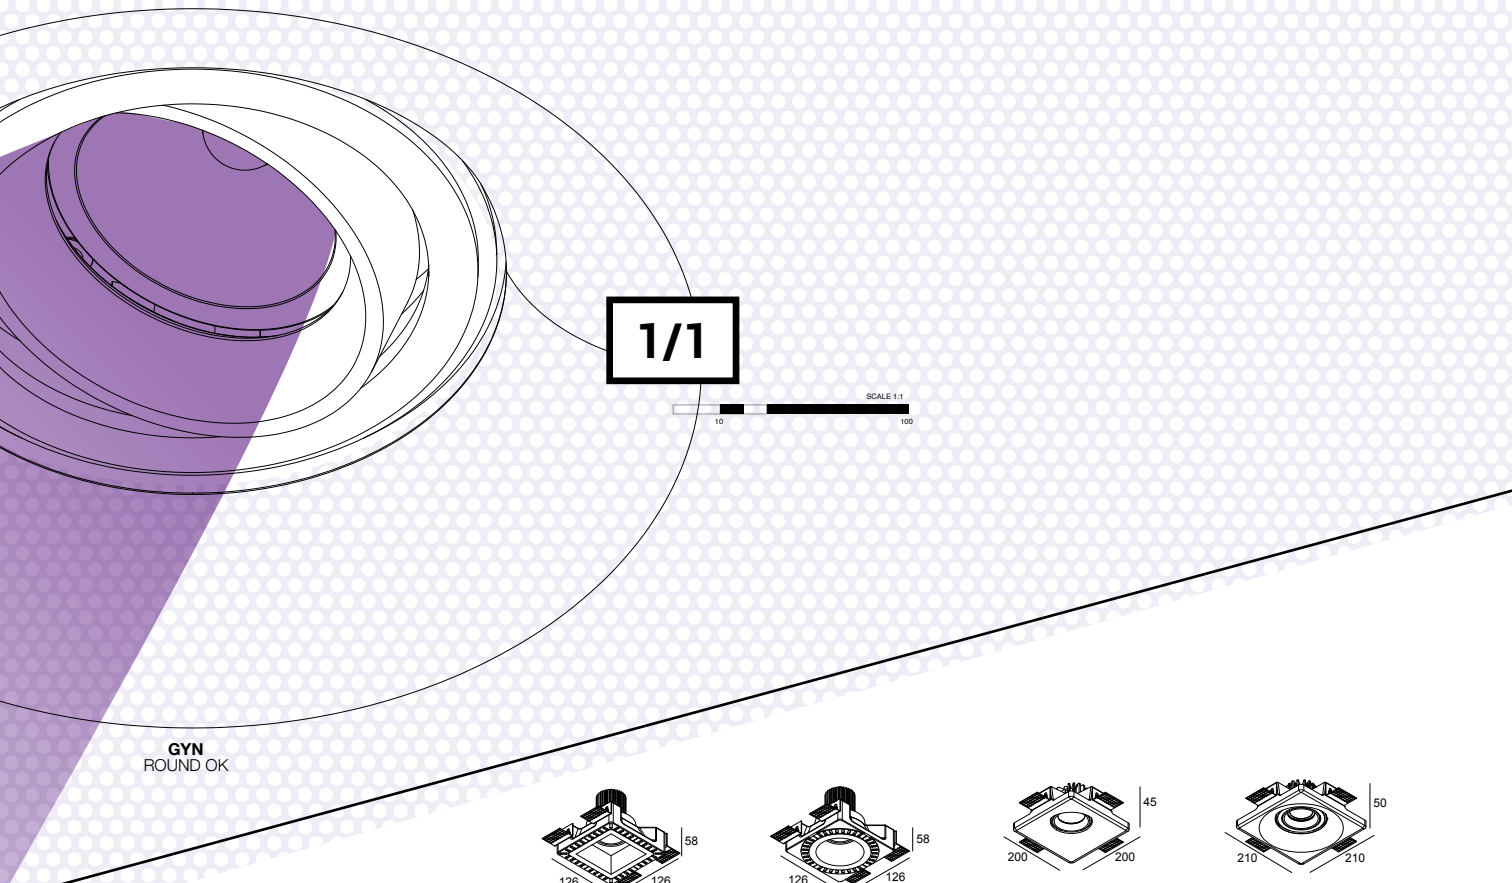

GYN
ROUND OK


A

GYN




130 x 130 x 120
min.5-max.16

D SQUARE



130 x 130 x 120
min.5-max.16

D ROUND



140 x 140 x 80
min.7-max.18

ROUND



0-20° 350°


155 x 155 x 85
min.7-max.18

ROUND OK

				D SQUARE	D ROUND	ROUND	ROUND OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20	33°	100052 9320 ◇	100051 9320 ◇	100066 9310 ◇	100068 9310 ◇
	LED [H] 10.4W / 1128lm / 500mA	IP23	18°			100066 9320 ◇	100068 9320 ◇
			33°				
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP20	33°	100052 9220 ◇	100051 9220 ◇	100066 9210 ◇	100068 9210 ◇
	LED [H] 10.4W / 1083lm / 500mA	IP23	18°			100066 9220 ◇	100068 9220 ◇
			33°				
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23	45°			100085 9030 ◇	100086 9030 ◇

◇ W ○






SOFT DIM



CURVED


B

**Finish on site in
any desired colour**




A


INTERIOR CEILING




GYN
D SQUARE



GYN
D ROUND



GYN
ROUND OK



GYN
ROUND

**VISUAL
COMFORT**

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

B

			GYN			
			D SQUARE	D ROUND	ROUND	ROUND OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	ⓘ min. 55	R*	R*	R*	R*
1-10V DIM 15	300 90 124	ⓘ min. 55	R*	R*	R*	R*
DALI DIM 14	300 90 125	ⓘ min. 55	R*	R*	R*	R*

* REMOTE INSTALLATION



PARTOU

Partou? Oui oui! The Partou family has countless application possibilities, as it combines round and square shapes, fix and adjustable luminaires and offers an IP44 protection rate from below. Easy to fit in everywhere – partout in French -, from residential to hospitality, from dining room to bathroom.

ADAPTIVE DESIGN

The clever design of Partou offers a multitude of finishing options on 1 and the same LED module. Complete your LED module with the cover you want: round or square, small or bigger, white or black, the choice is up to you!

www.deltalight.com/partou

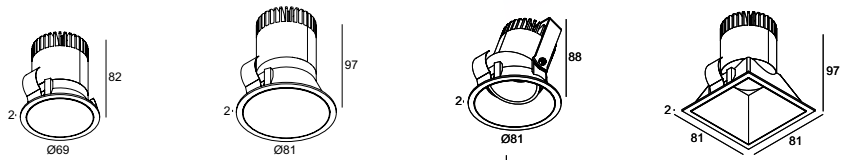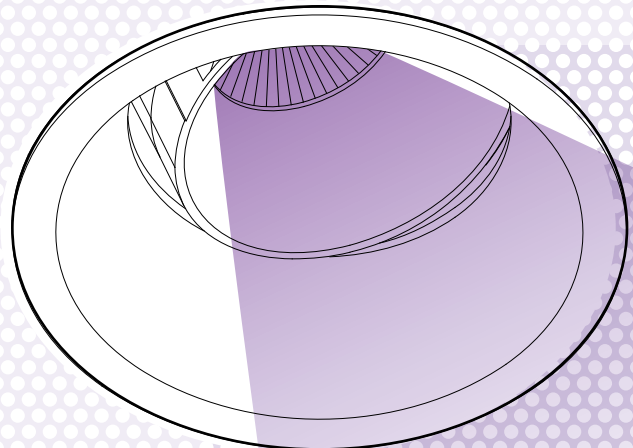

64 x 85

76 x 100

76 x 90


76 x 76 x 100

PARTOU		MINI IP	IP	OK	S IP	
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	25°		25214 9320 ◇	
			37°		25214 9330 ◇	
		IP44	25°	25211 9320 ◇	25213 9320 ◇	
37°	25211 9330 ◇		25213 9330 ◇		25216 9330 ◇	
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP20	25°		25214 9220 ◇	
			37°		25214 9230 ◇	
		IP44	25°	25211 9220 ◇	25213 9220 ◇	
37°	25211 9230 ◇		25213 9230 ◇		25216 9230 ◇	

◇ B-B ●● / W-W ○○

◇ B ● / W ○



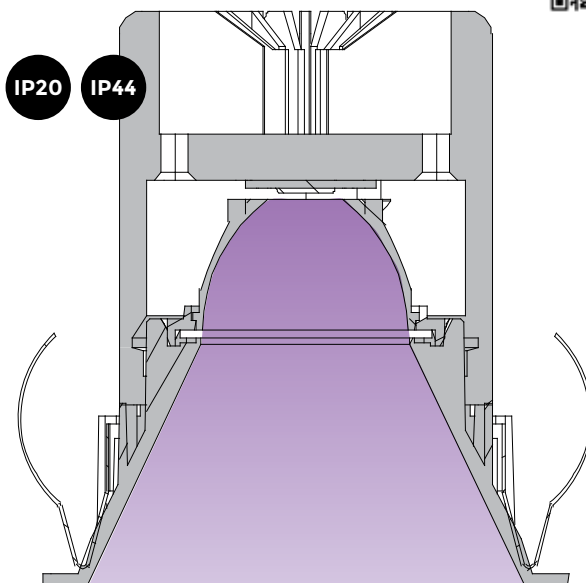

INTERIOR CEILING

1/1



VISUAL COMFORT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			REQUIREMENT / OPTION / ACCESSORY			
			MINI PARTOU	PARTOU		
			IP	IP	OK	S IP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	i min. 55	R	R	R	R
1-10V DIM 15	300 90 124	i min. 55	R	R	R	R
DALI DIM 14	300 90 125	i min. 55	R	R	R	R
INSTALLATION						
PLASTERKIT	202 11 19			O	O	

B


TWENTY-7

Despite the many advantages of LED as a lighting solution, the incandescence light bulb still recalls characteristics as warmth and cosiness to many people. As a flashback on how it used to be, Twenty-7 brings these characteristics back to live.


As a recessed luminaire where only the light bulb is coming out of the ceiling, Twenty-7 throws light throughout the room, enlightening the space from ceiling to floor.

By using a LED filament lighting bulb, Twenty-7 gives you not only warmth and cosiness, but at the same time adds the advantages of LED.

www.detalight.com/twenty7

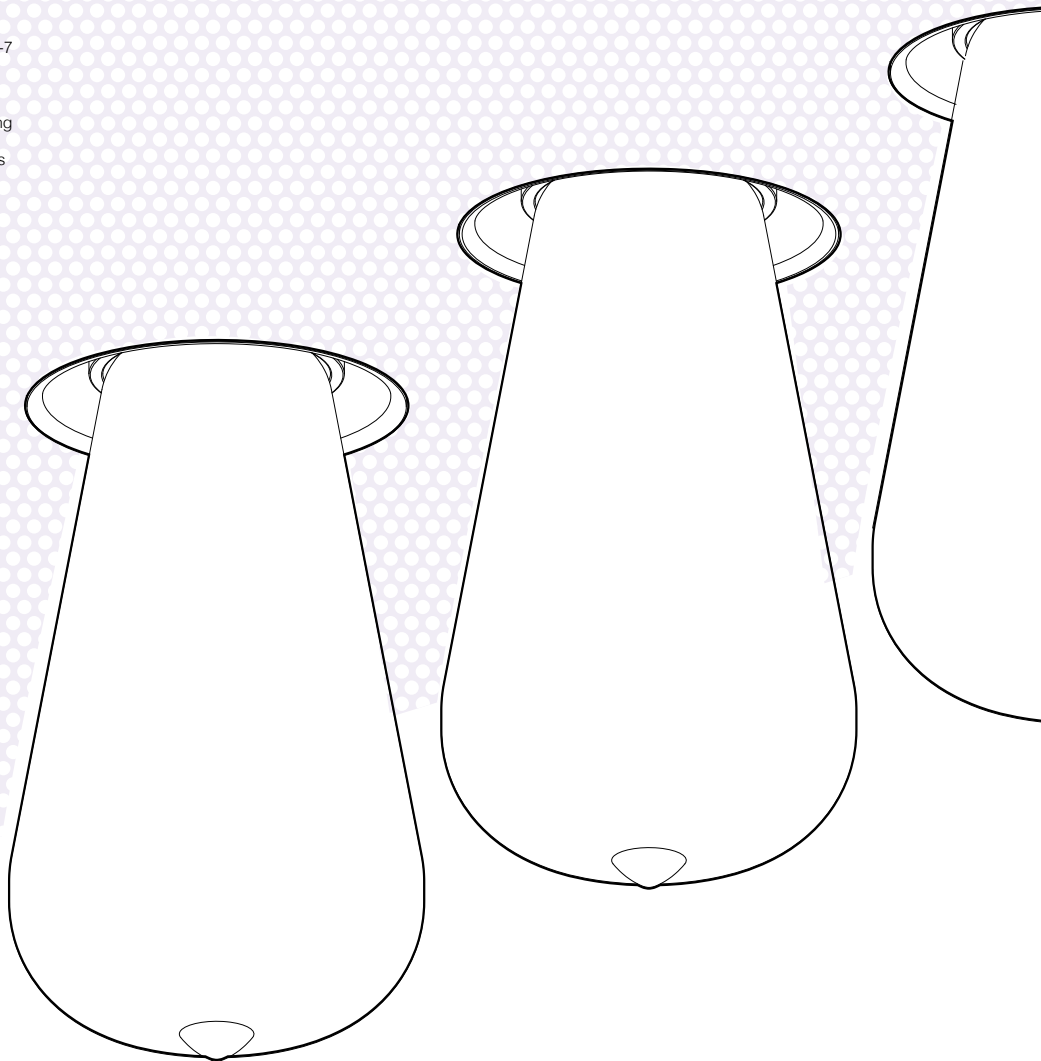

1/1



ØKIT x 100

TWENTY-7

TRIMLESS


1 x A60 max.20W

IP20

415 35 00

INCL. 1 x SPY TUBE B
E27Ls / 100-240V / 50-60Hz



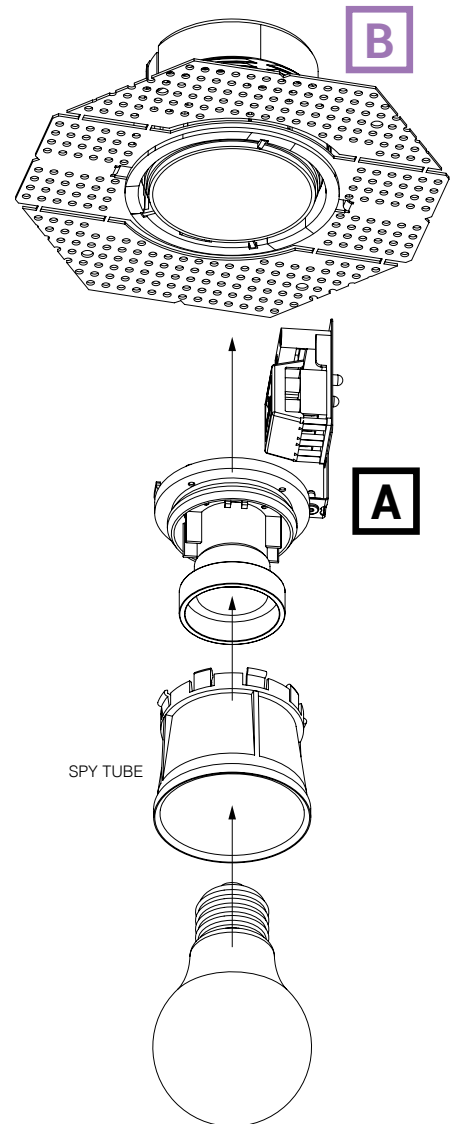

INTERIOR CEILING

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

MOUNTING KIT TRIMLESS		TWENTY-7 TRIMLESS		
	CONCRETE / PLASTERBOARD	15212 2050		R
	COLD STRETCHED CEILING	15212 0060		R
	WARM STRETCHED CEILING	15212 0140		R
FINISH				
	SPY TUBE	414 01 00 FBR / FG / MMAT / SG / W		O
LED LAMP	MORE INFO TECHNICAL CHAPTER			O


DIRO SBL

NOT YOUR REGULAR DOWNLIGHTER.


Diro SBL is a range of recessed and surface mounted luminaires, designed with an eye for visual comfort, as it has a multi layered optic finished with a prismatic plexi at the front.

It has a driver included and its reduced height allows you to install it anywhere, either built in or built on. With finishes in black and white and IP44 versions available, Diro SBL is also suitable for use in damp locations like bathrooms.


www.deltalight.com/dirosbl



121 x 65 / max.25



156 x 70 / max.25



208 x 70 / max.25

DIRO SBL


S IP

M


L

3000K CRI>80	LED 5,9W / 1020lm / 350mA	IP44	11436 8300 ◊		
	LED 9,8W / 1500lm / 350mA	IP43		202 296 83 ◊	
	LED 17,5W / 3000lm / 1050mA	IP43			202 297 83 ◊
2700K CRI>80	LED 5,9W / 1020lm / 350mA	IP44	11436 8200 ◊		
	LED 9,8W / 1500lm / 350mA	IP43		202 296 82 ◊	
	LED 17,5W / 3000lm / 1050mA	IP43			202 297 82 ◊

◊ B ● / W ○
100-240V / 50-60Hz



S



L


DIRO SBL ON

3000K CRI>80	LED 5,9W / 1020lm / 350mA	IP43	251 77 83 ◊	
	LED 5,9W / 1020lm / 350mA	IP44	11435 8300 ◊	
	LED 17,5W / 3000lm / 1050mA	IP43		251 81 83 ◊
2700K CRI>80	LED 5,9W / 1020lm / 350mA	IP43	251 77 82 ◊	
	LED 5,9W / 1020lm / 350mA	IP44	11435 8200 ◊	
	LED 17,5W / 3000lm / 1050mA	IP43		251 81 82 ◊


◊ B ● / W ○
100-240V / 50-60Hz




A

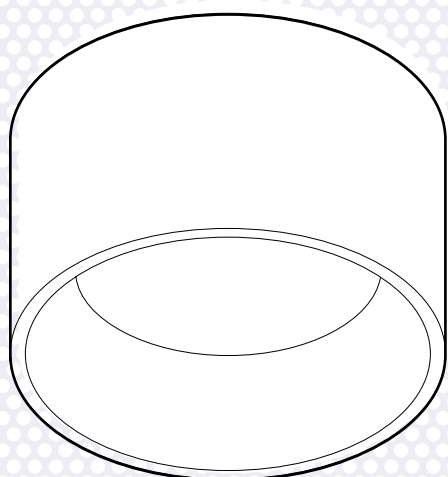

DIRO SBL
SON

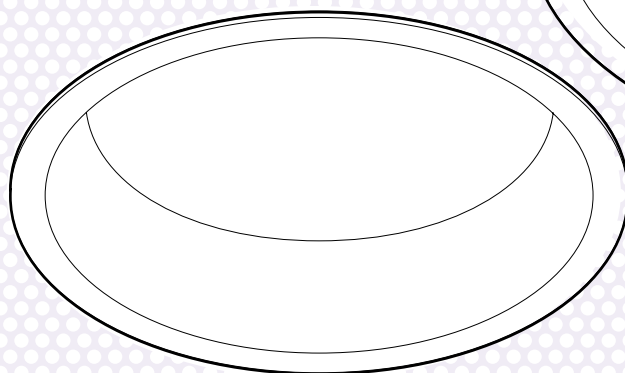

DIRO SBL
M

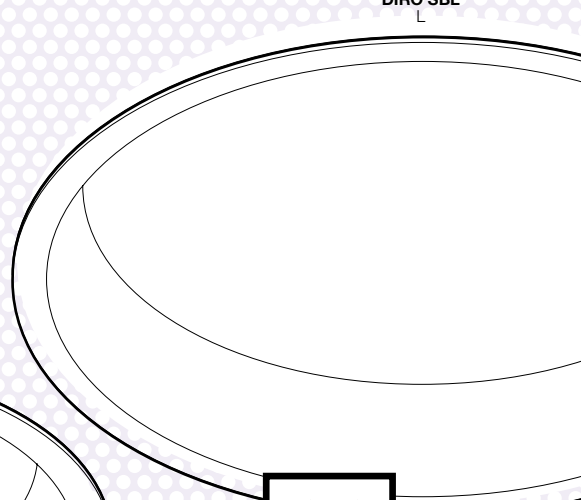

DIRO SBL
L



GRID

FAMILY

The Grid product family is a longstanding classic in the collection. First as halogen and discharge solutions, later as LED downlight and afterwards updated to the Snap-In principle, a smart and easy way of separating the mounting frame from the LED module, with comfortable installation as a result. This grid range is all about flexibility, as the single or double light units can be directed any way you want.

MICROGRID IN

Microgrid In completes the Snap-In range as it uses a similar principle of dividing the light unit into a mounting frame and a light module that can be snapped into the frame after installation. Microgrid comes in single, double and triple set-ups with trim.


A visor is available to further reduce the impact of the intense light coming from the miniature light source, shielding the light source from directly looking into.

SNAP-IN


The Snap-In principle equals modularity and flexibility at its best, it grants the opportunity to the lighting designer to use his creativity: combine single and double units, use multiple beam angles or play with colour. All to use as surface mounted luminaire or as recessed spotlights, both with or without trim.

Dividing a luminaire into multiple modular parts not only creates uniformity within one family, it also facilitates the installation by giving the opportunity to the installer to place the frame in advance. No need to worry for the lighting modules in further finishing of the room, as the modules can be clicked into the frame afterwards.


www.detalight.com/grid

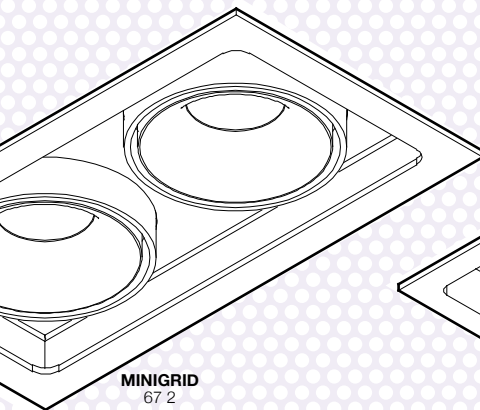



MINIGRID
672

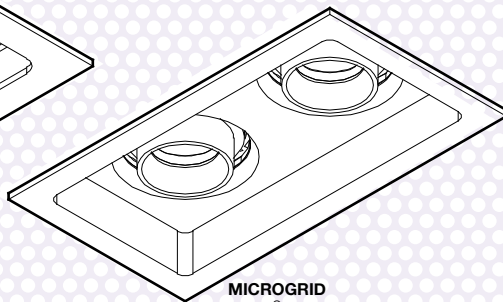

MICROGRID
2

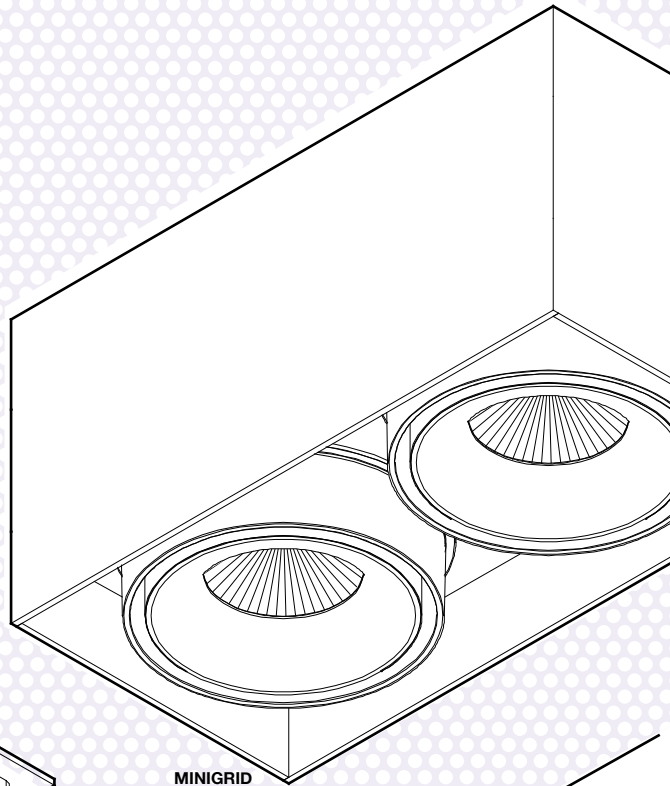

MINIGRID
ON 2


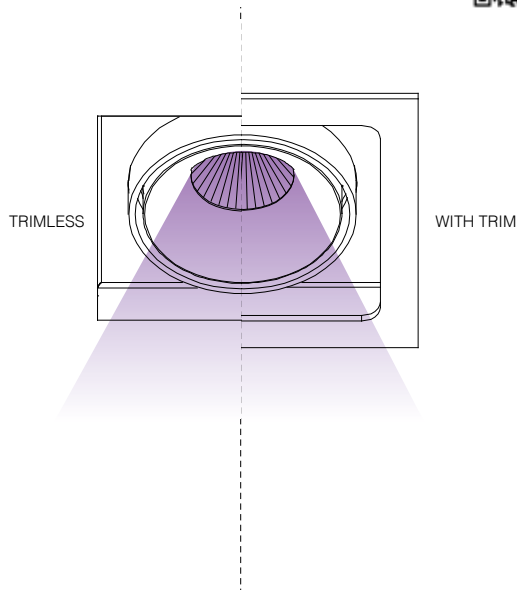



INTERIOR CEILING

	MICROGRID	MINIGRID 67	MINIGRID	
			CL	HP
LIGHT SOURCE				
LED	3,9W - 385lm	6,1W - 775lm 8W - 976lm 9W - 1076lm	2W - 201lm 4,3W - 351lm	7,1W - 812lm 10,4W - 1128lm 16,3W - 2309lm 23,2W - 3169lm
OPTICS				
6°			•	
15°	•			
18°		•		•
20°				•
25°		•		
30°	•			
33°				•
37°		•		•
40°				•
50°				•
COLOUR TEMPERATURE				
2700K	•	•	•	•
3000K	•	•	•	•
SOFT DIM 3000-1800K				•
CONTROL				
EXCL. POWER SUPPLY	•	•	•	•
NON DIM				
MAINS DIM		•	•	
1-10V DIM				
DALI DIM				
WIRELESS DIM				
COLOUR				
WHITE ○	•	•	•	•
BLACK ●	•	•	•	•
INSTALLATION				
INTERIOR	RECESSED	•	•	•
	RECESSED TRIMLESS		•	•
	SURFACE MOUNTED		•	•
ACCESSORIES				
VISOR	•			
HONEYCOMB				•
SOFTENING LENS				•

• STANDARD
• NOT FOR ALL VERSIONS

GRID



62 x 59 x 75 min.12-max.25





62 x 114 x 75 min.12-max.25

62 x 168 x 75 min.12-max.25

MICROGRID IN

				1	2	3
3000K CRI>90	1, 2 or 3x LED [E] 3.9W / 385lm / 350mA	IP20	15°	100055 9310 ◊	100057 9310 ◊	100059 9310 ◊
			30°	100055 9320 ◊	100057 9320 ◊	100059 9320 ◊
2700K CRI>90	1, 2 or 3x LED [E] 3.9W / 385lm / 350mA		15°	100055 9210 ◊	100057 9210 ◊	100059 9210 ◊
			30°	100055 9220 ◊	100057 9220 ◊	100059 9220 ◊

◊ B-B ●● / B-W ●○ / W-B ○● / W-W ○○



KIT x 70

KIT x 70

84 x 84 x 70 / max.25



155 x 84 x 70 / max.25

MINIGRID 67

				TRIMLESS 1	TRIMLESS 2	1	2
3000K CRI>90	1 or 2x LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500rr	IP20	18°	100001 9310 ◊	100002 9310 ◊	100003 9310 ◊	100004 9310 ◊
			25°	100001 9320 ◊	100002 9320 ◊	100003 9320 ◊	100004 9320 ◊
			37°	100001 9330 ◊	100002 9330 ◊	100003 9330 ◊	100004 9330 ◊
2700K CRI>90	1 or 2x LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500m²		18°	100001 9210 ◊	100002 9210 ◊	100003 9210 ◊	100004 9210 ◊
			25°	100001 9220 ◊	100002 9220 ◊	100003 9220 ◊	100004 9220 ◊
			37°	100001 9230 ◊	100002 9230 ◊	100003 9230 ◊	100004 9230 ◊

◊ B-B ●● / W-B ○● / W-W ○○ / B-W ●○

◊ B-B ●● / W-B ○● / W-W ○○



MINIGRID 67 ON

				1	2
3000K CRI>90	1 or 2x LED 5.8W / 734lm / 350mA LED 7.7W / 925lm / 450rr	MAINS DIM	18°	100005 9318 ◊	100006 9318 ◊
			25°	100005 9328 ◊	100006 9328 ◊
			37°	100005 9338 ◊	100006 9338 ◊
2700K CRI>90	1 or 2x LED 5.8W / 702lm / 350mA LED 7.7W / 885lm / 450rr		18°	100005 9218 ◊	100006 9218 ◊
			25°	100005 9228 ◊	100006 9228 ◊
			37°	100005 9238 ◊	100006 9238 ◊

◊ B-B ●● / W-B ○● / W-W ○○ / B-W ●○

220-240V / 50-60Hz


IP20



FIND ME ONLINE



INTERIOR CEILING

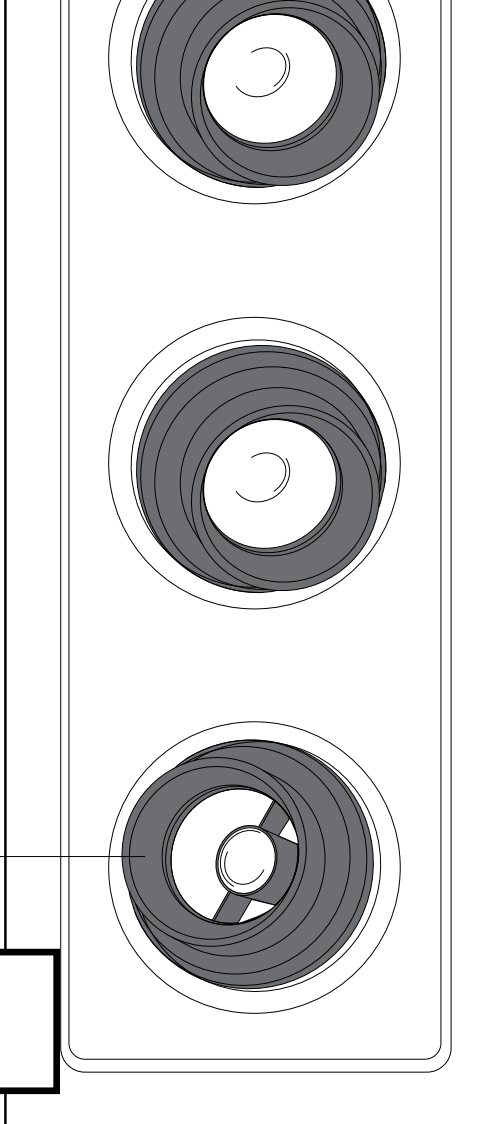

MICRO VISOR



**REDUCED
GLARE**

MICROGRID
3

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

			REQUIREMENT / OPTION / ACCESSORY								
			MICROGRID			MINIGRID 67					
			1	2	3	TRIMLESS		TRIM		ON	
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MAINS DIM (FE) 11	21012 0298	<i>i</i> min. 55	R	R	R	R	R	R	R		
1-10V DIM 15	300 90 124	<i>i</i> min. 55	R*	R*	R*	R	R	R	R		
DALI DIM 14	300 90 125	<i>i</i> min. 55	R	R	R	R	R	R	R		
MOUNTING KIT TRIMLESS											
CONCRETE	19310 0110					R					
	19310 0120						R				
PLASTERBOARD	19310 0050					R					
	19310 0060						R				
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MICRO VISOR	10034 0010 B		A	A	A						

* MIN. 2 x LED E



GRID

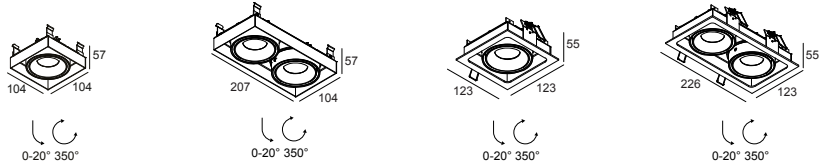


KIT x 85
 KIT x 85
 111 x 111 x 85 / max.22
 214 x 111 x 85 / max.22

MINIGRID IN			TRIMLESS 1	TRIMLESS 2	1	2	
3000K CRI>90	1 or 2x LED [F] 2W / 229lm / 700mA LED [F] 4.3W / 400lm / 1400mA	IP23	6°	100013 9310 ◊	100017 9310 ◊	100025 9310 ◊	100036 9310 ◊
			18°	100009 9310 ◊	100016 9310 ◊	100024 9310 ◊	100035 9310 ◊
			33°	100009 9320 ◊	100016 9320 ◊	100024 9320 ◊	100035 9320 ◊
			50°	100009 9330 ◊	100016 9330 ◊	100024 9330 ◊	100035 9330 ◊
2700K CRI>90	1 or 2x LED [F] 2W / 201lm / 700mA LED [F] 4.3W / 351lm / 1400mA	IP23	6°	100013 9210 ◊	100017 9210 ◊	100025 9210 ◊	100036 9210 ◊
			18°	100009 9210 ◊	100016 9210 ◊	100024 9210 ◊	100035 9210 ◊
			33°	100009 9220 ◊	100016 9220 ◊	100024 9220 ◊	100035 9220 ◊
			50°	100009 9230 ◊	100016 9230 ◊	100024 9230 ◊	100035 9230 ◊
	1 or 2x 3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP20	45°	100081 9030 ◊	100082 9030 ◊	100083 9030 ◊	100084 9030 ◊
				1 or 2x QPAR51 max.10W	100008 0000 ◊	100015 0000 ◊	100023 0000 ◊

◊ B-B ●● / B-W ●○ / W-B ●● / W-W ○○
 ◊ B-B ●● / B-W ●○ / W-B ●● / W-W ○○

LED 220-240V / 50-60Hz
QPAR51 GU10 / 100-240V / 50-60Hz

A

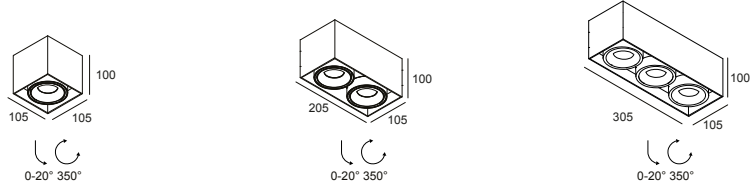


MINIGRID ON			1	2	3	
3000K CRI>90	1, 2 or 3x LED [J] 7.1W / 812lm / 350mA LED [J] 10.4W / 1128lm / 500mA	MAINS DIM	18°	100044 9318 ◊	100045 9318 ◊	100046 9318 ◊
			33°	100044 9328 ◊	100045 9328 ◊	100046 9328 ◊
			50°	100044 9338 ◊	100045 9338 ◊	100046 9338 ◊
2700K CRI>90	1, 2 or 3x LED [J] 7.1W / 779lm / 350mA LED [J] 10.4W / 1083lm / 500mA	MAINS DIM	18°	100044 9218 ◊	100045 9218 ◊	100046 9218 ◊
			33°	100044 9228 ◊	100045 9228 ◊	100046 9228 ◊
			50°	100044 9238 ◊	100045 9238 ◊	100046 9238 ◊
	1, 2 or 3x 3000-1800K / CRI>90 LED [J] 10.2W / 1038lm / 500mA	MAINS DIM	45°	100087 9038 ◊	100088 9038 ◊	100089 9038 ◊

◊ B-B ●● / B-W ●○ / W-B ●● / W-W ○○

220-240V / 50-60Hz

IP20

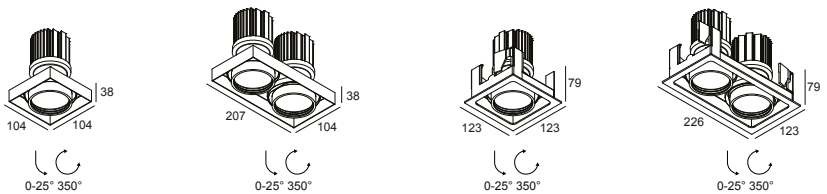


KIT x 160
 KIT x 160
 111 x 111 x 160 / max.25
 214 x 111 x 160 / max.25

MINIGRID IN HP			TRIMLESS 1	TRIMLESS 2	1	2	
3000K CRI>90	1 or 2x LED [J] 16.3W / 2309lm / 500mA LED [J] 23.2W / 3169lm / 700mA	IP23	20°	100049 9310 ◊	100050 9310 ◊	100047 9310 ◊	100048 9310 ◊
			37°	100049 9320 ◊	100050 9320 ◊	100047 9320 ◊	100048 9320 ◊
			50°	100049 9330 ◊	100050 9330 ◊	100047 9330 ◊	100048 9330 ◊
2700K CRI>90	1 or 2x LED [J] 16.3W / 2209lm / 500mA LED [J] 23.2W / 3031lm / 700mA	IP23	20°	100049 9210 ◊	100050 9210 ◊	100047 9210 ◊	100048 9210 ◊
			37°	100049 9220 ◊	100050 9220 ◊	100047 9220 ◊	100048 9220 ◊
			50°	100049 9230 ◊	100050 9230 ◊	100047 9230 ◊	100048 9230 ◊

◊ B-B ●● / B-W ●○ / W-B ●● / W-W ○○
 ◊ W-B ●● / W-W ○○



FIND ME ONLINE

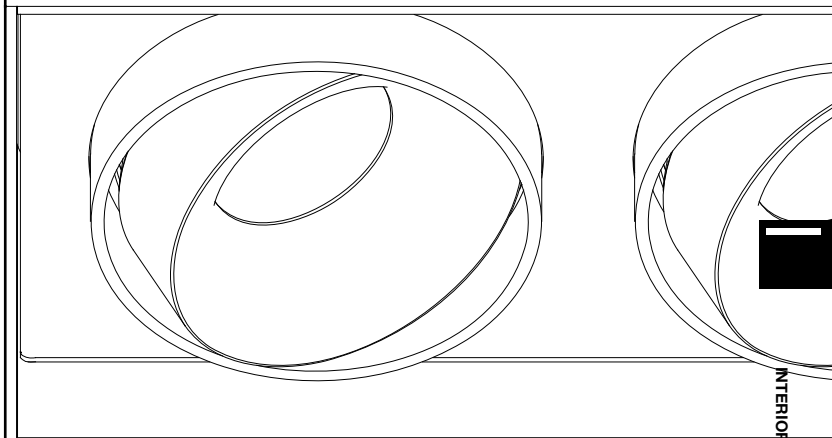

MINIGRID
ON 2

INTERIOR
CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

MINIGRID											
IN				ON			IN HP				
TRIMLESS							TRIMLESS				
1	2	1	2	1	2	3	1	2	1	2	

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	min. 55	R	R	R	R						
MAINS DIM (FE) 10	21012 0288	min. 55							R	R	R	R
1-10V DIM 16	300 90 63	min. 84	R*	R*	R*	R*			R	R	R	R
1-10V DIM 15	300 90 124	min. 55	R	R	R	R						
DALI DIM 16	300 90 63	min. 84	R*	R*	R*	R*			R	R	R	R
DALI DIM 14	300 90 125	min. 55	R	R	R	R						

MOUNTING KIT TRIMLESS

CONCRETE	202 71 95 01L		R									
	202 71 95 02L			R								
POURED CONCRETE	202 71 96 01		R									
	202 71 96 02			R								
PLASTERBOARD	202 71 95 01		R									
	202 71 95 02			R								
	202 71 95 01 HP								R			
	202 71 95 02 HP									R		

INSTALLATION

PLASTERKIT	202 72 99 01				O						O	
	202 72 99 02					O						O


HONEYCOMB / GLASS / LENS

HONEYCOMB SINGLE USE	201 05 01 B								A	A	A	A
SOFTENING LENS	201 05 04								A	A	A	A

* ONLY FOR 6" VERSION




Two different diameters, a down and down-up version and a limited height of only 69mm.

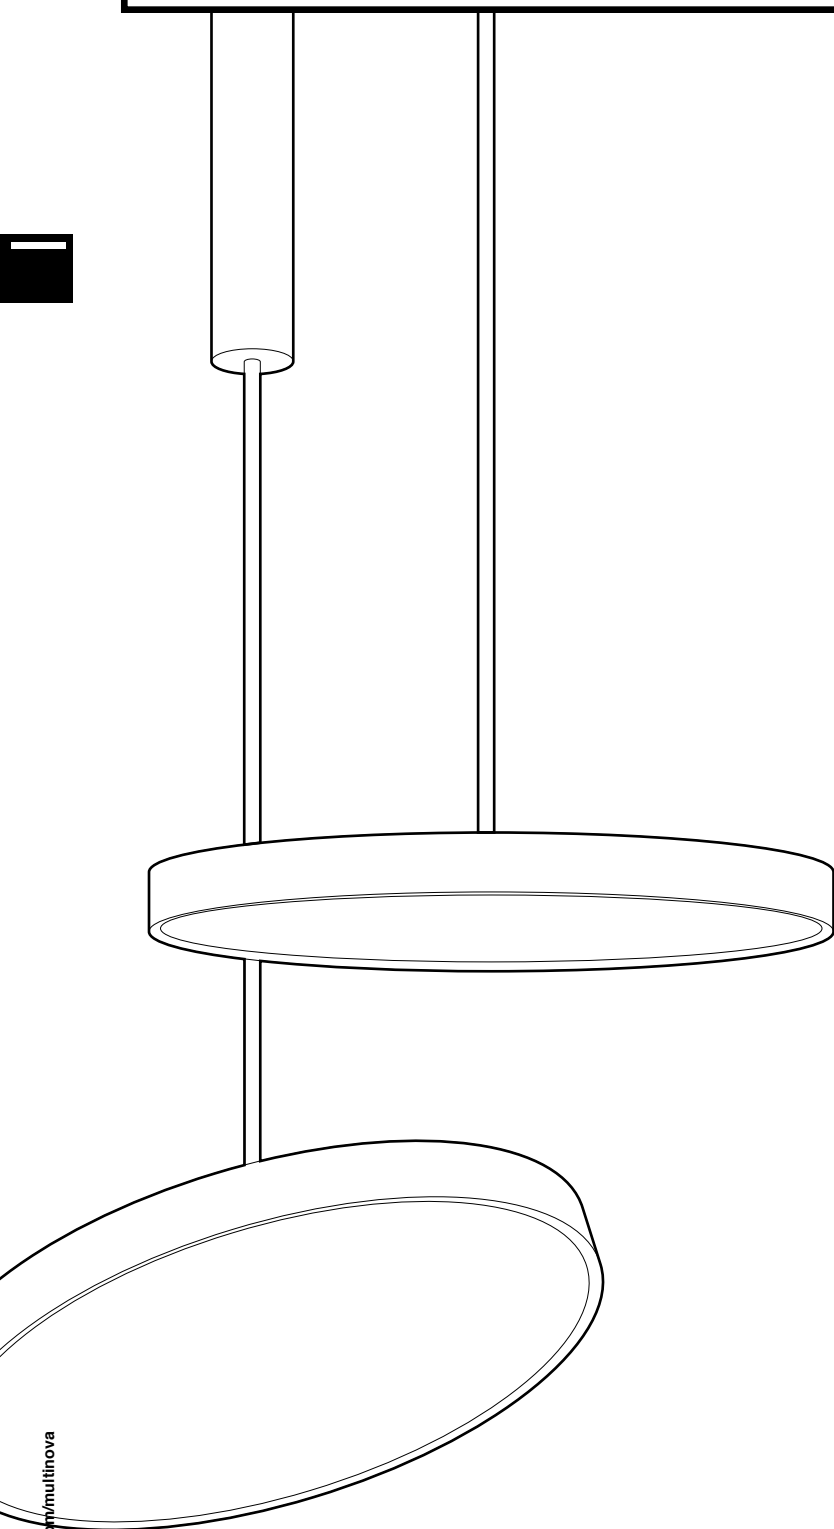



FIND ME ONLINE

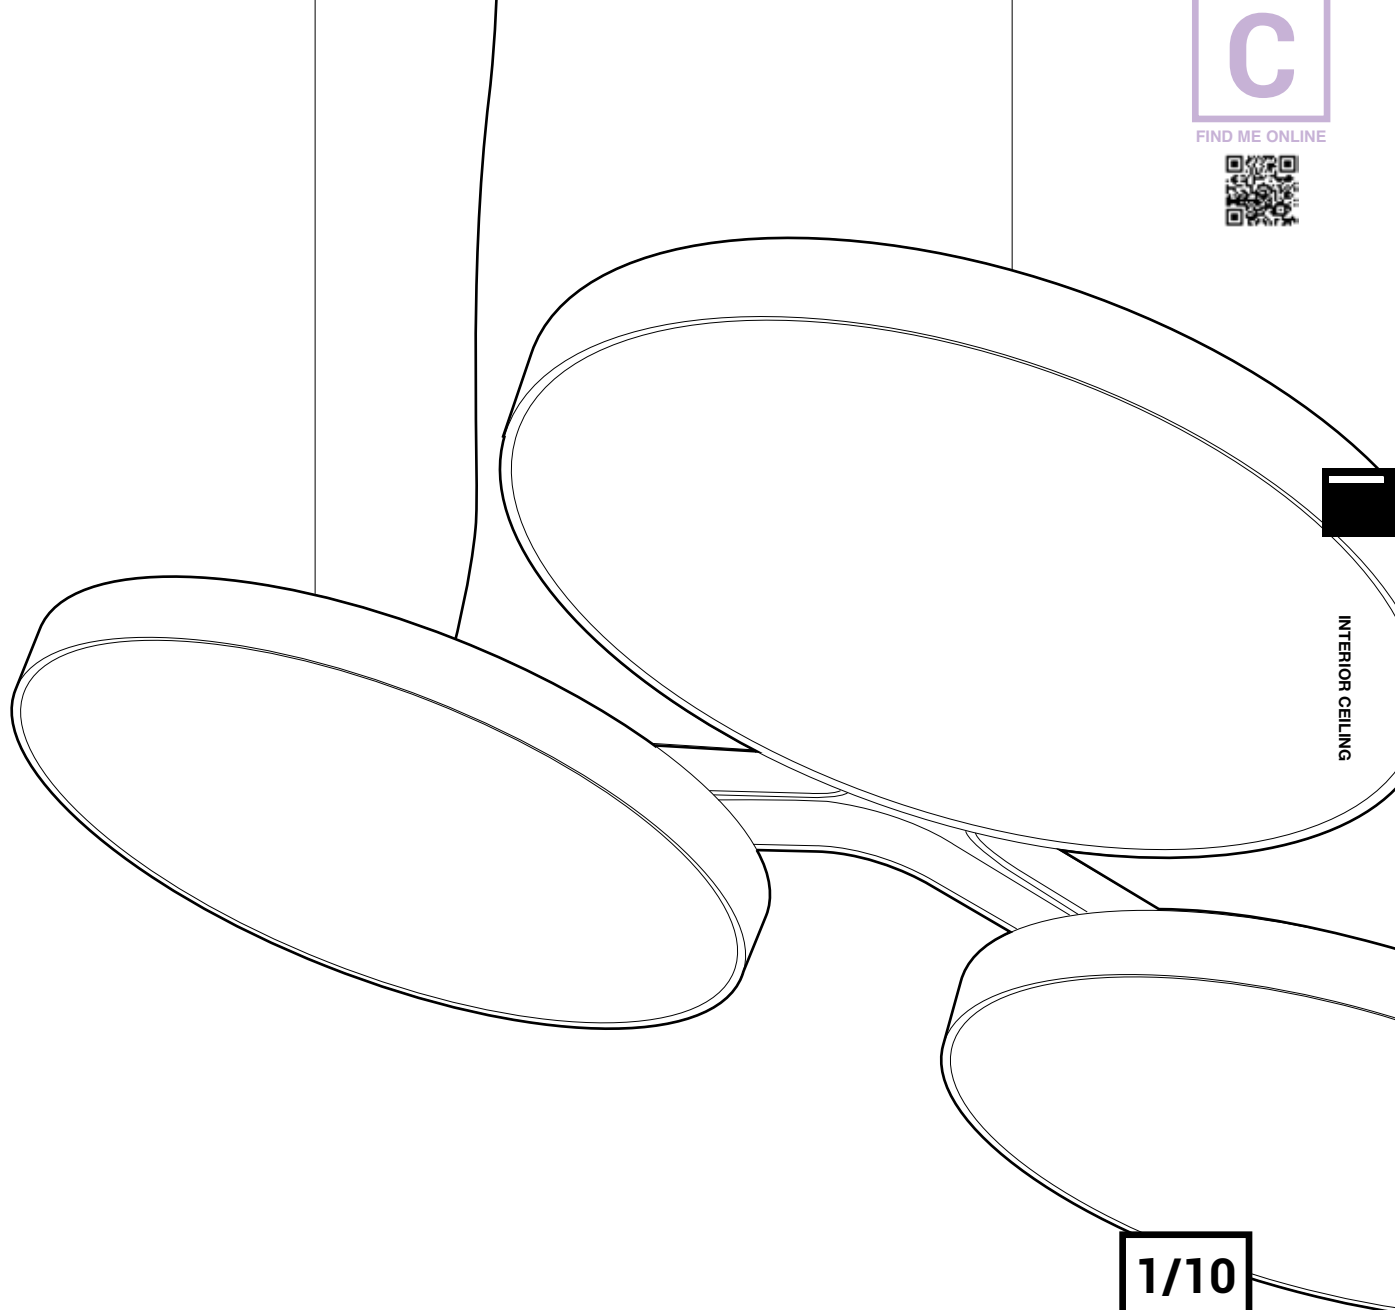

INTERIOR CEILING

1/10



MULTINOVA

MULTINOVA

Multinova has something familiar and something fresh at the same time. As a disc of light, Nova refers to the Supernova range, as both families share similarities in looks and ways of installation. But Multinova has some additional features to make it multi-applicable, hence Multi in the name.


With 2 different diameters, a down and down-up version and a limited height of only 69mm, Multinova is perfect to use in different ways. Its small dimensions fit in any residential or hospitality project, as a track mounted luminaire it suits any retail environment and with a prismatic sheet for reduced glare it even adapts in office settings.

Moreover, Multinova can be used on our Magnetic profiles for general lighting.

Multinova comes in our standard black or white and can also be finished in the warmer Gold Coloured to enrich its surroundings. To top it off – next to a sandblasted or prismatic optic – one can opt for a smoked sheet at the front for a more decorative touch. When turned on the disc is fully lit, when turned off a deep dark arises, ideal in combination with a Gold Coloured Multinova.


www.deltalight.com/multinova

FAMILY

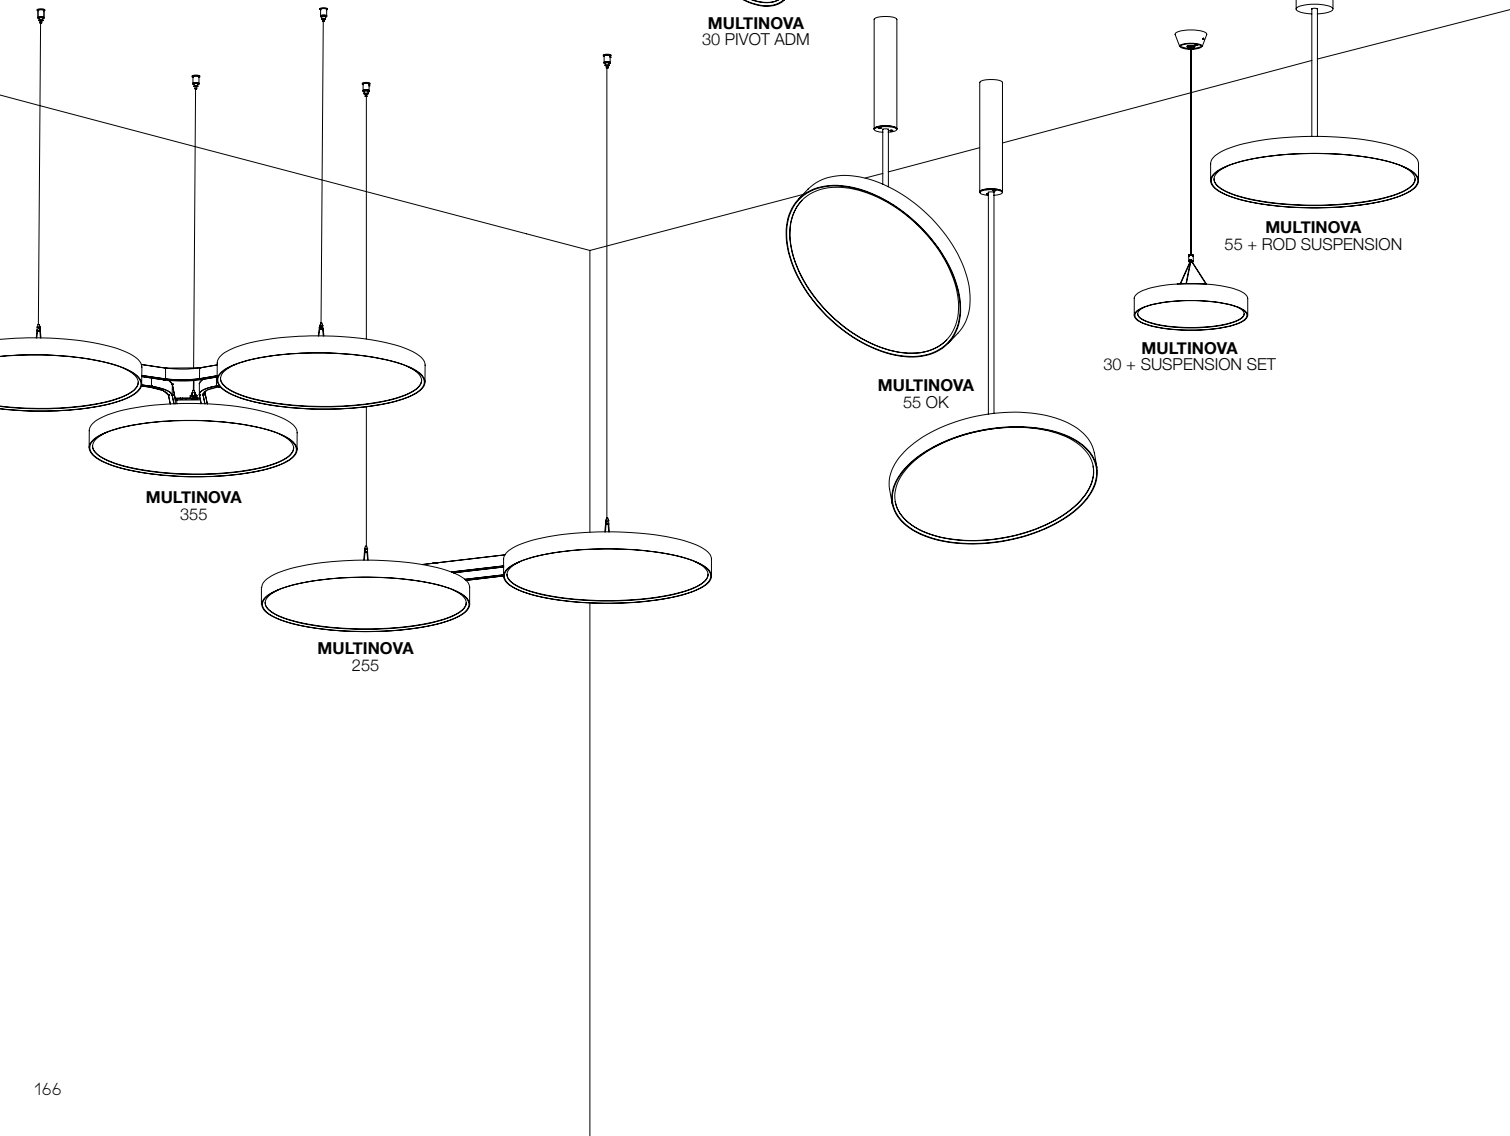





SMOKE
When turned on the disc is fully lit, when turned off a deep dark arises.

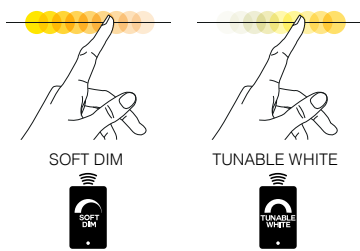

SANDBLASTED SMOKE PRISMATIC UGR <19

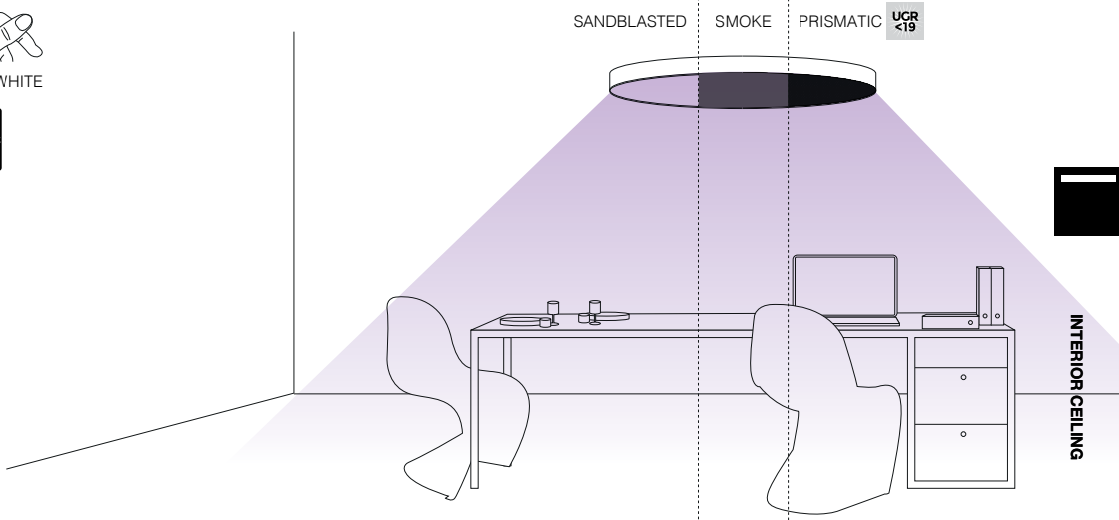

INTERIOR CEILING




	MULTINOVA			
	30	55	255	355
LIGHT EFFECT				
DOWN	9,4W - 1367lm 14,8W - 2148lm	33,2W - 4824lm	2 x 33,2W - 4824lm	3 x 33,2W - 4824lm
DOWN-UP	DOWN 9,4W - 1367lm 14,8W - 2148lm UP 2,8W - 406lm 4,3W - 631lm	DOWN 33,2W - 4824lm UP 5W - 721lm		
OPTICS				
SANDBLASTED SBL	•	•	•	•
PRISMATIC PR - UGR<19	•	•	•	•
SMOKE	•	•	•	•
COLOUR TEMPERATURE				
3000K	•	•	•	•
SOFT DIM 3000-1800K	•	•	•	•
TUNABLE WHITE 2700-5700K	•	•	•	•
CONTROL				
EXCL. POWER SUPPLY				
NON DIM	•	•		
MAINS DIM				
1-10V DIM				
DALI DIM	•	•	•	•
WIRELESS DIM				
COLOUR				
WHITE ○	•	•	•	•
BLACK ●	•	•	•	•
GOLD COLOURED ●	•	•	•	•
INSTALLATION				
INTERIOR	RECESSED TRIMLESS	•	•	
	RECESSED TILTABLE	•	•	
	SURFACE MOUNTED	•	•	
	SUSPENDED TILTABLE		•	
	SUSPENDED CABLE	•		•
	SUSPENDED ROD	•	•	
	TRACK	•	•	
	PROFILES	•	•	

• STANDARD
• NOT FOR ALL VERSIONS



MULTINOVA

A




MULTINOVA

			30			55		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
			UGR <19			UGR <19		
3000K CRI>90	LED 9,8W / 1358lm (HO) 14,9W / 2174lm	NON DIM	27911 9300 ◊	27912 9300 ◊	27913 9300 ◊			
		DALI DSI	27911 9304 ◊	27912 9304 ◊	27913 9304 ◊			
	LED 34,4W / 4767lm	NON DIM				28011 9300 ◊	28012 9300 ◊	28013 9300 ◊
		DALI DSI				28011 9304 ◊	28012 9304 ◊	28013 9304 ◊
SOFT DIM	LED 3000-1800K / CRI>90 (HO) 14,5W / 2188lm	DALI	27916 9005 ◊					
	LED 3000-1800K / CRI>90 32,3W / 4567lm		28016 9005 ◊					
TUNABLE WHITE	LED 9,4W / CRI>90 6500K / 1428lm - 2700K / 1338lm	DALI DT8	27914 9005 ◊	27915 9005 ◊				
	LED 31,1W / CRI>90 6500K / 4746lm - 2700K / 4430lm		28014 9005 ◊	28015 9005 ◊				
			◊ B ● / GC ● / W ○	◊ B ● / W ○	◊ B ● / GC ● / W ○	◊ B ● / GC ● / W ○	◊ B ● / W ○	◊ B ● / GC ● / W ○
			220-240V / 0 50-60Hz					
			IP20					



MULTINOVA DOWN-UP

			30			55		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
			UGR <19			UGR <19		
3000K CRI>90	LED UP 2,8W / 385lm LED UP (HO) 4,5W / 598lm LED DOWN 9,2W / 1284lm LED DOWN (HO) 15W / 1994lm	NON DIM	27917 9300 ◊	27918 9300 ◊	27919 9300 ◊			
		DALI DSI	27917 9304 ◊	27918 9304 ◊	27919 9304 ◊			
	LED UP 5,1W / 706lm LED DOWN 34,4W / 4767lm	NON DIM				28017 9300 ◊	28018 9300 ◊	28019 9300 ◊
		DALI DSI				28017 9304 ◊	28018 9304 ◊	28019 9304 ◊
TUNABLE WHITE	LED UP 2,7W / CRI>90 6500K / 406lm - 2700K / 379lm LED DOWN 8,9W / CRI>90 6500K / 1352lm - 2700K / 1262lm	DALI DT8	27920 9005 ◊	27921 9005 ◊				
	LED UP 4,3W / CRI>90 6500K / 661lm - 2700K / 621lm LED DOWN 29,2W / CRI>90 6500K / 4465lm - 2700K / 4191lm		28020 9005 ◊	28021 9005 ◊				
			◊ B ● / GC ● / W ○	◊ B ● / W ○	◊ B ● / GC ● / W ○	◊ B ● / GC ● / W ○	◊ B ● / W ○	◊ B ● / GC ● / W ○
			220-240V / 0 50-60Hz					
			IP20					

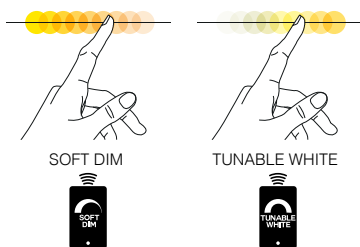


A




SURFACE



+ RECESSED KIT




+ SUSPENSION SET



+ ROD SUSPENSION

B

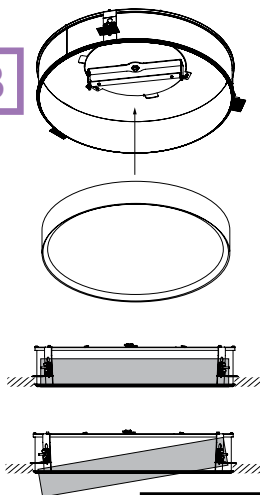

TILT ME


FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		MULTINOVA			
		30	55	30 DOWN-UP	55 DOWN-UP
INSTALLATION RECESSED					
MULTINOVA 30 RECESSED KIT	27910 0050	R			
MULTINOVA 55 RECESSED KIT	28010 0050		R		
INSTALLATION SUSPENDED					
SUSPENSION SET 3m	27910 0020	R		R	
	27910 0010		R		R
or ROD SUSPENSION 0,4m	27910 0030 B / W		R		R
or ROD SUSPENSION 0,8m	27910 0040 B / W		R		R
CONNECTION ST	15225 0360 B / W	O	O	O	O
SUSPENSION ST	15225 0340 B / W	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W	O	O	O	O
COVERSET R Ø100	204 00 100 B / W	O	O	O	O



B

MULTINOVA





MULTINOVA OK

			55					
			SBL		PRISMATIC		SMOKE	
			L= 400mm	L= 800mm	L= 400mm	L= 800mm	L= 400mm	L= 800mm
					UGR <19			
3000K CRI>90	LED 34,4W / 4767lm	NON DIM	28022 9300 ◊	28025 9300 ◊	28023 9300 ◊	28026 9300 ◊	28024 9300 ◊	28027 9300 ◊
		DALI DSI	28022 9304 ◊	28025 9304 ◊	28023 9304 ◊	28026 9304 ◊	28024 9304 ◊	28027 9304 ◊
			◊ B ● / GC ● / W ○		◊ B ● / W ○		◊ B ● / GC ● / W ○	
220-240V / 0 50-60Hz								





MULTINOVA PIVOT

			30			55 PIVOT		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
			UGR <19			UGR <19		
3000K CRI>90	LED 9,8W / 1358lm (HO) 14,9W / 2174lm	NON DIM	27928 9300 ◊	27929 9300 ◊	27930 9300 ◊			
		DALI DSI	27928 9304 ◊	27929 9304 ◊	27930 9304 ◊			
	LED 34,4W / 4767lm	NON DIM				28028 9300 ◊	28029 9300 ◊	28030 9300 ◊
		DALI DSI				28028 9304 ◊	28029 9304 ◊	28030 9304 ◊
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / W ○			◊ B ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / W ○			◊ B ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
220-240V / 50-60Hz								

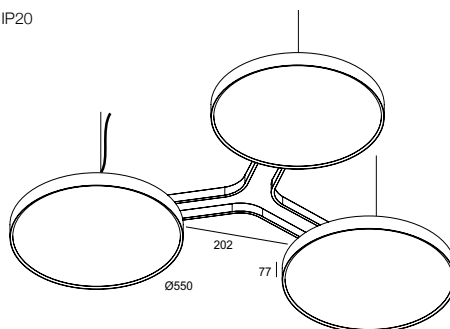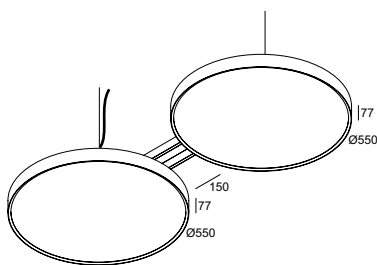

MULTINOVA

			255			355		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
			UGR <19			UGR <19		
3000K CRI>90	2X LED 34,4W / 4767lm	DALI DSI	28056 9304 ◊	28057 9304 ◊	28058 9304 ◊			
	3X LED 34,4W / 4767lm					28062 9304 ◊	28063 9304 ◊	28064 9304 ◊
SOFT DIM	3000-1800K / CRI>90 2X LED 32,3W / 4567lm	DALI	28061 9005 ◊					
	3000-1800K / CRI>90 3X LED 32,3W / 4567lm					28067 9005 ◊		
TUNABLE WHITE	2x LED 31,1W / CRI>90 6500K / 4746lm - 2700K / 4430lm	DALI DT8	28059 9005 ◊	28060 9005 ◊				
	3x LED 31,1W / CRI>90 6500K / 4746lm - 2700K / 4430lm					28065 9005 ◊	28066 9005 ◊	
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / W ○			◊ B ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
			◊ B ● / W ○			◊ B ● / W ○		
			◊ B ● / GC ● / W ○			◊ B ● / GC ● / W ○		
INCL.1 x CABLE 5 x 0,75mm ² INCL.2 x CABLE SUSP. SINGLE AUTO. 3m								
INCL.1 x CABLE 5 x 0,75mm ² INCL.3 x CABLE SUSP. SINGLE AUTO. 3m								
220-240V / 50-60Hz								

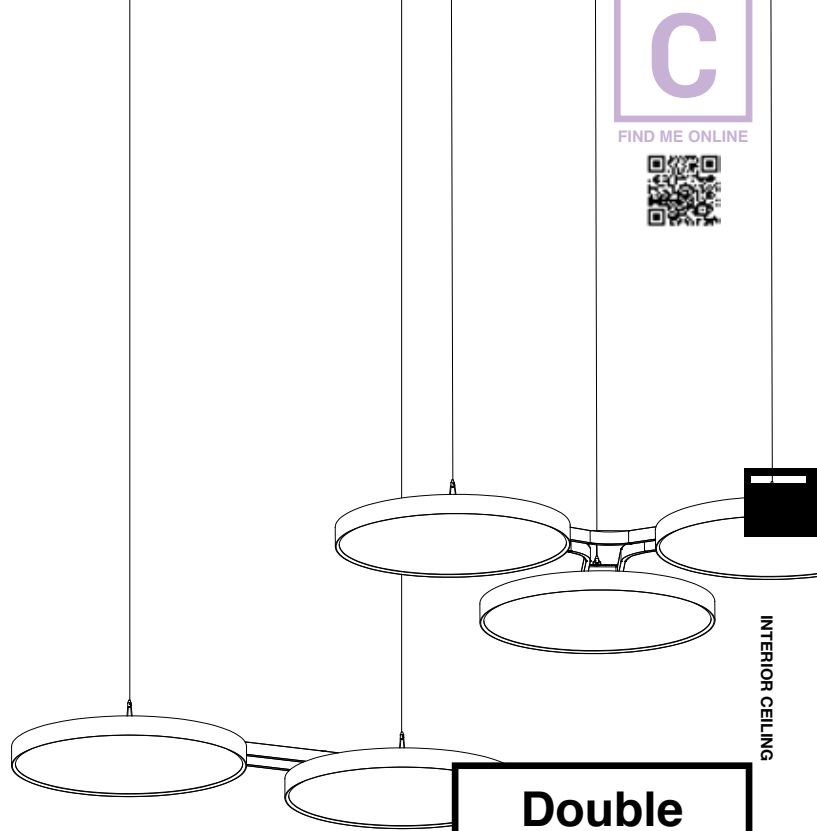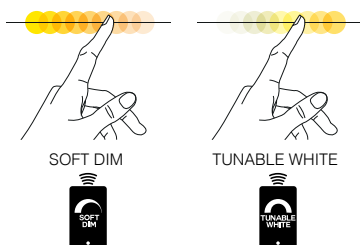


INTERIOR CEILING

Double or Triple?

Go for the ultimate statement by opting for these clustered Multinova suspensions, coupled together in pairs or as a trio of enlightened discs. Use them in bigger spaces like lobbies, above reception desks or in open plan offices and combine beauty with functionality in one.

Flip me, I'm made for it!


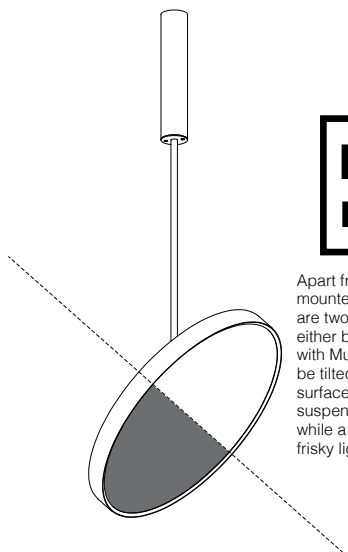


Apart from the recessed, surface mounted and track version, there are two ways to suspend Multinova, either by cable or rod. Moreover, with Multinova 55 OK, Multinova can be tilted up to 90° to face vertical surfaces as well. As such, one single suspension can dress up any room while a cluster of these serve to create frisky light settings.

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

		MULTINOVA				
		55 OK	30 PIVOT	55 PIVOT	255	355
INSTALLATION SUSPENDED						
CONNECTION ST	15225 0360 B / W				0	0
SUSPENSION ST	15225 0340 B / W				0	0
CABLE BASE R	203 99 55 ANO / B / W				0	0
COVERSET R Ø100	204 00 100 B / W	0			0	0

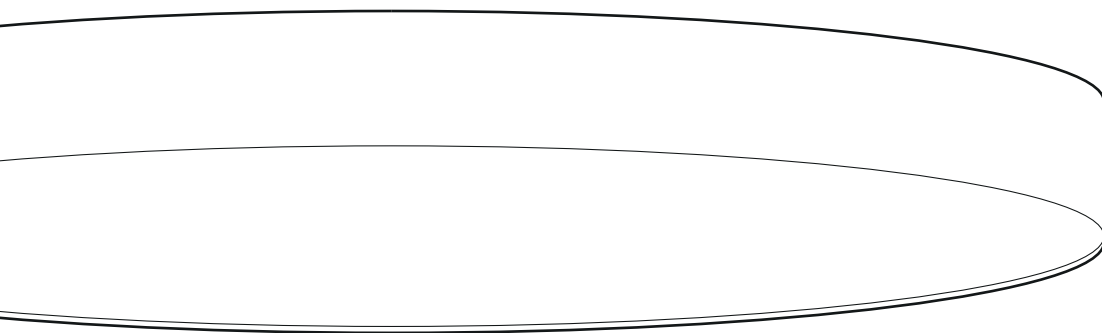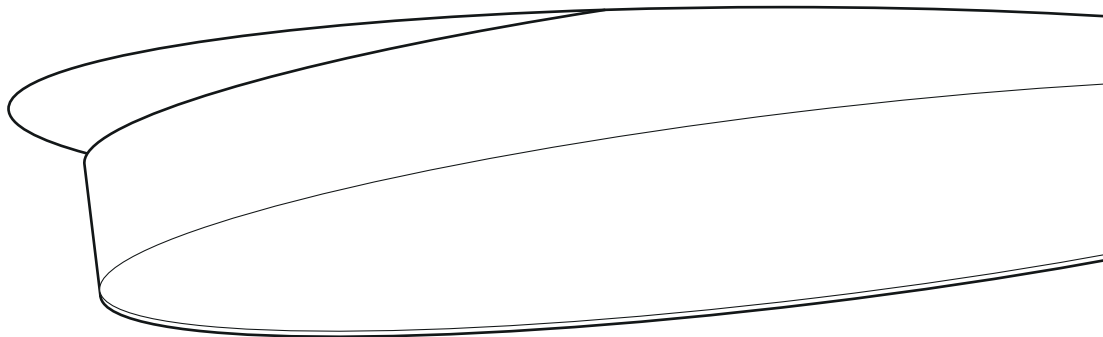

1/10





Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.

INTERIOR CEILING

SUPERNOVA



SUPERNOVA



FAMILY

Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. The range comes in different diameters and application possibilities. Supernova features in-house developed printed circuit boards specifically engineered to provide a uniform illumination of the polycarbonate. Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.

As a plus, presence control and daylight simulation can be done thanks to the optional presence detection and the tunable white versions of the Supernova.

www.deltalight.com/supernova

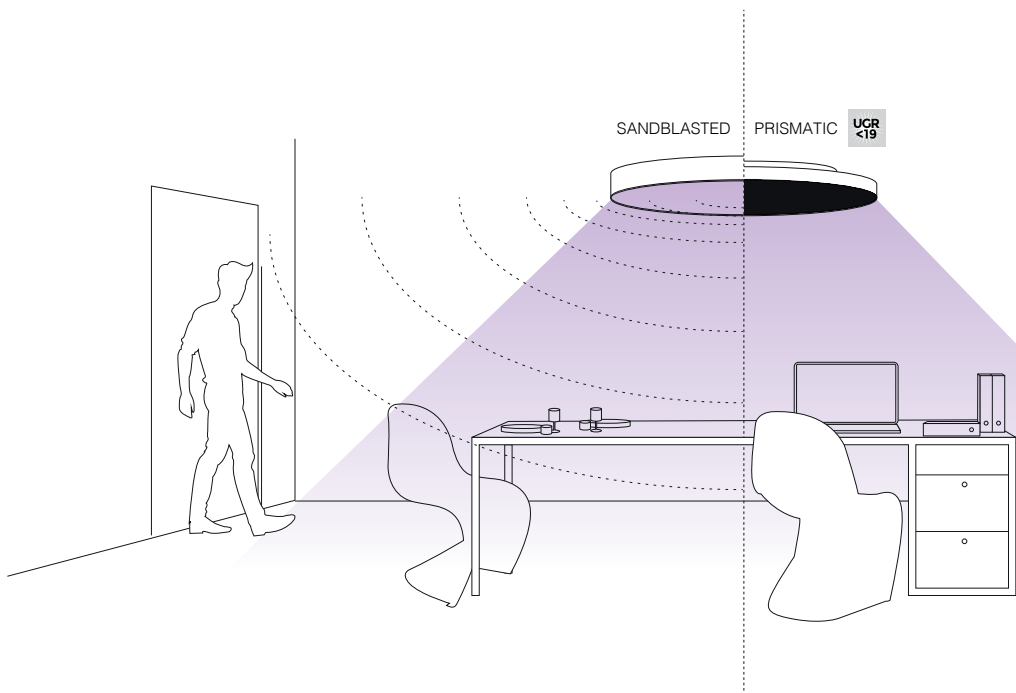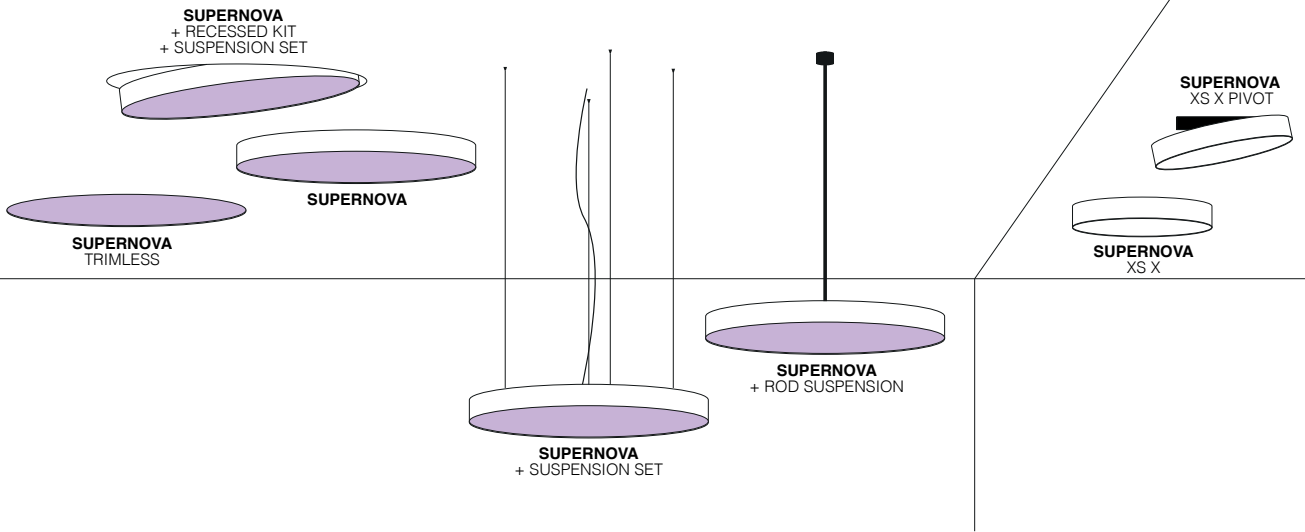

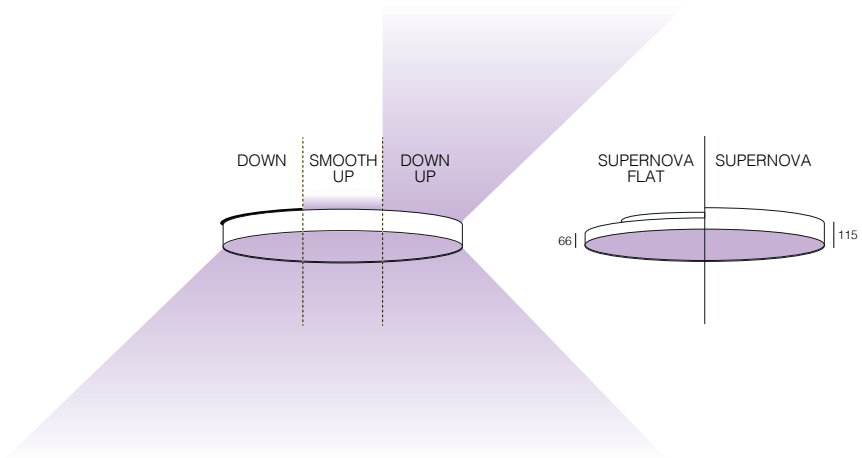


INTERIOR CEILING


	XS	SUPERNOVA			FLAT	
	260	650	950	1250	650	950
LIGHT EFFECT						
DOWN	15W - 1580lm	57W - 9200lm	143W - 23000lm	239W - 36800lm	62W - 7568lm	132W - 16227lm
SMOOTH-UP					62W - 7568lm	132W - 16227lm
DOWN-UP		DOWN 57W - 9200lm UP 14W - 2300lm	DOWN 143W - 23000lm UP 29W - 4600lm	DOWN 239W - 36800lm UP 43W - 6900lm	DOWN 62W - 7568lm UP 21,4W - 3200lm	DOWN 132W - 16227lm UP 21,4W + 3200lm
OPTICS						
SANDBLASTED SBL	•	•	•	•	•	•
PRISMATIC PR - UGR<19					•	•
COLOUR TEMPERATURE						
3000K	•	•	•	•	•	•
TUNABLE WHITE 2700-5700K		•	•	•		
CONTROL						
EXCL. POWER SUPPLY						
NON DIM	•	•	•	•	•	•
MAINS DIM						
1-10V DIM		•	•	•	•	•
DALI DIM		•	•	•	•	•
WIRELESS DIM		•	•	•	•	•
COLOUR						
WHITE ○	•	•	•	•	•	•
BLACK ●		•	•	•	•	•
DARK GREY ●	•					
RAL COLOUR (ON REQUEST)		•	•	•	•	•
INSTALLATION						
INTERIOR	RECESSED TRIMLESS		•	•	•	
	RECESSED TILTABLE		•	•	•	
	SURFACE MOUNTED		•	•	•	•
	SUSPENDED CABLE		•	•	•	•
	SUSPENDED ROD		•	•	•	•
EXTERIOR	SURFACE MOUNTED	•				
	SURFACE MOUNTED TILTABLE	•				
OTHER						
PRESENCE DETECTION		•	•	•		

• STANDARD
• NOT FOR ALL VERSIONS


SUPERNOVA



685 x 200 / max.25



985 x 200 / max.25



1285 x 200 / max.25

SUPERNOVA TRIMLESS

65	95	125
LINE / SBL	LINE / SBL	LINE / SBL

3000K CRI>90	LED 58,8W / 8635lm	NON DIM	20628 9300		
		1-10V	20628 9301		
		DALI	20628 9305		
	LED 147W / 21588lm	NON DIM		20629 9300	
		1-10V		20629 9301	
		DALI		20629 9305	
	LED 235,2W / 34541lm	NON DIM			20630 9300
		1-10V			20630 9301
		DALI			20630 9305
TUNABLE WHITE	LED 45W / CRI>90 5700K / 4841lm - 2700K / 4208lm	DALI DT6	274 89 06 26 ED5		
		WIRELESS	274 89 06 26 WD		
	LED 112W / CRI>90 5700K / 12103lm - 2700K / 10520lm	DALI DT6		274 89 09 26 ED5	
		WIRELESS		274 89 09 26 WD	
	LED 179W / CRI>90 5700K / 19338lm - 2700K / 16942lm	DALI DT6			274 89 12 26 ED5
		WIRELESS			274 89 12 26 WD


3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz

FOR WIRELESS



IP20

FOR TUNABLE WHITE VERSION:
DALI: 2 DALI CONTROL CHANNELS DT6
WIRELESS: HUMAN CENTRIC LIGHT CONTROL (MORE INFO IN TECHNICAL CHAPTER)

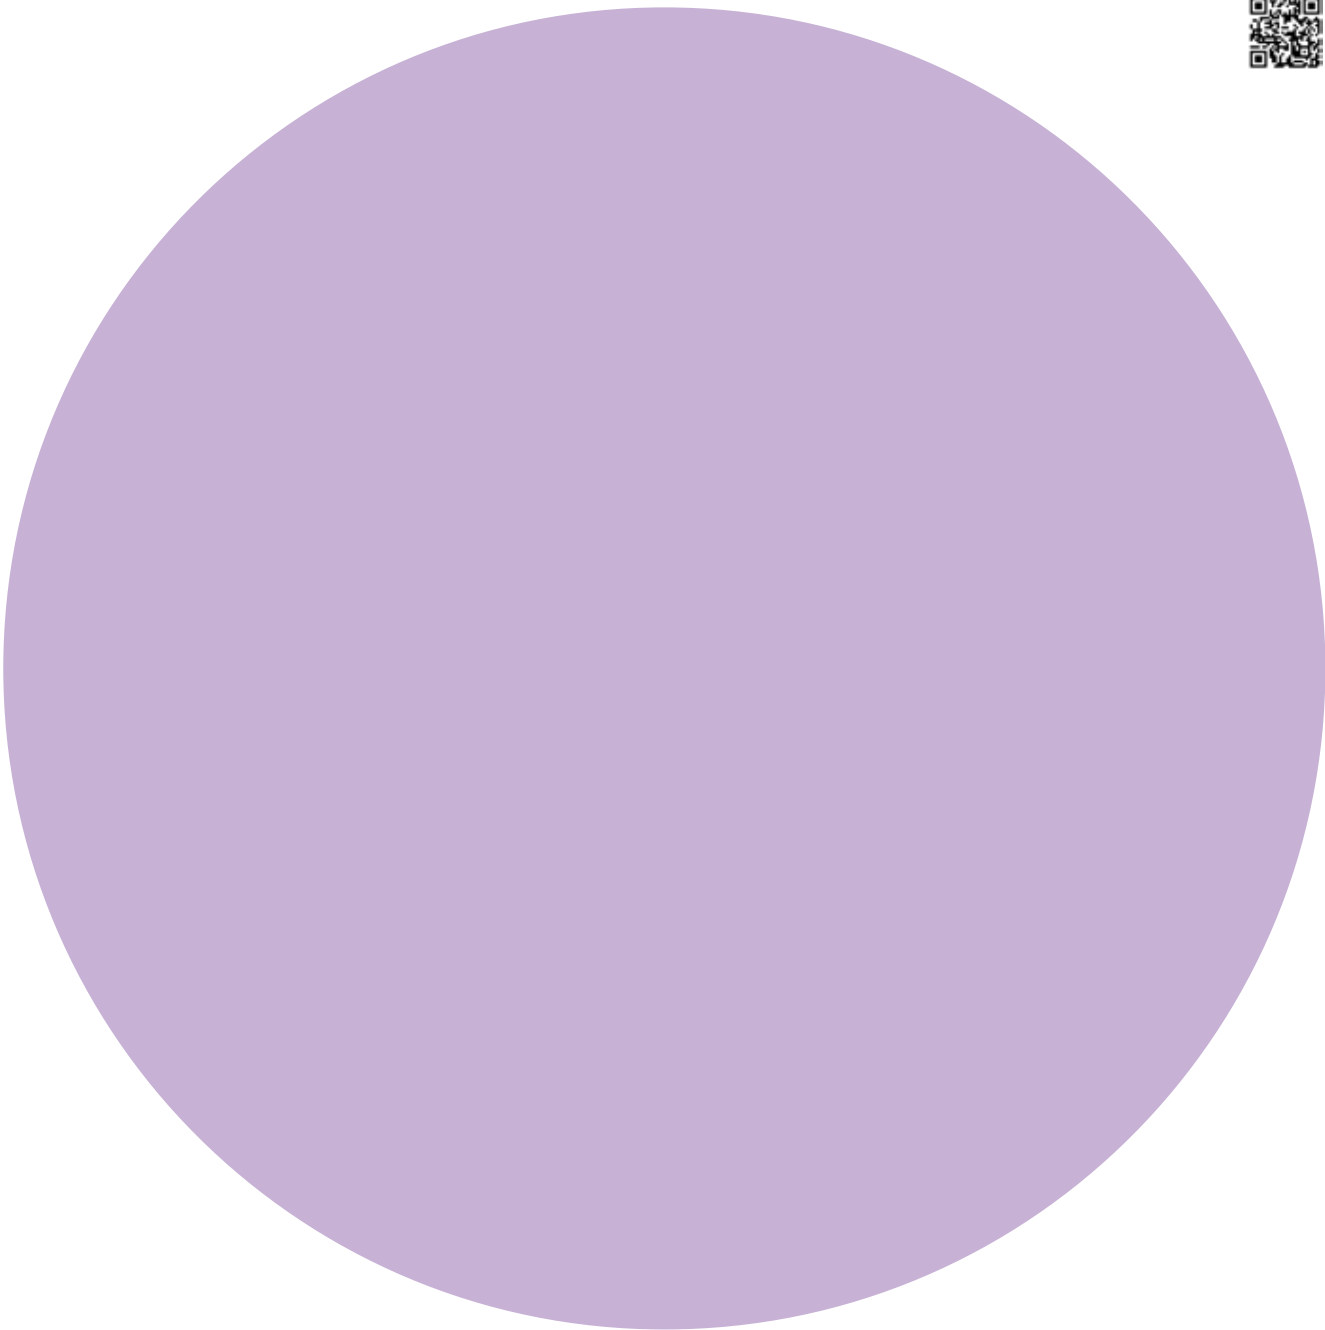

INTERIOR CEILING

B

FINISH YOUR SPECIFICATION




REQUIREMENT / OPTION / ACCESSORY

SUPERNOVA TRIMLESS

		65	95	125
INSTALLATION				
PRESENCE DETECTION HF SENSOR	300 90 311	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

INVISIBLE BEHIND POLYCARBONATE
NOT FOR TW VERSION

SUPERNOVA



SUPERNOVA LINE SBL

			65	95	125
3000K CRI>90	LED 58,8W / 8635lm	NON DIM	20622 9300 ◊		
		1-10V	20622 9301 ◊		
		DALI	20622 9305 ◊		
	LED 147W / 21588lm	NON DIM		20624 9300 ◊	
		1-10V		20624 9301 ◊	
		DALI		20624 9305 ◊	
LED 235,2W / 34541lm	NON DIM			20626 9300 ◊	
	1-10V			20626 9301 ◊	
	DALI			20626 9305 ◊	
TUNABLE WHITE	LED 45W / CRI>90 5700K / 4841lm - 2700K / 4208lm	DALI DT6	274 95 06 26 ED5 ◊		
		WIRELESS	274 95 06 26 WD ◊		
	LED 112W / CRI>90 5700K / 12103lm - 2700K / 10520lm	DALI DT6		274 95 09 26 ED5 ◊	
		WIRELESS		274 95 09 26 WD ◊	
	LED 179W / CRI>90 5700K / 19338lm - 2700K / 16942lm	DALI DT6			274 95 12 26 ED5 ◊
		WIRELESS			274 95 12 26 WD ◊




◊ B ● / W ○

3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz

FOR WIRELESS



FOR TUNABLE WHITE VERSION: ◊ IP20
DALI: 2 DALI CONTROL CHANNELS DT6
WIRELESS: HUMAN CENTRIC LIGHT CONTROL (MORE INFO IN TECHNICAL CHAPTER)



SUPERNOVA LINE SBL DOWN-UP

			65	95	125
3000K CRI>90	LED UP 14,8W / 2158lm LED DOWN 58,8W / 8635lm	NON DIM	20616 9300 ◊		
		1-10V	20616 9301 ◊		
		DALI	20616 9305 ◊		
	LED UP 29,6W / 4316lm LED DOWN 147W / 21588lm	NON DIM		20618 9300 ◊	
		1-10V		20618 9301 ◊	
		DALI		20618 9305 ◊	
LED UP 44,4W / 6474lm LED DOWN 235,2W / 34541lm	NON DIM			20620 9300 ◊	
	1-10V			20620 9301 ◊	
	DALI			20620 9305 ◊	
TUNABLE WHITE	LED UP 17W / CRI>90 5700K / 1510lm - 2700K / 1374lm LED DOWN 45W / CRI>90 5700K / 4841lm - 2700K / 4208lm	DALI DT6	274 96 06 26 ED5 ◊		
		WIRELESS		274 96 09 26 ED5 ◊	
	LED UP 50W / CRI>90 5700K / 4530lm - 2700K / 4122lm LED DOWN 179W / CRI>90 5700K / 19338lm - 2700K / 16942lm	DALI DT6			274 96 12 26 ED5 ◊

◊ B ● / W ○

3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz

FOR 3000K VERSION: ◊ IP20
4 x CABLE SUSPENSION 3m
1 x CABLE 3 x 0,75mm² (NON DIM)
2 x CABLE 5 x 0,75mm² (1-10V DIM)
1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI)
CABLING 2 CIRCUITS (only DIM versions)

FOR TUNABLE WHITE VERSION:
4 x CABLE SUSPENSION 3m
2 x CABLE 5 x 0,75mm²
4 DALI CONTROL CHANNELS DT6




The recessed version is a particularly eye-catching option in the Supernova range, thanks to its tilted application. A recessed kit facilitates installation, allows you to customize the depth and angle of the Supernova, and ensures the inner workings of the fitting are concealed within the ceiling.

Surface mounted, Supernova is a timeless lighting solution that guarantees powerful illumination and striking atmosphere, blending harmonically into its space. Its uninterrupted circular form and neutral character enhance any room, from hotel lobbies to corridors to shops, or any other type of project.

A suspended Supernova uses four delicate steel cords to enable an easy suspension. The down-up version features a polycarbonate on top to avoid dust entering the fixture and guaranteeing a pleasant and an immaculate indirect light effect. Thanks to the transparent supply cable and the trimless suspension kit you can opt for a very clean and minimalistic ceiling suspension.

RECESSED INSTALLATION

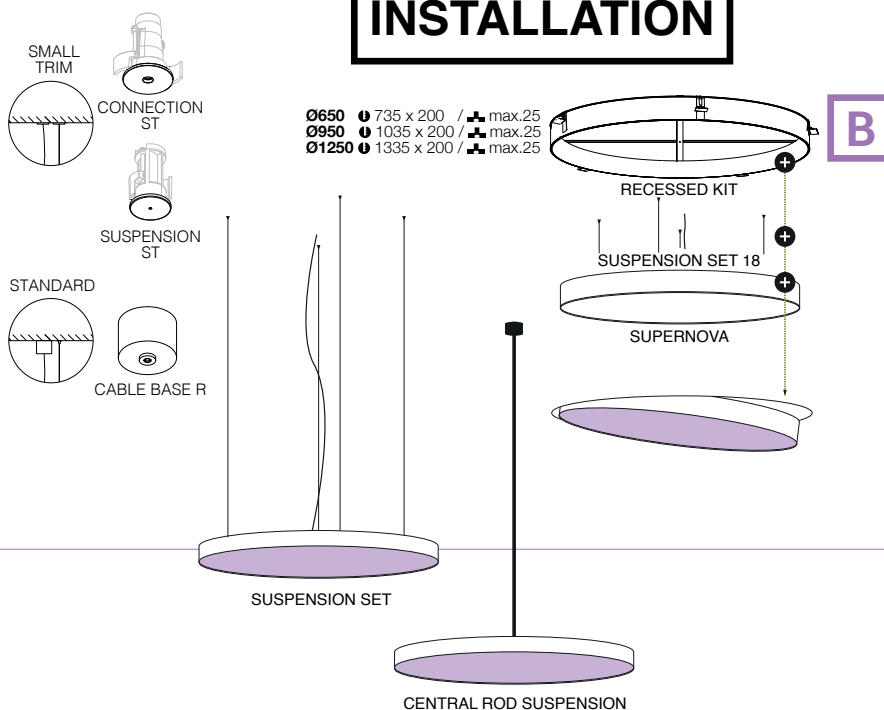

INTERIOR CEILING

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

SUPERNOVA LINE

		65	95	125	65 DOWN-UP	95 DOWN-UP	125 DOWN-UP
INSTALLATION RECESSED							
65 RECESSED KIT	274 94 0710	R					
95 RECESSED KIT	274 94 1010		R				
125 RECESSED KIT	274 94 1310			R			
+ SUSPENSION SET 3m NON-DIM / WD	328 18 43	R	R	R			
+ SUSPENSION SET 3m 1-10V / DALI	328 18 43 ED1	R	R	R			
+ SUSPENSION SET 3m TW	328 18 43 TW ED5	R	R	R			
INSTALLATION SUSPENDED							
SUSPENSION SET 3m NON-DIM / WD	328 18 43	R	R	R			
SUSPENSION SET 3m 1-10V / DALI	328 18 43 ED1	R	R	R			
SUSPENSION SET 3m TW	328 18 43 TW ED5	R	R	R			
or ROD SUSPENSION 1m	328 24 61 B / W	R					
	328 24 91 B / W		R				
CONNECTION ST	15225 0360 B / W	O	O	O	O	O	O
SUSPENSION ST	15225 0340 B / W	O	O	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W	O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W	O	O	O	O	O	O
PRESENCE DETECTION HF SENSOR	300 90 311	O	O	O	O	O	O

B

SUPERNOVA FLAT


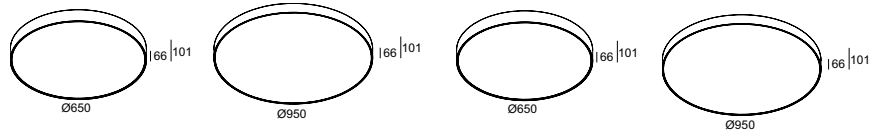


SUPERNOVA FLAT

			65		95		65 SMOOTH UP		95 SMOOTH UP					
			SBL	PRISMATIC	SBL	PRISMATIC	SBL	PRISMATIC	SBL	PRISMATIC				
			UGR <19		UGR <19		UGR <19		UGR <19					
3000K CRI>90	LED 37,4W / 5360lm / 930mA* LED 58,5W / 7776lm / 1400mA*	NON DIM	20631 9300	◇					20632 9300	◇				
		1-10V	20631 9301	◇					20632 9301	◇				
		DALI	20631 9305	◇					20632 9305	◇				
	LED 37,4W / 5360lm / 930mA	NON DIM		20633 9300	◇					20634 9300	◇			
		1-10V		20633 9301	◇					20634 9301	◇			
		DALI		20633 9305	◇					20634 9305	◇			
	LED 54,2W / 8273lm / 1300mA* LED 79,4W / 11477lm / 1860mA* LED 123,7W / 16507lm / 2800mA*	NON DIM				20635 9300	◇					20636 9300	◇	
		1-10V				20635 9301	◇					20636 9301	◇	
		DALI				20635 9305	◇					20636 9305	◇	
	LED 54,2W / 8273lm / 1300mA* LED 79,4W / 11477lm / 1860mA*	NON DIM						20637 9300	◇				20638 9300	◇
		1-10V						20637 9301	◇				20638 9301	◇
		DALI						20637 9305	◇				20638 9305	◇

*MULTIPLE SETTINGS ONLY FOR NON DIM VERSION
DIMMABLE VERSION = HIGHEST CURRENT

◇ B ● / W ○
220-240V / 0 | 50-60Hz
◇ IP20



SUPERNOVA FLAT

			65 DOWN-UP		95 DOWN-UP				
			SBL	PRISMATIC	SBL	PRISMATIC			
			UGR <19		UGR <19				
3000K CRI>90	LED UP 22,2W / 2974lm DOWN 37,4W / 5360lm / 930mA* DOWN 58,5W / 7776lm / 1400mA*	NON DIM	20612 9300	◇					
		1-10V	20612 9301	◇					
		DALI	20612 9305	◇ **					
	LED UP 22,2W / 2974lm LED 37,4W / 5360lm / 930mA*	NON DIM			20613 9300	◇			
		1-10V			20613 9301	◇			
		DALI			20613 9305	◇ **			
	LED UP 22,2W / 2974lm DOWN 54,2W / 8273lm / 1300mA* DOWN 79,4W / 11477lm / 1860mA* LED 123,7W / 16507lm / 2800mA*	NON DIM					20614 9300	◇	
		1-10V					20614 9301	◇	
		DALI					20614 9305	◇ **	
	LED UP 22,2W / 2974lm DOWN 54,2W / 8273lm / 1300mA* DOWN 79,4W / 11477lm / 1860mA*	NON DIM						20615 9300	◇
		1-10V						20615 9301	◇
		DALI						20615 9305	◇ **



*MULTIPLE SETTINGS ONLY FOR NON DIM VERSION
DIMMABLE VERSION = HIGHEST CURRENT

◇ B ● / W ○
220-240V / 0 | 50-60Hz
◇ IP20

** 2 DALI ADDRESSES



The evolution in LED allowed for a more minimalistic design, visible within Supernova Flat. It combines the Supernova characteristics with a more subtle housing, creating a neat and modern look. Combined with a prismatic cover, Supernova Flat offers a lighting solution suitable for office and school application as its UGR remains below 19. Available for direct or direct-indirect lighting or with a soft uplight accent in Supernova Flat Smooth Up.

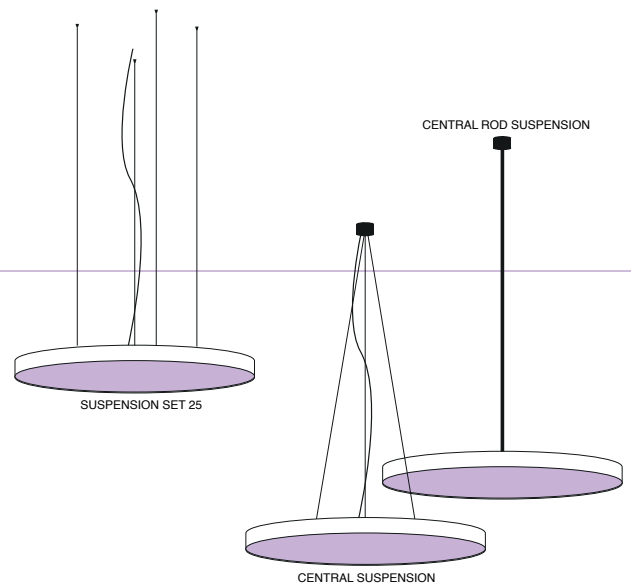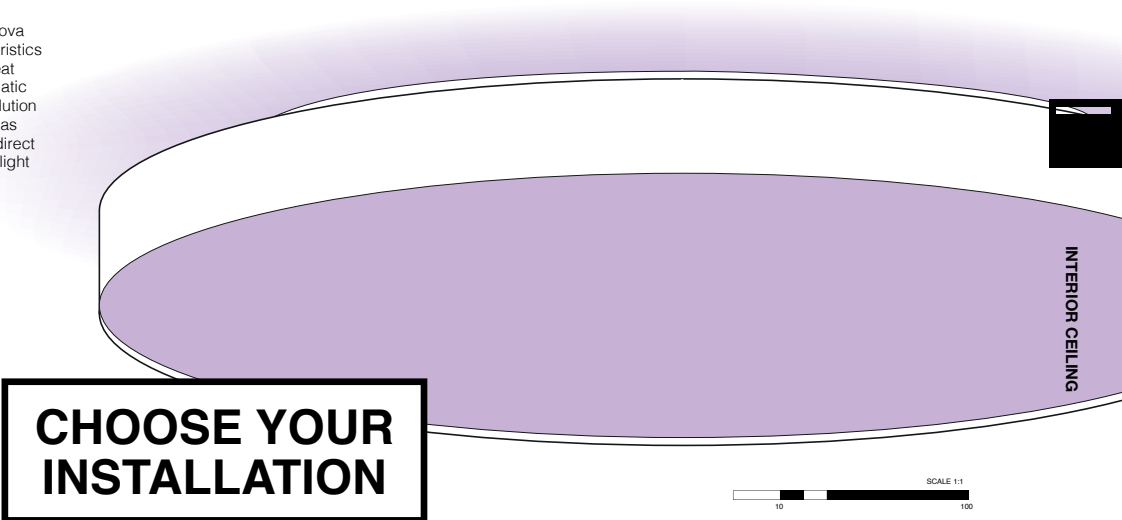

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	SUPERNOVA FLAT					
	65	95	65 SMOOTH UP	95 SMOOTH UP	65 DOWN-UP	95 DOWN-UP
INSTALLATION SUSPENDED						
SUSPENSION SET 3m NON-DIM	328 25 43	R	R	R	R	R
SUSPENSION SET 3m 1-10V / DALI or CENTRAL ROD SUSPENSION 1m	328 25 43 ED 274 97 10 B / W	R	R	R	R	R
or CENTRAL SUSPENSION 3m	328 26 23 B / W	R	R	R	R	R
CONNECTION ST	15225 0360 B / W	O	O	O	O	O
SUSPENSION ST	15225 0340 B / W	O	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W	O	O	O	O	O






SUPERDOME

Cosiness is large and round; of that the Superdome is proof. This luminaire was initially created as an XXL version of Tweeter, one of the award winners in the collection. The Superdome is perfectly at home in double ceiling heights, or just as an atmospheric dome over the dining table or as an eye-catcher in the hall at home or the office.

The body made from polyester is available with a black or white exterior, the interior is white for optimal light diffusion. At first glance the Superdome looks very simple, but it is well thought-out. The light source is concealed behind a large diffuser, recessed into the dome obscured direct from view and preventing glare.

www.deltalight.com/superdome

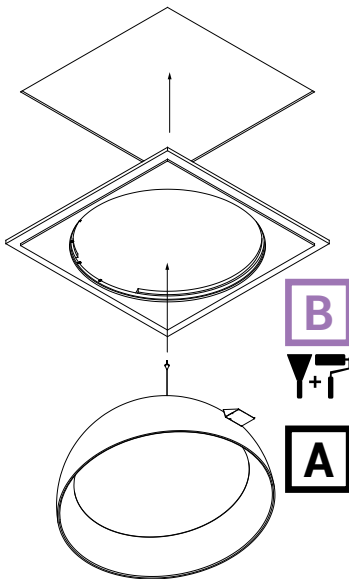

L KIT x 350

SUPERDOME

RECESSED

SBL

3000K CRI>90 LED 105W / 3000K / 16950lm 1-10V


321 96 9528 ED1 ◇

◇ B-W ● / W-W ○
120-240V / 50-60Hz

◇ IP20



**Initially created
as an XXL version
of our award winning
Tweeter.**



B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SUPERDOME RECESSED

MOUNTING KIT TRIMLESS

PLASTERBOARD	321 96 1036		R
--------------	-------------	--	---

XY180

Design by **OMA** & Delta Light


XY180 is a 3-piece lighting collection designed by OMA. The collection was inspired by a fascination with point, line and surface; key architectural elements. The floor, wall and ceiling lights are meant for individual and shared workspaces, but can also be applied to domestic and public interior spaces.


The line uses precise geometric dimensions while the base elements - which include tube lights and a spotlight in either a discreet 3,9W or a powerful 7,1W - can be combined with a hinge to generate countless lighting conditions. As individual components, each part is familiar. When assembled however, they can take on unpredictable and asymmetrical positions.

www.deltalight.com/xy180

The tube lights create diffuse ambient lighting, while the spotlights provide focused lighting. By exposing the light and allowing it to pivot, the fixture becomes the main feature as it shifts into multiple configurations; a product that contributes to the creation of space, not only by the light it emits, but also by its physical presence.

"Through the choreography of movement and multiplication, the luminaire can manipulate three-dimensional space, entering the domain of architectural space. The modularity of XY180 allows each module or set of modules to be reconfigured and change its impact on the surrounding space."

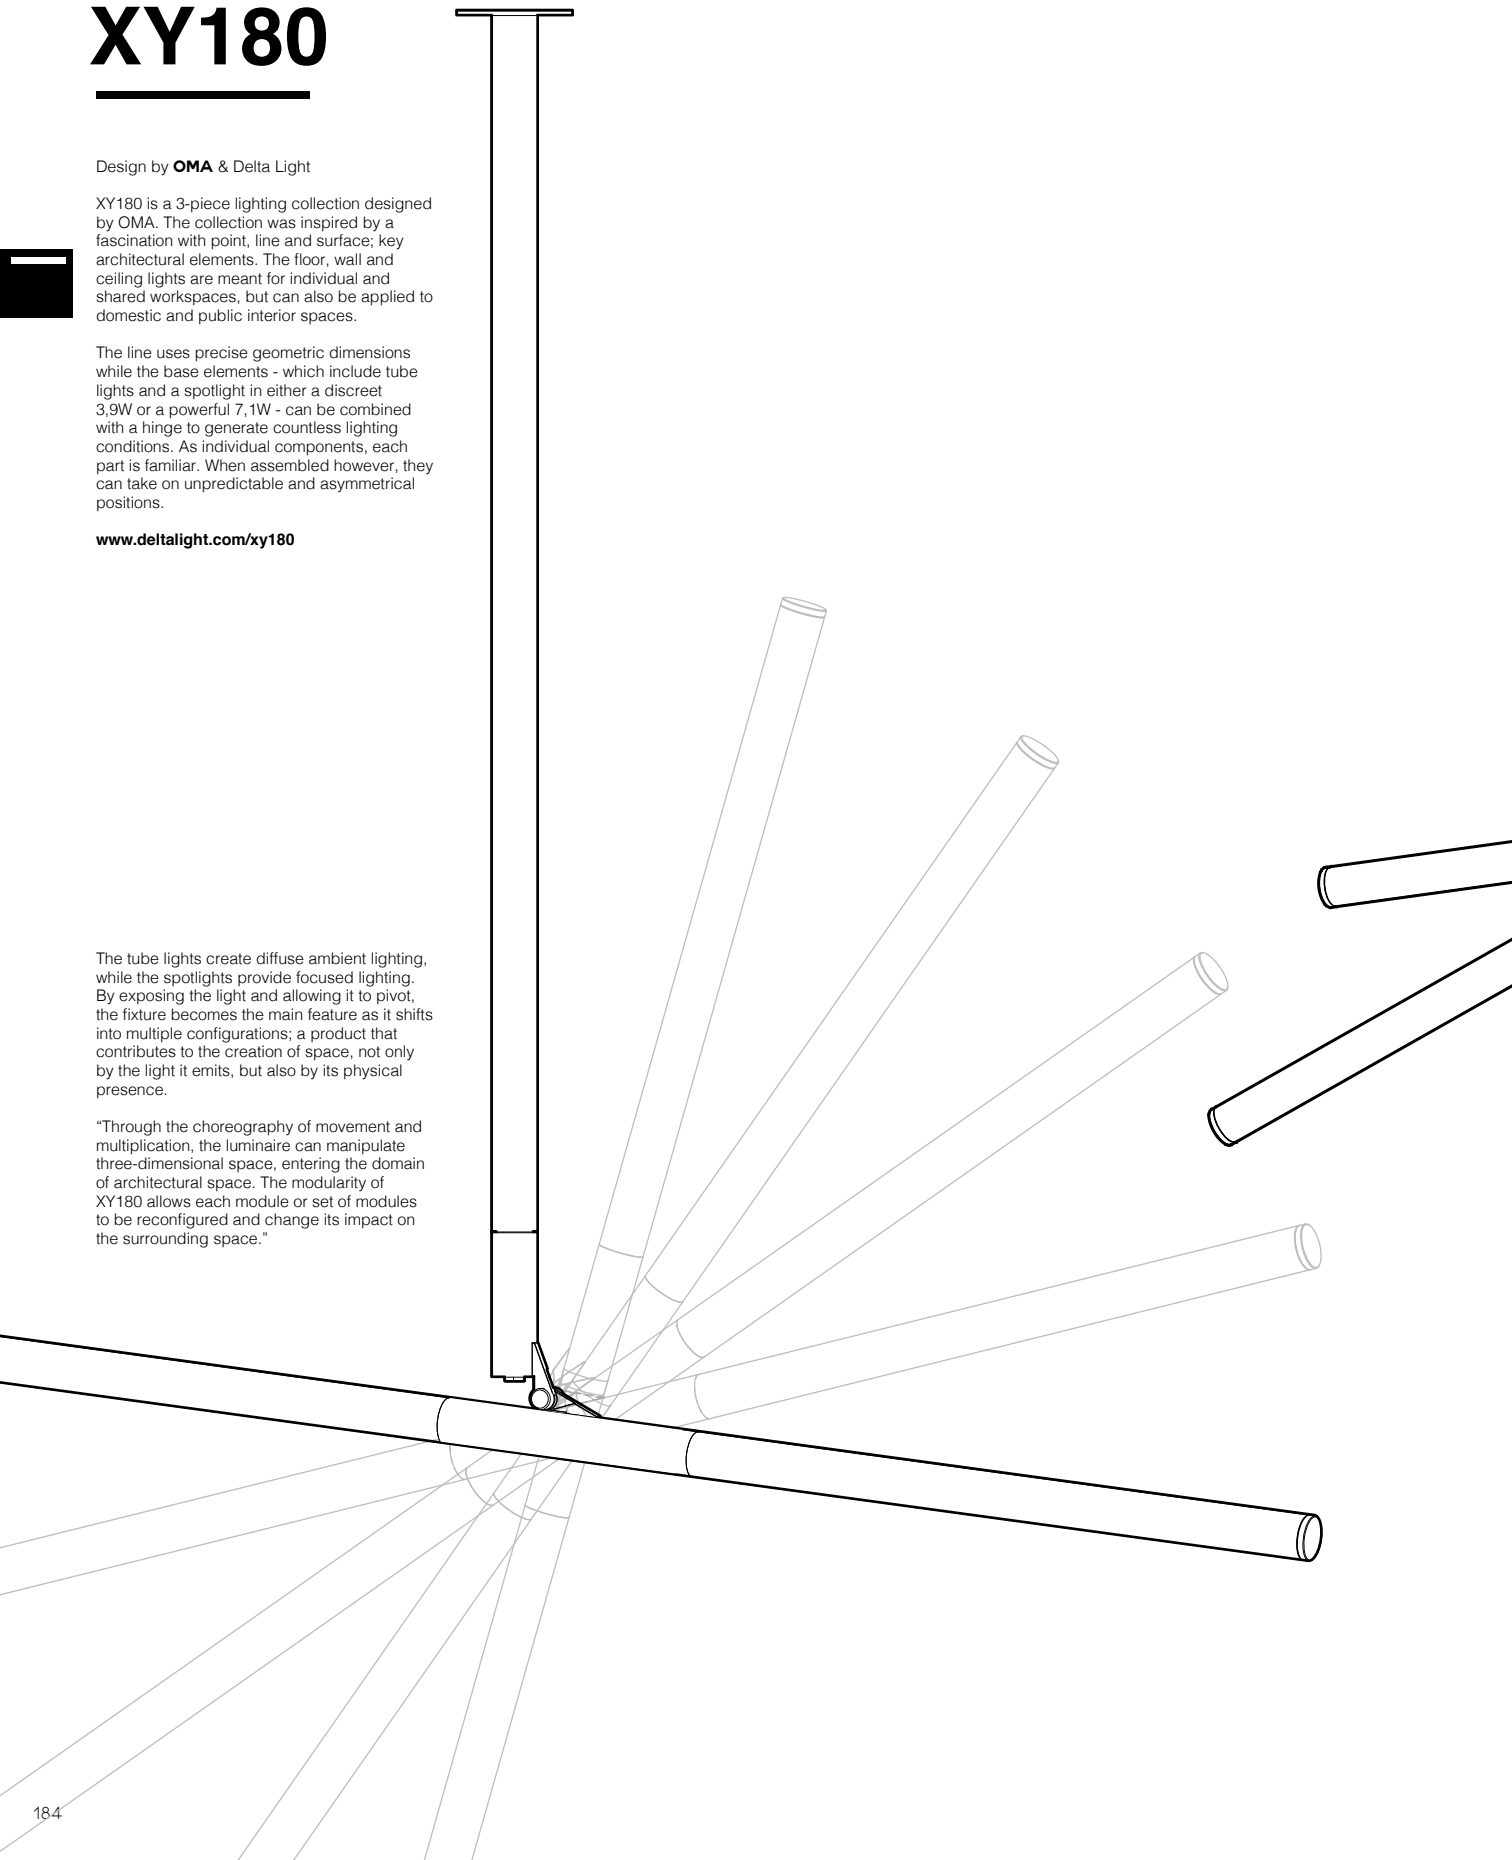

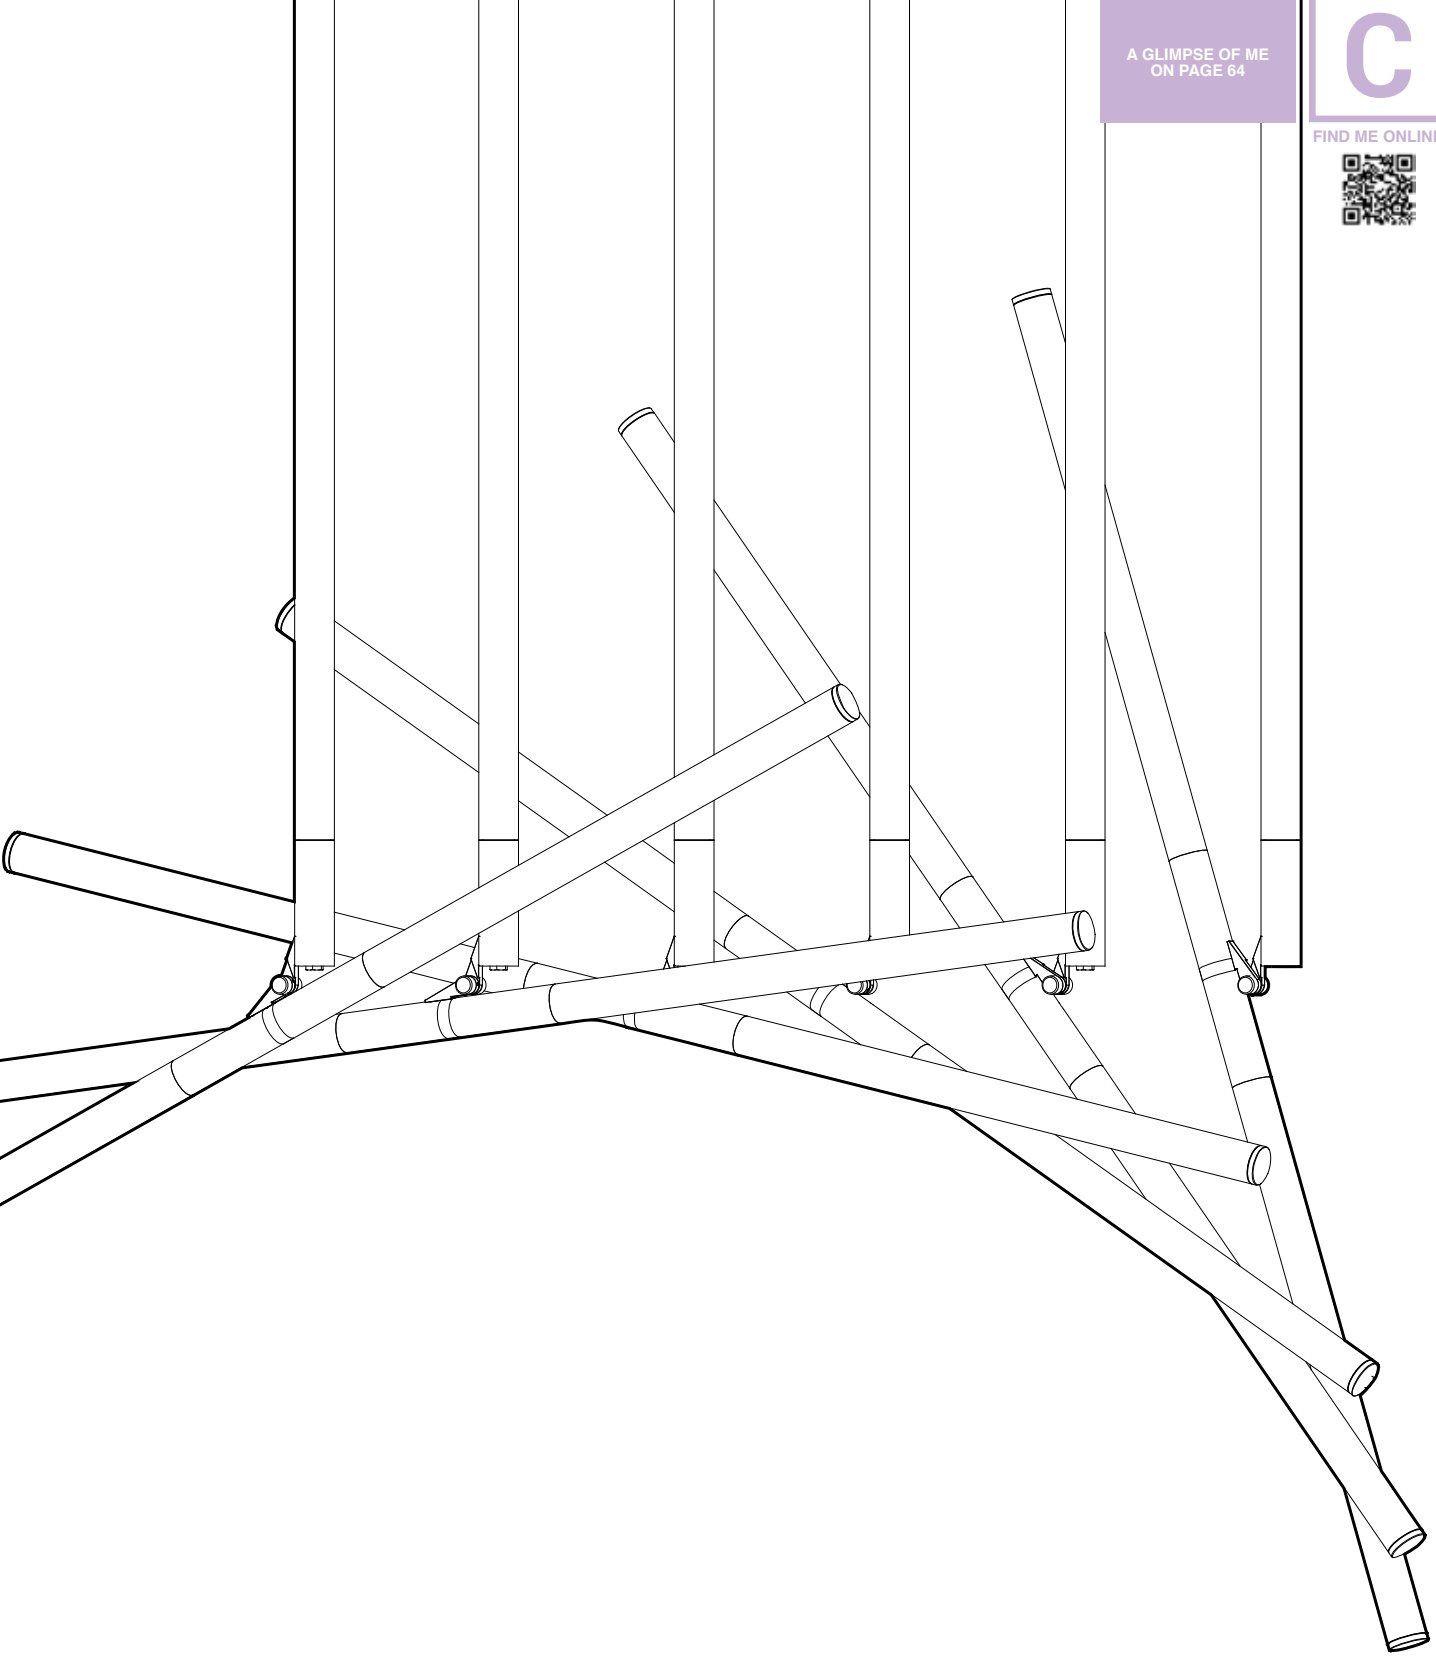

A GLIMPSE OF ME
ON PAGE 64







FIND ME ONLINE



INTERIOR CEILING

XY180





XY180

S80 MINI		S120 MINI		S81 MINI		S121 MINI		S81		S121		S82		S122	
L 895mm		L 1295mm		L 895mm		L 1295mm		L 895mm		L 1295mm		L 895mm		L 1295mm	

3000K	CRI > 80 LED 4.1W / 420lm / 350mA	NON DIM	422 131 83 ◇	422 132 83 ◇												
		1-10V														
		DALI														
	CRI > 90 LED 8,9W / 1050lm CRI > 80 LED 4.1W / 420lm / 350mA	NON DIM			422 141 93 ◇	422 142 93 ◇										
		1-10V			422 141 93 ED1 ◇	422 142 93 ED1 ◇										
		DALI			422 141 93 ED5 ◇	422 142 93 ED5 ◇										
	CRI > 90 LED 8,9W / 1050lm	NON DIM					422 111 93 ◇	422 112 93 ◇								
		1-10V					422 111 93 ED1 ◇	422 112 93 ED1 ◇								
		DALI					422 111 93 ED5 ◇	422 112 93 ED5 ◇								
	CRI > 90 2 x LED 8,9W / 1050lm	NON DIM											422 121 93 ◇	422 122 93 ◇		
		1-10V											422 121 93 ED1 ◇	422 122 93 ED1 ◇		
		DALI											422 121 93 ED5 ◇	422 122 93 ED5 ◇		

◇ B ●
220-240V / 50-60Hz

◇ IP20



XY180

S81 PUNK		S121 PUNK		F120 WDL	
L 895mm		L 1295mm			


3000K CRI>90	LED 8,9W / 1050lm LED 7.1W / 812lm / 350mA	NON DIM	422 161 811 932 ◇	422 162 811 932 ◇	
		1-10V	422 161 811 932 ED1 ◇	422 162 811 932 ED1 ◇	
		DALI	422 161 811 932 ED5 ◇	422 162 811 932 ED5 ◇	
	LED 8,9W / 1050lm	WIRELESS			422 912 93 WDL ◇

◇ B ●
220-240V / 50-60Hz

◇ IP20

220-240V / 50-60Hz
MARBLE BASE
INCL.CORD 2m + PLUG CEE 7/7
INCL.WIRELESS DIMMABLE CONTROL

◇ IP20

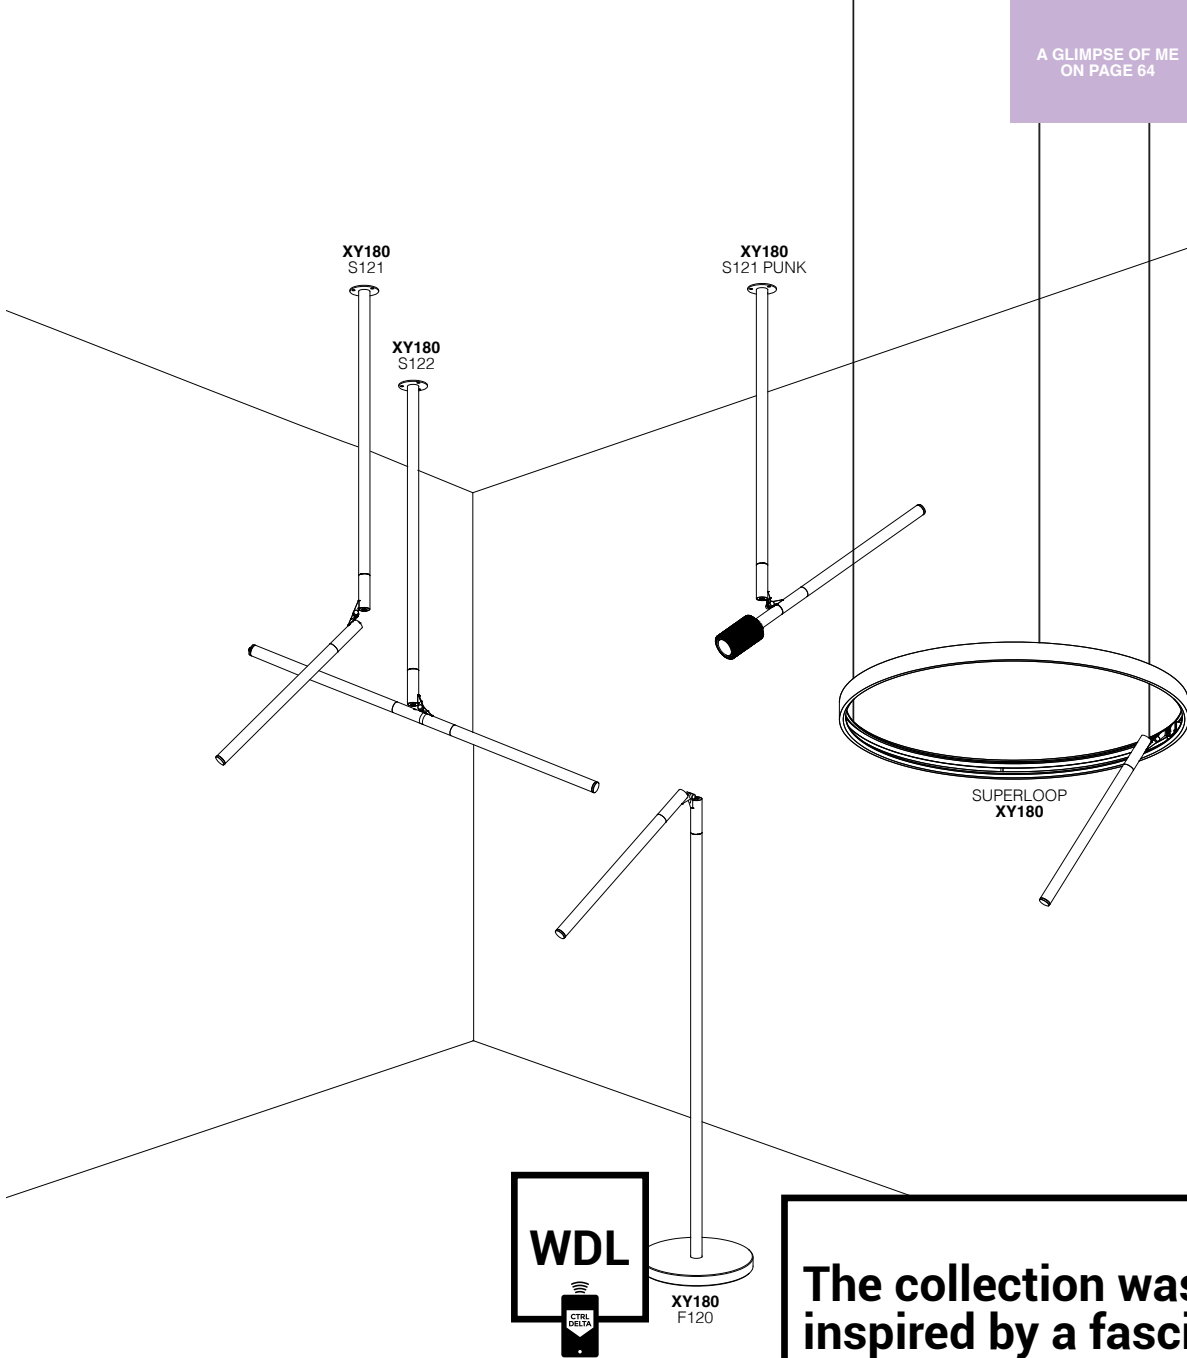

INTERIOR CEILING

The collection was inspired by a fascination with point, line and surface; key architectural elements.

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		XY180					
		S80 MINI S120 MINI	S81 MINI S121 MINI	S81 S121	S82 S122	S81 PUNK S121 PUNK	F120 WDL
FINISH							
SPY TUBE	414 01 00 B/FBR/FG/MMAT/SG/W					R	
INSTALLATION							
CONNECTION BOX	422 99 01 B	O	O	O	O	O	
COVERSET R Ø100	204 00 100 B / W	O	O	O	O	O	
HONEYCOMB / LENS / GLASS							
HONEYCOMB	413 03 01 B					A	
LINEAR SPREAD LENS	413 03 02					A	
SPREAD LENS	413 03 03					A	
SOFTENING LENS	413 03 04					A	
GLASS SBL	413 03 05					A	




PUNK

Design by **OMA & Delta Light**


Step away from brave, alter yourself and dare to dare. This spiked design family breathes creativity and allows you to play with light and texture. To integrate the Punk experience throughout your project, the Punk design is available as a Clip version, as pendants, wall luminaires and in the XY180 range. Available in Black, Gold Coloured and Black Pure, a Black coloured finish with pure aluminum topped spikes.

Don't be deceived: Punk Clip may look small with its diameter of only 39mm, its performance is big! The Clip system lets you install Punk as a semi-recessed light, only letting the luminaire head peeking out of the ceiling. With its particular design, the pendant versions of Punk make a statement on their own, but hanging them in a cluster make them look like a real eye-catcher. Combining different Punk lengths and different finishing colours makes a unique setting out of every Punk cluster.

www.deltalight.com/punk

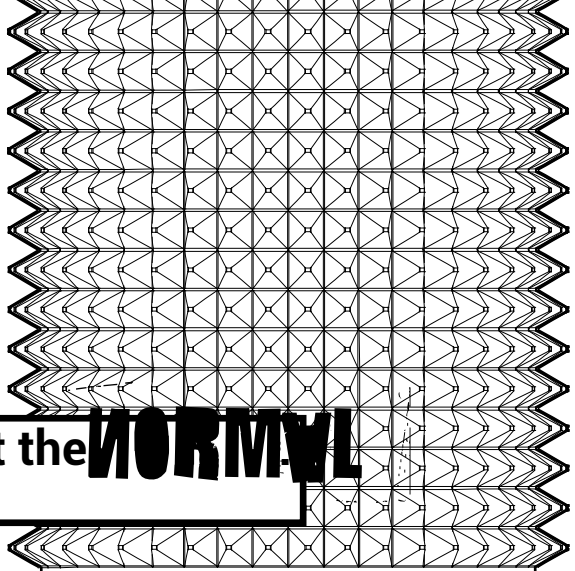

Beat the **NORMAL**



1/1



50 x 40

PUNK



39 CLIP

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20	24°
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA		

471 111 811 931 ◇

471 111 811 921 ◇

◇ B-B ●●



PUNK

451 C

452 C

3000K CRI>90	LED 6.4W / 587lm / 350mA	MAINS	40°
2700K CRI>90	LED 6.4W / 587lm / 350mA		

471 221 932 ED8 ◇

471 221 922 ED8 ◇

◇ B ● / BP ● / GC ●

471 222 932 ED8 ◇





471 222 922 ED8 ◇

◇ B ● / GC ●

220-240V / 50-60Hz

INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

◇ IP20



PUNK

621 C

621 C Hi

622 C

622 C Hi

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	MAINS	33°
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA		
1 x QPAR51 max.35W		-	-

471 321 811 932 ED8 ◇

471 321 811 922 ED8 ◇

471 321 00 ◇

◇ B ● / BP / GC ●

471 322 811 932 ED8 ◇

471 322 811 922 ED8 ◇

471 322 00 ◇

◇ B ● / GC ●

220-240V / 50-60Hz

QPAR51 GU10 / 100-240V / 50-60Hz

INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

◇ IP20

◇ IP20 (0,5)

◇ IP20

◇ IP20 (0,5)

A GLIMPSE OF ME
ON PAGE 18

C


FIND ME ONLINE



M20/26
PUNK 39




PUNK
622 C




PUNK
452 C

PUNK
451 C



ORBIT
PUNK



PUNK
621 C

INTERIOR CEILING

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

				PUNK						
				39 CLIP	451 C	452 C	621 C	621 C HI	622 C	622 C HI
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE)	11	21012 0298	min. 55	R *						
1-10V DIM	15	300 90 124	min. 55	R *						
DALI DIM	14	300 90 125	min. 55	R *						
FINISH										
SPY TUBE	414 01 00 B/FBR/FG/MMAT/SG/W						R		R	
MIDISPY TUBE	414 03 00 B/FBR/FG/MMAT/SG/W				R	R				
MOUNTING KIT										
MOUNTING KIT FLUSH SPY	414 90 01			O						
INSTALLATION										
SUSPENSION + CONNECTION TRIMLESS	328 10 02				O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W				O	O	O	O	O	O
HONEYCOMB / LENS / GLASS										
HONEYCOMB	413 03 01 B						A		A	
LINEAR SPREAD LENS	413 03 02						A		A	
SPREAD LENS	413 03 03						A		A	
SOFTENING LENS	413 03 04						A		A	
GLASS SBL	413 03 05						A		A	
LED LAMP MORE INFO TECHNICAL CHAPTER										
								O		O

* REMOTE INSTALLATION

B

VIZIR / HEDRA

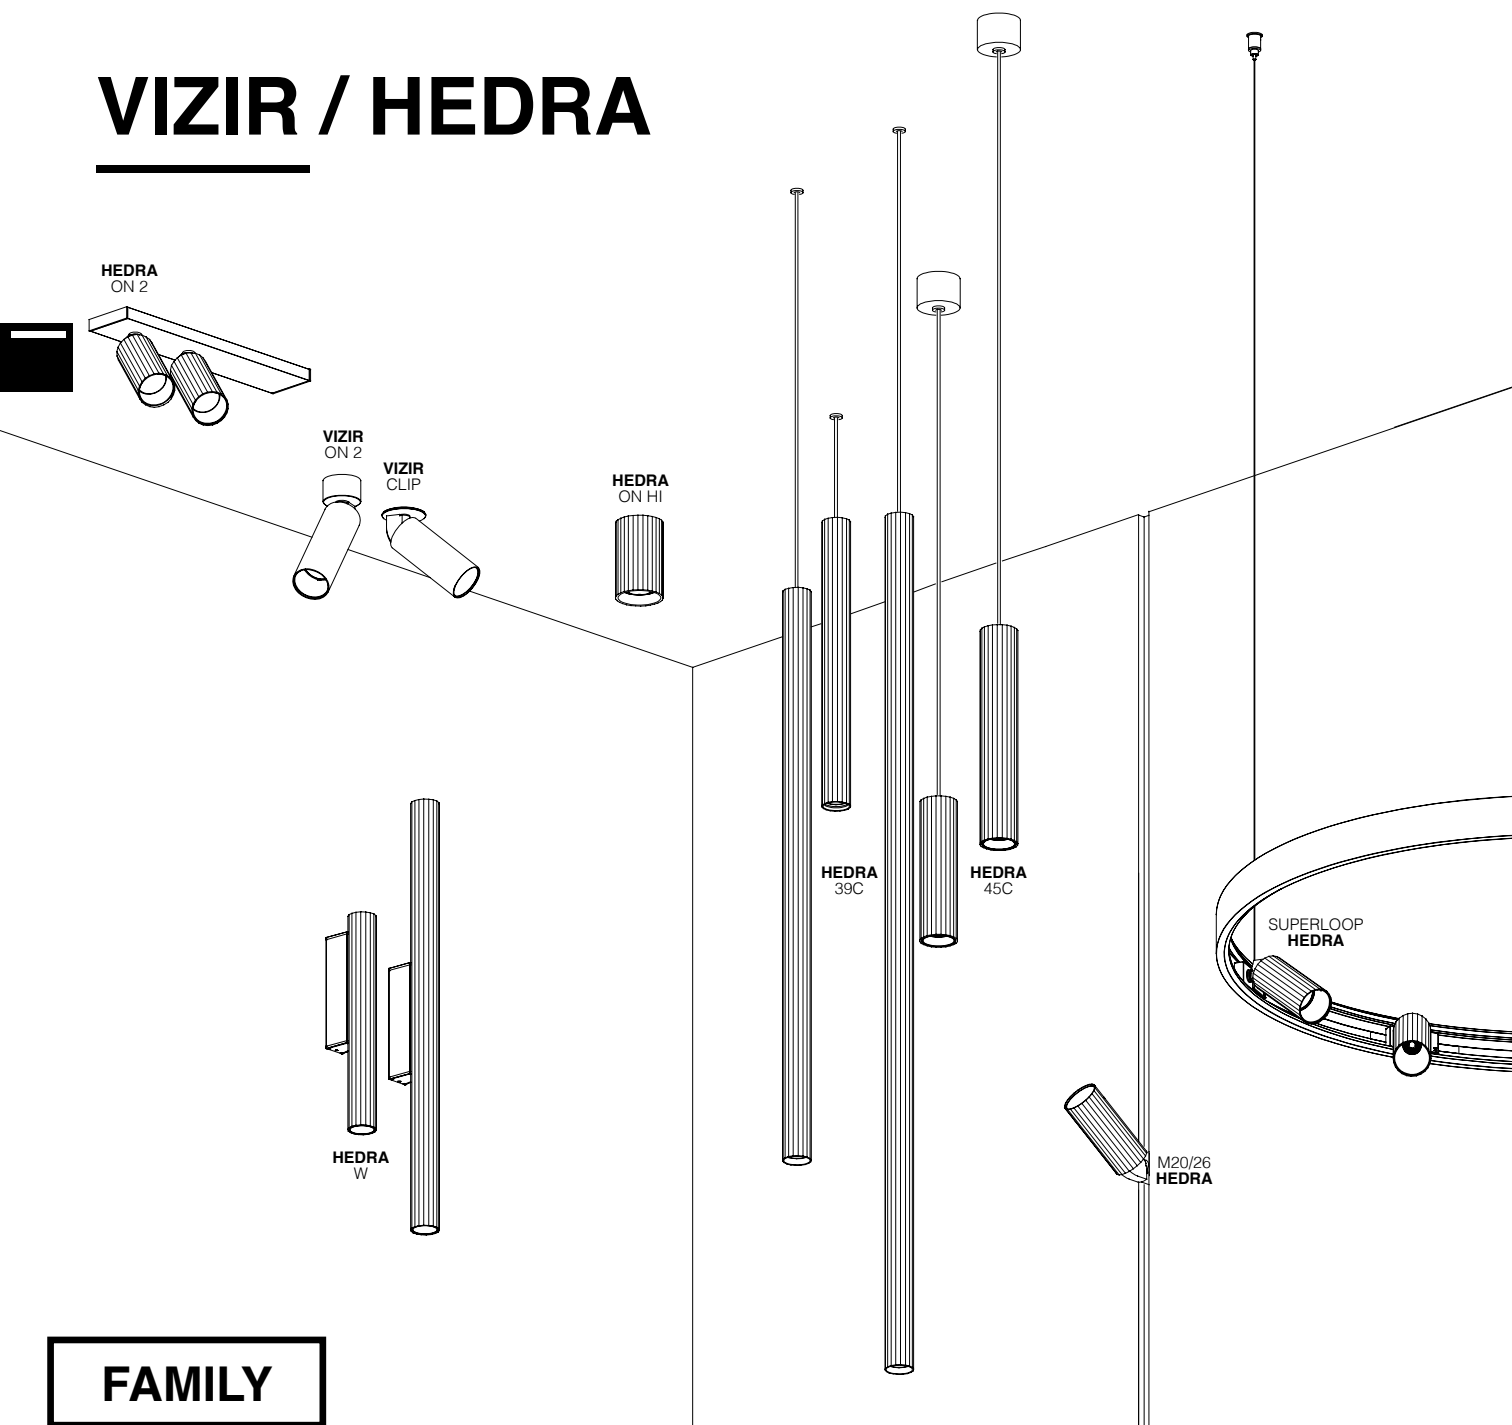

FAMILY

Vizir and Hedra add refinement, finesse and colour to the range. They are characterized by an atypical hinge, a design element that not only catches the eye, but also serves as storage for technical parts inside the luminaire.

Next to black and white, the Vizir and Hedra are available in Gold Coloured and Black Bronze finishes, either polished or in faceted texture.


The faceted design of the Hedra captures and reflects the ambient light with an ever-changing look a result.

It is also the typical design element of the Hedra family, a series of pendant, spotlight and wall mounted luminaires, available as full LED solution or for retrofit bulbs.

www.deltalight.com/vizir-hedra



1/1

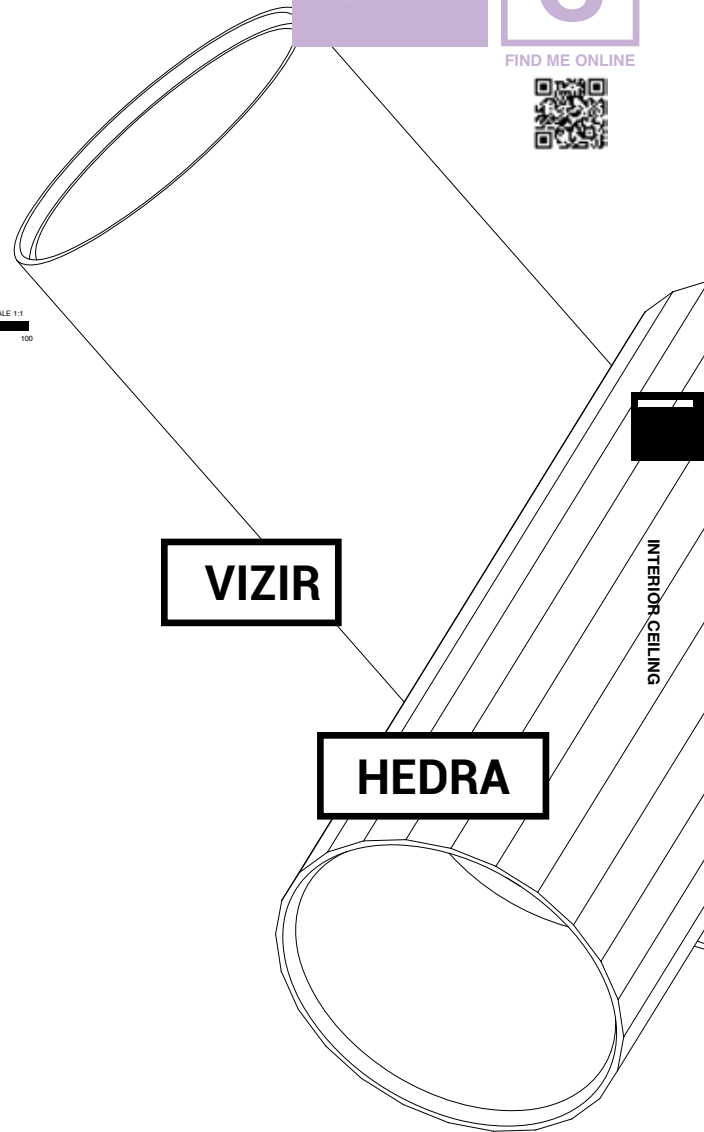

	VIZIR	HEDRA
LIGHT EFFECT		
LED	3,9W - 385lm 5,7W - 519lm 7,1W - 812lm 10,4W - 1128lm 15W - 1517lm	3,9W - 385lm 5,7W - 519lm 7,1W - 812lm 10,4W - 1128lm 15W - 1517lm
GU10		*
E27		*
OPTICS		
8°	*	*
24°		*
33°	*	*
40°		*
COLOUR TEMPERATURE		
2700K	*	*
3000K	*	*
CONTROL		
EXCL. POWER SUPPLY	*	*
NON DIM		*
MAINS DIM		*
1-10V DIM	*	*
DALI DIM	*	*
WIRELESS DIM	*	*
COLOUR		
WHITE ○	*	*
BLACK ●		*
BRUSHED BRONZE ●	*	*
GOLD COLOURED ●	*	*
INSTALLATION		
	SEMI-RECESSED	*
	SURFACE MOUNTED	*
INTERIOR	SUSPENDED CABLE	*
	WALL MOUNTED	*
	PROFILES	*
ACCESSORIES		
HONEYCOMB	*	*
SOFTNEING LENS	*	*

* STANDARD
* NOT FOR ALL VERSIONS


VIZIR - HEDRA CLIP / ON

The high-quality finishing on Hedra and Vizir instantly adds a touch of class to the room. The two installation possibilities - surface mounted or semi-recessed - allow to use these directable spotlights in any kind of application. Furthermore, the very slender base with integrated power supply of Vizir and Hedra 2 On bring extra flair and elegance.

VIZIR - HEDRA C

The pendants within Vizir and Hedra make you play with light and design. By combining decorative E27 bulbs with integrated LED, short with longer tubes, Vizir and Hedra or Black Bronze finish with Gold Coloured, every set-up will be different and unique.

VIZIR / HEDRA

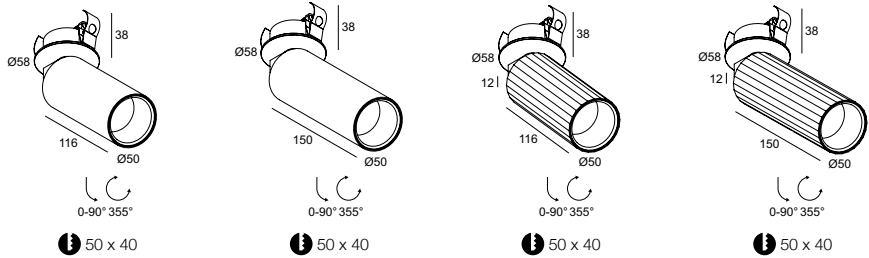

VIZIR / HEDRA

VIZIR CLIP

VIZIR L CLIP


HEDRA CLIP

HEDRA L CLIP

		VIZIR CLIP		VIZIR L CLIP		HEDRA CLIP		HEDRA L CLIP	
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA	IP20	8°	22528 9310 ◇		22519 9310 ◇			
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA LED [H] 15W / 1517lm / 700mA		33°	473 111 811 932 ◇ *	473 112 811 932 ◇	473 211 811 932 ◇ *	473 212 811 932 ◇		
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA		8°	22528 9210 ◇		22519 9210 ◇			
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA LED [H] 15W / 1456lm / 700mA		33°	473 111 811 922 ◇ *	473 112 811 922 ◇	473 211 811 922 ◇ *	473 212 811 922 ◇		

* max. 500mA

◇ BBR-B ●● / GC-B ●● / W-W ○○ ◇ B-B ●● / BBR-B ●● / GC-B ●● / W-W ○○

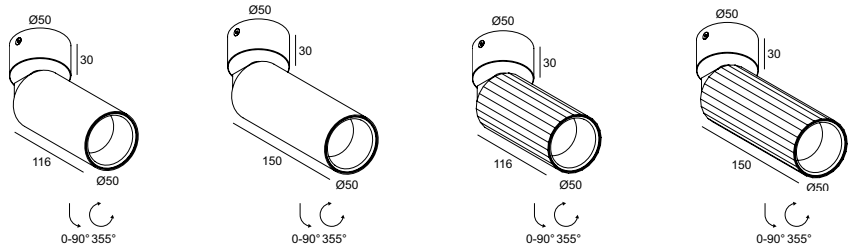

VIZIR ON / HEDRA ON

VIZIR ON

VIZIR L ON

HEDRA ON

HEDRA L ON

		VIZIR ON		VIZIR L ON		HEDRA ON		HEDRA L ON	
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA	IP20	8°	22532 9310 ◇		22525 9310 ◇			
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA LED [H] 15W / 1517lm / 700mA		33°	473 131 811 932 ◇ *	473 132 811 932 ◇	473 231 811 932 ◇ *	473 232 811 932 ◇		
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA		8°	22532 9210 ◇		22525 9210 ◇			
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA LED [H] 15W / 1456lm / 700mA		33°	473 131 811 922 ◇ *	473 132 811 922 ◇	473 231 811 922 ◇ *	473 232 811 922 ◇		



* max. 500mA

◇ BBR-B ●● / GC-B ●● / W-W ○○ ◇ B-B ●● / BBR-B ●● / GC-B ●● / W-W ○○





**Black, White, Gold Coloured
or Black Bronze finishes,
polished or in faceted texture**

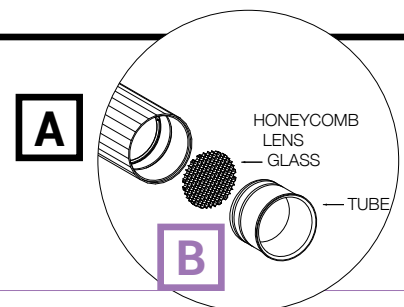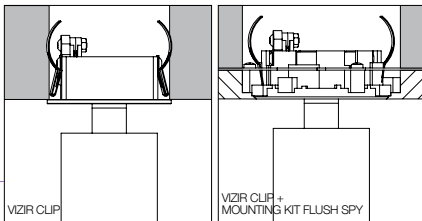

FINISH YOUR SPECIFICATION




REQUIREMENT / OPTION / ACCESSORY

			VIZIR		HEDRA		VIZIR		HEDRA		
			CLIP	L CLIP	CLIP	L CLIP	ON	L ON	ON	L ON	
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R*	R*	R*	R*	R*	R*	R*
1-10V DIM 15	300 90 124	i min. 55	R*	R*	R*	R*	R*	R*	R*	R*	R*
DALI DIM 14	300 90 125	i min. 55	R*	R*	R*	R*	R*	R*	R*	R*	R*
FINISH											
VIZIR TUBE	473 01 00 B / FBR / FG / W		R	R	R	R	R	R	R	R	R
MOUNTING KIT											
MOUNTING KIT FLUSH SPY	414 90 01		O	O	O	O					
INSTALLATION											
COVERSET R Ø100	204 00 100 B / W							O	O	O	O
HONEYCOMB / LENS / GLASS											
HONEYCOMB	473 03 01 B		A	A	A	A	A	A	A	A	A
SOFTENING LENS	473 03 04		A	A	A	A	A	A	A	A	A

* REMOTE INSTALLATION



VIZIR / HEDRA



VIZIR ON / HEDRA ON

VIZIR ON 2

HEDRA ON 2

HEDRA 62 ON Hi

3000K CRI>90	2 x LED 7.1W / 812lm / 350mA	1-10V	33°	473 131 812 932 ED1 ◊	473 231 812 932 ED1 ◊	
2700K CRI>90	2 x LED 7.1W / 779lm / 350mA			473 131 812 922 ED1 ◊	473 231 812 922 ED1 ◊	
🔊 QPAR51 max.10W						472 331 00 ◊




◊ B-B ●● / BBR-B ●● / GC-B ●● / W-W ○○ (B-B ONLY FOR HEDRA)
220-240V / 50-60Hz

◊ B ●● / BBR ●● / GC ●● / W ○○
GU10 / 100-240V / 50-60Hz

◊ IP20

◻ IP20 (0,5)

A



HEDRA

39 C

45 C

45 C E27


		400mm			800mm			1200mm			195mm		300mm		150mm		300mm	
3000K CRI>90	LED 7.1W / 812lm / 350mA		24°	472 121 811 931 ◊	472 122 811 931 ◊	472 123 811 931 ◊												
	LED 6.4W / 587lm / 350mA	MAINS	40°						472 221 932 ED8 ◊	472 222 932 ED8 ◊								
2700K CRI>90	LED 7.1W / 779lm / 350mA		24°	472 121 811 921 ◊	472 122 811 921 ◊	472 123 811 921 ◊	472 221 922 ED8 ◊	472 222 922 ED8 ◊										
💡 1 x A60 max.20W														472 221 01 ◊	472 222 01 ◊			

◊ B ●● / BBR ●● / GC ●● / W ○○

220-240V / 50-60Hz
INCL.1 x CABLE 2 x 0.75mm² / 1.6m

E27Ls / 100-240V / 50-60Hz
INCL.1 x CABLE 2 x 0.75mm² / 1.6m



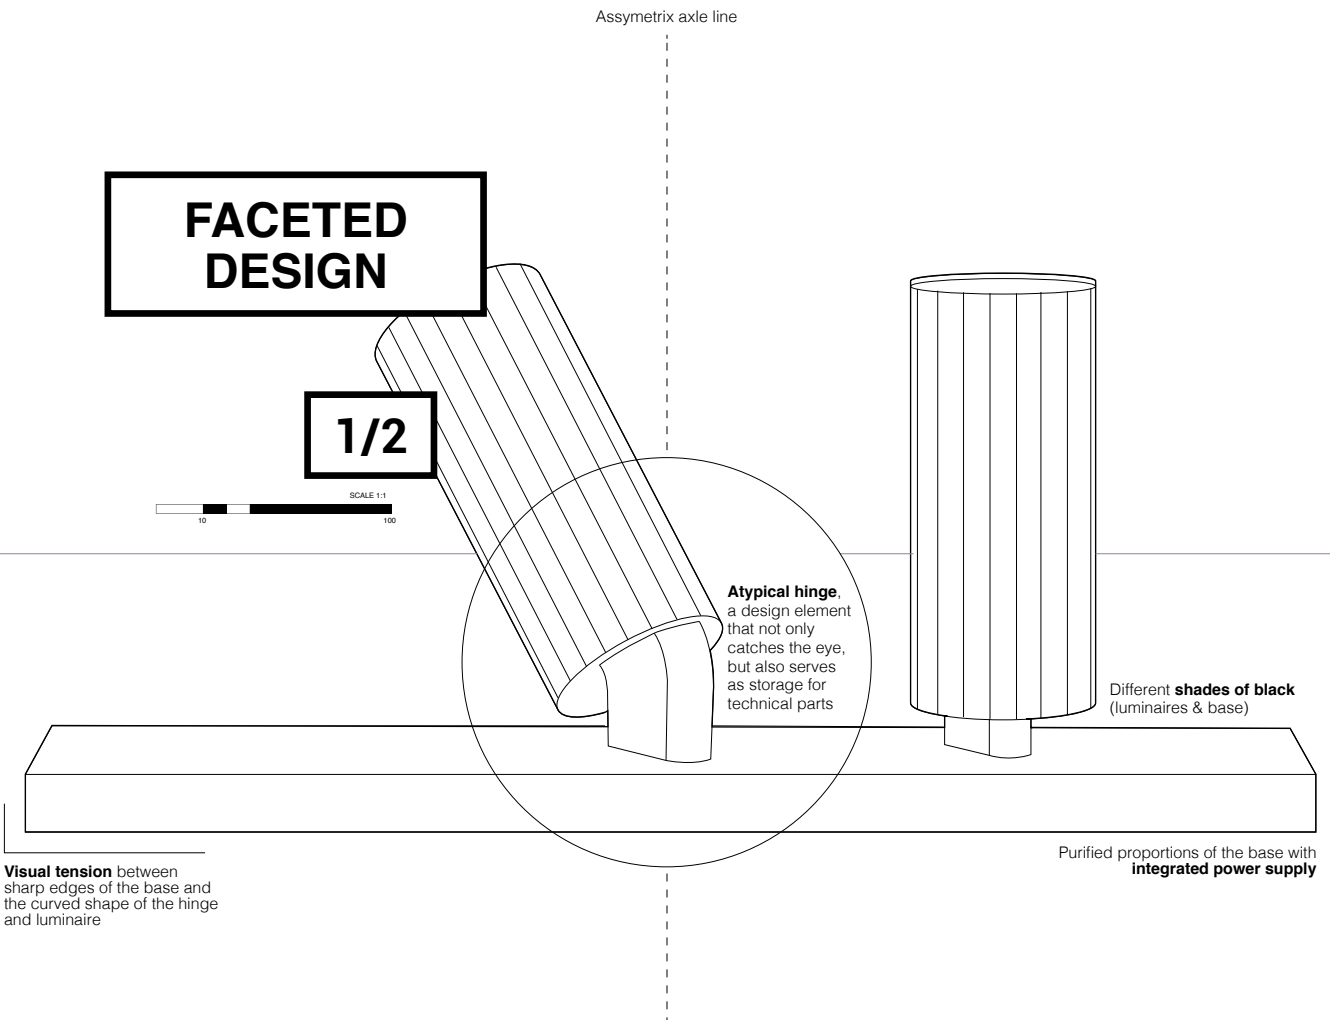

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			VIZIR				HEDRA				
			ON 2	ON 2	62 ON HI	39 C	45 C	45 C E27			
FINISH											
	VIZIR TUBE	473 01 00 B/FBR/FG/W	R	R							
	MIDISPY TUBE	414 03 00 B/FBR/FG/MMAT/SG/W						R			
INSTALLATION											
	CONNECTION TRIMLESS	328 10 03					O	O	O		
HONEYCOMB / LENS / GLASS											
	HONEYCOMB	473 03 01 B	A	A							
	SOFTENING LENS	473 03 04	A	A							
LED LAMP	MORE INFO TECHNICAL CHAPTER						O				O

B



OCTAV

However you look at it, Octav draws the attention. Its design catches the eye, and after a first glimpse for sure you will be intrigued to look at it again. Depending on the inclination angle of the adjustable spotlight, other design elements stand out. Be it the squared design that is in complete contrast with the rounded back part, creating some visual tension. Or be it the details on how the hinge is being camouflaged inside the body, nearly invisible yet very functional. Or be it the optical compartment, hidden away comfortably into the spotlight, unobtrusive for the eye.


As an extreme flexible spotlight, Octav comes in 2 sizes and multiple installation possibilities: semi-recessed, as a single or double surface mounted unit or as module to fit into our magnetic profiles.

With up to 5 different finishing colours and 3 beam angles, Octav is highly applicable in residential and hospitality surroundings.

www.detalight.com/octav

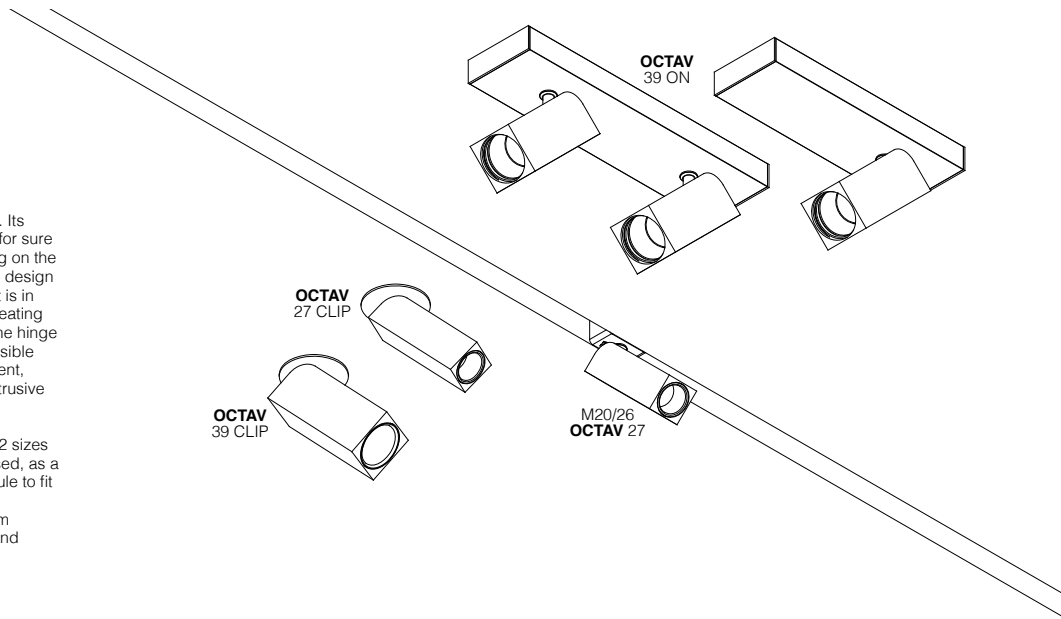

27 CLIP




39 CLIP

NEW
OCTAV


		27 CLIP		39 CLIP	
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	30°	29011 9320 ◊	
	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		20°		29016 9320 ◊
			40°		29016 9330 ◊
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA	IP20	30°	29011 9220 ◊	
	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA		20°		29016 9220 ◊
			40°		29016 9230 ◊

*Selection by DIP switch on internal driver

◊ B-B ●● / FBR-B ●●● / FG-B ●●●● / GC-B ●●●●● / W-W ○○



39 ON 1



39 ON 2

NEW
OCTAV

		39 ON 1		39 ON 2	
3000K CRI>90	1 or 2x LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *	MAINS	20°	29018 9328 ◊	29019 9328 ◊
	40°		29018 9338 ◊	29019 9338 ◊	
2700K CRI>90	1 or 2x LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *	MAINS	20°	29018 9228 ◊	29019 9228 ◊
	40°		29018 9238 ◊	29019 9238 ◊	

*Selection by DIP switch on internal driver


◊ B-B ●●●● / W-W ○○

220-240V / 50-60Hz

◊ IP20



**INVISIBLE
HINGE**

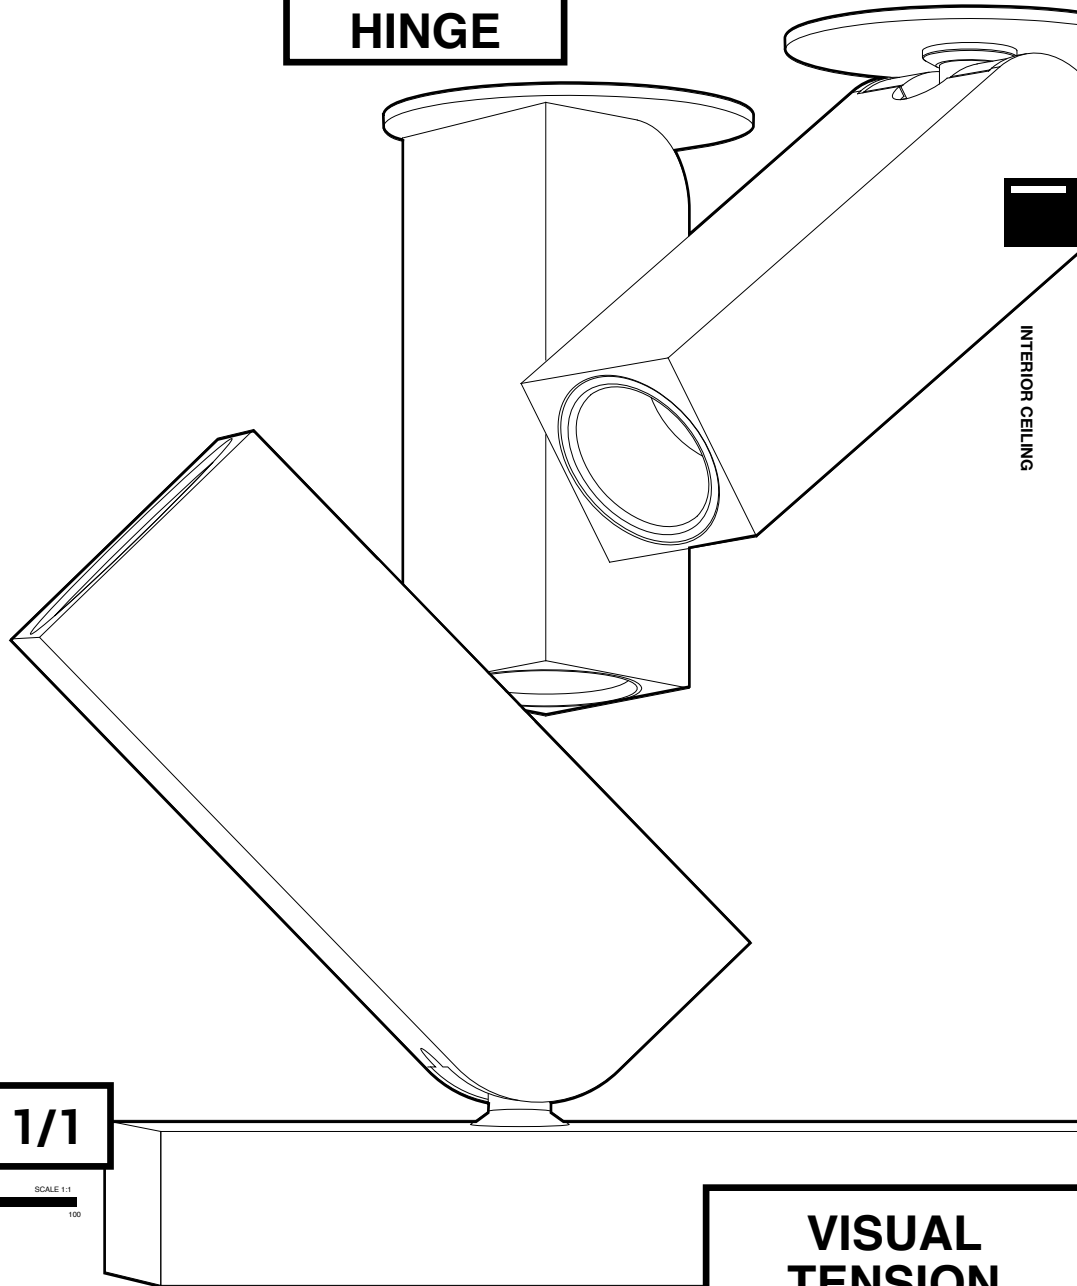

1/1



**VISUAL
TENSION**

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY




			OCTAV			
			27 CLIP	39 CLIP	39 ON 1	39 ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	i min. 55	R	R		
1-10V DIM 15	300 90 124	i min. 55	R	R		
DALI DIM 14	300 90 125	i min. 55	R	R		
FINISH						
SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W			R	R	R

NEEDLE

Design by **NITEO LIGHTING** & Delta Light

The slender shape of the Needle family brings a touch of elegance into any project. Slim tubes, just carelessly hanging down from the ceiling or cleverly peeking around to throw a highlight wherever needed. Combine multiple fixtures to create playful clusters or use it as a single luminaire in all its simplicity, surface mounted or as module to put on our magnetic profiles.

www.deltalight.com/needle



NEEDLE

1 TRC

1 OK TRC

1


1 OK

3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA LED [E] 8.2W / 677lm / 700mA	IP20	13°	25014 9310 ◇	25015 9310 ◇ *	25010 9310 ◇	25011 9310 ◇ *
			33°	25014 9320 ◇	25015 9320 ◇ *	25010 9320 ◇	25011 9320 ◇ *
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA LED [E] 8.2W / 677lm / 700mA	IP20	13°	25014 9210 ◇	25015 9210 ◇ *	25010 9210 ◇	25011 9210 ◇ *
			33°	25014 9220 ◇	25015 9220 ◇ *	25010 9220 ◇	25011 9220 ◇ *

* max. 500mA


◇ BBR ● / FG ●



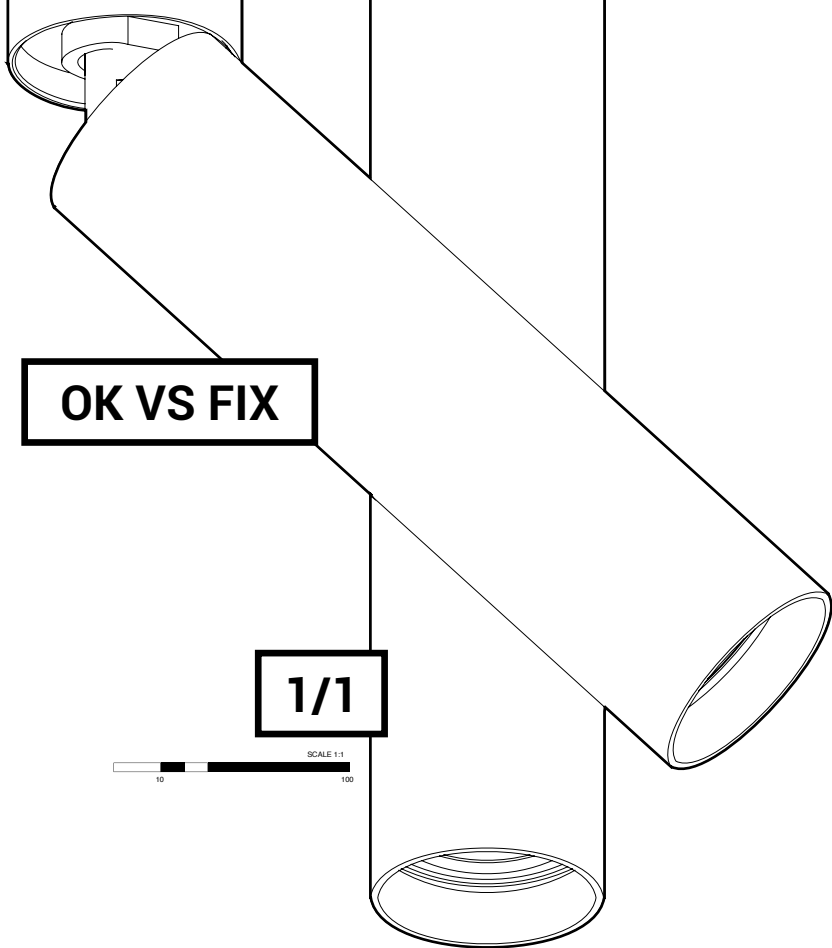

OK VS FIX

1/1

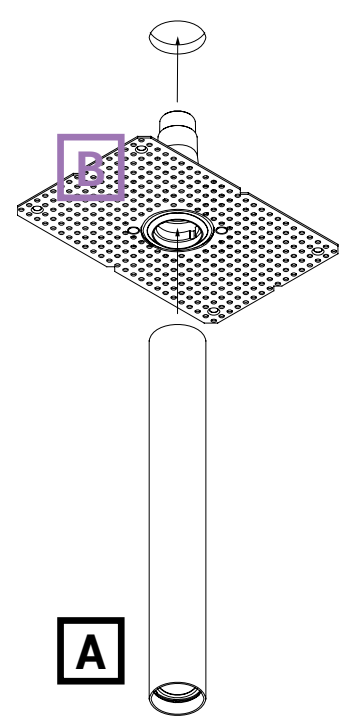

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			NEEDLE			
			1 TRC	1 OK TRC	1	1 OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R*	R*
1-10V DIM 15	300 90 124	i min. 55	R*	R*	R*	R*
DALI DIM 14	300 90 125	i min. 55	R*	R*	R*	R*
INSTALLATION						
CONCRETE / PLASTERBOARD	328 10 03		R	R		

* REMOTE INSTALLATION

B


BOXY


What once began as a cubic luminaire is now an elaborate family of surface mounted luminaires, both cubic and cylindrical shaped. Though different in shape they are still uniform in look, as both shapes have a deeper recessed LED module with a conical, coloured insert in front. While the deeper recessed LED module reduces the glare, the choice in colour creates possibilities for playful and attractive lighting solutions.

Alongside the different shapes, this family offers indoor and outdoor luminaires, a perfect solution when recessing is not an option. Furthermore, the WDL versions of Boxy are standalone luminaires for an easy wireless CTRL Delta lighting set-up.


www.deltalight.com/boxy

FAMILY

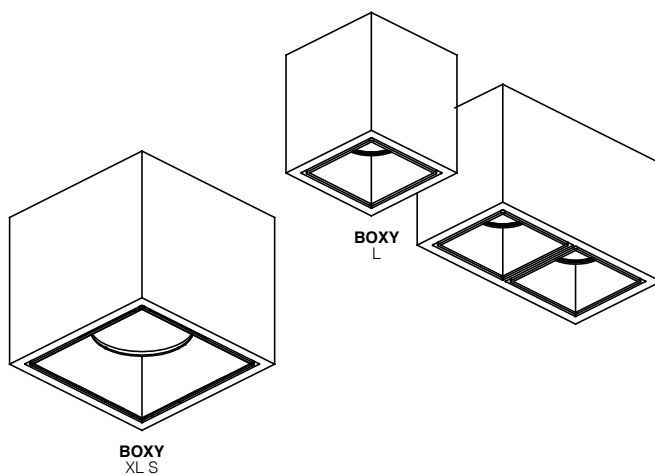





SOFT DIM

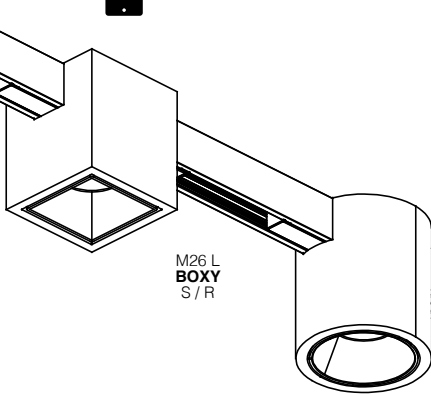


M26 L
BOXY
S/R



BOXY
R



BOXY
R OK



BOXY
XL R



BOXY
XL R C

INTERIOR CEILING




	BOXY		BOXY XL
	FIX	ADJUSTABLE	FIX
LIGHT EFFECT			
LED	10,4W - 1128lm	10,4W - 1128lm	16,3W - 2309lm 23,2W - 3169lm
GU10	•		
OPTICS			
20°			•
33°	•	•	
37°			•
COLOUR TEMPERATURE			
2700K	•	•	•
3000K	•	•	•
SOFT DIM 3000-1800K	•		
CONTROL			
EXCL. POWER SUPPLY			
NON DIM	•		
MAINS DIM	•	•	•
1-10V DIM			•
DALI DIM			•
WIRELESS DIM	•		
SHAPE			
ROUND	•	•	•
SQUARE	•		•
COLOUR			
WHITE ○	•	•	•
WHITE-BLACK ○●	•	•	•
BLACK ●	•	•	•
BLACK-GOLD MATT ●●	•	•	
BLACK-FLEMISH GOLD ●●	•		
BLACK-FLEMISH BRONZE ●●	•		
INSTALLATION			
INTERIOR	SURFACE MOUNTED	•	•
	SUSPENDED CABLE		•
	PROFILES	•	
EXTERIOR	SURFACE MOUNTED	•	

• STANDARD
• NOT FOR ALL VERSIONS

1/5



BOXY R



BOXY



BOXY				R	R WDL	R OK	R Hi
3000K CRI>90	10.4W / 1128lm / 500mA	IP40	NON DIM	33°	251 70 811 932 ◇		
		IP53	MAINS		251 70 811 932 ED8 ◇		
		IP20	MAINS				251 77 811 932 ED8 ◇
2700K CRI>90	10.4W / 1128lm / 48V-DC	IP20	WIRELESS		251 70 811 932 WDL ◇		
		IP40	NON DIM	251 70 811 922 ◇			
		IP53	MAINS	251 70 811 922 ED8 ◇		251 77 811 922 ED8 ◇	
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA	IP20	WIRELESS		251 70 811 922 WDL ◇		
		IP20	MAINS	45°	NEW 10745 9038 ◇		
1 x QPAR51 max.35W		IP20					279 72 20 ◇

FOR WIRELESS



◇ B-B ●● / B-MMAT ●● / W-B ●● / W-W ○○
ADDITIONAL FOR MAINS & WIRELESS ◇ B-FBR ●●● / B-FG ●●●

110-240V / 50-60Hz	220-240V / 50-60Hz	INCL. CONVERTER 48V-DC TO 500mA	220-240V / 50-60Hz	◇ W ○
□	□	⏏	◇	◇ (0,5)





BOXY XL

BOXY XL				R	R DIM1	R DIM5	R C	
3000K CRI>90	16.3W / 2309lm / 500mA	IP20	MAINS	20°	251 71 21 931 ◇		251 73 21 931 ◇	
				37°	251 71 21 933 ◇		251 73 21 933 ◇	
			DALI	20°		10722 9315 ◇		
				37°		10722 9335 ◇		
2700K CRI>90	16.3W / 2209lm / 500mA	IP20	1-10V	20°	251 71 21 931 ED1 ◇			
				37°	251 71 21 933 ED1 ◇			
			MAINS	20°	251 71 21 921 ◇		251 73 21 921 ◇	
				37°	251 71 21 923 ◇		251 73 21 923 ◇	
DALI	20°		10722 9215 ◇					
	37°		10722 9235 ◇					
1-10V	20°		251 71 21 921 ED1 ◇					
	37°		251 71 21 923 ED1 ◇					


220-240V / 50-60Hz	120-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz INCL. 1 x CABLE 2 x 0,75mm ² INCL. 1 x CABLE SUSP. SINGLE AUTO 1,6m
□	□	□	◇



**READ MY
COLOUR**

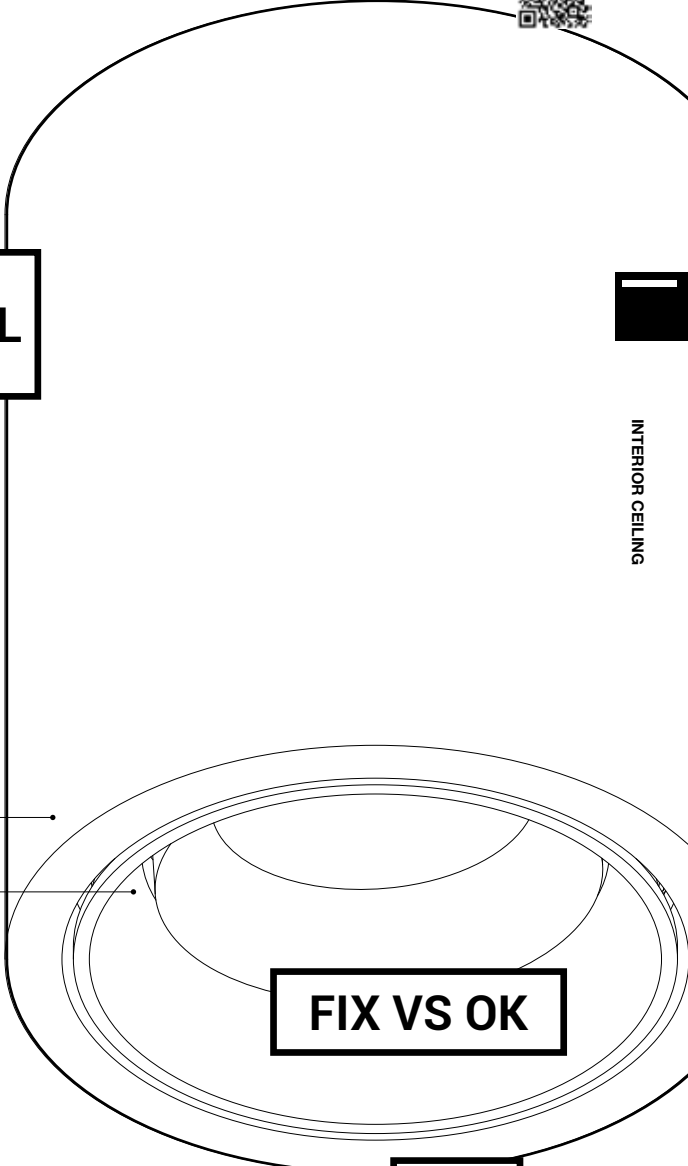

INTERIOR CEILING



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

B

LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER

NON DIM	48V-DC / 100W / DIN	300 89 48 100	100 x 55 x 90		R				
---------	---------------------	---------------	---------------	--	---	--	--	--	--




HONEYCOMB / LENS / GLASS (NOT FOR SOFT DIM)

				BOXY		BOXY XL					
				R	R WDL	R OK	R HI	R	R DIM1	R DIM5	R C
HONEYCOMB	251 70 03 01 B / W			A	A						
	201 02 01 B							A	A	A	A
SOFTENING LENS	251 70 03 04 B / W			A	A						
	201 02 04							A	A	A	A
GLASS SBL	251 70 03 05 B / W			A	A						
	201 02 05							A	A	A	A

LED LAMP MORE INFO TECHNICAL CHAPTER

					O				
--	--	--	--	--	---	--	--	--	--

BOXY




BOXY L

				L	WDL	2L	HI	
3000K CRI>90	7.1W / 812lm / 350mA	IP20	MAINS	10726 9328 ◊				
	2 x 7.1W / 812lm / 350mA		WIRELESS		251 67 811 932 WDL ◊			
2700K CRI>90	7.1W / 779lm / 350mA		MAINS	10726 9228 ◊		10727 9328 ◊		
	2 x 7.1W / 779lm / 350mA		WIRELESS		251 67 811 922 WDL ◊		10727 9228 ◊	
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA		MAINS	10744 9038 ◊				
	QPAR51 max.50W		-					251 67 20 ◊

FOR WIRELESS



◊ B-B ●●● / B-FBR ●●● / B-FG ●●● / B-MMAT ●●● / W-W ○○
 220-240V / 50-60Hz INCL. CONVERTER 220-240V / 50-60Hz ◊ B ● / W ○ (max.35W)
 48V-DC TO 350mA GU10 / 100-240V / 50-60Hz



BOXY XL

				S	S DIM1	S DIM5
3000K CRI>90	16.3W / 2309lm / 500mA	IP20	MAINS	20°	251 72 21 931 ◊	
				37°	251 72 21 933 ◊	
	DALI		20°		10723 9315 ◊	
			37°		10723 9335 ◊	
23.2W / 3169lm / 700mA	1-10V	20°		251 72 21 931 ED1 ◊		
		37°		251 72 21 933 ED1 ◊		
2700K CRI>90	16.3W / 2209lm / 500mA	IP20	MAINS	20°	251 72 21 921 ◊	
				37°	251 72 21 923 ◊	
	DALI		20°		10723 9215 ◊	
			37°		10723 9235 ◊	
23.2W / 3031lm / 700mA	1-10V	20°		251 72 21 921 ED1 ◊		
		37°		251 72 21 923 ED1 ◊		


◊ B-B ●●● / W-B ●●● / W-W ○○

220-240V / 50-60Hz





**READ MY
COLOUR**



INTERIOR CEILING

1/1



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	BOXY L				BOXY XL		
	L	WDL	2L	HI	S	S DIM1	S DIM5
LED POWER SUPPLY MORE INFO IN TECHNICAL CHAPTER	NON DIM 48V-DC / 100W / DIN	300 89 48 100	100 x 55 x 90		R		
HONEYCOMB / LENS / GLASS							
HONEYCOMB	251 70 03 01 B / W	A *	A *				
	201 02 01 B				A *	A *	A *
SOFTENING LENS	251 70 03 04 B / W	A *	A *				
	201 02 04				A *	A *	A *
GLASS SBL	251 70 03 05 B / W	A *	A *				
	201 02 05				A *	A *	A *
LED LAMP MORE INFO TECHNICAL CHAPTER					O		


* NOT FOR SOFT DIM

DOT.COM

FAMILY

First introduced in 2004 as a single LED luminaire, upscaled in 2008 as a multiple LED luminaire with 4 or 6 LED dots, implemented in the profile section in 2010 as a module with 4 or 6 LEDs, the history of Dot.Com within the Delta Light range goes way back. With LEDs being utterly functional and performant nowadays, Dot.Com is up to its second revival, coming as a complete family of luminaires with multiple LED dots to create the most discreet, yet highly functional light settings.

www.deltalight.com/dotcom

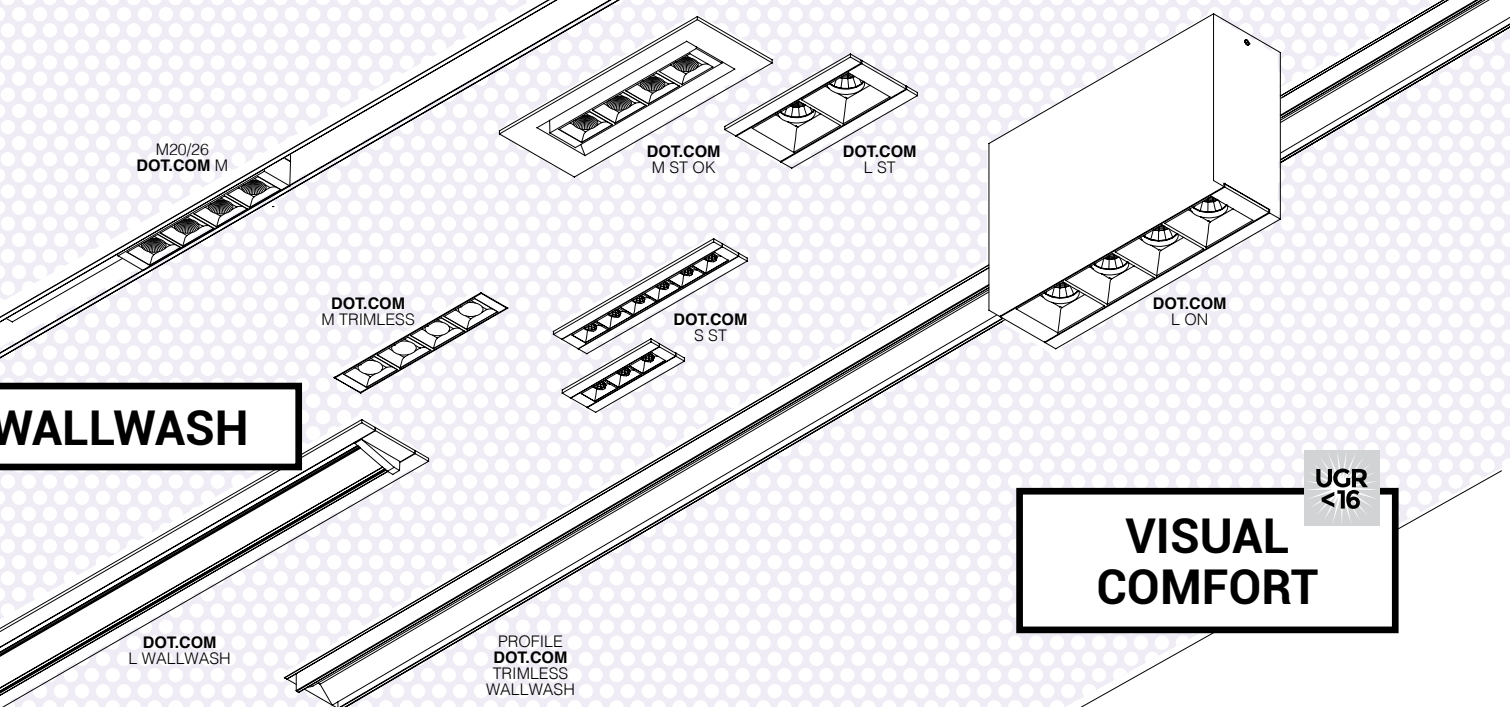

UGR
<16

DOT.COM S
The Small version only needs 25mm of width, a nearly invisible appearance yet with visible impact.

DOT.COM M
The Medium range includes an adjustable version with trim and a trimless solution. The adjustable Dot.Com M – with tilting possibility up to 30° - is ideal for instance to emphasize an artwork on the wall. The specific design of the trimless luminaire grants the opportunity to install it either completely into the ceiling or semi-recessed, to evoke more expression into the room.

DOT.COM L
With an output up to 12W per luminaire, the Large range is the most powerful within the Dot.Com series. The Large version is the only version within the Dot.Com range that also offers surface mounted alternatives. Similar as for recessed installation, Dot.Com L brings a 2 LED and a 4 LED version within a compact design. With its low glare - thanks to the combination of individual reflectors per LED - Dot.Com L is perfectly applicable for office use.




FIND ME ONLINE




	DOT.COM S	DOT.COM M		DOT.COM L	
	FIX	FIX	ADJUSTABLE	FIX	WALLWASH
LIGHT EFFECT					
LED	3W - 303lm 6W - 606lm	5,6W - 628lm	5,6W - 628lm	6,2W - 592lm 12,4W - 1184lm	10W - 1000lm 12,8W - 1500lm 18,4W - 2200lm 25,2W - 3000lm
OPTICS					
14°		•	•		
16°				•	
32°				•	
33°		•	•		
34°	•				
46°				•	
49°		•	•		
59°	•				
WALLWASH					•
COLOUR TEMPERATURE					
2700K	•	•	•	•	•
3000K	•	•	•	•	•
CONTROL					
EXCL. POWER SUPPLY	•	•	•	•	•
NON DIM					•
MAINS DIM				•	
1-10V DIM					
DALI DIM					
WIRELESS DIM					
COLOUR					
WHITE ○	•	•	•	•	•
WHITE-BLACK ○●	•	•	•	•	•
WHITE-CHROME ○●	•	•	•	•	•
WHITE-GOLD MATT ○●	•	•	•	•	•
GOLD MATT ●	•	•	•	•	•
BLACK ●	•	•	•	•	•
BLACK-GOLD MATT ●●	•	•	•	•	•
BLACK-CHROME ●●	•	•	•	•	•
CHROME ●	•	•	•	•	•
INSTALLATION					
INTERIOR	RECESSED	•	•	•	•
	RECESSED TRIMLESS		•		
	SURFACE MOUNTED			•	•
	PROFILES		•		•
MOUNTING KITS					
CSC (COLD STRETCHED CEILING)		•			
WSC (WARM STRETCHED CEILING)		•			

• STANDARD
• NOT FOR ALL VERSIONS

DOT.COM

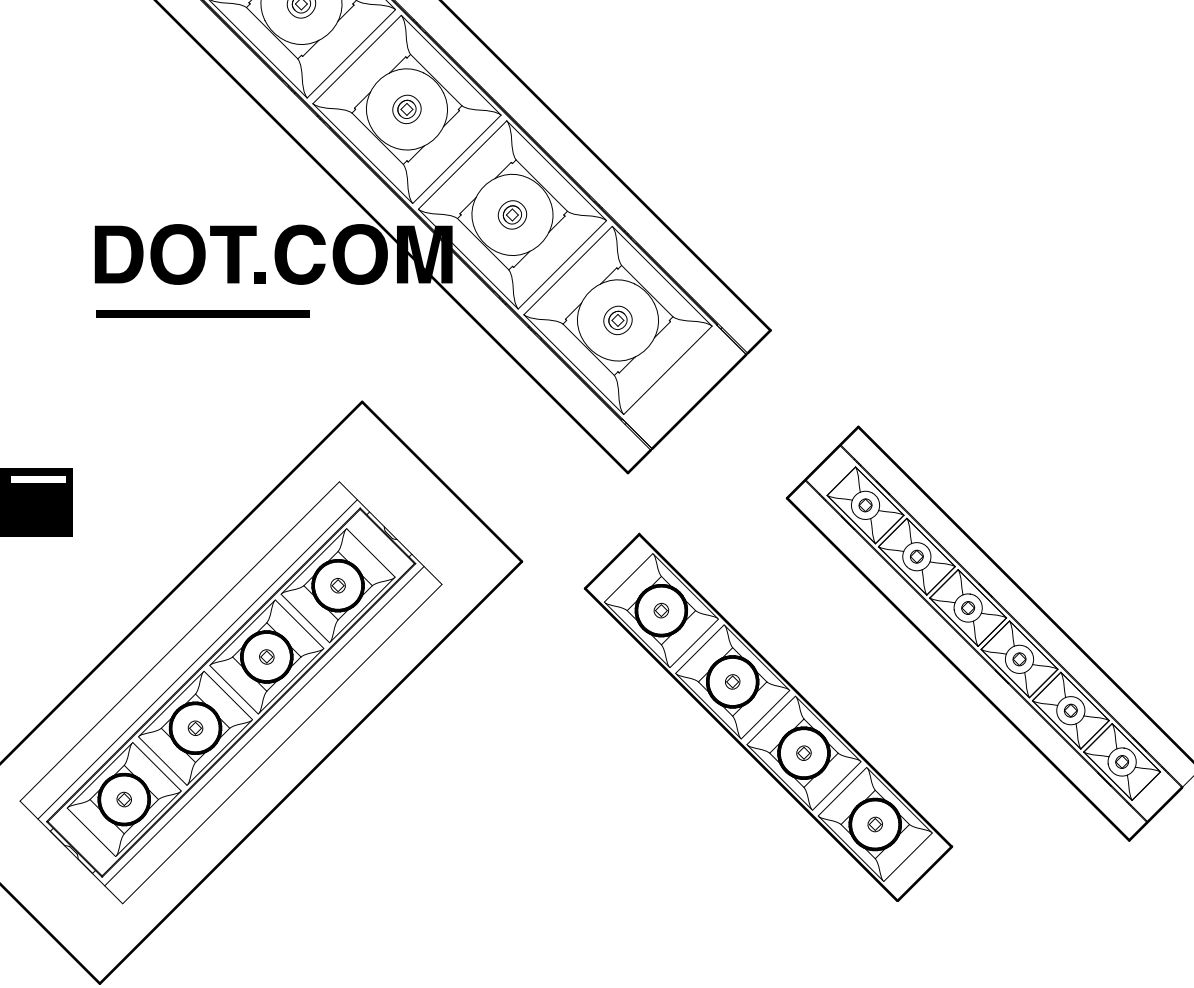

58 x 20 x 50 / min.8



112 x 20 x 50 / min.8

DOT.COM S

UGR <16

S3 ST


S6 ST

		34°		59°		
3000K CRI>90	LED 3,1W / 341lm / 350mA		424 211 03 932 ◇			
	LED 6,1W / 683lm / 350mA		424 211 03 933 ◇			
2700K CRI>90	LED 3,1W / 333lm / 350mA				424 211 06 932 ◇	
					424 211 06 933 ◇	
	LED 6,1W / 665lm / 350mA		424 211 03 922 ◇			
			424 211 03 923 ◇			
					424 211 06 922 ◇	
					424 211 06 923 ◇	


◇ B-B ●● / W-B ○○



A



KIT x 60



136 x 40 x 58 / max.25

DOT.COM M

UGR <16

M4 TRIMLESS


M4 ST OK

		14°		33°		49°	
3000K CRI>90	LED 5,7W / 648lm / 500mA	IP20		424 512 04 931 ◇			424 222 04 931 ◇
				424 512 04 932 ◇			424 222 04 932 ◇
				424 512 04 933 ◇			424 222 04 933 ◇
2700K CRI>90	LED 5,7W / 631lm / 500mA	IP20		424 512 04 921 ◇			424 222 04 921 ◇
				424 512 04 922 ◇			424 222 04 922 ◇
				424 512 04 923 ◇			424 222 04 923 ◇


◇ B ● / C ● / MMAT ●

◇ B-B ●● / W-B ○○ / B-C ●● / B-MMAT ●● / W-C ○○ / W-MMAT ○○





84 x 40 x 62 / max.30



158 x 40 x 62 / max.30

DOT.COM L



UCR <16

L2 ST

L4 ST

Color Temperature	Power / Lumen	Beam Angle	Product Code
3000K CRI>90	LED 6,3W / 613lm / 1050mA	16°	424 213 02 931 ◇
		32°	424 213 02 932 ◇
		46°	424 213 02 933 ◇
	LED 12,6W / 1226lm / 1050mA	16°	424 213 04 931 ◇
		32°	424 213 04 932 ◇
		46°	424 213 04 933 ◇
2700K CRI>90	LED 6,3W / 597lm / 1050mA	16°	424 213 02 921 ◇
		32°	424 213 02 922 ◇
		46°	424 213 02 923 ◇
	LED 12,6W / 1194lm / 1050mA	16°	424 213 04 921 ◇
		32°	424 213 04 922 ◇
		46°	424 213 04 923 ◇

◇ B-B ●● / B-C ●● / B-MMAT ●● / W-B ○● / W-C ○● / W-MMAT ○●



DOT.COM L ON

UCR <16

L2 ON

L4 ON

Color Temperature	Power / Lumen	Beam Angle	Product Code
3000K CRI>90	LED 4,1W / 436lm / 700mA	16°	424 113 02 931 ED8 ◇
		32°	424 113 02 932 ED8 ◇
		46°	424 113 02 933 ED8 ◇
	LED 12,6W / 1226lm / 1050mA	16°	11525 9310 ◇
		32°	11525 9320 ◇
		46°	11525 9330 ◇
2700K CRI>90	LED 4,1W / 425lm / 700mA	16°	424 113 02 921 ED8 ◇
		32°	424 113 02 922 ED8 ◇
		46°	424 113 02 923 ED8 ◇
	LED 12,6W / 1194lm / 1050mA	16°	11525 9210 ◇
		32°	11525 9220 ◇
		46°	11525 9230 ◇


◇ B-B ●● / W-B ○●

220-240V / 50-60Hz

110-240V / 50-60Hz

◇ IP20

◇ IP20



DOT.COM M4 TR
SEMI RECESSED

DOT.COM M4 TR
TRIMLESS RECESSED

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

DOT.COM

	S3 ST	S6 ST	M4 TRIMLESS	M4 ST OK	L2 ST	L4 ST	L2 ON	L4 ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	21012 0298	ⓘ min. 55	R*	R*	R*	R	R*	R
1-10V DIM 16	300 90 63	ⓘ min. 84	R*	R*	R*	R	R*	R
DALI DIM 16	300 90 63	ⓘ min. 84	R*	R*	R*	R	R*	R
MOUNTING KIT TRIMLESS								
CONCRETE / PLASTERBOARD	424 512 04 00				R			
COLD STRETCHED CEILING	15212 0110				R			
WARM STRETCHED CEILING	15212 0180				R			

* REMOTE INSTALLATION




INTERIOR CEILING

DOT.COM WALLWASH

DOT.COM WALLWASH

Dot.Com is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires both recessed as surface mounted, as modules to fit in the magnetic profiles and as a bespoke trimless profile solution, perfect to adapt the light to your specific desires.

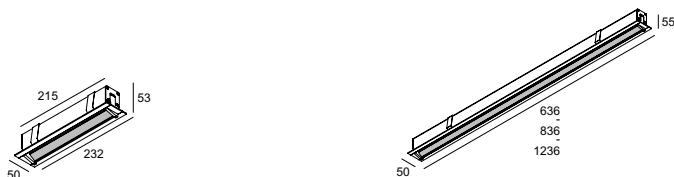


220 x 40 x 50 / min.10 624 x 40 x 50 / min.10 824 x 40 x 50 / min.10 1224 x 40 x 50 / min.10

DOT.COM L WALLWASH

		02 ST HO	06 ST HO	08 ST HO	12 ST HO
3000K CRI>90	LED 9,6W / 1068lm / 350mA	424 242 02 93 ◊			
	LED 12,6W / 1500lm / 350mA		11522 9300 ◊		
	LED 18W / 2240lm / 500mA			11523 9300 ◊	
	LED 25,2W / 3000lm / 700mA				11524 9300 ◊
2700K CRI>90	LED 9,6W / 998lm / 350mA	424 242 02 92 ◊			
	LED 12,6W / 1500lm / 350mA		11522 9200 ◊		
	LED 18W / 2240lm / 500mA			11523 9200 ◊	
	LED 25,2W / 3000lm / 700mA				11524 9200 ◊

◊ W-B ●





DOT.COM ON WALLWASH


		06 HO	08 HO	12 HO
3000K CRI>90	LED 12,6W / 1500lm / 350mA	16313 9300 ◊		
	LED 18W / 2240lm / 500mA		16314 9300 ◊	
	LED 25,2W / 3000lm / 700mA			16315 9300 ◊
2700K CRI>90	LED 12,6W / 1500lm / 350mA	16313 9200 ◊		
	LED 18W / 2240lm / 500mA		16314 9200 ◊	
	LED 25,2W / 3000lm / 700mA			16315 9200 ◊

◊ B ● / W ○



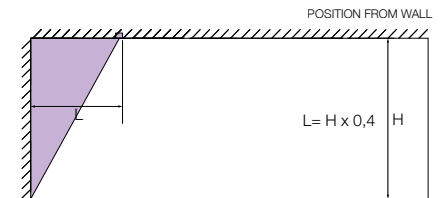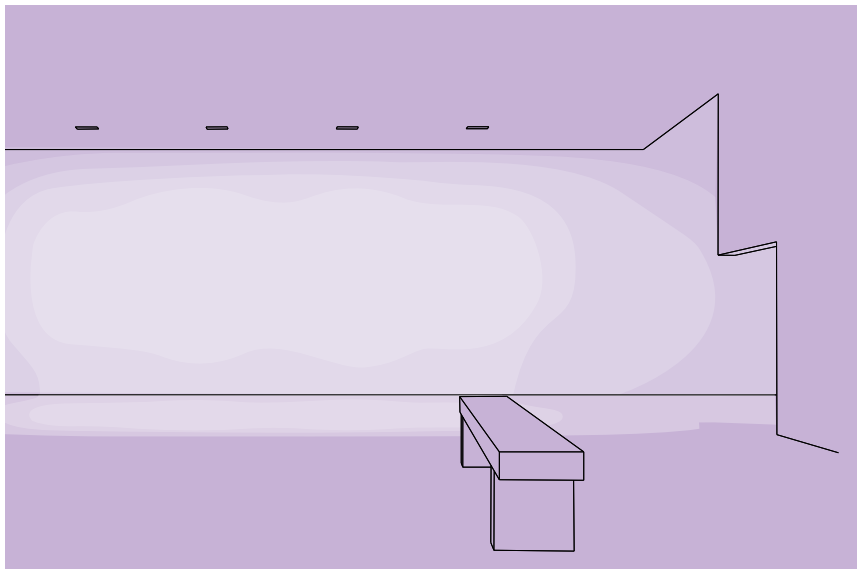

example: H=3000 mm → L= 3000 mm x 0,4 = 1200 mm

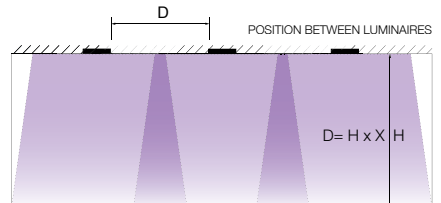

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

	X
DOT.COM L WALLWASH 02	0,5
DOT.COM L WALLWASH 06	0,25
DOT.COM L WALLWASH 08	0,33
DOT.COM L WALLWASH 12	0,5

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


	DOT.COM L WALLWASH								DOT.COM ON WALLWASH		
	02	06	08	12	06	08	12				
	ST HO				HO						
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MAINS DIM (FE) 11	21012 0298	i min. 45	R	R	R	R	R	R	R		
1-10V DIM 16	300 90 63	i min. 84	R	R	R	R	R	R	R	R	
DALI DIM 16	300 90 63	i min. 84	R	R	R	R	R	R	R	R	
INSTALLATION											
FTL35-SUSPENSION SINGLE 1,6m	391 09 01							O	O	O	
CURRENT SUPPLY 1,6m	391 97 51							O	O	O	

HALOSCAN^{PATENTED}


Haloscan is a family of accent lights that come semi-recessed, surface mounted or as modules on the magnetic profiles. Designed around its flat optics, Haloscan combines ultra-minimalistic looks with a pleasurable light effect. The light is softly spread by the plane lens, creating up to 4 different beam angles, from spot to floodlight and even linear light. To smoothly turn and tilt, Haloscan uses the Ex-Centric Rotation System, an asymmetrical hinge that combines rotating and tilting abilities in one swift move.

www.deltalight.com/haloscan

FAMILY

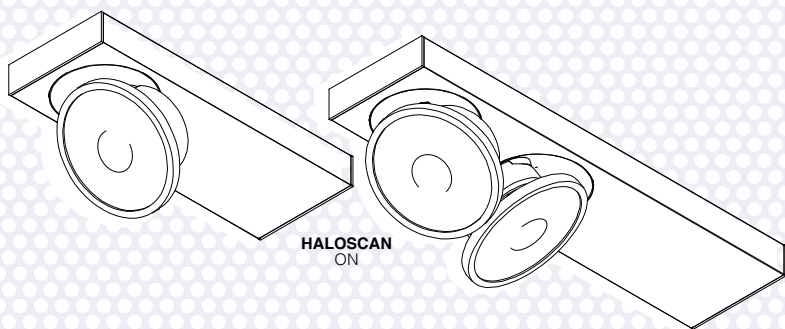

HALOSCAN
ON




M20/26
HALOSCAN



HALOSCAN
CLIP



HALOSCAN
ST

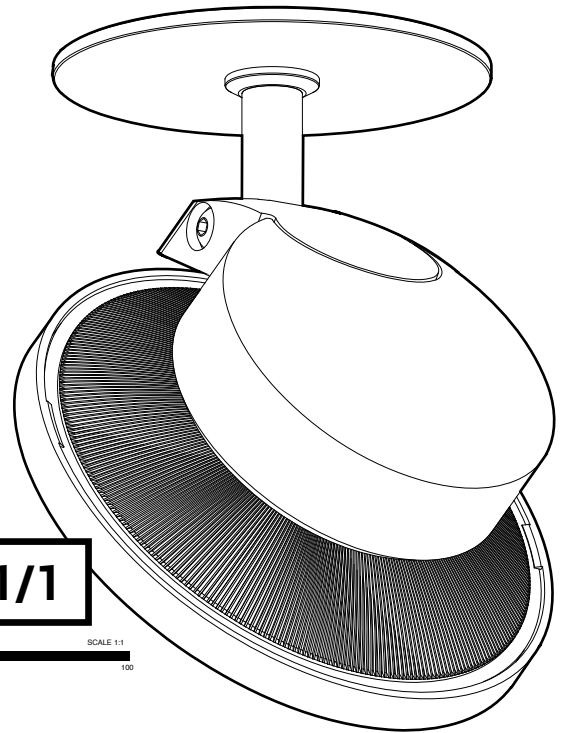

INTERIOR CEILING

HALOSCAN

	MP	HP	
LIGHT EFFECT			
LED	8,6W - 1089lm	11,7W - 1522lm	
OPTICS			
14°	•	•	
21°	•	•	
35°	•	•	
COLOUR TEMPERATURE			
2700K	•	•	
3000K	•	•	
SOFT DIM 3000-1800K	•	•	
CONTROL			
EXCL. POWER SUPPLY	•	•	
NON DIM			
MAINS DIM	•		
1-10V DIM			
DALI DIM			
WIRELESS DIM			
COLOUR			
WHITE ○	•	•	
BLACK ●	•	•	
GOLD COLOURED ●	•		
INSTALLATION			
INTERIOR	RECESSED	•	•
	SEMI-RECESSED	•	•
	SURFACE MOUNTED	•	
	PROFILES	•	•
ACCESSORIES			
HONEYCOMB	•	•	
LINEAR SPREAD LENS	•	•	
KAP	•		


With its different finishing colours, multiple beam angles and single or double versions, Haloscan On is perfect for creative compositions throughout an entire project. Play around with Black, White or Gold colour combinations, put together single or double units and use different optics to generate a synergy between light and dark.

• STANDARD
• NOT FOR ALL VERSIONS


**Play with light, shape
and texture.**

Designed around its flat optics, Haloscan combines ultra-minimalistic looks with a pleasurable light effect.


HALOSCAN PATENTED




Ø70 x 55



Ø70 x 55



Ø50 x 40



Ø50 x 40

A

HALOSCAN

ST MP



ST HP

CLIP MP

CLIP HP

		3000K CRI>90		2700K CRI>90		SOFT DIM			
Beam Angle	ST MP	ST HP	CLIP MP	CLIP HP	Beam Angle	ST MP	ST HP	CLIP MP	CLIP HP
14°	23111 9310 ◇		23117 9310 ◇		14°	23111 9210 ◇		23117 9210 ◇	
21°	23111 9320 ◇		23117 9320 ◇		21°	23111 9220 ◇		23117 9220 ◇	
35°	23111 9330 ◇		23117 9330 ◇		35°	23111 9230 ◇		23117 9230 ◇	
14°		23114 9310 ◇		23120 9310 ◇	14°		23114 9210 ◇		23120 9210 ◇
21°		23114 9320 ◇		23120 9320 ◇	21°		23114 9220 ◇		23120 9220 ◇
35°		23114 9330 ◇		23120 9330 ◇	35°		23114 9230 ◇		23120 9230 ◇
14°	23112 9010 ◇		23118 9010 ◇		14°	23112 9010 ◇		23118 9010 ◇	
21°	23112 9020 ◇		23118 9020 ◇		21°	23112 9020 ◇		23118 9020 ◇	
35°	23112 9030 ◇		23118 9030 ◇		35°	23112 9030 ◇		23118 9030 ◇	
14°		23115 9010 ◇		23121 9010 ◇	14°		23115 9010 ◇		23121 9010 ◇
21°		23115 9020 ◇		23121 9020 ◇	21°		23115 9020 ◇		23121 9020 ◇
35°		23115 9030 ◇		23121 9030 ◇	35°		23115 9030 ◇		23121 9030 ◇

◇ B ● / W ○



HALOSCAN ON

1 MP

2 MP

		3000K CRI>90		2700K CRI>90		SOFT DIM	
Beam Angle	1 MP	2 MP	Beam Angle	1 MP	2 MP		
14°	23147 9318 ◇		14°	23148 9018 ◇			
21°	23147 9328 ◇		21°	23148 9028 ◇			
35°	23147 9338 ◇		35°	23148 9038 ◇			
14°		23149 9318 ◇	14°		23149 9218 ◇		
21°		23149 9328 ◇	21°		23149 9228 ◇		
35°		23149 9338 ◇	35°		23149 9238 ◇		
14°	23147 9218 ◇		14°	23148 9018 ◇			
21°	23147 9228 ◇		21°	23148 9028 ◇			
35°	23147 9238 ◇		35°	23148 9038 ◇			
14°		23149 9218 ◇	14°		23150 9018 ◇		
21°		23149 9228 ◇	21°		23150 9028 ◇		
35°		23149 9238 ◇	35°		23150 9038 ◇		


◇ B-B ●● / B-GC ●●● / W-W ○○○

220-240V 50-60Hz







**READ MY
COLOUR**

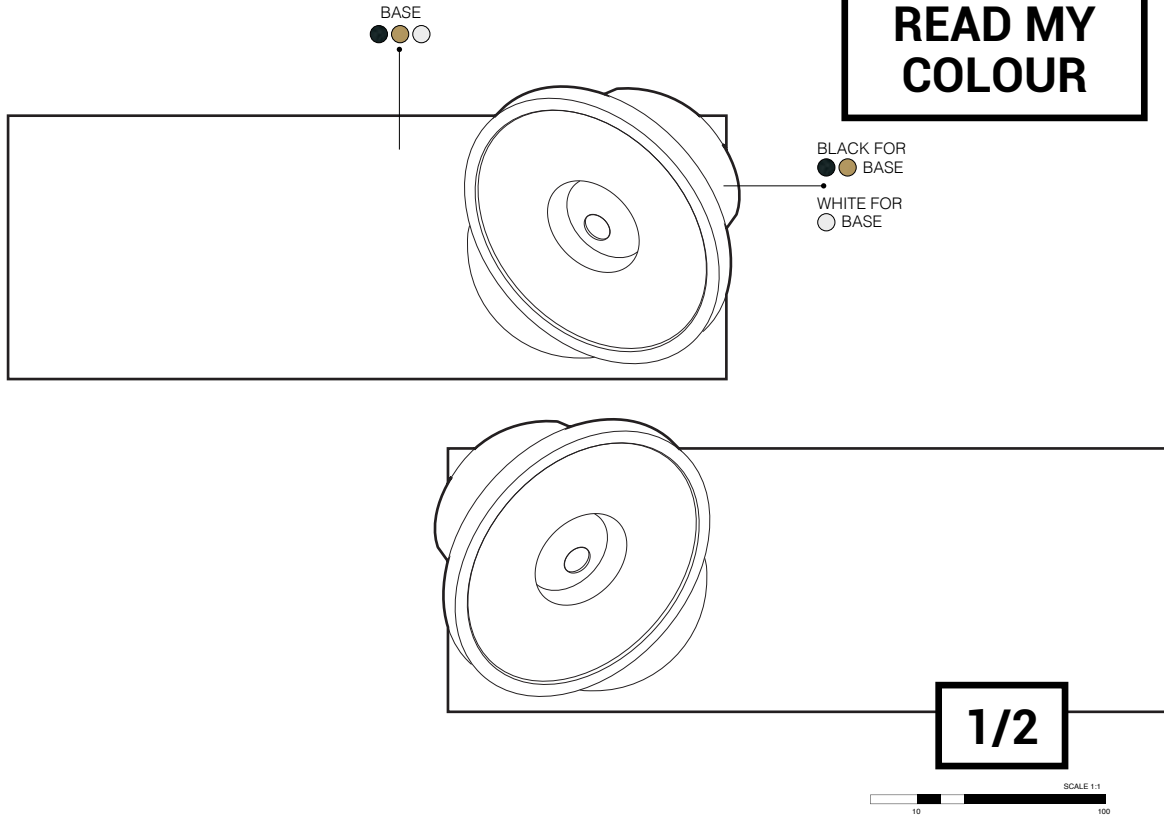

INTERIOR CEILING

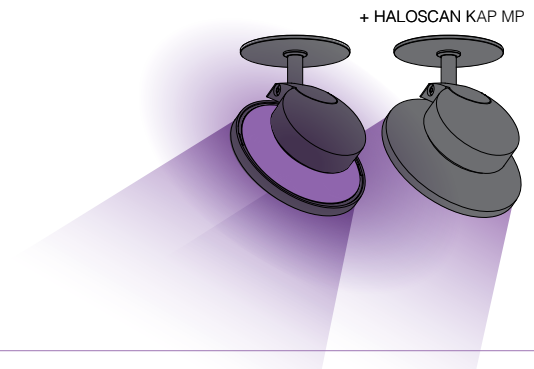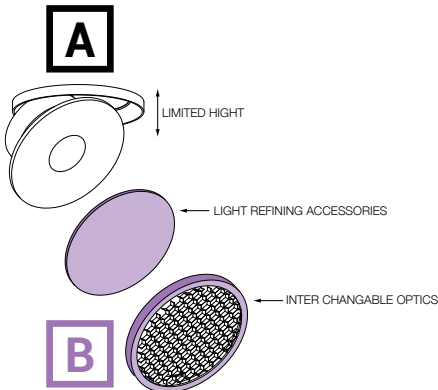

FINISH YOUR SPECIFICATION





REQUIREMENT / OPTION / ACCESSORY

			HALOSCAN				HALOSCAN ON	
			ST MP	ST HP	CLIP MP	CLIP HP	1 MP	2 MP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	21012 0298	1 min. 55	R	R	R*	R*		
1-10V DIM 15	300 90 124	1 min. 55	R	R	R*	R*		
DALI DIM 14	300 90 125	1 min. 55	R	R	R*	R*		
HONEYCOMB / LENS / GLASS								
HONEYCOMB	23110 0050 B		A	A	A	A	A	A
LINEAR SPREAD LENS	23110 0040		A	A	A	A	A	A
HALOSCAN KAP MP	23110 0060 B / W				A		A	A

* REMOTE INSTALLATION

OONO

1/2



NEW


OONO



T


ON 2


ON E27


C E27

3000K CRI>90	2x LED 8.6W / 1089lm / 500mA	NON DIM		29614 9300 ◇		
2700K CRI>90	2x LED 8.6W / 1041lm / 500mA			29614 9200 ◇		
 SOFT DIM	3000-1800K / CRI>90 LED 6W / 623lm / 350mA	DIM	29624 9000 ◇			
1 x T45 max 8W					29622 0000 ◇	29621 0000 ◇

AM  / GM 
220-240V / 50-60Hz
INCL. POWER ADAPTER

◇ B  / GC  / W 
220-240V / 50-60Hz

◇ B  / W 
100-240V / 50-60Hz

◇ GM 
100-240V / 50-60Hz
INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL. 1 x CABLE 3 x 0.75mm² 1.6m

□ IP20

◇ IP20 CEILING / IP44 WALL




◇ IP20

◇ IP20

A



FIND ME ONLINE

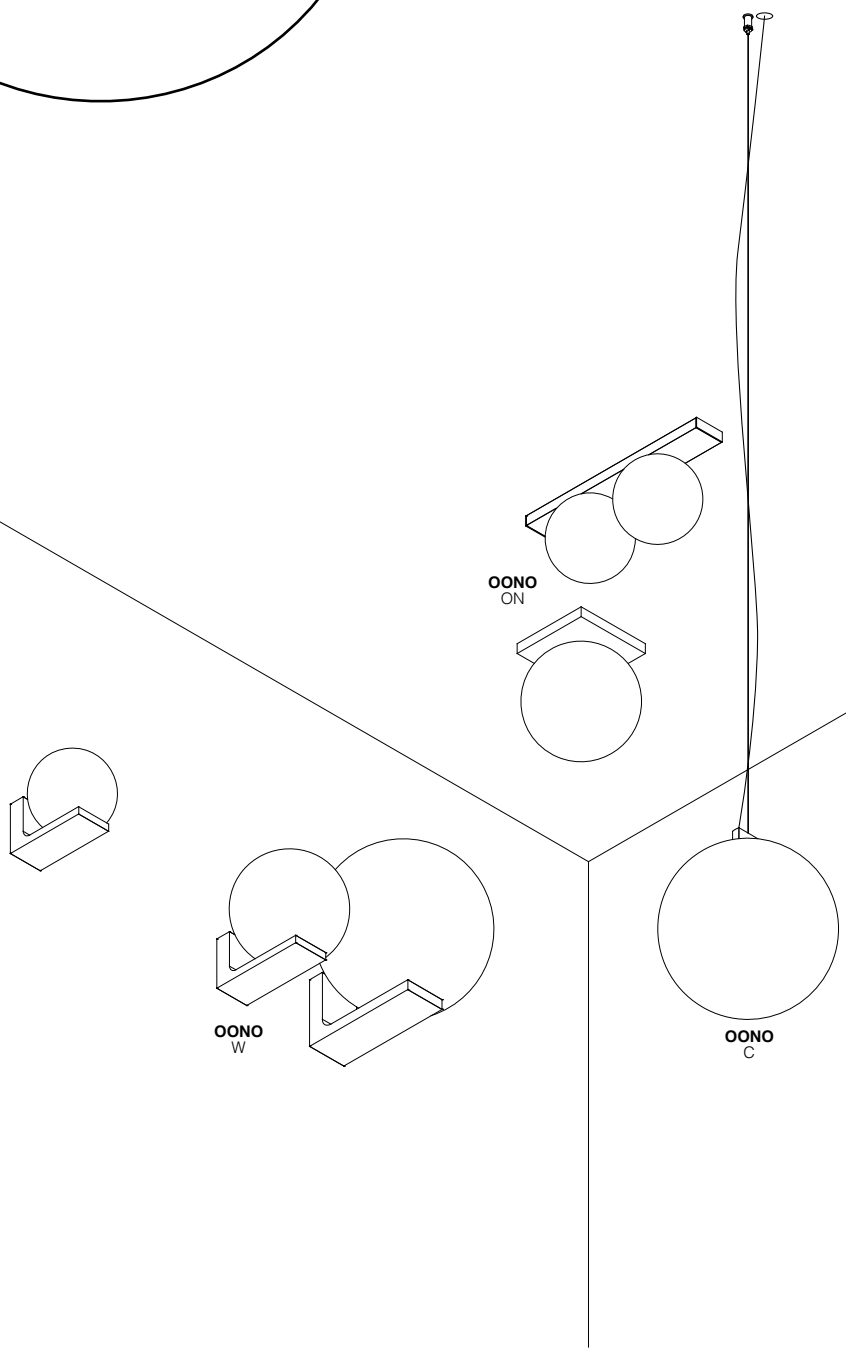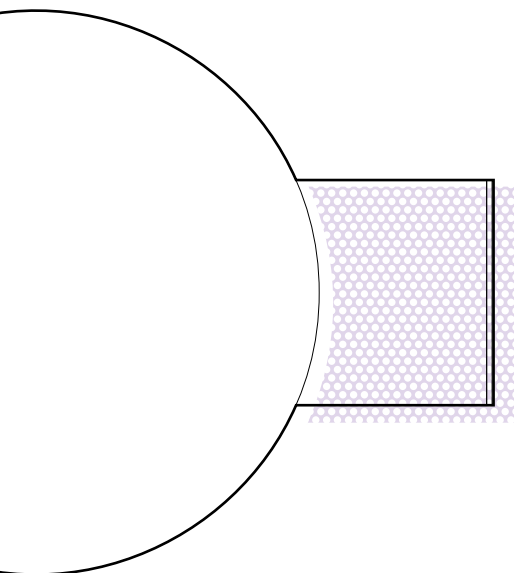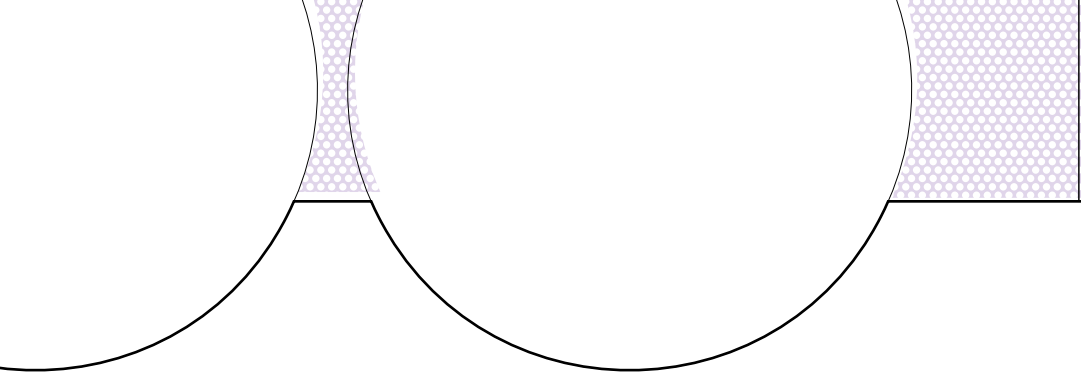

*How to describe Oono in one sentence?
'A soft glow of light during golden hour, at the
end of a sky-blue summers day...'*

That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities. It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass. It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors. It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold. It brings together the shimmer of dusk with the fresh start of dawn.

www.deltalight.com/oono



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


		OONO		
		ON 2	ON E27	C E27
INSTALLATION				
CEILING BASE MULTI 1	28700 0040 B / W			R
or CEILING BASE MULTI 3	28700 0070 B / W			R
LAMP E27	21024 0280			O

TWEETER PATENTED

Tweeter has been one of the most remarkable families in the Delta Light collection for many years. Available as ceiling recessed and ceiling surface mounted, Tweeter introduces new levels in flexibility, both in movement as in lighting application. Tweeter is based on **Delta Light's Ex-centric Rotation System**, characterized by an asymmetrical hinge joint, combining extreme rotation and tilting abilities, all in one swift whirling motion.


The recessed Tweeter versions enable a maximum fuse of light and architecture. The spotlight heads are identical to the surface mounted installation and handling is simple and convenient. The double shell design prevents ceiling exposure, while the flexible inner shell tailors for any lighting need. Ultimate refinement is reached with a subtle aureole of light circling around the central led, offering improved lighting aesthetics. The application of the Ex-centric Rotation System not only upgrades movement of the fixture, but more importantly also provides advanced lighting abilities. The rotation mechanism was designed so that the light beam is not cut off, resulting in maximum efficiency.

www.deltalight.com/tweeter

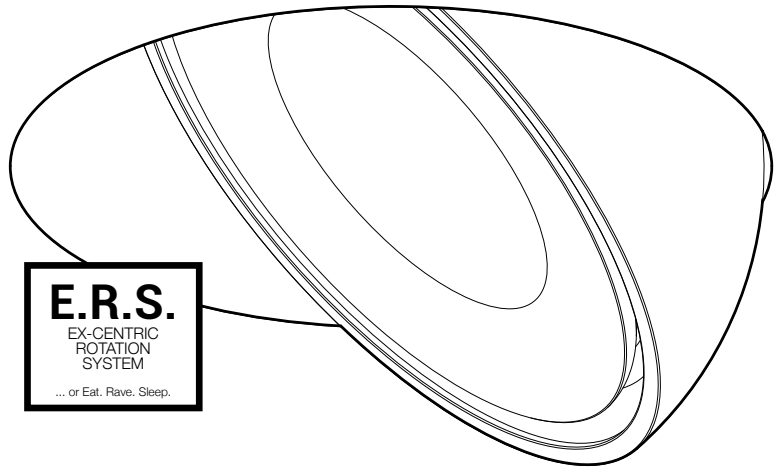


E.R.S.
EX-CENTRIC
ROTATION
SYSTEM
... or Eat. Flave. Sleep.

**TWEETER
TRIMLESS**



ØKIT x 80



114 x 80 / max.25





TWEETER M

TRIMLESS

ST

		TRIMLESS		ST		
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	33°	418 11 811 932 ◊	418 21 811 932 ◊		
	LED [H] 10.4W / 1128lm / 500mA	50°	418 11 811 933 ◊	418 21 811 933 ◊		
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	33°	418 11 811 922 ◊	418 21 811 922 ◊		
	LED [H] 10.4W / 1083lm / 500mA	50°	418 11 811 923 ◊	418 21 811 923 ◊		
SOFT DIM	3000-1800K / CRI>90	IP23	21613 9030 ◊		21612 9030 ◊	
	LED 10.2W / 1038lm / 500mA		45°			

◊ B-C ● ● / W-W ○ ○



TWEETER M ON

1

2

1 WDL

2 WDL

		1		2		1 WDL		2 WDL	
3000K CRI>90	1 or 2 LED	MAINS	33°	418 51 811 932 ED8 ◊	418 51 812 932 ED8 ◊				
	10.4W / 1128lm / 500mA		50°	418 51 811 933 ED8 ◊	418 51 812 933 ED8 ◊				
	1 or 2 LED	WIRELESS	33°				418 51 811 932 WDL ◊	418 51 812 932 WDL ◊	
	10.4W / 1128lm / 48V-DC		50°				418 51 811 933 WDL ◊	418 51 812 933 WDL ◊	
2700K CRI>90	1 or 2 LED	MAINS	33°	418 51 811 922 ED8 ◊	418 51 812 922 ED8 ◊				
	10.4W / 1083lm / 500mA		50°	418 51 811 923 ED8 ◊	418 51 812 923 ED8 ◊				
	1 or 2 LED	WIRELESS	33°				418 51 811 922 WDL ◊	418 51 812 922 WDL ◊	
	10.4W / 1083lm / 48V-DC		50°				418 51 811 923 WDL ◊	418 51 812 923 WDL ◊	

◊ B-C ● ● / W-W ○ ○

FOR WIRELESS




220-240V / 50-60Hz



IP20

INCL. WIRELESS DIMMABLE CONVERTER
48V-DC TO 500mA

IP20



SOFT DIM

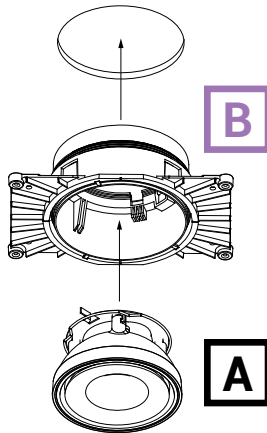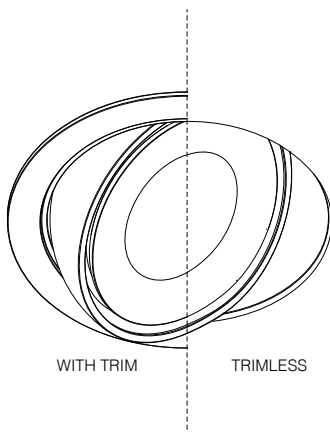

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	TWEETER M		TWEETER M ON			
	TRIMLESS	ST	1	2	1 WDL	2 WDL
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM 48V-DC / 100W / DIN	300 89 48 100	100 x 55 x 90			R	R
MAINS DIM (FE) 11	21012 0298	i min. 55	R	R		
1-10V DIM 15	300 90 124	i min. 55	R	R		
DALI DIM 14	300 90 125	i min. 55	R	R		
MOUNTING KIT TRIMLESS						
CONCRETE / PLASTERBOARD	15212 2010		R			
COLD STRETCHED CEILING	15212 0090		R			
WARM STRETCHED CEILING	15212 0170		R			



OBIN ^{PATENTED}


Introducing Obin, a cutting-edge lighting solution that embodies our commitment to quality and innovation.

Based on the patented ERS (Ex-Centriq Rotation System) and equipped with flat lenses, Obin fuses ultimate flexibility with supreme user comfort in a minimalistic surface mounted lighting fixture. By adjusting the rounded backside - using the ERS system - Obin is 360° rotatable and 45° tiltable without the need of an additional hinge. On the frontside, the sleek lenses create a sense of depth without the need of real physical space. Combining both results in free space on the inside to house a DALI power supply, perfect for an easy individual controllable surface mounted lighting scheme.


Obin comes as a single or double surface mounted unit or as module to install on our magnetic profiles. While the double versions comes in Black or White, the single spotlight is available in our delicate finishes Brushed Grey, Brushed Copper, Brushed Gold, Brushed Old Bronze and Brushed Anthracite and, easily adding refinement to any room. To further improve on visual comfort, Obin can be provided with a honeycomb to reduce any redundant glare to a minimum.

Whether you are looking to create a subtle and sophisticated ambiance in a residential space, or in need of a functional and versatile lighting solution for a hospitality project, Obin has you covered.

www.deltalight.com/obin





OBIN ON

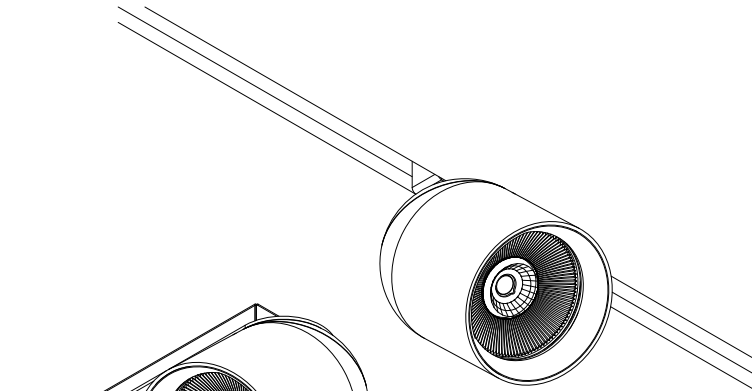

M20/26 OBIN



NEW
OBIN




		ON		ON 2	
3000K CRI>90	1 or 2 x LED 11.6W / 1524lm / 350mA	MAINS	24°	30511 9328 ◇	30512 9328 ◇
		DALI		30511 9325 ◇	
	MAINS	36°	30511 9338 ◇	30512 9338 ◇	
		DALI		30511 9335 ◇	
2700K CRI>90	1 or 2 x LED 11.6W / 1458lm / 350mA	MAINS	24°	30511 9228 ◇	30512 9228 ◇
		DALI		30511 9225 ◇	
	MAINS	36°	30511 9238 ◇	30512 9238 ◇	
		DALI		30511 9235 ◇	

◇ B ● / BRA ● / BRG ● / BROB ● / BRAT ● / W ○	◇ B ● / W ○
MAINS 220-240V / 50-60Hz	220-240V / 50-60Hz
DALI 120-240V / 50-60Hz	◇ I IP20
◇ I IP20	



1/1

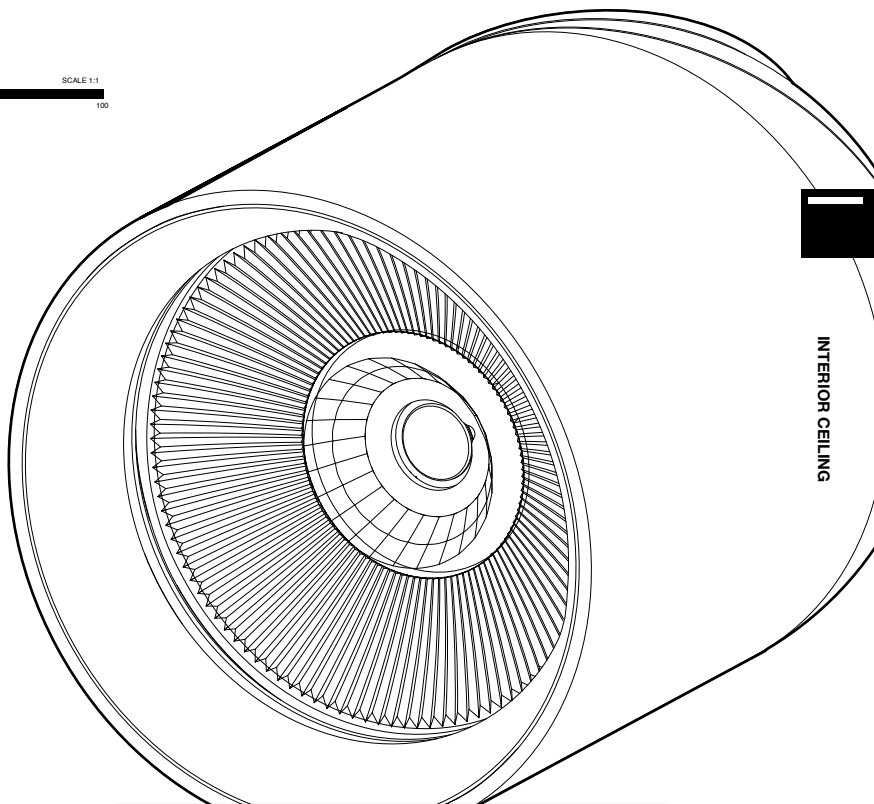


INTERIOR CEILING

**Cute outside,
functional inside.**

INTEGRATED DALI POWER SUPPLY

A



B

B

REQUIREMENT / OPTION / ACCESSORY

OBIN

ON

ON 2

FINISH

SPY 90 TUBE 19810 0170 B / FBR / FG / GC / W

R

R

HONEYCOMB / LENS / GLASS

HONEYCOMB 75

19810 0110 B

A

A

ODRON / BOWIE

HAVE ANOTHER LOOK

Don't be fooled: Odron may look peculiar at first sight, nevertheless its specific design is intended to create a compact yet powerful lighting solution.

A second look puts everything in perspective: the flat design of the disc in combination with the shallow base results in a highly functional luminaire within a limited height of 45mm.

As from now, any additional look on it makes you appreciate Odron more and more: its possibility to serve both as a straightforward downlight or as an omnidirectional spotlight, the shiny details of the cover in contrast with the structured lacquer of the body or the touch of colour it adds thanks to the additional golden cover, it is clear that Odron enriches the space in more than one way.

The elegant Odron is available as a clip version and as a single or double spot to be mounted onto the ceiling or as module for our Magnetic profile range.

KEEP YOUR EYE ON THE BALL


Add some body to the room with Bowie, it impresses through its spherical shape. Twist and turn, tilt and aim, Bowie will always look the same, whatever its direction and no matter the angle you look at it. Bowie in pure white or black easily fits in any interior and adds a touch of richness to the room.

Within its range, Bowie comes as a semi-recessed Clip version, as a single or double spotlight to be surface mounted or as module to fit into our Magnetic profile offer.

www.deltalight.com/odron
www.deltalight.com/bowie



50 x 40



50 x 40


ODRON CLIP*

BOWIE CLIP


		28°/41°		26213 9300 ◇			
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mr	IP20	25°				26713 9320 ◇
			37°				26713 9330 ◇
			28°/41°		26213 9200 ◇		
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500m ²		25°				26713 9220 ◇
			37°				26713 9230 ◇

*INCL. 2 REFLECTORS


◇ B-B ● / W-W ○




ODRON ON 1*



ODRON ON 2*



BOWIE ON 1



BOWIE ON 2




		28°/41°		26214 9308 ◇		26215 9308 ◇			
3000K CRI>90	1 or 2 LED 5.8W / 734lm / 350mA	MAINS	25°						26714 9328 ◇
			37°						26714 9338 ◇
			28°/41°		26214 9208 ◇		26215 9208 ◇		
2700K CRI>90	1 or 2 LED 5.8W / 702lm / 350mA		25°						26714 9228 ◇
			37°						26714 9238 ◇

*INCL. 2 REFLECTORS

◇ B ● / W ○


220-240V / 50-60Hz

□ IP20

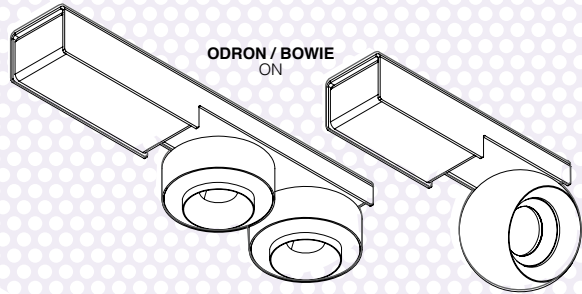


INTERIOR CEILING

A



B

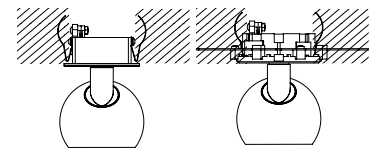

BOWIE CLIP

BOWIE CLIP +
MOUNTING KIT FLUSH

REQUIREMENT / OPTION / ACCESSORY

			ODRON			BOWIE		
			CLIP	ON 1	ON 2	CLIP	ON 1	ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE)	11	21012 0298	ⓘ min. 55	R*		R*		
1-10V DIM	15	300 90 124	ⓘ min. 55	R*		R*		
DALI DIM	14	300 90 125	ⓘ min. 55	R*		R*		
MOUNTING KIT TRIMLESS								
MOUNTING KIT FLUSH SPY		414 90 01		O		O		
HONEYCOMB / LENS / GLASS								
ODRON COVER		6210 0020 GC		A	A	A		

* REMOTE INSTALLATION

B

UHO

At first sight Uho appears to be simple. In close-up, the workmanship is being revealed in the little details. The refined ratio of the body compared to its diameter, the small joints that create a sophisticated look, the softly curved hinge that perfectly matches the contours of its body. With Uho, elegance is in the details. Uho is available as accent light on our small profiles Splitline 14 and Shiftline 19 and as a spotlight it comes as single or double Clip version, as single trimless recessed and as triple unit for surface mounting. Furthermore Uho can also be used as light unit in our **AIR** range, a toolset that combines light and ventilation in one.

www.deltaight.com/uh0



UHO

3000K CRI>90	LED [A] 3W / 327lm / 1050mA 2x LED [A] 3W / 327lm / 1050mA	IP20	30°
2700K CRI>90	LED [A] 3W / 303lm / 1050mA 2x LED [A] 3W / 303lm / 1050mA		

L TRIMLESS


27217 9320	◇
27217 9220	◇

2 AIR


27218 9320	◇
27218 9220	◇

◇ B ● / FBR ● / FG ● / GC ● / W ○


◇ B-B ●● / FBR-B ●● / FG-B ●● / GC-B ●● / W-B ○○




41 x 40



62 x 40



41 x 40



62 x 40


UHO

3000K CRI>90	LED [A] 3W / 327lm / 1050mA 2x LED [A] 3W / 327lm / 1050mA	IP20	30°
2700K CRI>90	LED [A] 3W / 303lm / 1050mA 2x LED [A] 3W / 303lm / 1050mA		

CLIP CLIP 2 L CLIP L CLIP 2

27211 9320	◇	27215 9320	◇	27212 9320	◇	27216 9320	◇
27211 9220	◇	27215 9220	◇	27212 9220	◇	27216 9220	◇

◇ B-B ●● / FBR-B ●● / FG-B ●● / GC-B ●● / W-W ○○



UHO

3000K CRI>90	3x LED 2.9W / 290lm / 1000mA	IP20	30°
2700K CRI>90	3x LED 2.9W / 254lm / 1000mA		

L ON 3

27214 9320	◇
27214 9220	◇

◇ B-B ●● / W-W ○○



220-240V / 50-60Hz

□ IP20






Softly curved hinge that perfectly matches the contours of the body.

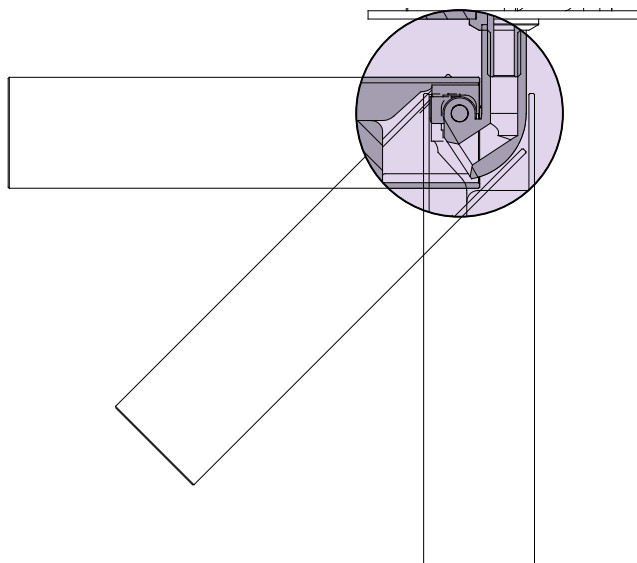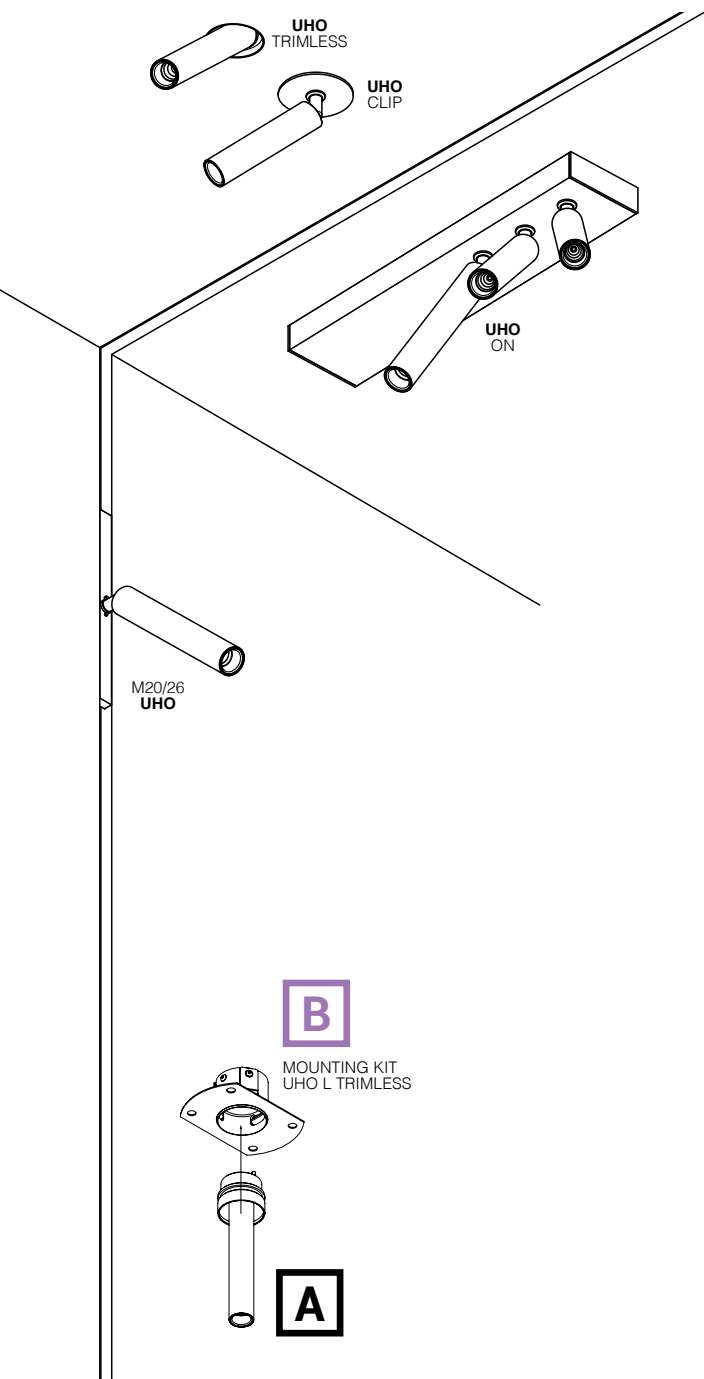

INTERIOR CEILING



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	UHO L		UHO				
	TRIMLESS	2 AIR	CLIP	CLIP 2	L CLIP	L CLIP 2	L ON 3
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
1-10V DIM 16	300 90 63	<i>i</i> min. 84	R*	R*	R*	R*	R*
DALI DIM 16	300 90 63	<i>i</i> min. 84	R*	R*	R*	R*	R*
MOUNTING KIT TRIMLESS							
PLASTERBOARD	15212 2060		R				
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER							
PLASTERBOARD SIDE AIR	29810 0040	Light+Ventilation		R			
	29810 0080	Light		R			
	29810 0100	Ventilation		O			
CONCRETE TOP AIR	29810 0240	Light+Ventilation		R			
	29810 0080	Light		R			
	29810 0200	Ventilation		O			


* REMOTE INSTALLATION



SPY

FAMILY

Low to high output, narrow to wide optics, multiple LED colours, recessed to surface mounted and track applications, different colour finishes, light refining accessories

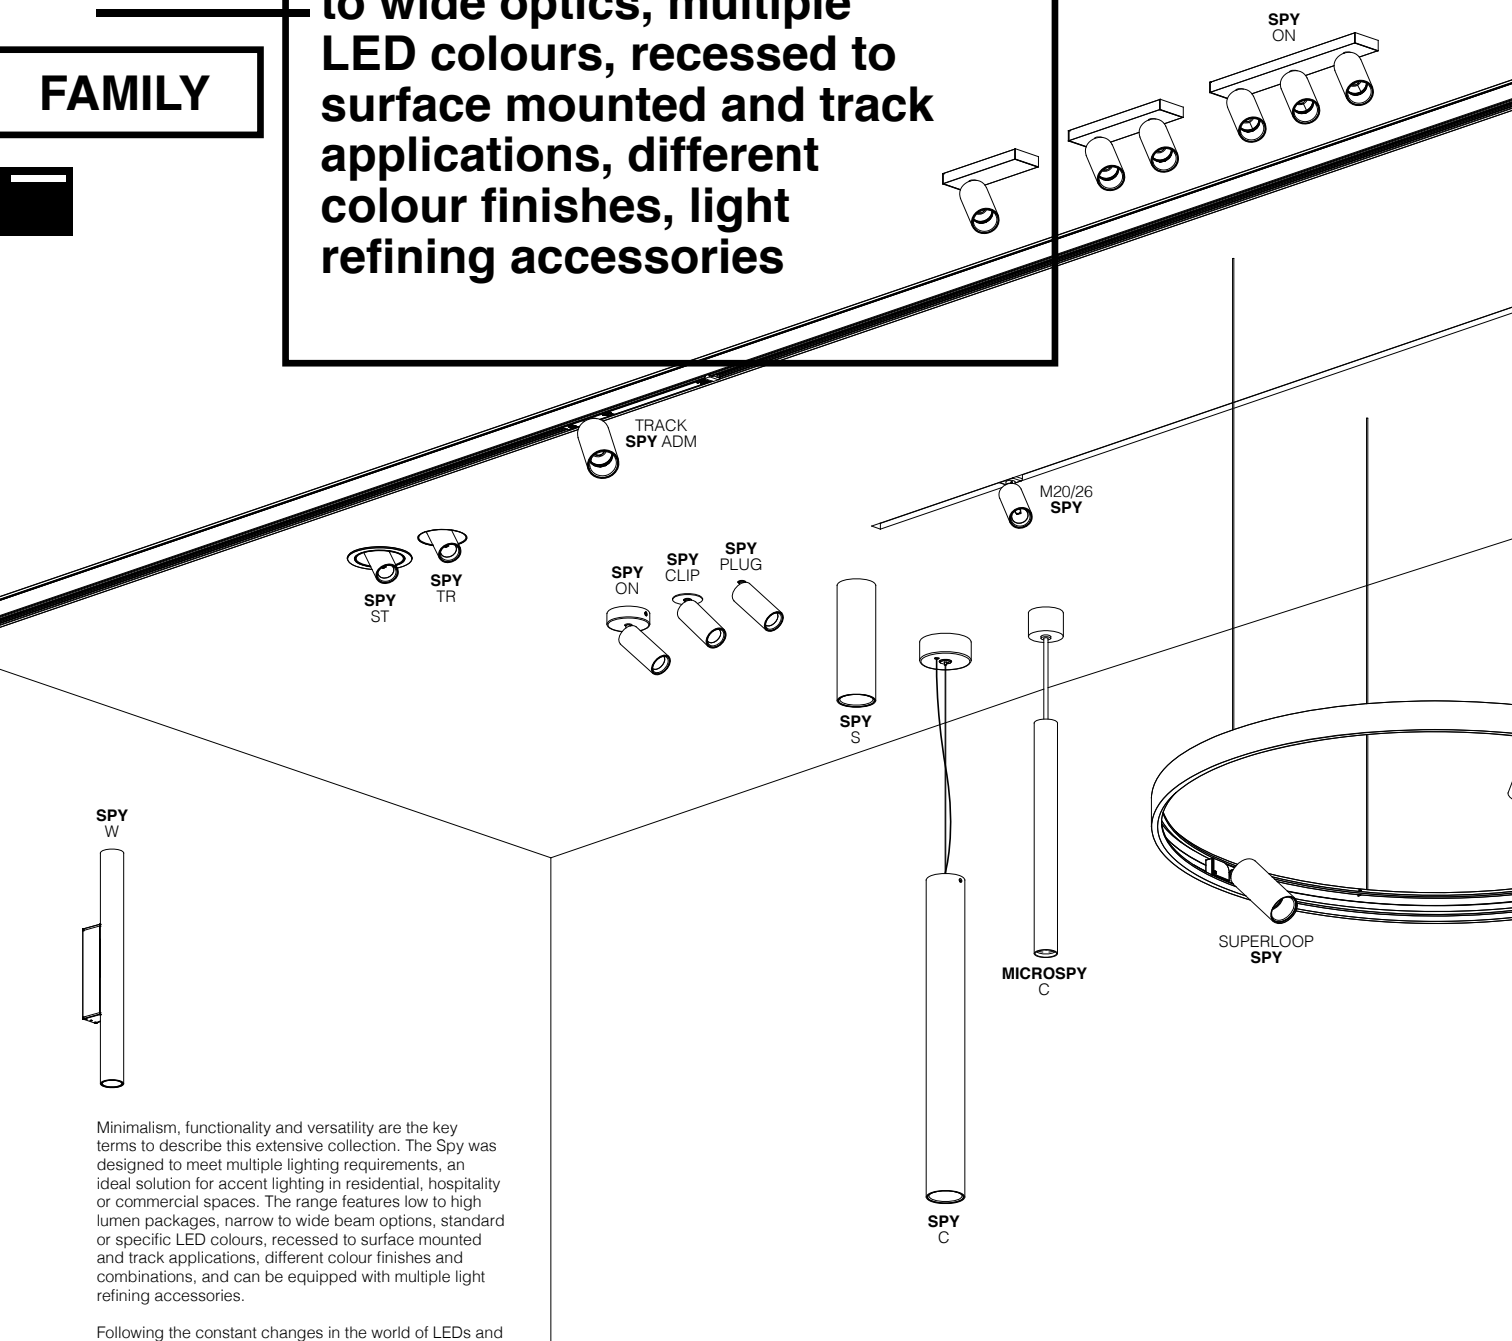

SPY W



Minimalism, functionality and versatility are the key terms to describe this extensive collection. The Spy was designed to meet multiple lighting requirements, an ideal solution for accent lighting in residential, hospitality or commercial spaces. The range features low to high lumen packages, narrow to wide beam options, standard or specific LED colours, recessed to surface mounted and track applications, different colour finishes and combinations, and can be equipped with multiple light refining accessories.

Following the constant changes in the world of LEDs and optics and the evolution to better user comfort with more precise optics and better light control, the complete Spy range has been upgraded. The result? Fresh shapes and additional finishing colours, better light comfort through hybrid optics, improved LED colour consistency and new perspectives with Tunable White and Soft Dim.


The renewed Spy family comes in diameters of 27, 39, 52, 66 and 90 millimeters, a range of spotlights to fit any purpose. While the smaller versions come in the lively colours Flemish Bronze, Flemish Gold and Gold Coloured, the bigger Spy's offer Tunable White and Soft Dim solutions in multiple beam angles.

Furthermore Spy can also be used as light unit in our **AIR** range, a toolset that combines light and ventilation in one.

www.deltalight.com/spy




	MICRO SPY	SPY 27	SPY 39	SPY 52	SPY 66	SPY 90
LIGHT EFFECT						
LED	3,9W - 385lm 5,7W - 519lm	5,8W - 787lm	5,8W - 787lm 8,6W - 1089lm	8,6W - 1089lm 12,4W - 1467lm	9W - 1076lm 17,1W - 2125lm 24,6W - 2907lm	23,2W - 3169lm
OPTICS						
12°					•	
15°	•					
18°					•	•
20°			•	•		
24°			•			
26°					•	
30°	•	•			•	•
33°				•	•	
39°					•	
40°			•		•	•
45°					•	
COLOUR TEMPERATURE						
2700K	•	•	•	•	•	•
3000K	•	•	•	•	•	•
SOFT DIM 3000-1800K						
TUNABLE WHITE 2700-5700K				•	•	
CONTROL						
EXCL. POWER SUPPLY	•	•	•	•	•	
NON DIM						•
MAINS DIM		•	•	•		•
1-10V DIM						
DALI DIM						•
WIRELESS DIM						
COLOUR						
WHITE ○	•	•	•	•	•	•
BLACK ●	•	•	•	•	•	•
FLEMISH BRONZE ●		•	•	•		
FLEMISH GOLD ●		•	•	•		
GOLD COLOURED ●		•	•	•		
BRUSHED GREY ●			•			
BRUSHED COPPER ●			•			
BRUSHED GOLD ●			•			
BRUSHED OLD BRONZE ●			•			
BRUSHED ANTHRACITE ●			•			
PIANO BLACK ●			•			
COLOUR TUBE						
WHITE ○			•	•	•	•
BLACK ●			•	•	•	•
FLEMISH BRONZE ●			•	•	•	•
FLEMISH GOLD ●			•	•	•	•
GOLD COLOURED ●			•	•	•	•
MATT GOLD ●					•	
PIANO BLACK ●						•
INSTALLATION						
INTERIOR	RECESSED	•		•	•	
	RECESSED TRIMLESS	•		•	•	
	SEMI-RECESSED		•	•	•	•
	SURFACE MOUNTED		•	•	•	•
	SUSPENDED CABLE			•	•	
	TRACK			•	•	•
EXTERIOR	PROFILES			•	•	
	WALL				•	
ACCESSORIES						
VISOR	•	•	•			
HONEYCOMB				•	•	•
SPREAD LENS				•	•	•
LINEAR SPREAD LENS				•	•	•
SOFTENING LENS				•	•	•
GLASS SANDBLASTED SBL				•	•	•
MOUNTING KITS						
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)			•	•		
CSC (COLD STRETCHED CEILING)			•	•		
WSC (WARM STRETCHED CEILING)			•	•		
▲IR (LIGHT + VENTILATION)			•	•		




INTERIOR CEILING

• STANDARD
• NOT FOR ALL VERSIONS


MICRO SPY

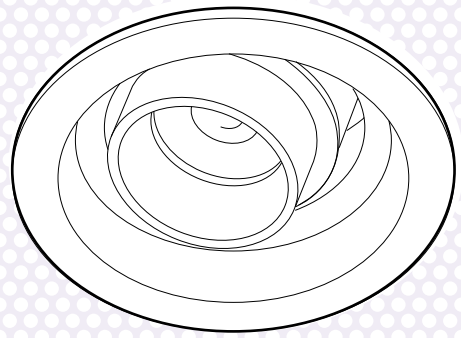

MICRO SPY
IN OK



MICRO SPY
IN




MICRO SPY TRIMLESS
SNAP IN + MICROVISOR




MICRO SPY TRIMLESS
SNAP IN OK




ⓘ KIT x 75



ⓘ KIT x 75 / max.12



ⓘ 36 x 75 / min.2-max.25



ⓘ 54 x 75 / min.2-max.25



MICRO



SNAP-IN SNAP-IN OK SPY IN SPY IN OK

3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.1W / 480lm / 450mA LED [E] 5.7W / 519lm / 500mA	IP20	15°	24113 9310 ◇	24112 9310 ◇ *	24110 9310 ◇ *	24111 9310 ◇ *
			30°	24113 9320 ◇	24112 9320 ◇ *	24110 9320 ◇ *	24111 9320 ◇ *
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.1W / 480lm / 450mA LED [E] 5.7W / 519lm / 500mA	IP20	15°	24113 9210 ◇	24112 9210 ◇ *	24110 9210 ◇ *	24111 9210 ◇ *
			30°	24113 9220 ◇	24112 9220 ◇ *	24110 9220 ◇ *	24111 9220 ◇ *

◇ B ● / W ○

* max. 450mA



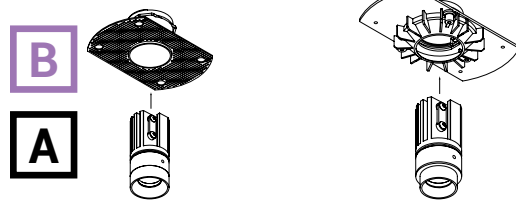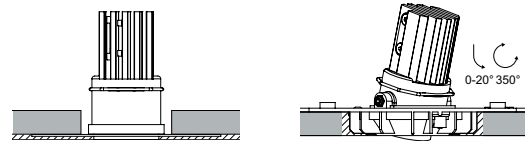

MICRO SNAP-IN + MOUNTING KIT
TRIMLESS MICROSPY IN

MICRO OK SNAP-IN + MOUNTING KIT
TRIMLESS MICROSPY IN OK

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

				MICRO			
				SNAP-IN	SNAP-IN OK	SPY IN	SPY IN OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R*	R*	
1-10V DIM 16	300 90 63	i min. 84	R*	R*	R*	R*	
DALI DIM 16	300 90 63	i min. 84	R*	R*	R*	R*	
MOUNTING KIT TRIMLESS							
PLASTERBOARD	15212 2040		R				
	15212 2020			R			
HONEYCOMB / LENS / GLASS							
MICRO VISOR	10034 0010 B	max. 350mA	A	A	A	A	


* REMOTE INSTALLATION



SPY 27



43 x 40



43 x 40




SPY 27

CLIP

L CLIP

Color Temperature	LED Configuration	Power / Lumen / Current	Beam Angle	CLIP	L CLIP
3000K CRI>90	1, 2 or 4 LED	[U] 5.8W / 787lm / 350mA	IP20 30°	24118 9320 ◊	24133 9320 ◊
2700K CRI>90	1, 2 or 4 LED	[U] 5.8W / 753lm / 350mA		24118 9220 ◊	24133 9220 ◊

◊ B-B ●● / FBR-B ●●● / FG-B ●●●● / GC-B ●●●●● / W-W ○○



SPY 27

ON

2 ON

L 4 ON

Color Temperature	LED Configuration	Power / Lumen / Current	Beam Angle	ON	2 ON	L 4 ON
3000K CRI>90	1, 2 or 4 LED	5.8W / 787lm / 350mA	IP20 30°	24119 9328 ◊	24120 9328 ◊	24145 9328 ◊
2700K CRI>90	1, 2 or 4 LED	5.8W / 753lm / 350mA		24119 9228 ◊	24120 9228 ◊	24145 9228 ◊

◊ B-B ●●● / B-GC ●●●●● / W-W ○○

220-240V / 50-60Hz

IP20

◊ B-B ●●● / W-W ○○



220-240V / 50-60Hz

IP20






FIND ME ONLINE

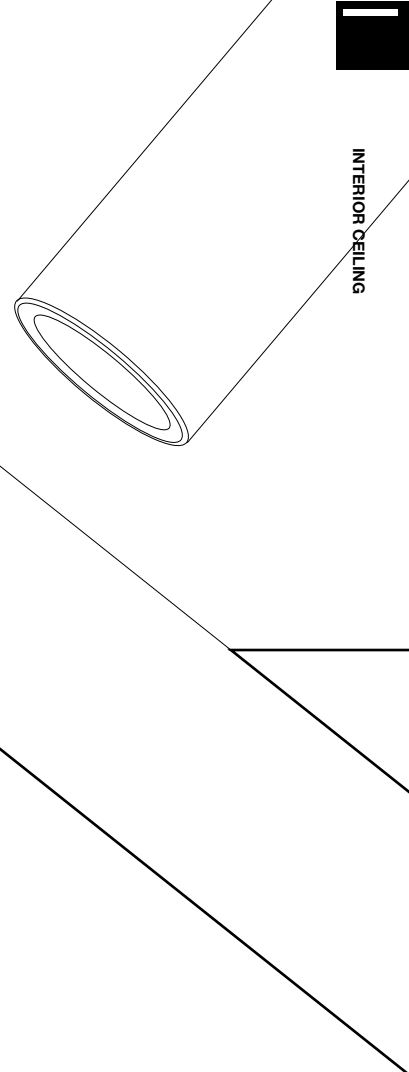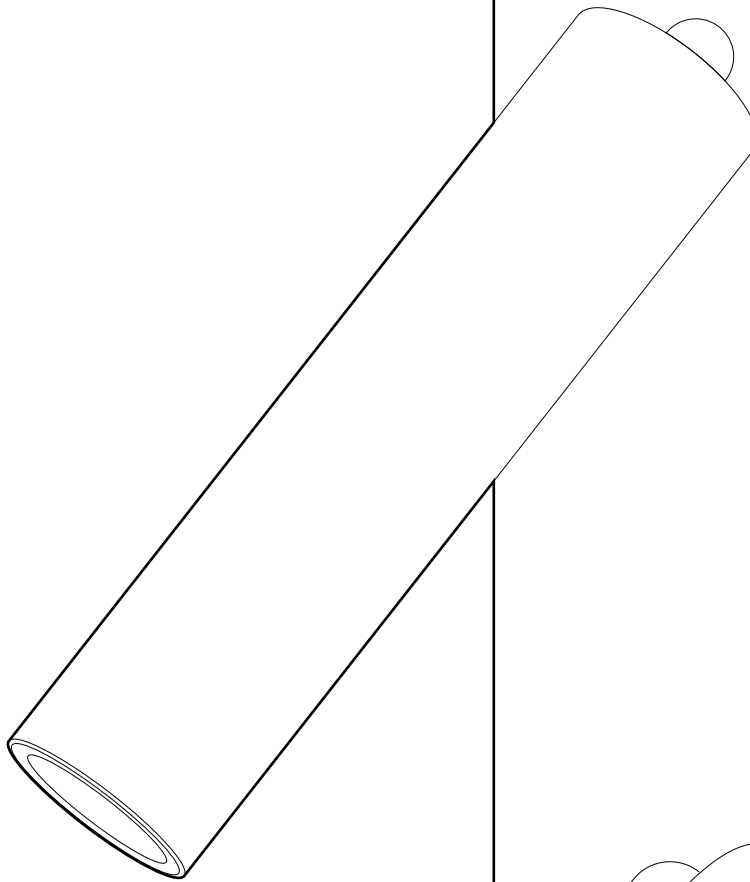

1/1



FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

SPY 27


			CLIP	L CLIP	ON	2 ON	L 4 ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*			
1-10V DIM 15	300 90 124	i min. 55	R*	R*			
DALI DIM 14	300 90 125	i min. 55	R*	R*			
HONEYCOMB / LENS / GLASS							
VISOR 27	24144 0040 B		A	A	A	A	A

* REMOTE INSTALLATION


SPY 39 PATENTED



ØKIT x 130



ØKIT x 80



98 x 80 / max.25

SPY 39

TRIMLESS IN TRIMLESS ST

3000K CRI>90	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA	IP20	20°	24123 9320 ◇	24121 9320 ◇	24142 9320 ◇
			40°	24123 9330 ◇	24121 9330 ◇	24142 9330 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	IP20	20°	24123 9220 ◇	24121 9220 ◇	24142 9220 ◇
			40°	24123 9230 ◇	24121 9230 ◇	24142 9230 ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

+ NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●

◇ W-W ○ ○

A




SPY 39 PLUG


SPY 39 PLUG

3000K CRI>90	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA	IP20	20°	24149 9320 ◇
			40°	24149 9330 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	IP20	20°	24149 9220 ◇
			40°	24149 9230 ◇


◇ B ● / BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ● / FBR ● / FG ● / GC ● / W ○




43 x 40



43 x 40



43 x 40



43 x 40

SPY 39

CLIP L CLIP ON L ON





3000K CRI>90	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA	IP20	20°	24125 9320 ◇ **	24134 9320 ◇	24127 9320 ◇ ***	24136 9320 ◇
			40°	24125 9330 ◇ **	24134 9330 ◇	24127 9330 ◇ ***	24136 9330 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	IP20	20°	24125 9220 ◇ **	24134 9220 ◇	24127 9220 ◇ ***	24136 9220 ◇
			40°	24125 9230 ◇ **	24134 9230 ◇	24127 9230 ◇ ***	24136 9230 ◇

◇ B-B ● / FBR-B ● / FG-B ● / GC-B ● / W-W ○ ○

** + NEW COLOURS: BRA-B ● / BRCU-B ● / BRG-B ● / BROB-B ● / BRAT-B ● / PB-B ●

*** + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●

◇ B ● / FBR ● / FG ● / GC ● / W ○



SPY 39





ON 1 L ON 1 ON 2 L ON 2

3000K CRI>90	1 or 2 x LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *	MAINS	20°	24129 9328 ◇	24138 9328 ◇	24130 9328 ◇	24140 9328 ◇
			40°	24129 9338 ◇	24138 9338 ◇	24130 9338 ◇	24140 9338 ◇
2700K CRI>90	1 or 2 x LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *	MAINS	20°	24129 9228 ◇	24138 9228 ◇	24130 9228 ◇	24140 9228 ◇
			40°	24129 9238 ◇	24138 9238 ◇	24130 9238 ◇	24140 9238 ◇

◇ B-B ● / W-W ○ ○

220-240V / 50-60Hz

◇ IP20

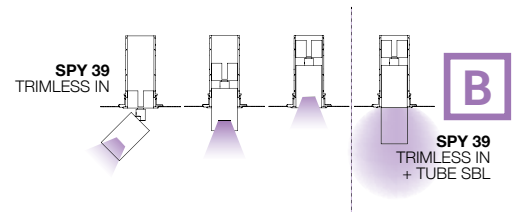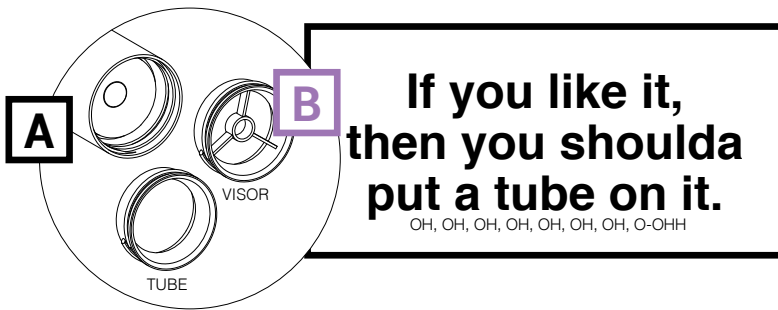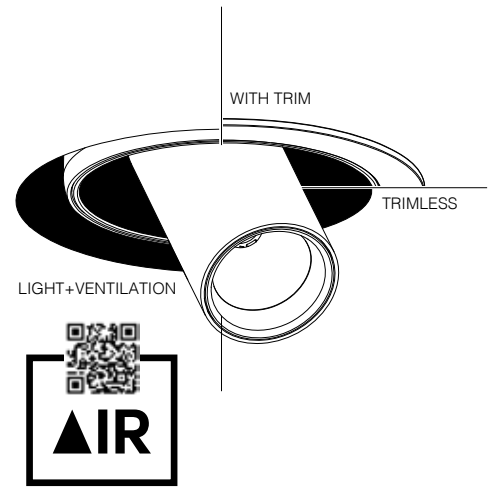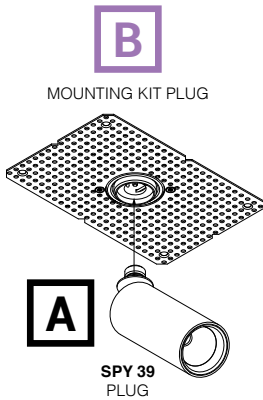

FINISH YOUR SPECIFICATION



REQUIREMENT / OPTION / ACCESSORY

			SPY 39											
			TR IN	TR	ST	PLUG	CLIP	L CLIP	ON	L ON	ON 1	L ON 1	ON 2	L ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
MAINS DIM (FE)	11	21012 0298	min. 55	R*	R*	R	R*	R*	R*	R*	R*			
1-10V DIM	15	300 90 124	min. 55	R*	R*	R	R*	R*	R*	R*	R*			
DALI DIM	14	300 90 125	min. 55	R*	R*	R	R*	R*	R*	R*	R*			
FINISH														
SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W			R	R	R	R	R		R		R		R
or SPY 39 TUBE SBL	24144 0070			R	R	R	R	R		R		R		R
SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W								R		R		R	
MOUNTING KIT TRIMLESS														
	CONCRETE / PLASTERBOARD	15212 2030			R									
	PLASTERBOARD	24144 0050		R										
	COLD STRETCHED CEILING	15212 0080			R									
	WARM STRETCHED CEILING	15212 0160			R									
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER														
PLASTERBOARD SIDE AIR	29810 0030	Light+Ventilation			R									
	29810 0070	Light			R									
	29810 0100	Ventilation			O									
	29810 0230	Light+Ventilation			R									
CONCRETE TOP AIR	29810 0070	Light			R									
	29810 0200	Ventilation			O									
or MOUNTING KIT PLUG														
CONCRETE / PLASTERBOARD	24144 0060						R							
HONEYCOMB / LENS / GLASS														
VISOR 39	24144 0030 B			A	A	A	A	A		A		A		A
INSTALLATION														
COVERSET R Ø100	204 00 100 B / W									O	O			

* REMOTE INSTALLATION






SPY 52 PATENTED



SPY 52

			TRIMLESS	TRIMLESS FOCUS	ST
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA	IP20	20°	19811 9320 ◊	19814 9320 ◊
			45°	19811 9330 ◊	19814 9330 ◊
			26-46°		19842 9300 ◊
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA	IP20	20°	19811 9220 ◊	19814 9220 ◊
			45°	19811 9230 ◊	19814 9230 ◊
			26-46°		19842 9200 ◊
	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP20	20°	19896 9020 ◊	19897 9020 ◊
			45°	19896 9030 ◊	19897 9030 ◊
			26-46°		19843 9000 ◊
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA	IP20	20°	19813 9020 ◊ *	19816 9020 ◊
			45°	19813 9030 ◊ *	19816 9030 ◊




◊ B ● / FBR ● / FG ● / GC ● / W ○
* ◊ B ● / W ○



SPY 52

			CLIP	CLIP FOCUS	CLIP WALLWASH	ON
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA	IP20	WALLWASH			19884 9300 ◊
			20°	19820 9320 ◊		19823 9320 ◊
			45°	19820 9330 ◊		19823 9330 ◊
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA	IP20	WALLWASH			19884 9200 ◊
			20°	19820 9220 ◊		19823 9220 ◊
			45°	19820 9230 ◊		19823 9230 ◊
	LED [X] 10.2W / 1038lm / 500mA 3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP20	WALLWASH			19891 9000 ◊
			20°	19898 9020 ◊		19899 9020 ◊
			45°	19898 9030 ◊		19899 9030 ◊
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA	IP20	20°	19822 9020 ◊ *		19825 9020 ◊ *
			45°	19822 9030 ◊ *		19825 9030 ◊ *

◊ B-B ●● / B-FBR ●● / B-FG ●● / GC-B ●● / W-W ○○
* ◊ B-B ●● / W-W ○○





SPY 52 ON

			1	2	3	
3000K CRI>90	1, 2 or 3 LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *	IP20	20°	19826 9328 ◊	19827 9328 ◊	19828 9328 ◊
			45°	19826 9338 ◊	19827 9338 ◊	19828 9338 ◊
			20°	19826 9228 ◊	19827 9228 ◊	19828 9228 ◊
2700K CRI>90	1, 2 or 3 LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *	IP20	45°	19826 9238 ◊	19827 9238 ◊	19828 9238 ◊
			20°	19831 9028 ◊	19832 9028 ◊	
	1, 2 3000-1800K / CRI>90 LED 6W / 623lm / 350mA	IP20	45°	19831 9038 ◊	19832 9038 ◊	



*Selection by DIP switch on internal driver

◊ B-B ●● / W-W ○○
220-240V / 50-60Hz



↓ IP20

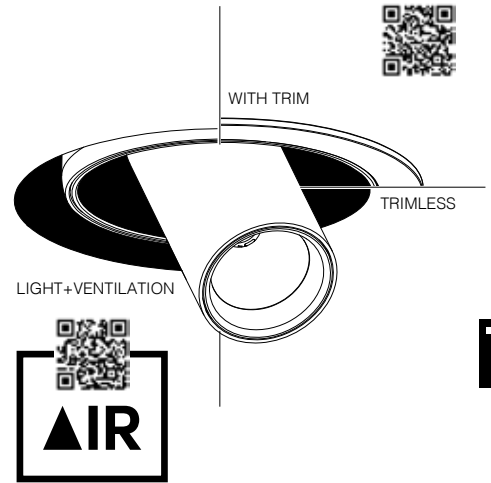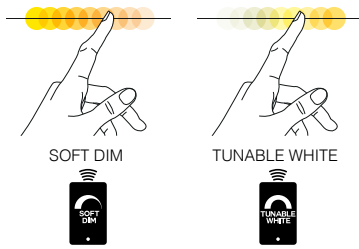

SPY 52 FOCUS

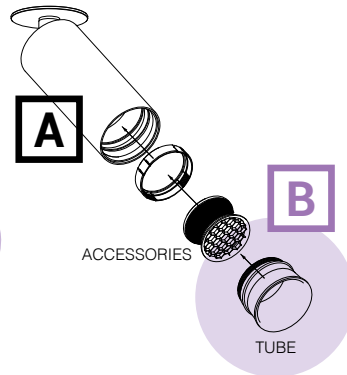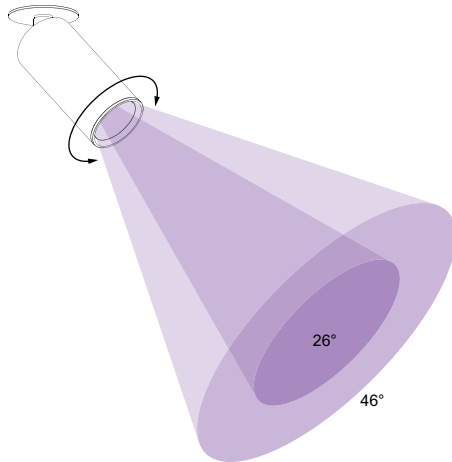

SPY 52 WALLWASH

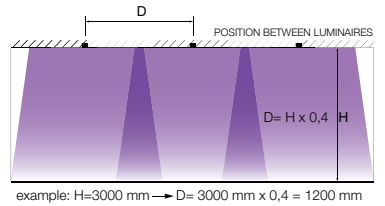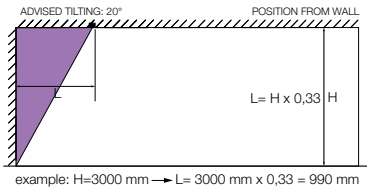

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


				SPY 52								
				TRIMLESS		ST	CLIP		ON			
				FOCUS			FOCUS	WALLWASH		1/2/3		
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R	R*	R*	R*	R*			
1-10V DIM 15	300 90 124	i min. 55	R*	R*	R	R*	R*	R*	R*			
DALI DIM 14	300 90 125	i min. 55	R*	R*	R	R*	R*	R*	R*			
FINISH												
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W		R		R	R				R	R	
MOUNTING KIT TRIMLESS												
CONCRETE / PLASTERBOARD	15212 2030		R	R								
COLD STRETCHED CEILING	15212 0080		R	R								
WARM STRETCHED CEILING	15212 0160		R	R								
MOUNTING KIT FLUSH SPY	414 90 01					O	O	O				
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTER												
PLASTERBOARD SIDE AIR	29810 0030	Light+Ventilation	R	R								
	29810 0070	Light	R	R								
	29810 0100	Ventilation	O	O								
CONCRETE TOP AIR	29810 0230	Light+Ventilation	R	R								
	29810 0070	Light	R	R								
	29810 0200	Ventilation	O	O								
HONEYCOMB / LENS / GLASS MAX 500mA												
HONEYCOMB SINGLE USE	19810 0010 B		A		A	A				A	A	
HONEYCOMB DOUBLE USE	19810 0060 B		A		A	A				A	A	
LINEAR SPREAD LENS	19810 0020		A		A	A				A	A	
SPREAD LENS	19810 0030		A		A	A				A	A	
SOFTENING LENS	19810 0040		A		A	A				A	A	
GLASS SBL	19810 0050		A		A	A				A	A	
INSTALLATION												
COVERSET R Ø100	204 00 100 B / W									O		

* REMOTE INSTALLATION




SPY 66 / 90


1/1



50 x 40



50 x 40



0-90°/350°

SPY

SPY		66 CLIP	66 CLIP WALLWASH	66 ON
3000K CRI>90	LED [R] 17.2W / 2101lm / 500mA	WALLWASH	24630 9300 ◇	
	LED [R] 17.2W / 2101lm / 500mA LED [R] 25W / 2811lm / 700mA	18°	24621 9310 ◇	24623 9310 ◇
		30°	24621 9320 ◇	24623 9320 ◇
		45°	24621 9330 ◇	24623 9330 ◇
2700K CRI>90	LED [R] 17.2W / 2009lm / 500mA	WALLWASH	24630 9200 ◇	
	LED [R] 17.2W / 2009lm / 500mA LED [R] 25W / 2688lm / 700mA	18°	24621 9210 ◇	24623 9210 ◇
		30°	24621 9220 ◇	24623 9220 ◇
		45°	24621 9230 ◇	24623 9230 ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA	18°	24622 9010 ◇	24624 9010 ◇
		30°	24622 9020 ◇	24624 9020 ◇
		45°	24622 9030 ◇	24624 9030 ◇


◇ B-B ●● / W-W ○○



A

NEW

SPY



0-90°/355°




90 ON

3000K CRI>90	23.2W / 3169lm / 700mA	1-10V	18°	19882 9311 ◇
			30°	19882 9321 ◇
			45°	19882 9331 ◇
2700K CRI>90	23.2W / 3031lm / 700mA		18°	19882 9211 ◇
			30°	19882 9221 ◇
			45°	19882 9231 ◇

◇ B ●● / W ○○

120-240V / 50-60Hz

□ IP20

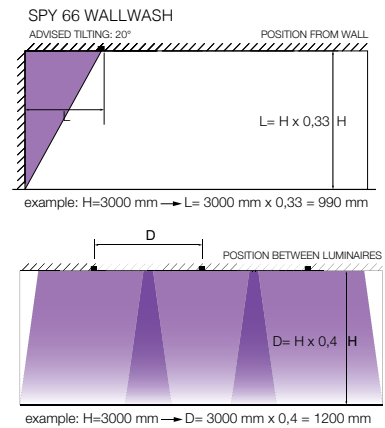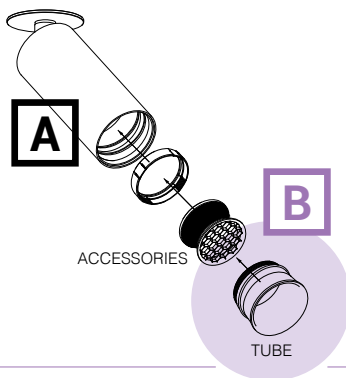

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

			REQUIREMENT / OPTION / ACCESSORY			
			CLIP	CLIP WALLWASH	ON	SPY 90 ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	i min. 55	R *	R *	R *	
1-10V DIM 15	300 90 124	i min. 55	R *	R *	R *	
DALI DIM 14	300 90 125	i min. 55	R *	R *	R *	
FINISH						
SPY 66 TUBE	24611 0100 B / FBR / FG / GC / W		R		R	
SPY 90 TUBE	19810 0170 B / FBR / FG / GC / W				R	
MOUNTING KIT TRIMLESS						
MOUNTING KIT FLUSH SPY	414 90 01		O	O		
HONEYCOMB / LENS / GLASS						
HONEYCOMB SINGLE USE	24611 0150 B		A		A	
	19810 0110 B				A	
HONEYCOMB DOUBLE USE	24611 0210 B		A		A	
	19810 0120 B				A	
LINEAR SPREAD LENS	24611 0170		A **		A **	
	19810 0140				A	
SPREAD LENS	24611 0200		A **		A **	
	19810 0160				A	
SOFTENING LENS	24611 0190		A **		A **	
	19810 0150				A	
GLASS SBL	24611 0160		A **		A **	
	19810 0130				A	

* REMOTE INSTALLATION
** MAX. 500mA




SPY




SPY S

3000K CRI>90	LED 10.4W / 1128lm / 500mA	MAINS	33°	19876 9328 ◇
2700K CRI>90	LED 10.4W / 1083lm / 500mA			19876 9228 ◇

◇ B ● / W ○
220-240V / 50-60Hz
◇ IP20



MICROSPY 39 C

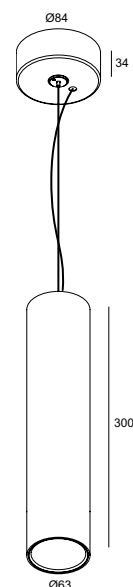

SPY C

3000K CRI>90	LED 7.1W / 812lm / 350mA	NON DIM	24°	279 773 811 931 ◇	279 776 811 932 ED8 ◇
		MAINS	33°		
2700K CRI>90	LED 7.1W / 779lm / 350mA	NON DIM	24°	279 773 811 921 ◇	279 776 811 922 ED8 ◇
		MAINS	33°		



◇ B ● / W ○

110-240V / 50-60Hz
INCL. 1 x CABLE
2 x 0.75mm² / 1.6m
□ IP20

110-240V / 50-60Hz
INCL. 1 x CABLE 2 x 0.75mm²
INCL. 1 x CABLE
SUSP. SINGLE AUTO. 1.6m
◇ IP20



FIND ME ONLINE

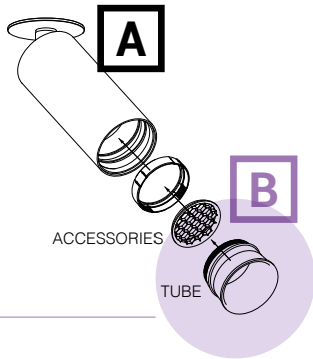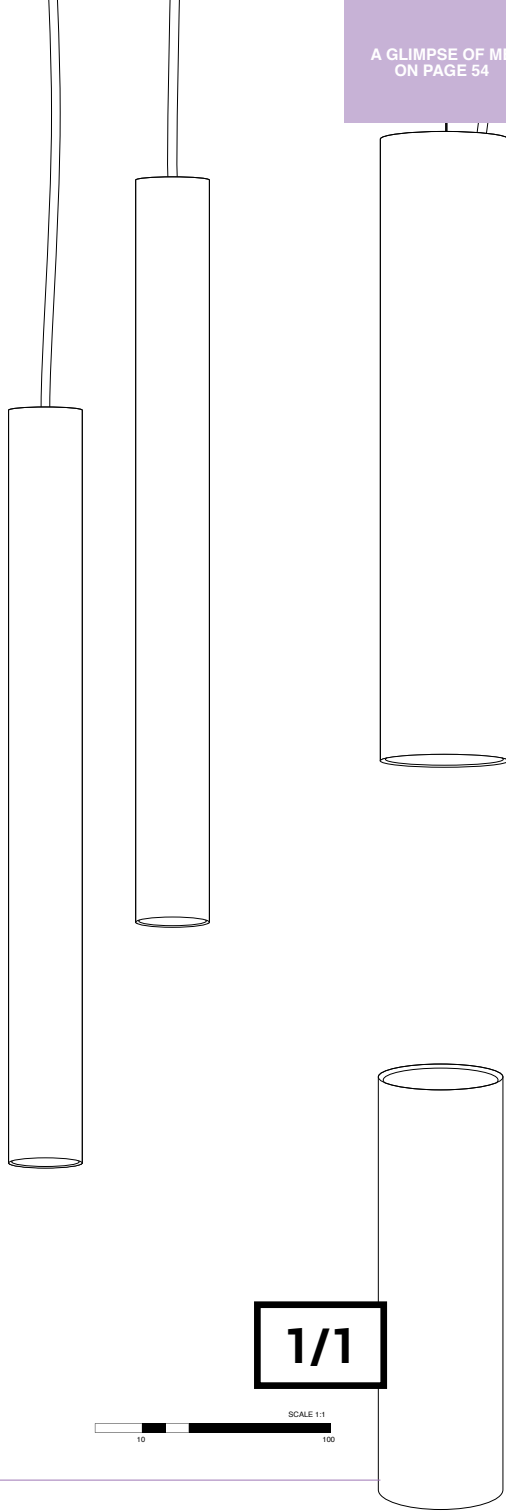

INTERIOR CEILING


FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


		MICROSPY		SPY	
		39 C	C	SPY	S
FINISH					
	SPY TUBE	414 01 00 B/FBR/FG/MMAT/SG/W		R	R
HONEYCOMB / LENS / GLASS					
	HONEYCOMB	413 03 01 B		A	A
	LINEAR SPREAD LENS	413 03 02		A	A
	SPREAD LENS	413 03 03		A	A
	SOFTENING LENS	413 03 04		A	A
	GLASS SBL	413 03 05		A	A
INSTALLATION					
	CONNECTION TRIMLESS	328 10 03	O		
	SUSPENSION + CONNECTION TRIMLESS	328 10 02		O	
	COVERSET R Ø100	204 00 100 B / W		O	




SPY FOCUS

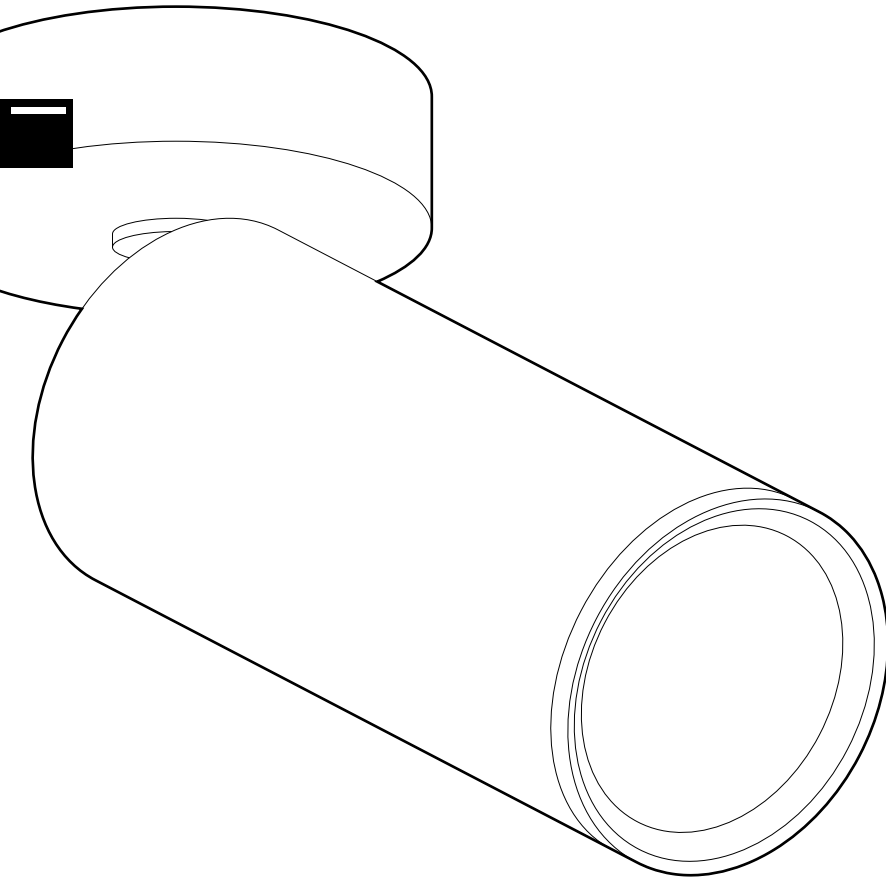


A




50 x 40



50 x 40



0-90° 355°



0-90° 355°

SPY FOCUS

CLIP LP

CLIP MP

ON LP

ON MP


3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	8-43°	19877 9300 ◊	19878 9300 ◊	
	LED [R] 11.6W / 1524lm / 350mA LED [R] 17.2W / 2101lm / 500mA		12-45°		19873 9300 ◊	19874 9300 ◊
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		8-43°	19877 9200 ◊	19878 9200 ◊	
	LED [R] 11.6W / 1458lm / 350mA LED [R] 17.2W / 2009lm / 500mA		12-45°		19873 9200 ◊	19874 9200 ◊

◊ B-B ●● / FBR-B ●●● / FG-B ●●●● / W-B ○●● / W-W ○○○



◊ B ●● / FBR ●●● / FG ●●●● / W ○



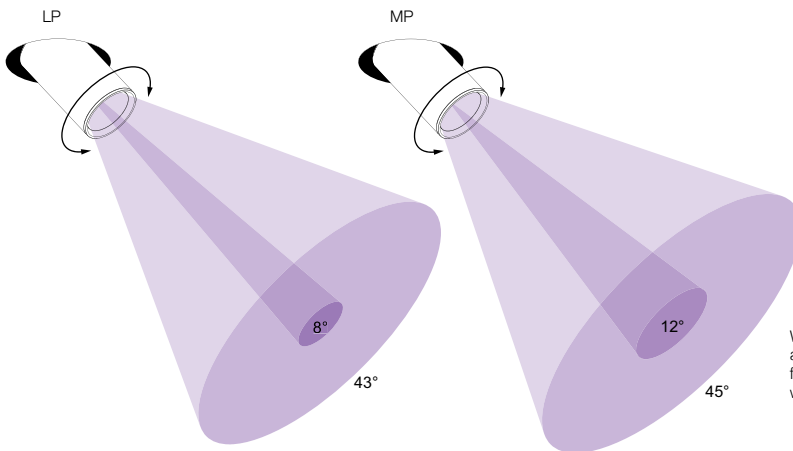

With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body. As such, the beam angle can easily be altered from spot to wide flood and everything in between.

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SPY FOCUS			
			CLIP LP	CLIP MP	ON LP	ON MP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R*	R*
1-10V DIM 15	300 90 124	i min. 55	R*	R*	R*	R*
DALI DIM 14	300 90 125	i min. 55	R*	R*	R*	R*
MOUNTING KIT TRIMLESS						
MOUNTING KIT FLUSH SPY	414 90 01		O	O		
INSTALLATION						
COVERSET R (Ø100)	204 00 100 B / W				O	O


* REMOTE INSTALLATION






RAND

Rand is a longstanding classic in the Delta Light collection, confirming the company's philosophy for timeless design. Avoiding visible screws, Rand offers you a stylish and highly flexible lighting solution for both residential and non-residential projects. As a full LED version, Rand combines ecology and esthetics, and guarantees a perfect balance between lighting quality and energy efficiency.

www.deltalight.com/rand

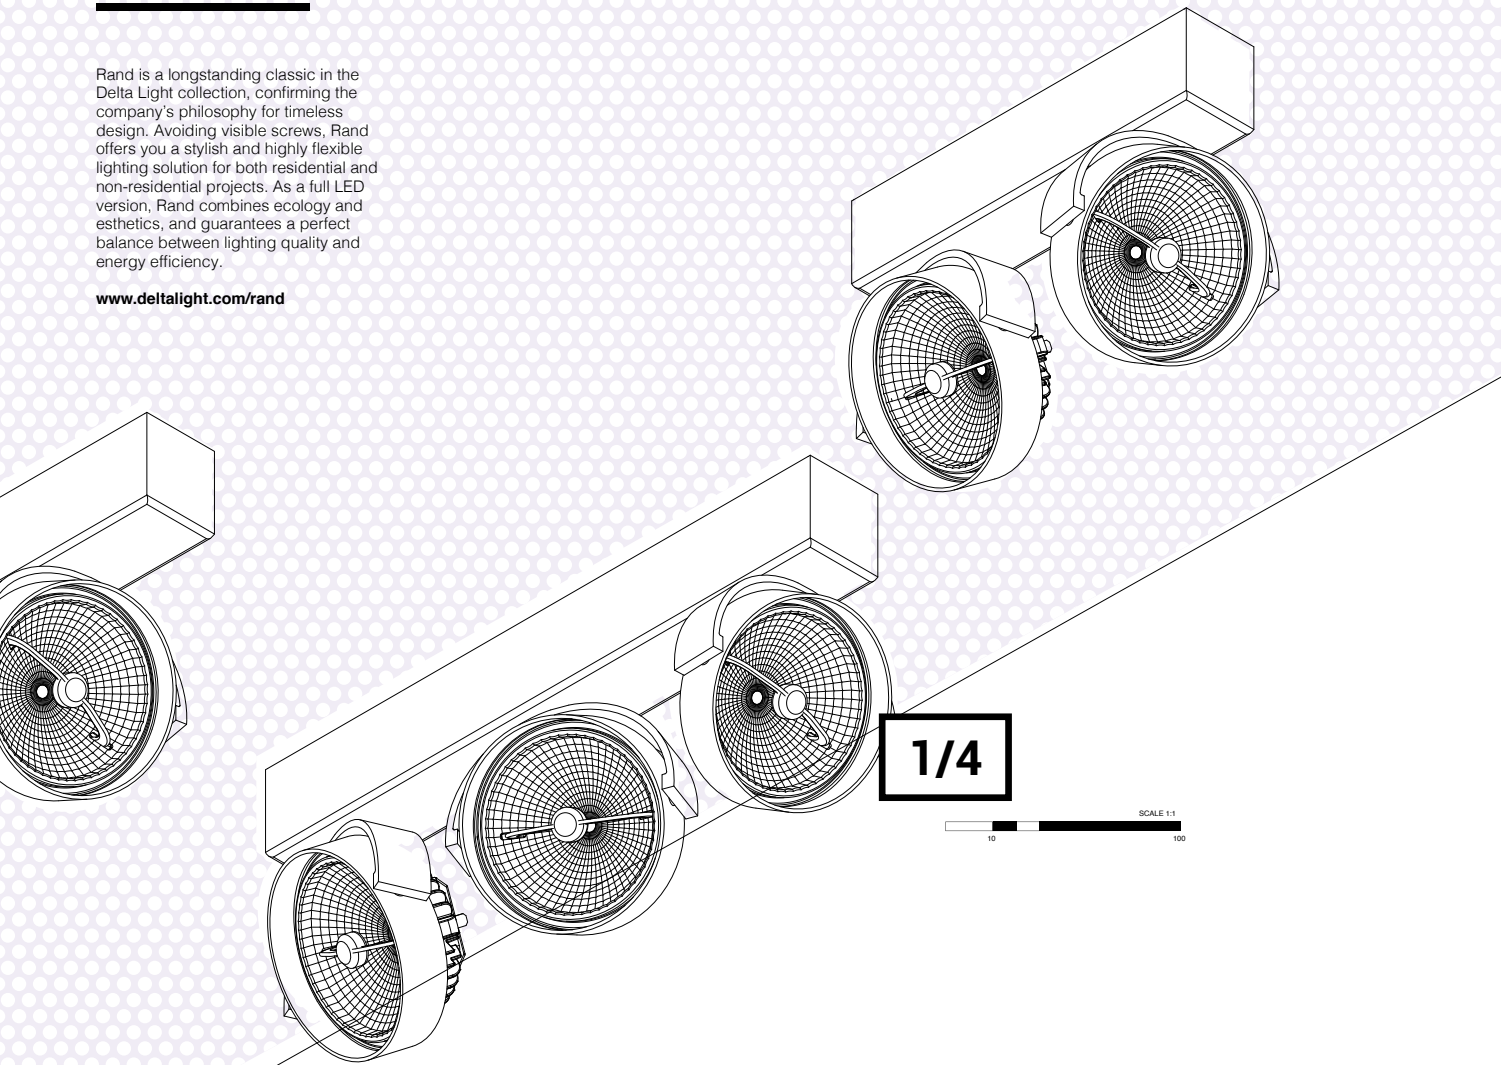

A



RAND

111 LED

211 LED

311 LED

2700K
CRI>90

1, 2 or 3
LED 111 LAMP
13W / 730lm / 350mA

MAINS 24

285 501 124 ED8 ◊

285 501 224 ED8 ◊

285 501 324 ED8 ◊

◊ A ● B ● W ○
G53 / 220-240V / 50-60Hz
□ IP20



FIND ME ONLINE





INTERIOR CEILING

SUPER-OH!


FAMILY

A series of slim black rings floating through space, finished either with integrated powerleds or the more retro-look version with classic light bulbs. The Super-Oh can also be combined with Delta Light's Wireless Control Dimming module, allowing you to manage your Super-Oh from your mobile device.


www.deltalight.com/super-oh

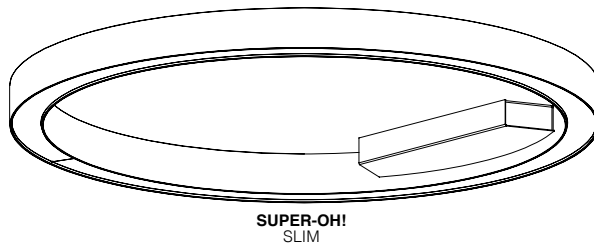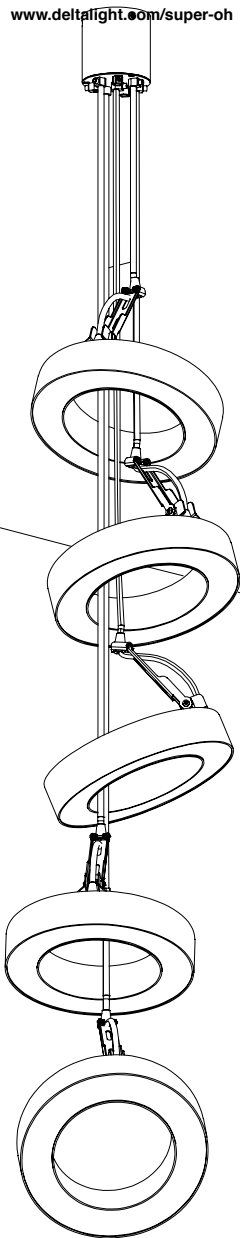


SUPER-OH!
SLIM

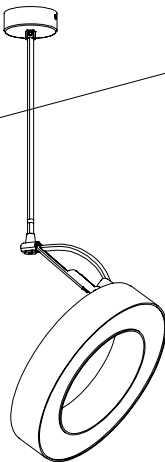

SUPER-OH!
XS 39 C

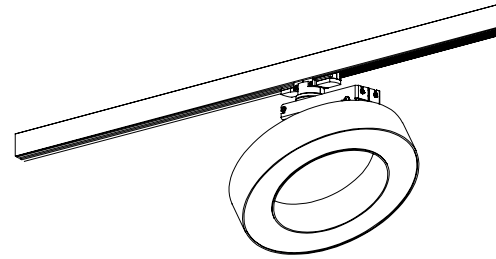

TRACK
SUPER-OH!
XS 39 PIVOT
ADM

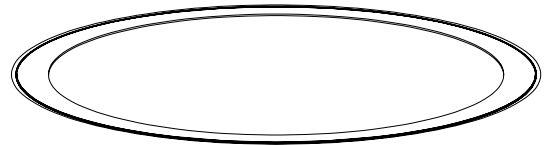


SUPER-OH!
TRIMLESS





SUPER-OH!
XS 39

1/10

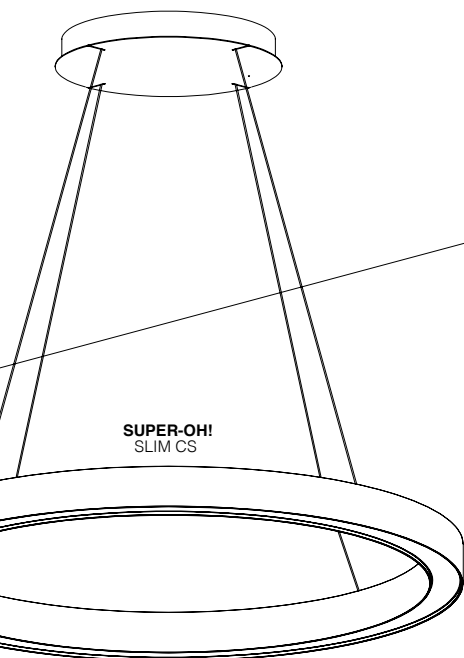

SUPER-OH!
SLIM CS



SUPER-OH!
XS 39 PIVOT

	XS	SUPER-OH!			SLIM		
	25 / 39	70	120	70	120	HP 70	HP 120
LIGHT EFFECT							
DOWN	13,5W - 1470lm 25W - 2940lm	43W - 6942lm	74W - 11728lm	30,6W - 4951lm	47,5W - 7702lm	47,5W - 7179lm	71,3W - 10769lm
DOWN-UP				DOWN 30,6W - 4951lm UP 23,8W - 3851lm	DOWN 47,5W - 7702lm UP 35,7W - 5776lm	DOWN 47,5W - 7179lm UP 23,8W - 3851lm	DOWN 71,3W - 10769lm UP 35,7W - 5776lm
OPTICS							
SANDBLASTED SBL	•	•	•	•	•	•	•
COLOUR TEMPERATURE							
3000K	•	•	•	•	•	•	•
CONTROL							
EXCL. POWER SUPPLY							
NON DIM				•	•	•	•
MAINS DIM	•						
1-10V DIM		•	•				
DALI DIM		•	•	•	•	•	•
WIRELESS DIM							
COLOUR							
WHITE ○	•			•	•	•	•
BLACK ●	•			•	•	•	•
INSTALLATION							
INTERIOR	RECESSED TRIMLESS	•	•	•			
	SURFACE MOUNTED	•			•	•	•
	SURFACE MOUNTED TILTED	•					
	SUSPENDED CABLE	•			•	•	•
	TRACK	•					

• STANDARD
• NOT FOR ALL VERSIONS

SUPER-OH!

SUPER-OH! XS


With its 25cm or 39cm diameter, the Super-Oh XS (Extra Small) can be considered to be the "little one" of the family. With only 5cm height, this perfectly curved circle holds a polycarbonate, hiding an intense clustered inner circle of the latest powered LEDs. This circle of LEDs is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect.

The Super-Oh XS is available either for direct mounting, as a suspension or with a pivot, a flexible ceiling bracket enabling the user to tilt the disc up to 45°, and rotate 360°.

super-oh! trimless


To keep a consistent design code throughout your project you can also integrate a trimless Super-Oh. The result is a fully recessed, slim aureole.

A symbol of infinity, without beginning or end, perfect, the ultimate geometric symbol seamlessly integrated into architecture.

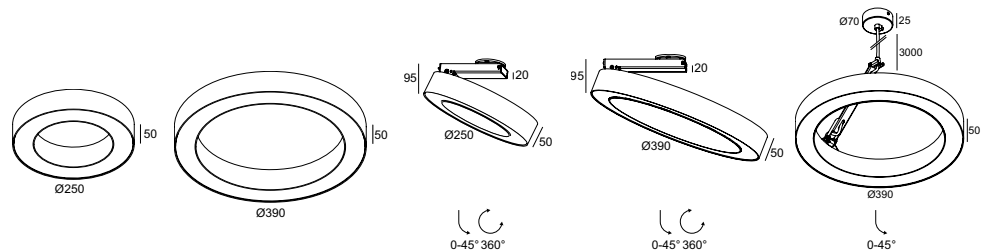


SUPER-OH! XS

		25	39	PIVOT 25	PIVOT 39	39 C
3000K CRI>80	LED 13,5W / 1470lm			308 22 02 83 ED8 ◊		
	LED 25W / 2940lm	308 21 02 83 ED8 ◊			308 22 03 83 ED8 ◊	308 241 03 83 ED8 ◊
		308 21 03 83 ED8 ◊				
		◊ B ● / W ○				
		220-240V / 50-60Hz				
		□ IP40	□ IP40	◊ IP20	◊ IP20	◊ IP20 INCL.CABLE 3x 0,75mm² / 3m




735 x 150 / max.25



1240 x 150 / max.25

SUPER-OH! TRIMLESS


		70	120
3000K CRI>90	LED 44,1W / 6476lm	1-10V 20729 9301 DALI 20729 9305	
	LED 75,4W / 10920lm	1-10V DALI	20730 9301 20730 9305
		220-240V / 0 50-60Hz	
		□ IP20	

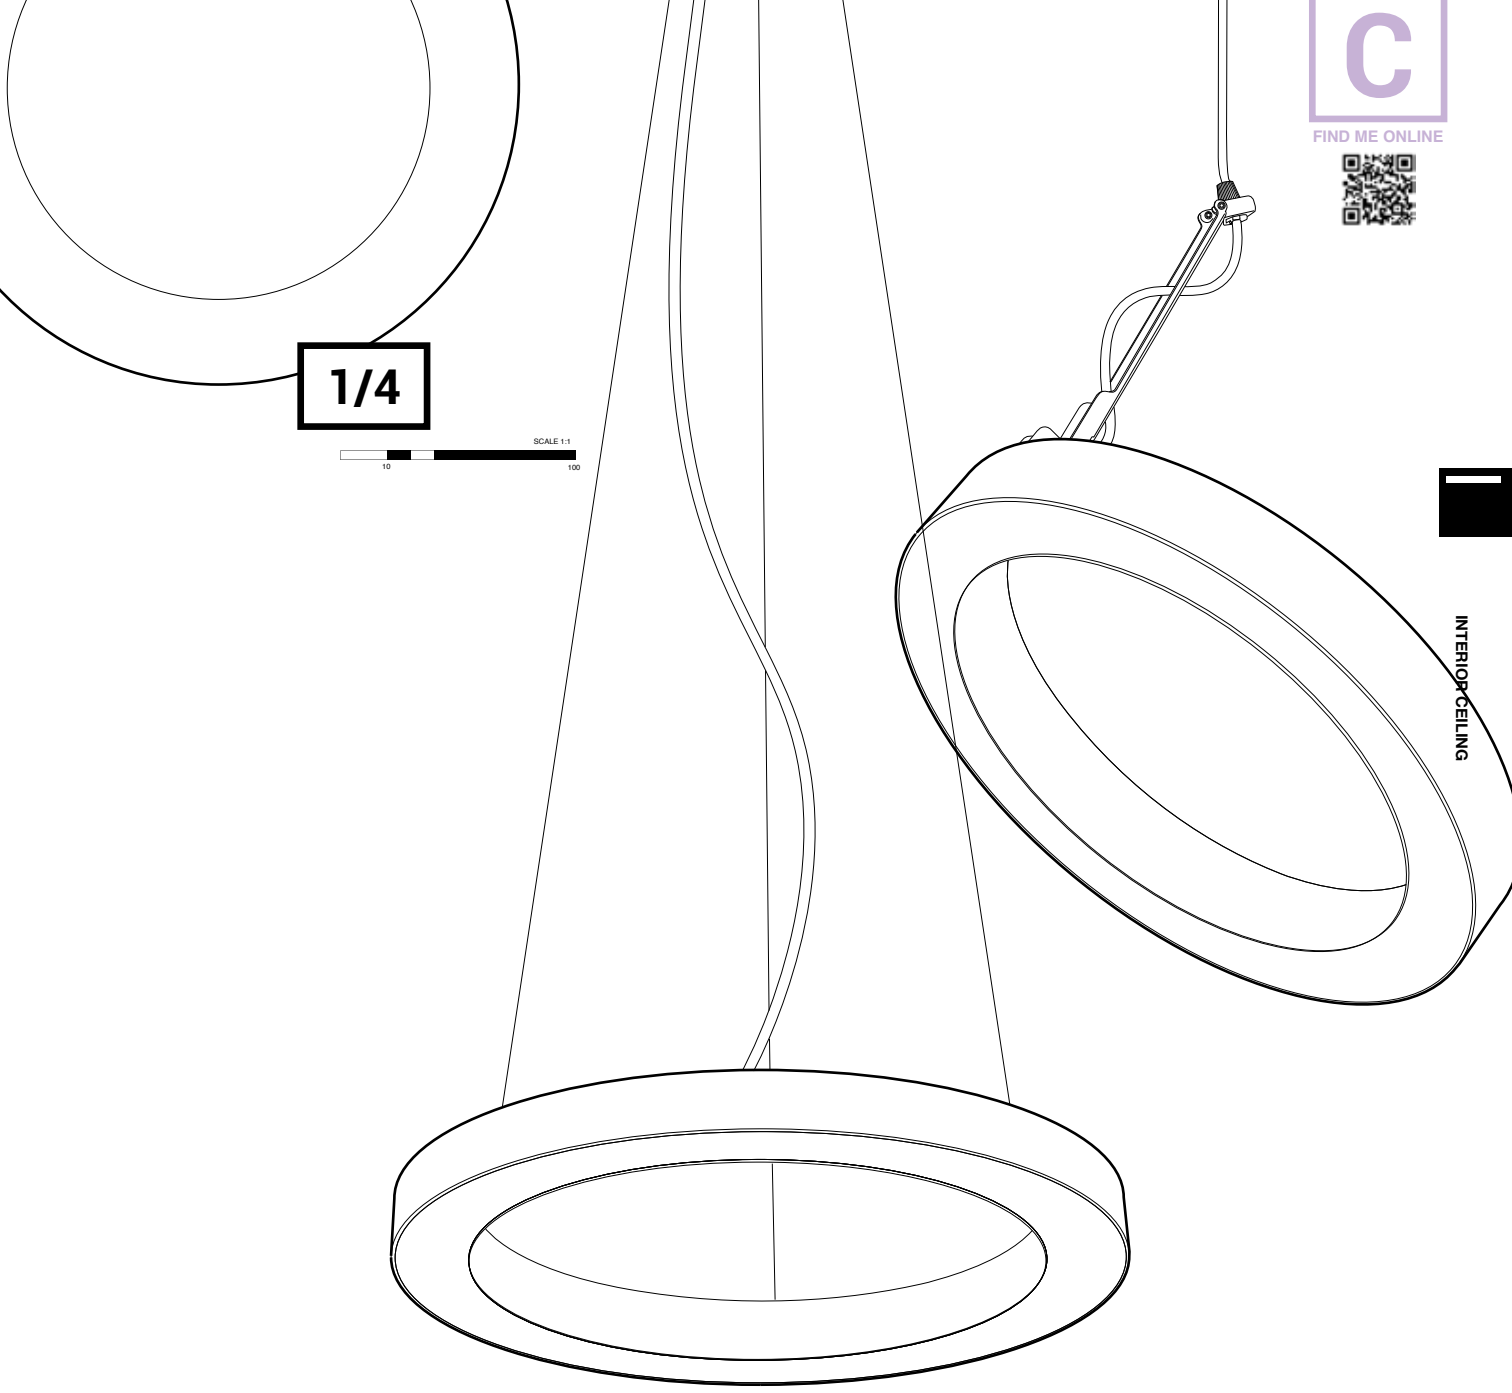

1/4



INTERIOR CEILING

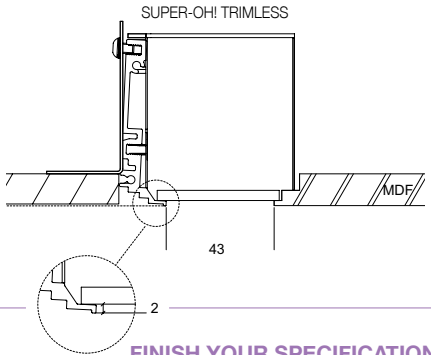

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY



TRIMLESS		SUPER-OH!			XS		
70	120	25	39	PIVOT 25	PIVOT 39	39 C	

INSTALLATION		SUPER-OH! XS CEILING BASE		308 24 99 B (max. 8 luminaires)											
															O




SUPER-OH! SLIM

Evolving from our existing Super-Oh! family, Super-Oh! Slim stands out in design and efficiency. With a width of only 44mm and a luminous efficacy up to 119lm/W, this family of halo's combines slender elegance with big performance. Super-Oh! Slim comes in 2 diameters - 800mm and 1200mm - and is available with only direct light or a combination of direct and indirect light. Two different designs allow you to either opt for clean lines in a soothing setting or either go for a design statement by choosing Super-Oh! Slim with an integrated powerbox. Apart from its functionality, the integrated powerbox acts as a rebel element, disrupting the perfect geometrical circle of light and adding a peculiar touch to the project.





SUPER-OH! SLIM

			SBL		C SBL DOWN-UP	
			Ø779	Ø1179	Ø779	Ø1179
3000K CRI>90	LED 28,6W / 4570lm	NON DIM	20737 9300 ◊			
		DALI DSI	20737 9304 ◊			
	LED 44,6W / 7085lm	NON DIM		20738 9300 ◊		
		DALI DSI		20738 9304 ◊		
LED 22,3W / 3542lm (UP) LED 28,6W / 4570lm (DOWN)	NON DIM			20739 9300 ◊		
	DALI DSI			20739 9304 ◊		
LED 33,1W / 5304lm (UP) LED 44,6W / 7085lm (DOWN)	NON DIM				20740 9300 ◊	
	DALI DSI				20740 9304 ◊	
			◊ B ● / W ○ 220-240V / 50-60Hz		◊ B ● / W ○ 220-240V / 50-60Hz	
			IP20		INCL. 4 x CABLE SUSP. SINGLE AUTO 3m INCL. 1 x CABLE 5 x 0,75mm ² CABLING 2 CIRCUITS IP20	



SUPER-OH! SLIM CS

			SBL		SBL DOWN-UP		HP SBL		HP SBL DOWN-UP	
			Ø779	Ø1179	Ø779	Ø1179	Ø779	Ø1179	Ø779	Ø1179
3000K CRI>90	LED 28,6W / 4570lm	NON DIM	20733 9300 ◊							
		DALI DSI	20733 9304 ◊							
	LED 44,6W / 7085lm	NON DIM		20734 9300 ◊						
		DALI DSI		20734 9304 ◊						
	LED 45,9W / 7008lm	NON DIM					20741 9300 ◊			
		DALI DSI					20741 9304 ◊			
	LED 68,8W / 10512lm	NON DIM						20742 9300 ◊		
		DALI DSI						20742 9304 ◊		
	LED 22,3W / 3542lm (UP) LED 28,6W / 4570lm (DOWN)	NON DIM			20735 9300 ◊					
		DALI DSI			20735 9304 ◊					
LED 22,3W / 3542lm (UP) LED 45,9W / 7008lm (DOWN)	NON DIM							20743 9300 ◊		
	DALI DSI							20743 9304 ◊		
LED 33,1W / 5304lm (UP) LED 44,6W / 7085lm (DOWN)	NON DIM				20736 9300 ◊					
	DALI DSI				20736 9304 ◊					
LED 33,1W / 5304lm (UP) LED 68,8W / 10512lm (DOWN)	NON DIM								20744 9300 ◊	
	DALI DSI								20744 9304 ◊	
			◊ B ● / W ○ 220-240V / 50-60Hz		◊ B ● / W ○ 220-240V / 50-60Hz		◊ B ● / W ○ 220-240V / 50-60Hz		◊ B ● / W ○ 220-240V / 50-60Hz	
			IP20		INCL. 4 x CABLE SUSP. SINGLE AUTO 3m POWER VIA CABLE SUSPENSION (DOWN/UP versions: CABLING 2 CIRCUITS)		IP20		IP20	

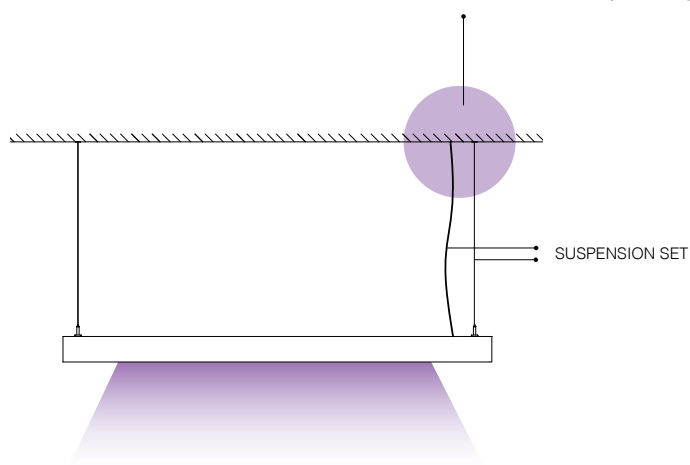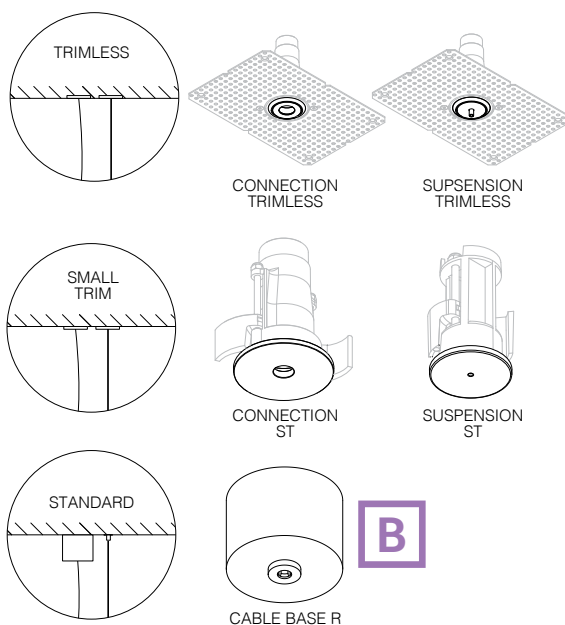

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		SUPER-OH! SLIM			
		SBL	C SBL DOWN-UP	CS SBL DOWN-UP	HP CS SBL DOWN-UP
INSTALLATION					
SUSPENSION SET 28 (NON DIM)	15225 0280 B / W	<input type="checkbox"/>			
SUSPENSION SET 29 (DALI DSI)	15225 0290 B / W	<input type="checkbox"/>			
CONNECTION ST	15225 0360 B / W	<input type="checkbox"/>	<input type="checkbox"/>		
SUSPENSION ST	15225 0340 B / W	<input type="checkbox"/>	<input type="checkbox"/>		
CONNECTION TRIMLESS O.F.A.	328 10 03	<input type="checkbox"/>	<input type="checkbox"/>		
SUSPENSION TRIMLESS O.F.A.	328 10 01	<input type="checkbox"/>	<input type="checkbox"/>		
CABLE BASE R	203 99 55 B / W	<input type="checkbox"/>	<input type="checkbox"/>		
COVERSET R Ø100	204 00 100 B / W	<input type="checkbox"/>	<input type="checkbox"/>		

SUPERLOOP

A luminaire can be more than light alone. It can be functional, it can be decorative, it can be an eye catcher. This family not only exists out of circles of light, it also brings circular and squared low voltage solutions for track lighting, so general and accent lighting can be combined within one family. In this way, Superloop allows you to choose 'functional', by mounting adjustable Spy modules on the round or square shaped base. It allows you to choose 'decorative', by mounting the light emitting circle in a horizontal way, or it allows you to choose 'eye catcher', by carelessly hanging the circle of light vertical, as a statement.

www.deltalight.com/superloop

FAMILY

SUPERLOOP
VR

SUPERLOOP
VC


SBL

SUPERLOOP
OVAL

SUPERLOOP
HC

Superloop HC with circular light has the ability to diffuse light all around.


		SUPERLOOP SBL			
		HC	HC PLUS	VC	VR
LIGHT EFFECT					
DOWN-UP		DOWN 30,6W - 4951lm UP 23,8W - 3851lm	DOWN 47,5W - 7702lm UP 35,7W - 5776lm	DOWN 47,5W - 7179lm UP 23,8W - 3851lm	DOWN 71,3W - 10769lm UP 35,7W - 5776lm
OPTICS					
SANDBLASTED SBL		•	•	•	•
SEMI PRISMATIC SPR		•			
COLOUR TEMPERATURE					
3000K		•	•	•	•
CONTROL					
EXCL. POWER SUPPLY		•	•	•	•
NON DIM					
MAINS DIM					
1-10V DIM					
DALI DIM					
WIRELESS DIM					
COLOUR					
WHITE ○		•	•	•	•
BLACK ●		•	•	•	•
FLEMISH BRONZE ●		•	•	•	•
FLEMISH GOLD ●		•	•	•	•
COLOUR ACOUSTIC PANEL					
LIGHT GREY			•		
DARK GREY			•		
INSTALLATION					
INTERIOR	SUSPENDED CABLE	•	•	•	
	SUSPENDED ROD				•

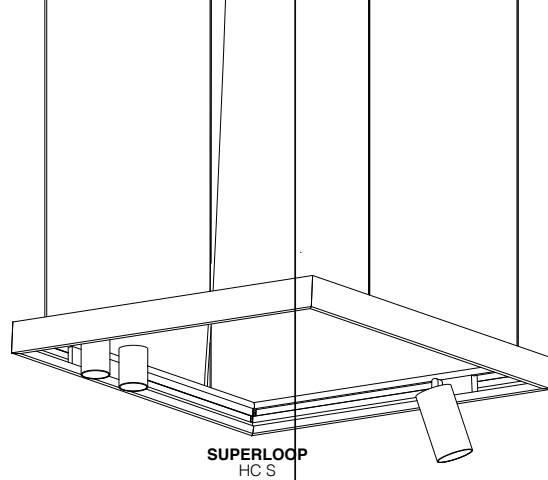

SUPERLOOP
HC S

MDL

Superloop MDL allows you to position and move light modules all around on the 48V low voltage track.

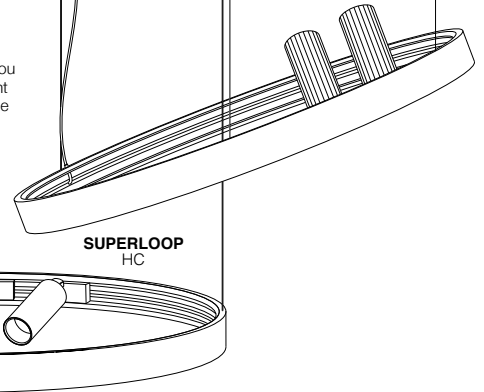

SUPERLOOP
HC

INTERIOR CEILING


SUPERLOOP MDL

	SUPERLOOP MDL		
	ROUND	SQUARE	HC PLUS ROUND
LIGHT EFFECT			
ACCENT LIGHT			
SPY 52	•	•	•
SPY 66	•	•	•
SPY FOCUS	•	•	•
VIZIR	•	•	•
HEDRA	•	•	•
GENERAL LIGHT			
FIX	•	•	
FIX DOWN-UP	•	•	
FIX DOWN-UP GT	•	•	
XY180	•	•	
CONTROL			
EXCL. POWER SUPPLY	•	•	•
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
COLOUR			
BLACK ●	•	•	•
FLEMISH BRONZE ●	•		•
FLEMISH GOLD ●	•		•
COLOUR ACOUSTIC PANEL			
LIGHT GREY			•
DARK GREY			•
INSTALLATION			
INTERIOR SUSPENDED CABLE	•		•




• STANDARD
• NOT FOR ALL VERSIONS

SUPERLOOP MDL PATENTED

Superloop is also available in a round or square shape with a Delta Light custom engineered 48V low voltage track on the inside. This allows you to position and move light modules all around, offering maximum flexibility and allowing you to meet any need of the project. The modules enable you to move from subtle functionality to very expressive or timeless elegance. The Flemish Gold and Flemish Bronze finishes or the Spot modules Vizir and Hedra offer you a way to upgrade the minimal appearance of the loop. By adding the Fix modules with down- or down-up light, combined with a clear or frosted glass, you can transform your Superloop into a modern chandelier. Looking for a more expressive and unique statement? Just plug and play with the ledtubes of the XY180 collection.

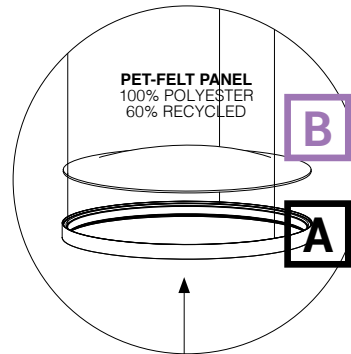

PLUS
Add a personal touch, improve acoustics or make a decorative element out of the minimalistic circle



SUPERLOOP MDL HC		ROUND	PLUS	SQUARE
70	Ø695	418 481 07 ◊		
			20564 0000 ◊	
90	Ø924	418 481 09 ◊		
			20565 0000 ◊	
120	Ø1191	418 481 12 ◊		
			20566 0000 ◊	
170	Ø1688	418 481 17 ◊		
200	Ø2000 2 SEGMENTS	20555 0000 ◊		
250	Ø2500 3 SEGMENTS	20556 0000 ◊		
300	Ø3000 3 SEGMENTS	20557 0000 ◊		
350	Ø3500 4 SEGMENTS	20558 0000 ◊		
400	Ø4000 4 SEGMENTS	20559 0000 ◊		
500	Ø5000 4 SEGMENTS	20560 0000 ◊		
S 106	600 x 600			418 482 106 ◊
S 109	900 x 900			418 482 109 ◊
S 211	250 x 1100			418 482 211 ◊
S217	250 x 1700			418 482 217 ◊

◊ B ● / FBR ● / FG ●
48V

Ø695 - Ø1688:
INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 2 x 0,75mm²

Ø2000 - Ø5000:
INCL. 2 x CABLE SUSP. SINGLE AUTO. 3m / SEGMENT
INCL. 1 x CABLE 2 x 0,75mm² / SEGMENT

◊ B ●
48V


INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 2 x 0,75mm²





B


GENERAL

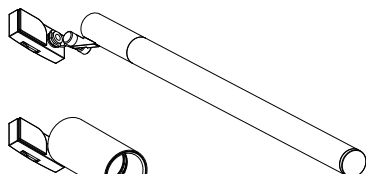

ACCENT




DOWN



POWERBOX

MDL

SMART
48

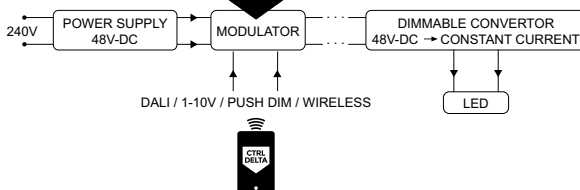

The carbon conductors inside the profile not only suffice for 48V power, Superloop MDL can also be dimmed with Smart 48.

It collects the power from the 48V power supply and combines it with a DALI, 1-10V or Push Dim input to send to the dimmable 48V converter in the luminaire. In this way dimming can be done by only using 2 wires - for both power and dimming - or it can even be done wireless when choosing for the Wireless Dimmable Modulator, based on CTRL DELTA.

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SUPERLOOP MDL HC

LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER

				SUPERLOOP MDL HC																	
				ROUND								PLUS			SQUARE						
				70	90	120	170	200	250	300	350	400	500	70	90	120	S 106	S 109	S 211	S 217	
NON DIM	48V / 100W	21012 0230	298 x 30 x 17	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 100W / DIN	300 89 48 100	100 x 55 x 90	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 200W	21012 0240	392 x 30 x 22	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 240W / DIN	300 89 48 240	114 x 63 x 125	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

or POWERBOX

NON DIM	48V-DC / 50W	418 48 050 B	Ø80 x 200	R	R	R	R	R	R	R	R	R	R	R	R	R					
NON DIM	48V-DC / 100W	418 48 100 B	Ø80 x 300	R	R	R	R	R	R	R	R	R	R	R	R	R					
NON DIM	48V-DC / 60W	300 48 060 B	480 x 58 x 40														R	R	R	R	

FINISH

LUMINAIRES	NEXT PAGE	70	90	120	170	200	250	300	350	400	500	70	90	120	S 106	S 109	S 211	S 217				
PANEL 70 LIGHT GREY	20548 0030											R										
PANEL 70 DARK GREY	20548 0040											R										
PANEL 90 LIGHT GREY	20548 0050												R									
PANEL 90 DARK GREY	20548 0060												R									
PANEL 120 LIGHT GREY	20548 0070													R								
PANEL 120 DARK GREY	20548 0080													R								


PANELS IN OTHER MATERIAL ON REQUEST

INSTALLATION

CONNECTION ST	15225 0360 B / W	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SUSPENSION ST	15225 0340 B / W	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O						
COVERSET R Ø100	204 00 100 B / W	O	O	O	O	O	O	O	O	O	O	O	O	O	O							
CABLE BASE S	203 99 56 ANO / B / W																O	O	O	O		
SMART 48 MODULATOR DIM9	300 90 011	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SMART 48 MODULATOR WIRELESS DIM	300 90 012	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O





B

SUPERLOOP MDL PATENTED

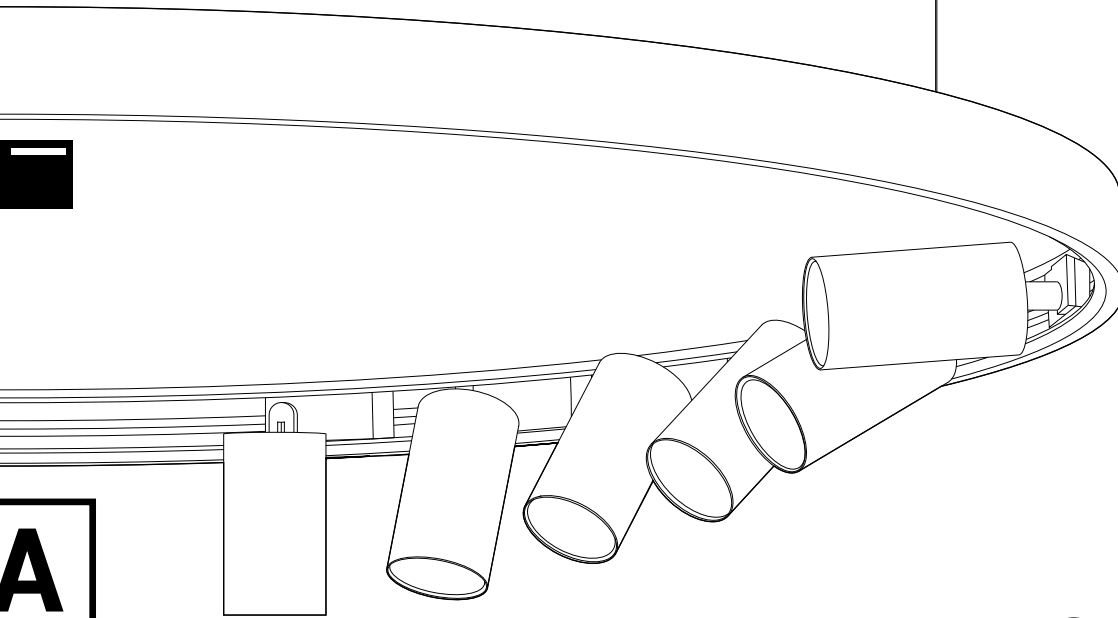

A

GLASS
CLEAR OR FROSTED






A

SUPERLOOP FIX *

40 MDL DOWN 45 MDL DOWN 40 DOWN-UP MDL 40 DOWN-UP GT MDL

				40 MDL DOWN	45 MDL DOWN	40 DOWN-UP MDL	40 DOWN-UP GT MDL
3000K CRI>80	4.1W / 420lm / 48V-DC	IP20	20°	418 161 832 MDL ◊			
	2.1W / 227lm (UP) / 48V-DC 4.1W / 420lm (DOWN) / 48V-DC				418 162 832 MDL ◊	418 163 832 MDL ◊	
3000K CRI>90	8.1W / 877lm / 48V-DC		40°		418 263 933 MDL ◊		
2700K CRI>80	4.1W / 420lm / 48V-DC		20°	418 161 822 MDL ◊			
	2.1W / 213lm (UP) / 48V-DC 4.1W / 420lm (DOWN) / 48V-DC				418 162 822 MDL ◊	418 163 822 MDL ◊	
2700K CRI>90	8.1W / 877lm / 48V-DC		40°		418 263 923 MDL ◊		

* NOT FOR SUPERLOOP PLUS

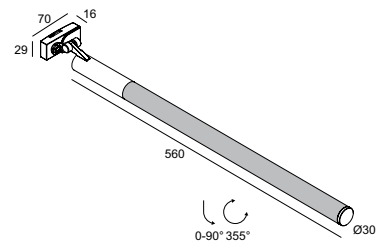



SUPERLOOP

VIZIR MDL HEDRA MDL XY180 MDL*

				VIZIR MDL	HEDRA MDL	XY180 MDL*
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	20543 9310 ◊	20514 9310 ◊	
	LED 7.1W / 812lm / 48V-DC		33°	418 367 811 932 MDL ◊	418 368 811 932 MDL ◊	
	LED 8.9W / 1050lm / 48V-DC		-			418 561 93 MDL ◊
2700K CRI>90	LED 5.7W / 519lm / 48V-DC		8°	20543 9210 ◊	20514 9210 ◊	
	LED 7.1W / 779lm / 48V-DC		33°	418 367 811 922 MDL ◊	418 368 811 922 MDL ◊	

* NOT FOR SUPERLOOP PLUS



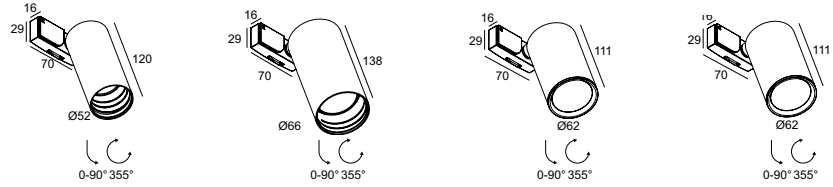

SUPERLOOP SPY

52 MDL

66 MDL

FOCUS LP MDL

FOCUS MP MDL


Color Temperature / CRI	LED Power / Lumens / Voltage	Beam Angle	Model			
			52 MDL	66 MDL	FOCUS LP MDL	FOCUS MP MDL
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	20°	20567 9320 ◇			
		45°	20567 9330 ◇			
	LED 17.2W / 2101lm / 48V-DC	8-43°			20547 9300 ◇	
		18°		20569 9310 ◇		
		30°		20569 9320 ◇		
		45°		20569 9330 ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	20°	20567 9220 ◇			
		45°	20567 9230 ◇			
	LED 17.2W / 2009lm / 48V-DC	8-43°			20547 9200 ◇	
		18°		20569 9210 ◇		
		30°		20569 9220 ◇		
		45°		20569 9230 ◇		
3000-1800K / CRI>90 SOFT DIM LED 10.2W / 1038lm / 48V-DC	20°	20583 9020 ◇				
	45°	20583 9030 ◇				

◇ B ● / FBR ● / FG ● / GC ●
○ / W ○

◇ B ● / W ○

◇ B ● / FBR ● / FG ●

◇ B ● / FBR ● / FG ●



INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	REQUIREMENT / OPTION / ACCESSORY											
	SUPERLOOP SPY		SUPERLOOP			SUPERLOOP FIX MDL						
	52	66	FOCUS LP	FOCUS MP	VIZIR	HEDRA	XY180	40	45	40	40	
										D/U	D/U GT	
FINISH												
SPY 52 TUBE	19810 0100 B/FBR/FG/GC/W	R										
SPY 66 TUBE	24611 0100 B/FBR/FG/GC/W		R									
MIDISPY TUBE	414 03 00 B/FBR/FG/MMAT/SG/W								R			
VIZIR TUBE	473 01 00 B/FBR/FG/W				R	R						
HONEYCOMB / LENS / GLASS												
HONEYCOMB SINGLE USE	473 03 01 B				A	A						
	19810 0010 B	A										
	24611 0150 B		A									
HONEYCOMB DOUBLE USE	19810 0060 B	A										
	24611 0210 B		A									
LINEAR SPREAD LENS	19810 0020	A										
	24611 0170		A									
SPREAD LENS	19810 0030	A										
	24611 0200		A									
SOFTENING LENS	473 03 04				A	A						
	19810 0040	A										
	24611 0190		A									
GLASS SBL	19810 0050	A										
	24611 0160		A									
INSTALLATION												
FIX 40 GLASS CLEAR	418 163 01											R
or FIX 40 GLASS FROSTED	418 163 02											R


B

SUPERLOOP SBL PATENTED


Superloop HC with circular light has the ability to diffuse light all around. It represents a universal symbol with extensive options, a perfect circle of light, rolled out of 1 aluminium profile and seamlessly welded together. The specially designed current controlled LEDflex inside Superloop SBL allows it to be dimmed in various ways. Diameters up to 1700mm and finishes in different colours let you create the setting you want.

Similar to Superloop SBL HC, but more dramatic in expression, Superloop SBL VC grants the opportunity to use light in a different way. The vertical circle of light draws the attention and stimulates creativity.

For a more bold and expressive application you can opt for the Superloop VR, mounting the circle of light with a steel rod. Sculptural in presence, resonating with symbolism and respecting pure minimalism, the Superloop VR offers a very airy and remarkable element to your interior concept. Either as a single version or in a sequence to create striking vertical effects.

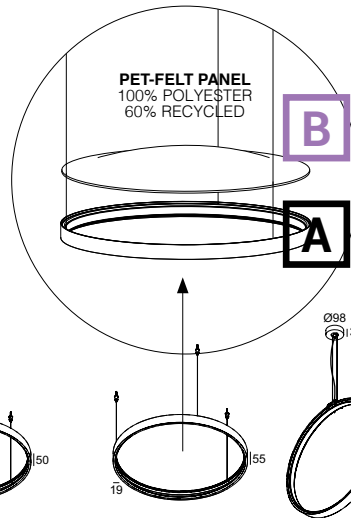

PLUS
Add a personal touch, improve acoustics or make a decorative element out of the minimalistic circle

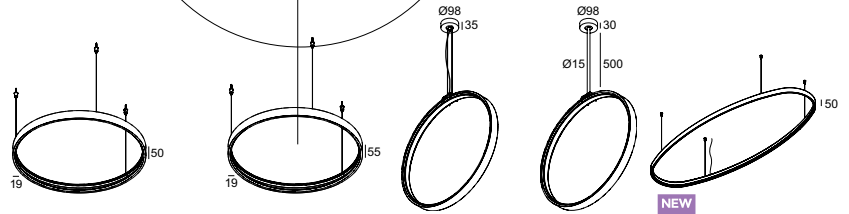

SUPERLOOP

				HC SBL	HC SPR	HC PLUS	VC SBL	VR SBL	OVAL SBL	
LED FLEX 3000K CRI>90	21,2W / 2916lm / 500mA 29,2W / 3870lm / 700mA	70	Ø695	321 107 93 ◊	321 207 93 ◊	20561 9300 ◊	321 507 93 ◊	321 407 93 ◊		
				321 109 93 ◊	321 209 93 ◊	20562 9300 ◊	321 509 93 ◊	321 409 93 ◊		
				321 112 93 ◊	321 212 93 ◊	20563 9300 ◊	321 512 93 ◊	321 412 93 ◊		
	51,7W / 7128lm / 1200mA 71,4W / 9460lm / 1700mA	170	Ø1688	321 117 93 ◊	321 217 93 ◊					
				2 x 43,2W / 4200lm / 24V-DC	200	Ø2000 2 SEGMENTS	20549 9300 ◊			
				3 x 37,4W / 3640lm / 24V-DC	250	Ø2500 3 SEGMENTS	20550 9300 ◊			
				3 x 43,2W / 4200lm / 24V-DC	300	Ø3000 3 SEGMENTS	20551 9300 ◊			
				4 x 38,9W / 3780lm / 24V-DC	350	Ø3500 4 SEGMENTS	20552 9300 ◊			
				4 x 43,2W / 4200lm / 24V-DC	400	Ø4000 4 SEGMENTS	20553 9300 ◊			
				5 x 43,2W / 4200lm / 24V-DC	500	Ø5000 4 SEGMENTS	20554 9300 ◊			
28,8W / 3888lm / 700mA 37,8W / 5160lm / 900mA	OVAL S	515 x 1167						20570 9300 ◊		
36,3W / 5022lm / 900mA 49,5W / 6665lm / 1200mA	OVAL M	750 x 1925							20571 9300 ◊	

◊ B ● / FBR ● / FG ● / W ○

Ø695 - Ø1688:
INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 2 x 0,75mm²

VC:
INCL. 2 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 2 x 0,75mm²

INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 2 x 0,75mm²

Ø2000 - Ø5000:
INCL. 2 x CABLE SUSP. SINGLE AUTO. 3m / SEGMENT
INCL. 1 x CABLE 2 x 0,75mm² / SEGMENT

VR:
INCL. 1 x ROD SUSPENSION 0,65m
INCL. 1 x CABLE 2 x 0,75mm²


◊ IP20

◊ IP20

◊ IP20

SUPERLOOP SLIM




Superloop Slim further explores the boundaries of circular general light, as it offers three different ways of diffusing light around a room. Within its small size, Superloop Slim hides away a specially designed current controlled LEDflex, covered by a sandblasted diffuser to evenly spread the light. The diffuser is either installed on the inside of the circle, on the outside or facing downwards, providing various looks and displaying a different take on a circle of light. Opt for simple settings with one single pendant or go wild and combine different sizes, colours and versions to generate an eye-catching play of light.

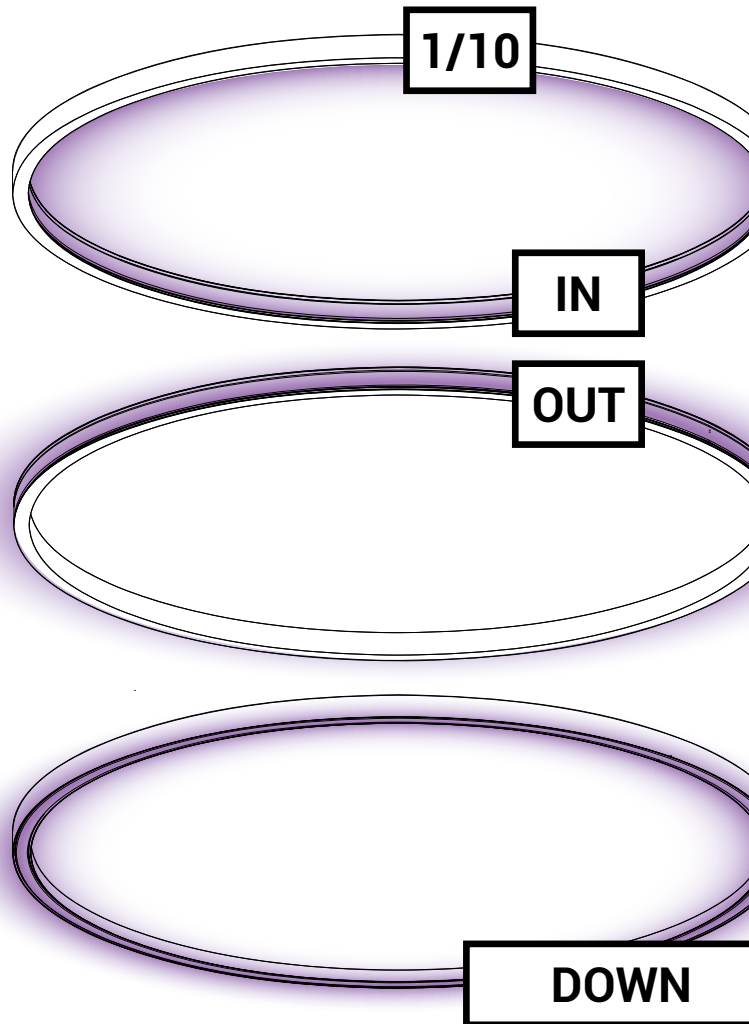

A

NEW

SUPERLOOP SLIM



				IN	OUT	DOWN
LED FLEX	21,2W / 2916lm / 500mA	70	Ø694	20572 9300 ◊	20576 9300 ◊	20580 9300 ◊
	29,2W / 3870lm / 700mA	90	Ø923	20573 9300 ◊	20577 9300 ◊	
3000K CRI>90	36,4W / 5022lm / 900mA	120	Ø1191	20574 9300 ◊	20578 9300 ◊	20582 9300 ◊
	51,7W / 7128lm / 1200mA	170	Ø1688	20575 9300 ◊	20579 9300 ◊	

◊ B ● / FBR ● / FG ● / GC ● / W ○
 INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
 INCL.1 x CABLE 2 x 0,75mm²


⏏ IP20



FIND ME ONLINE



INTERIOR CEILING



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				SUPERLOOP SLIM									
				IN				OUT				DOWN	
				70	90	120	170	70	90	120	170	70	120
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER													
1-10V DIM	500mA-DC / 27W	300 90 127	98 x 43 x 30	R				R				R	
	700mA-DC / 36W	300 90 128	98 x 43 x 30	R	R			R	R			R	
	1200mA-DC / 70W	300 90 132	240 x 59 x 40			R	R			R	R		R
	1700mA-DC / 99W	300 90 133	240 x 59 x 40				R				R		
DALI DIM	700mA-DC / 38W	300 90 131	147 x 44 x 30	R	R			R	R			R	
	900mA-DC / 60W	300 90 129	124 x 79 x 22		R	R			R	R			R
	1200mA-DC / 60W	300 90 130	220 x 85 x 31			R	R			R	R		R
or POWERBOX													
1-10V DIM	500mA-DC	321 55 205 ED1 B/W	Ø80 x 200	R				R				R	
	700mA-DC	321 55 207 ED1 B/W	Ø80 x 200	R	R			R	R			R	
DALI DIM	700mA-DC	321 55 307 ED5 B/W	Ø80 x 300	R	R			R	R			R	
1-10V DIM	1200mA-DC	321 55 312 ED1 B/W	Ø80 x 300			R	R			R	R		R
	1700mA-DC	321 55 317 ED1 B/W	Ø80 x 300				R				R		
DALI DIM	900mA-DC	20548 0015 B/W	Ø90 x 300	R	R			R	R				R
	1200mA-DC	20548 0025 B/W	Ø90 x 300			R	R			R	R		R
INSTALLATION													
CONNECTION ST		15225 0360 B / W		O	O	O	O	O	O	O	O	O	O
SUSPENSION ST		15225 0340 B / W		O	O	O	O	O	O	O	O	O	O
CABLE BASE R		203 99 55 ANO / B / W		O	O	O	O	O	O	O	O	O	O
COVERSET R Ø100		204 00 100 B / W		O	O	O	O	O	O	O	O	O	O





SLM F

Make it your own. Our SLM26 F builds on the endless flexibility of our magnetic profiles, which allow a simple toolfree (re)positioning of the lights onto your ceiling. Now also available as stand-alone solution, you can easily personalize the room to your preferences. Opt for simple accent lighting or combine with indirect light for the more cosy settings, your choice!

www.deltalight.com/shiftline



STANDALONE




SLM26L F MDL


SLM26H F MDL WD

	FLOORLAMP + LUMINAIRES (next page)	IP20	NON DIM	29321 0010 ◊	
			WIRELESS	29322 002W ◊	
3000K CRI>90	FLOORLAMP + LED BACKLIGHT	IP20	WIRELESS		29323 930W ◊
2700K CRI>90	27,7W / 3024lm / 48V-DC + LUMINAIRES (next page)		WIRELESS		29323 920W ◊

◊ B ●
100-240V / 50-60Hz
INCL.ADAPTER 48V / 60W
INCL.CORD 2m + PLUG CEE 7/7
INCL.WIRELESS DIMMABLE CONTROL (for WIRELESS versions)



0-85° 360°



0-85° 360°

SPY 39


				1 M26H	1 M26L	2 M26H	2 M26L
3000K CRI>90	1 or 2x LED 8,6W / 1089lm / 48V-DC	IP20	20°	23315 9320 ◊	23258 9320 ◊	23317 9320 ◊	23260 9320 ◊
			40°	23315 9330 ◊	23258 9330 ◊	23317 9330 ◊	23260 9330 ◊
2700K CRI>90	1 or 2x LED 8,6W / 1041lm / 48V-DC	IP20	20°	23315 9220 ◊	23258 9220 ◊	23317 9220 ◊	23260 9220 ◊
			40°	23315 9230 ◊	23258 9230 ◊	23317 9230 ◊	23260 9230 ◊

◊ B ● / FBR ● / FG ● / GC ● / W ○


+ NEW COLOURS:

BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●

◊ B ● / W ○



0-90° 355°



0-90° 355°

ODRON

				1 M26H	1 M26L	2 M26H	2 M26L
3000K CRI>90	1 or 2x LED 8,6W / 1018lm / 48V-DC	IP20	28 & 41°*	26216 9300 ◊	26220 9300 ◊	26218 9300 ◊	26222 9300 ◊
2700K CRI>90	1 or 2x LED 8,6W / 974lm / 48V-DC				26216 9200 ◊	26220 9200 ◊	26218 9200 ◊

* INCL. 2 REFLECTORS

◊ B ● / W ○





ACCENT LIGHT



INDIRECT LIGHT

**A personalized
floor lamp**



INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SPY 39		ODRON	
			1	2	1	2
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R*	R*	R*	R*
FINISH						
SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W		R	2 x R		
VISOR 39	216 12 02		A	2 x A		
ODRON COVER	26210 0020 GC				A	2 x A


* REMOTE INSTALLATION

B

LASS-OH!

Lass-Oh! glides through the room as a snake sliding through the greensward, showing off its slim cylindrical contour in combination with the miniature LED clusters hidden inside its body. The variety in shape - straight lines, circles or curved squares and rectangles - in combination with the optional shades make of Lass-Oh! a very decorative lighting solution. Nevertheless, Lass-Oh! can easily be hung in every residential, retail or office project thanks to its low-glare LED dots that are hidden away into the profile.

www.deltalight.com/lass-oh



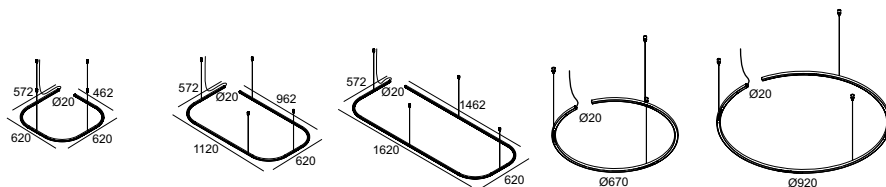


LASS-OH!

		6060	60110	60160	NEW R65-3	NEW R90-4
3000K CRI>90	3 x LED 6,1W / 683lm / 350mA				24821 9320 ◇	
	4 x LED 6,1W / 683lm / 350mA	24811 9320 ◇	24812 9320 ◇			24822 9320 ◇
	6 x LED 6,1W / 683lm / 350mA			24813 9320 ◇		
2700K CRI>90	3 x LED 6,1W / 665lm / 350mA				24821 9220 ◇	
	4 x LED 6,1W / 665lm / 350mA	24811 9220 ◇	24812 9220 ◇			24822 9220 ◇
	6 x LED 6,1W / 665lm / 350mA			24813 9220 ◇		

◇ B ● / GC ●
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK
INCL.1 x CABLE 2 x 0,75mm²

◇ B ● / GC ●
INCL.3 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK
INCL.1 x CABLE 2 x 0,75mm²




LASS-OH!

		L150	L210	L330
3000K CRI>90	3 x LED 6,1W / 683lm / 350mA	24816 9320 ◇		
	4 x LED 6,1W / 683lm / 350mA		24818 9320 ◇	
	6 x LED 6,1W / 683lm / 350mA			24819 9320 ◇
2700K CRI>90	3 x LED 6,1W / 665lm / 350mA	24816 9220 ◇		
	4 x LED 6,1W / 665lm / 350mA		24818 9220 ◇	
	6 x LED 6,1W / 665lm / 350mA			24819 9220 ◇

◇ B ● / GC ●
INCL.2 x CABLE
SUSP. SINGLE AUTO. 1.6m BLACK
INCL.1 x CABLE 2 x 0,75mm²


INCL.3 x CABLE
SUSP. SINGLE AUTO. 1.6m BLACK
INCL.1 x CABLE 2 x 0,75mm²



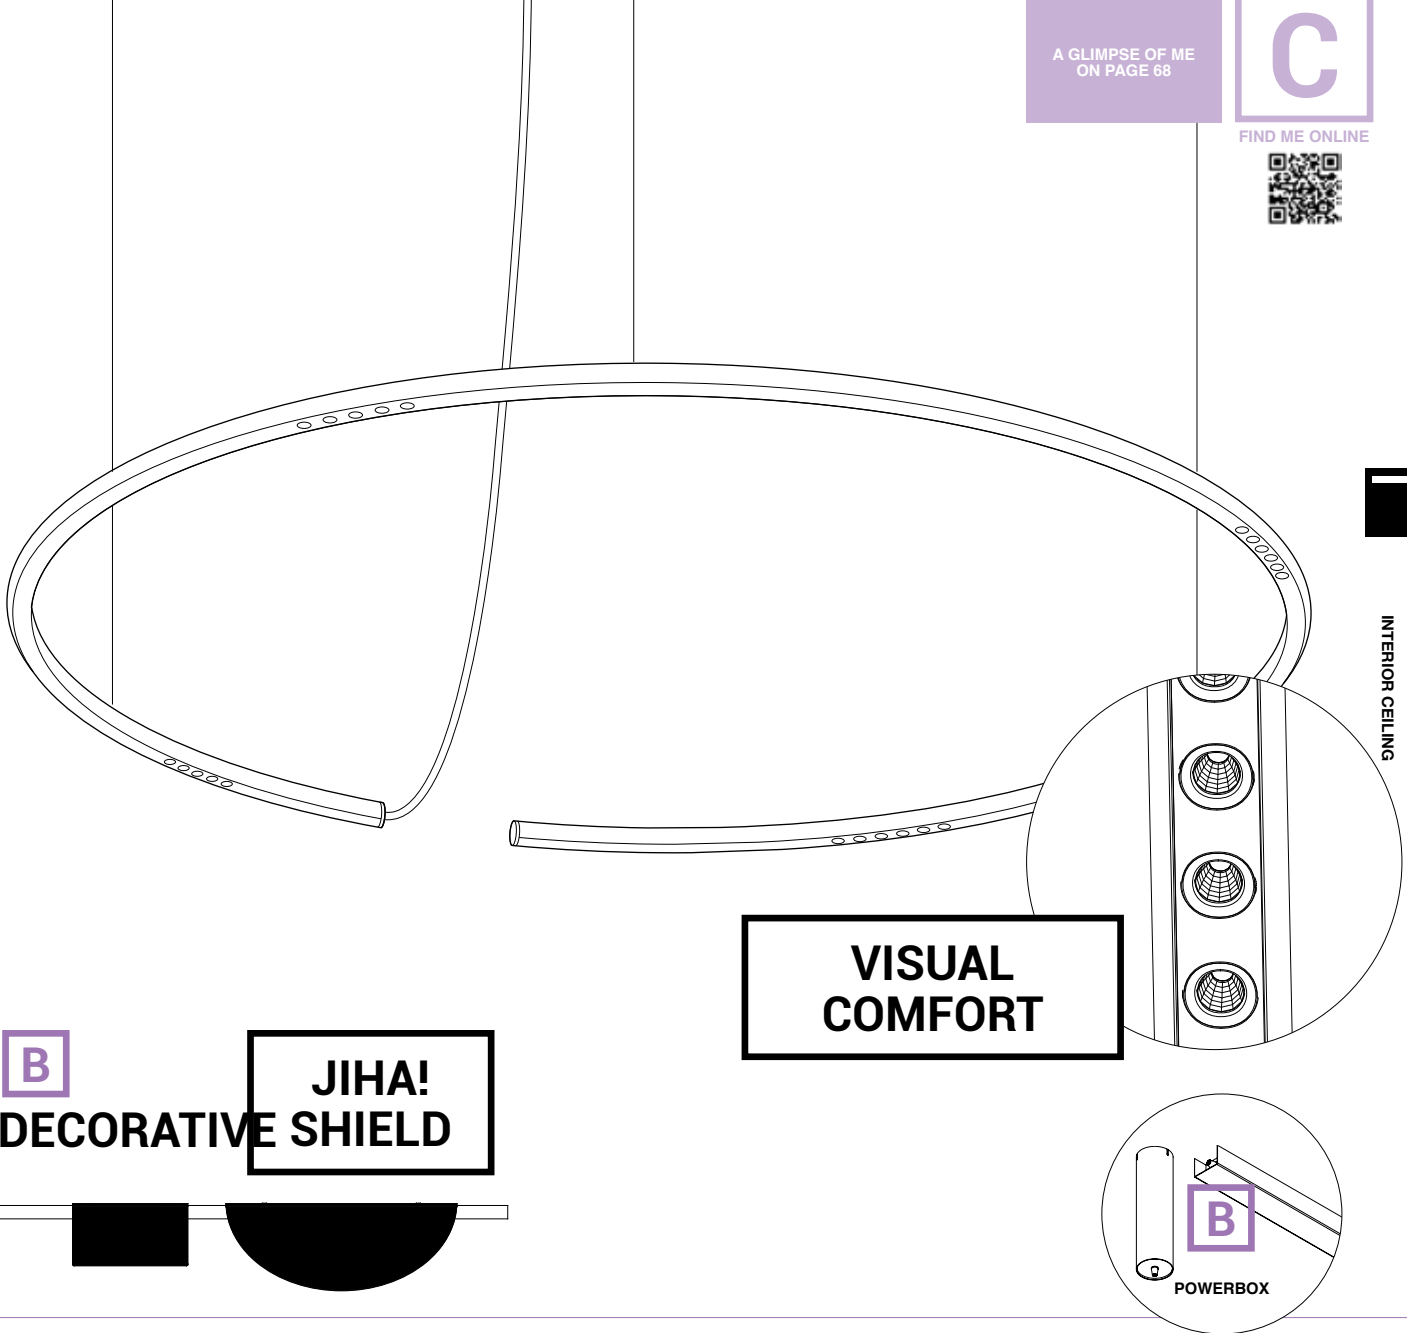

B
DECORATIVE SHIELD

VISUAL COMFORT



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LASS-OH!


			6060	60110	60160	R65-3	R90-4	L150	L210	L330
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER										
NON DIM	21012 0010	147 x 44 x 22	R	R	R	R	R	R	R	R
1-10V DIM	21012 0021	130 x 42 x 30	R	R	R	R	R	R	R	R
DALI DIM	21012 0035	147 x 44 x 30	R	R	R	R	R	R	R	R
or POWERBOX										
NON DIM	24814 0010 B	250 x 58 x 39	R	R	R			R	R	R
1-10V DIM	24814 0011 B	250 x 58 x 39	R	R	R			R	R	R
DALI DIM	24814 0015 B	250 x 58 x 39	R	R	R			R	R	R
NON DIM	24814 0080 B	Ø60 x 150				R	R			
DALI DIM	24814 0075 B	Ø60 x 150				R	R			
INSTALLATION										
CONNECTION ST	15225 0360 B / W		O	O	O	O	O	O	O	O
SUSPENSION ST	15225 0340 B / W		O	O	O	O	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W		O	O	O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W		O	O	O	O	O	O	O	O
ACCESSORIES										
JHA! R	24814 0030 B			A	A			A	A	A
JHA! S	24814 0020 B			A	A			A	A	A


B

MIKALINE

Uplift your creativity with Mikaline! As a set of tools, Mikaline lets you paint lines of light without limits, with the room as a blank canvas and the wall, floor or ceiling as a starting point, you can go any direction you want.

www.deltalight.com/mikaline

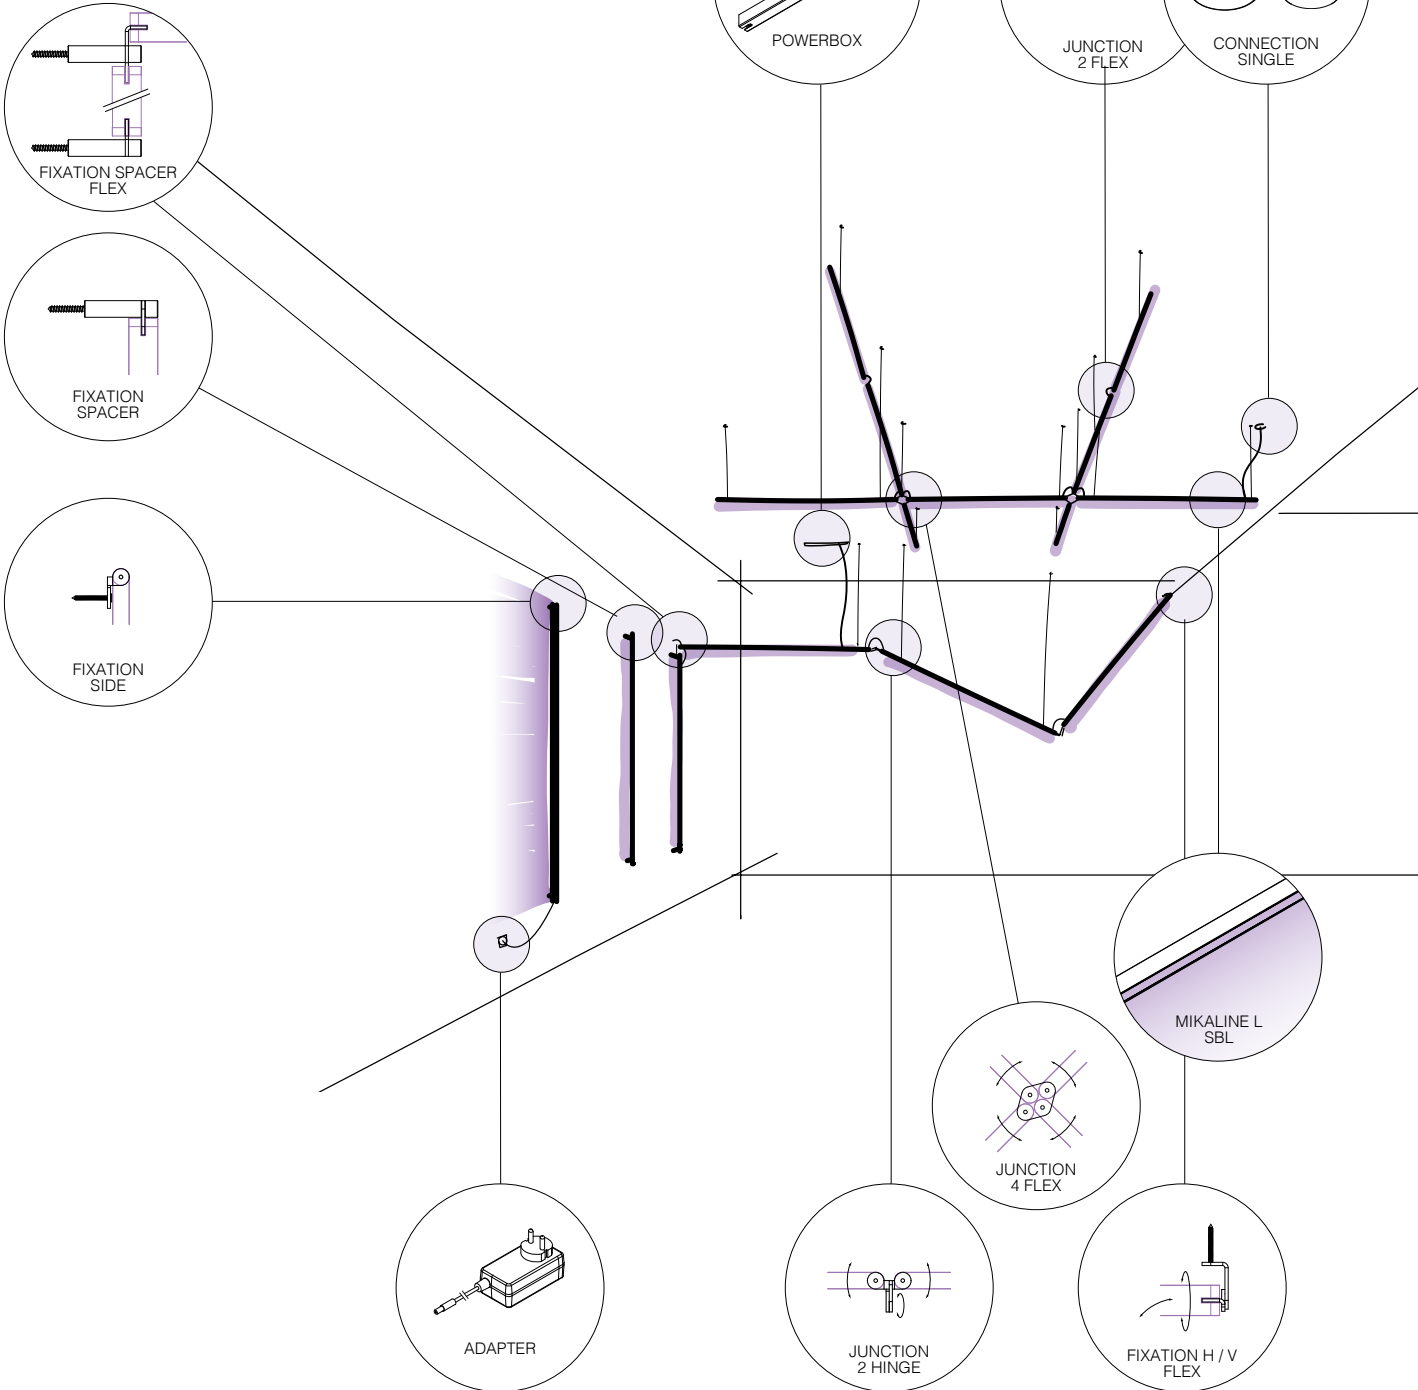

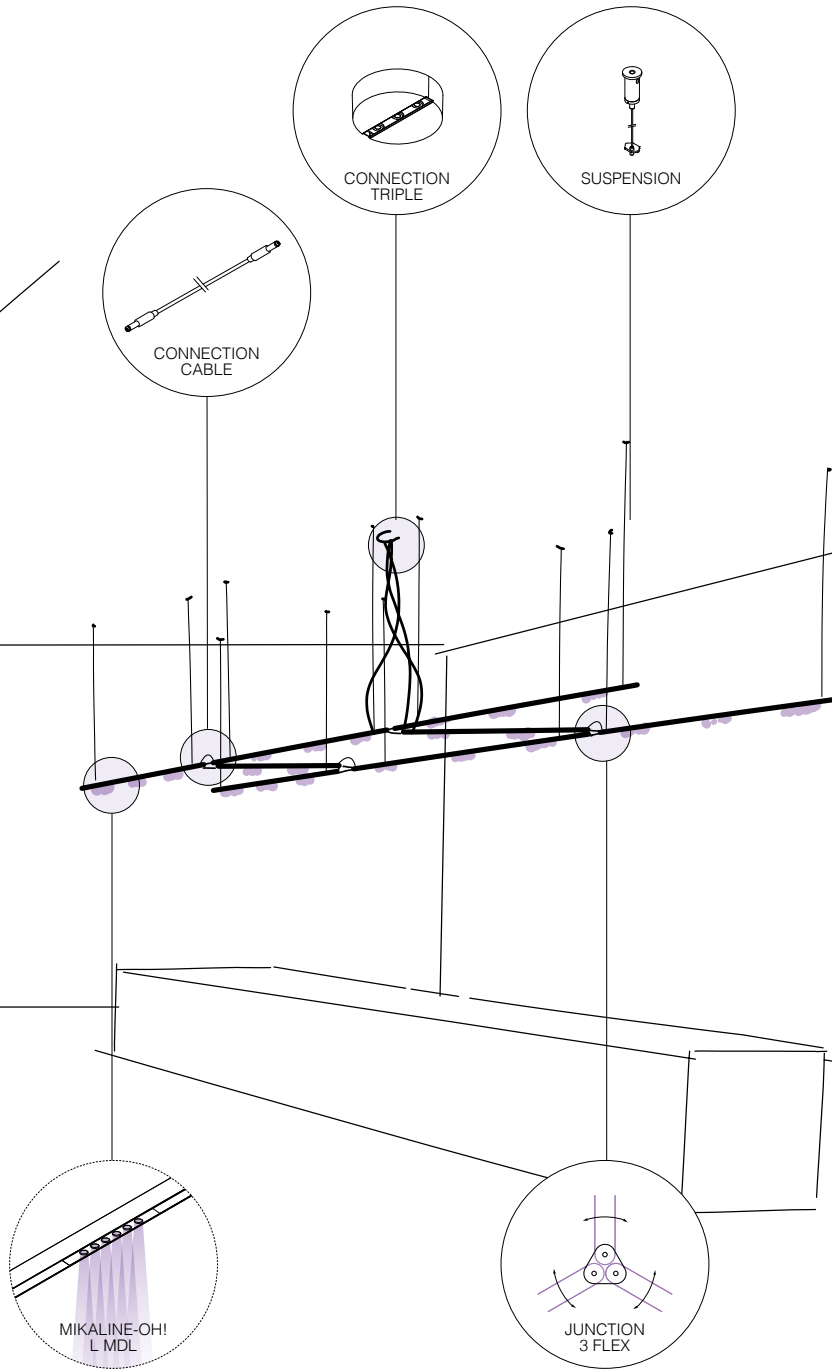



Like brush strokes
on a blank canvas...

MIKALINE

The toolset consists of a range of profiles with sandblasted optics for general lighting or shielded LED dots with a low UGR for task lighting, several connectors to couple up to 4 profiles together, a handful of fixations to joint the profiles with wall or ceiling and a series of plug-in cables for an easy electrical supply of the system.

With up to 10m of profile from 1 feeding point, the 48V powered Mikaline is perfect to build structures for spacious environments and at the same time easily fits in smaller scaled rooms. Create frameworks that light up the room completely, opt for a cosy setting with only indirect light towards the wall or go for a pure linear pattern with dedicated task lighting, possibilities are endless and customizable to individual preferences.

Mikaline is not only appealing as a structure, also the design of the toolset itself is pure eye candy. The dark black structured lines are in powerful contrast with the shiny chromed connection sets. The playful shape of the cable connectors add a joyful element into the linear patterns and the options of Gold Coloured as a finish add a luxurious touch and feel to it. Like brush strokes on a black canvas.



GENERAL LIGHT

NEW

MIKALINE

		L148	L198	L298
3000K CRI>90	LED 20W / 1568lm / 48V-DC	30611 9300 ◊		
	LED 27W / 2138lm / 48V-DC		30612 9300 ◊	
	LED 41W / 3278lm / 48V-DC			30613 9300 ◊
2700K CRI>90	LED 20W / 1485lm / 48V-DC	30611 9200 ◊		
	LED 27W / 2025lm / 48V-DC		30612 9200 ◊	
	LED 41W / 3105lm / 48V-DC			30613 9200 ◊

◊ B ● / GC ●

INCL. 1 x PLUG-IN 48V CABLE 11cm



A

NEW

MIKALINE-OH! MDL



		L148	L198	L298
3000K CRI>90	2 x LED 5,2W / 596lm / 48V-DC	30614 9320 ◊		
	3 x LED 5,2W / 596lm / 48V-DC		30615 9320 ◊	
	4 x LED 5,2W / 596lm / 48V-DC			30616 9320 ◊
2700K CRI>90	2 x LED 5,2W / 581lm / 48V-DC	30614 9220 ◊		
	3 x LED 5,2W / 581lm / 48V-DC		30615 9220 ◊	
	4 x LED 5,2W / 581lm / 48V-DC			30616 9220 ◊

◊ B ● / GC ●

INCL. 1 x PLUG-IN 48V CABLE 11cm



TASK LIGHT






JUNCTION


FIXATION




SIDE SET




H / V FLEX




SPACER FLEX SET



SPACER SET




SPACE 90° 2 SET



SUPSENSION SET




2 FLEX SET



3 FLEX



4 FLEX



2 HINGE

CONNECTION




CLIP




CEILING BASE 1




CEILING BASE 3



POWERBOX 100W



ADAPTER 60W



CABLE

FINISH YOUR SPECIFICATION





REQUIREMENT / OPTION / ACCESSORY

				REQUIREMENT / OPTION / ACCESSORY					
				MIKALINE			MIKALINE-OH! MDL		
				L148	L198	L298	L148	L198	L298
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R*	R*	R*	R*	R*	R*	
1-10V DIM - 48V-DC - 90W	21032 0331	171 x 63 x 38	R*	R*	R*				
DALI DIM - 48V-DC - 90W	21032 0345	171 x 63 x 38	R*	R*	R*				
or POWERBOX									
or POWERBOX 100W	NON DIM	30610 0170 B		R	R	R	R	R	R
or POWER ADAPTER 60W	NON DIM	30610 0190 B		R	R	R	R	R	R
MODULATOR MORE INFO TECHNICAL CHAPTER									
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56				R*	R*	R*	
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56				R*	R*	R*	
JUNCTION									
2 FLEX SET	30610 0010 C	4 PCS.	O	O	O	O	O	O	
3 FLEX	30610 0020 C	1 PC.	O	O	O	O	O	O	
4 FLEX	30610 0030 C	1 PC.	O	O	O	O	O	O	
2 HINGE	30610 0040 C	1 PC.	O	O	O	O	O	O	
FIXATION									
SIDE SET	30610 0050 C	2 PCS.	R	R	R	R	R	R	
or SPACER FLEX SET	30610 0060 B	2 PCS.	R	R	R	R	R	R	
or V/H FLEX	30610 0070 C	1 PC.	R	R	R	R	R	R	
or SPACER SET	30610 0090 B	1 PC.	R	R	R	R	R	R	
or SPACER 90° 2 SET	30610 0180 B	2 PCS.	R	R	R	R	R	R	
or SUSPENSION SET	30610 0080 B	1 PC.	R	R	R	R	R	R	
CONNECTION									
CONNECTION CLIP	30610 0140 B		R**	R**	R**	R**	R**	R**	
or CONNECTION CEILING BASE 1	30610 0160 B		R**	R**	R**	R**	R**	R**	
or CONNECTION CEILING BASE 3	30610 0150 B		R**	R**	R**	R**	R**	R**	
PLUG-IN 48V CABLE 11CM	30610 0100	max.120W (3A)	R	R	R	R	R	R	
or PLUG-IN 48V CABLE 1,5M	30610 0110	max.120W (3A)	R	R	R	R	R	R	
or PLUG-IN 48V CABLE 3M	30610 0120	max.120W (3A)	R	R	R	R	R	R	





* REMOTE INSTALLATION
** REQUIRED IN COMBINATION WITH POWER SUPPLY

The image features a complex abstract composition of geometric shapes. It includes several circles in black, purple, and light purple, some of which are partially enclosed by thick black lines that form various shapes like U-shapes, rectangles, and irregular paths. The background is white, and the overall style is minimalist and modern.

Shape your SOLISCAPE

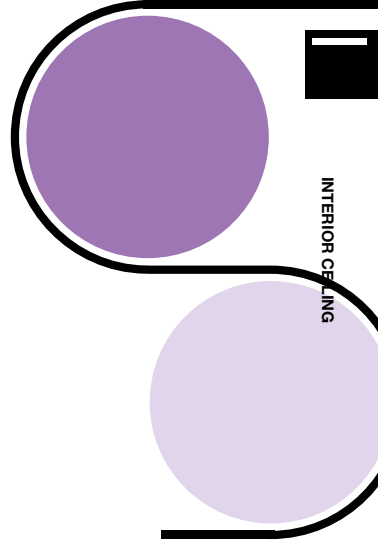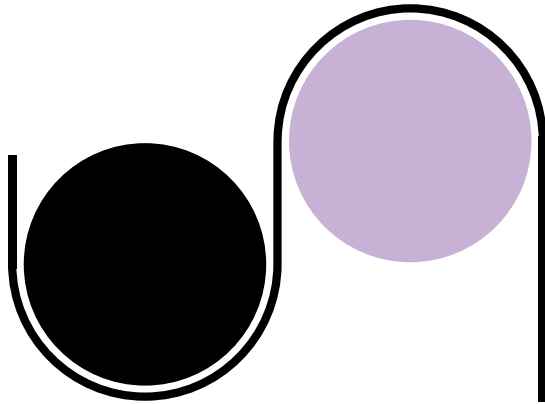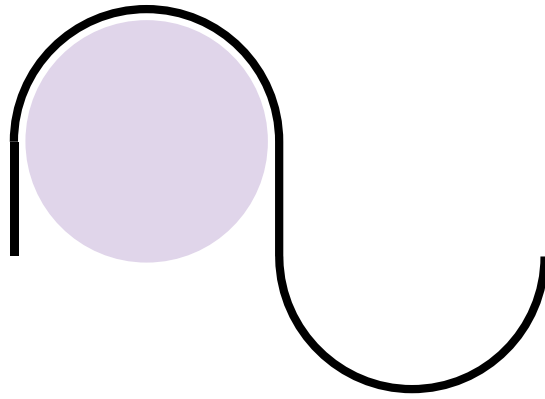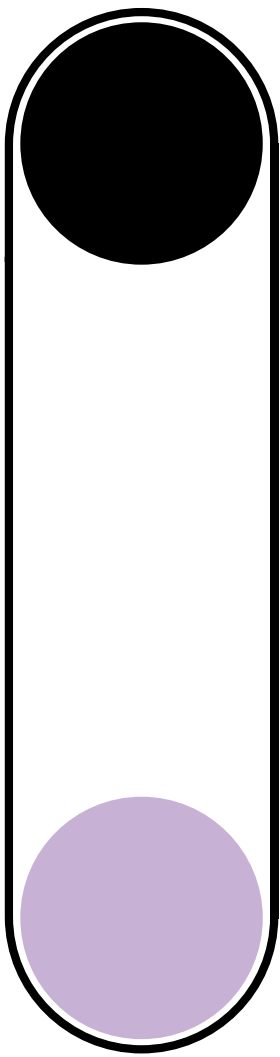

INTERIOR CEILING

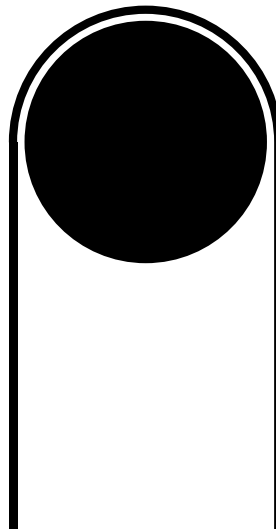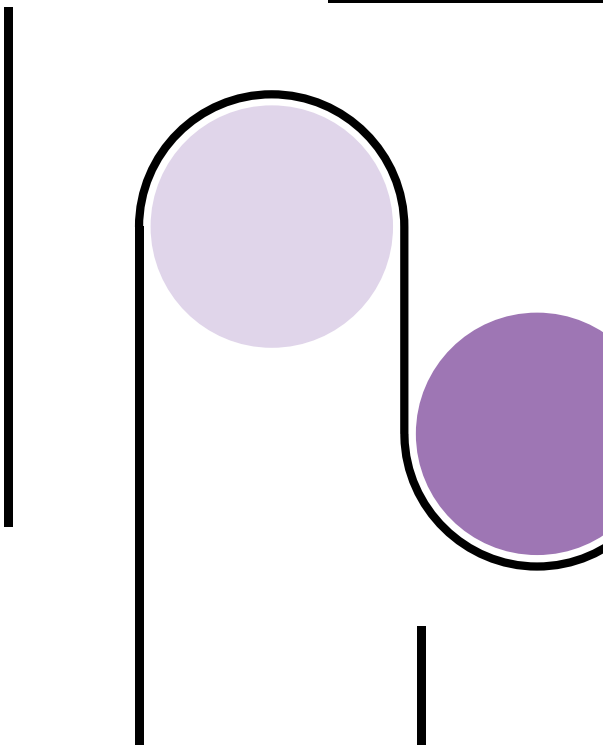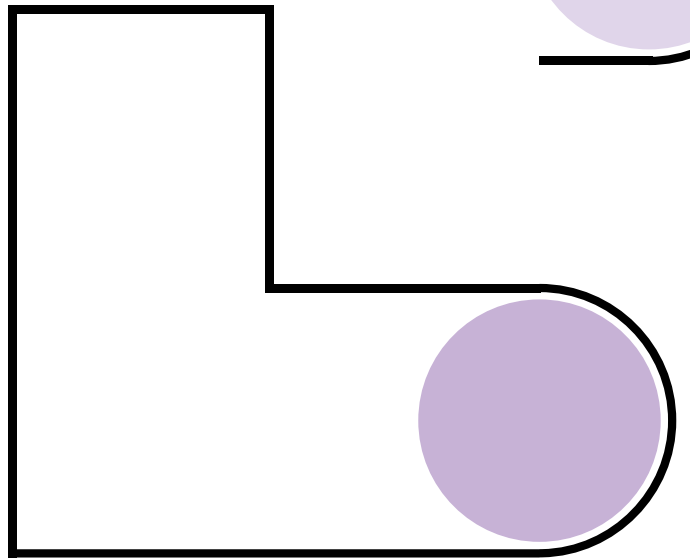

SOLISCAPE


The intention of Soliscape is to create flexible lightscapes that are responsive to the user's ever-changing needs and activities, where design is no longer imposed by the designers, but guided by the user, resulting in responsive and adaptive design. The Soliscape system combines miniaturisation and personalisation, in a unique design language.

www.deltalight.com/soliscape



SOLI-SENSE

The Soli-Sense module is key in the user-centric approach of Soliscape, as it captures relevant data from its surroundings that serve to interact with the modules of the system or – by extension – with the complete Building Management System. Detecting presence, adapting the light intensity based on incoming daylight, adjusting the HVAC system according to the temperature, humidity and air quality in the room to obtain an optimal user environment are some examples. By integrating all modules in our Smart Q environment, Soliscape becomes the basis that interacts with all smart systems in its surroundings.

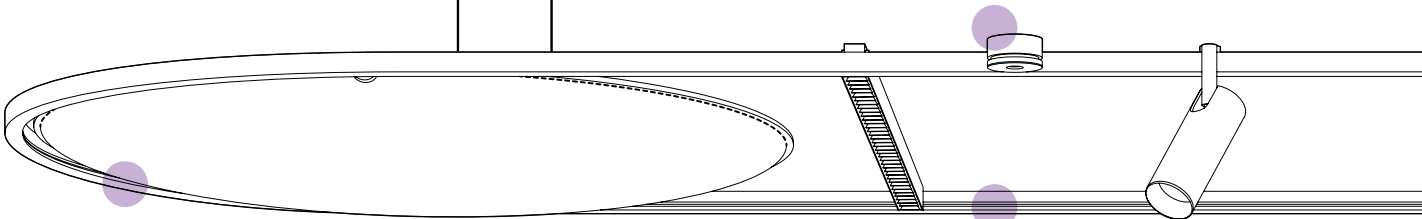

SOLI-SHHH


For additional optimization of room acoustics, Soliscape enables you to combine user focused lighting with Soli-Shhh panels. The sound-absorbing panels can easily be added or removed, positioned flat or tilted, guaranteeing noise reduction to office spaces and meetings rooms in the most aesthetical way.

These sound-absorbing panels are created to solve the problem of indoor reverberation to guarantee the best acoustic comfort and wellbeing.

Absorbing the noises in the field of typical speech frequencies (between 500 Hz and 2000 Hz)

These sound absorbing panels can be applied to facilitate for specific functionalities, from acoustic to decorative and illuminous atmospheric scenes.

Soli-Shhh panels can be used as an add-on to the Soliscape toolbox or as a separate sound absorbing element, be it with or without additional spot modules mounted around the circle.




PROFILE

The slender Soliscape profile is the structural base to customize your Soliscape configurations. With dimensions reduced to 19mm x 23mm, it is minimalism at its purest, allowing you to create unique "graphical" configurations. In contrast to common track or profile suspensions, all modules are plugged in from above, maintaining a smooth appearance from below.

The linear elements can be combined with the signature Soliscape curved or 90° corners, upgrading its surroundings with dynamism and attitude.




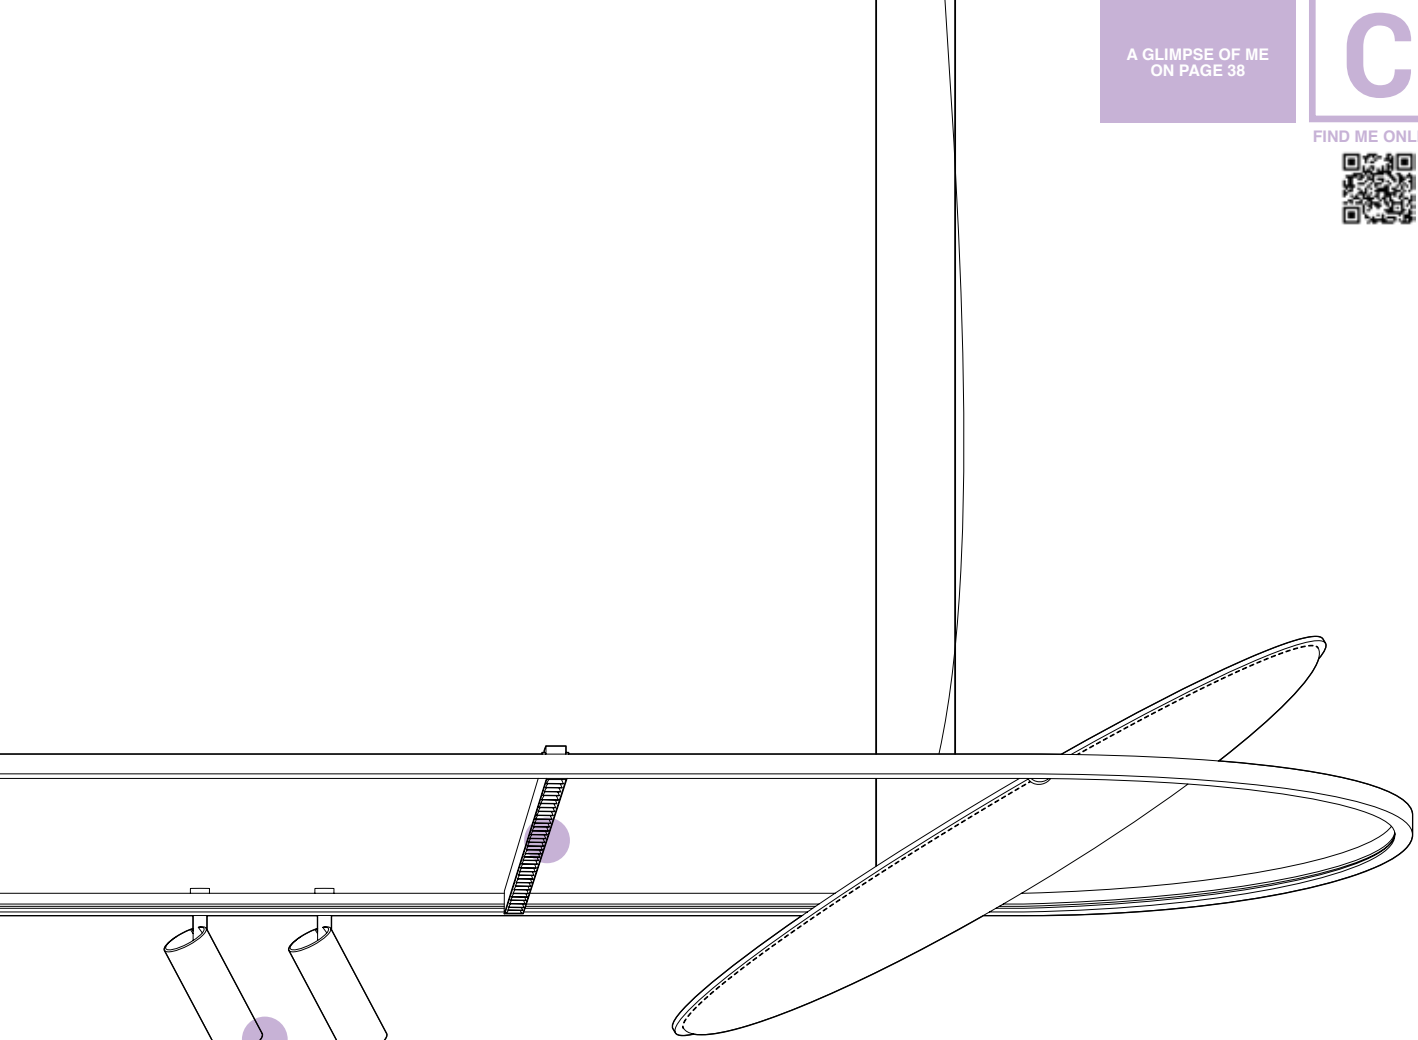

SOLI-52 / SOLI-66

The Soliscape spot modules enable you to illuminate any part of the room where Soliscape is applied. The hybrid optics guarantee a precise beam, as the lens controls and shapes the light that is reflected from the high-quality reflector. The spot modules have a colour rendering of CRI ≥ 90, or come in a CRI ≥ 95 version with Delta Light's unique Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity. As so, helping to control the circadian rhythm to further stimulate the human well-being.

The Soliscape spot modules makes its connection on the top of the profile, keeping a very clean and refined appearance without compromising on flexibility and performance.




SOLI-FORM

The core strength of the Soli-Form is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics. The reflector is designed to perfectly embrace every individual LED module in a way to boost the efficiency of the complete luminaire, while maintaining a high level of visual comfort, as every LED dot is shielded from being looked into.

The Soli-Form profile breaths refinement in all its aspects. Its slender dimensions of 28 by 28mm weld in seamlessly with the slim dimensions of the Soliscape. The human aspect is the central topic for Soli-Form. It offers LEDs that help control the circadian rhythm via a unique spectrum meant to stimulate activity. The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.


Despite its minimalistic design, Soli-Form does not compromise on performance. With a delivered lumen package downwards of up to 3045lm per meter, Soli-Form is perfect for illuminating task areas like office desks or reception counters. Within the same dimensions one can also opt for a down-up version, enhancing the sense of space and creating a uniform glow on both vertical as horizontal surfaces, which leads to a reduced contrast and relaxes the eye.

The Soli-Form profiles can be positioned alongside the structure or across, connecting both sides.




SOLI-LINE

Apart from task lighting and focused accent lighting, Soliscape offers linear solutions for general lighting as well. In line with the complete set-up, the design is minimalist and straightforward. Installed in line with the profile or connecting two opposite profiles, these straight lines are finished with a sandblasted optic to diffuse the light around the room, both as down- or uplight.



SOLISCAPE



SOLISCAPE

1 PROFILE

PROFILE 2m	27111 0020 ◊ ◊ B ● / W ○
PROFILE 3m	27111 0030 ◊ ◊ B ● / W ○
48V-DC (2 CONDUCTORS) - 2 CONDUCTORS FOR INDIVIDUAL DIMMING/DATA IP20	

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CORNER 180°	27111 0620 B / W
CORNER 180° MIRROR	27111 0630 B / W
CORNER SET 90°	27111 0640 B / W
CORNER SET 90° OUT	27111 0650 B / W
CORNER SET R 60	27111 0720 B / W
CORNER SET R 90°	27111 0730 B / W

4 ENDCAP

ENDCAP SET (2 PCS.)	27111 0410 B / W
---------------------	------------------

5 FIXATION

SUSPENDED	
SUSPENSION SINGLE 3M (1 PC.)	27111 0530 B / W
SUSPENSION ST	15225 0340 B / W

6 CONNECTION

POWERBOX	
NON DIM 48V-DC / 200W - R	27110 0090 B / W
NON DIM 48V-DC / 100W - L	27110 0100 B / W
SUPPLY 48V-DC (max.200W/supply/max.50m) Incl. cable 3,5m - 2x 1,5mm ² + 2x 0,34mm ² BLACK for B, GREY for W	27111 9960 B / W
CONNECTION ST	15225 0360 B / W
CONNECTOR 48V-DC - 180° (max.200W/supply/max.50m)	27011 9910
CONNECTOR 48V-DC - 90° (max.200W/supply/max.50m)	27011 9920
CONNECTOR 48V-DC - R 60 (max.200W, incl. cable)	27111 9940
CONNECTOR 48V-DC - R 90 (max.200W, incl. cable)	27111 9950

7 ACOUSTIC PANEL


SOLI-SHHH 60-	
LIGHT GREY	27110 0010 B / W
DARK GREY	27110 0020 B / W
SCARLET	27110 0110 B / W
SAND	27110 0120 B / W
LILAC	27110 0130 B / W
ARCTIC	27110 0140 B / W
SOLI-SHHH 90-	
LIGHT GREY	27110 0030 B / W
DARK GREY	27110 0040 B / W
SCARLET	27110 0150 B / W
SAND	27110 0160 B / W
LILAC	27110 0170 B / W
ARCTIC	27110 0180 B / W

MODULES


SEE NEXT PAGES



TOOLBOX


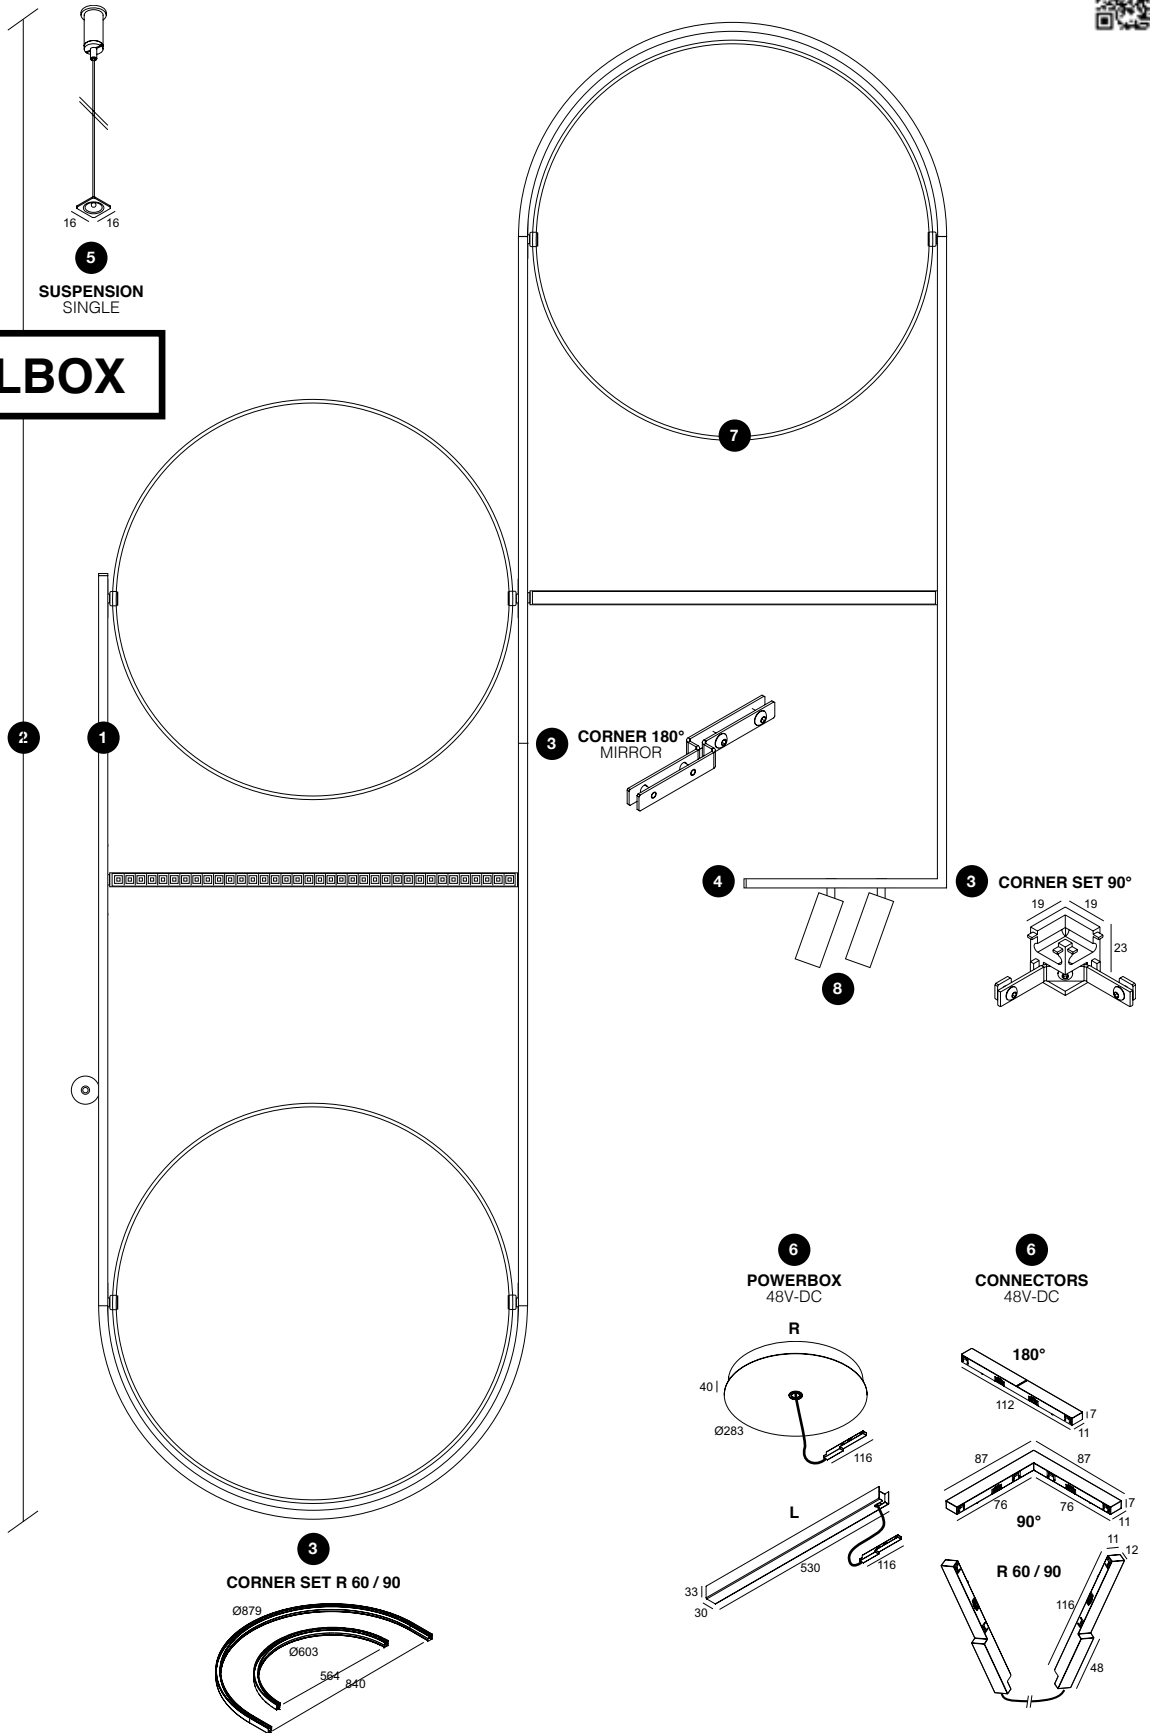


SOLISCAPE

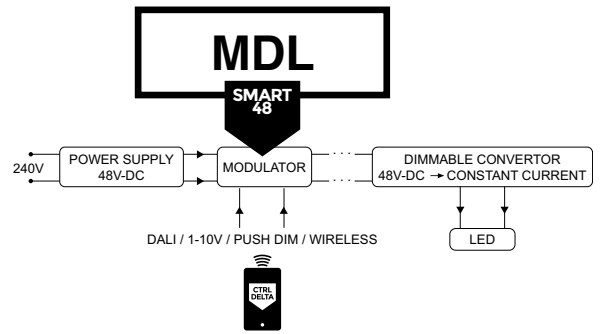

NLT - NATURAL LIGHT TECHNOLOGY

Soli 52 / 66 make use of Delta Light's Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.



SOLI

		52			66		
		MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
3000K CRI>90	LED 10.3W / 1281lm / 48V-DC	20° 27112 9320 ◇	27115 9325 ◇	27118 932Q ◇			
		45° 27112 9330 ◇	27115 9335 ◇	27118 933Q ◇			
	LED 20.5W / 2499lm / 48V-DC				27121 9310 ◇	27123 9315 ◇	27125 931Q ◇
3000K CRI>98	NLT LED 10.7W / 1040lm / 48V-DC	20° 27113 7320 ◇	27116 7325 ◇	27119 732Q ◇			
		45° 27113 7330 ◇	27116 7335 ◇	27119 733Q ◇			
					27122 7310 ◇	27124 7315 ◇	27126 731Q ◇
3000K CRI>95	NLT LED 21.1W / 2068lm / 48V-DC				27122 7320 ◇	27124 7325 ◇	27126 732Q ◇
					27122 7330 ◇	27124 7335 ◇	27126 733Q ◇
2700K CRI>90	LED 10.3W / 1224lm / 48V-DC	20° 27112 9220 ◇	27115 9225 ◇	27118 922Q ◇			
		45° 27112 9230 ◇	27115 9235 ◇	27118 923Q ◇			
	LED 20.5W / 2432lm / 48V-DC				27121 9210 ◇	27123 9215 ◇	27125 921Q ◇
2700K CRI>98	NLT LED 10.7W / 967lm / 48V-DC	20° 27113 7220 ◇	27116 7225 ◇	27119 722Q ◇			
		45° 27113 7230 ◇	27116 7235 ◇	27119 723Q ◇			
					27122 7210 ◇	27124 7215 ◇	27126 721Q ◇
2700K CRI>95	NLT LED 21.1W / 1925lm / 48V-DC				27122 7220 ◇	27124 7225 ◇	27126 722Q ◇
					27122 7230 ◇	27124 7235 ◇	27126 723Q ◇
3000-1800K / CRI>90 SOFT DIM	LED 10.2W / 1038lm / 48V-DC	20° 27184 9020 ◇	27185 9025 ◇	27186 902Q ◇			
		45° 27184 9030 ◇	27185 9035 ◇	27186 903Q ◇			

NLT - NATURAL LIGHT TECHNOLOGY

◇ B ● / GC ● / W ○

◇ B ● / W ○



MLT - MELANOPIC LIGHT TECHNOLOGY



A GLIMPSE OF ME
ON PAGE 38



FIND ME ONLINE



The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.



SOLI-FORM


UCR <19

			DOWN			DOWN-UP		
			MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
LED 3000K CRI>80	10,2W / 1673lm / 48V-DC	L564	27127 8320 ◊	27130 8325 ◊	27133 832Q ◊			
	15,3W / 2509lm / 48V-DC	L840	27128 8320 ◊	27131 8325 ◊	27134 832Q ◊			
	21,6W / 3542lm / 48V-DC	L1104	27129 8320 ◊	27132 8325 ◊	27135 832Q ◊			
	UP 6,8W / 1115lm / 48V-DC DOWN 6,8W / 1115lm / 48V-DC	L564 2 circuits				27136 8320 ◊	27139 8325 ◊	27144 832Q ◊
	UP 10,2W / 1673lm / 48V-DC DOWN 10,2W / 1673lm / 48V-DC	L840 2 circuits				27137 8320 ◊	27141 8325 ◊	27146 832Q ◊
	UP 14,4W / 2405lm / 48V-DC DOWN 14,4W / 2405lm / 48V-DC	L1104 2 circuits				27138 8320 ◊	27142 8325 ◊	27147 832Q ◊
							27143 8325 ◊	27148 832Q ◊



◊ B-B ●●● / B-MMAT ●●● / W-W ○○○ / W-B ○●●

IP20

POSITION FOR SOLI-FORM/LINE

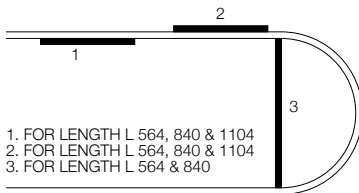

LIGHTSCAPES



SOLI-LINE

			DOWN			UP		
			MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
LED 3000K CRI>90	11,8W / 1247lm / 48V-DC	L564	27149 9300 ◊	27152 9305 ◊	27155 930Q ◊	27158 9300 ◊	27161 9305 ◊	27164 930Q ◊
	18,2W / 1929lm / 48V-DC	L840	27150 9300 ◊	27153 9305 ◊	27156 930Q ◊	27159 9300 ◊	27162 9305 ◊	27165 930Q ◊
	23,5W / 2494lm / 48V-DC	L1128	27151 9300 ◊	27154 9305 ◊	27157 930Q ◊	27160 9300 ◊	27163 9305 ◊	27166 930Q ◊

◊ B ●● / W ○

IP20

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


	SOLI 52			SOLI 66			SOLI-FORM			SOLI-LINE		
	MDL	DALI	Q	MDL	DALI	Q	MDL	DALI	Q	MDL	DALI	Q
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
NON DIM - 48V-DC - 240W	300 89 48 240											
or POWERBOX												
NON DIM - 48V-DC - 200W	27110 0090	Ø 263 x 40	R	R	R	R	R	R	R	R	R	R
NON DIM - 48V-DC - 200W	27110 0100	530 x 30 X 33	R	R	R	R	R	R	R	R	R	R
MODULATOR MORE INFO TECHNICAL CHAPTER												
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56	R*			R*			R*			R*
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56	R*			R*			R*			R*
CONTROL MORE INFO TECHNICAL CHAPTER												
Q CONTROL	21032 0150	72 X 90 X 62							R			R
Q GATEWAY	21032 0160	110 x 110 x 35							R			R
Q PUSH BUTTON INTERFACE	21032 0170	38 x 38 x 15							O			O
FINISH												
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W		R	R	R							
SPY 66 TUBE	24611 0100 B / FBR / FG / GC / W					R	R	R				
HONEYCOMB / LENS / GLASS												
HONEYCOMB SINGLE USE	19810 0010 B		A	A	A							
HONEYCOMB DOUBLE USE	19810 0060 B		A	A	A							
LINEAR SPREAD LENS	19810 0020		A	A	A							
SPREAD LENS	19810 0030		A	A	A							
SOFTENING LENS	19810 0040		A	A	A							
GLASS SBL	19810 0050		A	A	A							
HONEYCOMB SINGLE USE	24611 0150 B					A	A	A				
HONEYCOMB DOUBLE USE	24611 0210 B					A	A	A				
LINEAR SPREAD LENS	24611 0170					A	A	A				
SPREAD LENS	24611 0200					A	A	A				
SOFTENING LENS	24611 0190					A	A	A				
GLASS SBL	24611 0160					A	A	A				

* REMOTE INSTALLATION

INTERIOR CEILING



SOLISCAPE




SOLI-SHHH C

	600	900	1200
LIGHT GREY	27167 0000 ◇	27169 0000 ◇	27171 0000 ◇
DARK GREY	27168 0000 ◇	27170 0000 ◇	27172 0000 ◇
SCARLET	21401 0000 ◇	21405 0000 ◇	21409 0000 ◇
SAND	21402 0000 ◇	21406 0000 ◇	21410 0000 ◇
LILAC	21403 0000 ◇	21407 0000 ◇	21411 0000 ◇
ARCTIC	21404 0000 ◇	21408 0000 ◇	21412 0000 ◇

◇ B ● / W ○

INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m

A



SOLI-SHHH PLUS

	600	900	1200
	FOR 4 x SOLI 52-SHHH	FOR 4 x SOLI 52-SHHH	FOR 4 x SOLI 52-SHHH
	DALI DIM	DALI DIM	DALI DIM
LIGHT GREY	27173 0005 ◇	27175 0005 ◇	27177 0005 ◇
DARK GREY	27174 0005 ◇	27176 0005 ◇	27178 0005 ◇
SCARLET	21413 0005 ◇	21417 0005 ◇	21421 0005 ◇
SAND	21414 0005 ◇	21418 0005 ◇	21422 0005 ◇
LILAC	21415 0005 ◇	21419 0005 ◇	21423 0005 ◇
ARCTIC	21416 0005 ◇	21420 0005 ◇	21424 0005 ◇

◇ B ● / W ○


INCL. POWER SUPPLY 110-240V / 50-60Hz

INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m

INCL. 1 x CABLE 4 x 0,75mm²



NLT - NATURAL LIGHT TECHNOLOGY



SOLI

52-SHHH

MDL



Color	Power / Lumen / Current	Beam Angle	Product Code
3000K CRI>90	LED 10.3W / 1281lm / 600mA	20°	27181 9320 ◇
		45°	27181 9330 ◇
3000K CRI>98	LED 10.7W / 1040lm / 600mA	20°	27182 7320 ◇
		45°	27182 7330 ◇
2700K CRI>90	LED 10.3W / 1224lm / 600mA	20°	27181 9220 ◇
		45°	27181 9230 ◇
2700K CRI>98	LED 10.7W / 967lm / 600mA	20°	27182 7220 ◇
		45°	27182 7230 ◇
3000-1800K / CRI>90	LED 10.2W / 1038lm / 500mA	20°	27187 9020 ◇
		45°	27187 9030 ◇

◇ B ● / GC ● / W ○





SOLI-SHHH VS SOLI-SHHH PLUS

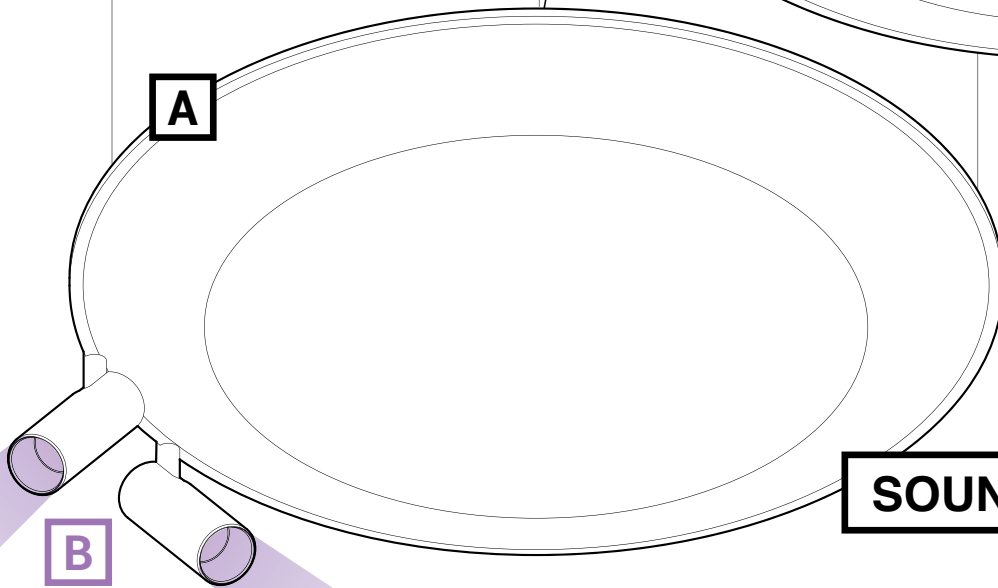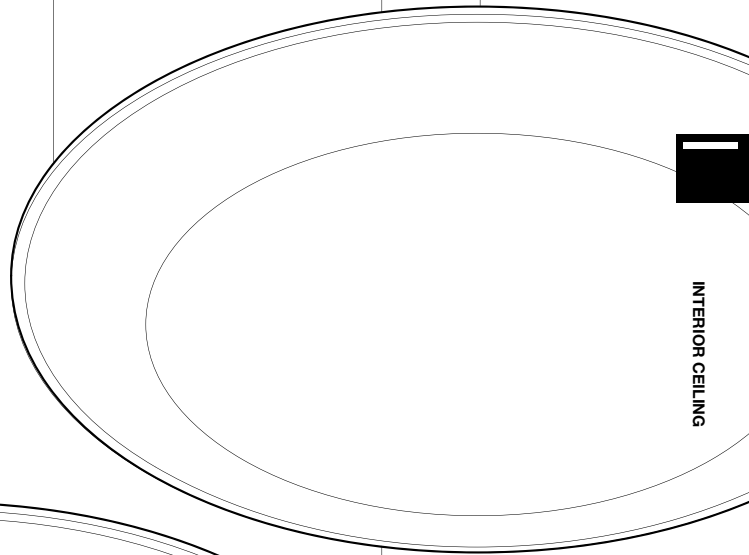

SOUNDSCAPES

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		SOLI-SHHH C	SOLI-SHHH PLUS	SOLI 52-SHHH
FINISH				
	SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W		R
HONEYCOMB / LENS / GLASS				
	HONEYCOMB SINGLE USE	19810 0010 B		A
	HONEYCOMB DOUBLE USE	19810 0060 B		A
	LINEAR SPREAD LENS	19810 0020		A
	SPREAD LENS	19810 0030		A
	SOFTENING LENS	19810 0040		A
	GLASS SBL	19810 0050		A
INSTALLATION				
	SOLI-SHHH PLUS 600	for max. 4x SOLI 52-SHHH		R
	or SOLI-SHHH PLUS 900	for max. 4x SOLI 52-SHHH		R
	or SOLI-SHHH PLUS 1200	for max. 4x SOLI 52-SHHH		R
	or SOLI-SHHH PLUS 1200	for max. 8x SOLI 52-SHHH		R
	SUSPENSION ST	15225 0340 B / W	O	
	CONNECTION ST	15225 0360 B / W	O	
	CABLE BASE R	203 99 55 ANO / B / W	O	






SOLISCAPE

How to control SOLISCAPE

SMART 48



Sensorial responsive

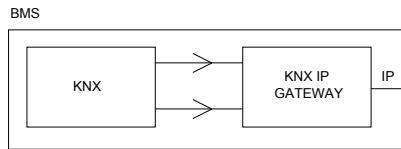


CONNECTION TO Q-BUS, KNX, SONOS, ALEXA, ...




Hey Google,...


4 FUNCTIONS EXTERNAL PUSH BUTTON



Q-PUSH BUTTON INTERFACE



CONTROL OF 40 MODULES
 USB + ETHERNET
 92 SCENES
 100 CLOCK TIMES
 ASTRONOMIC CLOCK
 INCL. 8 GB SD-CARD
 220-240V / 50-60Hz

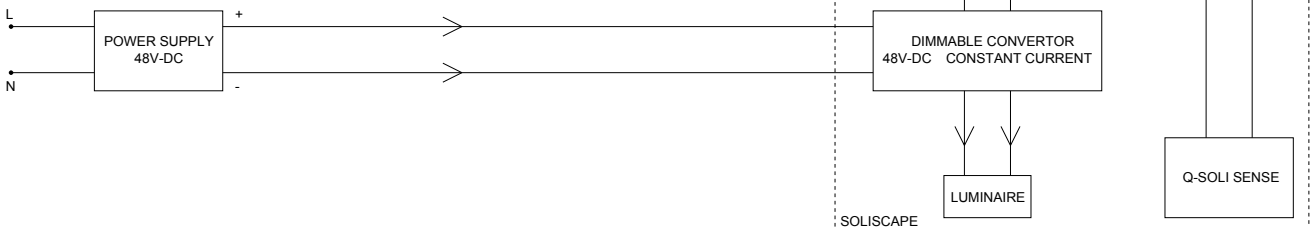



FIND ME ONLINE



SOLISCAPE

VOICE CONTROL

SOLI-VOICE COMMAND GOOGLE HOLDER *	21032 0220 B/W
------------------------------------	----------------

SENSOR

DALI PRESENCE & DAYLIGHT SENSOR	27110 0055 B
WIRELESS SENSOR HUB **	27110 0070 B
Q SENSOR HUB **	27110 0080 B

Q CONTROL

Q CONTROL 40-1	21032 0150
Q GATEWAY	21032 0160
Q PUSH BUTTON INTERFACE	21032 0170

* FOR GOOGLE NEST 2ND GENERATION SPEAKER

** PRESENCE & DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY

REQUIREMENT / OPTION / ACCESSORY

			VOICE COMMAND GOOGLE HOLDER	DALI PRESENCE & DAYLIGHT SENSOR	WIRELESS SENSOR HUB	Q SENSOR HUB
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R *	R *	R *	R *
CONTROL MORE INFO TECHNICAL CHAPTER						
WIRELESS MODULATOR	300 90 012				R *	
Q CONTROL	21032 0150		R	R		R
Q GATEWAY	21032 0160		R	R		R

* REMOTE INSTALLATION

INFORM

A WORKING TOOL

The Inform family is an extensive range of linear and curved lighting solutions, designed to be used in applications that include task areas, like landscape offices, meeting rooms, reception desks, home office,... Areas which need technical architectural lighting at its best: eye for design, eye for the user and eye for performance.

The base of this family is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics.

ULTIMATE VISUAL COMFORT

Different from the fluorescent tubes, a LED array is build up out of multiple LEDs. Therefore, the reflector is designed to perfectly embrace every individual LED module in a way to boost the efficiency of the complete luminaire while maintaining a high level of visual comfort as every LED dot is shielded from being looked into.

www.deltalight.com/inform



LIGHT EFFECT

	INFORM SQ		INFORM R			
	28	40	R1	R2	R3	R4
DOWN	10,2W - 1765lm up to 51W - 8364lm	16,8W - 2643lm up to 48W - 7398lm	23,8W - 3594lm	23,8W - 3594lm	35,7W - 5391lm	23,8W - 3594lm
DOWN-UP	DOWN 10,2W - 1765lm up to 34W - 5882lm UP 13,6W - 2462lm up to 27,2W - 4706lm	DOWN 16,8W - 2643lm UP 24W - 3699lm	DOWN 23,8W - 3594lm UP 11,9W - 1797lm	DOWN 23,8W - 3594lm UP 11,9W - 1797lm	DOWN 35,7W - 5391lm UP 11,9W - 1797lm	DOWN 23,8W - 2695lm UP 17,9W - 1797lm
UP		16,8W - 2643lm up to 48W - 7398lm				

OPTICS

45°						
63° - UGR<16		•				
67° - UGR<16	•		•	•	•	•
71° - UGR<19						

COLOUR TEMPERATURE

2700K			•	•	•	•
3000K			•	•	•	•
3000K - MLT (MELANOPIC LIGHT TECHNOLOGY)	•	•				
4000K						
4000K - MLT (MELANOPIC LIGHT TECHNOLOGY)	•	•				
5000K - 2700K TUNABLE WHITE		•				

CONTROL

EXCL. POWER SUPPLY	•		•	•	•	•
NON DIM						
MAINS DIM						
1-10V DIM						
DALI DIM		•	•	•	•	•
WIRELESS DIM						

COLOUR

WHITE ○	•	•	•	•	•	•
WHITE-BLACK ○●	•	•	•	•	•	•
BLACK ●	•		•	•	•	•
BLACK-GOLD MATT ●●	•		•	•	•	•
FLEMISH GOLD-BLACK ●●			•	•	•	•

INSTALLATION

INTERIOR	RECESSED	•				
	SURFACE MOUNTED	•	•	•	•	•
	SUSPENDED CABLE	•	•	•	•	•

OTHER


PRESENCE & DAYLIGHT SENSOR		•				
----------------------------	--	---	--	--	--	--

• STANDARD
• NOT FOR ALL VERSIONS


INFORM

MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.



NEW
INFORM



38 x (L - 7) x 40 max.12,5

UGR <19

ST

		L848mm			L1124mm			L1400mm		
LED *	9,8W / 1688lm (HP) 15,2W / 2477lm	67°		25501 8320 ◊						
	13,1W / 2251lm (HP) 20,3W / 3302lm			25502 8320 ◊						
	16,4W / 2814lm (HP) 25,3W / 4128lm						25503 8320 ◊			

* Power selection to be set on driver

◊ B-B ●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

IP20

INFORM

UGR <19


SQ F


		L1440mm			L2000mm			L2820mm		
LED *	9,8W / 1768lm (HP) 15,2W / 2596lm	67°		25523 8420 ◊						
	16,4W / 2946lm (HP) 25,3W / 4326lm			25524 8420 ◊						
	13,2W / 2356lm (HP) 20,2W / 3460lm			25525 8420 ◊						
	22,9W / 4124lm (HP) 35,4W / 6056lm			25526 8420 ◊						
	19,8W / 3534lm (HP) 30,3W / 5190lm						25527 8420 ◊			
	32,8W / 5892lm (HP) 50,6W / 8652lm						25528 8420 ◊			
LED *	9,8W / 1688lm (HP) 15,2W / 2477lm	67°		25523 8320 ◊						
	16,4W / 2814lm (HP) 25,3W / 4128lm			25524 8320 ◊						
	13,2W / 2252lm (HP) 20,2W / 3302lm			25525 8320 ◊						
	22,9W / 3940lm (HP) 35,4W / 5779lm			25526 8320 ◊						
	19,8W / 3378lm (HP) 30,3W / 4953lm						25527 8320 ◊			
	32,8W / 5628lm (HP) 50,6W / 8256lm						25528 8320 ◊			

* Power selection to be set on driver

◊ B-B ●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

IP20



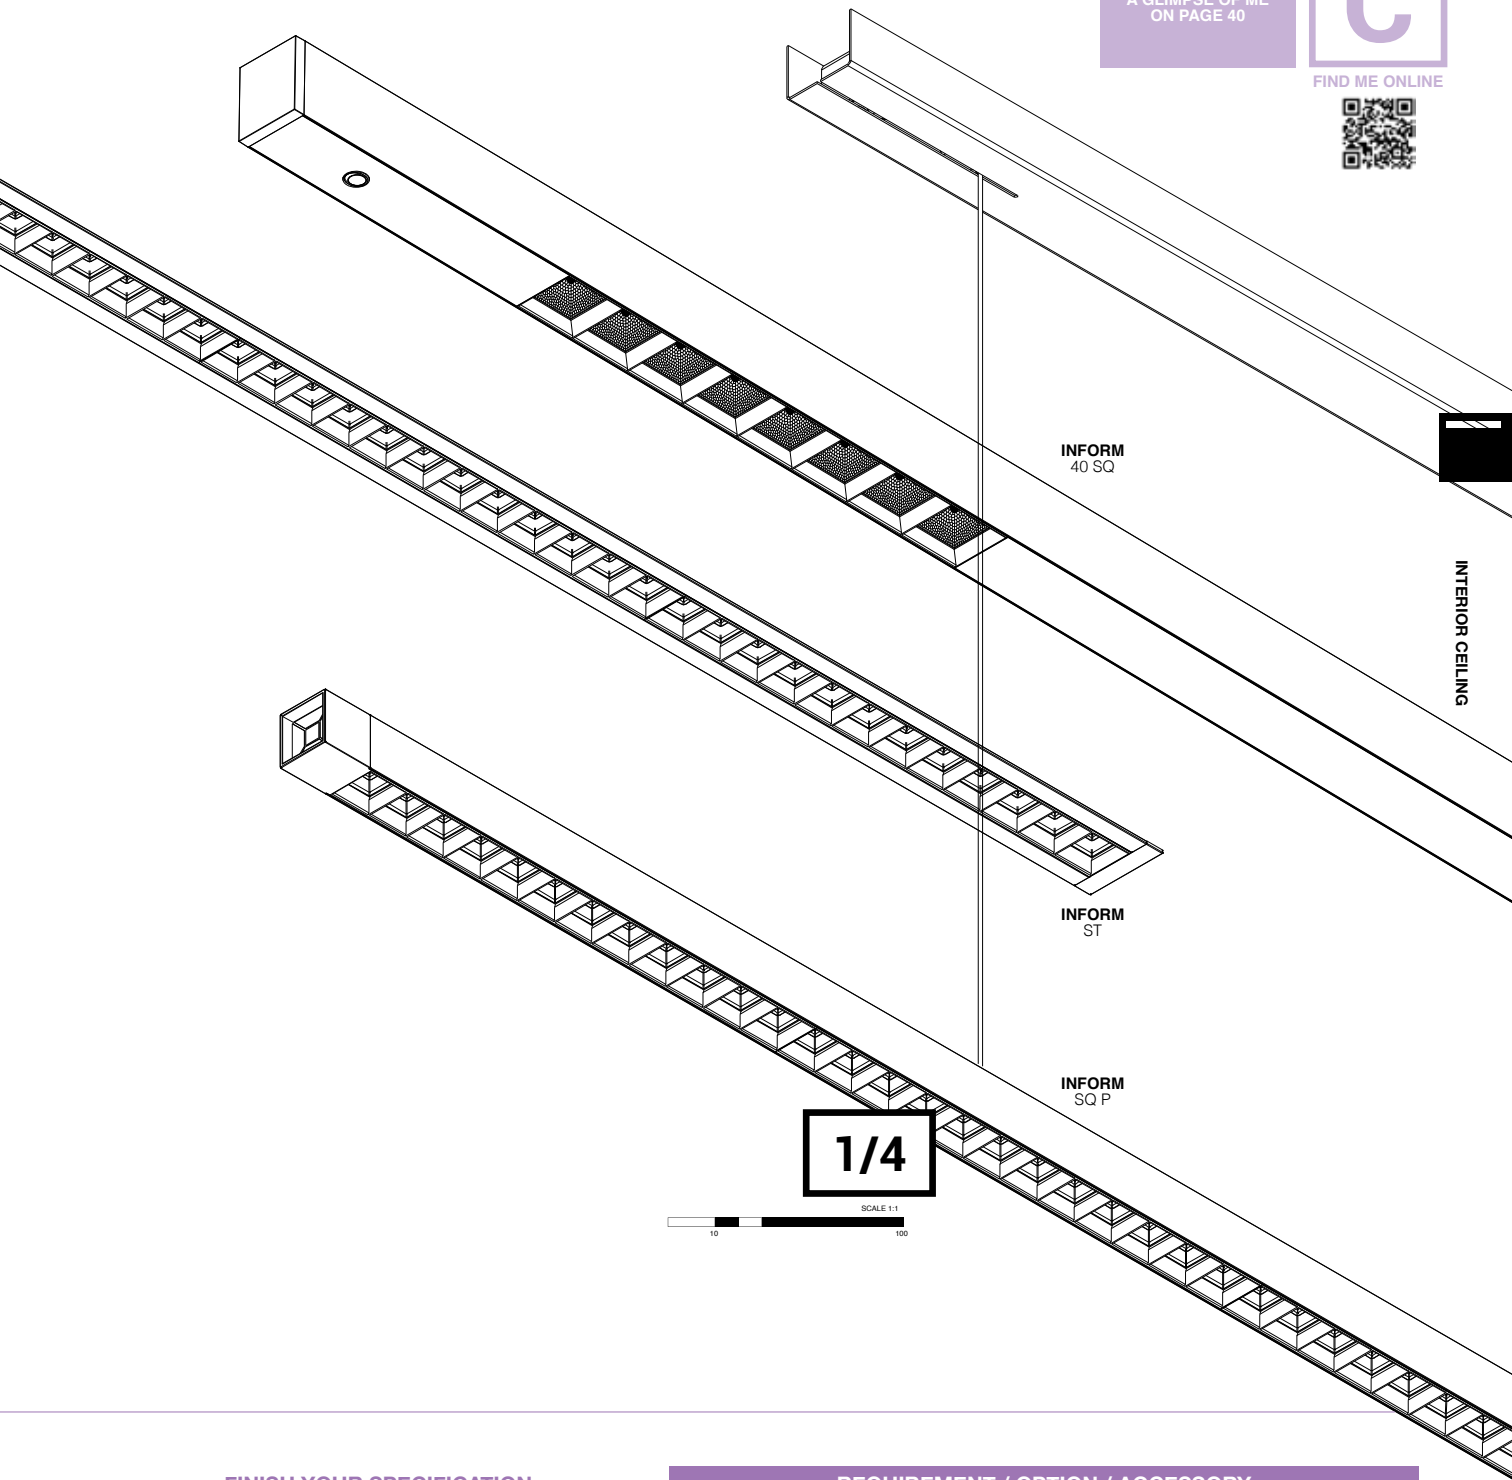


FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				INFORM ST		INFORM SQ							
				848-3	1124-4	1400-6	144-3	144-5	200-4	200-7	282-6	282-10	
NON DIM	17W	25510 0420	ⓘ min. 78	R			R						
	25W	25510 0440	ⓘ min. 78		R				R				
	45W	25510 0430	ⓘ min. 78			R		R		R	R		
	60W	25510 0450	ⓘ min. 92										R
DALI DIM	17W	25510 0375	ⓘ min. 78	R			R						
	25W	25510 0395	ⓘ min. 78		R				R				
	45W	25510 0385	ⓘ min. 78			R		R		R	R		
	60W	25510 0405	ⓘ min. 92										R

B

INFORM SQ



INFORM

SQ P DOWN

L1440mm

L2000mm

L2820mm

LED *	4000K CRI>80	67°	9,8W / 1768lm (HP) 15,2W / 2596lm	144-3	25511 8420 ◊		
			16,4W / 2946lm (HP) 25,3W / 4326lm	144-5	25513 8420 ◊		
			13,2W / 2356lm (HP) 20,2W / 3460lm	200-4		25515 8420 ◊	
			22,9W / 4124lm (HP) 35,4W / 6056lm	200-7		25517 8420 ◊	
			19,8W / 3534lm (HP) 30,3W / 5190lm	282-6			25519 8420 ◊
			32,8W / 5892lm (HP) 50,6W / 8652lm	282-10			25521 8420 ◊
			9,8W / 1688lm (HP) 15,2W / 2477lm	144-3	25511 8320 ◊		
			16,4W / 2814lm (HP) 25,3W / 4128lm	144-5	25513 8320 ◊		
			13,2W / 2252lm (HP) 20,2W / 3302lm	200-4		25515 8320 ◊	
			22,9W / 3940lm (HP) 35,4W / 5779lm	200-7		25517 8320 ◊	
19,8W / 3378lm (HP) 30,3W / 4953lm	282-6			25519 8320 ◊			
32,8W / 5628lm (HP) 50,6W / 8256lm	282-10			25521 8320 ◊			

* Power selection to be set on driver


◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

POWER VIA CABLE SUSPENSION

INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L1440 & L2000

INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L2820

◊ IP20



INFORM

UGR
<16

SQ P DOWN

L3920mm

L4750mm

L5850mm

LED *	3000K CRI>80	67°	19,6W / 3376lm (HP) 30,4W / 4954lm	392-6	25570 8320 ◊		
			29,4W / 5064lm (HP) 45,6W / 7431lm	475-9		25572 8320 ◊	
			29,4W / 5064lm (HP) 45,6W / 7431lm	585-9			25574 8320 ◊

* Power selection to be set on driver



◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

INCL.1 x CABLE 2 x 0,75mm²

INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L392-6

INCL.4 x CABLE SUSP. SINGLE AUTO 1,6m FOR L475-9 & L585-9

◊ IP20

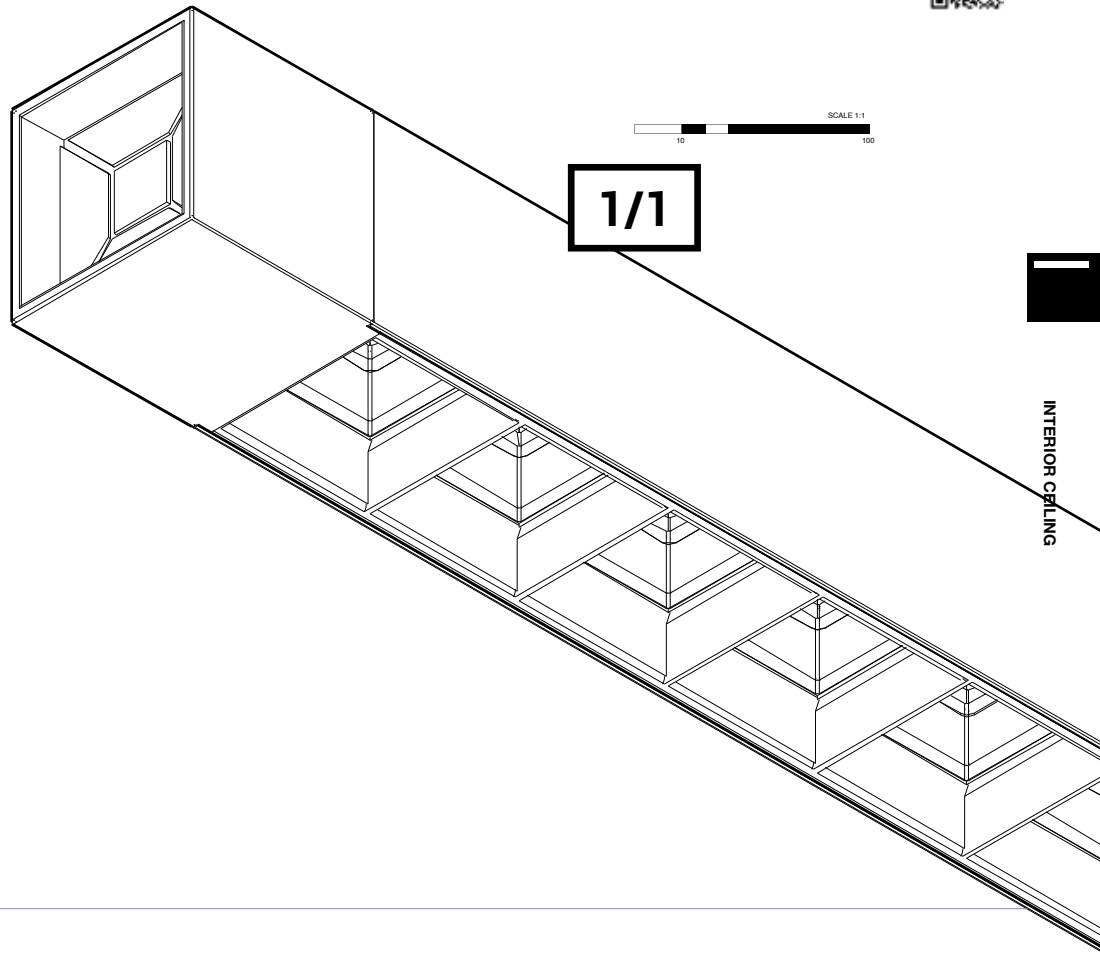

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

INFORM SQ P DOWN

				144-3	144-5	200-4	200-7	282-6	282-10	392-6	475-9	585-9
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER												
NON DIM	17W	25510 0420	<i>i</i> min. 78	R								
	25W	25510 0440	<i>i</i> min. 78			R						
	45W	25510 0430	<i>i</i> min. 78		R		R	R		R		
	60W	25510 0450	<i>i</i> min. 92						R		R	R
DALI DIM	17W	25510 0375	<i>i</i> min. 78	R								
	25W	25510 0395	<i>i</i> min. 78			R						
	45W	25510 0385	<i>i</i> min. 78		R		R	R		R		
	60W	25510 0405	<i>i</i> min. 92						R		R	R
or POWERBOX												
NON DIM	25W	25510 0030 B / W	800 x 40 x 30	R								
	50W	25510 0010 B / W	800 x 40 x 30		R	R	R	R				
		25510 0480 B / W	570 x 48 x 40							R		
	75W	25510 0020 B / W	800 x 40 x 30						R			
DALI DIM	35W	25510 0500 B / W	570 x 48 x 40								R	R
	35W	25510 0045 B / W	800 x 40 x 30	R								
	50W	25510 0015 B / W	800 x 40 x 30		R	R	R	R				
		25510 0495 B / W	800 x 40 x 30								R	
		25510 0025 B / W	800 x 40 x 30							R		
75W	25510 0515 B / W	800 x 40 x 30								R	R	
INSTALLATION												
SUSPENSION + CONNECTION ST		15225 0350 B / W		R*	R*	R*	R*	R*	R*			
CONNECTION ST		15225 0360 B / W								O	O	O
SUSPENSION ST		15225 0340 B / W								O	O	O

* REQUIRED IN COMBINATION WITH POWER SUPPLY

INFORM SQ



INFORM

UGR <16

SQ P DOWN-UP

L1440mm

L2000mm

L2820mm

LED	UP / DOWN	Beam Angle	Model	Code
4000K CRI>80	UP 13,1W / 2357lm DOWN 9,8W / 1768lm	67° DOWN	144-3	25512 8420 ◊
	UP 13,1W / 2357lm DOWN 16,4W / 2946lm		144-5	25514 8420 ◊
	UP 19,7W / 3535lm DOWN 13,2W / 2356lm		200-4	25516 8420 ◊
	UP 19,7W / 3535lm DOWN 22,9W / 4124lm		200-7	25518 8420 ◊
	UP 26,2W / 4714lm DOWN 19,8W / 3534lm		282-6	25520 8420 ◊
	UP 26,2W / 4714lm DOWN 32,8W / 5892lm		282-10	25522 8420 ◊
3000K CRI>80	UP 13,1W / 2252lm DOWN 9,8W / 1688lm	IP20	144-3	25512 8320 ◊
	UP 13,1W / 2252lm DOWN 16,4W / 2814lm		144-5	25514 8320 ◊
	UP 19,7W / 3377lm DOWN 13,2W / 2252lm		200-4	25516 8320 ◊
	UP 19,7W / 3377lm DOWN 22,9W / 3940lm		200-7	25518 8320 ◊
	UP 26,2W / 4502lm DOWN 19,8W / 3378lm		282-6	25520 8320 ◊
	UP 26,2W / 4502lm DOWN 32,8W / 5628lm		282-10	25522 8320 ◊


◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

POWER VIA CABLE SUSPENSION

INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L1440 & L2000

INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L2820

◊ IP20



INFORM

UGR <16

SQ P DOWN-UP

L3920mm

L4750mm

L5850mm

LED	UP / DOWN	Beam Angle	Model	Code
3000K CRI>80	UP 33,2W / 5548lm DOWN 19,6W / 3376lm	67°	392-6	25571 8320 ◊
	UP 39,6W / 6756lm DOWN 29,4W / 5064lm		475-9	25573 8320 ◊
	UP 45W / 7860lm DOWN 29,4W / 5064lm		585-9	25575 8320 ◊

◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

INCL.1 x CABLE 4 x 0,75mm²


INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L392-6

INCL.4 x CABLE SUSP. SINGLE AUTO 1,6m FOR L475-9 & L585-9


◊ IP20




Position for Installation




DESK: 2 x 2000mm
PROFILE: 3920mm
LIGHT MODULES: 2 x 828mm



DESK: 3 x 1600mm
PROFILE: 4750mm
LIGHT MODULES: 3 x 828mm



DESK: 3 x 2000mm
PROFILE: 5850mm
LIGHT MODULES: 3 x 828mm



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

INFORM SQ P DOWN-UP

				144-3	144-5	200-4	200-7	282-6	282-10	392-6	475-9	585-9
LED POWER SUPPLY <small>MORE INFO TECHNICAL CHAPTER</small>												
NON DIM	45W	25510 0430	min. 78	R	R	R				R**	R**	
	60W	25510 0450	min. 92				R	R		R		R**
	100W	25510 0460	min. 106						R		R	
DALI DIM	45W	25510 0385	min. 78	R	R	R				R**	R**	
	60W	25510 0405	min. 92				R	R		R		R**
	100W	25510 0415	min. 106						R		R	
or POWERBOX												
NON DIM	50W	25510 0010 B / W	800 x 40 x 30	R	R	R						
	75W	25510 0020 B / W 20548 0500 B / W	800 x 40 x 30 570 x 48 x 40				R	R	R			R
DALI DIM	50W	25510 0015 B / W	800 x 40 x 30	R	R	R						
	75W	25510 0025 B / W 25510 0515 B / W	800 x 40 x 30 800 x 40 x 30				R	R	R			
	85W	25510 0475 B / W	570 x 48 x 40							R		R
INSTALLATION												
SUSPENSION + CONNECTION ST		15225 0350 B / W		R*	R*	R*	R*	R*	R*			
CONNECTION ST		15225 0360 B / W								O	O	O
SUSPENSION ST		15225 0340 B / W								O	O	O

* REQUIRED IN COMBINATION WITH POWER SUPPLY
** 1 DRIVER FOR UP + 1 DRIVER FOR DOWN


INFORM 40

MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

Batwing Curve for evenly lit ceilings

Tututututu Batwiiiiiiiiing

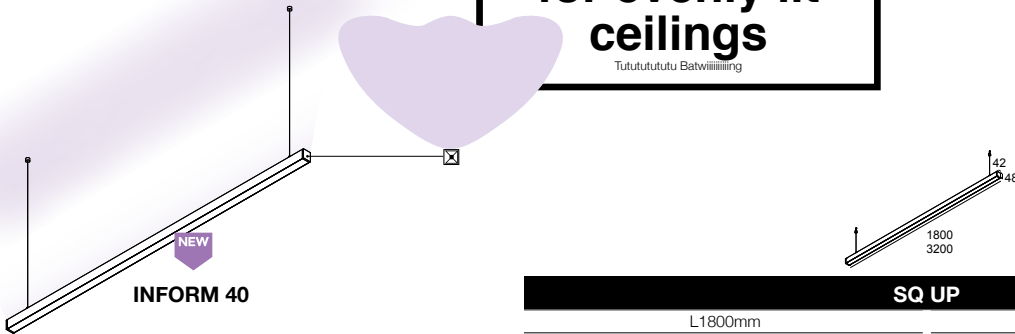

		L1800mm		L3200mm	
LED *	16,8W / 2771lm (HP) 26,4W / 4249lm	180	30729 8405 ◇		
	4000K CRI>80	320		30731 8405 ◇	
LED *	16,8W / 2643lm (HP) 26,4W / 4051lm	180	30729 8305 ◇		
	3000K CRI>80	320		30731 8305 ◇	
LED CRI>80	14,4W / 5000K / 2336lm - 2700K / 1952lm	180	30730 8005 ◇		
	TUNABLE WHITE 28,8W / 5000K / 4672lm - 2700K / 3904lm	320		30732 8005 ◇	

* POWER SELECTION TO BE SET ON DRIVER
** DALI DT6 TUNABLE WHITE


◇ B-B ●● / W-B ○○

INCL. 2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L180
INCL. 3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L320
1 x CABLE 5 x 0,75mm²
220-240V / 0150-60Hz

◇ IP20

PDS

Presence and Daylight Sensor



INFORM 40

UCR <19

SQ DOWN

		L1600mm		L1800mm		L3200mm		L3600mm		
		PDS		PDS		PDS		PDS		
LED *	4000K CRI>80	16,8W / 2771lm (HP) 26,4W / 4249lm	DALI DT6**	63°	160	30711 8435 ◇	30712 8435 ◇			
					180		30713 8435 ◇	30714 8435 ◇		
					320			30716 8435 ◇	30717 8435 ◇	
					360				30719 8435 ◇	30720 8435 ◇
LED *	3000K CRI>80	16,8W / 2643lm (HP) 26,4W / 4051lm	DALI DT6**	63°	160	30711 8335 ◇	30712 8335 ◇			
					180		30713 8335 ◇	30714 8335 ◇		
					320			30716 8335 ◇	30717 8335 ◇	
					360				30719 8335 ◇	30720 8335 ◇
LED CRI>80	TUNABLE WHITE	28,8W / 5000K / 4672lm - 2700K / 3904lm			320			30715 8035 ◇		
					360				30718 8035 ◇	

* POWER SELECTION TO BE SET ON DRIVER
** DALI DT6 TUNABLE WHITE

◇ B-B ●● / W-B ○○

PDS: PRESENCE AND DAYLIGHT SENSOR
220-240V / 0150-60Hz


◇ IP20



NEW

INFORM 40

UCR <16



SQ DOWN-UP

		L1600mm		L1800mm		L3200mm		L3600mm		
		PDS		PDS				PDS		
LED * 4000K CRI>80	UP 16,8W / 2771lm (HP) 24W / 3878lm	DALI DT6**	63°		30721 8435◇	30722 8435◇				
	DOWN 16,8W / 2771lm (HP) 24W / 3878lm				30723 8435◇	30724 8435◇				
LED * 3000K CRI>80	UP 16,8W / 2643lm (HP) 24W / 3699lm	DALI DT6**	63°		30721 8335◇	30722 8335◇				
	DOWN 16,8W / 2643lm (HP) 24W / 3699lm				30723 8335◇	30724 8335◇				
LED CRI>80	UP 28,8W / 5000K / 4672lm - 2700K / 3904lm	DALI DT6**	63°				30725 8035◇			
							30726 8035◇			
	DOWN 28,8W / 5000K / 4672lm - 2700K / 3904lm								30727 8035◇	
									30728 8035◇	

* POWER SELECTION TO BE SET ON DRIVER
** DALI DT8 TUNABLE WHITE





◇ B-B ●● / W-B ○○

PDS: PRESENCE AND DAYLIGHT SENSOR
INCL. 2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L160 & L180
INCL. 3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L320 & L360
1 x CABLE 5 x 0,75mm²
220-240V / 0/150-60Hz

◇ IP20

INTERIOR CEILING

Position for Installation




REQUIREMENT / OPTION / ACCESSORY

INSTALLATION	INFORM 40									
	SQ UP		SQ DOWN				SQ DOWN-UP			
	L180	L320	L160	L180	L320	L360	L160	L180	L320	L360
INF40 SQ 160/180 SUSPENSION SET 1,6m			2x O	2x O						
INF40 SQ 160/180 SUSPENSION SET 3m			2x O	2x O						
INF40 SQ 320/360 SUSPENSION SET 1,6m					3x O	3x O				
INF40 SQ 320/360 SUSPENSION SET 3m					3x O	3x O				
CONNECTION ST	O	O	O	O	O	O	O	O	O	O
CABLE BASE S	O	O	O	O	O	O	O	O	O	O
PDS REMOTE CONTROL			R*	R*	R*	R*	R*	R*	R*	R*
or PDS SENSOR PROGRAMMER			R*	R*	R*	R*	R*	R*	R*	R*

* ONLY FOR PDS VERSIONS

B


INFORM R PATENTED

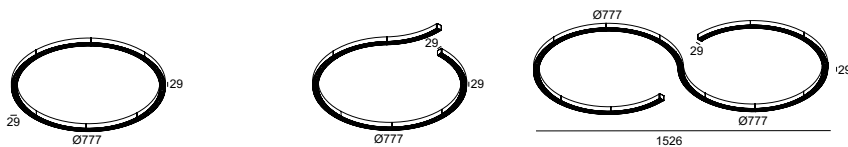

INFORM			UCR <19	R1	R2	R3
3000K CRI>90	LED 22,9W / 3504lm / 700mA	71°		26811 9320 ◊	26817 9320 ◊	26822 9320 ◊
	LED 33,9W / 5275lm / 1050mA			26811 9220 ◊	26817 9220 ◊	
2700K CRI>90	LED 22,9W / 3456lm / 700mA			26811 9320 ◊	26817 9320 ◊	26822 9320 ◊
	LED 33,9W / 5208lm / 1050mA			26811 9220 ◊	26817 9220 ◊	26822 9220 ◊

◊ B-B ●● / B-MMAT ●●● / FG-B ●●● / W-B ○●● / W-W ○○○

IP20

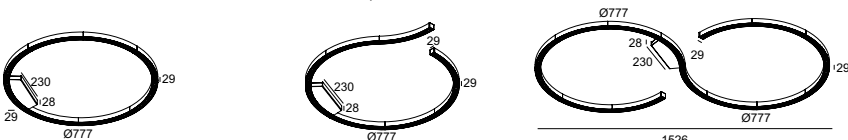


INFORM			UCR <19	R1+	R2+	R3+
3000K CRI>90	LED 22,9W / 3504lm	DALI	71°	26813 9325 ◊	26819 9325 ◊	26821 9325 ◊
	LED 33,9W / 5275lm			26813 9225 ◊	26819 9225 ◊	
2700K CRI>90	LED 22,9W / 3456lm			26813 9325 ◊	26819 9325 ◊	26821 9325 ◊
	LED 33,9W / 5208lm			26813 9225 ◊	26819 9225 ◊	26821 9225 ◊

◊ B-B ●● / B-MMAT ●●● / FG-B ●●● / W-B ○●● / W-W ○○○

220-240V / 50-60Hz

IP20

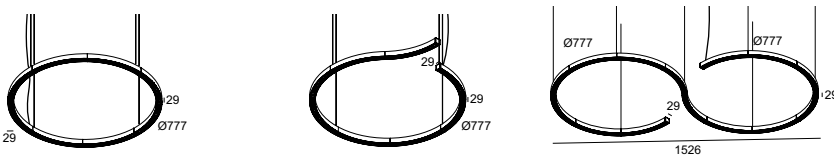

INFORM			UCR <16	R1 DOWN-UP	R2 DOWN-UP	R3 DOWN-UP
3000K CRI>90	LED UP 11,5W / 1752lm / 700mA	71°		26812 9320 ◊	26818 9320 ◊	26823 9320 ◊
	LED 22,9W / 3504lm / 700mA			26812 9220 ◊	26818 9220 ◊	
2700K CRI>90	LED UP 17W / 2638lm / 1050mA			26812 9320 ◊	26818 9320 ◊	26823 9320 ◊
	LED 33,9W / 5275lm / 1050mA			26812 9220 ◊	26818 9220 ◊	26823 9220 ◊


◊ B-B ●● / B-MMAT ●●● / FG-B ●●● / W-B ○●● / W-W ○○○

INCL. 1 x CABLE 5 x 0,75mm²
+ 4 x CABLE SUSP. SINGLE AUTO 1,6m

INCL. 1 x CABLE 5 x 0,75mm²
+ 7 x CABLE SUSP. SINGLE AUTO 1,6m

IP20

IP20

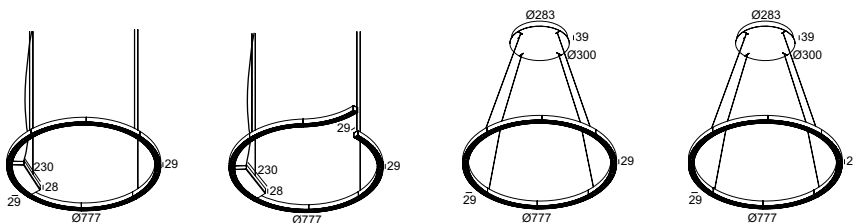

INFORM			UCR <16	R1+ DOWN-UP	R2+ DOWN-UP	R1+ DOWN	R1+ CS DOWN-UP
3000K CRI>90	LED UP 11,5W / 1752lm	DALI	71°	26814 9325 ◊	26820 9325 ◊	26815 9325 ◊	26816 9325 ◊
	LED DOWN 22,9W / 3504lm			26814 9225 ◊	26820 9225 ◊		
2700K CRI>90	LED UP 11,5W / 1728lm			26814 9325 ◊	26820 9325 ◊	26815 9325 ◊	26816 9325 ◊
	LED DOWN 22,9W / 3456lm			26814 9225 ◊	26820 9225 ◊	26815 9225 ◊	26816 9225 ◊

◊ B-B ●● / B-MMAT ●●● / FG-B ●●● / W-B ○●● / W-W ○○○


220-240V / 50-60Hz

INCL. 1 x CABLE 5 x 0,75mm²
+ 4 x CABLE SUSP. SINGLE AUTO 1,6m

POWER VIA CABLE SUSPENSION
4 x CABLE SUSP. SINGLE AUTO 1,6m

IP20

IP20

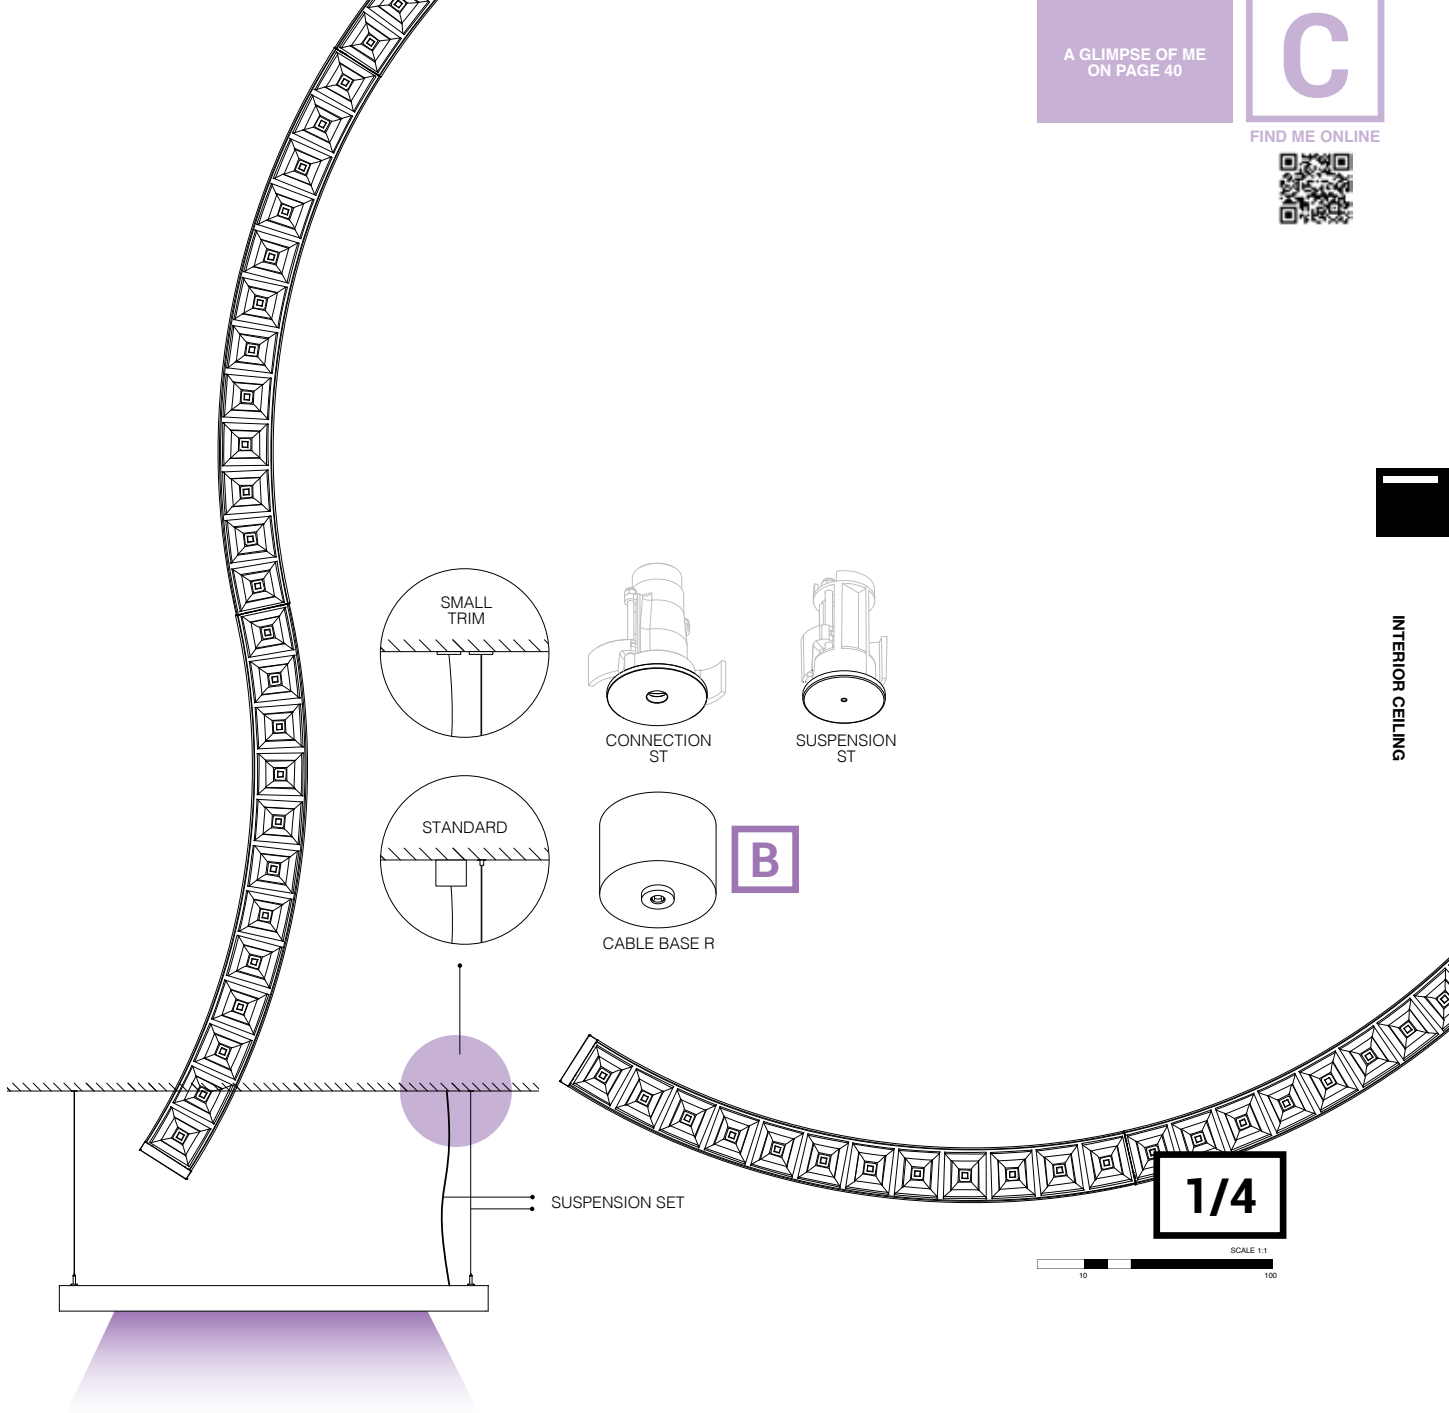

FINISH YOUR SPECIFICATION



REQUIREMENT / OPTION / ACCESSORY

INFORM

				DOWN-UP											R1+ CS	
				R1	R2	R3	R1+	R2+	R3+	R1	R2	R3	R1+	R2+	DOWN	D/U
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT																
DALI DIM	13	300 90 68	i min. 72	R	R					2 x R	2 x R					
DALI DIM	16	300 90 63	i min. 84			R						2 x R				
INSTALLATION																
CONNECTION ST		15225 0360 B / W		o	o	o	o	o	o	o	o	o	o	o		
SUSPENSION ST		15225 0340 B / W		o	o	o	o	o	o	o	o	o	o	o		
CABLE BASE R		203 99 55 ANO / B / W		o	o	o	o	o	o	o	o	o	o	o		
COVERSET R Ø100		204 00 100 B / W		o	o	o	o	o	o	o	o	o	o	o		
SUSPENSION SET 30		15225 0300 B / W		o	o					o	o					
SUSPENSION SET 31		15225 0310 B / W					o	o								
SUSPENSION SET 32		15225 0320 B / W						o								
SUSPENSION SET 33		15225 0330 B / W				o						o				



INFORM R PATENTED

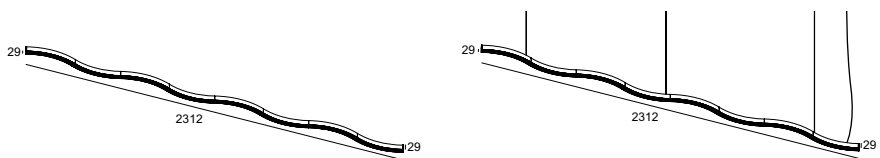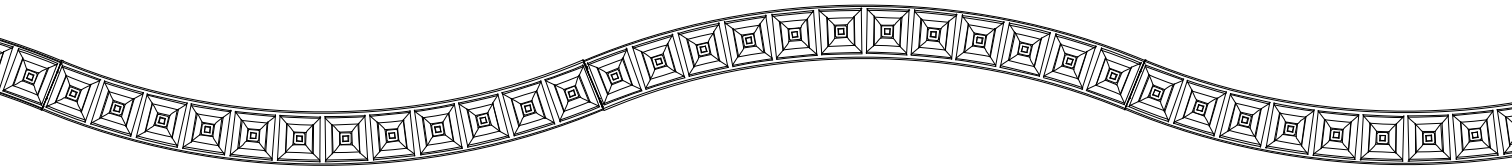

INFORM

UGR <16

R4

R4 C DOWN

R4 C DOWN-UP

3000K CRI>90	LED 22,9W / 3504lm / 700mA	71°	26824 9320 ◇	26825 9320 ◇	
	LED UP 11,5W / 1752lm / 700mA DOWN 22,9W / 3504lm / 700mA				26826 9320 ◇
2700K CRI>90	LED 22,9W / 3456lm / 700mA		26824 9220 ◇	26825 9220 ◇	
	LED UP 11,5W / 1728lm / 700mA DOWN 22,9W / 3456lm / 700mA				26826 9220 ◇

◇ B-B ●● / B-MMAT ●● / FG-B ●● / W-B ○● / W-W ○○

INCL. 1 x CABLE 2 x 0.75mm²



INCL. 1 x CABLE 5 x 0.75mm²

+ 3 x CABLE SUSP. SINGLE AUTO 1,6m

+ 3 x CABLE SUSP. SINGLE AUTO 1,6m

◇|| IP20

◇|| IP20

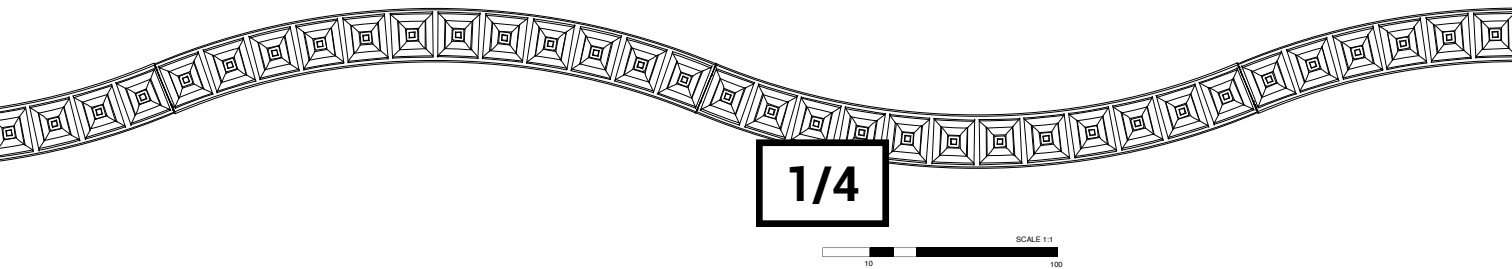




FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				INFORM		
				R4	R4 C DOWN	R4 C DOWN-UP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
DALI DIM	13	300 90 68	min. 72	R	R	R *
or POWERBOX						
DALI DIM	26810 0015 B / W	186 x 35 x 66			R	
	26810 0025 B / W	320 x 35 x 66				R
INSTALLATION						
CONNECTION ST	15225 0360 B / W			O	O	O
SUSPENSION ST	15225 0340 B / W			O	O	O
CABLE BASE R	203 99 55 ANO / B / W			O	O	O
COVERSET R Ø100	204 00 100 B / W			O	O	O

* 1 DRIVER FOR UP + 1 DRIVER FOR DOWN

D-LINER



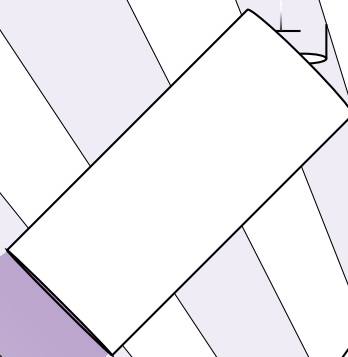


C

FIND ME ONLINE



INTERIOR CEILING

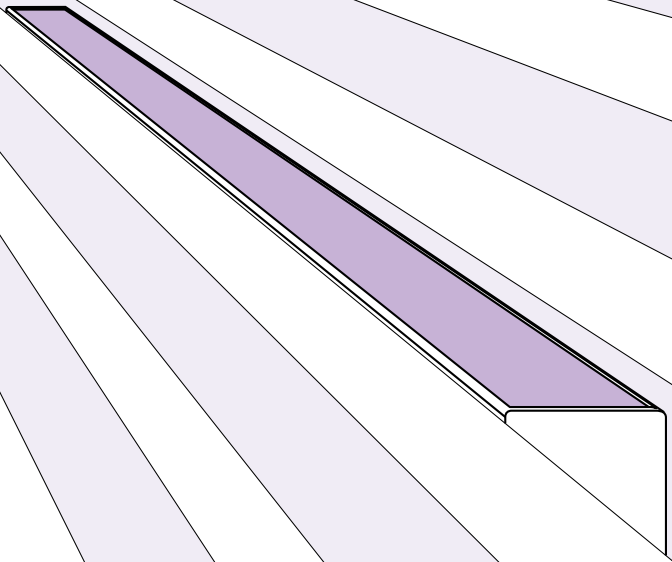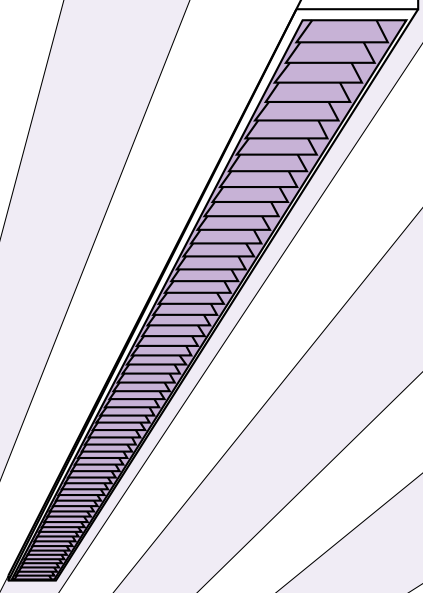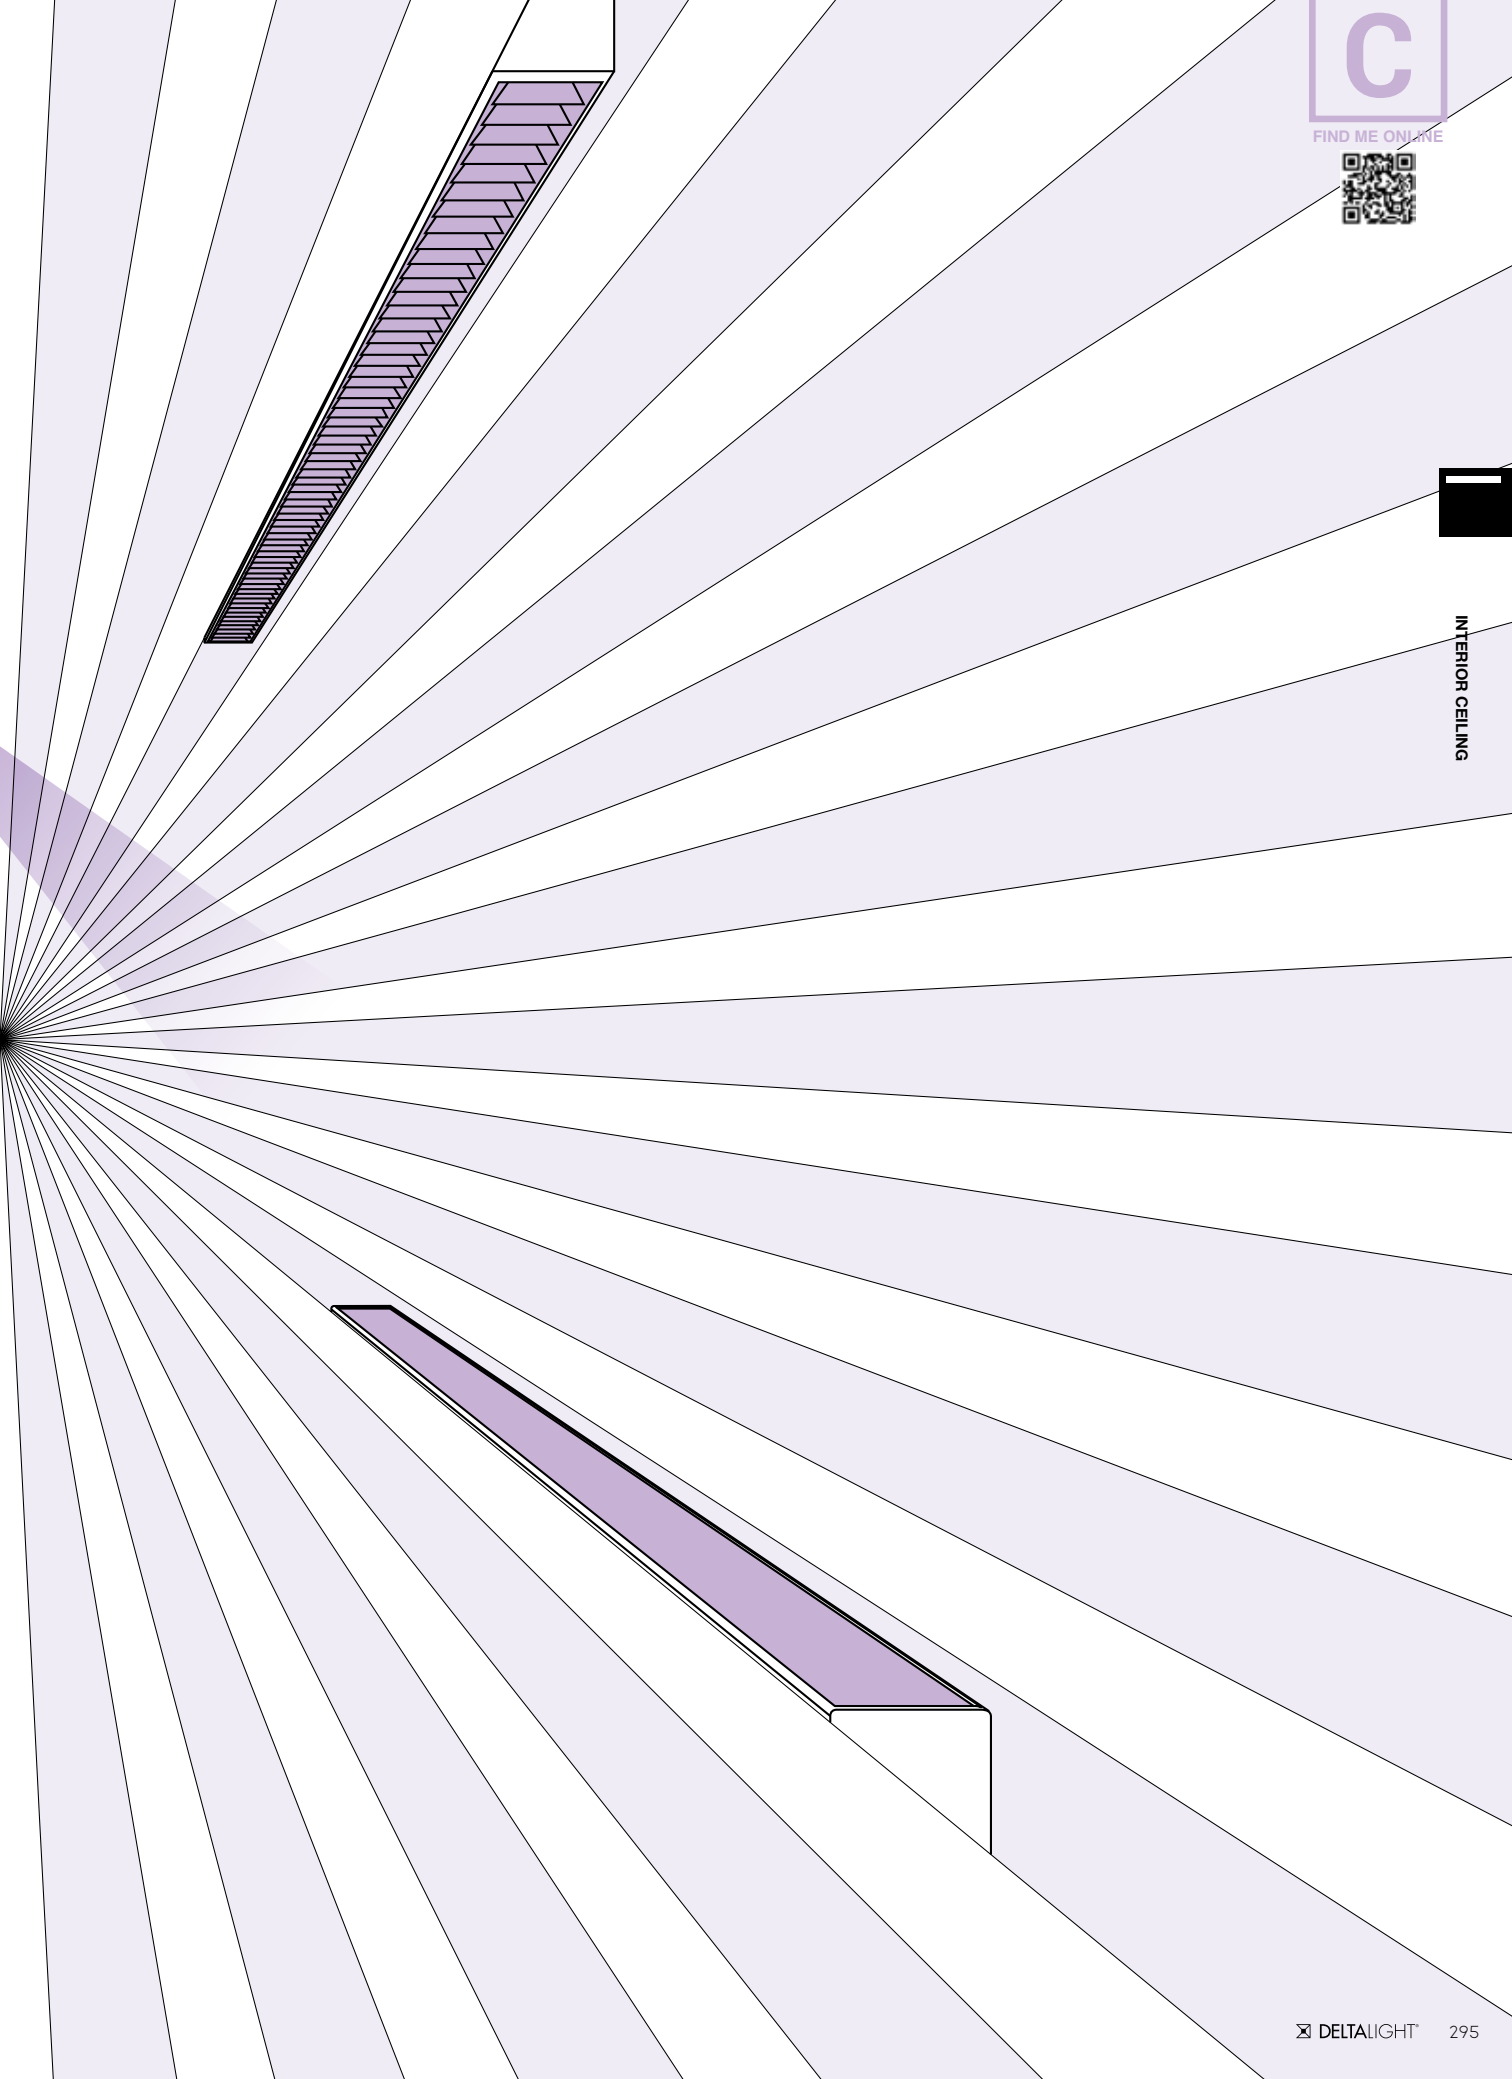

D-LINER

Every year, regulations on building and renovation get stricter in terms of energy-efficiency, eco-friendliness and sustainability. Apart from lighting, this also impacts cooling and heating, ventilation, acoustics, ... As a consequence, trends and challenges arise to combine lighting with ventilation, acoustics and technical or smart ceiling solutions.


Two examples of high-end technical ceilings are the SAPP ceiling of Interalu and **HeartFelt** ceiling of **Hunter-Douglas**. **SAPP** stands for Smart Acoustic Passive Power, it combines an aesthetic design and optimal acoustics into a climate-control ceiling. The HeartFelt ceiling is a felt ceiling system with great acoustic characteristics. Both ceiling systems build on modularity and allow for a linear lighting solution in between or in line with the panels.

With D-Liner, Delta Light offers 3 types of lighting solutions that match these ceiling types.

www.deltalight.com/dliner


HD 30BD

- 1 D-Liner 19 SL 30BD
- 2 D-Liner 19 INFORM SAPP/ 30BD
- 3 D-Liner Sensor
- 4 D-Liner 30 SBL 30BD + DALI Driver
- 5 D-Liner 30 SBL 30BD Remote Driver
- 6 D-Liner 30 INFORM 30BD + DALI Driver
- 7 D-Liner 30 INFORM 30BD Remote Driver

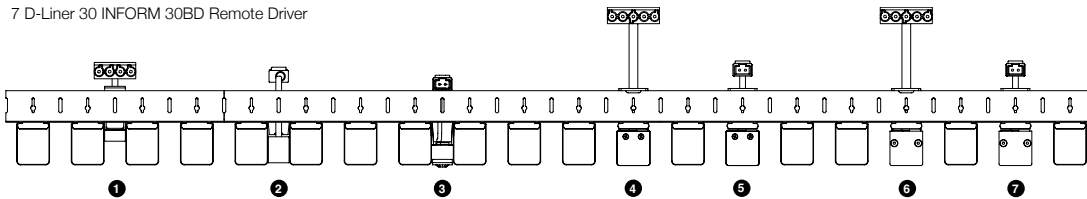


SAPP 30/20

- 1 D-Liner 19 SL SAPP
- 2 D-Liner 19 INFORM SAPP/ 30BD
- 3 D-Liner Sensor
- 4 D-Liner 30 SBL SAPP + DALI Driver
- 5 D-Liner 30 SBL SAPP Remote Driver
- 6 D-Liner 30 INFORM SAPP + DALI Driver
- 7 D-Liner 30 INFORM SAPP Remote Driver

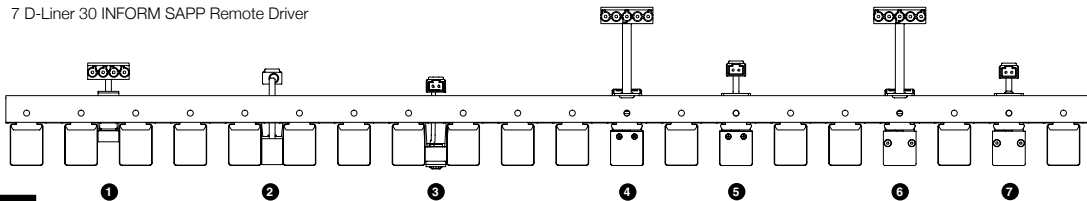

HD HEARTFELT

- 1 D-Liner 30 SBL HF40 + DALI Driver
- 2 D-Liner 30 SBL HF40 Remote Driver
- 3 D-Liner 30 INFORM HF40 + DALI Driver
- 4 D-Liner 30 INFORM HF40 Remote Driver

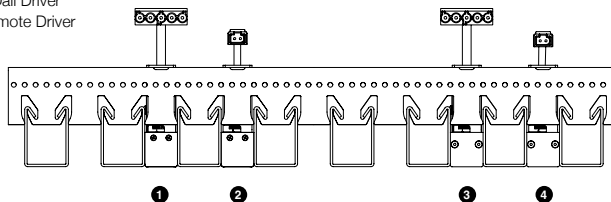




TASK LIGHTING

NEW

D-LINER 19 INFORM

UGR <19

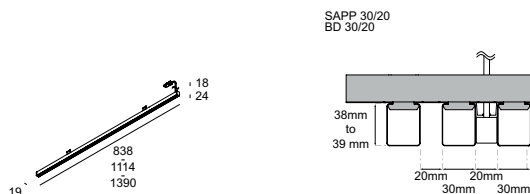

SAPP/30BD		
L838mm	L1114mm	L1390mm
EXCL.POWER SUPPLY	EXCL.POWER SUPPLY	EXCL.POWER SUPPLY

LED *	HP	Beam Angle	Color	Power	Light Output
4000K / CRI>80	9,8W / 1768lm	67°	P08	29129 8420	◇
	13,1W / 2357lm		P11	29130 8420	◇
	16,4W / 2946lm		P13	29131 8420	◇
3000K CRI>80	9,8W / 1688lm	67°	P08	29129 8320	◇
	13,1W / 2251lm		P11	29130 8320	◇
	16,4W / 2814lm		P13	29131 8320	◇

* Power selection to be set on driver

◇ B ●
 INCL.1 x CABLE 2 x 0,75mm² 1m BLACK + WIELAND PLUG 2P (FOR REMOTE DRIVER)
 INCL.2 x BUTTERFLY BRACKET SAPP/30BD
 ◇◇ IP20



INTERIOR CEILING

MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

B

PRESENCE & DAYLIGHT SENSOR
 DALI 2 BUS CONNECTION
 INCL.1 x CABLE 2 x 0,75mm² 1m BLACK + WIELAND PLUG 2P

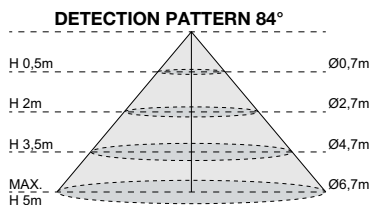

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

D-LINER 19 INFORM		SAPP/30BD		
		L838mm	L1114mm	L1390mm
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER				
DALI DIM	17W	25510 0375	200 x 70 x 31	R *
	25W	25510 0395	200 x 70 x 31	R *
	45W	25510 0385	215 x 70 x 31	R *
CONTROL				
D-LINER PRESENCE & DAYLIGHT SENSOR DIM5	29110 0065 B/W		○	○

* REMOTE INSTALLATION

B


D-LINER

TASK LIGHTING

NEW

D-LINER 30 INFORM

UCR <19

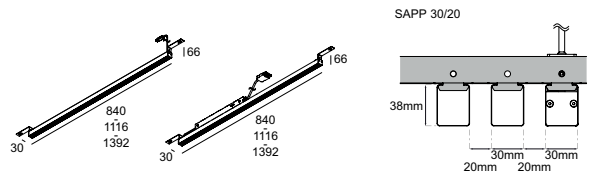

		SAPP					
		L840mm		L1116mm		L1392mm	
		EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
LED *	9,8W / 1768lm (HP) 15,2W / 2596lm		P08	29111 8420 ◊	29114 8425 ◊		
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11		29112 8420 ◊	29115 8425 ◊	
	16,4W / 2946lm (HP) 25,3W / 4326lm	67°	P13				29113 8420 ◊ 29116 8425 ◊
LED *	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	29111 8320 ◊	29114 8325 ◊		
	13,1W / 2251lm (HP) 20,3W / 3302lm	IP20	P11		29112 8320 ◊	29115 8325 ◊	
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13				29113 8320 ◊ 29116 8325 ◊

* Power selection to be set on driver

◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

INCL.2 x SUSPENSION BRACKETS SAPP

FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P ◊


FOR DALI: INCL.1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz ◊

A

NEW

D-LINER 30 INFORM

UCR <19

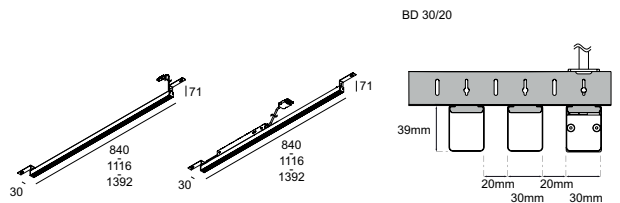

		30BD HUNTER DOUGLAS					
		L840mm		L1116mm		L1392mm	
		EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
LED *	9,8W / 1768lm (HP) 15,2W / 2596lm		P08	29117 8420 ◊	29120 8425 ◊		
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11		29118 8420 ◊	29121 8425 ◊	
	16,4W / 2946lm (HP) 25,3W / 4326lm	67°	P13				29119 8420 ◊ 29122 8425 ◊
LED *	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	29117 8320 ◊	29120 8325 ◊		
	13,1W / 2251lm (HP) 20,3W / 3302lm	IP20	P11		29118 8320 ◊	29121 8325 ◊	
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13				29119 8320 ◊ 29122 8325 ◊

* Power selection to be set on driver

◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

INCL.2 x SUSPENSION BRACKETS 30BD

FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P ◊


FOR DALI: INCL.1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz ◊

MLT - MELANOPIC LIGHT TECHNOLOGY

NEW

D-LINER 30 INFORM

UCR <19

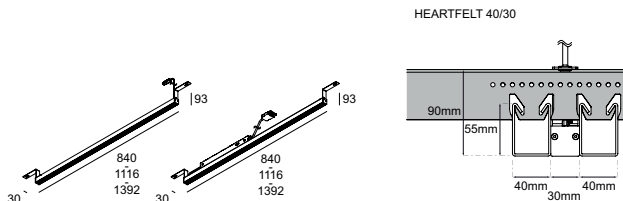

INTERIOR CEILING

HF40 HEARTFELT

		L840mm		L1116mm		L1392mm	
		EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI
LED *	9,8W / 1768lm (HP) 15,2W / 2596lm	P08 -----	29123 8420 ◊	29126 8425 ◊			
	13,1W / 2357lm (HP) 20,3W / 3461lm				29124 8420 ◊	29127 8425 ◊	
	16,4W / 2946lm (HP) 25,3W / 4326lm						29125 8420 ◊
4000K / CRI>80	67°	IP20					
LED *	9,8W / 1688lm (HP) 15,2W / 2477lm	P08 -----	29123 8320 ◊	29126 8325 ◊			
	13,1W / 2251lm (HP) 20,3W / 3302lm				29124 8320 ◊	29127 8325 ◊	
	16,4W / 2814lm (HP) 25,3W / 4128lm						29125 8320 ◊
3000K CRI>80	IP20	P11 -----					

* Power selection to be set on driver

◊ B-B ●●● / B-MMAT ●●● / W-B ○●● / W-W ○○○

INCL. 2 x SUSPENSION BRACKETS HF40


FOR REMOTE DRIVER: INCL. 1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P

FOR DALI: INCL. 1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz


B

PRESENCE & DAYLIGHT SENSOR

DALI 2 BUS CONNECTION
INCL. 1 x CABLE 2 x 0,75mm² 1m
BLACK + WIELAND PLUG 2P



DETECTION PATTERN 84°

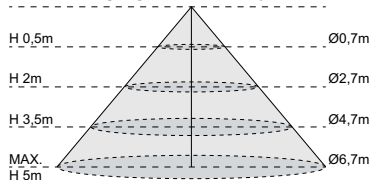

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

D-LINER 30 INFORM

SAPP		30BD			HF40			
L840mm	L1116mm	L1392mm	L840mm	L1116mm	L1392mm	L840mm	L1116mm	L1392mm

LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER

DALI DIM	17W	25510 0375 *	200 x 70 x 31	R *			R *		R *	
	25W	25510 0395 *	200 x 70 x 31		R *		R *		R *	
	45W	25510 0385 *	215 x 70 x 31			R *		R *		R *

CONTROL

D-LINER PRESENCE & DAYLIGHT SENSOR DIM5	29110 0065 B/W									
---	----------------	--	--	--	--	--	--	--	--	--

* REMOTE INSTALLATION


B

D-LINER

GENERAL LIGHTING

NEW

D-LINER 30 SBL

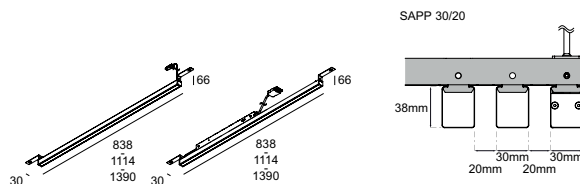

SAPP

L838mm		L1114mm		L1390mm	
EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI

4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	29211 9400 ◊	29214 9405 ◊		
	LED 36,4W / 4732lm		P11		29212 9400 ◊	29215 9405 ◊	
	LED 45,5W / 5915lm		P13				29213 9400 ◊
3000K CRI>90	LED 27,3W / 3413lm		P08	29211 9300 ◊	29214 9305 ◊		
	LED 36,4W / 4550lm		P11		29212 9300 ◊	29215 9305 ◊	
	LED 45,5W / 5688lm		P13				29213 9300 ◊


◊ B ● / W ○

INCL. 2 x SUSPENSION BRACKETS SAPP

FOR REMOTE DRIVER: INCL. 1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P ◊
 FOR DALI: INCL. 1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz ◊

NEW

D-LINER 30 SBL

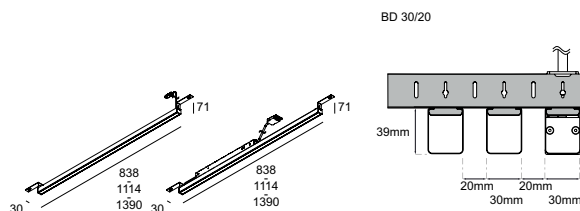

30BD HUNTER DOUGLAS

L838mm		L1114mm		L1390mm	
EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI

4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	29217 9400 ◊	29220 9405 ◊		
	LED 36,4W / 4732lm		P11		29218 9400 ◊	29221 9405 ◊	
	LED 45,5W / 5915lm		P13				29219 9400 ◊
3000K CRI>90	LED 27,3W / 3413lm		P08	29217 9300 ◊	29220 9305 ◊		
	LED 36,4W / 4550lm		P11		29218 9300 ◊	29221 9305 ◊	
	LED 45,5W / 5688lm		P13				29219 9300 ◊


◊ B ● / W ○

INCL. 2 x SUSPENSION BRACKETS 30BD

FOR REMOTE DRIVER: INCL. 1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P ◊
 FOR DALI: INCL. 1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz ◊



D-LINER 30 SBL

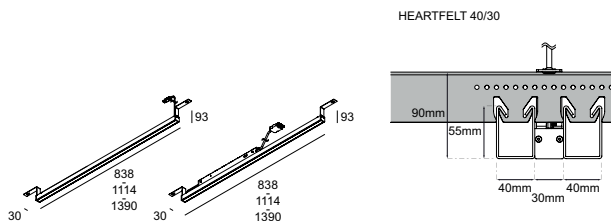

HF40 HEARTFELT

L838mm		L1114mm		L1390mm	
EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI	EXCL. POWER SUPPLY	DALI

4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	29223 9400 ◊	29226 9405 ◊				
	LED 36,4W / 4732lm		P11			29224 9400 ◊	29227 9405 ◊		
	LED 45,5W / 5915lm		P13					29225 9400 ◊	29228 9405 ◊
3000K CRI>90	LED 27,3W / 3413lm		P08	29223 9300 ◊	29226 9305 ◊				
	LED 36,4W / 4550lm		P11			29224 9300 ◊	29227 9305 ◊		
	LED 45,5W / 5688lm		P13					29225 9300 ◊	29228 9305 ◊

◊ B ● / W ○

INCL. 2 x SUSPENSION BRACKETS HF40


FOR REMOTE DRIVER: INCL. 1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P ◊

FOR DALI: INCL. 1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz ◊




PRESENCE & DAYLIGHT SENSOR

DALI 2 BUS CONNECTION
INCL. 1 x CABLE 2 x 0,75mm² 1m
BLACK + WIELAND PLUG 2P



DETECTION PATTERN 84°

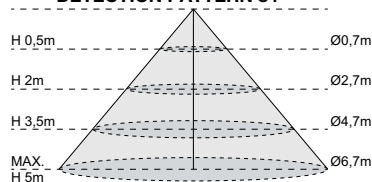

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

D-LINER 30 SBL

SAPP			30BD			HF40		
L838mm	L1114mm	L1390mm	L838mm	L1114mm	L1390mm	L838mm	L1114mm	L1390mm

LED POWER SUPPLY MORE INFO TECHNICAL CHAPTER

DALI DIM	50W	25510 0075	360 x 30 x 21	R*	R*		R*	R*		R*	R*
	75W	25510 0085	360 x 30 x 21			R*			R*		R*

CONTROL

D-LINER PRESENCE & DAYLIGHT SENSOR DIM5	29110 0065 B/W			○	○	○	○	○	○		
---	----------------	--	--	---	---	---	---	---	---	--	--

* REMOTE INSTALLATION

INTERIOR CEILING




D-LINER

ACCENT
LIGHTING

A




Toolfree
installation

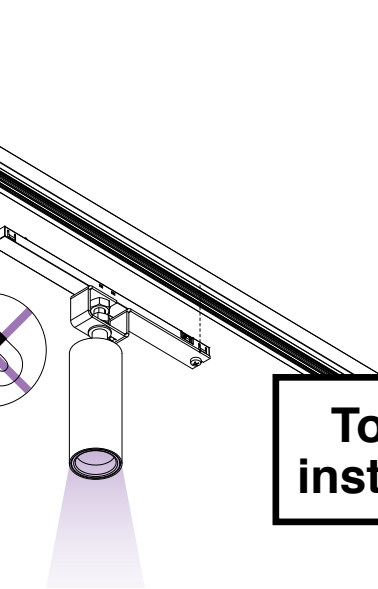

NEW

D-LINER 19 SL

IP20

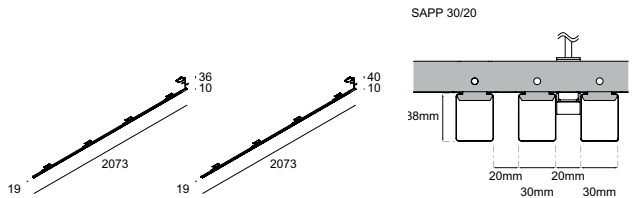



SAPP	30BD
L2000mm	L2000mm

29110 0010 ◊	29110 0030 ◊
--------------	--------------

◊ B ●	
INCL.4 x SUSPENSION BRACKET SAPP	INCL.4 x SUSPENSION BRACKET 30BD
INCL.1 x CABLE 5 x 0,75mm ² 1m black + WIELAND PLUG 4P	
MAX. DISTANCE BETWEEN BRACKETS 60CM	





NEW
UHO



		UHO		UHO L			
		MDL	DALI	MDL	DALI		
3000K CRI>90	LED 2.3W / 260lm / 48V-DC	IP20	30°	27311 9320 ◊	27312 9325 ◊	27319 9320 ◊	27320 9325 ◊
2700K CRI>90	LED 2.3W / 245lm / 48V-DC			27311 9220 ◊	27312 9225 ◊	27319 9220 ◊	27320 9225 ◊

◊ B ● / FBR ● / FG ● / GC ● / W ○



NEW
SPY 27



		SPY 27		SPY 27 L			
		MDL	DALI	MDL	DALI		
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	27313 9320 ◊	27314 9325 ◊	27321 9320 ◊	27322 9325 ◊
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			27313 9220 ◊	27314 9225 ◊	27321 9220 ◊	27322 9225 ◊

◊ B ● / FBR ● / FG ● / GC ● / W ○

NEW
SPY 39



		SPY 39		SPY 39 L			
		MDL	DALI	MDL	DALI		
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	27315 9320 ◊	27316 9325 ◊	27323 9320 ◊	27324 9325 ◊
			40°	27315 9330 ◊	27316 9335 ◊	27323 9330 ◊	27324 9335 ◊
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	27315 9220 ◊	27316 9225 ◊	27323 9220 ◊	27324 9225 ◊
			40°	27315 9230 ◊	27316 9235 ◊	27323 9230 ◊	27324 9235 ◊

◊ B ● / FBR ● / FG ● / GC ● / W ○

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	UHO		SPY 27		SPY 39		SPY 39 L				
	MDL	DALI DIM	MDL	DALI DIM	MDL	DALI DIM	MDL	DALI DIM			
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT	NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R	R*	R*	R*	R*	R*	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER	MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56	R		R*		R*		R*	
	or MODULATOR WIRELESS	300 90 012	93 x 78 x 56	R		R*		R*		R*	
	or MODULATOR DALI WIRELESS PLUG-IN	21032 0030	190 x 16 x 16	R		R		R		R	
FINISH	SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W					R	R			
	SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W							R	R	
	VISOR 27	216 12 01			A	A					
	VISOR 39	216 12 02					A	A			



* REMOTE INSTALLATION

INTERIOR CEILING


CONFORM

NLT - NATURAL LIGHT TECHNOLOGY

Conform uses Delta Light's Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.

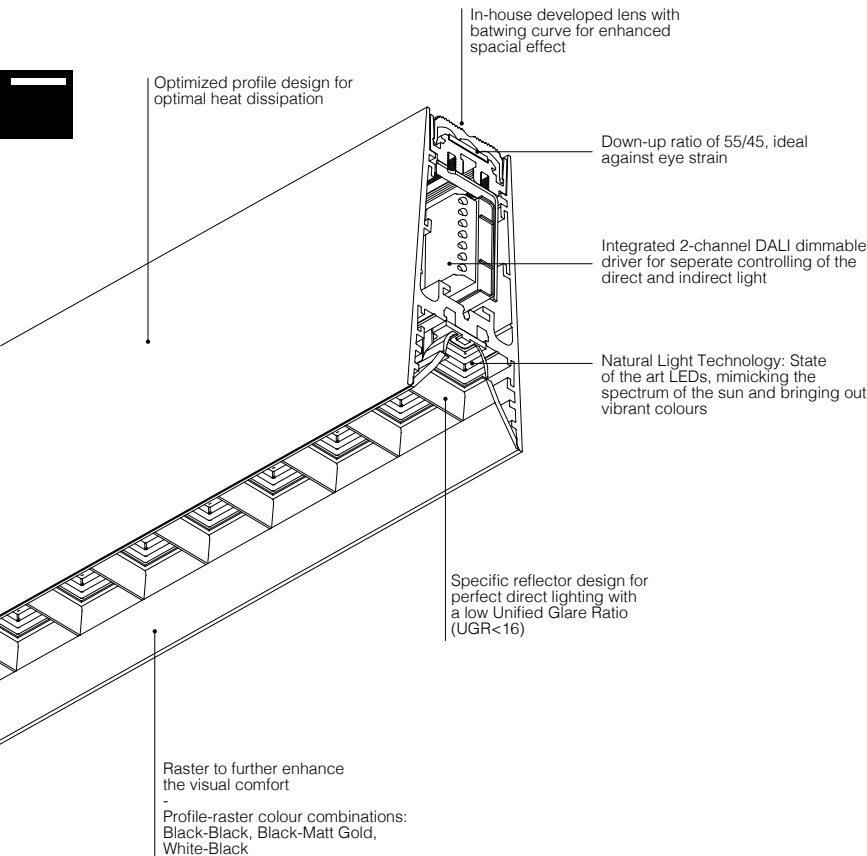

DALI DSI



PDS

CONFORM

UGR <16

DOWN-UP

DOWN-UP PDS

L1488mm

L2040mm

L2868mm

L1488mm

L2040mm

L2868mm

CRI	LED UP / DOWN	DALI	67° DOWN	DOWN-UP			DOWN-UP PDS		
				L1488mm	L2040mm	L2868mm	L1488mm	L2040mm	L2868mm
4000K / CRI>95	LED UP 16,8W / 2078lm DOWN 22W / 2694lm			26511 7424 ◊			26514 7420 ◊		
	LED UP 23,1W / 2812lm DOWN 30,5W / 3746lm				26512 7424 ◊		26515 7420 ◊		
	LED UP 33,7W / 4157lm DOWN 43,9W / 5388lm					26513 7424 ◊			26516 7420 ◊
3000K / CRI>95	LED UP 16,8W / 1978lm DOWN 22W / 2568lm			26511 7324 ◊			26514 7320 ◊		
	LED UP 23,1W / 2842lm DOWN 30,5W / 3570lm				26512 7324 ◊			26515 7320 ◊	
	LED UP 33,7W / 3955lm DOWN 43,9W / 5136lm					26513 7324 ◊			26516 7320 ◊

◊ B-B ●● / B-MMAT ●●● / W-B ○●●

220-240V / 0|50-60Hz


2 DALI CONTROL CHANNELS
2 x CABLE SUSPENSION SINGLE AUTO. 1,6m
1 x CABLE 5 x 0.75mm²

INCL. PRESENCE & DAYLIGHT SENSOR
2 x CABLE SUSPENSION SINGLE AUTO. 1,6m
1 x CABLE 3 x 0.75mm²

◊ IP20

◊ IP20

A

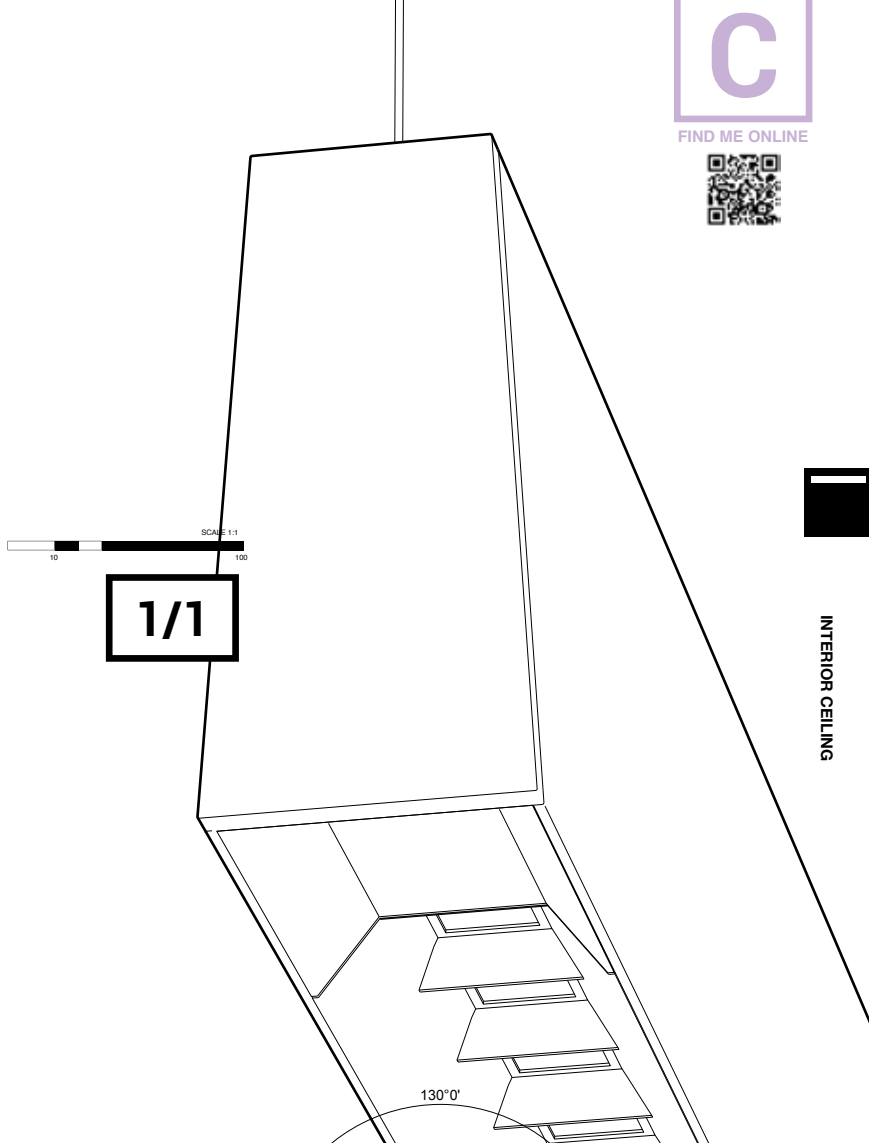


1/1

Design by **DEAN SKIRA** & Delta Light


Its elegant design with multiple colour combinations, its specific sun-mimicking spectrum, its low UGR, its well balanced down-up ratio...we do not exaggerate: Conform is the goddess of office lighting!
 Conform is designed around the light. It not only perfectly embraces the light source, it reinforces it in multiple aspects. Conform uses Delta Light's Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.

As so, the LEDs used in Conform help control the human circadian rhythm.
 To further stimulate the human well-being, Conform uses a down-up ratio of 55% to 45%, as a combination of direct and indirect light is recommended against eye strain. Every downwards facing LED is perfectly embraced by specially designed reflectors, resulting in a beam angle of 67° that enlightens the task area but has no direct impact on the eye.
 Additionally, the uplight is being spread over the room to enhance the spacial effect and to create a uniform lighting scheme, thanks to the inhouse designed lens extrusion to create a wide batwing beam angle without an intense peak in the centre.

www.deltalight.com/conform

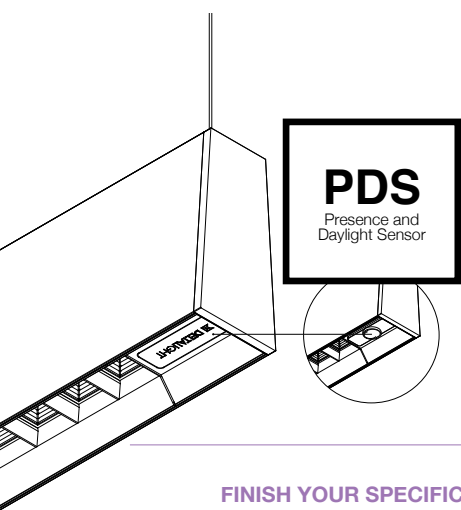

PDS
 Presence and Daylight Sensor

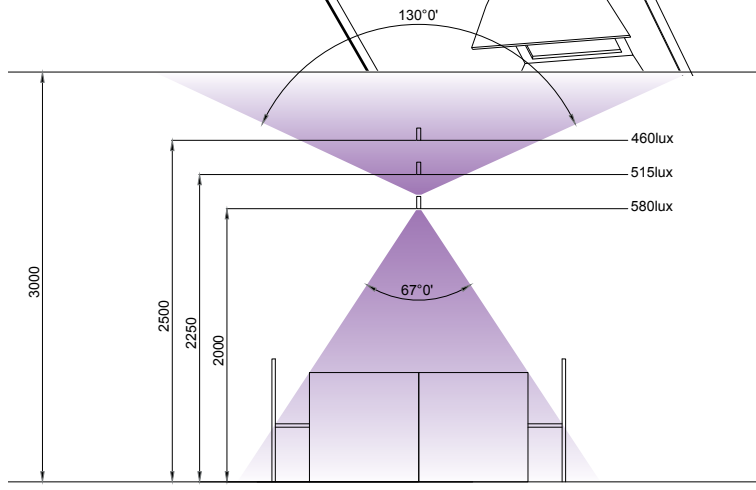

Double Desk
 Height: 80cm
 Depth: 160cm
 Length: 2.8m
 Conform Length: 2.8m

INTERIOR CEILING

FINISH YOUR SPECIFICATION



REQUIREMENT / OPTION / ACCESSORY

		CONFORM	
		DOWN-UP	DOWN-UP PDS
INSTALLATION			
CONNECTION ST	15225 0360 B / W	O	O
SUSPENSION ST	15225 0340 B / W	O	O
CABLE BASE S	203 99 56 ANO / B / W	O	O
PDS REMOTE CONTROL	26510 0010		R
or PDS SENSOR PROGRAMMER	26510 0020		R

ONE-AND-ONLY

A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.

www.deltalight.com/oneandonly



ONE-AND-ONLY

P12

P20

3000K CRI>90	LED UP 23,1W / 2310lm LED DOWN 34,6W / 3465lm	NON DIM	404 12 93 ◊	
		1-10V	404 12 93 ED1 ◊	
	LED UP 37,4W / 3740lm LED DOWN 56,1W / 5610lm	NON DIM		404 20 93 ◊
		1-10V		404 20 93 ED1 ◊
		DALI		404 20 93 ED5 ◊

◊ B-B ●● / GC-B ●●● / W-W ○○


220-240V / 50-60Hz

2 x CABLE SUSP. SINGLE AUTO. 1,6m

1 x CABLE 3 x 0,75mm² (NON DIM)

1 x CABLE 5 x 0,75mm² (ED)

◊ IP20

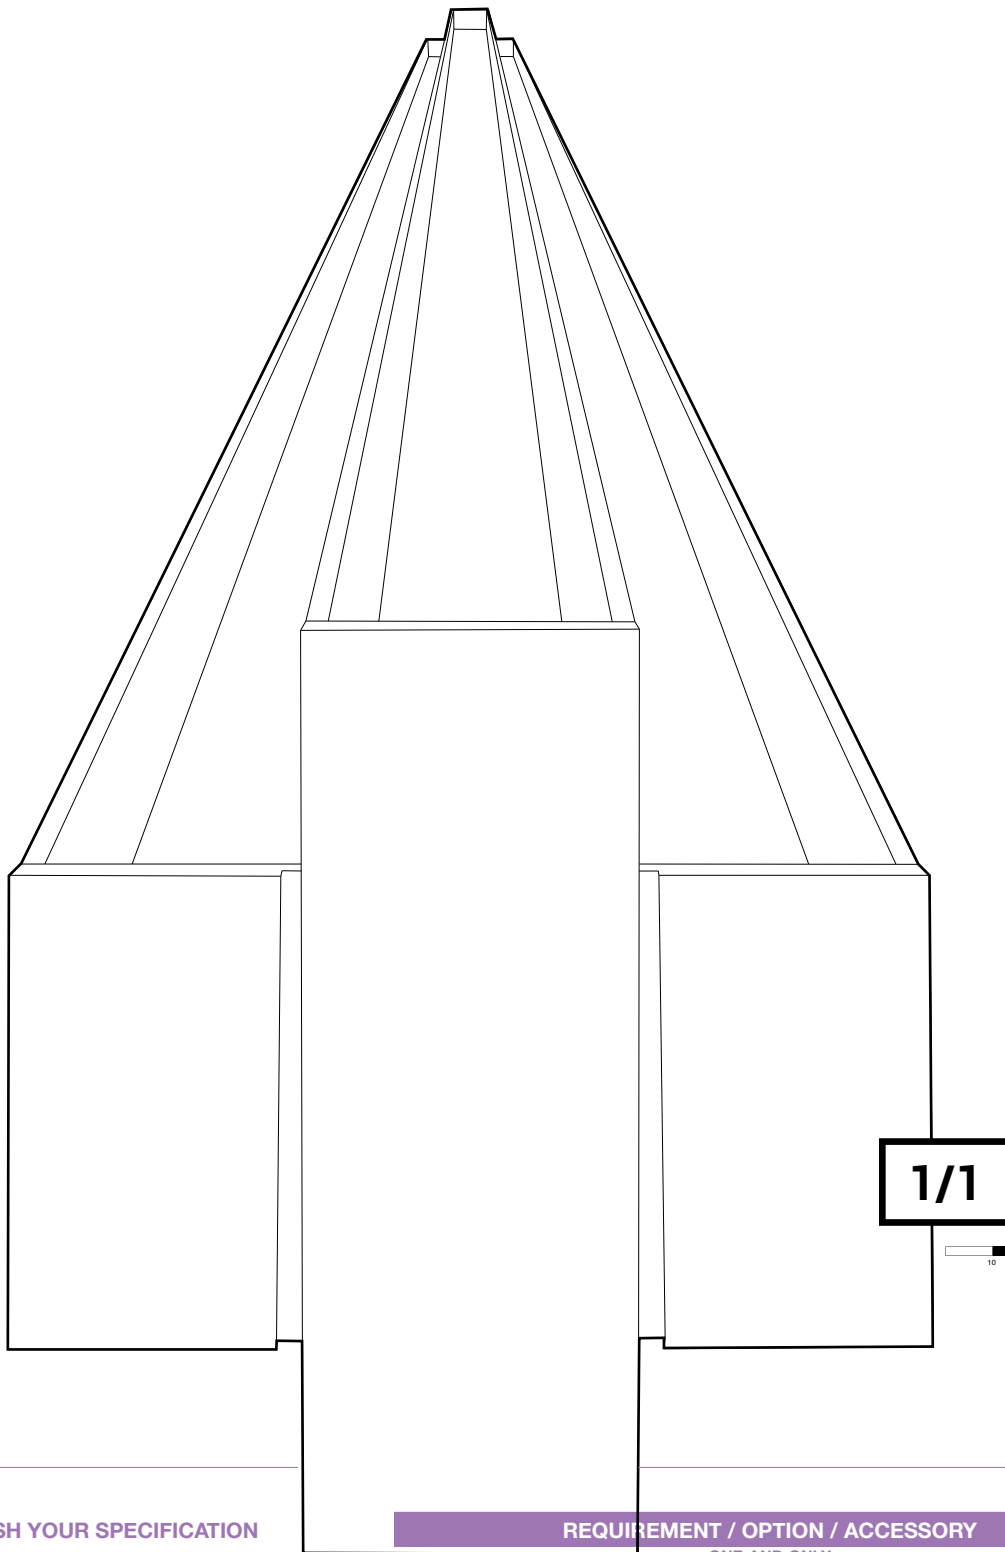

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

ONE-AND-ONLY

		P12	P20
INSTALLATION			
CONNECTION ST	15225 0360 B / W	<input type="radio"/>	<input type="radio"/>
SUSPENSION ST	15225 0340 B / W	<input type="radio"/>	<input type="radio"/>
CABLE BASE S	203 99 56 ANO / B / W	<input type="radio"/>	<input type="radio"/>

GIBBO

Gibbo is a decorative pendant with a base positioned under a predefined angle, as such the globe appears to be rolling away. The glass is handblown and is available in transparent, opal or amber shades. The golden brown colour gives the Gibbo a warm presence, which makes it attractive in compositions above tables and in interiors with warm accents and materials. The base of Gibbo is available in black or white.

www.deltalight.com/gibbo




GIBBO

GIBBO

3000K CRI>90	LED 7.1W / 812lm / 350mA	MAINS	286 67 811 930 ED8 ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA		286 67 811 920 ED8 ◇
			◇ B ● / W ○
			220-240V / 0 50-60Hz
			EXCL.GLASS
			INCL.1 x CABLE 2 x 0.75mm ²
			INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
			<input type="checkbox"/> IP20



1/4

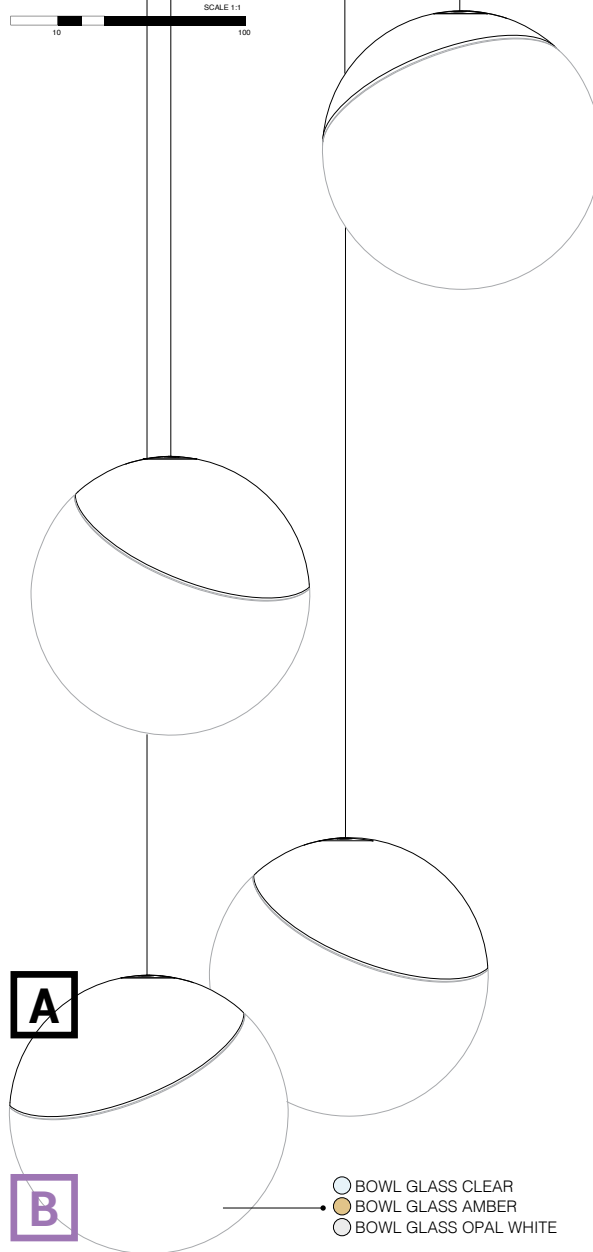

INTERIOR CEILING

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

GIBBO

FINISH

BOWL GLASS CLEAR	286 67 01		R
or BOWL GLASS AMBER	286 67 02		R
or BOWL GLASS OPAL WHITE	286 67 03		R

STILL


Design by **NATHALIE DEWEZ & Delta Light**

The work of Nathalie Dewez extends from small objects to monumental installations, from unique pieces to industrial products. Her presence at numerous international shows and exhibitions has led to collaborations with a number of architecture practices as well as international producers such as Hermès (FR), Habitat (UK), Ligne Roset (FR), De Castelli (IT) & Vervloet (BE).

Nathalie is a designer whose main medium is light and whose materials vary between metal, glass and other long-lasting medium, whether designing light fixtures, objects, furnishings or large-scale sculptures.

Her designs reveal the passion for sculptural shapes and superior craftsmanship. Some of her iconic pieces have been awarded several times. In 2011 she received the 'Design Pierre Bergé Foundation' award and the same year she was nominated Belgian Designer of the Year.

www.deltalight.com/still

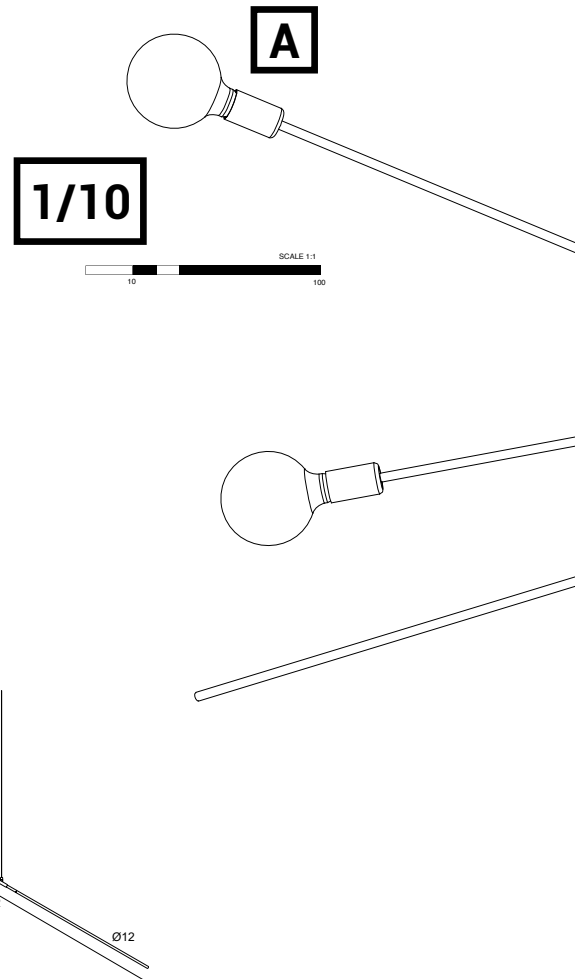

A

STILL

STILL

💡 1 x A60 max.60W

25611 0000 ◇


◇ BBR ● / BL ● / RW ○

E27 / 100-240V / 50-60Hz

INCL. 1 x CABLE SUSPENSION SINGLE AUTOM. 1.6m

INCL. 1 x CABLE 3 x 0.75mm²

◇ IP20

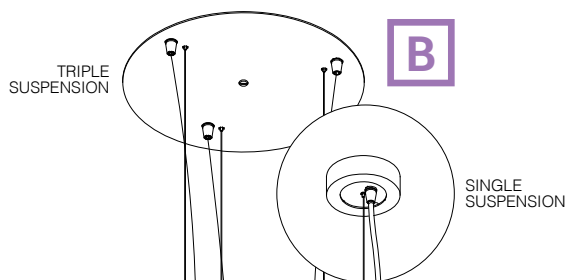

**Still
but never completely.**

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

INSTALLATION

		STILL	
CEILING BASE 1RC	23943 0030 B / W		R
or CEILING BASE 3RC	25610 0020 B / W		R
LED LAMP MORE INFO TECHNICAL CHAPTER			O

MILES

Miles is pure eye-candy.





A collection of 4 purely handcrafted glass shapes, each in 4 different colours (pink, amber, smoke or mist), each recognizable yet unique in all respects.

A family of suspensions that play on the visual contrast between the coloured and white blown glass, combined with different shapes and colours, also ideal for multiple compositions.

All shapes and finishes are inspired by the interplay of opacity, translucency and transparency. Its translucent or milky forms and dynamic light offer a countless number of scenarios.

When switched off its transparency makes MILES almost disappear. When switched on they provide a cozy and stylish luminous presence, stimulating senses and perceptions.

www.detalight.com/miles







MILES LED

		C1	C2	C3	C4	
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	50°	PINK ● 23926 9230	23930 9230	23934 9230	23938 9230
			SMOKE ● 23927 9230	23931 9230	23935 9230	23939 9230
			MIST ○ 23928 9230	23932 9230	23936 9230	23940 9230
			AMBER ● 23929 9230	23933 9230	23937 9230	23941 9230

INCL. 1 x CABLE 2 x 0.75mm² 1,6m
INCL. 1 x CABLE CLAMP BLACK

IP20





MILES E27


		C1	C2	C3	C4
1 x A60 max.20W	PINK ●	23910 0000 ◇	23914 0000 ◇	23918 0000 ◇	
	SMOKE ●	23911 0000 ◇	23915 0000 ◇	23919 0000 ◇	
	MIST ○	23912 0000 ◇	23916 0000 ◇	23920 0000 ◇	
	AMBER ●	23913 0000 ◇	23917 0000 ◇	23921 0000 ◇	
1 x T30-LED	PINK ●				23922 0000 ◇
	SMOKE ●				23923 0000 ◇
	MIST ○				23924 0000 ◇
	AMBER ●				23925 0000 ◇

INCL. 1 x CABLE 2 x 0.75mm² 1,6m
INCL. 1 x CABLE CLAMP BLACK

IP20

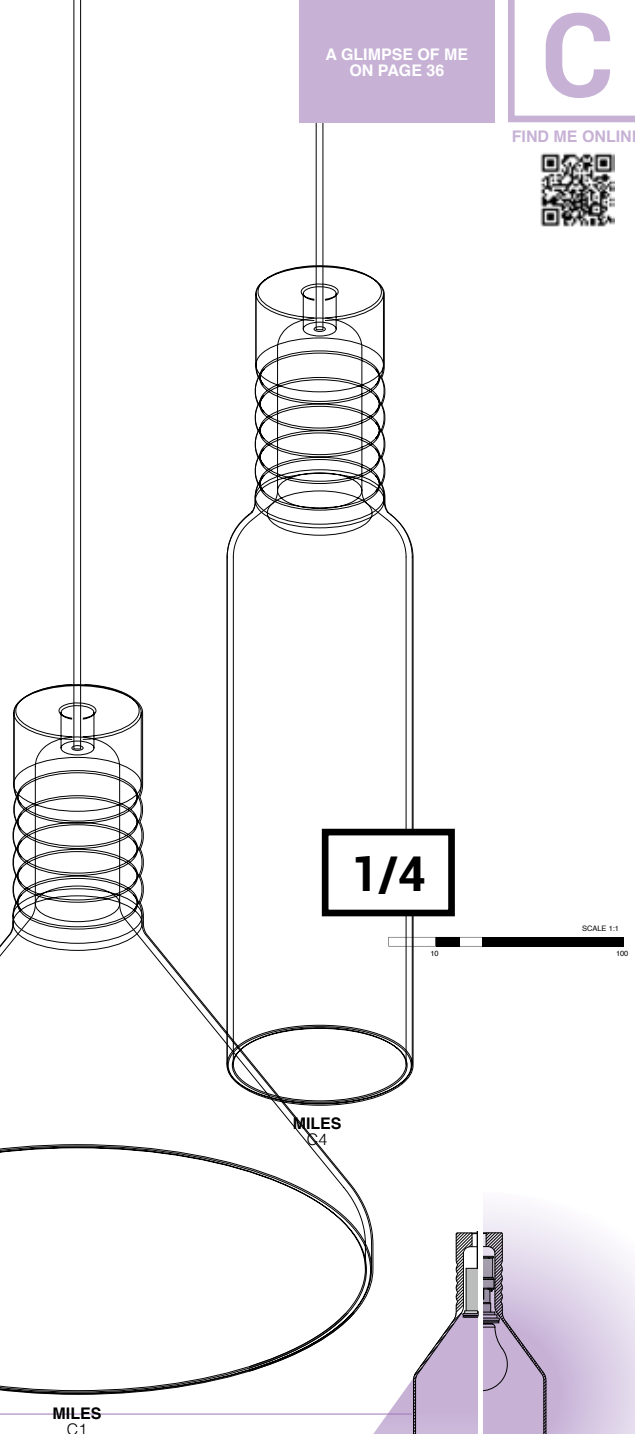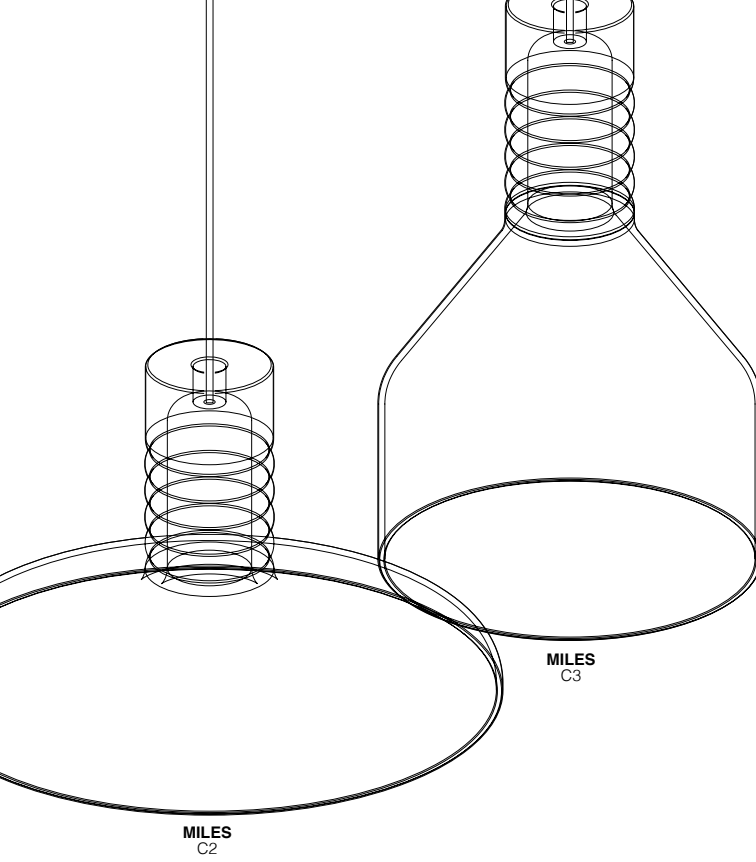

INTERIOR CEILING

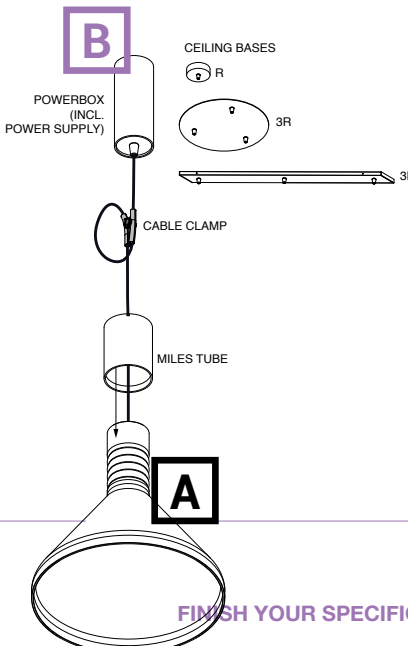

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				MILES							
				C1	C2	C3	C4	C1 E27	C2 E27	C3 E27	C4 E27
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MAINS DIM (FE)	11	21012 0298	1 min. 55	R	R	R	R				
1-10V DIM	15	300 90 124	1 min. 55	R	R	R	R				
DALI DIM	14	300 90 125	1 min. 55	R	R	R	R				
or POWERBOX											
MAINS DIM (FE)	23942 0018 B	Ø60 x 167		R	R	R	R				
FINISH											
MILES TUBE	23944 0010 B / M			A	A	A	A	A	A	A	A
INSTALLATION											
CEILING BASE R	23943 0010 B			R*	R*	R*	R*				
or CEILING BASE 3R	23945 0020 B			R*	R*	R*	R*	o	o	o	o
or CEILING BASE 3L	23945 0010 B			R*	R*	R*	R*	o	o	o	o
LED LAMP MORE INFO TECHNICAL CHAPTER											
								o	o	o	o

* REQUIRED IN COMBINATION WITH POWER SUPPLY




B

MANTELLO

With its timeless and inviting look the Mantello Pendant is well-suited for both home decor and professional environments. Hang a few Mantello pendants in the kitchen, place the smallest one each side of the bed, or create a playful configuration above the reception counter and start enjoying the right lighting atmosphere.

Starting from a circle, the bell-shaped design of the Mantello was inspired by both 80's Memphis shapes and early industrial characteristics. A modern interpretation of recognizable and traditional forms, available in two sizes and two diameters.

www.detalight.com/mantello

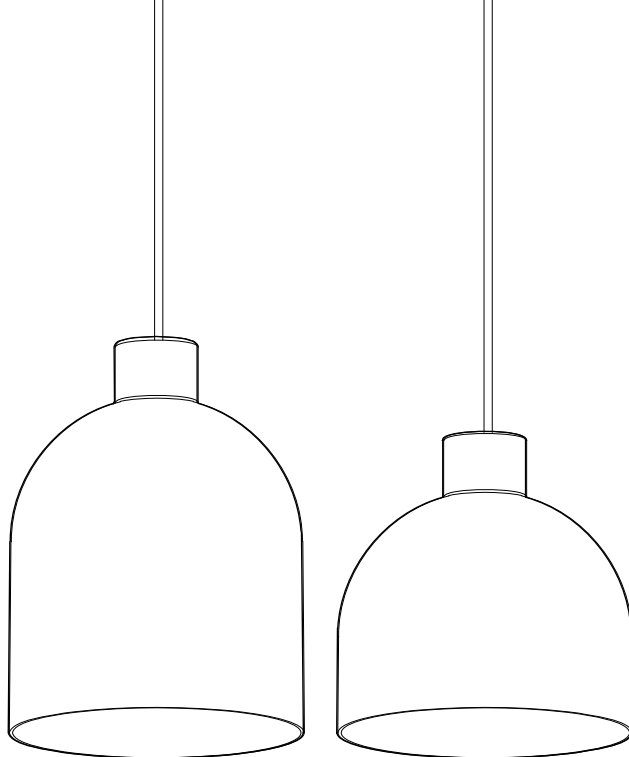

MANTELLO GLASS E27

L1523

L2231

1 x A60 max.20W

SMOKE ●
AMBER ●





25818 0000 ◇
25817 0000 ◇

25822 0000 ◇
25821 0000 ◇

E27 / 100-240V / 50-60Hz
INCL. 1 x CABLE 2 x 0.75mm² 1,6m
INCL. 1 x CABLE CLAMP BLACK

□ IP20

A



MANTELLO ALU E27

L1520

L1515

L2028

L2020

1 x A60 max.20W

25811 0000 ◇

25813 0000 ◇

25814 0000 ◇

25816 0000 ◇


◇ BBR ● / RW ●

E27 / 100-240V / 50-60Hz
INCL. 1 x CABLE 2 x 0.75mm² 1,6m
INCL. 1 x CABLE SUSPENSION SINGLE AUTOM. 1,6m


◇ IP20



1/4

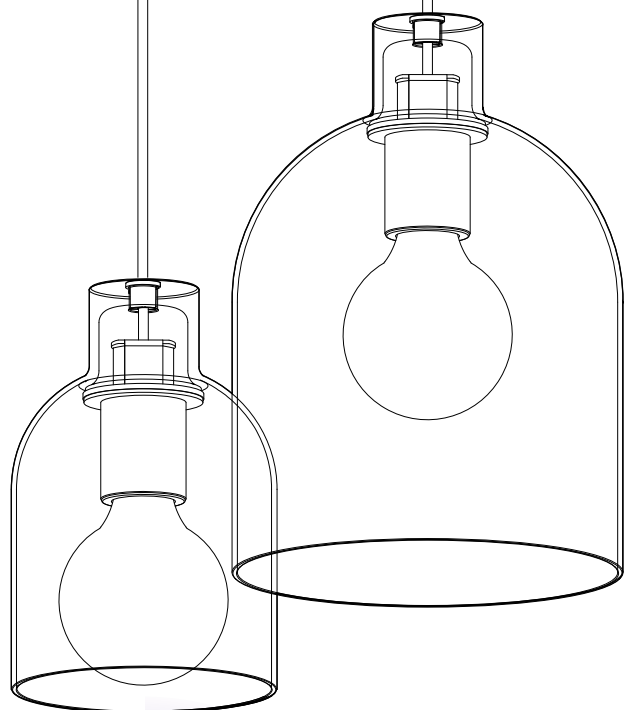

ALU VS GLASS

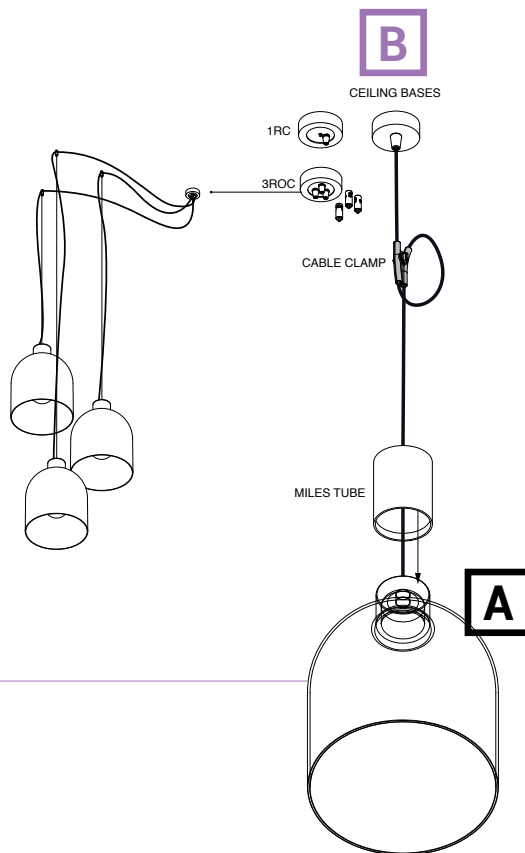

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		MANTELLO E27 GLASS					
		L1523	L2231	L1520	L1515	L2028	L2020
FINISH							
	MILES TUBE	23944 0010 B / M	O	O			
INSTALLATION							
	CEILING BASE	23943 0010 B	R	R			
	or CEILING BASE 1RC	23943 0030 B			R	R	R
	or CEILING BASE 3ROC	23943 0020 B / W	R	R	R	R	R
	or CONNECTION TRIMLESS	328 10 03	O	O			
LED LAMP	MORE INFO TECHNICAL CHAPTER		O	O	O	O	O

B

Derived from the lampshade as an archetype, the 4 shades evolve from a dome shape into a flat disk.

CUPPA

The Cuppa family has been designed as a welcome add-on for our magnetic profile range, extending the possibilities within this collection with decorative pendants. As a basis, Cuppa offers 4 attractive shades to be used as an ornament on a suspended LED module. But in total the possibilities with Cuppa are endless, as multiple shades can be added onto 1 single module, giving the user complete flexibility of designing the product he or she envisioned.

Derived from the lampshade as an archetype, the 4 shades evolve from a dome shape into a flat disk, all of them purified up to the final details. Details like diverging radiuses, altering heights and aligned colour finishes all contribute to the consistency of Cuppa as a decorative family.


Play with lines and contours, as all shades perfectly fit onto the LED module. Combine multiple shades into an attractive object of light or go for single shades to create a calming mood.

www.detalight.com/cuppa


A

NEW

CUPPA C





CUPPA C

3000K CRI>90	LED 8.6W / 1089lm / 500mA	IP20	40°	28815 9330 ◇
2700K CRI>90	LED 8.6W / 1041lm / 500mA			28815 9230 ◇
	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA			28816 9030 ◇

◇ B-GC ● / W-GC ○

EXCL. CUPPA SHADE
INCL. 1 x CABLE 2 x 0.75mm² 1,6m



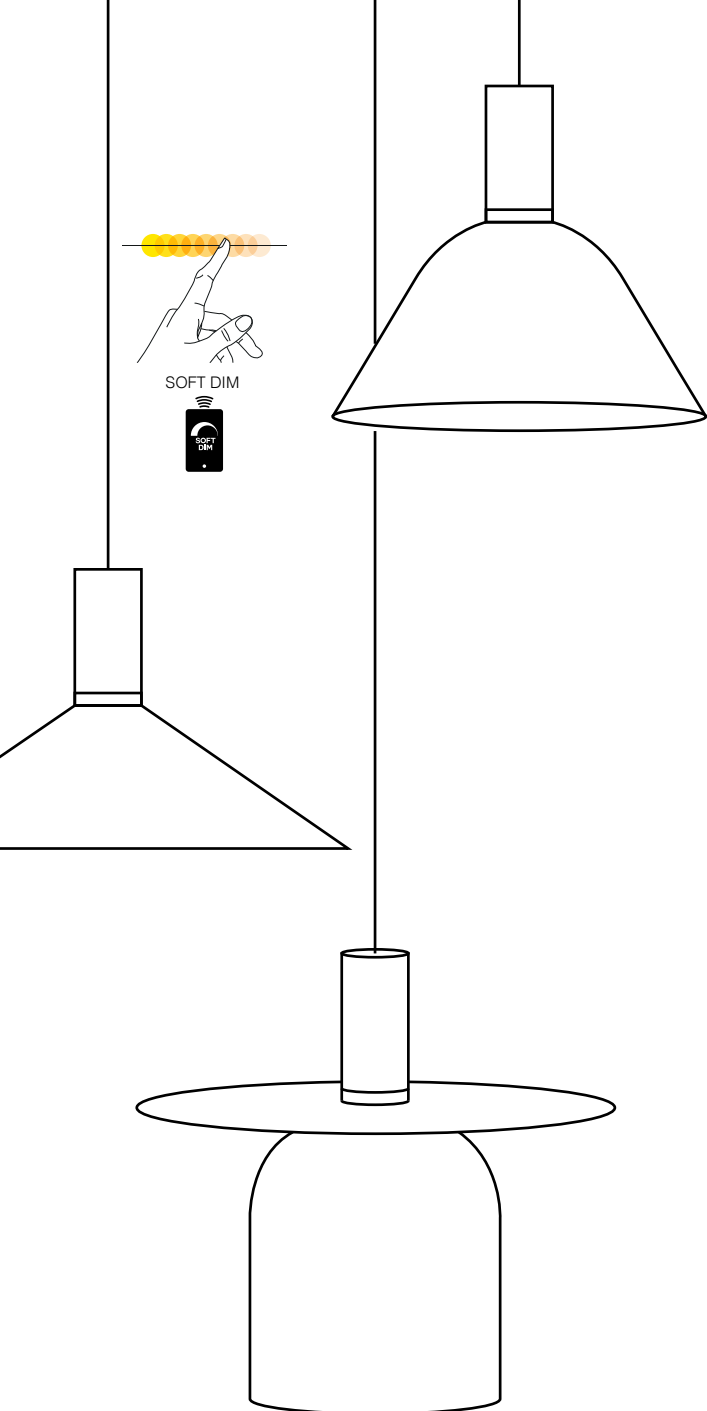


SOFT DIM



READ MY COLOUR

◇ B ● / GC ● / W ○

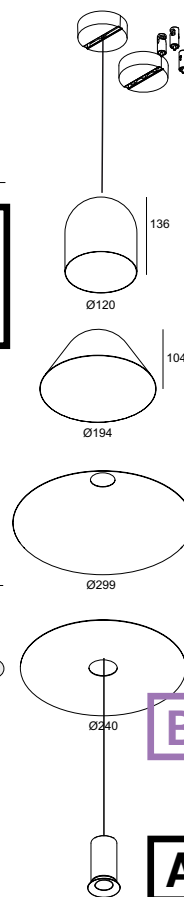

CHOOSE YOUR SHADE(S)

B

A

INTERIOR CEILING

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	i min. 55
1-10V DIM 15	300 90 124	i min. 55
DALI DIM 14	300 90 125	i min. 55

or POWERBOX

or POWERBOX H15	NON DIM	28814 0080 B
	DALI DIM	28814 0075 B

INSTALLATION

CEILING BASE	23943 0010 B
CEILING BASE MULTI 1	28700 0040 B / W
CEILING BASE MULTI 3	28700 0070 B / W

FINISH

CUPPA SHADE 120	28800 0010 B / GC / W
or CUPPA SHADE 190	28800 0020 B / GC / W
or CUPPA SHADE 300	28800 0030 B / GC / W
or CUPPA DISK	28800 0040 B / W

* REMOTE INSTALLATION

CUPPA C


R *
R *
R *
R
R
O
O
O
O
R

B




SOIREE

The Soiree range was designed to be voluminous, lightweight and transparent. Its sophisticated form creates a dense and decorative effect, filled with a warm light. The interaction between the pure circular and rectangular forms, with the warm light sources and the symmetric configurations, triggers a dynamic tension. Soiree takes its inspiration from many angles. From the play of light and shadow in architecture, to natural light effects, the shape of everyday objects and sculptural art. The result is a nest of light, made of circles or rectangles, both structural and decorative, generating a seductive luminous effect. Even when not turned on, they bring texture and character to rooms, defining different areas with small and large contemporary pendants. The Soiree is an entire family of versatile suspensions for large or small spaces. Both the round and rectangular versions come in multiple sizes and 2 colours – black or Flemish Gold. In both shapes one can choose for a milky-glass sphere at its center, or opt for an E27 bulb. The blown glass diffuser in the centre offers subtle nuances thanks to its satin-like finish, in contrast with its more expressive outer cage. One Soiree suspension makes a bold statement by itself, when combined in a cluster of pendants it can create a more monumental installation.

www.deltalight.com/soiree

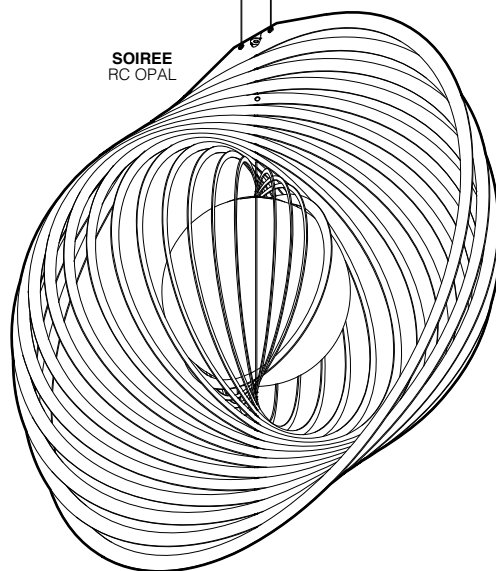

SOIREE
RC OPAL



SOIREE

RC

RC

RC OPAL

RC OPAL

1 x A60 max.20W

IP20

24013 0000 ◊

24014 0000 ◊

24017 0000 ◊

24016 0000 ◊




◊ B ● / FG ●

E27 / 100-240V / 50-60Hz

INCL. 2 x CABLE SUSPENSION SINGLE AUTOM. 1.6m

INCL. 1 x CABLE 2 x 0.75mm²

INCL. 1 x GLASS OPAL (for RC OPAL)



SOIREE

SC

SC

SC OPAL

1 x A60 max.20W

IP20

24010 0000 ◊

24011 0000 ◊

24015 0000 ◊

1 x T30-LED

◊ B ● / FG ●

E27 / 100-240V / 50-60Hz


INCL. 2 x CABLE SUSPENSION SINGLE AUTOM. 1.6m

INCL. 1 x CABLE 2 x 0.75mm²


INCL. 1 x GLASS OPAL (for SC OPAL)



A

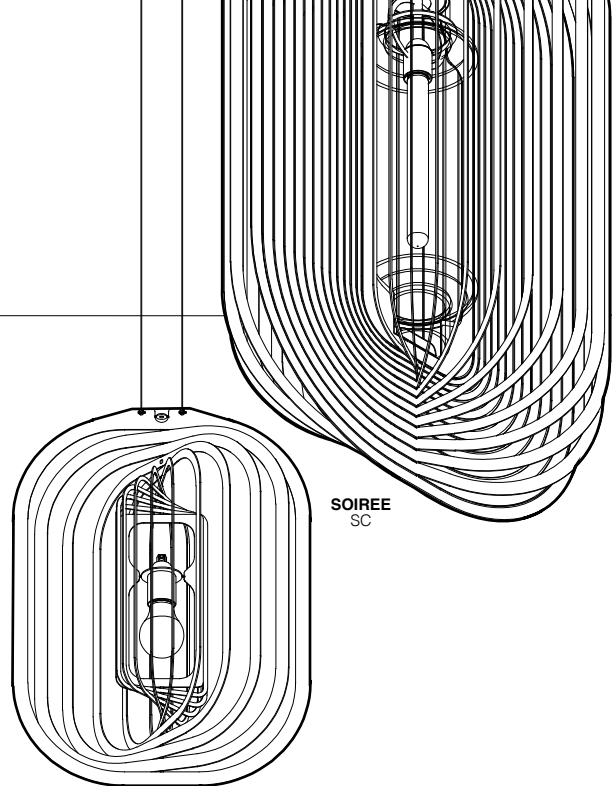

SOIREE
SC

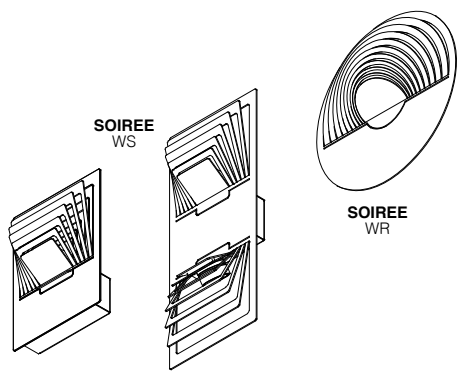


SOIREE
WS


SOIREE
WR

INTERIOR CEILING

E27 VS OPAL

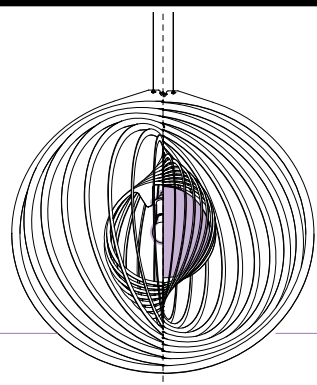

FINISH YOUR SPECIFICATION

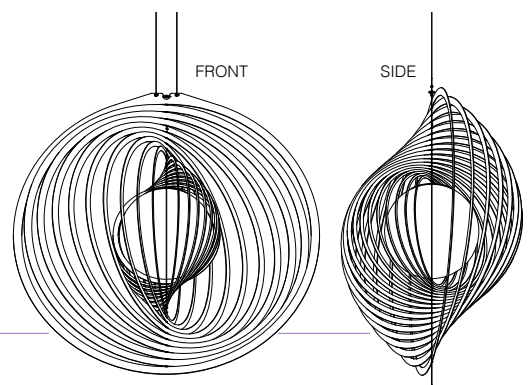

FRONT

SIDE

B

REQUIREMENT / OPTION / ACCESSORY

SOIREE



RC	RC OPAL	SC	SC OPAL
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

ZOOVER

Zoover pretends to be heavy seen its size, nevertheless it looks very lightweight when hung into the room. Designed as a shallow dome, Zoover has multiple different looks depending on the point of view. Looking at it from aside, the thermoformed shell has a very neutral appearance. Only when lowering the viewpoint, more and more details catch the eye, as the light illuminates the inner textures of the scallop.

Zoover can be used for general lighting, with soft diffused light inside its dome, or to create a more cosy atmosphere, by hiding away 4 spotlights under its shell, to create various accents inside the room. Available in two sizes and two colours for the shade, Zoover adds volume, depth and texture to the room. Furthermore, the PETfelt used to create the Zoover dome helps to reduce unwanted noise inside the room, with better acoustics as result.

www.deltalight.com/zoover

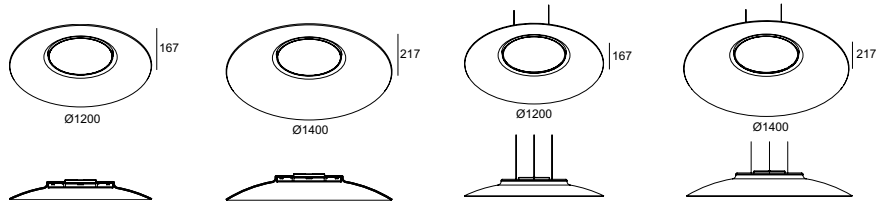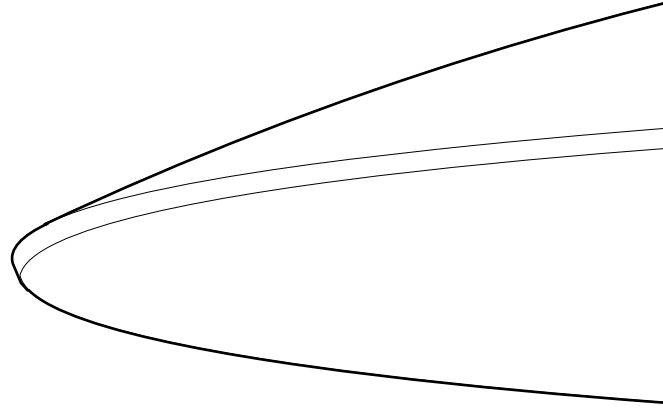


ZOOVER SBL

120		140		NEW 120 DOWN-UP		NEW 140 DOWN-UP	
LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY

3000K CRI>90	LED 34,4W / 4767lm	NON DIM	28211 9300 ◇	28212 9300 ◇	28213 9300 ◇	28214 9300 ◇				
		DALI DSI	28211 9304 ◇	28212 9304 ◇	28213 9304 ◇	28214 9304 ◇				
	LED UP 5,1W / 706lm LED DOWN 34,4W / 4767lm	NON DIM					28219 9300 ◇	28220 9300 ◇	28221 9300 ◇	28222 9300 ◇
		DALI DSI					28219 9304 ◇	28220 9304 ◇	28221 9304 ◇	28222 9304 ◇

◇ B ●
220-240V / 0 | 50-60Hz
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0,75mm²

◇ IP20

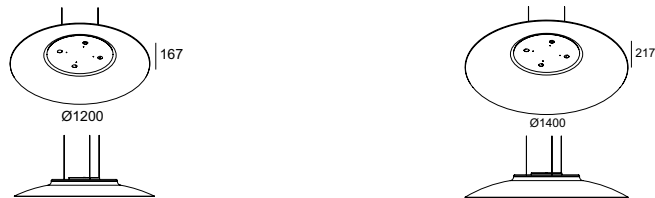

NEW

ZOOVER 4 CLIP



120		140	
LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY

	DALI	28215 0005 ◇	28216 0005 ◇	28217 0005 ◇	28218 0005 ◇
--	------	--------------	--------------	--------------	--------------

◇ B ●
110-240V / 50-60Hz
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0,75mm²

◇ IP20

A

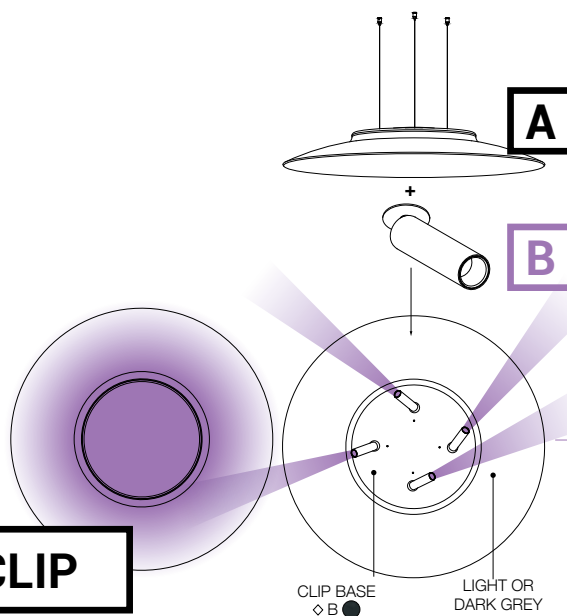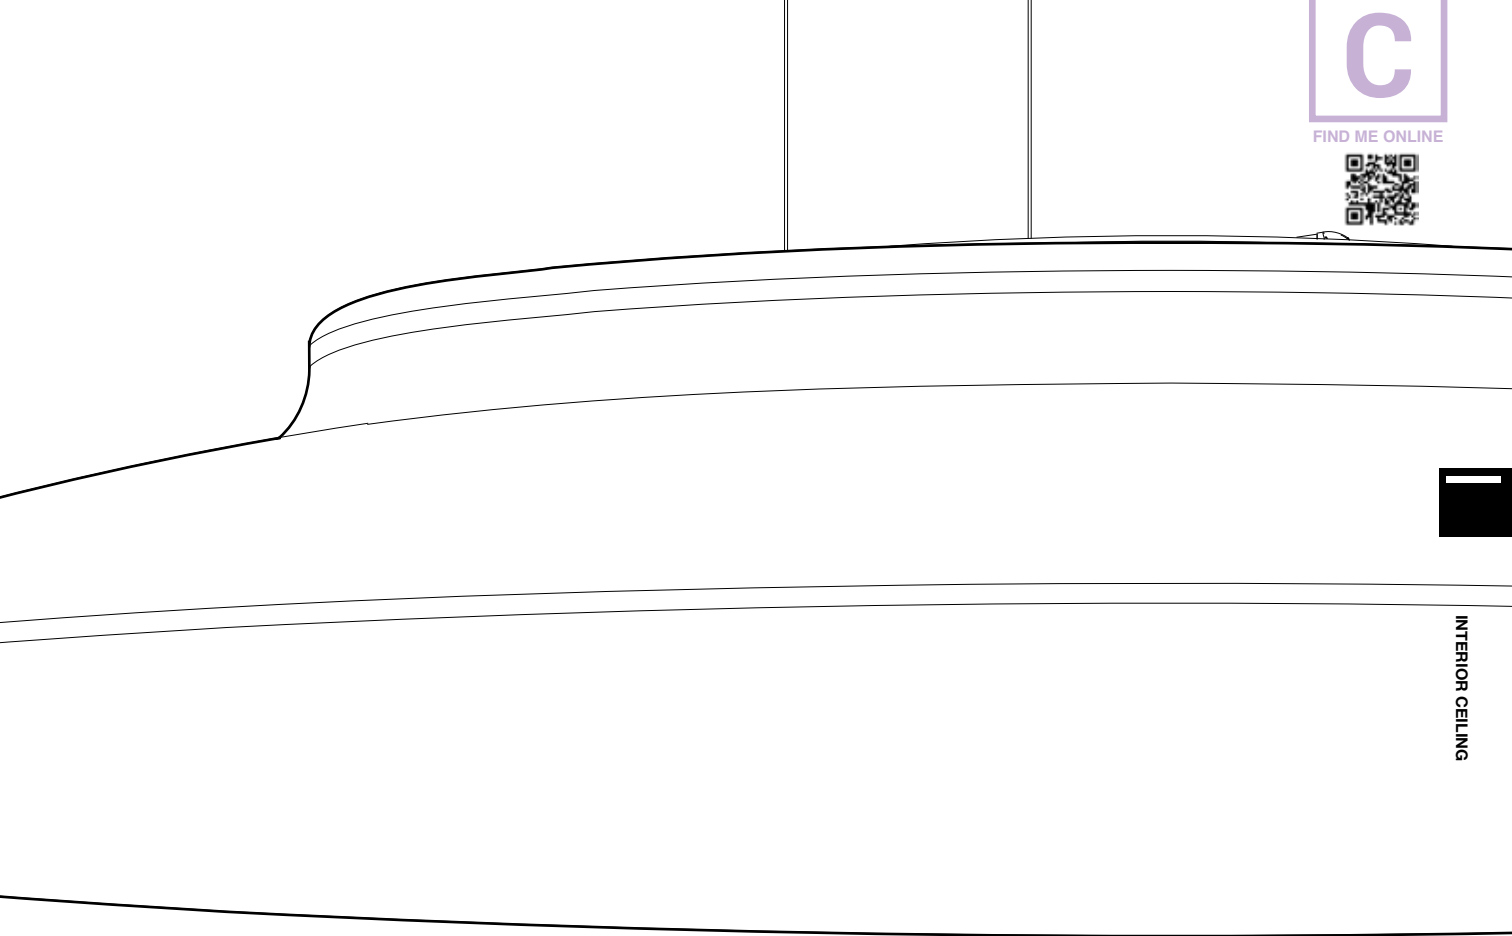

SBL VS 4 CLIP



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			ZOOVER					
			120	140	120 DOWN-UP	140 DOWN-UP	4 CLIP 120	4 CLIP 140
FINISH								
	4 x SPY 27 (L) / 39 (L) CLIP	pag 230-232					R	R
	or 4x OCTAV 27 / 39 CLIP	pag 196					R	R
INSTALLATION								
CONNECTION ST	15225 0360 B / W		O	O	O	O	O	O
SUSPENSION ST	15225 0340 B / W		O	O	O	O	O	O
CABLE BASE R	203 99 55 ANO / B / W		O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W		O	O	O	O	O	O


INDEX

Interior Wall Recessed

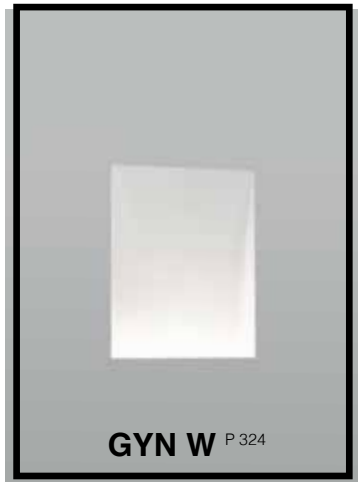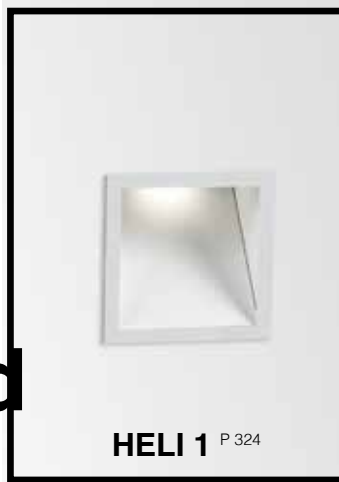

INDEX

Interior Wall Surface

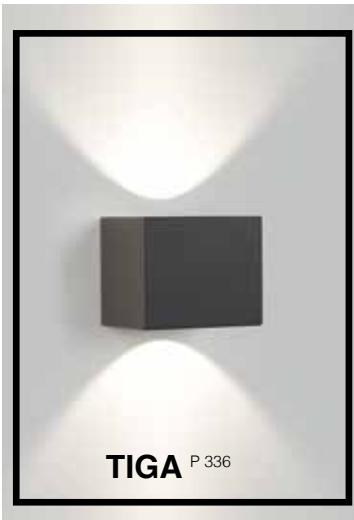


Hi!
I'm new
to the
range.

I'm
new
also!

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

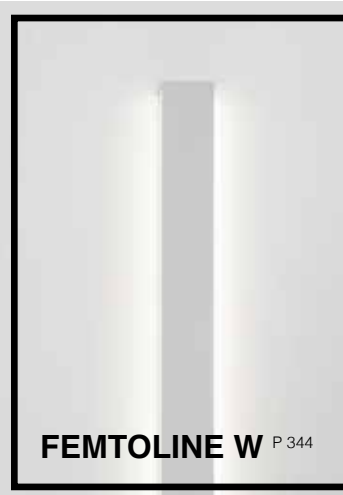

Hi!
I'm new
to the
range.

HELI 1

As a small wall recessed luminaire, Heli is perfect as a guidance light. Be it in a corridor or as a safety light for the steps of your stairs at night, Heli does the trick. Also outside, Heli X will guide you the way.

www.deltalight.com/heli




75 x 75 x 85

HELI

SCREEN LED


3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP20	202 04 12 ◊
-----------------	----------------------------	------	-------------

◊ A ● / W ○



HELI
SCREEN LED


GYN WS




GYN W

Gyn W serves as pure lighting pleasure. An invisible luminaire, as the gypsum body integrates completely into the wall. By finishing off this gypsum luminaire with any desired colour you want, Gyn disappears in its surroundings with an atmospheric indirect light effect as result. All you see ... is light!

www.deltalight.com/gyn



135 x 175 x 65 min.9-max.15



225 x 305 x 65 min.9-max.15

GYN W

S


M

3000K CRI>90	LED 2,2W / 252lm / 350mA	IP20	100053 9300	100054 9300
2700K CRI>90	LED 8,6W / 1078lm / 350mA		100053 9200	100054 9200
3000K CRI>90	LED 2,2W / 242lm / 350mA			
2700K CRI>90	LED 8,6W / 938lm / 350mA			





Finish on site in any desired colour

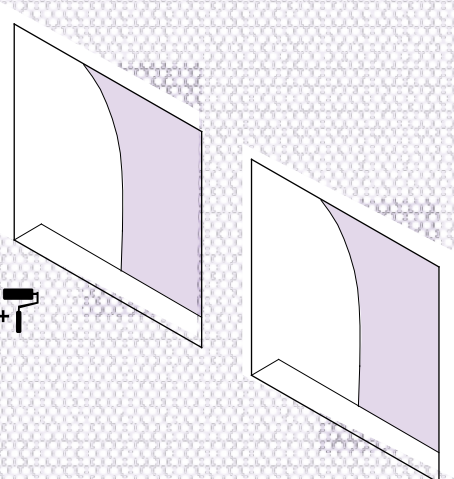


1/2



INTERIOR WALL

STEP LIGHT

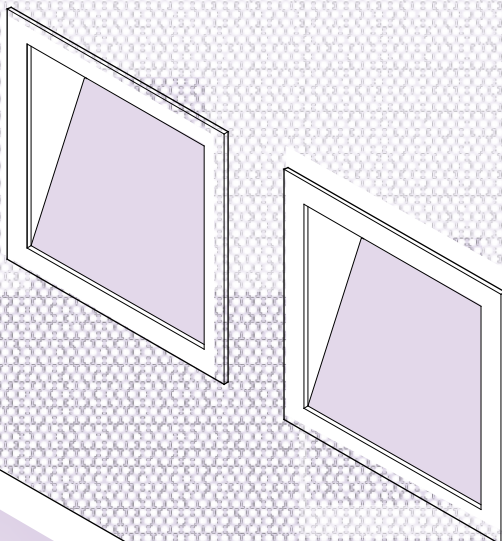

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


LED POWER SUPPLY <small>MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT</small>				HELI 1		
				SCREEN LED	S	M
NON DIM	300 90 91	min. 38			R	R
MAINS DIM (FE)	300 90 110	min. 45			R (min. 2x LED)	R
MAINS DIM (FE) 11	21012 0298	min. 55	R (min. 3 LED A)			
1-10V DIM 15	300 90 124	min. 55	R (min. 6 LED A)			
DALI DIM 14	300 90 125	min. 55	R (min. 4 LED A)			
MOUNTING KIT						
PLASTERBOARD MOUNTING KIT 75				202 00 75		O
INSTALLATION						
PLASTERKIT 186				207 01 186		O
CONCRETE BOX 186				270 11 186		O

LOGIC W




As a family of guidance lights, Logic W exists out of small and large wall luminaires to be installed slightly above ground level. As such, they provide a soft glow on the floor to guide you along pathways or in corridors, both in- and outdoors.

www.deltalight.com/logic

Let me guide you...


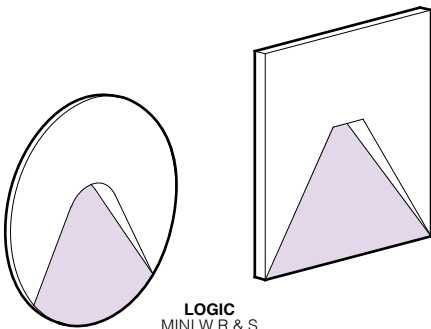


A



55 x 50 / min. 12
55 x 50 / min. 12
BOX / 115-140
BOX / 110-135
BOX / 110-135


LOGIC				MINI WR	MINI WS	WS	WLF	WL
3000K								
CRI>80	LED 0,6W / 40lm / 24V-DC	IP54	304 30 12 ◊	304 31 12 ◊			304 32 02 83 ◊	304 32 01 83 ◊
	LED 9W / 1480lm / 350mA	IP65						
CRI>90	LED 7.1W / 812lm / 350mA	IP65						
						304 33 811 930 ◊		
						◊ A ● / N ● / W ○	◊ A ● / N ● / W ○	◊ A ● / N ● / W ○
						110-240V / 50-60Hz INCL. 1 x PG11	220-240V / 50-60Hz INCL. 1 x PG11	
						◊	◊	◊

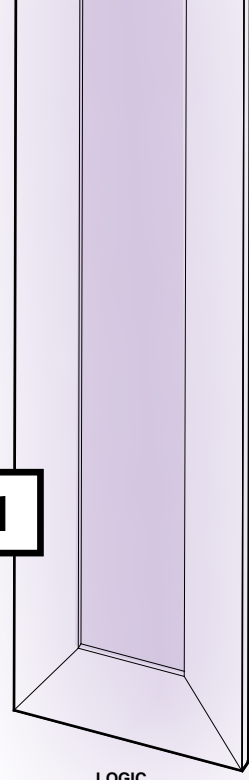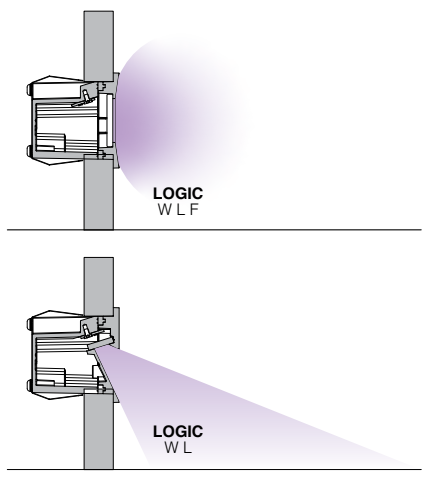


LOGIC
WLF



INTERIOR WALL

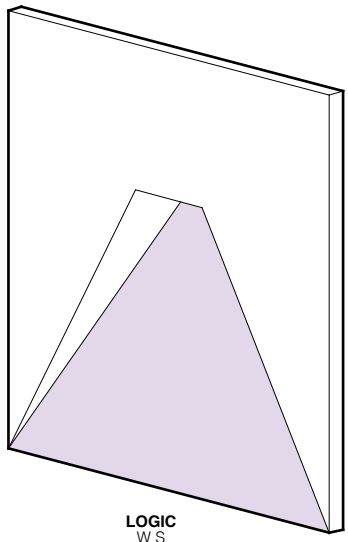

LOGIC
WS

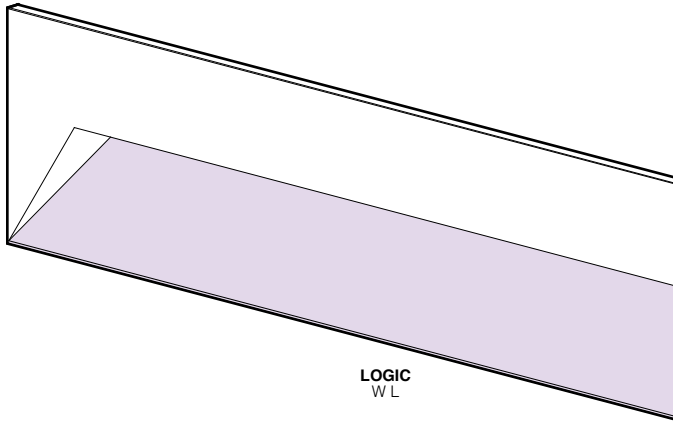

LOGIC
WL

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


				LOGIC MINI		LOGIC		
				WR	WS	WS	WLF	WL
LED POWER SUPPLY MORE INFO IN TECHNICAL CHAPTER								
NON DIM	24V-DC - 24W	21012 0160	min. 55	R*	R*			
INSTALLATION								
FOR PLASTER FINISH		270 11 192				R		
		270 11 191					R	R
		270 11 188		O	O			
FOR EXPOSED CONCRETE		304 33 96				R		
		304 32 96					R	R

* REMOTE INSTALLATION

INLET

Our traditional Inlet is a very popular wall recessed fixture for guidance light in hallways and staircases. As a more modern approach, Inlet Trimless is added to the family. While Inlet Trimless XS generates a narrow beam of light that produces a triangular shaped light effect on the floor, the bigger versions come in a Low or High design that create gentle fields of light on the surface. Available in White, Black or Gold Coloured, these guidance lights are perfect for usage in residential applications.

www.deltalight.com/inlet




I 22 x 170 x 45 / **min.12**

INLET


S

3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP20	304 05 12 ◇
2700K CRI>80	LED [A] 1W / 132lm / 350mA		304 05 13 ◇
			◇ A ● / W ○




NEW

I KIT x 45



I KIT x 50



I KIT x 50


INLET TRIMLESS

XS

H7


H20

3000K CRI>90	LED [A] 0,5W / 68lm / 180mA	IP20	13211 9300 ◇	13213 9300 ◇	13215 9300 ◇
	LED 0,9W / 116lm / 24V-DC				
LED 2,8W / 347lm / 24V-DC					
2700K CRI>90	LED [A] 0,5W / 63lm / 180mA		13211 9200 ◇	13213 9200 ◇	13215 9200 ◇
	LED 0,9W / 116lm / 24V-DC				
	LED 2,8W / 347lm / 24V-DC				
			◇ B-W ● / GC-W ● / W-W ○		




NEW

I KIT x 50



I KIT x 50



I KIT x 50

INLET TRIMLESS

L20

L38


L113

3000K CRI>90	LED 2,8W / 347lm / 24V-DC	IP20	13214 9300 ◇	13216 9300 ◇	13217 9300 ◇
	LED 5,6W / 695lm / 24V-DC				
	LED 16,9W / 2085lm / 24V-DC				
2700K CRI>90	LED 2,8W / 347lm / 24V-DC		13214 9200 ◇	13216 9200 ◇	13217 9200 ◇
	LED 5,6W / 695lm / 24V-DC				
	LED 16,9W / 2085lm / 24V-DC				
			◇ B-W ● / GC-W ● / W-W ○		






1/2

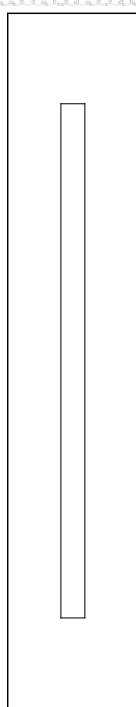


INLET S




INLET XS TRIMLESS

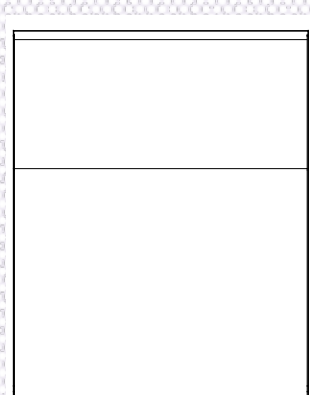

INLET H7 TRIMLESS

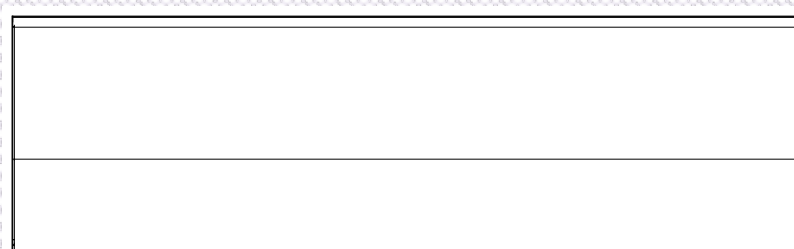

INLET L20 / L38 / L113

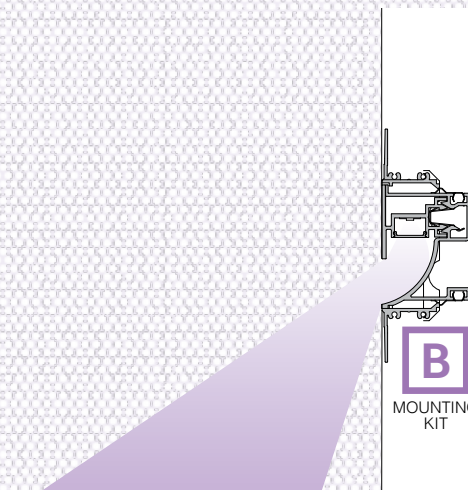

B MOUNTING KIT

INTERIOR WALL

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				REQUIREMENT / OPTION / ACCESSORY						
				INLET S	INLET TRIMLESS					
					XS	H7	H20	L20	L38	L113
LED POWER SUPPLY										
NON DIM	3	21012 0080	i min. 40		R *					
MAINS DIM (FE)	11	21012 0298	i min. 55	R (min. 3 LED A) *						
1-10V DIM		21012 0171	i min. 61		R *	R	R	R	R	R
1-10V DIM	15	300 90 124	i min. 55	R (min. 6 LED A) *						
DALI DIM		21012 0205	i min. 61		R *	R	R	R	R	R
DALI DIM	14	300 90 125	i min. 55	R (min. 4 LED A) *						
MOUNTING KIT										
PLASTERBOARD MOUNTING KIT INLET FLUSH		304 05 01		O						
MOUNTING KIT INLET TRIMLESS XS		13210 0010			R					
MOUNTING KIT INLET TRIMLESS H7		13210 0030				R				
MOUNTING KIT INLET TRIMLESS H20		13210 0050					R			
MOUNTING KIT INLET TRIMLESS L20		13210 0040						R		
MOUNTING KIT INLET TRIMLESS L38		13210 0060							R	
MOUNTING KIT INLET TRIMLESS L113		13210 0070								R
INSTALLATION										
PLASTERKIT	145	304 05 99		O						
CONCRETE BOX	145	304 05 98		O						

B

* REMOTE INSTALLATION

MONTUR

With Montur we offer a highly original interpretation of an archetypical concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look. The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.






The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet.

The indoor version of the Montur is also available as an open cube, with one or two bulbs, or in a rectangular shape with a powerful LED cluster concealed behind a protective cover in polycarbonate. By using them as outdoor fixtures, you can extend your lighting style into the garden or parking area. The outdoor versions are available in the same models as the indoor ones, but always feature a protective cover in glass or polycarbonate. There is also a bollard version, with a choice of various heights.



www.detailight.com/montur

A highly original interpretation of an archetypical concept

A






MONTUR		S LED	S O E27	M LED	M E27	M O E27
3000K CRI>90	LED 6,3W / 925lm / 350mA	IP65	232 112 83 ◊		232 212 83 ◊	
2700K CRI>90	LED 6,3W / 877lm / 350mA		232 112 82 ◊		232 212 82 ◊	
	A60 max.40W	IP20		232 111 00 ◊		232 211 00 ◊
		IP65	◊ B ●	◊ B ● / FBR ● / FG ●	◊ B ●	◊ B ● / FBR ● / FG ●
			100-240V / 50-60Hz INCL.GLASS OPAL	100-240V / 50-60Hz E27Ls /	100-240V / 50-60Hz INCL.GLASS OPAL	100-240V / 50-60Hz E27Ls /
			◊	◊	◊	◊




MONTUR		L PC LED	L O E27
3000K CRI>90	LED 14,7W / 2159lm / 700mA	IP54	232 318 83 ◊
	2 x A60 max.40W	IP20	232 321 00 ◊
			◊ B ●
			220-240V / 0 50-60Hz INCL.PC OPAL
			◊
			◊ B ●
			2 x E27Ls / 100-240V / 50-60Hz
			◊



**Milky, cone shaped core,
with a transparent glass
surface**

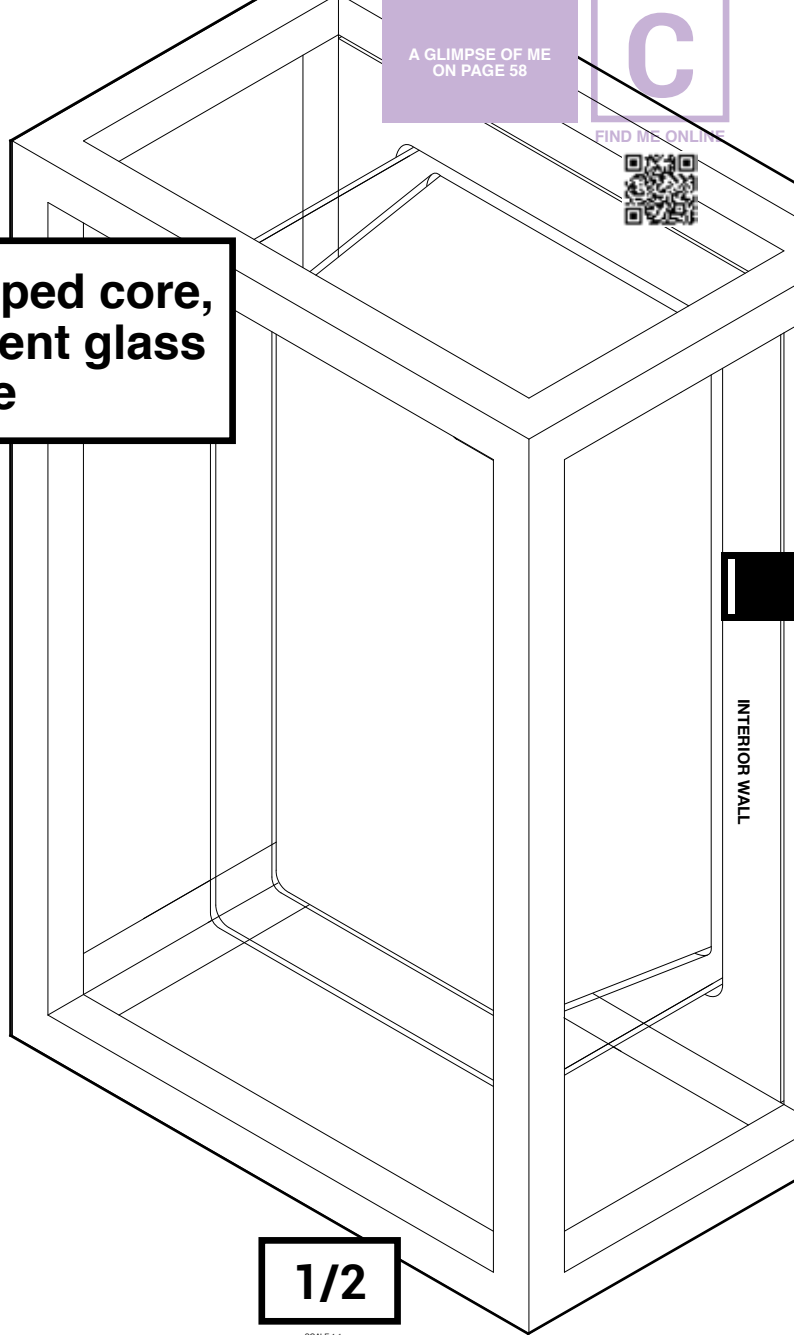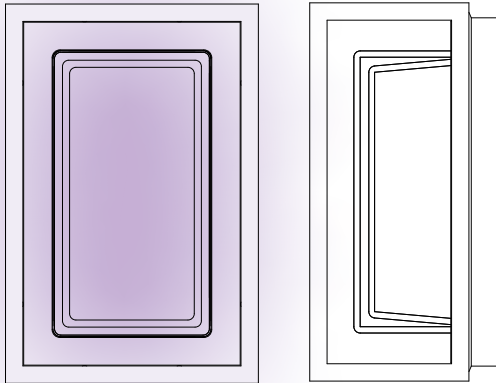


**MONTUR
LED**



**MONTUR
E27**

1/2



**MONTUR
BOLLARDS**

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

MONTUR							
S LED	S O E27	M LED	M E27	M O E27	L PC LED	L O E27	SQL LED
	○		○	○		○	




OONO

How to describe Oono in one sentence?
*'A soft glow of light during golden hour,
 at the end of a sky-blue summers day...'*

That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.

It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass. It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors. It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold. It brings together the shimmer of dusk with the fresh start of dawn.

www.deltalight.com/oono





NEW

OONO

				OONO W S	OONO W M	OONO W L
3000K / CRI>90	LED 8,6W / 1089lm / 500mA	IP54	MAINS	29611 9308 ◊		
	LED 12,4W / 1467lm / 700mA				29612 9308 ◊	
LED 17,2W / 2101lm / 500mA					29613 9300 ◊	
2700K / CRI>90	LED 8,6W / 1041lm / 500mA			29611 9208 ◊		
	LED 12,4W / 1403lm / 700mA				29612 9208 ◊	
	LED 17,2W / 2009lm / 500mA					29613 9200 ◊
				◊ B ● / GM ● / W ○	◊ B ●	
				220-240V / 50-60Hz		



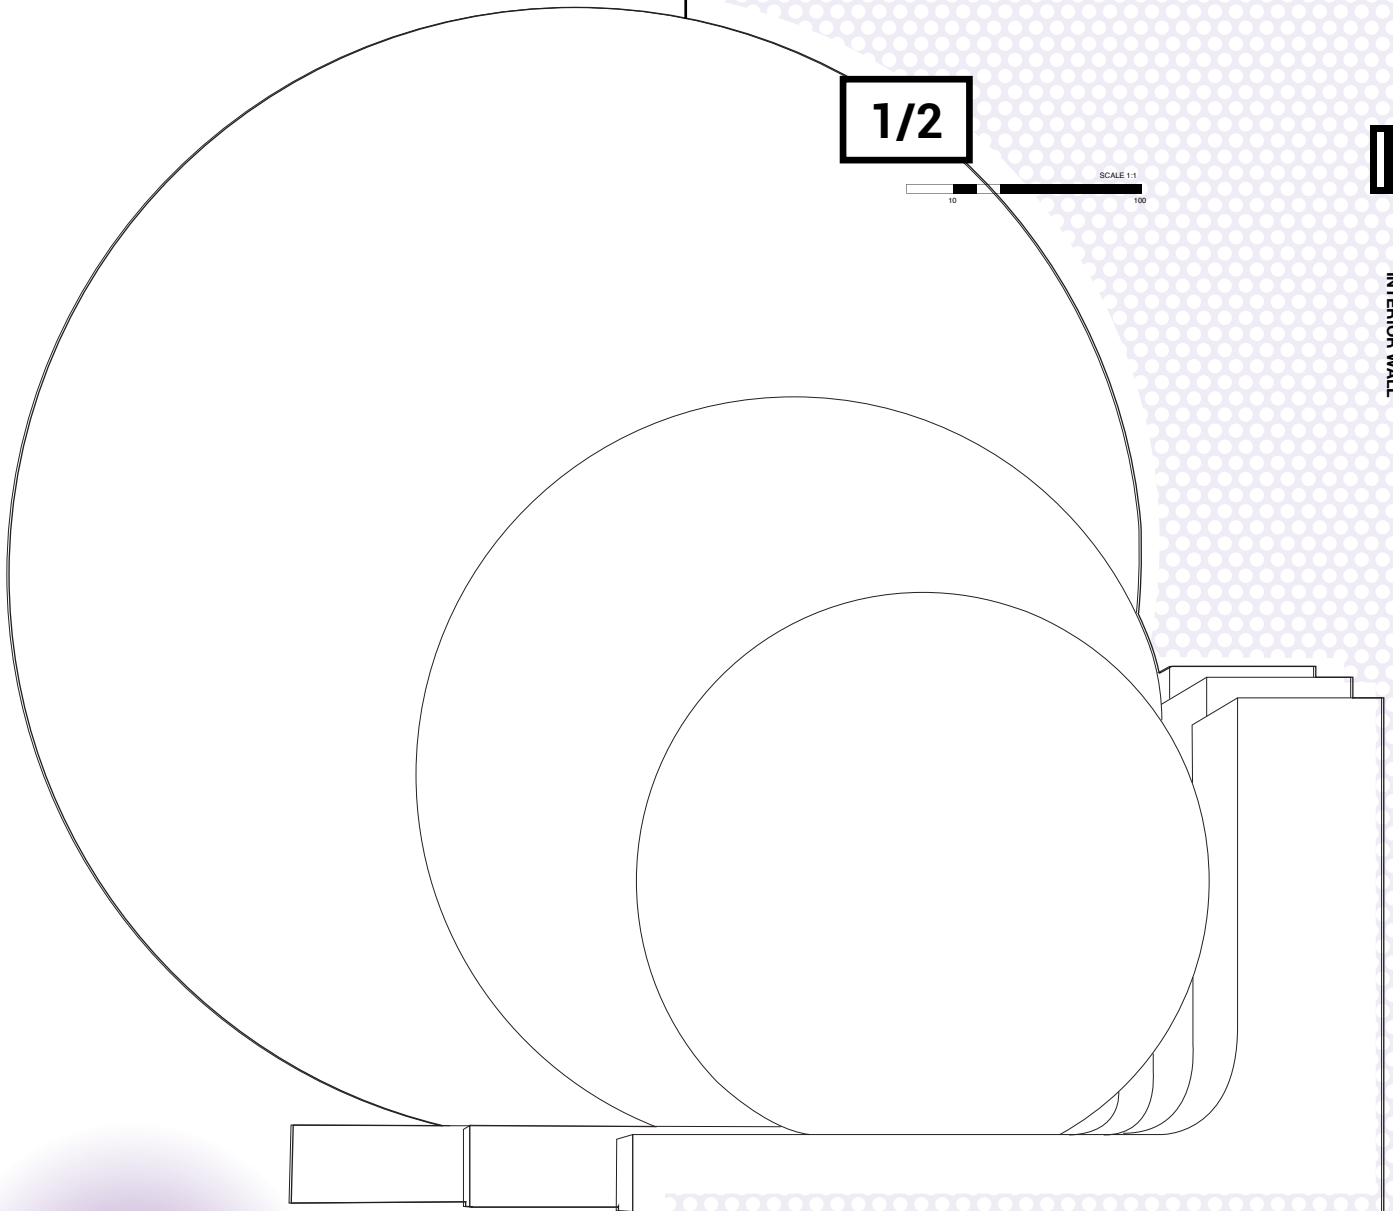

OONO
WS


**The shimmer of
dusk with the
fresh start of
dawn**

BAND-OH!

Shape your wall into a piece of art. The layers of light generated by Band-Oh! provide a sense of depth onto the surface its being installed on. The light not only hits the wall for a V-shaped down-up light effect, it also creates a play of light on the fixture itself. the design of Band-Oh! is made out of several shells above each other. An overlap between 2 layers shields the light source, while its openness leaves space for reflected light to escape. The result is a soft glow of light on the inner shell of Band-Oh!, generating an optical illusion of the outer shell freely floating around it.

While the double finish in two shades of black - structured matt and shiny Piano Black - enhances the layered feeling, the finish in Brushed Old Bronze gets an extra layer of richness thanks to the soft glow lighting it up.

www.deltalight.com/band-oh



BAND-OH!

BAND-OH!

3000K CRI>90	2 x LED 8W / 630lm	IP20	MAINS	30311 9308 ◇
2700K CRI>90	2 x LED 8W / 597lm			30311 9208 ◇

BROB ● / PB-B ●●
220-240V / 50-60Hz





INTERIOR WALL

**READ MY
COLOUR**

Layers of light

INNER SHELL
BLACK

PB-B

OUTER SHELL
PIANO BLACK

1/2




SCALE 1:1



TIGA

A medium sized rectangular lighting fixture, delivering a pleasant up and downward light effect on your wall. As a wall mounted luminaire, TIGA is perfect for both residential use or to apply in hotels and restaurants. TIGA comes as an indoor and outdoor version, perfect to merge your exterior and interior in a similar design language.

www.deltalight.com/tiga





TIGA				IN LED	LED BS	LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP20 IP65	MAINS	223 753 811 932 ED8 ◇	223 752 811 932 ED8 ◇	223 751 811 932 ED8 ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA	IP20 IP65		223 753 811 922 ED8 ◇	223 752 811 922 ED8 ◇	223 751 811 922 ED8 ◇
				◇ B-MMAT ● / W-W ○ ○ 220-240V / 50-60Hz	◇ A ● / G ● / W ○ ○ 220-240V / 50-60Hz	

WANT-IT

Want-it is a vivid range of wall luminaires. The streamlined and timeless design of the Want-it gives it a very flat and low-impact appearance, with no visible screws. The slightly curved edges provide a subtle twist to the design, while also creating a nicely delineated light pattern on the wall. The Want-it comes in a square and rectangular shape in all white or a more decorative black and matt gold combination.

www.deltalight.com/want-it






WANT-IT				S	L
3000K CRI>90	2 x LED 2.9W / 386lm / 350mA	IP20	MAINS	275 12 82 93 ED8 ◇	275 13 82 93 ED8 ◇
2700K CRI>90	2 x LED 2.9W / 369lm / 350mA			275 12 82 92 ED8 ◇	275 13 82 92 ED8 ◇
				◇ B-MMAT ● / W-W ○ ○ 220-240V / 0/50-60Hz	

GALA

Gala has been a classic within Delta Light's range of wall mounted fixtures. Recognizable by its rectangular shape with rounded corners, Gala comes as a down-up luminaire or as an uplighter, creating a flood of indirect light for a pleasant and intimate setting.

www.deltalight.com/gala





GALA				T	XL LP	XL	XL HP
3000K CRI>90	LED 9.4W / 1479lm / 350mA	IP20	NON DIM	12220 9300 ◇			
	LED 7.1W / 812lm / 350mA		MAINS		12219 9308 ◇		
	LED 13.8W / 1232lm / 500mA		MAINS			275 161 93 ED8 ◇	
	LED 32.6W / 3337lm / 850mA		1-10V				275 162 93 ED1 ◇
2700K CRI>90	LED 9.4W / 1422lm / 350mA	IP20	NON DIM	12220 9200 ◇			
	LED 7.1W / 779lm / 350mA		MAINS		12219 9208 ◇		
				◇ W ○ ○ 220-240V / 50-60Hz		◇ W ○ ○ 220-240V / 50-60Hz	




1/1



READ MY COLOUR

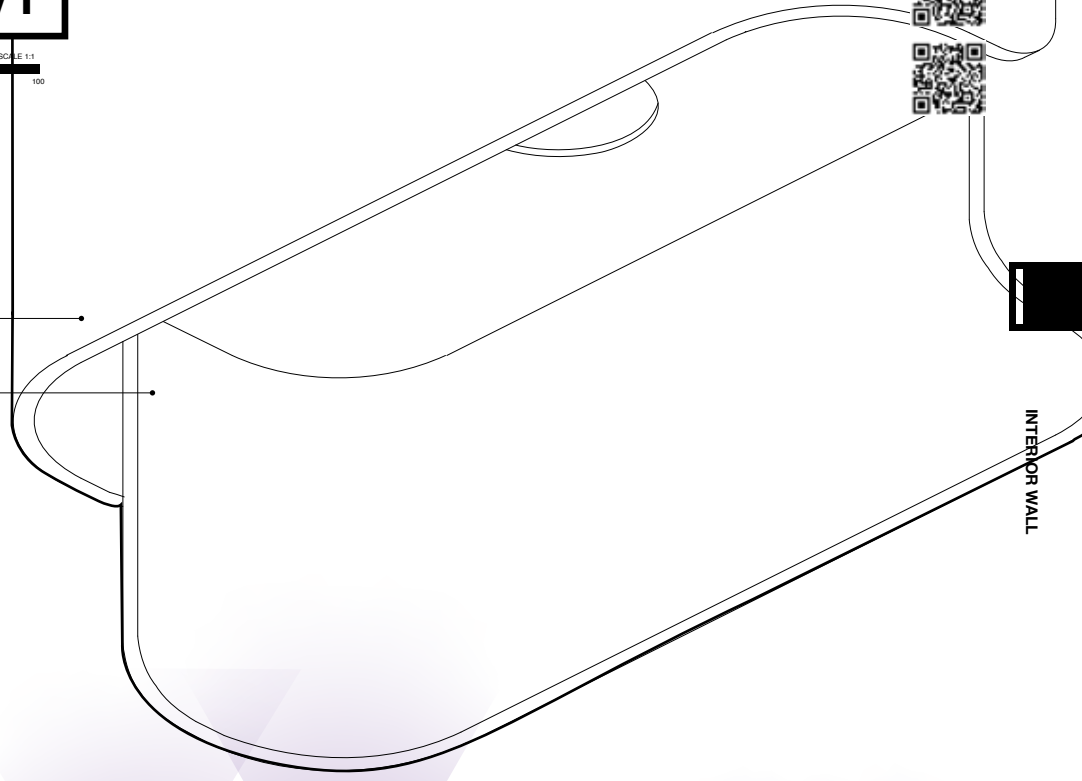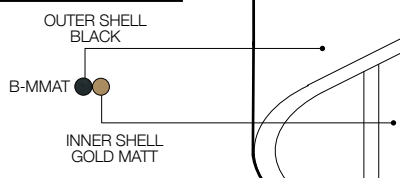

INTERIOR WALL

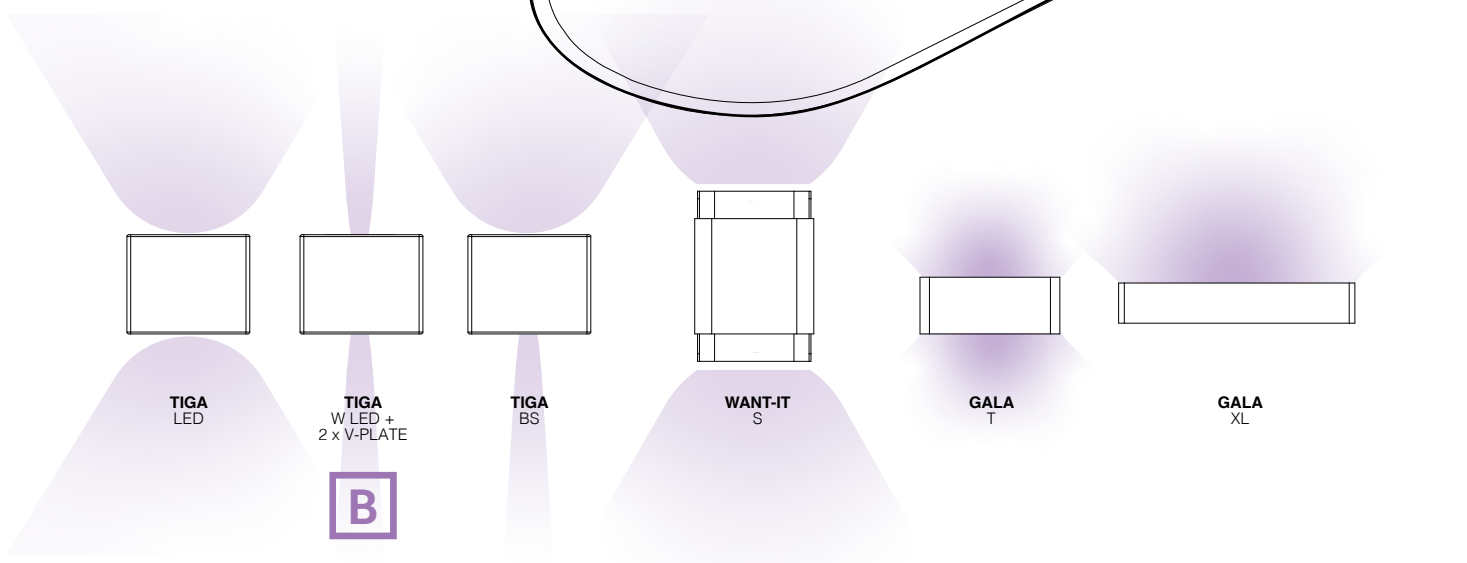

TIGA LED

TIGA W LED + 2 x V-PLATE


TIGA BS

WANT-IT S

GALA T

GALA XL

B

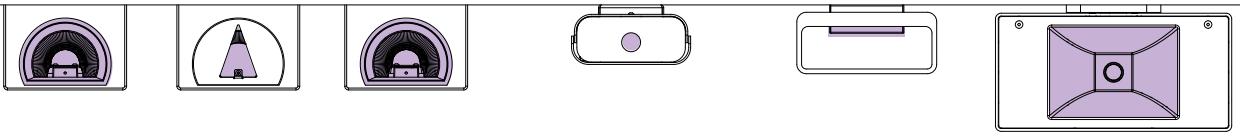

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY





INSTALLATION	REQUIREMENT / OPTION / ACCESSORY		
	IN LED	TIGA LED BS	LED
TIGA V-PLATE 223 753 01 B / W	A		

B

ORBIT

As a Design Plus Award winner in 2000, the Orbit has been a favorite in the wall mounted range of Delta Light for many years. This wall mounted family comes in two versions, Orbit, and Orbit T. Orbit combines a couple of LEDs with a lens for up- and downlight, which results in a distinctive light pattern on the wall. Finished in either standard lacquered finish or with the typical Punk look. Orbit T is a unique, see-through luminaire. The flexible LED around the hollows inside of the luminaire also results in a pleasant down-up light effect.

www.deltalight.com/orbit







ORBIT			T LED	LED	PUNK LED	PUNK HI
3000K CRI>90	LED 3W / 484lm / 24V-DC	IP20	NON DIM	271 05 93 ◊		
	2 x LED 2.9W / 386lm / 350mA		MAINS		271 04 93 ED8 ◊	271 08 93 ED8 ◊
2700K CRI>90	LED 3W / 484lm / 24V-DC		NON DIM	271 05 92 ◊		
	2 x LED 2.9W / 369lm / 350mA		MAINS		271 04 92 ED8 ◊	271 08 92 ED8 ◊
2 x QPAR51 max.35W						472 361 00
			◊ B-MMAT ● / W-W ○ ○ 220-240V / 50-60Hz	◊ B-MMAT ● ● / W-W ○ ○ 220-240V / 50-60Hz	◊ BP-MMAT / GC-B ● ● 220-240V / 0/150-60Hz	◊ BP / GC ● GU10 / 100-240V / 50-60Hz
			◊	◻	◻	◻ (0,5)



HEDRA

Hedra adds refinement, finesse and colour to the range. Next to black and white, Hedra W is available in a Gold Coloured and Black Bronze finish. The faceted design of the Hedra captures and reflects the ambient light with an ever-changing look as result. It is the typical design element of the Hedra family, which also includes a series of pendant and spotlight luminaires.

www.deltalight.com/vizir-hedra

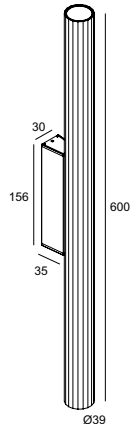


HEDRA			62 W DOWN-UP Hi	39 W	39 W 40 DOWN-UP	39 W 60 DOWN-UP
3000K CRI>90	LED 3.9W / 385lm / 350mA	IP20		22535 9310 ◊		
	2 x LED 3.9W / 385lm / 350mA		13°		22536 9310 ◊	22534 9310 ◊
2700K CRI>90	LED 3.9W / 385lm / 350mA			22535 9210 ◊	22536 9210 ◊	22534 9210 ◊
	2 x LED 3.9W / 385lm / 350mA					
2 x QPAR51 max.35W			472 362 00 ◊			
			◊ B ● / BBR ● ● / GC ● ● / W ○ ○ GU10 / 100-240V / 50-60Hz	◊ BBR-B ● ● / GC-B ● ● / W-W ○ ○ 220-240V / 50-60Hz		
			◻ (0,5)	◻		

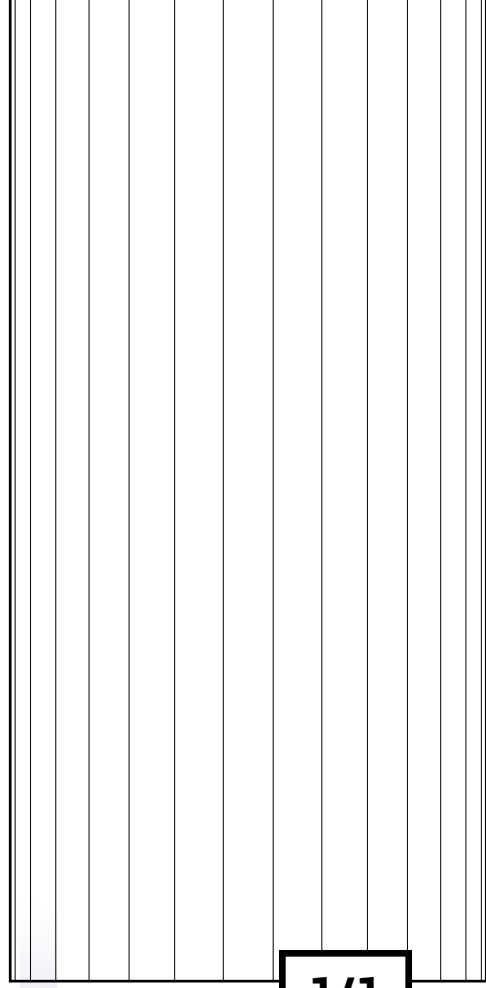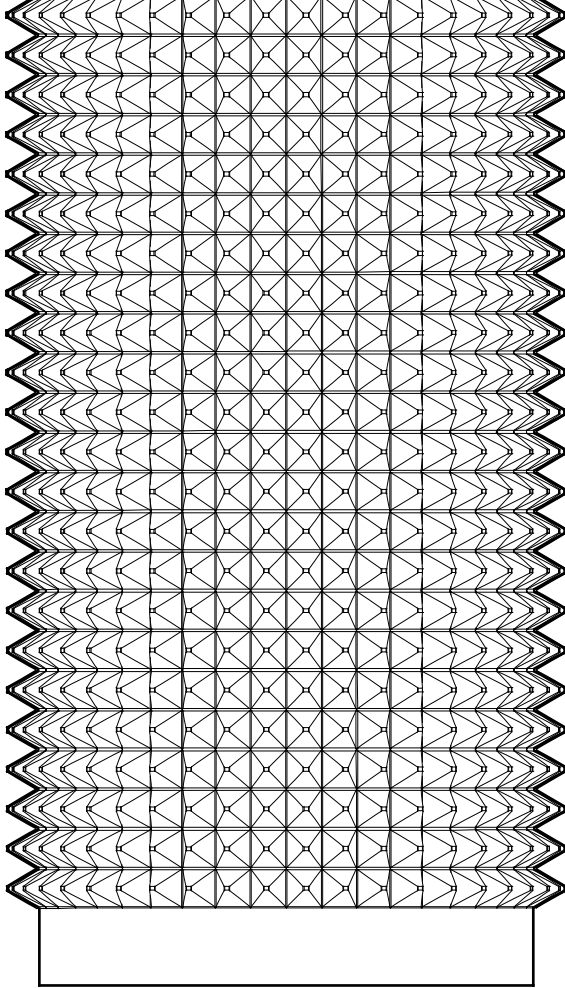

1/1




INTERIOR WALL

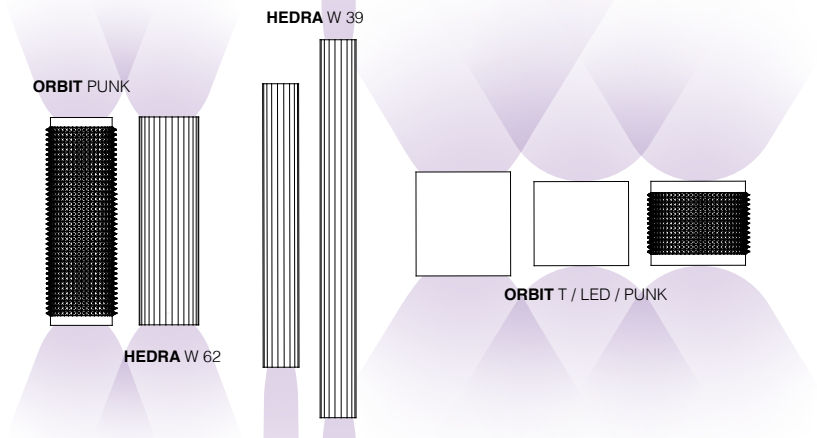

FRONT VIEW

TOP VIEW

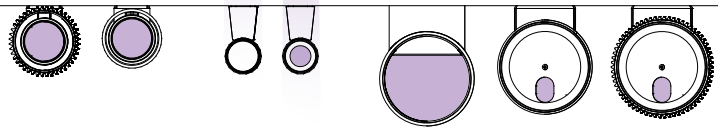

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

LED LAMP	REQUIREMENT / OPTION / ACCESSORY							
	ORBIT				HEDRA			
MORE INFO TECHNICAL CHAPTER	T LED	LED	PUNK LED	PUNK HI	62 W D/U Hi	39 W	39 W 40 D/U	39 W 60 D/U
				○	○			

VISION


Since its launch Vision has already won multiple awards, thanks to its impressive and nicely delineated parabolic light pattern on the wall. This classic is available both for indoor and outdoor use. Vision thanks its powerful light effect to the combination of LED technology in combination with a lens, giving its unique design and playful light effect

www.deltalight.com/vision.



VISION LED

3000K CRI>80	2 x LED 1.4W / 182lm / 500mA	IP20	278 25 22 ◇
2700K CRI>80	2 x LED 1.4W / 182lm / 500mA		278 25 23 ◇
			◇ W ○ / W-C ●
			100-240V / 50-60Hz

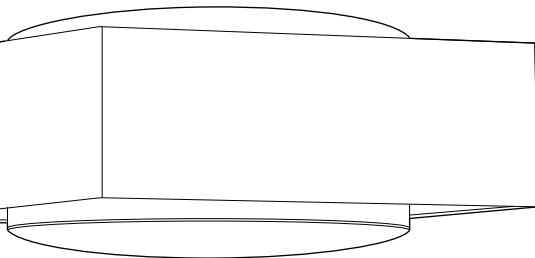


A

TOPIX

This multi award-winning luminaire ensures a playful effect and offers a lot of freedom. On its own, Topix wows you with its peculiar yet attractive design, when put together, you can create artistic clusters of light. Topix comes for in- and outdoors, giving you the opportunity to make your façade stand out.

www.deltalight.com/topix



41 x 38


TOPIX

3000K CRI>80	2 x LED [A] 1W / 132lm / 350mA	IP20	304 17 02 ◇
			◇ A ● / W ○





FIND ME ONLINE

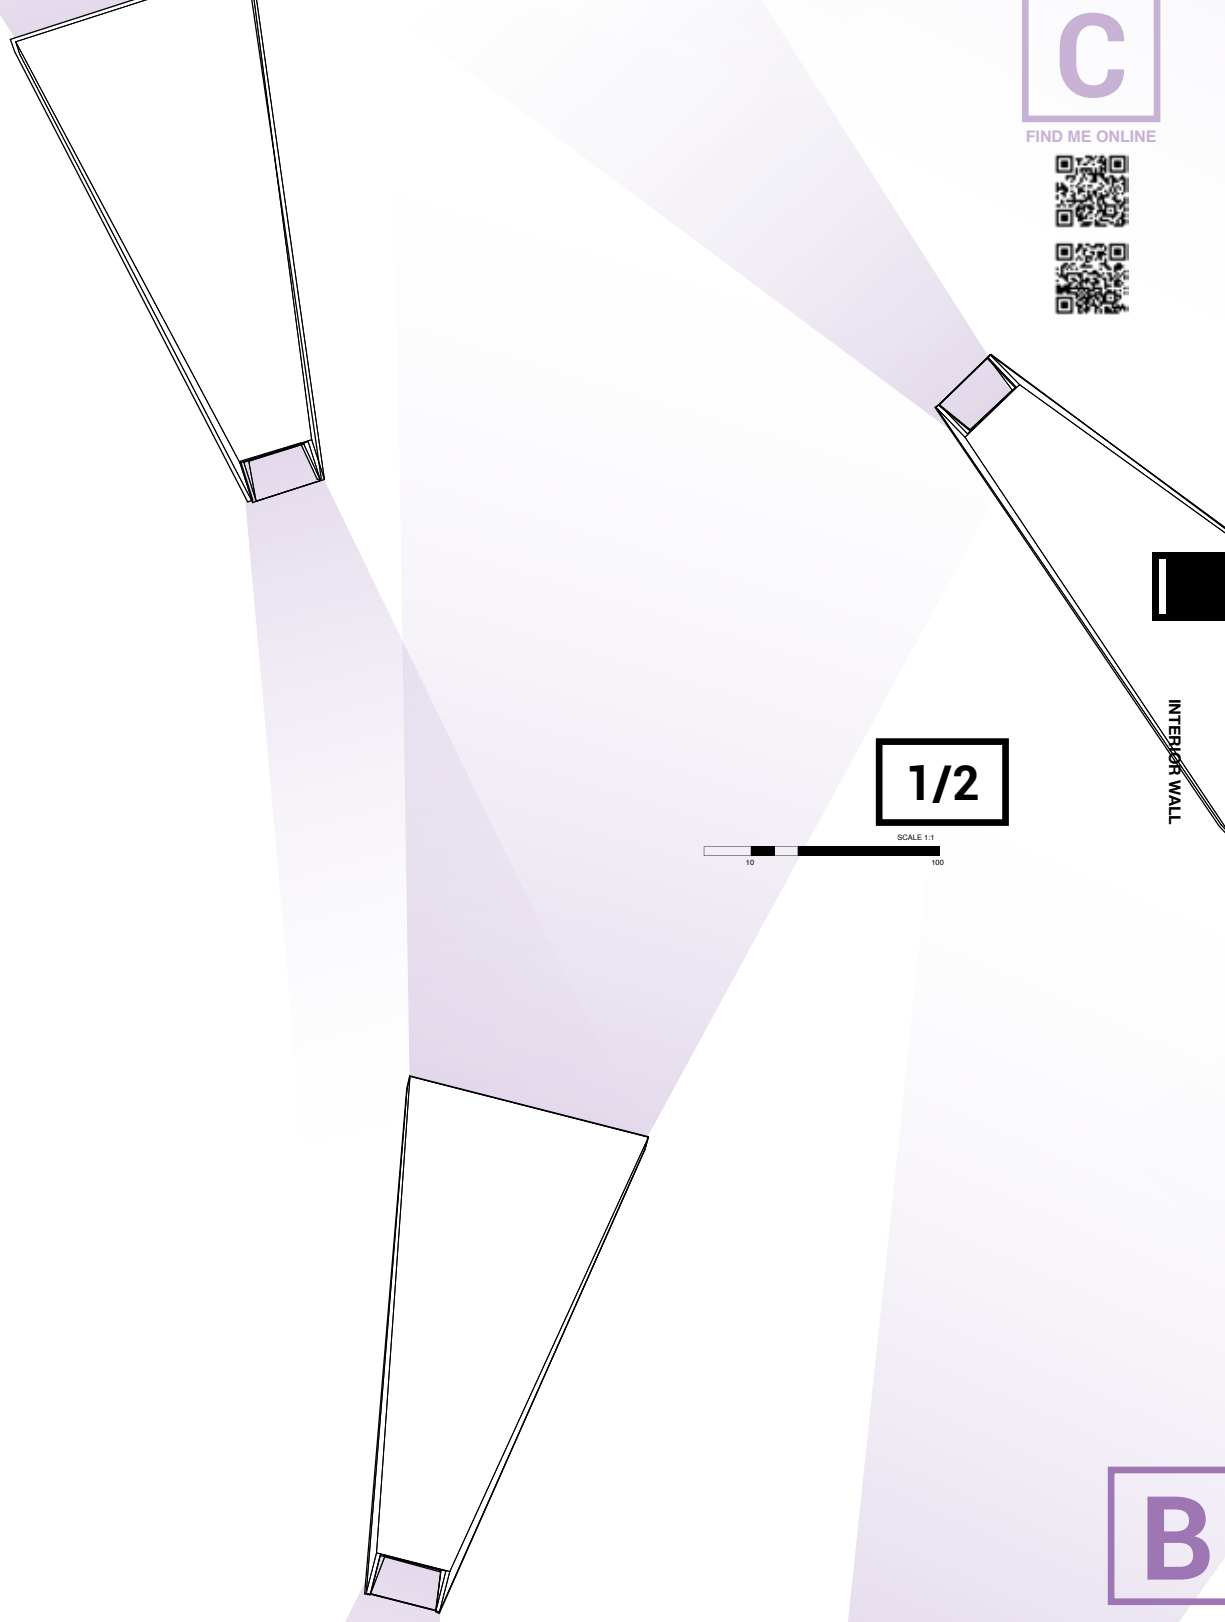

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	i min. 55
1-10V DIM 15	300 90 124	i min. 55
DALI DIM 14	300 90 125	i min. 55

INSTALLATION

CONCRETE BOX 153	302 20 21	
CONCRETE BOX TR 154	302 20 22	

VISION LED

TOPIX

R (min. 3 LED A) *

R (min. 6 LED A) *


R (min. 4 LED A) *

* REMOTE AINSTALLATION

BACKSPACE


In many ways, Backspace II is a joy for the eye, be it by its slender design, by its pleasant light effect or by its playful colour combinations. Backspace II is designed to create a 2-way light effect on the wall, the choice to install it in a horizontal or vertical way is up to you. By mounting the light source in the front part of the luminaire, it is perfectly shielded from looking directly into the source. Backspace II can be used for interior lighting in a white, grey or dark grey finish or for outdoor settings in grey or dark grey. An additional touch of colour can be added to the luminaires by opting for an extra golden reflector.

www.deltalight.com/backspace



BACKSPACE

BACKSPACE				II	II X
3000K CRI>90	LED 9,6W / 1281lm / 500mA	IP20	MAINS DIM	10212 9308 ◊	
		IP54	NON DIM		10214 9300 ◊
2700K CRI>90	LED 9,7W / 1204lm / 500mA	IP20	MAINS DIM	10212 9208 ◊	
		IP54	NON DIM		10214 9200 ◊
				◊ W ○ 220-240V / 50-60Hz	◊ A ● / N ● 220-240V / 50-60Hz
				◊	◻

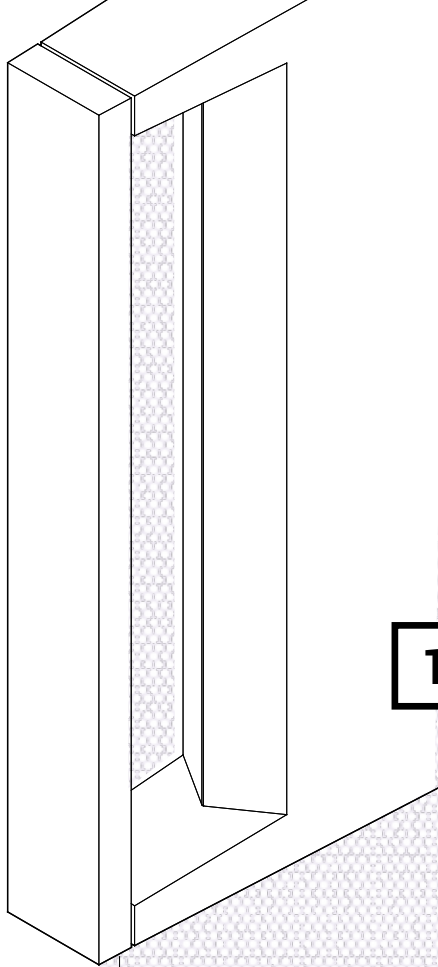

1/2




INTERIOR WALL

B




BACKSPACE II REFLECTOR

A

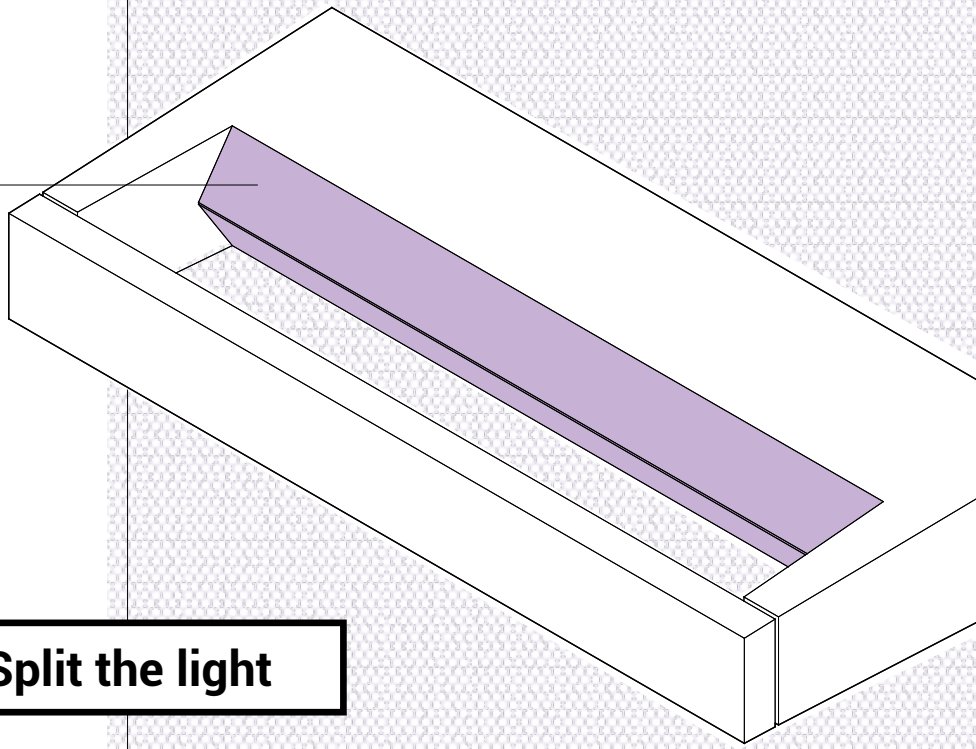

Split the light



FINISH YOUR SPECIFICATION



BACKSPACE

II II X


FINISH			
BACKSPACE II REFLECTOR	10215 0010 GC	A	A

B

FEMTOLINE W

Femtoline TP is designed as a mirror light for bathrooms. The specific linear optics allow for a diffused spread of light to 2 sides of the profile, perfect to light up both the mirror and the person in front of it. Available in 2 finishes and 2 sizes for easy integration into the design of the bathroom.

www.deltalight.com/femtoline




FEMTOLINE		W DOWN-UP	
		L 600mm	L 1290 mm
3000K CRI>90	LED (UP) 9W / 840lm / 24V-DC (DOWN) 9W / 840lm / 24V-DC	IP20	270 63 06 93 ◊
	LED (UP) 18,2W / 1680lm / 24V-DC LED (DOWN) 18,2W / 1680lm / 24V-DC		270 63 12 93 ◊
◊ B ● / W ○ 220-240V / 50-60Hz			

FEMTOLINE TP

This slim and multi-functional wall mounted profile creates a cosy effect on the wall. It comes as fixed lengths of 600 and 1200mm and is also available as bespoke wall mounted profile for direct-indirect lighting on vertical surfaces.

www.deltalight.com/femtoline



FEMTOLINE		TP WALL 60		TP WALL 100	
		L 560mm		L 1060 mm	
3000K CRI>90	LEDFLEX 11,9W / 1155lm / 24V-DC	IP44	270 75 060 ◊		
	LEDFLEX 22,6W / 2205lm / 24V-DC			270 75 100 ◊	
		◊ W ○			
		220-240V / 0 50-60Hz		100-240V / 50-60Hz	

A



FIND ME ONLINE




INTERIOR WALL

FEMTOLINE
W DOWN-UP

1/4



FEMTOLINE
TP W

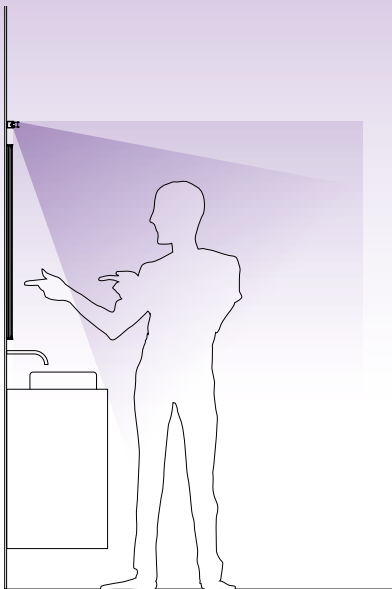

INDEX

Interior Track Lighting




Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**

3F TRACK

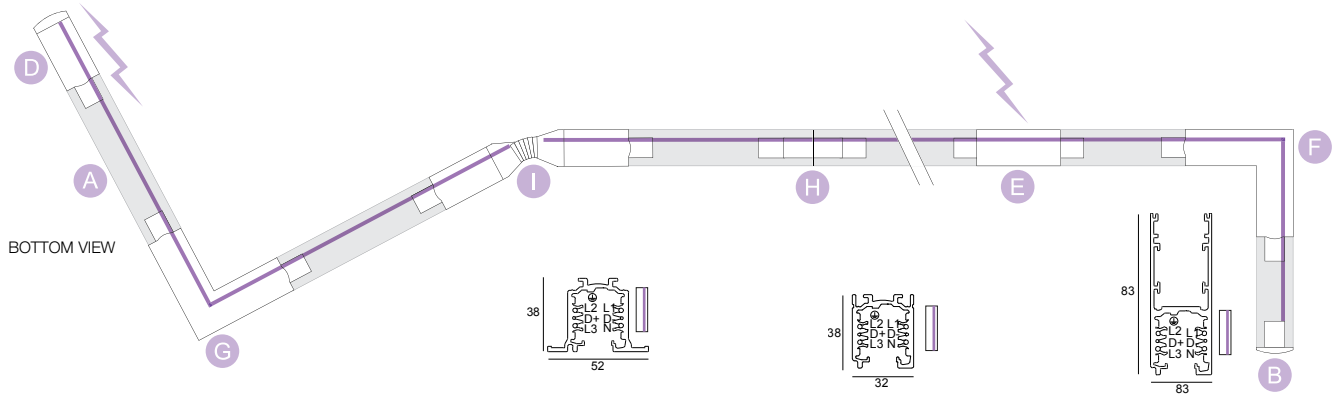

40 x (L + ENDCAP/SUPPLY/CORNERS) x 70
min.5 - max.25

TRACK

3F DIM IN

3F DIM ON

3F DIM H

1 PROFILE

A TRACK 1m	200 13 410 ◊ ◊ B ● / W ○	200 12 410 ◊ ◊ B ● / W ○	200 14 410 ◊ ◊ B ● / W ○
A TRACK 2m	200 13 420 ◊ ◊ B ● / W ○	200 12 420 ◊ ◊ B ● / W ○	200 14 420 ◊ ◊ B ● / W ○
A TRACK 3m	200 13 430 ◊ ◊ B ● / W ○	200 12 430 ◊ ◊ B ● / W ○	200 14 430 ◊ ◊ B ● / W ○

110-240V / 50-60Hz ◊ IP20 (W = RAL 9010)

2 DIMENSIONS


The length of each profile needs to be defined in mm and will depend on the shape and construction of the design.

3 ENDCAPS / SUPPLY / CORNERS

B END CAP	200 13 41 B/W	200 12 41 B/W	200 14 41 B/W
D END SUPPLY 11	200 12 11 B/W + 200 13 11 B/W	200 12 11 B/W	200 14 11 B/W
D END SUPPLY 12	200 12 12 B/W + 200 13 11 B/W	200 12 12 B/W	200 14 12 B/W
E MIDDLE SUPPLY	200 12 14 B/W + 200 13 14 B/W	200 12 14 B/W	200 14 14 B/W
F CORNER 90° OUT	200 12 35 B/W + 200 13 12 B/W	200 12 35 B/W	200 14 35 B/W
G CORNER 90° IN	200 12 34 B/W + 200 13 12 B/W	200 12 34 B/W	200 14 34 B/W
H CORNER 180°	200 12 21 B/W	200 12 21 B/W	200 14 21 B/W
I FLEX CORNER	-	200 12 24 B/W	-

4 FIXATION

J INSIDE CLIP	200 13 14 01	-	-
K DIRECT FIXATION	-	200 12 02 ANO	-
L SUSPENSION 3,0m	-	200 12 13	200 14 13
M ROD SUSPENSION 1,0m	-	200 12 50 A/B/W	-
N CUTTING TOOL	200 12 01	200 12 01	200 12 01

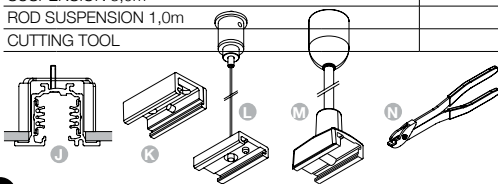

5 CONNECTION

CURRENT SUPPLY 5 x 0,75mm ² 3,0m	-	200 99 53	200 99 53
CONNECTION ST	-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R	-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S	-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R 100mm	-	204 00 100 B / W	204 00 100 B / W

6 LIGHT MODULES UP FOR TRACK 3F DIM H

SEE SHELFLINE ON PAGE RIGHT

7 LIGHT MODULES DOWN

SEE NEXT PAGES


UPLIGHT FOR TRACK 3F DIM H
SHELFLINE 19
1 PROFILE

PROFILE / m	398 03 00 ◊
MAX. LENGTH PER PROFILE SECTION 3m	◊ ANO ●
POLYCARBONATE / m	
SANDBLASTED (SBL)	398 03 05 SBL
CLEAR	398 03 05 CL

2 DIMENSIONS


THE LENGTH OF EACH PROFILE NEEDS TO BE DEFINED IN MM AND WILL DEPEND ON THE SHAPE AND CONSTRUCTION OF THE DESIGN AND THE LIGHT MODULES SELECTED TO GO IN TO EACH PROFILE SECTION.

3 ENDCAPS / SUPPLY / CORNERS

ENDCAP SET (2 PCS.)	398 03 03 01 A
---------------------	----------------

4 FIXATION

SHL19-MOUNTING CLIP SET (10 PCS.)	200 14 06
-----------------------------------	-----------


 5m - 24V-DC
NOT MOUNTED

LEDFLEX

		Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62,5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
		5W/m 551lm/m	10W/m 1045lm/m	15W/m 1853lm/m	20W/m 2470lm/m	18W/m 1460 lm/m	9,5W/m ⁽¹⁾ 1116lm/m	11W/m	19,2W/m ⁽²⁾
		WHITE	WHITE MP	WHITE FP	WHITE HP	SOFT DIM	TW	RGB	RGB / TW
4000K ● CRI > 90	IN	21030 0060	21030 0140	21030 0220	21030 0300				
	OUT (IP65)	21030 0100	21030 0180	21030 0260					
3000K ● CRI > 90	IN	21030 0040	21030 0120	21030 0200	21030 0280				
	OUT (IP65)	21030 0080	21030 0160	21030 0240					
2700K ● CRI > 90	IN	21030 0030	21030 0110	21030 0190	21030 0270				
	OUT (IP65)	21030 0070	21030 0150	21030 0230					
1800K ● ▶ 3000K ● CRI > 90	IN					21030 0020			
	OUT (IP65)								
2700K ● ▶ 6000K ● CRI > 90	IN						21030 0390		
	OUT (IP65)								
RGB ● CRI > 90	IN							21030 0400	
	OUT (IP65)							21030 0410	
RGB WW ● / TW ⁽²⁾ CRI > 90	IN								21030 0420
	OUT (IP65)								


LED POWER SUPPLY 24V-DC (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M) MORE INFO TECHNICAL CHAPTER

	24W / IP20	21012 0160	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
NON DIM	150W / IP67	300 89 24 150	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	21012 0181	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	21012 0191	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI DIM (DIM5)	60W / IP67	21012 0101	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0111	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0121	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP20	21012 0205	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
DALI DIM (DIM5)	100W / IP20	21012 0225	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	21012 0135	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0145	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0155	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*

CONTROL MORE INFO TECHNICAL CHAPTER

	RGB / RGB TW DRIVER						300 90 331	300 90 331	21032 0010
	TOUCH CONTROLLER						300 90 332	300 93 330	21032 0120
NON DIM						300 90 003 ED1			
1-10V	24V-DC DIM UNIT					300 90 003 ED5			
DALI DIM						300 90 010			

⁽¹⁾ 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
⁽²⁾ RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K
* TO BE USED AS NON DIM

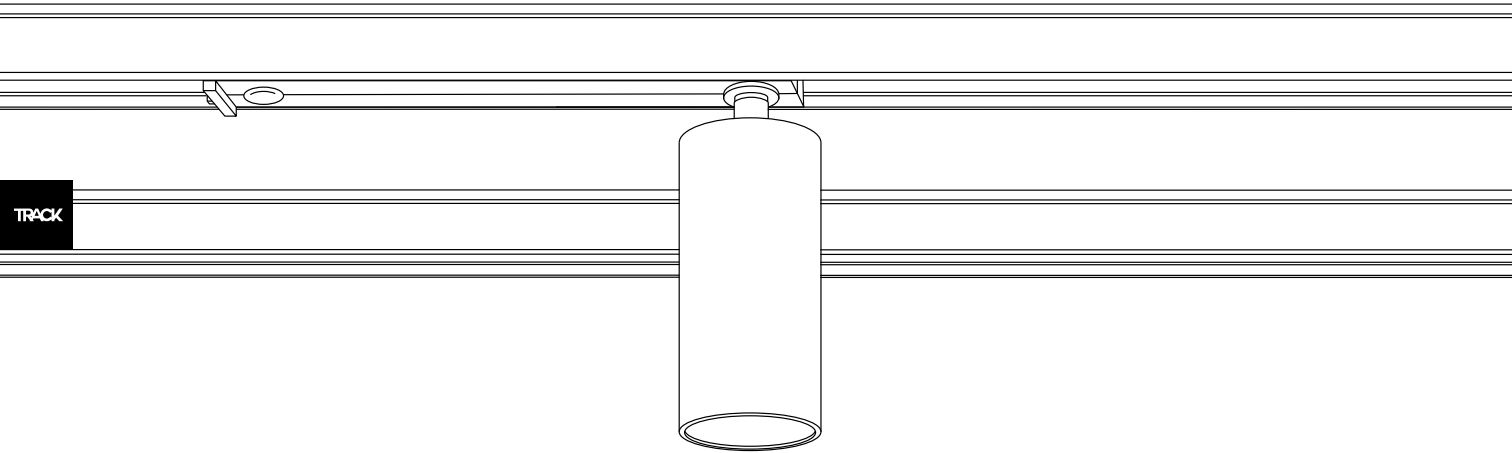

Minimalism, functionality and versatility are the key terms to describe this extensive collection. The Spy was designed to meet multiple lighting requirements, an ideal solution for accent lighting in residential, hospitality or commercial spaces. The range features low to high lumen packages, narrow to wide beam options, standard or specific LED colours, recessed to surface mounted and track applications, different colour finishes and combinations, and can be equipped with multiple light refining accessories.

Following the constant changes in the world of LEDs and optics and the evolution to better user comfort with more precise optics and better light control, the complete Spy range has been upgraded. The result? Fresh shapes and additional finishing colours, better light comfort through hybrid optics, improved LED colour consistency and new perspectives with Tunable White and Soft Dim.

The renewed Spy family comes in diameters of 27, 39, 52, 66 and 90 millimeters, a range of spotlights to fit any purpose. While the smaller versions come in the lively colours Flemish Bronze, Flemish Gold and Gold Coloured, the bigger Spy's offer Tunable White and Soft Dim solutions in multiple beam angles.

On track, Spy is available in diameters of 52, 66 or 90 millimeters, ranging from 1500 up to 4600lm for several lighting purposes. For specific project demands, Spy offers Soft Dim and Tunable White solutions in different beam angles, ideal to create a particular mood or cosy atmospheres.

With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body. As such, every beam angle between 8° and 43° is possible.


For Spy 90 on track, the possibility of an adjustable beam angle within 1 luminaire is taken to a higher level. The technology inside LensVector's dynamic beam shaping lenses allow for a wireless adjustment of the beam angle. One can easily adjust the beam angle and the light intensity of these luminaires using CTRL Delta, as dimming of the luminaire and controlling of the beam angle can be done with all smart devices.

www.deltalight.com/spy

**Low to high output,
narrow to wide optics,
multiple LED colours,
different colour finishes,
light refining accessories**



FIND ME ONLINE

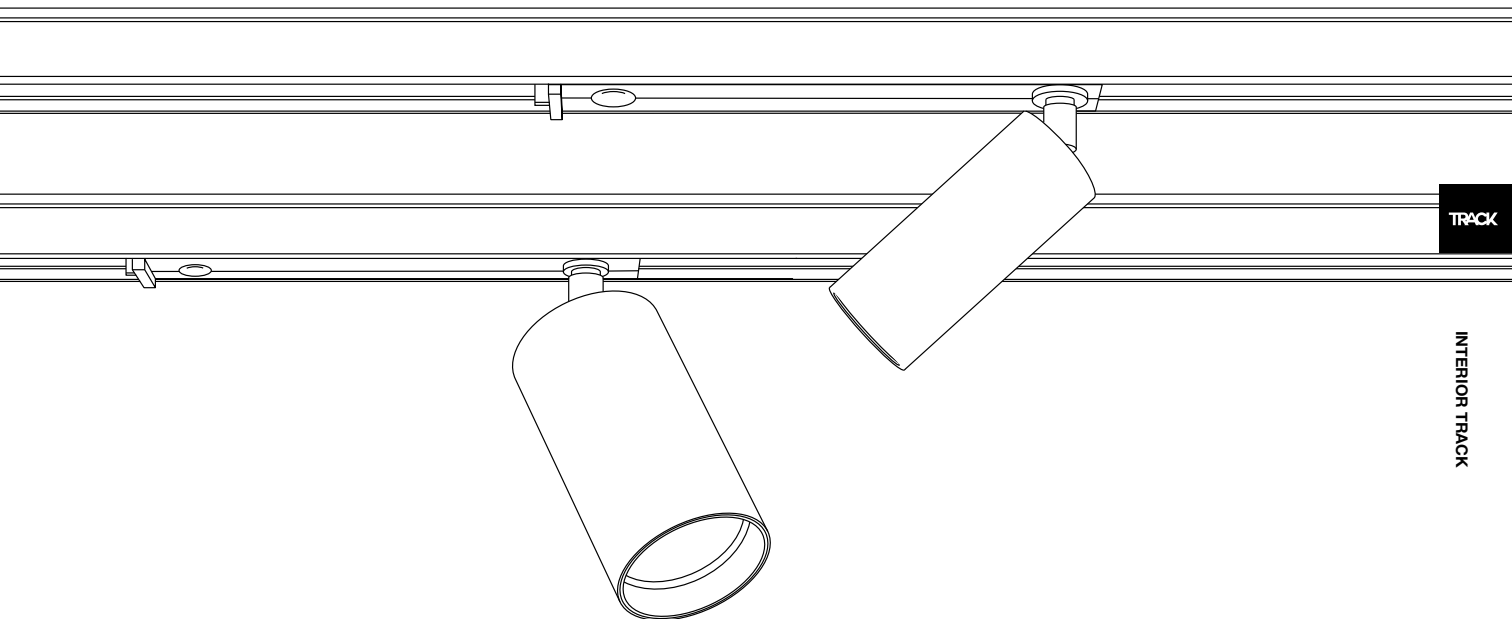


TRACK

INTERIOR TRACK

SPY

SPY 52 / FOCUS

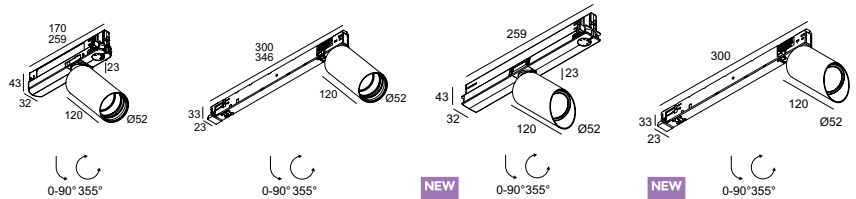


SPY 52

ADM ADM SLIM **NEW** WALLWASH ADM **NEW** WALLWASH ADM SLIM

Color Temperature / CRI	Beam Angle / Power	Control	Beam Angle	Product Code			
				ADM	ADM SLIM	WALLWASH ADM	WALLWASH ADM SLIM
3000K CRI>90	WALLWASH LED 8.6W / 1089lm / 500mA	NON DIM	WW			19885 9300 ◊	19886 9300 ◊
		DALI				19885 9305 ◊	19886 9305 ◊
	LED 12.4W / 1467lm / 700mA	NON DIM	20°	19834 9320 ◊	19836 9320 ◊		
		DALI		19834 9325 ◊	19836 9325 ◊		
	NON DIM	45°	19834 9330 ◊	19836 9330 ◊			
		DALI		19834 9335 ◊	19836 9335 ◊		
2700K CRI>90	WALLWASH LED 8.6W / 1041lm / 500mA	NON DIM	WW			19885 9200 ◊	19886 9200 ◊
		DALI				19885 9205 ◊	19886 9205 ◊
	LED 12.4W / 1403lm / 700mA	NON DIM	20°	19834 9220 ◊	19836 9220 ◊		
		DALI		19834 9225 ◊	19836 9225 ◊		
	NON DIM	45°	19834 9230 ◊	19836 9230 ◊			
		DALI		19834 9235 ◊	19836 9235 ◊		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA	NON DIM	20°	19844 9025 ◊	19845 9025 ◊		
		DALI					
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 500mA	NON DIM	20°	19881 9025 ◊			
		DALI DT8					
		NON DIM	45°	19844 9035 ◊	19845 9035 ◊		
		DALI					
		NON DIM	20°	19881 9025 ◊			
		DALI DT8					
		NON DIM	45°	19881 9035 ◊			
		DALI DT8					

◊ B ● / W ○
220-240V / 50-60Hz

□ IP20

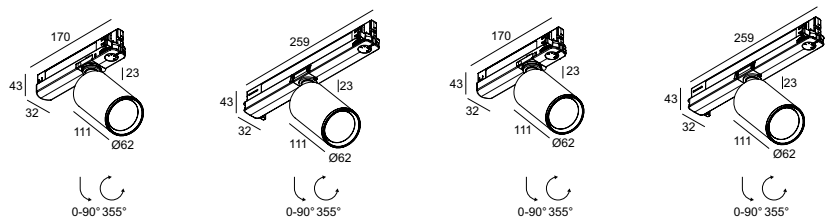


SPY FOCUS

LP ADM MP ADM


Color Temperature / CRI	Beam Angle / Power	Control	Beam Angle	Product Code			
				LP ADM	MP ADM	LP ADM	MP ADM
3000K CRI>90	LED 8.6W / 1018lm / 500mA	NON DIM	8-43°	19879 9300 ◊			
		DALI			19879 9305 ◊		
	LED 17.2W / 2101lm / 500mA	NON DIM	12-45°			19875 9300 ◊	
		DALI					19875 9305 ◊
2700K CRI>90	LED 8.6W / 974lm / 500mA	NON DIM	8-43°	19879 9200 ◊			
		DALI			19879 9205 ◊		
	LED 17.2W / 2009lm / 500mA	NON DIM	12-45°			19875 9200 ◊	
		DALI					19875 9205 ◊

◊ B ● / W ○
220-240V / 50-60Hz

□ IP20

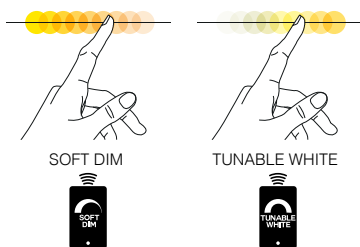


INTER-CHANGEABLE OPTICS

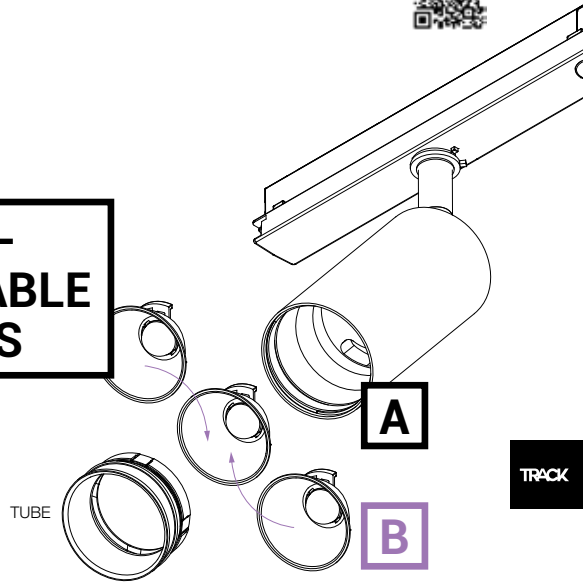


TRACK

INTERIOR TRACK

FOCUS

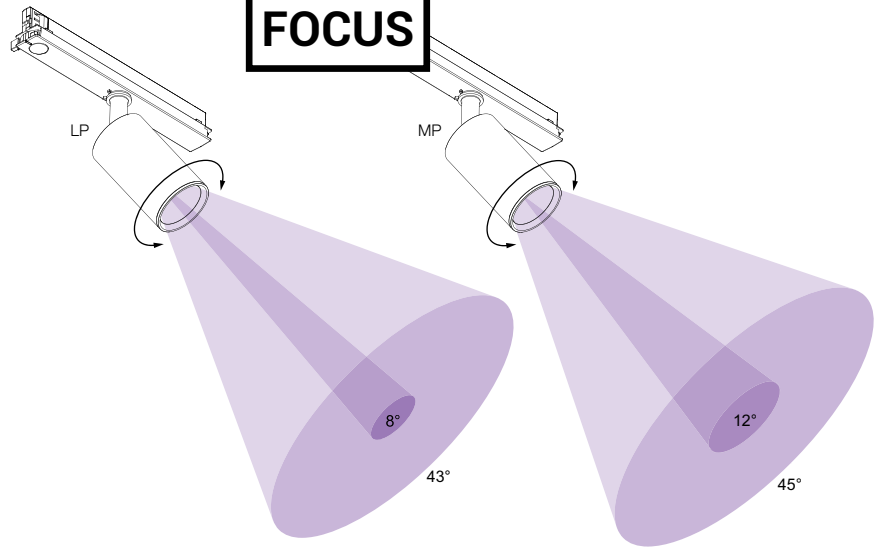

WALLWASH

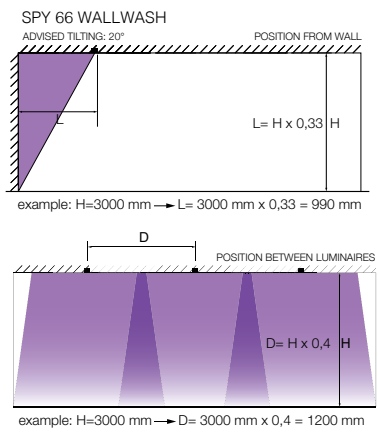

FINISH YOUR SPECIFICATION





REQUIREMENT / OPTION / ACCESSORY

	SPY 52				SPY FOCUS	
	ADM	ADM SLIM	WALLWASH ADM	WALLWASH ADM SLIM	LP ADM	MP ADM
TRACK 3F DIM IN / ON / H PAGE 348	R	R	R	R	R	R
FINISH						
SPY 52 TUBE	19810 0100 B/FBR/FG/GC/W	R	R			
OPTICS						
REFLECTORS 20°	19810 0180	O	O			
REFLECTORS 45°	19810 0190	O	O			
HONEYCOMB / LENS / GLASS						
HONEYCOMB SINGLE USE	19810 0010	A*	A*			
HONEYCOMB DOUBLE USE	19810 0060	A*	A*			
LINEAR SPREAD LENS	19810 0020	A*	A*			
SPREAD LENS	19810 0030	A*	A*			
SOFTENING LENS	19810 0040	A*	A*			
GLASS SBL	19810 0050	A*	A*			

* ONLY FOR TUNABLE WHITE

B

SPY 66







SPY 66

ADM ADM SLIM WALLWASH ADM WALLWASH ADM SLIM

3000K CRI>90	LED 25W / 2811lm / 700mA	NON DIM	18°	24625 9310 ◊	24626 9310 ◊			
		DALI	30°	24625 9315 ◊	24626 9315 ◊			
	LED 17.2W / 2101lm / 500mA	NON DIM	30°	24625 9320 ◊	24626 9320 ◊			
		DALI	45°	24625 9325 ◊	24626 9325 ◊			
		NON DIM	45°	24625 9330 ◊	24626 9330 ◊			
		DALI		24625 9335 ◊	24626 9335 ◊			
		NON DIM	WW			24631 9300 ◊	24632 9300 ◊	
		DALI				24631 9305 ◊	24632 9305 ◊	
2700K CRI>90	LED 25W / 2688lm / 700mA	NON DIM	18°	24625 9210 ◊	24626 9210 ◊			
		DALI	30°	24625 9215 ◊	24626 9215 ◊			
		NON DIM	30°	24625 9220 ◊	24626 9220 ◊			
		DALI	45°	24625 9225 ◊	24626 9225 ◊			
			NON DIM	45°	24625 9230 ◊	24626 9230 ◊		
			DALI		24625 9235 ◊	24626 9235 ◊		
	LED 17.2W / 2009lm / 500mA	NON DIM	WW			24631 9200 ◊	24632 9200 ◊	
		DALI				24631 9205 ◊	24632 9205 ◊	
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 500mA	NON DIM	18°	24629 9015 ◊				
		DALI DT8	30°	24629 9025 ◊				
		NON DIM	45°	24629 9035 ◊				
		DALI DT8						

◊ B ● / W ○
220-240V / 50-60Hz

□ IP20



SPY 66


LP ADM MP ADM

3000K CRI>90	LED 8.6W / 1018lm / 500m	NON DIM	12°	24610 9310 ◊	24610 9315 ◊			
		DALI	33°	24610 9330 ◊	24610 9335 ◊			
	LED 17.2W / 2101lm / 500mA	NON DIM	18°			24612 9310 ◊	24612 9315 ◊	
		DALI	26° **			24612 9320 ◊	24612 9325 ◊	
		NON DIM	39° *			24612 9330 ◊	24612 9335 ◊	
		DALI						
2700K CRI>90	LED 8.6W / 974lm / 500m	NON DIM	12°	24610 9210 ◊	24610 9215 ◊			
		DALI	33°	24610 9230 ◊	24610 9235 ◊			
			NON DIM	18°			24612 9210 ◊	24612 9215 ◊
			DALI	26° **			24612 9220 ◊	24612 9225 ◊
			NON DIM	39° *			24612 9230 ◊	24612 9235 ◊
			DALI					

◊ B ● / W ○
220-240V / 50-60Hz

□ IP20


* ONLY HONEYCOMB
** NO LINEAR SPREAD LENS



TUNABLE WHITE





INTER-CHANGEABLE OPTICS

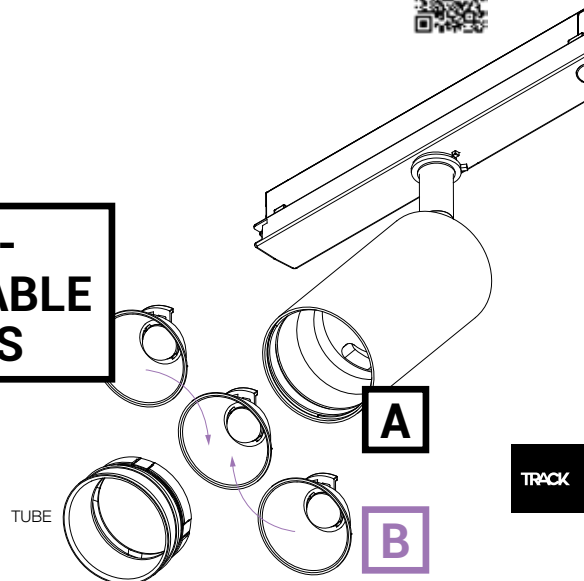

TRACK

INTERIOR TRACK

WALLWASH

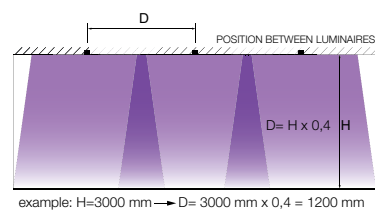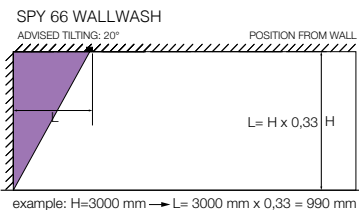

FINISH YOUR SPECIFICATION




REQUIREMENT / OPTION / ACCESSORY

		SPY 66		SPY 66 WALLWASH		SPY 66 LP/MP	
		ADM	ADM SLIM	ADM	ADM SLIM	LP ADM	MP ADM
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R	R	R	R
FINISH							
SPY 66 TUBE	24611 0100 B / FBR / FG / GC / W	R	R				
SPY 66 LP/MP TUBE	24611 0010 B / MMAT / W					R	R
OPTICS							
REFLECTORS: 18°	24611 0220	O	O				
REFLECTORS: 30°	24611 0230	O	O				
REFLECTORS: 45°	24611 0240	O	O				
HONEYCOMB / LENS / GLASS							
HONEYCOMB SINGLE USE	24611 0150 B	A	A				
	24611 0050 B					A	A
HONEYCOMB DOUBLE USE	24611 0210 B	A*					
	24611 0170	A*					
LINEAR SPREAD LENS	24611 0070					A	A
	24611 0200	A*					
SPREAD LENS	24611 0190	A*					
	24611 0090					A	A
SOFTENING LENS	24611 0160	A*					
	24611 0060					A	A
GLASS SBL							
						A	A



* MAX. 500mA

SPY 90



SPY 90

ADM

ADM DIM1


ADM DIM5

		1-10V	18°				
3000K CRI>90	LED 23.2W / 3169lm / 700mA	1-10V	18°				
		1-10V	30°			19883 9311 ◊	
		1-10V	45°			19883 9321 ◊	
	LED 36W / 4592lm / 1050mA	NON DIM	18°		19883 9310 ◊		
		DALI	18°				19883 9315 ◊
		NON DIM	30°		19883 9320 ◊		
		DALI	30°				19883 9325 ◊
		NON DIM	45°		19883 9330 ◊		
		DALI	45°				19883 9335 ◊
2700K CRI>90	LED 23.2W / 3031lm / 700mA	1-10V	18°			19883 9211 ◊	
		1-10V	30°			19883 9221 ◊	
		1-10V	45°			19883 9231 ◊	
	LED 36W / 4393lm / 1050mA	NON DIM	18°		19883 9210 ◊		
		DALI	18°				19883 9215 ◊
		NON DIM	30°		19883 9220 ◊		
		DALI	30°				19883 9225 ◊
		NON DIM	45°		19883 9230 ◊		
		DALI	45°				19883 9235 ◊
TUNABLE WHITE	6500-2700K / CRI>90 LED 17.8W / 2054lm / 500mA	DALI DT8	18°			19884 9015 ◊	
		DALI DT8	30°			19884 9025 ◊	
		DALI DT8	45°			19884 9035 ◊	


◊ B ● / W ○
220-240V / 50-60Hz

□ IP20





INTER-CHANGEABLE OPTICS

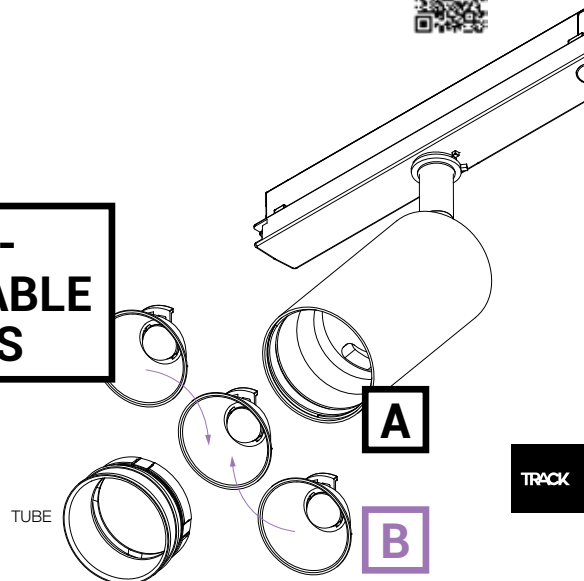

TRACK


INTERIOR TRACK

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		SPY 90		
		ADM	ADM DIM1	ADM DIM5
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R
FINISH				
SPY 90 TUBE	19810 0170 B / FBR / FG / GC / W	R	R	R
OPTICS				
REFLECTORS: 18°	19810 0200	O	O	O
REFLECTORS: 30°	19810 0210	O	O	O
REFLECTORS: 45°	19810 0220	O	O	O
HONEYCOMB / LENS / GLASS				
HONEYCOMB SINGLE USE	19810 0110 B	A	A	A
HONEYCOMB DOUBLE USE	19810 0120 B	A	A	A
LINEAR SPREAD LENS	19810 0140	A	A	A
SPREAD LENS	19810 0160	A	A	A
SOFTENING LENS	19810 0150	A	A	A
GLASS SBL	19810 0130	A	A	A

B

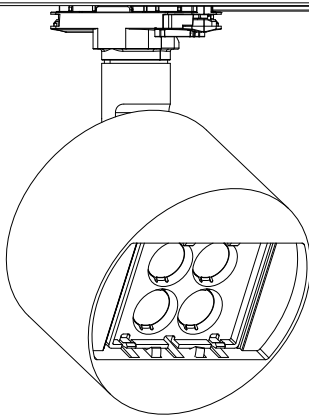

Easily adapts to any variable, thanks to a multitude in optics, lumen packages and dimming possibilities.

FRAGMA


No two lighting schemes are identical. Different geometries, different heights, different needs, there is more than only one factor that impacts a lighting set-up. The Fragma range easily adapts to any variable influencing the project, thanks to a multitude in optics, lumen packages and dimming possibilities. Its simple design and its circular shape let you use Fragma throughout the project, as it blends in perfectly in any architectural environment, combining clean cut optical performance, light quality and visual comfort.

www.deltalight.com/fragma

DIMMING

Our Fragma luminaires can be used for simple switch on-switch off settings, but also come in different dimmable versions, be it 1-10V, DALI, with on-board potentiometer or even wireless. 1-10V dimmable Fragma spots allow for simple group dimming on track level, while our other dimmable versions can be used for individual dimming per spot. This going from individual handset dimming with the on-board potentiometer version, over the Dali addressable version controlled by a Dali master, till the wireless version based on CTRL Delta, offering solutions for both small and big installations. All Fragma versions require a 3 phase track. However our wireless and on-board dimmable Fragma spots do not need additional dimming wiring within the 3 phase track and in this way offer an easier approach on flexible and individual dimming.



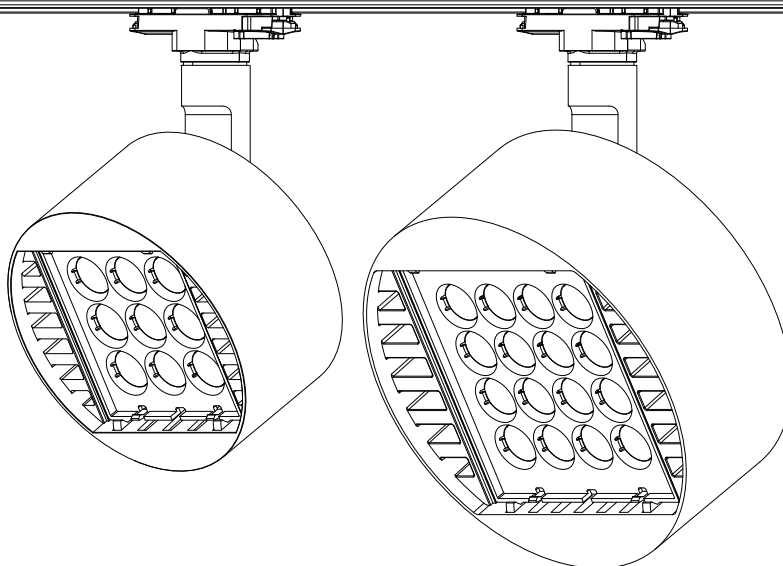


TRACK



INTERIOR TRACK

VISUAL WELLBEING

Light is not only about light effects, it also affects the well-being of the passer-by. Good light quality is of main importance, as it influences the passer-by in an indirect way. CRI 90, good Colour Over Angle uniformity and uniform luminance on the emitting surface are some of the characteristics that let Fragma excel in light quality. In a direct way, the passer-by is influenced by the light when directly looking into the light source. To reduce the direct impact on the passer-by, Fragma offers multiple accessories to further improve its visual comfort.


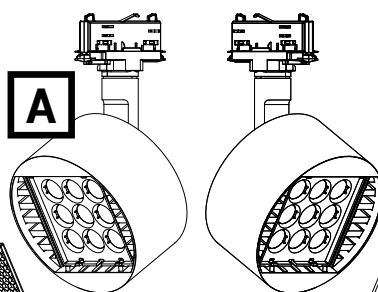


Fragma is based on Delta Light's LED Caset[®] technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a 8° superspot or 14° beam angle as standard. Be it for the smaller version or the high-power Fragma, by concentrating the lenses together, the light distribution will be the same thanks to the multilayering process.

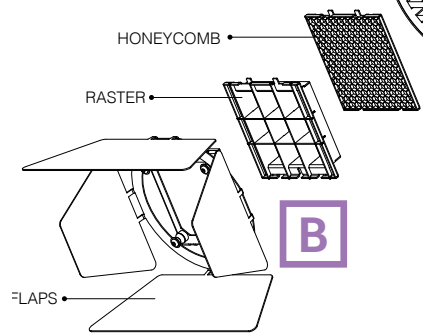

LED CASSET

FRAGMA





FRAGMA

S ADM

			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 5,2W / 612lm / 900mA	8°	23614 9410 ◊	23614 9411 ◊	-	23614 941P ◊	23614 941W ◊
	LED 10,4W / 1224lm / 900mA	14°	23612 9410 ◊	23612 9411 ◊	23612 9415 ◊	23612 941P ◊	23612 941W ◊
		26°	23612 9410 ◊ + 23613 0030	23612 9411 ◊ + 23613 0030	23612 9415 ◊ + 23613 0030	23612 941P ◊ + 23613 0030	23612 941W ◊ + 23613 0030
		47°	23612 9410 ◊ + 23613 0060	23612 9411 ◊ + 23613 0060	23612 9415 ◊ + 23613 0060	23612 941P ◊ + 23613 0060	23612 941W ◊ + 23613 0060
3000K CRI>90	LED 5,2W / 572lm / 900mA	8°	23614 9310 ◊	23614 9311 ◊	-	23614 931P ◊	23614 931W ◊
	LED 10,4W / 1144lm / 900mA	14°	23612 9310 ◊	23612 9311 ◊	23612 9315 ◊	23612 931P ◊	23612 931W ◊
		26°	23612 9310 ◊ + 23613 0030	23612 9311 ◊ + 23613 0030	23612 9315 ◊ + 23613 0030	23612 931P ◊ + 23613 0030	23612 931W ◊ + 23613 0030
		47°	23612 9310 ◊ + 23613 0060	23612 9311 ◊ + 23613 0060	23612 9315 ◊ + 23613 0060	23612 931P ◊ + 23613 0060	23612 931W ◊ + 23613 0060

◊ B ● / W ○
220-240V / 50-60Hz (DALI & WDL)
110-240V / 50-60Hz (NON DIM & 1-10V)
IP20




FRAGMA

M ADM

			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 10,4W / 1224lm / 900mA	8°	23615 9410 ◊	23615 9411 ◊	23615 9415 ◊	23615 941P ◊	23615 941W ◊
	LED 23,4W / 2754lm / 900mA	14°	23611 9410 ◊	23611 9411 ◊	23611 9415 ◊	23611 941P ◊	23611 941W ◊
		26°	23611 9410 ◊ + 23613 0020	23611 9411 ◊ + 23613 0020	23611 9415 ◊ + 23613 0020	23611 941P ◊ + 23613 0020	23611 941W ◊ + 23613 0020
		47°	23611 9410 ◊ + 23613 0050	23611 9411 ◊ + 23613 0050	23611 9415 ◊ + 23613 0050	23611 941P ◊ + 23613 0050	23611 941W ◊ + 23613 0050
3000K CRI>90	LED 10,4W / 1144lm / 900mA	8°	23615 9310 ◊	23615 9311 ◊	23615 9315 ◊	23615 931P ◊	23615 931W ◊
	LED 23,4W / 2574lm / 900mA	14°	23611 9310 ◊	23611 9311 ◊	23611 9315 ◊	23611 931P ◊	23611 931W ◊
		26°	23611 9310 ◊ + 23613 0020	23611 9311 ◊ + 23613 0020	23611 9315 ◊ + 23613 0020	23611 931P ◊ + 23613 0020	23611 931W ◊ + 23613 0020
		47°	23611 9310 ◊ + 23613 0050	23611 9311 ◊ + 23613 0050	23611 9315 ◊ + 23613 0050	23611 931P ◊ + 23613 0050	23611 931W ◊ + 23613 0050

◊ B ● / W ○
220-240V / 50-60Hz
IP20

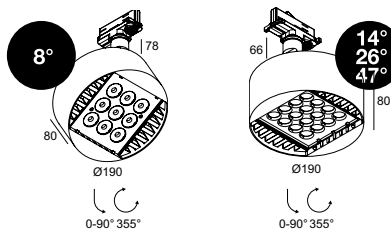

FOR WIRELESS



TRACK

FRAGMA

L ADM

			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 23,4W / 2754lm / 900mA	8°	23616 9410 ◊	23616 9411 ◊	23616 9415 ◊	23616 941P ◊	23616 941W ◊
	LED 41,6W / 4896lm / 900mA	14°	23610 9410 ◊	23610 9411 ◊	23610 9415 ◊	23610 941P ◊	23610 941W ◊
		26°	23610 9410 ◊ + 23613 0010	23610 9411 ◊ + 23613 0010	23610 9415 ◊ + 23613 0010	23610 941P ◊ + 23613 0010	23610 941W ◊ + 23613 0010
		47°	23610 9410 ◊ + 23613 0040	23610 9411 ◊ + 23613 0040	23610 9415 ◊ + 23613 0040	23610 941P ◊ + 23613 0040	23610 941W ◊ + 23613 0040
3000K CRI>90	LED 23,4W / 2574lm / 900mA	8°	23616 9310 ◊	23616 9311 ◊	23616 9315 ◊	23616 931P ◊	23616 931W ◊
	LED 41,6W / 4576lm / 900mA	14°	23610 9310 ◊	23610 9311 ◊	23610 9315 ◊	23610 931P ◊	23610 931W ◊
		26°	23610 9310 ◊ + 23613 0010	23610 9311 ◊ + 23613 0010	23610 9315 ◊ + 23613 0010	23610 931P ◊ + 23613 0010	23610 931W ◊ + 23613 0010
		47°	23610 9310 ◊ + 23613 0040	23610 9311 ◊ + 23613 0040	23610 9315 ◊ + 23613 0040	23610 931P ◊ + 23613 0040	23610 931W ◊ + 23613 0040

INTERIOR TRACK

◊ B ● / W ○
220-240V / 50-60Hz (NON DIM & DALI)
110-240V / 50-60Hz (1-10V & WDL)
◇ IP20

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		FRAGMA		
		S ADM	M ADM	L ADM
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R
HONEYCOMB / LENS / GLASS				
SOFTENING LENS S	23613 0090	A *		
WALLWASH LENS S	23613 0180	A *		
LINEAR SPREAD LENS S	23613 0140	A *		
HONEYCOMB S	23613 0240 B	A		
RASTER S	23613 0270	A **		
SOFTENING LENS M	23613 0080		A *	
WALLWASH LENS M	23613 0170		A *	
LINEAR SPREAD LENS M	23613 0120		A *	
HONEYCOMB M	23613 0230 B		A	
RASTER M	23613 0260		A **	
FLAPS M	23613 0200 B		A **	
SOFTENING LENS L	23613 0070			A *
WALLWASH LENS L	23613 0160			A *
LINEAR SPREAD LENS L	23613 0100			A *
HONEYCOMB L	23613 0220 B			A
RASTER L	23613 0250			A **
FLAPS L	23613 0190 B			A **



* ONLY FOR 14°
** NOT FOR 8°


MULTINOVA

Multinova has something familiar and something fresh at the same time. As a disc of light, Nova refers to the Supernova range, as both families share similarities in looks and ways of installation. But Multinova has some additional features to make it multi-applicable, hence Multi in the name.

With 2 different diameters, a down and down-up version and a limited height of only 69mm, Multinova is perfect to use in different ways. Its small dimensions fit in any residential or hospitality project, as a track mounted luminaire it suits any retail environment and with a prismatic sheet for reduced glare it even adapts in office settings. Moreover, Multinova can be used on our Magnetic profiles for general lighting.

Multinova comes in our standard black or white and can also be finished in the warmer Gold Coloured to enrich its surroundings. To top it off – next to a sandblasted or prismatic optic – one can opt for a smoked sheet at the front for a more decorative touch. When turned on the disc is fully lit, when turned off a deep dark arises, ideal in combination with a Gold Coloured Multinova.

www.deltalight.com/multinova





A

MULTINOVA 30

PIVOT ADM

		PIVOT ADM			
		SBL	PRISMATIC	SMOKE	
3000K CRI>90	LED (HO) 14,9W / 2174lm	NON DIM	27935 9300 ◊	27936 9300 ◊	27937 9300 ◊
		DALI	27935 9305 ◊	27936 9305 ◊	27937 9305 ◊
		UCR <16 ◊ B ● / W ○ 220-240V / 50-60Hz <input type="checkbox"/> IP20			




MULTINOVA

30 ADM

MULTINOVA 55 ADM

		30 ADM		MULTINOVA 55 ADM	
		SBL	PRISMATIC	SBL	PRISMATIC
3000K CRI>90	LED (HO) 14,9W / 2174lm	NON DIM	27931 9300 ◊	27932 9300 ◊	
		DALI	27931 9305 ◊	27932 9305 ◊	
FUNABLE WHITE	LED 9,4W / CRI>90 6500K / 1428lm - 2700K / 1338lm	NON DIM		28031 9300 ◊	28032 9300 ◊
		DALI DT8	27933 9005 ◊	27934 9005 ◊	28031 9305 ◊
	LED 19,6W / CRI>90 6500K / 3075lm - 2700K / 2885lm			28033 9005 ◊	28034 9005 ◊
		UCR <16 ◊ B ● / W ○ 220-240V / 50-60Hz <input type="checkbox"/> IP20			




TUNABLE WHITE




TRACK

INTERIOR TRACK





SMOKE
When turned on the disc is fully lit, when turned off a deep dark arises.

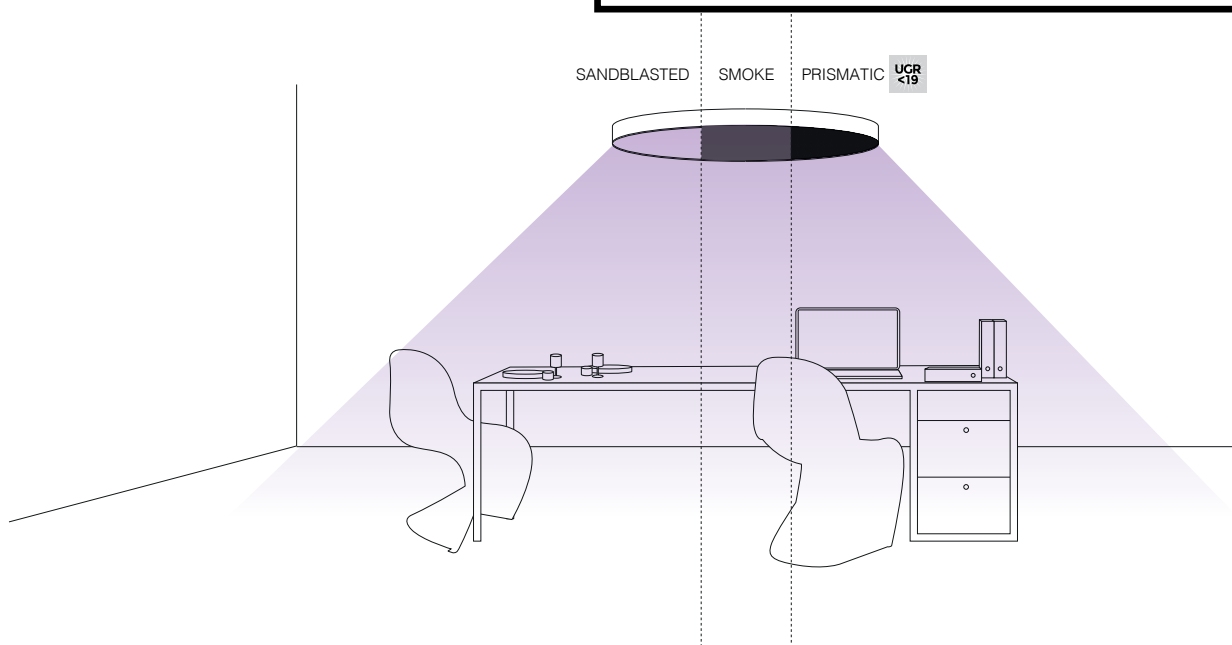

SUPER-OH! XS PIVOT

With its 25cm or 39cm diameter, the Super-Oh XS can be considered as the "little one" of the Super-Oh! family. With only 5cm height, this perfectly curved circle holds a polycarbonate, hiding a cluster of powerleds, specially designed to guarantee a uniform and perfectly balanced light output resulting in a very enjoyable diffuse lighting effect. Its flexible pivot bracket enables the user to tilt the disc up to 45° and rotate 360°. Super-Oh XS is also available for direct mounting or as a pendant.

www.deltalight.com/super-oh



SUPER-OH! XS PIVOT


25 ADM

39 ADM

3000K CRI>80	LED 13,5W / 1470lm LED 25W / 2940lm	MAINS	308 22 02 83 ADM ED8 ◇	308 22 03 83 ADM ED8 ◇
-----------------	--	-------	------------------------	------------------------

◇ B ● / W ○
220-240V / 50-60Hz

◇ IP20

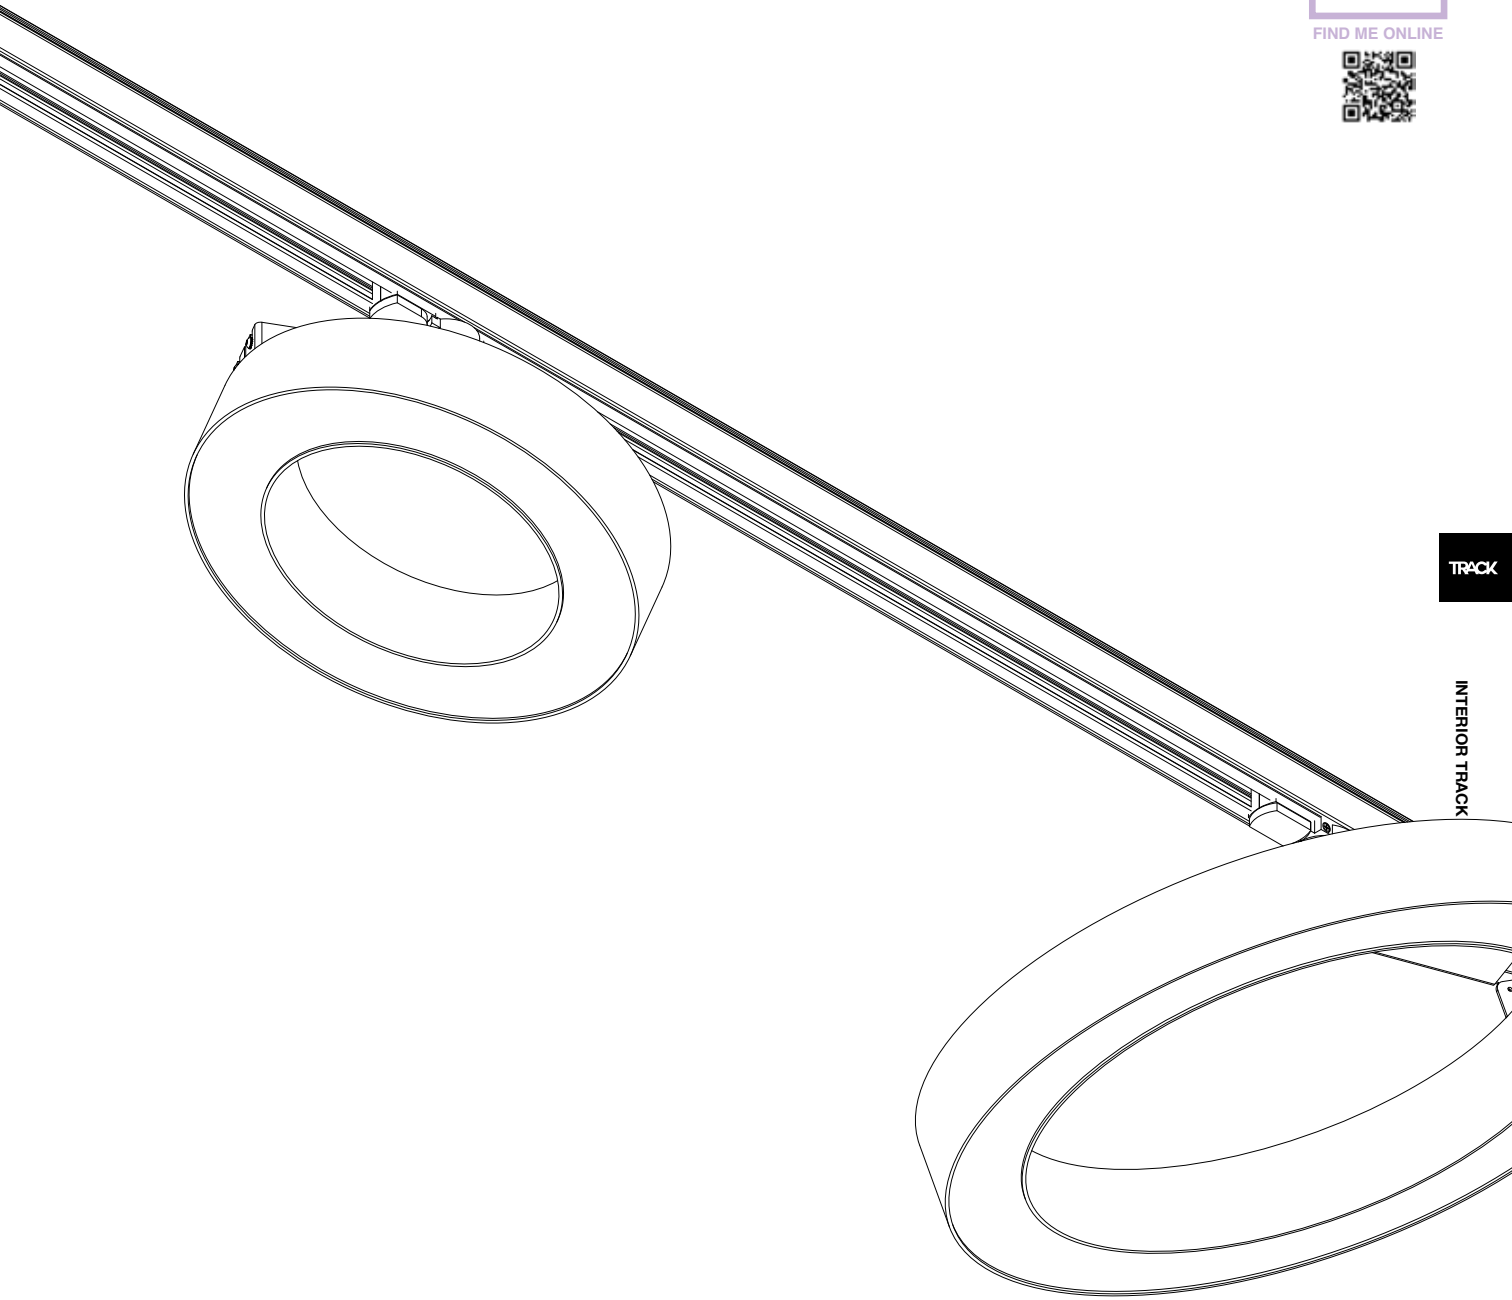

TRACK

INTERIOR TRACK

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SUPER-OH! XS PIVOT

TRACK 3F DIM IN / ON / H PAGE 348	25 ADM R	39 ADM R
-----------------------------------	-------------	-------------

LED LINE / INFORM

Inform OK ADM and LED Line OK ADM are two atypical light solutions in its kind. Meant to serve as general or task lighting, these linear lights can be mounted on 3 phase tracks. Combined with spotlights for accent lighting, these linear solutions are a perfect addition to be used for example in retail or hospitality areas.



While Inform OK is available for 3 phase tracks only, LED Line OK can also be used as module on our magnetic profiles. All of them have one detail in common: the track adapter is mounted in the middle of the profile, allowing them to turn around their center with a more playful light setting as result. LED Line OK is available in Black and White, Inform OK comes in in full Black or White or in combined colours Black-Gold or White-Black.

TRACK

www.deltalight.com/inform
www.deltalight.com/ledline



LED LINE / INFORM



LED LINE OK ADM SLIM

INFORM OK ADM SLIM

3000K CRI>90	LED CLUSTER 18W / 2240lm / 500mA	NON DIM DALI	SBL	29311 9300 ◊	
				29311 9305 ◊	
3000K CRI>80	LED CLUSTER 15,2W / 2477lm / 450mA	NON DIM DALI	67°		29312 8320 ◊
					29312 8325 ◊

◊ B ● / W ○

◊ B-B ●● / B-MMAT ●● / W-B ●● / W-W ○○

220-240V / 50-60Hz

□ IP20


MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

A GLIMPSE OF ME
ON PAGE 40




FIND ME ONLINE

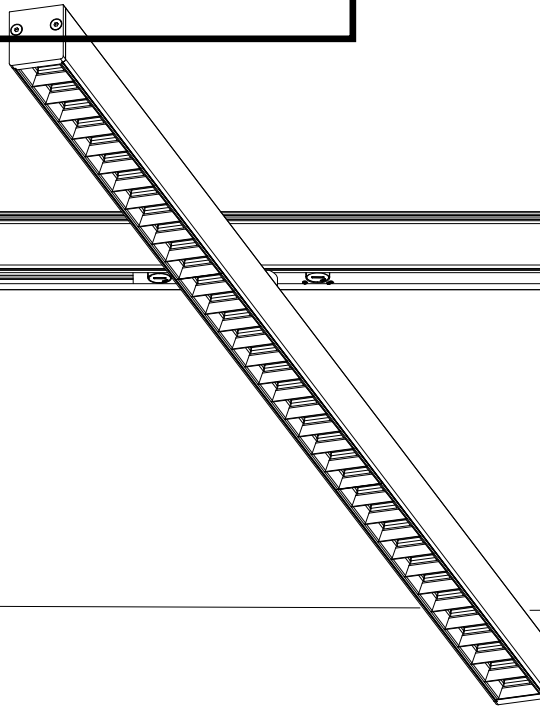

TRACK

INTERIOR TRACK

**SPIN ME
AROUND**

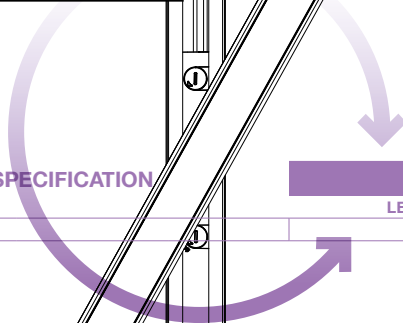

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

TRACK 3F DIM IN / ON / H PAGE 348


REQUIREMENT / OPTION / ACCESSORY	
LED LINE OK ADM SLIM	INFORM OK ADM SLIM
R	R



Profiles


INDEX

Profiles




SPLITLINE M P 380


New members to the family!




SHIFTLINE M P 384




SPLITLINE 14
SHIFTLINE 19 P 406




SPLIT-IT P 410




TAGLINE P 414




CONNECT P 418



DOT.COM P 420



FEMTOLINE 25 P 424



FEMTOLINE 35 P 426




FEMTOLINE 35 P 430
WALLGRAZER



FEMTOLINE 35 P 424
TR / TRW


New members to the family!



FEMTOLINE W P 432



FEMTOLINE 45 P 432



ONE AND ONLY P 438




BORDERLINE P 434




OUTLINER P 436



SHEFLINE P 440



MICROLINE P 442



STREAMLINER P 446




Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



Find out what we create with leftovers of our made-to-measure profiles P 372

I'm not alone. You can find me in other chapters within this Lighting Bible.

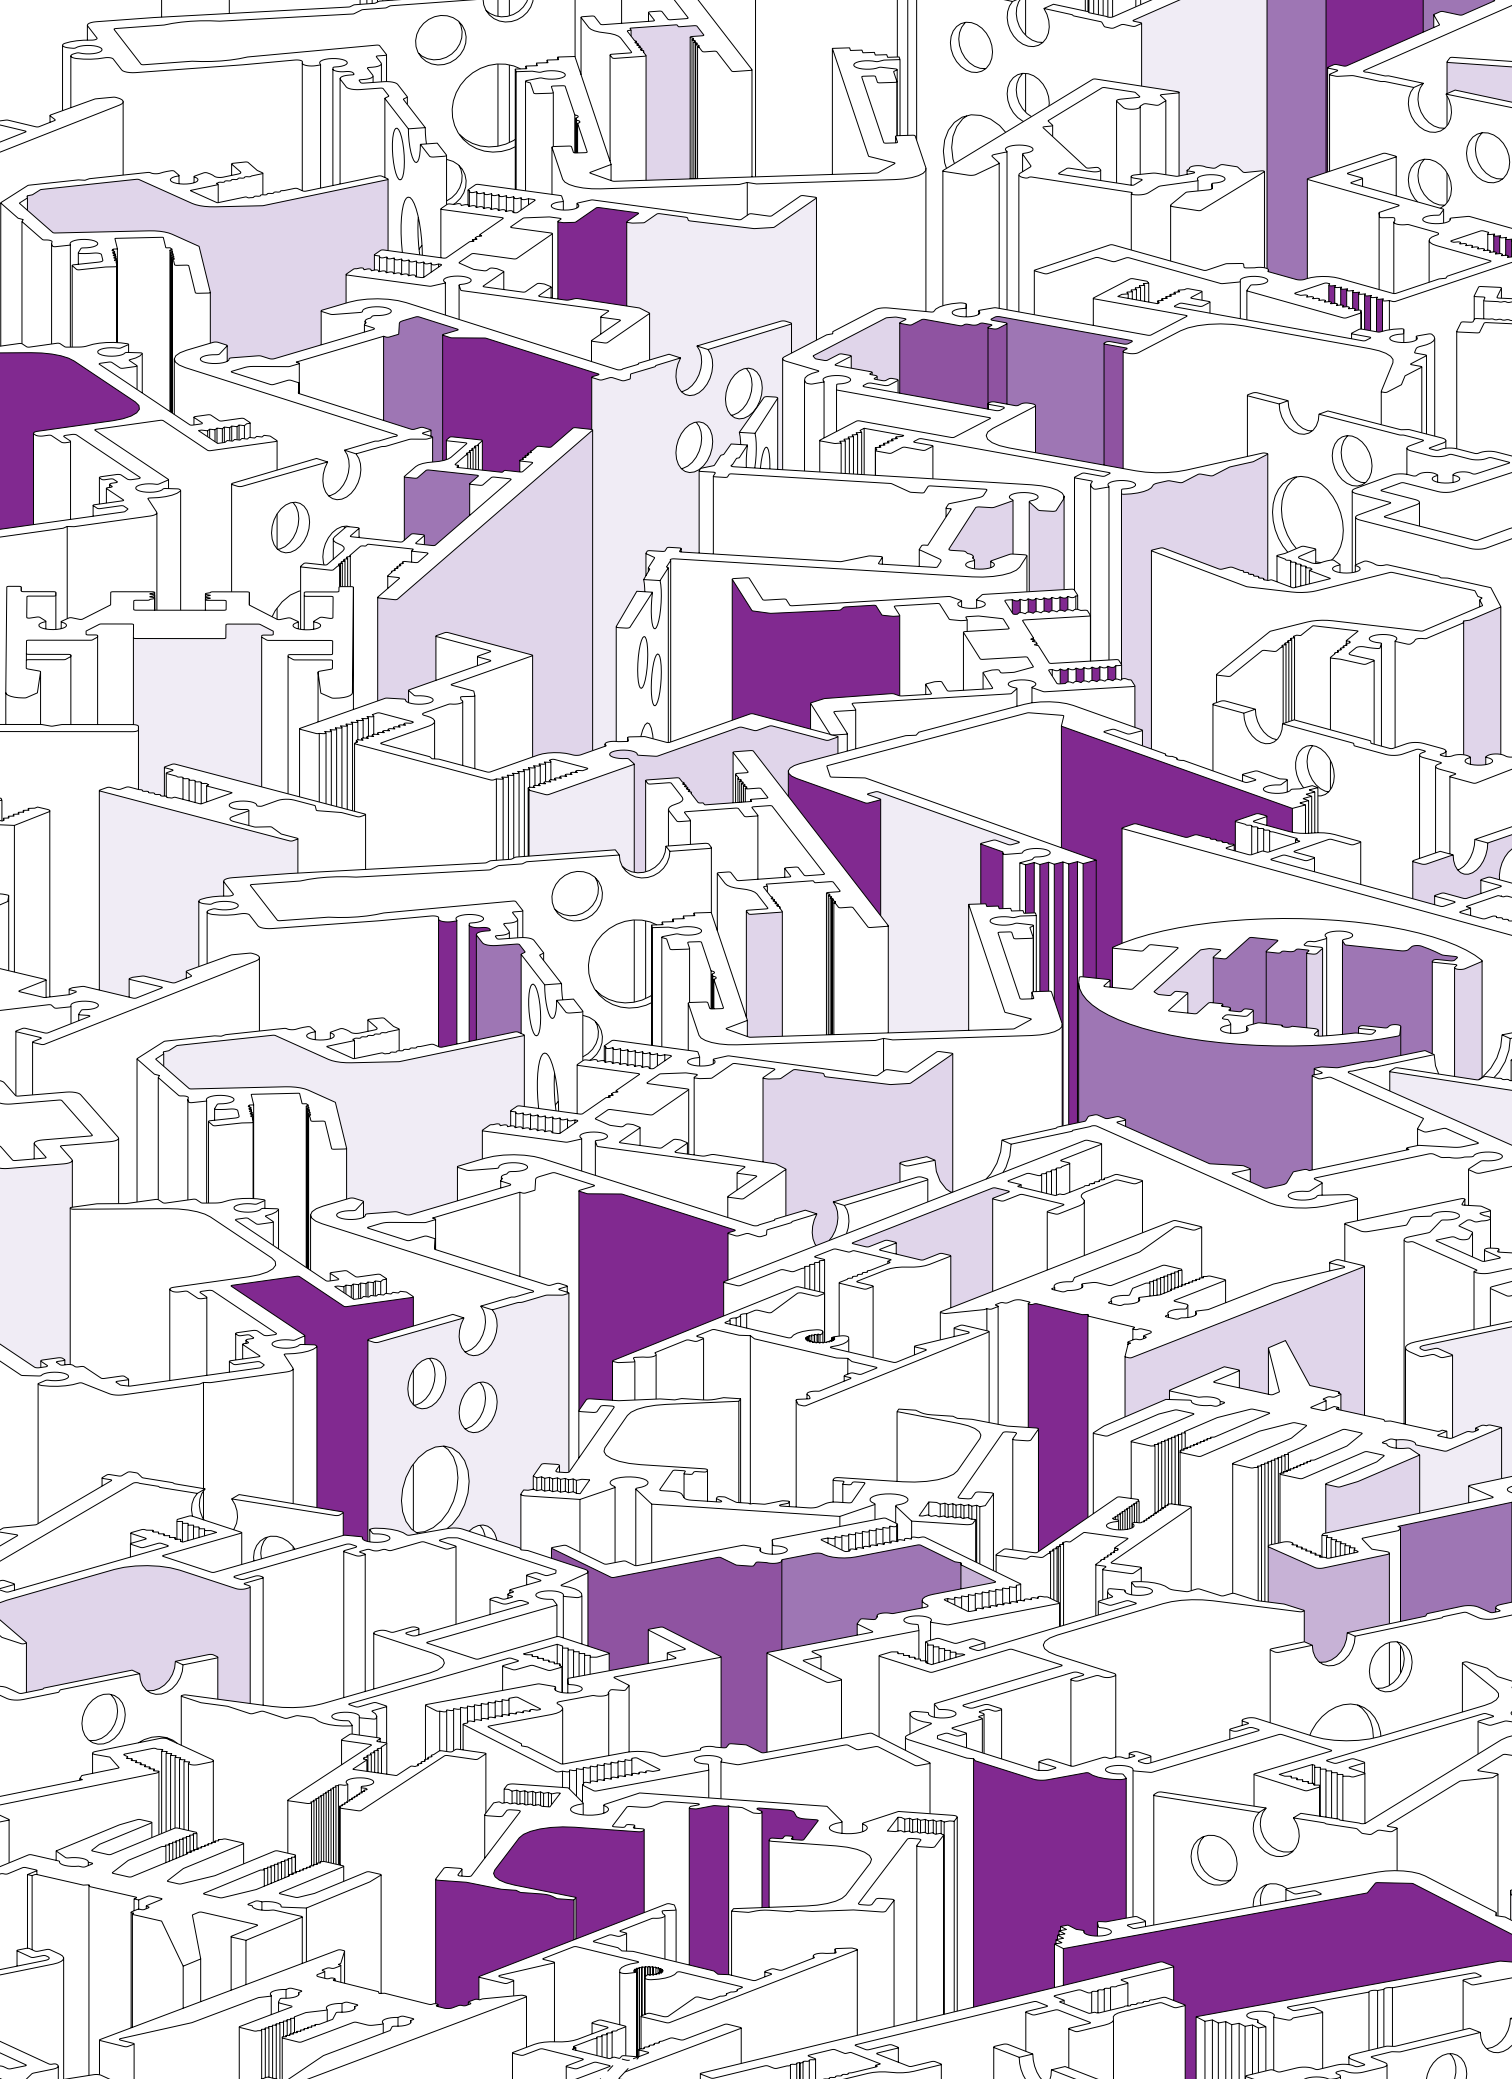



MVRDV



 **DELTA**LIGHT®

HIGH PROFILE

Delta Light and MVRDV's High Profile collection is now available for purchase. A bold, colourful and conceptual range, inspired by leftover aluminium profiles. The High Profile series is a range of luminaires inspired by leftover aluminium profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast aside.

The industrial look is softened by giving the profiles a colour dip; the series comes in pink, white, turquoise and random, adding MVRDV's well-known use of expressive colours to Delta Light's typical colour range.

The High Profile series presents a wall fixture in the shape of an arch, a freestanding model in 2 sizes (small and large) with profiles placed side by side and a cube-shaped pendant luminaire on request.





www.deltalight.com/high-profile

PRO




A

NEW

HIGH PROFILE



		W	F1	F2	C	
	2 x T45 max.8W	IP20	29911 0000 ◊			
	4 x T45 max.8W			29912 0000 ◊		
	6 x T45 max.8W				29913 0000 ◊	
	8 x T45 max.8W					29914 0000 ◊
			◊ P ● / RND ● / RW ○ / T ●			
		-	INCL. 1 x CABLE 3 x 0.75mm 2m + SWITCH + CEE 7/7 PLUG E27 / 100-240V / 50-60Hz		INCL. 1 x CABLE 3 x 0.75mm 2m + SWITCH + CEE 7/7 PLUG E27 / 100-240V / 50-60Hz	
		E27 / 100-240V / 50-60Hz			INCL. 1 x CABLE 3 x 0.75mm INCL. 2 x CABLE SUSPENSION TWIN AUTOM. 1.6m E27 / 100-240V / 50-60Hz	
		↓	↓	↓	↓	

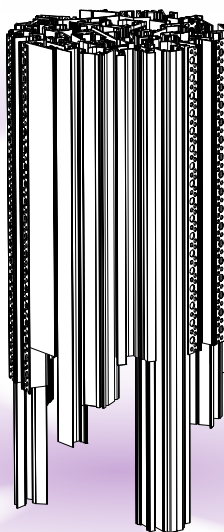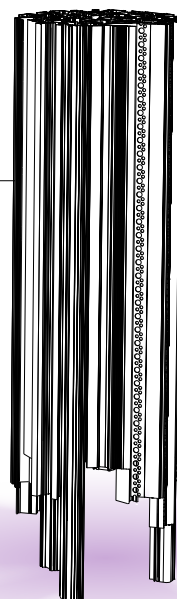

PRO

PROFILES

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

HIGH PROFILE

			W	F1	F2	C
INSTALLATION						
CABLE BASE R	203 99 55 ANO/BW					○
CABLE BASE S	203 99 56 ANO/BW					○
CONNECTION TRIMLESS	328 10 03					○
CONNECTION ST	15225 0360 B/W					○
LED LAMP MORE INFO TECHNICAL CHAPTER			○	○	○	○

B

MAGNETIC

SPLITLINE M20
ST

SPLITLINE M20


SPLITLINE M52

PRO


SPLITLINE

With the magnetic profiles, Delta Light takes it to the next level in the profile section. These profiles offer the highest degree of freedom and flexibility, as all modules have a magnetic fixation. Splitline M20 and M52 allow for a neat, trimless installation, while Shiftline M26 can be used for projects where surface or suspended mounting is required. To create the optimal light setting, multiple light modules are available: spot modules with different beams and lumen packages going up to 2000lm for accent lighting, linear LED lines for general or wallwash lighting and pendant modules for an elegant finish of the room. All modules can be placed toolfree into the profile and repositioned afterwards thanks to their magnetic fixation. Simply click the module into the profile and both mechanical and electrical connection are ensured. As this family of profiles is powered by 48V, Smart 48 can be used for an easy 2-wire dimming/power solution, or even wireless. For individual control of luminaires, one can opt for a DALI controlled system.

www.deltalight.com/shiftline
www.deltalight.com/splitline



SOFT DIM




TUNABLE WHITE



SHIFTLINE M26
H + SBL

CABLE VS ROD

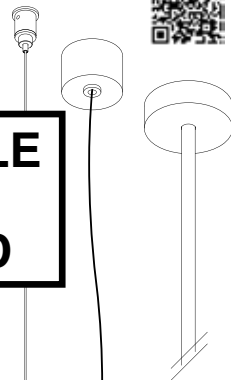

SHIFTLINE M26
H

SHIFTLINE M26
H

SHIFTLINE M26
L

PRO

PROFILES



TOOLFREE

Simply click the module into the profile and both mechanical and electrical connection are ensured.

ACCENT LIGHTING

GENERAL LIGHTING

SHIFTLINE

DECORATIVE LIGHTING


WALLWASH




FILLER MASK

SPLITLINE M


PRO



57 x (L + 5) x 85
min.9 / max.25



32 x (L + 10) x 90
min.9 / max.25



121 x (L + 5) x 150
min.9 / max.12

SPLITLINE

1 PROFILE	M20	M20 ST	M52
PROFILE 1m	420 20 10 00 ◊ ◊ B ●	-	420 52 10 00 ◊ ◊ B ●
PROFILE 2m	420 20 20 00 ◊ ◊ B ●	23397 0020 ◊ ◊ B ● / W ○	420 52 20 00 ◊ ◊ B ●
PROFILE 3m	420 20 30 00 ◊ ◊ B ●	23397 0030 ◊ ◊ B ● / W ○	420 52 30 00 ◊ ◊ B ●
CUSTOMISED PROFILE / m	23301 0000 ◊ ◊ B ●	23397 0000 ◊ ◊ B ● / W ○	24413 0000 ◊ ◊ B ●

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CORNER 180°	420 06 01	-	420 06 01
CORNER 90°	420 20 06 06	23397 0640 B / W	420 52 06 06
CORNER 90° V	420 20 06 17	-	-
CORNER T	23302 0010	-	-
CORNER X	23302 0020	-	-
CORNER SET R 45° S	23302 0030	-	-
CORNER SET R 90° S (R 102mm)	23302 0040	-	-
CORNER SET R 90° (R 240mm)	23301 0690	-	-
LIGHT + AIR KIT	29810 1010	-	-

4 ENDCAP

ENDCAP (2 PCS.)	420 20 03 01 B	23397 0310 B / W	420 52 03 01 B
-----------------	----------------	------------------	----------------

5 FIXATION

RECESSED			
FIXATION SET (2 PCS.)	420 20 14 01	-	-
INSIDE CLIP (1 PC.)	-	23397 0140	-
SUSPENSION BRACKET (1 PC.)	-	-	420 52 98 01

6 CONNECTION (max.200W/supply/max.50m)

SUPPLY 48V-DC	420 99 03	420 99 03	420 99 03
CONNECTOR 48V-DC - 180°	420 99 01	420 99 01	420 99 01
CONNECTOR 48V-DC - 0-180°	420 99 02	420 99 02	420 99 02
LIGHT + AIR ADAPTER SET	29810 1020	-	-

7 LIGHT MODULES

LIGHT MODULES

SEE PAGE 388-405




How to build your SPLITLINE

Example for Splitline M20

PRO

PROFILES

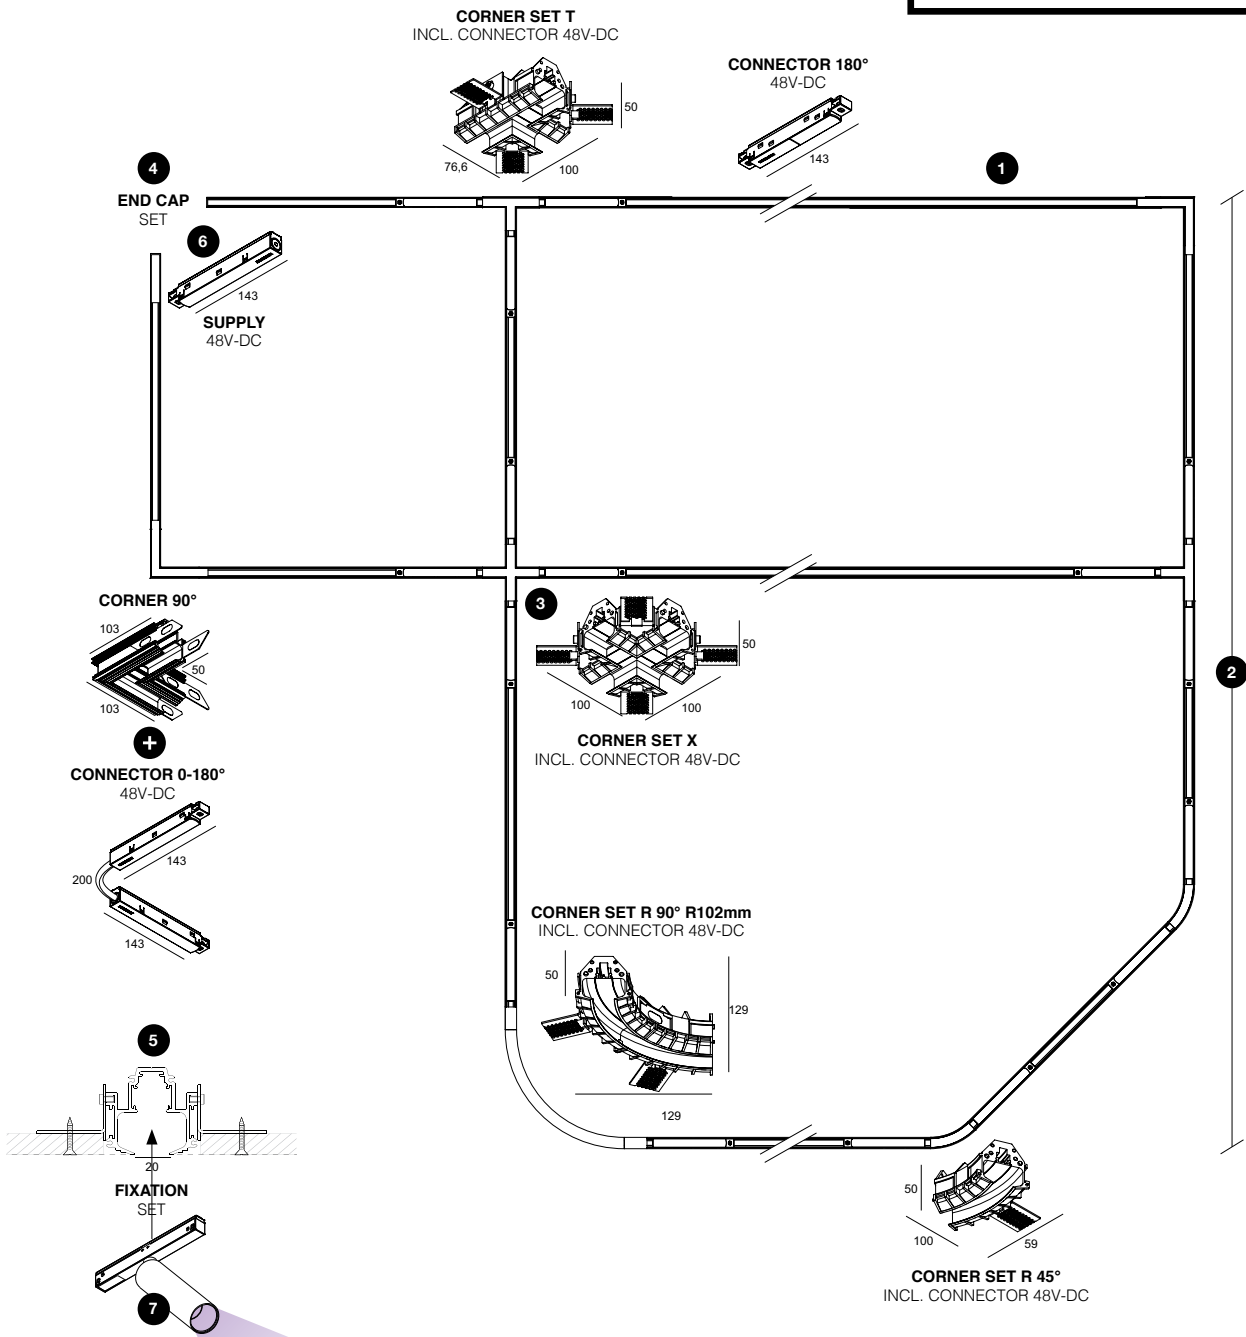


SPLITLINE M▲IR

Within the ▲IR range, Delta Light offers a set of solutions that combine light with ventilation, be it as single circular shaped light solutions or as linear kit. This kit can serve as a stand-alone base for a double Spy spotlight or a more discrete Jum-Oh! fitting, or the kit can be used as an add-on to the Splitline M20 profile to produce a combination of light and ventilation within a slender black line in the ceiling.

By adding the SPM20 - ▲IR Kit to the profile, the set-up can also be used for air extraction or air supply, a clever and neat combination of lighting and ventilation into 1 single black line. Be it at the end of the black line or in the middle of the construction, the ▲IR Kit can be freely integrated into the profile, as an additional adapter set can be included in the ▲IR Kit for easy through-wiring of the 48V.




PRO

INSTALLATION IN LINE WITH SPM20

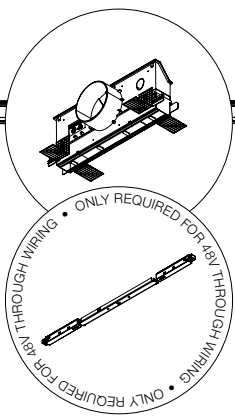

A

NEW



SPM20

				JUM-OH! 4R AIR	SPY 392 AIR	SPY 522 AIR
3000K CRI>90	4x LED [A] 2W / 232lm / 700mA	IP20	30°	29811 9320 ◇		
	2x LED [U] 8.6W / 1089lm / 500mA		20°		29813 9320 ◇	
			40°		29813 9330 ◇	
	LED [U] 12.4W / 1467lm / 700mA		20°			29815 9320 ◇
2700K CRI>90			45°			29815 9330 ◇
	4x LED [A] 2W / 221lm / 700mA		30°	29811 9220 ◇		
	2x LED [U] 8.6W / 1041lm / 500mA		20°		29813 9220 ◇	
			40°		29813 9230 ◇	
			20°			29815 9220 ◇
			45°			29815 9230 ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○








www.deltalight.com/splitline



FIND ME ONLINE



SINGLE INSTALLATION

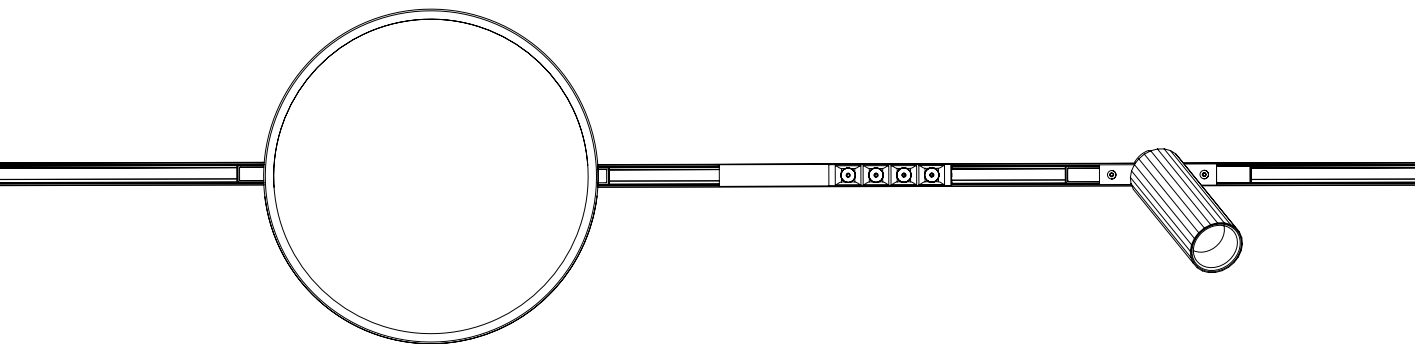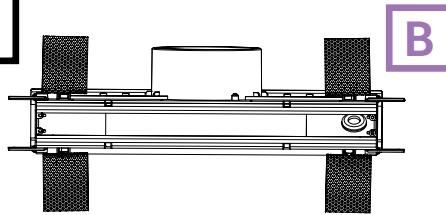

PRO

PROFILES



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY		
			JUM-OH! 4R AIR	SPY 392 AIR	SPY 522 AIR
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
1-10V DIM 16	300 90 63	i min. 84	R	R	R
DALI 16	300 90 63	i min. 84	R	R	R
MOUNTING KIT TRIMLESS + VENTILATION					
PLASTERBOARD	29810 1010	i 310 x 50 x 130	R	R	R
FINISH					
SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W			R	
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W				R
HONEYCOMB / LENS / GLASS					
VISOR	24144 0030 B			A	
HONEYCOMB SINGLE USE	19810 0010 B				A
HONEYCOMB DOUBLE USE	19810 0060 B				A
LINEAR SPREAD LENS	19810 0020				A
SPREAD LENS	19810 0030				A
SOFTENING LENS	19810 0040				A
GLASS SBL	19810 0050				A



SHIFTLINE M



NEW

1 PROFILE	SHIFTLINE	M26L	M26H	M26H + SBL	
				3000K/CRI 90	2700K/CRI 90
PROFILE 1m		23358 0010 ◊ ◊ B ● / W ○	23359 0010 ◊ ◊ B ● / W ○	-	-
PROFILE 2m		23358 0020 ◊ ◊ PA ● / B ● / BRB ● / W ○	23359 0020 ◊ ◊ PA ● / B ● / BRB ● / W ○	30411 9305 ◊ ◊ B ● / W ○	30411 9205 ◊ ◊ B ● / W ○
PROFILE 3m		23358 0030 ◊ ◊ PA ● / B ● / BRB ● / W ○	23359 0030 ◊ ◊ PA ● / B ● / BRB ● / W ○	30412 9305 ◊ ◊ B ● / W ○	30412 9205 ◊ ◊ B ● / W ○
PROFILE 4m		-	-	30413 9305 ◊ ◊ B ● / W ○	30413 9205 ◊ ◊ B ● / W ○
CUSTOMISED PROFILE / m		23358 0000 ◊ ◊ B ● / W ○	23359 0000 ◊ ◊ B ● / W ○	-	-
MASK 2m		23377 0030 B	-	-	-
POLYCARBONATE / m					
SANDBLASTED (SBL)		-	-	INCLUDED	INCLUDED
LED FLEX					
8,4W/m - 820lm/m - 48V-DC - DALI CONTROLLED		-	-	INCLUDED	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CORNER 180°	23358 0620	23359 0620	-
CORNER 90°	23358 9640 B / W	23359 9640 B / W	-
CORNER SET R 90°	-	23359 0690 B / W	-
CORNER SET R 135°	-	23359 0700 B / W	-

4 ENDCAP

ENDCAP (2 PCS.)	23358 0320 B / W	23359 0320 B / W	INCLUDED
-----------------	------------------	------------------	----------

5 FIXATION

SURFACE MOUNTED			
FIXATION SET (2 PCS.)	23358 1410	23359 1410	INCLUDED
SUSPENDED			
SUSPENSION SINGLE 1,6M (1 PC.)	23359 0510	23359 0510	23359 0510
SUSPENSION ST	15225 0340 B / W	15225 0340 B / W	15225 0340 B / W
SUSPENSION ROD 0,8M	23358 1520 B / W	23358 1520 B / W	23358 1520 B / W
SUSPENSION ROD 0,8M + CONNECTION	23358 1510 B / W	23358 1510 B / W	23358 1510 B / W
MATRIX CONSTRUCTION			
CEILING FIXATION	23358 9830 B	-	-
2 PROFILE SUPPORT	23358 9820 B	-	-
2 PROFILE CONNECTOR 48V-DC	23358 9810 B / GC	-	-
SIDE SUPPLY 48V-DC	23358 1540 B	-	-
SUSPENSION ROD 0,8M	23358 1520 B / W	-	-
SUSPENSION ROD 0,8M + CONNECTION	23358 1510 B / W	-	-

6 CONNECTION

POWERBOX			
NON DIM 48V-DC / 100W	23377 0040 B / W	23380 0030 B / W	-
NON DIM 48V-DC / 100W - MID	23377 0050 B / W	23380 0050 B / W	-
NON DIM 48V-DC / 100W SUSPENDED	23380 0060 B / W	23380 0060 B / W	23380 0060 B / W
WIRELESS DIM 48V-DC / 100W	23380 007W B / W	23380 004W B / W	-
WIRELESS DIM 48V-DC / 100W SUSPENDED	-	23380 007W B / W	-
SUPPLY 48V-DC (max.200W/supply/max.50m)	420 99 03	420 99 03	INCLUDED
CONNECTOR 48V-DC - 180° (max.200W/supply/max.50m)	420 99 01	420 99 01	-
CONNECTOR 48V-DC - 90° (max.200W/supply/max.50m)	23300 9920	23300 9920	-
SUSPENDED			
CURRENT SUPPLY SET 1,6M TRANSPARENT	for MDL 2X0,75MM ²	23359 2120	23359 2120
	for DALI 4X0,75MM ²	23359 2140	23359 2140
	for MDL+UP 4X0,75MM ²	-	23359 2340
	for DALI+UP 6X0,75MM ²	-	23359 2160
CURRENT SUPPLY SET 1,6M BLACK	for MDL 2X0,75MM ²	23359 2220	23359 2220
	for DALI 4X0,75MM ²	23359 2240	23359 2240
	for MDL+UP 4X0,75MM ²	-	23359 2440
	for DALI+UP 6X0,75MM ²	-	23359 2260
CONNECTION ST	15225 0360 B / W	15225 0360 B / W	15225 0360 B / W
CABLE BASE R	203 99 55 ANO / B / W	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S	203 99 56 ANO / B / W	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM 204 00 100 B / W	204 00 100 B / W	204 00 100 B / W

LIGHT MODULES

SEE PAGE 388-405

7 LIGHT MODULES


How to build your SHIFTLINE

Example for Shiftline M26 H

A GLIMPSE OF ME
ON PAGE 48 / 50



FIND ME ONLINE

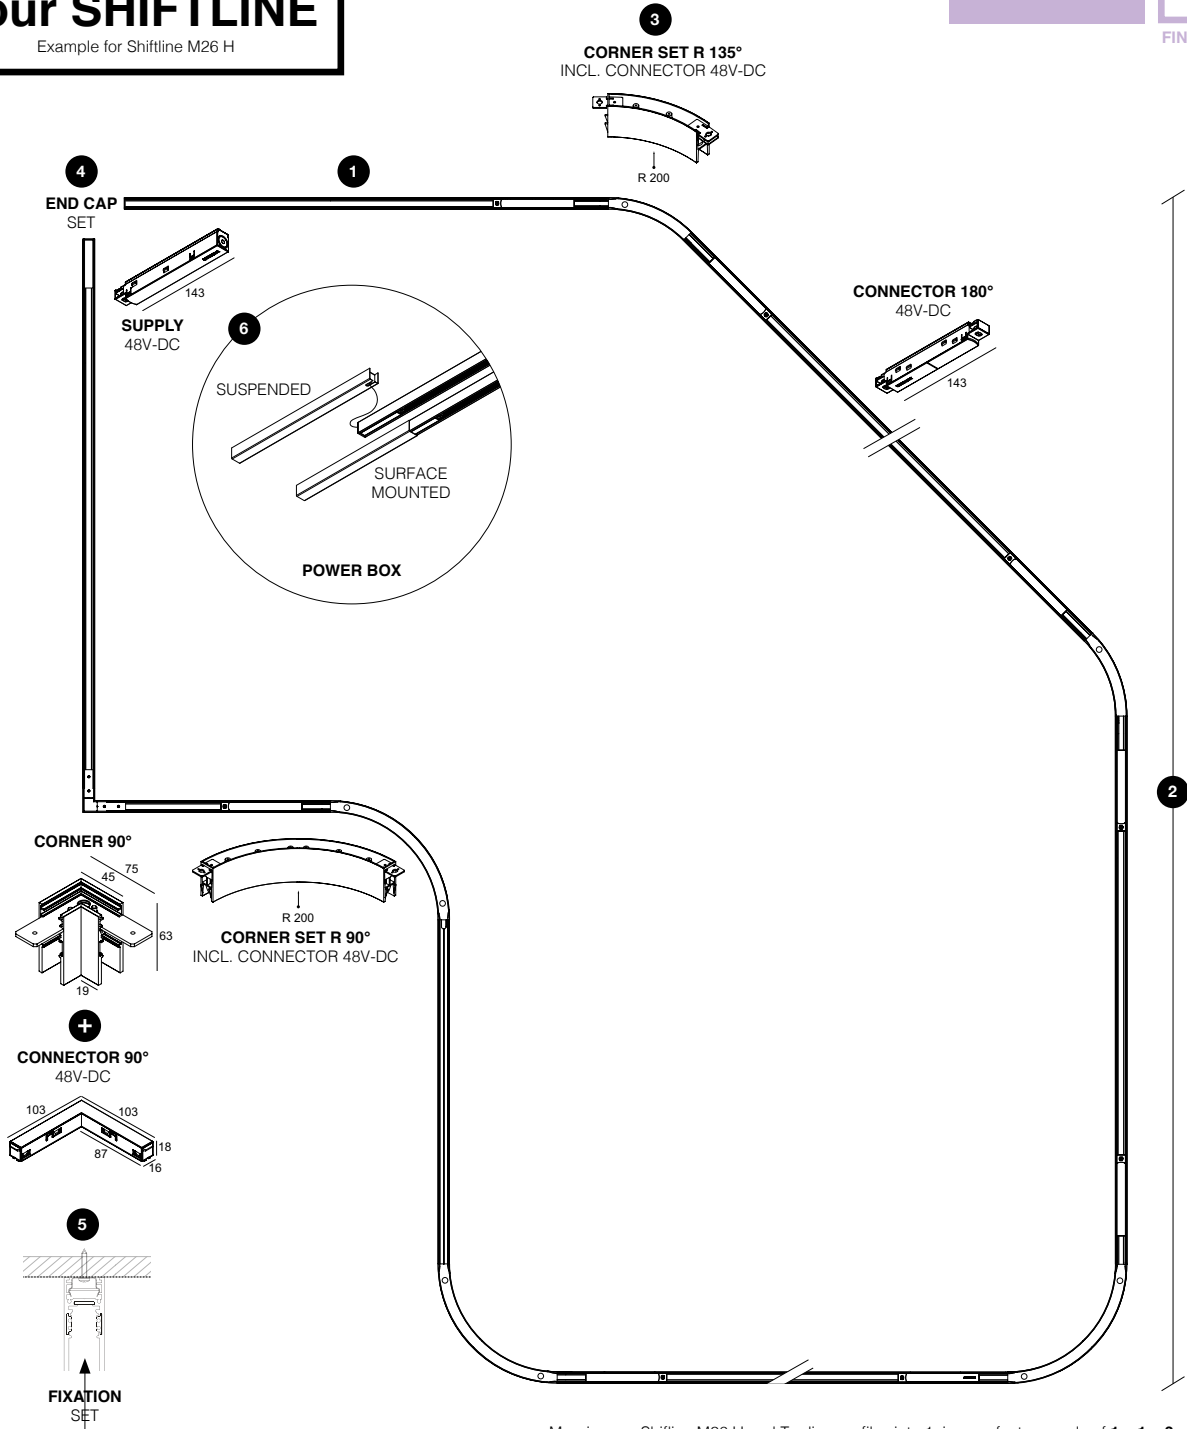

PRO
PROFILES



SLM26 H + SBL


Merging our Shiftline M26 H and Tagline profiles into 1, is a perfect example of **1 + 1 = 3**. The combination of ultimate flexibility with the fine line of light running next to it adds to possible applications for the Shiftline M26 H, as accent lights can be combined with general light without limitations. Boost your creativity by plugging in any light module you want in the magnetic profile without interrupting the continuous light of Tagline that runs along. The DALI-powered 48V solution allows for an easy switch between settings:

Go for **ALL ON** and light up all light modules at the same time, including the linear Tagline

Go for **ONLY ACCENT** to switch on the magnetic modules and create a cosy setting by highlighting the accents you prefer

Go for **ONLY GENERAL** and use the fine line of light for a soft general light effect

Applications are unlimited, but some examples could be to use it in hallways, above the kitchen counter or the bar, as a grid in a restaurant setting, and so on. Areas where this dynamic solution can transform the atmosphere within the room with a twist of the light.

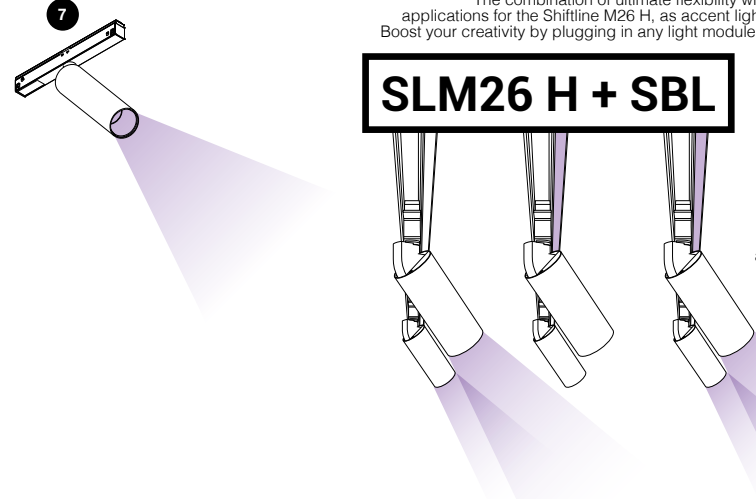


SHIFTLINE M

Unlimited flexibility is what the Shiftline M26 L Matrix system stands for. These clever add-ons to the Shiftline M26 L profiles allow you to couple multiple profiles to each other and create any structure you want. Our 2P Connector not only assures the electrical connection between two profiles, it also serves as a decorative element as its cylindrical shape is perfectly in contrast with the straight lines of the profile. Moreover, this contrast can be enhanced by choosing the Gold Coloured finish for these nodes, a bold statement where design meets functionality.

To complete the Matrix system, an additional ceiling fixation and a non electrical connector allow for unlimited creativity as one is free to connect multiple profiles any way they want. Moreover, the new Side Supply finishes it off in style as it is designed according to the looks of the 2P Connector.

PRO

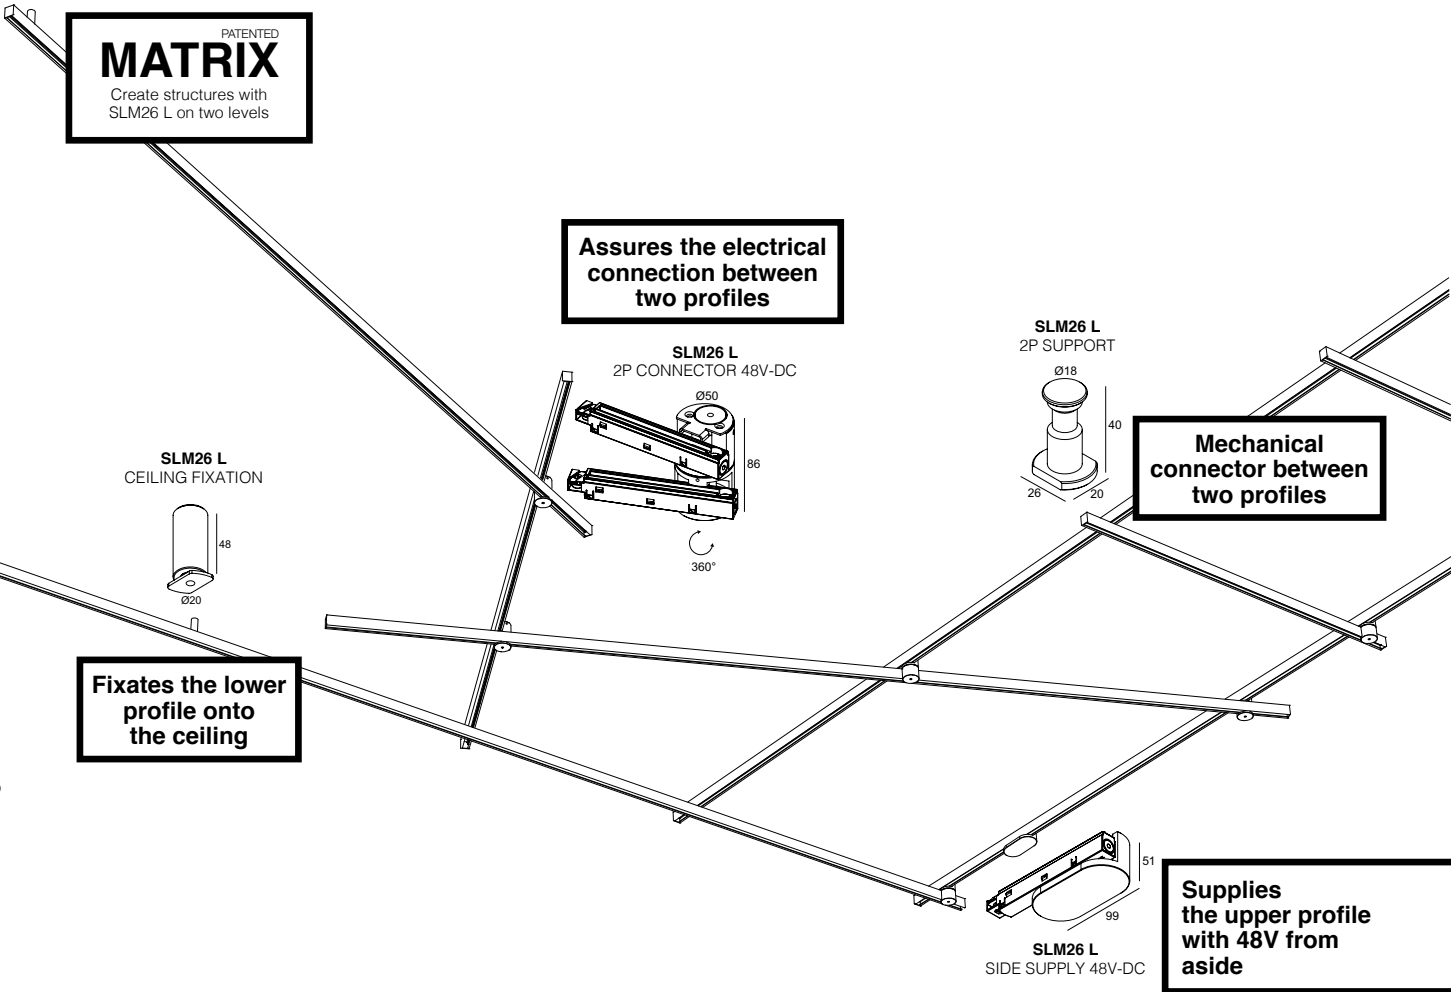

www.deltalight.com/shiftline



FIND ME ONLINE



How to control your SPLITLINE or SHIFTLINE

MORE INFO TECHNICAL CHAPTER


SMART
48




PROFILES

PRO


Hey Google,...

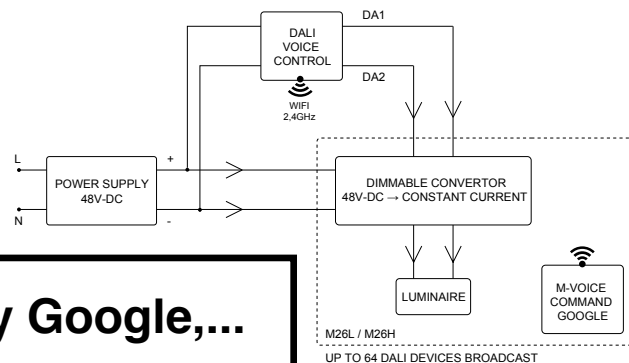

SLM26 H
VOICE COMMAND
GOOGLE HOLDER



SLM26 L
VOICE COMMAND
GOOGLE HOLDER



M20

M20 ST

M52

M26 L

M26 H


M26 H + SBL

VOICE CONTROL


VOICE COMMAND GOOGLE HOLDER *	-	-	-	21032 0250 B / W	21032 0260 B / W	21032 0260 B / W
SENSOR						
DALI PRESENCE & DAYLIGHT SENSOR				21032 0185		
WIRELESS PRESENCE & DAYLIGHT SENSOR				21032 0040		
WIRELESS SENSOR HUB **				21032 0190		

* FOR GOOGLE NEST 2ND GENERATION SPEAKER

** PRESENCE & DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY




WIRELESS SENSOR HUB



PRESENCE &
DAYLIGHT SENSOR

Interact with your surroundings

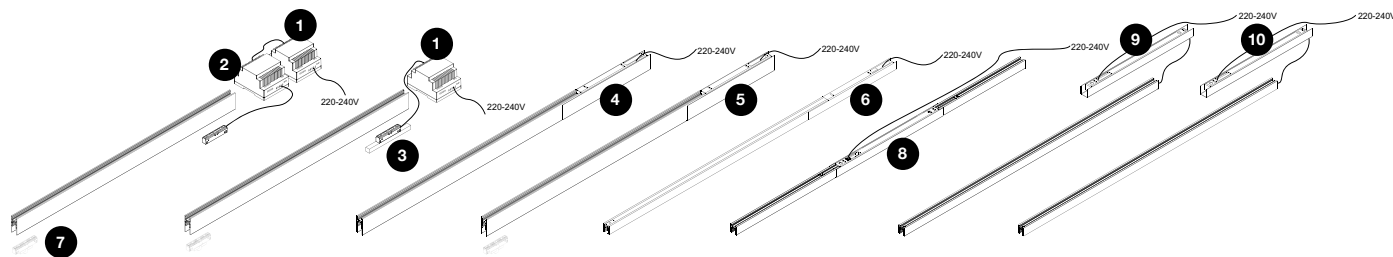

- 1 POWERSUPPLY 48V-DC
- 2 SMART 48 MODULATOR
- 3 SMART 48 MODULATOR PLUG-IN WIRELESS DIM
- 4 SLM26H POWERBOX 48V/100W
- 5 SLM26H POWERBOX 48V/100W MDL
- 6 SLM26L POWERBOX 48V/100W
- 7 M-WIRELESS PRESENCE & DAYLIGHT SENSOR
- 8 SLM26L MID POWERBOX 48V/100W
- 9 SLM26L POWERBOX FOR SUSPENSION 48V/100W
- 10 SLM26L POWERBOX FOR SUSPENSION 48V/100W WIRELESS DIM

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY 48V-DC	VOICE COMMAND GOOGLE HOLDER	DALI PRESENCE & DAYLIGHT SENSOR	WIRELESS SENSOR HUB	WIRELESS SENSOR PRESENCE & DAYLIGHT
MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R *	R *
CONTROL MORE INFO TECHNICAL CHAPTER				
WIRELESS MODULATOR	300 90 012		R *	R *
DALI VOICE CONTROL	21032 0245	91 x 44 x 23	R **	O **

* REMOTE INSTALLATION

** MAX 64 DALI DEVICES




MAGNETIC MODULES




LED LINE UP				M26H	M26L	M52
3000K CRI>90	12,4W / 1162 lm / 24V-DC	IP20	L 830mm	23376 9300 ◇		
2700K CRI>90	12,4W / 1162 lm / 24V-DC			23376 9200 ◇		

◇ ANO ●



INFORM				UCR <19	M20 / M26H / M26H+SBL*	M26L	M52	
					MDL	DALI	MDL	DALI
3000K CRI>90	LED 11,9W / 1797lm / 48V-DC	IP20	L 800	23381 9320 ◇	23382 9325 ◇	23381 9320 ◇	23382 9325 ◇	
	LED 17W / 2567lm / 48V-DC		L 1100	23383 9320 ◇	23384 9325 ◇	23383 9320 ◇	23384 9325 ◇	
2700K CRI>90	LED 11,9W / 1773lm / 48V-DC		L 800	23381 9220 ◇	23382 9225 ◇	23381 9220 ◇	23382 9225 ◇	
LED 17W / 2533lm / 48V-DC	L 1100		23383 9220 ◇	23384 9225 ◇	23383 9220 ◇	23384 9225 ◇		

◇ B ●




LED LINE HE				M20 / M26H / M26H+SBL*	M26L	M52			
				MDL	DALI **	MDL	DALI **	MDL	DALI
3000K CRI>90	LED 12,6W / 1586lm / 48V-DC	IP20	L 610mm	421 313 06 93 MDL ◇	23347 0005 ◇	421 313 06 93 MDL ◇	23347 0005 ◇		
	LED 18,4W / 2106lm / 48V-DC		L 810mm	421 313 08 93 MDL ◇	23348 0005 ◇	421 313 08 93 MDL ◇	23348 0005 ◇		
	LED 21,6W / 2626lm / 48V-DC		L 1010mm	421 313 10 93 MDL ◇	23349 0005 ◇	421 313 10 93 MDL ◇	23349 0005 ◇		
	LED 25,2W / 3146lm / 48V-DC		L 1210mm	421 313 12 93 MDL ◇	23350 0005 ◇	421 313 12 93 MDL ◇	23350 0005 ◇		
3000-1800K / CRI>90	LED 9,1W / 606lm / 48V-DC	IP20	L 621mm	23303 9000 ◇	23307 9005 ◇	23303 9000 ◇	23307 9005 ◇		
	LED 11,6W / 767lm / 48V-DC		L 787mm	23304 9000 ◇	23308 9005 ◇	23304 9000 ◇	23308 9005 ◇		
	LED 14,9W / 983lm / 48V-DC		L 1009mm	23305 9000 ◇	23309 9005 ◇	23305 9000 ◇	23309 9005 ◇		
	LED 17,3W / 1145lm / 48V-DC		L 1176mm	23306 9000 ◇	23310 9005 ◇	23306 9000 ◇	23310 9005 ◇		
NEW 6500-2700K / CRI>90	LED 7,6W / 6500K / 1000lm - 2700K / 875lm - 48V-DC	IP20	L 635mm		23319 9005 ◇		23319 9005 ◇		
	LED 9,8W / 6500K / 1300lm - 2700K / 1138lm - 48V-DC		L 823mm		23320 9005 ◇		23320 9005 ◇		
	LED 12,1W / 6500K / 1600lm - 2700K / 1400lm - 48V-DC		L 1010mm		23321 9005 ◇		23321 9005 ◇		
	LED 14,4W / 6500K / 1900lm - 2700K / 1662lm - 48V-DC		L 1198mm		23322 9005 ◇		23322 9005 ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

** TUNABLE WHITE DALI DT8

◇ B ●




LED LINE OK				M26H / M26H+SBL*	M26L	M52			
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 18W / 2240lm / 48V-DC	IP20		29319 9300 ◇	29320 9305 ◇	29315 9300 ◇	29316 9305 ◇		
2700K / CRI>90	LED 18W / 2240lm / 48V-DC			29319 9200 ◇	29320 9205 ◇	29315 9200 ◇	29316 9205 ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○






DOT.COM M4

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5,6W / 628lm / 48V-DC	IP20	14°	424 612 04 931 MDL ◇	23355 9315 ◇	424 612 04 931 MDL ◇	23355 9315 ◇
			33°	424 612 04 932 MDL ◇	23355 9325 ◇	424 612 04 932 MDL ◇	23355 9325 ◇
			49°	424 612 04 933 MDL ◇	23355 9335 ◇	424 612 04 933 MDL ◇	23355 9335 ◇
2700K CRI>90	LED 5,6W / 628lm / 48V-DC	IP20	14°	424 612 04 921 MDL ◇	23355 9215 ◇	424 612 04 921 MDL ◇	23355 9215 ◇
			33°	424 612 04 922 MDL ◇	23355 9225 ◇	424 612 04 922 MDL ◇	23355 9225 ◇
			49°	424 612 04 923 MDL ◇	23355 9235 ◇	424 612 04 923 MDL ◇	23355 9235 ◇


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B-B ● / ◇ B-C ● / ◇ B-MMAT ●



POSITION FOR INSTALLATION

DOT.COM WALLWASH

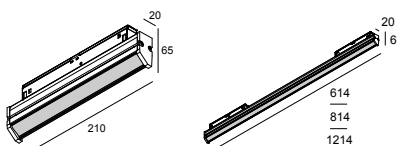


		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10W / 1000lm / 48V-DC	IP20	L 210mm	424 642 02 93 MDL ◇	23367 9305 ◇		
	LED 12,6W / 1500lm / 48V-DC		L 614mm	424 642 06 93 MDL ◇	23368 9305 ◇		
	LED 18,4W / 2200lm / 48V-DC		L 814mm	424 642 08 93 MDL ◇	23369 9305 ◇		
	LED 25,2W / 3000lm / 48V-DC		L 1214mm	424 642 12 93 MDL ◇	23370 9305 ◇		
2700K CRI>90	LED 10W / 1000lm / 48V-DC	IP20	L 210mm	424 642 02 92 MDL ◇	23367 9205 ◇		
	LED 12,6W / 1500lm / 48V-DC		L 614mm	424 642 06 92 MDL ◇	23368 9205 ◇		
	LED 18,4W / 2200lm / 48V-DC		L 814mm	424 642 08 92 MDL ◇	23369 9205 ◇		
	LED 25,2W / 3000lm / 48V-DC		L 1214mm	424 642 12 92 MDL ◇	23370 9205 ◇		


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●

	X
DOT.COM L WALLWASH L210	0,5
DOT.COM L WALLWASH L614	0,25
DOT.COM L WALLWASH L814	0,33
DOT.COM L WALLWASH L1214	0,5

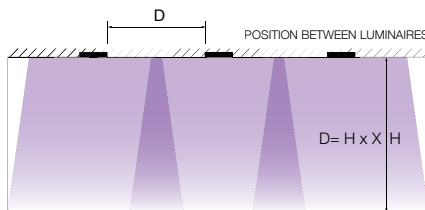

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

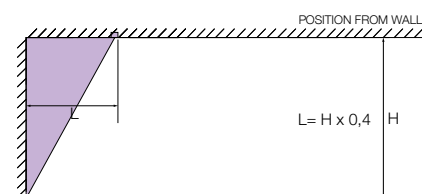

example: H=3000 mm → L= 3000 mm x 0,4 = 1200 mm



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	LEDLINE UP		INFORM / LED LINE / DOT.COM	
	MDL	DALI	MDL	DALI
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35	R*	
DALI - 60W (PWM)	21012 0135	150 x 53 x 35	R*	
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER				
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56	R*	
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56	R*	
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030	190 x 16 x 16	R	

* REMOTE INSTALLATION

PRO

PROFILES


B

MAGNETIC MODULES

PRO

NEW

JUM-OH! 2R



		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 2W / 232lm / 48V-DC	IP20	30°	29415 9320 ◇	29416 9325 ◇	29411 9320 ◇	29412 9325 ◇
2700K CRI>90	2x LED 2W / 221lm / 48V-DC			29415 9220 ◇	29416 9225 ◇	29411 9220 ◇	29412 9225 ◇

* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ B ●



A

NEW


JUM-OH! 4R



		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI
3000K CRI>90	4x LED 2W / 232lm / 48V-DC	IP20	30°	29417 9320 ◇	29418 9325 ◇	29413 9320 ◇	29414 9325 ◇
2700K CRI>90	4x LED 2W / 221lm / 48V-DC			29417 9220 ◇	29418 9225 ◇	29413 9220 ◇	29414 9225 ◇

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●



NEW

OBIN

		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI
3000K CRI>90	LED 11.6W / 1524lm / 48V-DC	IP20	24°	30513 9320 ◇	30514 9325 ◇		
			36°	30513 9330 ◇	30514 9335 ◇		
2700K CRI>90	LED 11.6W / 1458lm / 48V-DC		24°	30513 9220 ◇	30514 9225 ◇		
			36°	30513 9230 ◇	30514 9235 ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ B ● / BRA ● / BRG ● / BROB ● / BRAT ● / W ○





NEW

BOXY R




M20 / M26H / M26H+SBL*		M26L		M52	
MDL	DALI	MDL	DALI**	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC				
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	10729 9320 ◇	10731 9325 ◇		
SOFT DIM TUNABLE WHITE	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC	10729 9220 ◇	10731 9225 ◇		
	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	10730 9030 ◇	10732 9035 ◇		
				10733 9035 ◇	

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●●● / B-FG ●●● / W-W ○○

NEW

BOXY L




M20 / M26H / M26H+SBL*		M26L		M52	
MDL	DALI	MDL	DALI**	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC				
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	10734 9320 ◇	10736 9325 ◇		
SOFT DIM TUNABLE WHITE	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC	10734 9220 ◇	10736 9225 ◇		
	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	10735 9030 ◇	10737 9035 ◇		
				10738 9035 ◇	

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●●● / B-FG ●●● / W-W ○○

NEW

BOXY L A



M20 / M26H / M26H+SBL*		M26L		M52	
MDL	DALI	MDL	DALI**	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC				
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	10739 9320 ◇	10741 9325 ◇		
SOFT DIM TUNABLE WHITE	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC	10739 9220 ◇	10741 9225 ◇		
	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	10740 9030 ◇	10742 9035 ◇		
				10743 9035 ◇	

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●●● / B-FG ●●● / W-W ○○



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	JUM-OH!		OBIN		BOXY	
	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	300 89 48 240		114 x 63 x 125	R*	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER						
MODULATOR DALI 1-10V DIM	300 90 011		93 x 78 x 56	R*	R*	R*
or MODULATOR WIRELESS	300 90 012		93 x 78 x 56	R*	R*	R*
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030		190 x 16 x 16	R	R	R
FINISH						
SPY 90 TUBE	19810 0170 B / FBR / FG / GC / W			R	R	
HONEYCOMB / LENS / GLASS						
BOXY HONEYCOMB	251 70 03 01 B / W				A	A
HONEYCOMB 75	19810 0110 B			A	A	
BOXY SOFTENING LENS	251 70 03 04 B / W				A	A
BOXY GLASS SBL	251 70 03 05 B / W				A	A

* REMOTE INSTALLATION


PRO

PROFILES

B

MAGNETIC MODULES

PRO




1 LED

M20 / M26H		M26L		M52	
MDL	DALI	MDL	DALI	MDL	DALI

3000K / CRI>80	LED 6W / 558lm / 48V-DC	IP20	20°						
2700K / CRI>80	LED 6W / 558lm / 48V-DC							421 218 1832 MDL	24414 8325
						421 218 1822 MDL	24414 8225		




A



2 LED

M20 / M26H		M26L		M52	
MDL	DALI	MDL	DALI	MDL	DALI

3000K / CRI>80	2 x LED 6W / 558lm / 48V-DC	IP20	20°						
2700K / CRI>80	2 x LED 6W / 558lm / 48V-DC							421 218 2832 MDL	24417 8325
						421 218 2822 MDL	24417 8225		




2 LED OK

M20 / M26H		M26L		M52	
MDL	DALI	MDL	DALI	MDL	DALI

3000K / CRI>80	2 x LED 6W / 558lm / 48V-DC	IP20	20°						
2700K / CRI>80	2 x LED 6W / 558lm / 48V-DC							421 248 2832 MDL	24419 8325
						421 248 2822 MDL	24419 8225		






1 LED D

M20 / M26H		M26L		M52	
MDL	DALI	MDL	DALI	MDL	DALI

3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	33°			421 228 811 932 D MDL	24415 9325
2700K CRI>90	LED 7.1W / 779lm / 48V-DC					421 228 811 922 D MDL	24415 9225



2 LED D

M20 / M26H		M26L		M52	
MDL	DALI	MDL	DALI	MDL	DALI

3000K CRI>90	2 x LED 7.1W / 812lm / 48V-DC	IP20	33°			421 228 812 932 D MDL	24418 9325
2700K CRI>90	2 x LED 7.1W / 779lm / 48V-DC					421 228 812 922 D MDL	24418 9225



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				1 LED / 2 LED	
				MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125		R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER					
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56		R *	
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56		R *	
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030	190 x 16 x 16		R	


* REMOTE INSTALLATION

PRO

PROFILES

B

MAGNETIC MODULES




BOWIE 1

		IP20		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lm / 48V-DC	25°	37°	26716 9320 ◊	26717 9325 ◊	26720 9320 ◊	26721 9325 ◊		
				26716 9330 ◊	26717 9335 ◊	26720 9330 ◊	26721 9335 ◊		
2700K CRI>90	LED 8.6W / 974lm / 48V-DC	25°	37°	26716 9220 ◊	26717 9225 ◊	26720 9220 ◊	26721 9225 ◊		
				26716 9230 ◊	26717 9235 ◊	26720 9230 ◊	26721 9235 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / W ○




BOWIE 2

		IP20		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2 x LED 8.6W / 1018lm / 48V-DC	25°	37°	26718 9320 ◊	26719 9325 ◊	26722 9320 ◊	26723 9325 ◊		
				26718 9330 ◊	26719 9335 ◊	26722 9330 ◊	26723 9335 ◊		
2700K CRI>90	2 x LED 8.6W / 974lm / 48V-DC	25°	37°	26718 9220 ◊	26719 9225 ◊	26722 9220 ◊	26723 9225 ◊		
				26718 9230 ◊	26719 9235 ◊	26722 9230 ◊	26723 9235 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / W ○




ODRON 1

		IP20		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lm / 48V-DC	28 & 41°	**	26216 9300 ◊	26217 9305 ◊	26220 9300 ◊	26221 9305 ◊		
				26216 9200 ◊	26217 9205 ◊	26220 9200 ◊	26221 9205 ◊		
2700K CRI>90	LED 8.6W / 974lm / 48V-DC	28 & 41°	**	26216 9200 ◊	26217 9205 ◊	26220 9200 ◊	26221 9205 ◊		
				26216 9200 ◊	26217 9205 ◊	26220 9200 ◊	26221 9205 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

** INCL. 2 REFLECTORS

◊ B ● / W ○



ODRON 2

		IP20		M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2 x LED 8.6W / 1018lm / 48V-DC	28 & 41°	**	26218 9300 ◊	26219 9305 ◊	26222 9300 ◊	26223 9305 ◊		
				26218 9200 ◊	26219 9205 ◊	26222 9200 ◊	26223 9205 ◊		
2700K CRI>90	2 x LED 8.6W / 974lm / 48V-DC	28 & 41°	**	26218 9200 ◊	26219 9205 ◊	26222 9200 ◊	26223 9205 ◊		
				26218 9200 ◊	26219 9205 ◊	26222 9200 ◊	26223 9205 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

** INCL. 4 REFLECTORS

◊ B ● / W ○




PRO

A

www.detaight.com/spittline

www.detaight.com/shiftline




NEW
NEEDLE

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.2W / 677lm / 48V-DC	IP20	13°	25016 9310 ◊	25017 9315 ◊		
			33°	25016 9320 ◊	25017 9325 ◊		
2700K CRI>90	LED 8.2W / 677lm / 48V-DC	IP20	13°	25016 9210 ◊	25017 9215 ◊		
			33°	25016 9220 ◊	25017 9225 ◊		

◊ BBR ● / FG ●

*MDL MODULES NOT FOR M26H + SBL PROFILE



NEW
NEEDLE OK

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	13°	25018 9310 ◊	25019 9315 ◊		
			33°	25018 9320 ◊	25019 9325 ◊		
2700K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	13°	25018 9210 ◊	25019 9215 ◊		
			33°	25018 9220 ◊	25019 9225 ◊		

◊ BBR ● / FG ●

*MDL MODULES NOT FOR M26H + SBL PROFILE



PRO

PROFILES



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

	BOWIE		ODRON		NEEDLE	
	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	300 89 48 240					
MODULATOR MORE INFO TECHNICAL CHAPTER						
MODULATOR DALI 1-10V DIM	300 90 011					
or MODULATOR WIRELESS	300 90 012					
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030					
FINISH						
ODRON COVER	26210 0020 GC			A	A	

* REMOTE INSTALLATION

B

MAGNETIC MODULES



MULTINOVA 30

UGR <19

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI ***	MDL	DALI ***	MDL	DALI
3000K / CRI>90	LED 14,8W / 2148lm / 48V-DC IP20	SBL	27947 9300 ◊	27948 9305 ◊	27938 9300 ◊	27939 9305 ◊	
		PRISMATIC	27949 9300 ◊	27950 9305 ◊	27940 9300 ◊	27941 9305 ◊	
		SMOKE	27951 9300 ◊	27952 9305 ◊	27942 9300 ◊	27943 9305 ◊	
SOFT DIM	3000-1800K / CRI>90 LED 14,8W / 2148lm / 48V-DC IP20	SBL		27955 9005 ◊		27946 9005 ◊	
		PRISMATIC					
		SMOKE					
TUNABLE WHITE	6500-2700K / CRI>90 LED 9,4W / 1367lm / 48V-DC IP20	SBL		27953 9005 ◊		27944 9005 ◊	
		PRISMATIC		27954 9005 ◊		27945 9005 ◊	
		SMOKE					


◊ B ● / GC ● / W ○ (for prismatic: ◊ B ● / W ○)



PRO

A

* M26H+SBL: NOT FOR MDL LUMINAIRES
** FOR PRISMATIC
*** DALI DT8 FOR TUNABLE WHITE




HALOSCAN MP

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>90	LED 8.6W / 1089lm / 48V-DC	14°	23135 9310 ◊	23136 9315 ◊	23123 9310 ◊	23124 9315 ◊	
		21°	23135 9320 ◊	23136 9325 ◊	23123 9320 ◊	23124 9325 ◊	
		35°	23135 9330 ◊	23136 9335 ◊	23123 9330 ◊	23124 9335 ◊	
2700K / CRI>90	LED 8.6W / 1041lm / 48V-DC	14°	23135 9210 ◊	23136 9215 ◊	23123 9210 ◊	23124 9215 ◊	
		21°	23135 9220 ◊	23136 9225 ◊	23123 9220 ◊	23124 9225 ◊	
		35°	23135 9230 ◊	23136 9235 ◊	23123 9230 ◊	23124 9235 ◊	
SOFT DIM	3000-1800K / CRI>90 LED 6W / 623lm / 48V-DC	14°	23137 9010 ◊	23138 9015 ◊	23125 9010 ◊	23126 9015 ◊	
		21°	23137 9020 ◊	23138 9025 ◊	23125 9020 ◊	23126 9025 ◊	
		35°	23137 9030 ◊	23138 9035 ◊	23125 9030 ◊	23126 9035 ◊	

*MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / W ○



HALOSCAN HP

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>90	LED 11.6W / 1524lm / 48V-DC	14°	23141 9310 ◊	23142 9315 ◊	23129 9310 ◊	23130 9315 ◊	
		21°	23141 9320 ◊	23142 9325 ◊	23129 9320 ◊	23130 9325 ◊	
		35°	23141 9330 ◊	23142 9335 ◊	23129 9330 ◊	23130 9335 ◊	
2700K / CRI>90	LED 11.6W / 1458lm / 48V-DC	14°	23141 9210 ◊	23142 9215 ◊	23129 9210 ◊	23130 9215 ◊	
		21°	23141 9220 ◊	23142 9225 ◊	23129 9220 ◊	23130 9225 ◊	
		35°	23141 9230 ◊	23142 9235 ◊	23129 9230 ◊	23130 9235 ◊	
SOFT DIM	3000-1800K / CRI>90 LED 11.8W / 1307lm / 48V-DC	14°	23143 9010 ◊	23144 9015 ◊	23131 9010 ◊	23132 9015 ◊	
		21°	23143 9020 ◊	23144 9025 ◊	23131 9020 ◊	23132 9025 ◊	
		35°	23143 9030 ◊	23144 9035 ◊	23131 9030 ◊	23132 9035 ◊	


*MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / W ○






FIND ME ONLINE



PUNK 39

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	45°	471 151 811 931 MDL ◇	23372 9315 ◇	23244 9310 ◇	23245 9315 ◇		
2700K CRI>90	LED 7.1W / 779lm / 48V-DC			471 151 811 921 MDL ◇	23372 9215 ◇	23244 9210 ◇	23245 9215 ◇		


*MDL MODULES NOT FOR M26H + SBL PROFILE



M - OCTAV 27

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	29012 9320 ◇	29014 9325 ◇	29013 9320 ◇	29015 9325 ◇		
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			29012 9220 ◇	29014 9225 ◇	29013 9220 ◇	29015 9225 ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE



M - OCTAV 39

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	29020 9320 ◇	29022 9325 ◇	29021 9320 ◇	29023 9325 ◇		
			40°	29020 9330 ◇	29022 9335 ◇	29021 9330 ◇	29023 9335 ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	29020 9220 ◇	29022 9225 ◇	29021 9220 ◇	29023 9225 ◇		
			40°	29020 9230 ◇	29022 9235 ◇	29021 9230 ◇	29023 9235 ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

MULTINOVA		HALOSCAN MP		HALOSCAN HP		PUNK		OCTAV 27		OCTAV 39	
MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI

LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*
-------------------------	---------------	----------------	----	----	----	----	----	----	----	----	----	----	----

MODULATOR MORE INFO TECHNICAL CHAPTER

MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56	R*		R*		R*		R*		R*		R*
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56	R*		R*		R*		R*		R*		R*
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030	190 x 16 x 16	R		R		R		R		R		R

FINISH

SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W											R	R
---------------	----------------------------------	--	--	--	--	--	--	--	--	--	--	---	---

HONEYCOMB / LENS / GLASS

HALOSCAN HONEYCOMB	23110 0050 B			A	A	A	A						
HALOSCAN LINEAR SPREAD LENS	23110 0040			A	A	A	A						
HALOSCAN KAP MP	23110 0060 B / W			A	A								


* REMOTE INSTALLATION

PRO

PROFILES



MAGNETIC MODULES




SPY 271

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	23311 9320 ◇	23312 9325 ◇	23210 9320 ◇	23211 9325 ◇
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			23311 9220 ◇	23312 9225 ◇	23210 9220 ◇	23211 9225 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




SPY 271 L

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	23385 9320 ◇	23386 9325 ◇	23280 9320 ◇	23281 9325 ◇
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			23385 9220 ◇	23386 9225 ◇	23280 9220 ◇	23281 9225 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




SPY 272

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 5.8W / 787lm / 48V-DC	IP20	30°	23313 9320 ◇	23314 9325 ◇	23212 9320 ◇	23213 9325 ◇
2700K CRI>90	2x LED 5.8W / 753lm / 48V-DC			23313 9220 ◇	23314 9225 ◇	23212 9220 ◇	23213 9225 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○



SPY 272 L

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 5.8W / 787lm / 48V-DC	IP20	30°	23387 9320 ◇	23388 9325 ◇	23282 9320 ◇	23283 9325 ◇
2700K CRI>90	2x LED 5.8W / 753lm / 48V-DC			23387 9220 ◇	23388 9225 ◇	23282 9220 ◇	23283 9225 ◇


*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○



PRO

A




SPY 391

		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	23315 9320 ◇**	23316 9325 ◇**	23258 9320 ◇**	23259 9325 ◇**	24430 9320 ◇	24431 9325 ◇
			40°	23315 9330 ◇**	23316 9335 ◇**	23258 9330 ◇**	23259 9335 ◇**	24430 9330 ◇	24431 9335 ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	23315 9220 ◇**	23316 9225 ◇**	23258 9220 ◇**	23259 9225 ◇**	24430 9220 ◇	24431 9225 ◇
			40°	23315 9230 ◇**	23316 9235 ◇**	23258 9230 ◇**	23259 9235 ◇**	24430 9230 ◇	24431 9235 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○

** + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●




SPY 391 L

		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	23389 9320 ◇	23390 9325 ◇	23284 9320 ◇	23285 9325 ◇	24440 9320 ◇	24441 9325 ◇
			40°	23389 9330 ◇	23390 9335 ◇	23284 9330 ◇	23285 9335 ◇	24440 9330 ◇	24441 9335 ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	23389 9220 ◇	23390 9225 ◇	23284 9220 ◇	23285 9225 ◇	24440 9220 ◇	24441 9225 ◇
			40°	23389 9230 ◇	23390 9235 ◇	23284 9230 ◇	23285 9235 ◇	24440 9230 ◇	24441 9235 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



SPY 392

		M20 / M26H		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	2x LED 8.6W / 1089lm / 48V-DC	IP20	20°	23317 9320 ◇	23318 9325 ◇	23260 9320 ◇	23261 9325 ◇		
			40°	23317 9330 ◇	23318 9335 ◇	23260 9330 ◇	23261 9335 ◇		
2700K CRI>90	2x LED 8.6W / 1041lm / 48V-DC		20°	23317 9220 ◇	23318 9225 ◇	23260 9220 ◇	23261 9225 ◇		
			40°	23317 9230 ◇	23318 9235 ◇	23260 9230 ◇	23261 9235 ◇		

◇ B ● / W ○



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SPY 271/272 - 271 L/272 L		SPY 391/392		SPY 391 L	
MDL	DALI	MDL	DALI	MDL	DALI

LED POWER SUPPLY 48V-DC	MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R*	R*	R*	R*	R*	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER									
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56	R*		R*			R*	
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56	R*		R*			R*	
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030	190 x 16 x 16	R		R			R	
FINISH									
SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W				R	R			
SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W							R	R
VISOR 27	216 12 01		A	A					
VISOR 39	216 12 02				A	A	A	A	A


* REMOTE INSTALLATION

PRO

PROFILES

B

MAGNETIC MODULES



SPY 52

		M20 / M26H / M26H+SBL*		M26L		M52				
		MDL	DALI**	MDL	DALI**	MDL	DALI**			
PRO	3000K CRI>90	LED 12.4W / 1467lm / 48V-DC	IP20	20°	23323 9320 ◇	23324 9325 ◇	23274 9320 ◇	23275 9325 ◇	24434 9320 ◇	24435 9325 ◇
				45°	23323 9330 ◇	23324 9335 ◇	23274 9330 ◇	23275 9335 ◇	24434 9330 ◇	24435 9335 ◇
	2700K CRI>90	LED 12.4W / 1403lm / 48V-DC	IP20	20°	23323 9220 ◇	23324 9225 ◇	23274 9220 ◇	23275 9225 ◇	24434 9220 ◇	24435 9225 ◇
				45°	23323 9230 ◇	23324 9235 ◇	23274 9230 ◇	23275 9235 ◇	24434 9230 ◇	24435 9235 ◇
NEW	SOFT DIM	3000-1800K / CRI>90	IP20	20°	23398 9020 ◇	23399 9025 ◇	23297 9020 ◇	23298 9025 ◇	24451 9020 ◇	24452 9025 ◇
		LED 10.2W / 1038lm / 48V-DC		45°	23398 9030 ◇	23399 9035 ◇	23297 9030 ◇	23298 9035 ◇	24451 9030 ◇	24452 9035 ◇
	TUNABLE WHITE	6500-2700K / CRI>90	IP20	20°		23331 9025 ◇		23215 9025 ◇		24445 9025 ◇
		LED 9W / 1087lm / 48V-DC		45°		23331 9035 ◇		23215 9035 ◇		24445 9035 ◇


* MDL MODULES NOT FOR M26H + SBL PROFILE
 ** TUNABLE WHITE DALI DT8

◇ B ● / FBR ● / FG ● / GC ● / W ○ (for tunable white: ◇ B ● / W ○)



NEW


SPY 52 WALLWASH



		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP 20	WALLWASH	19889 9300 ◇	19890 9305 ◇	19887 9300 ◇	19888 9305 ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC			19889 9200 ◇	19890 9205 ◇	19887 9200 ◇	19888 9205 ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC			19894 9000 ◇	19895 9005 ◇	19892 9000 ◇	19893 9005 ◇


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



NEW


SPY 52 FOCUS



		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 12.4W / 1467lm / 48V-DC	IP20	26-46°	23411 9300 ◇	23412 9305 ◇	23293 9300 ◇	23294 9305 ◇
2700K CRI>90	LED 12.4W / 1403lm / 48V-DC			23411 9200 ◇	23412 9205 ◇	23293 9200 ◇	23294 9205 ◇
SOFT DIM	3000-1800K / CRI>90 LED 8.3W / 934lm / 48V-DC			23413 9000 ◇	23414 9005 ◇	23295 9000 ◇	23296 9005 ◇

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



SPY 66

		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI **	MDL	DALI **	MDL	DALI **		
3000K CRI>90	LED 25W / 2811lm / / 48V-DC	IP20	18°	23327 9310 ◊	23328 9315 ◊	23278 9310 ◊	23279 9315 ◊	24438 9310 ◊	24439 9315 ◊
			30°	23327 9320 ◊	23328 9325 ◊	23278 9320 ◊	23279 9325 ◊	24438 9320 ◊	24439 9325 ◊
			45°	23327 9330 ◊	23328 9335 ◊	23278 9330 ◊	23279 9335 ◊	24438 9330 ◊	24439 9335 ◊
2700K CRI>90	LED 25W / 2688lm / / 48V-DC	IP20	18°	23327 9210 ◊	23328 9215 ◊	23278 9210 ◊	23279 9215 ◊	24438 9210 ◊	24439 9215 ◊
			30°	23327 9220 ◊	23328 9225 ◊	23278 9220 ◊	23279 9225 ◊	24438 9220 ◊	24439 9225 ◊
			45°	23327 9230 ◊	23328 9235 ◊	23278 9230 ◊	23279 9235 ◊	24438 9230 ◊	24439 9235 ◊
	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	IP20	18°		23360 9015 ◊		23292 9015 ◊		24446 9015 ◊
			30°		23360 9025 ◊		23292 9025 ◊		24446 9025 ◊
			45°		23360 9035 ◊		23292 9035 ◊		24446 9035 ◊


* MDL MODULES NOT FOR M26H + SBL PROFILE
** TUNABLE WHITE DALI DT8



SPY 66 WALLWASH

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 17.2W / 2101lm / 48V-DC	IP20	WALLWASH	24635 9300 ◊	24636 9305 ◊	24633 9300 ◊	24634 9305 ◊
2700K CRI>90	LED 17.2W / 2009lm / 48V-DC			24635 9200 ◊	24636 9205 ◊	24633 9200 ◊	24634 9205 ◊

* MDL MODULES NOT FOR M26H + SBL PROFILE





PRO

PROFILES



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

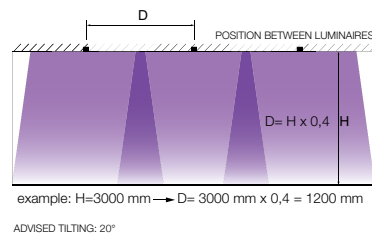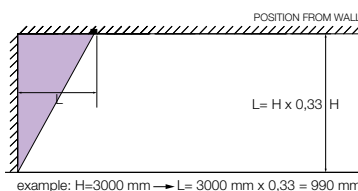

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


	SPY 52		SPY 52 WW		SPY 52 FOCUS		SPY 66		SPY 66 WW	
	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
NON DIM - 48V-DC - 240W	300 89 48 240									
MODULATOR MORE INFO TECHNICAL CHAPTER										
MODULATOR DALI 1-10V DIM	300 90 011									
or MODULATOR WIRELESS	300 90 012									
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030									
FINISH										
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W									
SPY 66 TUBE	24611 0100 B / FBR / FG / GC / W									
HONEYCOMB / LENS / GLASS										
HONEYCOMB SINGLE USE	19810 0010 B									
HONEYCOMB DOUBLE USE	19810 0060 B									
LINEAR SPREAD LENS	19810 0020									
SPREAD LENS	19810 0030									
SOFTENING LENS	19810 0040									
GLASS SBL	19810 0050									
HONEYCOMB SINGLE USE	24611 0150 B									
HONEYCOMB DOUBLE USE	24611 0210 B									
LINEAR SPREAD LENS	24611 0170									
SPREAD LENS	24611 0200									
SOFTENING LENS	24611 0190									
GLASS SBL	24611 0160									

* REMOTE INSTALLATION
** ONLY FOR TUNABLE WHITE


B

MAGNETIC MODULES

PRO



SPY FOCUS LP




				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lm / 48V-DC	IP20	8° - 43°	23378 9300 ◊	23379 9305 ◊	23230 9300 ◊	23231 9305 ◊	24428 9300 ◊	24429 9305 ◊
2700K CRI>90	LED 8.6W / 974lm / 48V-DC			23378 9200 ◊	23379 9205 ◊	23230 9200 ◊	23231 9205 ◊	24428 9200 ◊	24429 9205 ◊


*MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / FBR ● / FG ● / W ○

A



SPY FOCUS MP




				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 17.2W / 2101lm / 48V-DC	IP20	12° - 45°	23332 9300 ◊	23373 9305 ◊	23232 9300 ◊	23233 9305 ◊	24426 9300 ◊	24427 9305 ◊
2700K CRI>90	LED 17.2W / 2009lm / 48V-DC			23332 9200 ◊	23373 9205 ◊	23232 9200 ◊	23233 9205 ◊	24426 9200 ◊	24427 9205 ◊

*MDL MODULES NOT FOR M26H + SBL PROFILE

◊ B ● / FBR ● / FG ● / W ○

www.deltalight.com/spittline
www.deltalight.com/shifftline


VIZIR



				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	23365 9310 ◊	23371 9315 ◊	23246 9310 ◊	23247 9315 ◊		
2700K CRI>90	LED 5.7W / 519lm / 48V-DC			23365 9210 ◊	23371 9215 ◊	23246 9210 ◊	23247 9215 ◊		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◊ BBR ● / GC ●




VIZIR L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20	33°	473 152 811 932 MDL ◊	23362 9325 ◊	23248 9320 ◊	23249 9325 ◊		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC			473 152 811 922 MDL ◊	23362 9225 ◊	23248 9220 ◊	23249 9225 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◊ BBR ● / GC ●




HEDRA

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	23366 9310 ◊	23363 9315 ◊	23250 9310 ◊	23251 9315 ◊		
2700K CRI>90	LED 5.7W / 519lm / 48V-DC			23366 9210 ◊	23363 9215 ◊	23250 9210 ◊	23251 9215 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◊ BBR ● / GC ●



HEDRA L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20	33°	473 252 811 932 MDL ◊	23364 9325 ◊	23252 9320 ◊	23253 9325 ◊		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC			473 252 811 922 MDL ◊	23364 9225 ◊	23252 9220 ◊	23253 9225 ◊		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◊ BBR ● / GC ●



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT


FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				SPY FOCUS		VIZIR		HEDRA	
				MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
NON DIM - 48V-DC - 240W				300 89 48 240	114 x 63 x 125	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER									
MODULATOR DALI 1-10V DIM				300 90 011	93 x 78 x 56	R *	R *	R *	R *
or MODULATOR WIRELESS				300 90 012	93 x 78 x 56	R *	R *	R *	R *
or MODULATOR DALI WIRELESS PLUG-IN				21032 0030	190 x 16 x 16	R	R	R	R
FINISH									
VIZIR TUBE				473 01 00 B / FBR / FG / W		R	R	R	R
HONEYCOMB / LENS / GLASS									
HONEYCOMB				473 03 01 B		A	A	A	A
SOFTENING LENS				473 03 04		A	A	A	A

* REMOTE INSTALLATION

MAGNETIC MODULES



PRO


MICROSPY 39 C

		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	45°	421 612 811 931 MDL ◇	23353 9315 ◇	421 612 811 931 MDL ◇	23353 9315 ◇	421 612 811 931 MDL ◇	23353 9315 ◇
2700K CRI>90	LED 7.1W / 779lm / 48V-DC			421 612 811 921 MDL ◇	23353 9215 ◇	421 612 811 921 MDL ◇	23353 9215 ◇	421 612 811 921 MDL ◇	23353 9215 ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○
INCL. 1 x CABLE 2 x 0.75mm² / 1.6m

A




TWEETER BL

		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20		421 522 811 930 MDL ◇	23352 9305 ◇	23242 9300 ◇	23243 9305 ◇		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC		421 522 811 920 MDL ◇	23352 9205 ◇	23242 9200 ◇	23243 9205 ◇			

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○
EXCL. GLASS



GIBBO


		M20 / M26H / M26H+SBL*		M26L		M52			
		MDL	DALI	MDL	DALI	MDL	DALI		
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20		421 622 811 930 MDL ◇	23354 9305 ◇	421 622 811 930 MDL ◇	23354 9305 ◇	421 622 811 930 MDL ◇	23354 9305 ◇
2700K CRI>90	LED 7.1W / 779lm / 48V-DC		421 622 811 920 MDL ◇	23354 9205 ◇	421 622 811 920 MDL ◇	23354 9205 ◇	421 622 811 920 MDL ◇	23354 9205 ◇	

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○
EXCL. GLASS
INCL. 1 x CABLE 2 x 0.75mm²
INCL. 1 x CABLE SUSP. SINGLE AUTO 1,6m





**READ MY
COLOUR**

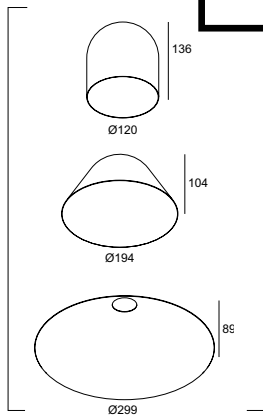

◇ B ● / GC ● / W ○

**CHOOSE
YOUR
SHADE(S)**



NEW
CUPPA C

		M20 / M26H / M26H+SBL*		M26L		M52	
		MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	40°	28811 9330 ◇	28812 9335 ◇	28811 9330 ◇	28812 9335 ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC			28811 9230 ◇	28812 9235 ◇	28811 9230 ◇	28812 9235 ◇
3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC	28813 9030 ◇			28814 9035 ◇	28813 9030 ◇	28814 9035 ◇	28813 9030 ◇

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B-GC ● ● / W-GC ○ ○

EXCL. CUPPA SHADE
INCL. 1 x CABLE 2 x 0.75mm² 1,6m



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	MICROSPY		TWEETER BL		GIBBO		CUPPA	
	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	300 89 48 240		114 x 63 x 125	R*	R*	R*	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	300 90 011		93 x 78 x 56	R*		R*		R*
or MODULATOR WIRELESS	300 90 012		93 x 78 x 56	R*		R*		R*
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030		190 x 16 x 16	R		R		R
FINISH								
BOWL GLASS CLEAR	286 67 01				R	R	R	R
or BOWL GLASS AMBER	286 67 02				R	R	R	R
or BOWL GLASS OPAL WHITE	286 67 03				R	R	R	R
CUPPA SHADE 120	28800 0010 B/GC/W							R R
or CUPPA SHADE 190	28800 0020 B/GC/W							R R
or CUPPA SHADE 300	28800 0030 B/GC/W							R R
or CUPPA DISK	28800 0040 B/W							R R

* REMOTE INSTALLATION

PRO

PROFILES



SPLITLINE 14

SHIFTLINE 19

Narrow streets draw black lines through space and literally form a 'lighting path' that dialogues with the architecture of the surroundings. The Splitline 14 profile can be combined with several accent lights, depending on what the space needs, both functionally and in terms of design. Splitline 14 effortlessly integrates with architecture, upgrading the uniqueness of the room.



Building on the flexibility of our Superloop, adding the refinement of our 2F track and shrinking down the design to the level of our Shelfline. The result? Shiftline 19! This miniature profile lets you combine accent lighting and decorative lighting in the shape of Uho, Spy 27 and Spy 39.

Containing 2 48V and 2 Dim conductors for individual DALIing, the slender profile can easily be combined with Smart 48 and CTRL Delta to offer a quick and easy, minimalistic, wireless lighting set-up. Shiftline 19 has many application possibilities, as its dimensions are reduced to a minimum which allow a surface mounted installation that only requires a minimum of space. Be it in residential, hospitality or in retail, the different modules to apply on the Shiftline 19 track can be used for accent lighting or decorative lighting, offering multiple ways of flexibility.

www.deltalight.com/shiftline
www.deltalight.com/splitline


SHIFTLINE 19

**Toolfree
installation**

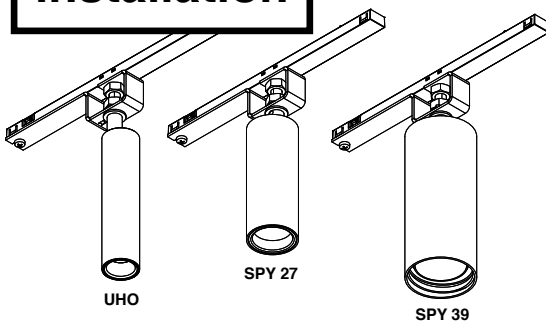



SPLITLINE 14




Go around the corner

PRO

PROFILES

SPLITLINE 14

SHIFTLINE 19

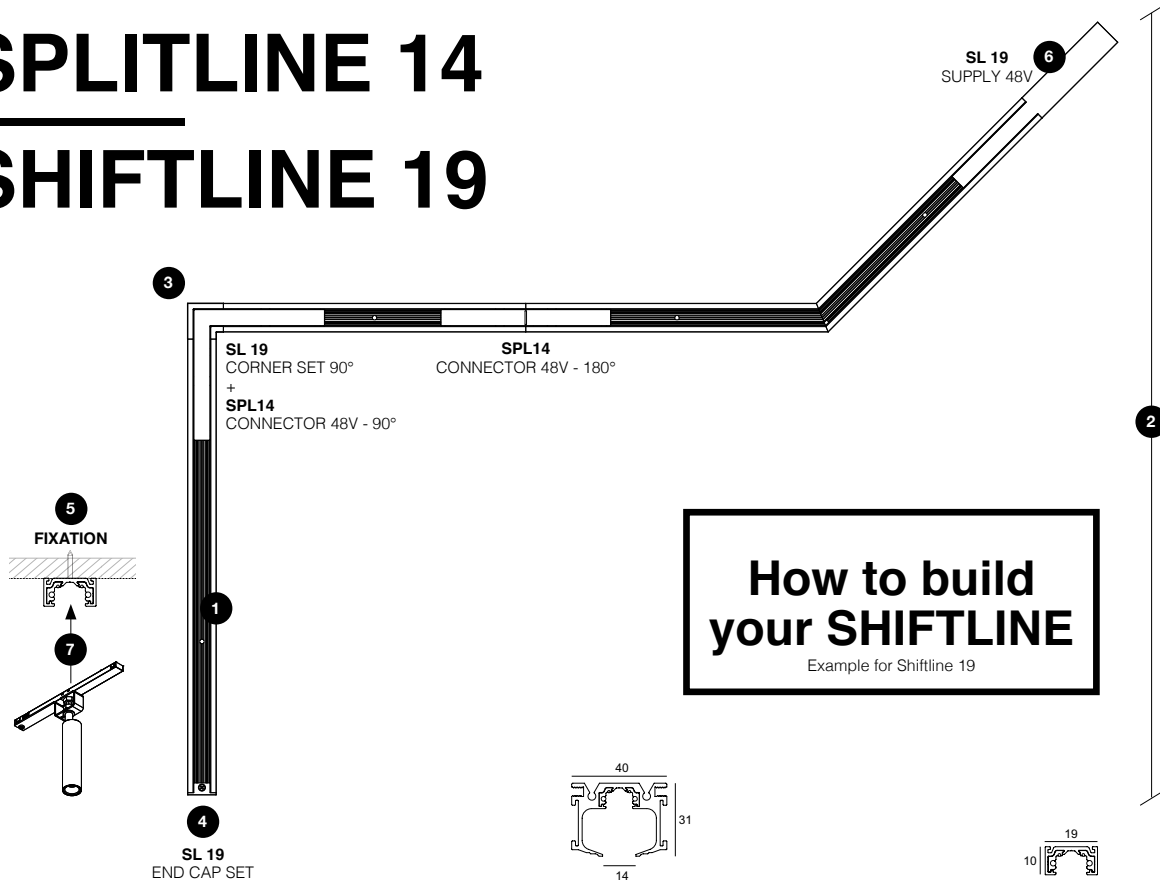

PRO

A

1 PROFILE

	SPLITLINE 14	SHIFTLINE 19
PROFILE 2m	27300 0020 ◊ ◊ B ●	27011 0050 ◊ ◊ B ● / W ○
PROFILE 3m	27300 0030 ◊ ◊ B ●	27011 0060 ◊ ◊ B ● / W ○

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CORNER 180°	420 06 01	-
CORNER 90°	27300 0640 B	27011 0630 B / W
CORNER 90° V	27300 0650 B	27011 0670 B / W

4 ENDCAP

ENDCAP (2 PCS.)	27300 0300 B	27011 0310 B / W
-----------------	--------------	------------------

5 FIXATION

RECESSED		
FIXATION SET (2 PCS.)	420 20 14 01	-



6 CONNECTION (max.200W/supply/max.50m)

SUPPLY 48V-DC	27300 0910	27011 0910 B / W
CONNECTOR 48V-DC - 90°	-	27011 9920
CONNECTOR 48V-DC - 90° V	-	27011 9930
CONNECTOR 48V-DC - 180°	27011 9910	27011 9910
CONNECTOR 48V-DC - 0-180°	27300 9970	-

7 LIGHT MODULES

LIGHT MODULES
SEE NEXT PAGE

www.detailight.com/splitline
www.detailight.com/shiftline





UHO

SPL14		SL19		L SPL14		L SL19	
MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI

3000K CRI>90	LED 2.3W / 260lm / 48V-DC	IP20	30°	27311 9320 ◇	27312 9325 ◇	27020 9320 ◇	27021 9325 ◇	27319 9320 ◇	27320 9325 ◇	27028 9320 ◇	27029 9325 ◇
2700K CRI>90	LED 2.3W / 245lm / 48V-DC			27311 9220 ◇	27312 9225 ◇	27020 9220 ◇	27021 9225 ◇	27319 9220 ◇	27320 9225 ◇	27028 9220 ◇	27029 9225 ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○





SPY 27

SPL14		SL19		L SPL14		L SL19	
MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI

3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	27313 9320 ◇	27314 9325 ◇	27022 9320 ◇	27023 9325 ◇	27321 9320 ◇	27322 9325 ◇	27030 9320 ◇	27031 9325 ◇
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			27313 9220 ◇	27314 9225 ◇	27022 9220 ◇	27023 9225 ◇	27321 9220 ◇	27322 9225 ◇	27030 9220 ◇	27031 9225 ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○



SPY 39

SPL14		SL19		L SPL14		L SL19	
MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI

3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	27315 9320 ◇	27316 9325 ◇	27024 9320 ◇	27025 9325 ◇	27323 9320 ◇	27324 9325 ◇	27032 9320 ◇	27033 9325 ◇
			40°	27315 9330 ◇	27316 9335 ◇	27024 9330 ◇	27025 9335 ◇	27323 9330 ◇	27324 9335 ◇	27032 9330 ◇	27033 9335 ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	IP20	20°	27315 9220 ◇	27316 9225 ◇	27024 9220 ◇	27025 9225 ◇	27323 9220 ◇	27324 9225 ◇	27032 9220 ◇	27033 9225 ◇
			40°	27315 9230 ◇	27316 9235 ◇	27024 9230 ◇	27025 9235 ◇	27323 9230 ◇	27324 9235 ◇	27032 9230 ◇	27033 9235 ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	UHO		SPY 27		SPY 39		SPY 39 L	
	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	300 89 48 240		114 x 63 x 125	R*	R*	R*	R*	R*
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	300 90 011		93 x 78 x 56	R*		R*		R*
or MODULATOR WIRELESS	300 90 012		93 x 78 x 56	R*		R*		R*
or MODULATOR DALI WIRELESS PLUG-IN	21032 0030		190 x 16 x 16	R		R		R
FINISH								
SPY 39 TUBE	24144 0010 B / FBR / FG / GC / W					R	R	
SPY 39 L TUBE	24144 0020 B / FBR / FG / GC / W							R R
VISOR 27	216 12 01			A	A			
VISOR 39	216 12 02					A	A	

* REMOTE INSTALLATION


PRO

PROFILES

B

SPLIT-IT PRO

How to build
your SPLIT-IT PRO

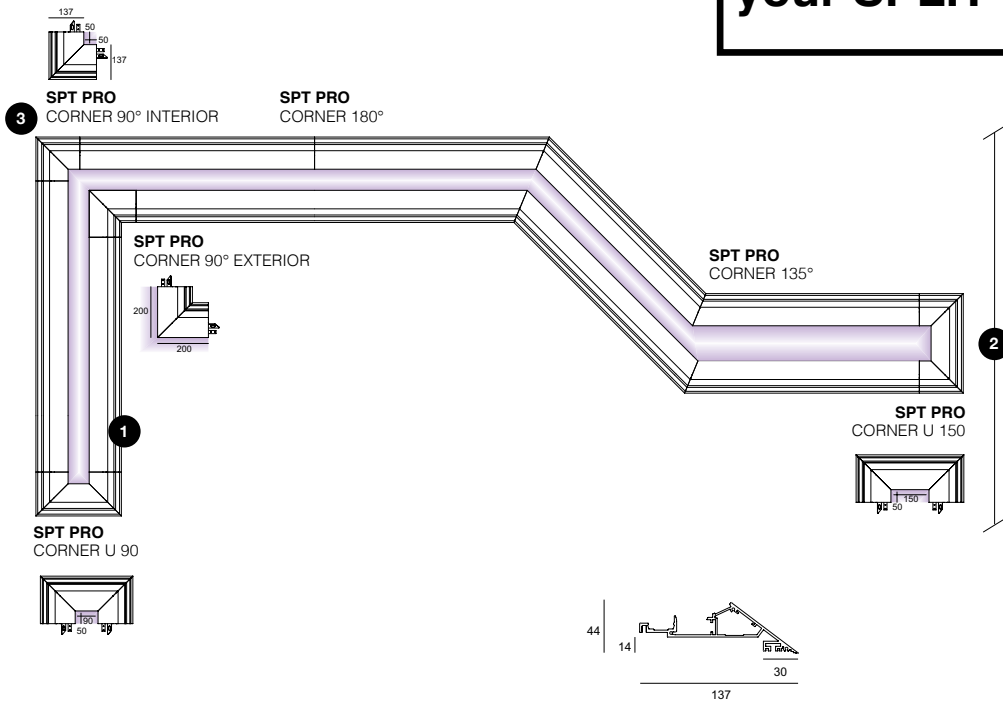




57 x (L + 5) x 85 min.9 / max.25

SPLIT-IT PRO

1 PROFILE	PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	372 01 00 ◊ ◊ B ● / W ○
2 DIMENSIONS	The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.	
3 JUNCTION / CORNER	CORNER 180°	372 01 06 11
	CORNER 90° INTERIOR	372 01 06 06 B / W
	CORNER 90° EXTERIOR	372 01 06 16 B / W
	CORNER 135°	372 01 06 05
	CORNER U 90	372 01 06 090 B / W
	CORNER U 150	372 01 06 150 B / W
4 ENDCAP	-	
5 FIXATION	SURFACE MOUNTED	
	WALL FIXATION	372 01 06 10
6 CONNECTION	THROUGH WIRING 48V-DC / m INCL. 1 CONNECTOR/30CM - INCL. 5 WIRES	
		416 99 00
7 LIGHT MODULES	LIGHT MODULES SEE PAGE 412-413	

PRO

A

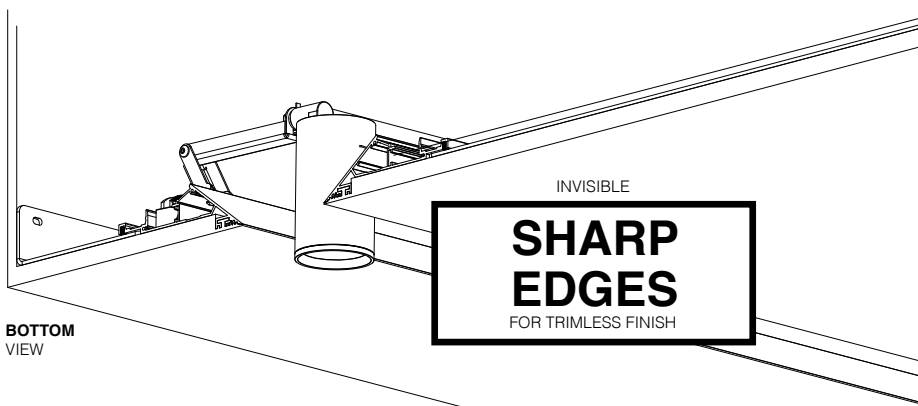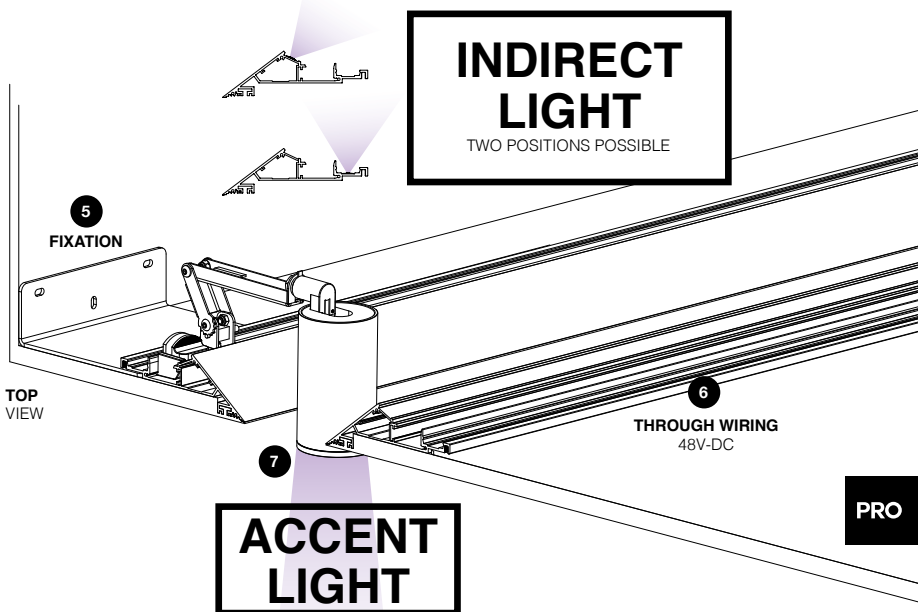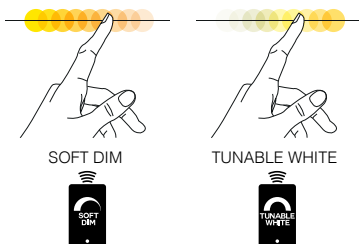

The Split-it made-to-measure lighting system integrates seamlessly with architecture and demonstrates that form and functionality of lighting have definitely gone down a new path, opening new ways to integrate "lighting paths" with architecture.



The Split-it Pro is a single profile which can be used on its own, or in combination of two. When used as a single profile the Split-it concept can be used parallel with the wall. In a double set-up the Split-It Pro enables you to create a linear setting with Dimensions of your choice. The Pro version enables integration of edgeless lighting paths, either vertically or horizontally. Its 37° degree sharp edge gives walls and ceilings a "paper-thin" appearance, with no visible wires and no shadow gaps, upgrading the level of architectural detail. It offers not only new ways to give shape to any lighting need, it also gives the possibility to integrate other engineering and technological necessities.

With its linear geometry the Split-it Pro enables you to define spaces and create volumes, to show direction, frame the room and add sharp edged detail to your architecture. It can be combined with a multitude of spots available for specific and demanding lighting needs, ranging up to 2000lm and offering multiple beam optics. All tools are available to meet the specific needs of your project.

www.deltalight.com/split-it

2

ADVISED MINIMUM DIMENSIONS			
MODULES	X	Y	WIRING / POWER SUPPLY Z
SPY	90	250	THROUGH WIRING 70
LED LINE	90	200	24V PS 60
			THROUGH WIRING + 24V PS 110

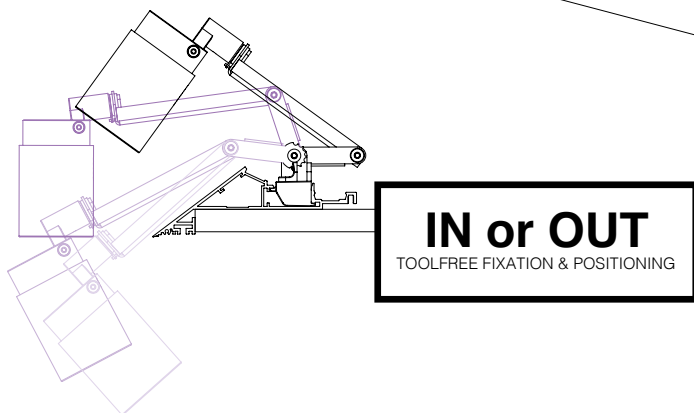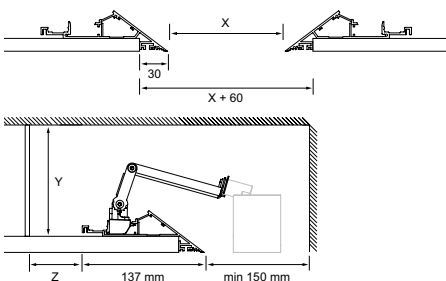



SPLIT-IT PRO

LED FLEX CONNECTION

LED FLEX IN
SUPPLY CABLE SET

LED FLEX IN
CONNECTION CLIPSET

LED FLEX IN
CONNECTION SET

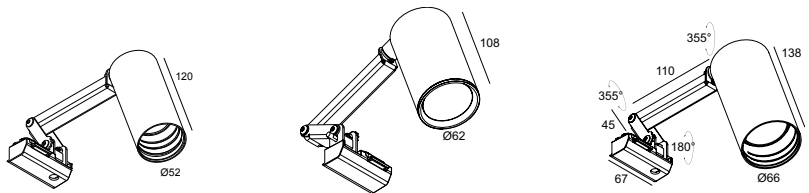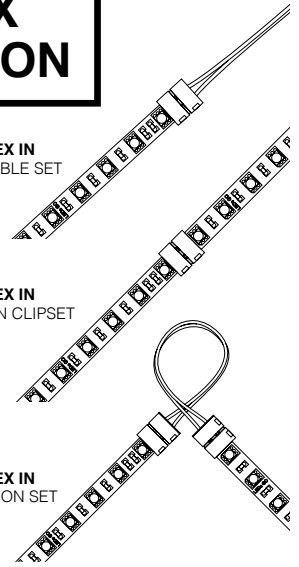

SPLIT-IT SPY



52

FOCUS LP

66

		20°		45°		8-43°		18°		30°		45°	
3000K CRI>90	LED 12.4W / 1467lm / 700mA	IP20	18431 9320 ◊	18431 9330 ◊	18428 9300 ◊		18434 9310 ◊		18434 9320 ◊		18434 9330 ◊		
	LED 8.6W / 1018lm / 500mA LED 12.5W / 1378lm / 700mA												
	LED 17.2W / 2101lm / 500mA												
	LED 12.4W / 1403lm / 700mA												
2700K CRI>90	LED 8.6W / 974lm / 500mA LED 12.5W / 1318lm / 700mA	IP20	18431 9220 ◊	18431 9230 ◊	18428 9200 ◊		18434 9210 ◊		18434 9220 ◊		18434 9230 ◊		
	LED 17.2W / 2009lm / 500mA												

◊ B ● / W ○

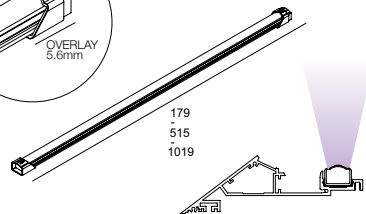

SPLIT-IT

PRO LED LINE


3000K / CRI>80	LED 2W / 270lm / 24V-DC	2W	L 179mm	300 94 017 83
	LED 6W / 806lm / 24V-DC	6W	L 515mm	300 94 050 83
IP20	LED 12W / 1612lm / 24V-DC	12W	L 1019mm	300 94 100 83

EXCL. POWER SUPPLY 24V-DC
INCL. LEDSTRIP - INCL. PC
MAX. 6M / POWERLINE



PRO

A



10 |
5m - 24V-DC
NOT MOUNTED



Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62,5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
5W/m 551lm/m	10W/m 1045lm/m	15W/m 1853lm/m	20W/m 2470lm/m	18W/m 1460 lm/m	9,5W/m (1) 1116lm/m	11W/m	19,2W/m (2)

LED FLEX

		WHITE	WHITE MP	WHITE FP	WHITE HP	SOFT DIM	TW	RGB	RGB / TW
4000K CRI > 90	IN	21030 0060	21030 0140	21030 0220	21030 0300				
	OUT (IP65)	21030 0100	21030 0180	21030 0260					
3000K CRI > 90	IN	21030 0040	21030 0120	21030 0200	21030 0280				
	OUT (IP65)	21030 0080	21030 0160	21030 0240					
2700K CRI > 90	IN	21030 0030	21030 0110	21030 0190	21030 0270				
	OUT (IP65)	21030 0070	21030 0150	21030 0230					
1800K ▶ 3000K CRI > 90	IN					21030 0020			
	OUT (IP65)								
2700K ▶ 6000K CRI > 90	IN						21030 0390		
	OUT (IP65)								
RGB CRI > 90	IN							21030 0400	
	OUT (IP65)							21030 0410	
RGB WW / TW (2) CRI > 90	IN								21030 0420
	OUT (IP65)								

LED POWER SUPPLY 24V-DC / (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	21012 0160	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	300 89 24 150	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
	60W / IP20	21012 0171	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	21012 0181	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
0-10V DIM (DIM1)	120W / IP20	21012 0191	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	21012 0101	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0111	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0121	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP20	21012 0205	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	21012 0225	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
DALI (DIM5)	60W / IP67	21012 0135	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0145	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0155	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*

CONTROL MORE INFO TECHNICAL CHAPTER

	RGB / RGB TW DRIVER							300 90 331	300 90 331	21032 0010
	TOUCH CONTROLLER							300 90 332	300 93 330	21032 0120
NON DIM							300 90 003 ED1			
1-10V	24V-DC DIM UNIT						300 90 003 ED5			
DALI							300 90 010			

CONNECTION

SUPPLY CABLE SET (10 PCS) **	21031 0470	21031 0450	21031 0430	21031 0450						
CONNECTION SET (10 PCS) **	21031 0510	21031 0490	21031 0500	21031 0490						
CONNECTION CLIP SET (10 PCS) **	21031 0480	21031 0460	21031 0440	21031 0460						

(1) 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS

(2) RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K

* TO BE USED AS NON DIM

** ONLY FOR LEDFLEX IN

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SPLIT-IT

	SPY 52	SPY FOCUS LP	SPY 66	LEDLINE
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
NON DIM - 48V-DC - 240W	300 89 48 240	114 x 63 x 125	R *	R *
1-10V DIM - 24V-DC - 60W	21012 0171	170 x 57 x 18	R *	R *
DALI - 24V-DC - 60W	21012 0205	170 x 57 x 18	R *	R *

LED POWER CONVERTER MORE INFO TECHNICAL CHAPTER

DALI 48V-DC --> 500mA	300 48 500 PRO ED5	R	R	R
DALI 48V-DC --> 700mA	300 48 700 PRO ED5	R	R	

LED POWER CONVERTER MORE INFO TECHNICAL CHAPTER

SUPPLY CABLE LEDLINE	300 94 93 04	1 / POWERLINE		R
----------------------	---------------------	---------------	--	---

FINISH

SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W	R		
SPY 66 TUBE	24611 0100 B / FBR / FG / GC / W		R	

HONEYCOMB / LENS / GLASS

HONEYCOMB SINGLE USE	19810 0010 B	A		
HONEYCOMB DOUBLE USE	19810 0060 B	A		
LINEAR SPREAD LENS	19810 0020	A		
SPREAD LENS	19810 0030	A		
SOFTENING LENS	19810 0040	A		
GLASS SBL	19810 0050	A		
HONEYCOMB SINGLE USE	24611 0150 B		A	

* REMOTE INSTALLATION

TAGLINE

The Tagline made-to-measure profile provides an ultra-minimalistic light line that integrates seamlessly with the architectural lines of your project. Limited to only 9mm the Tagline seems almost invisible, a slender line of light that cuts through space.

Available in different application versions - from trimless recessed to surface mounted, as a pendant solution or as perimeter lighting - Tagline is offered as a creative tool for architects and designers to accentuate architectural detail or characterise environments. Any space becomes distinctively elegant when the Tagline is used in a simple linear way, or can become very magical and unique when used in a composition.

www.deltalight.com/tagline

PRO

TAGLINE
TRW

TAGLINE
TR

TAGLINE
LEDLINE

TAGLINE
ST

TAGLINE
ON


TAGLINE
ON SUSPENDED

GENERAL
LIGHT

TAGLINE
SPY 27

ACCEN
LIGHT


A slender line of light that cuts through space.

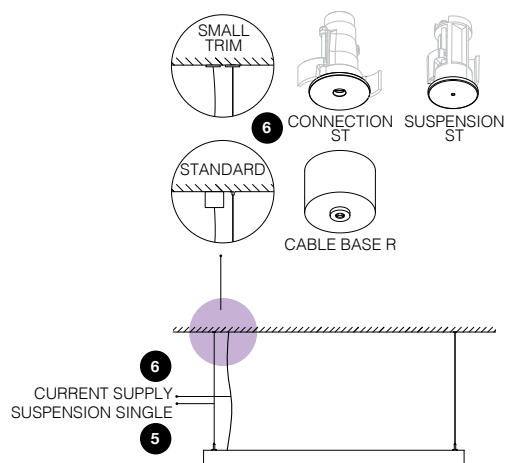

PRO


PROFILES

T




Go around the corner

TAGLINE



How to build your TAGLINE
Example for Tagline ST

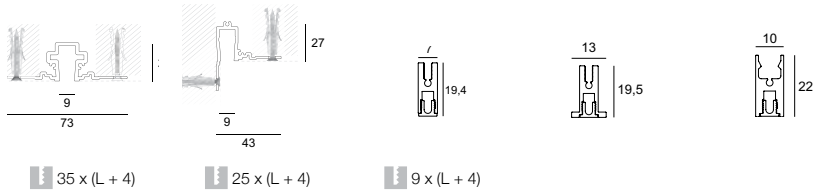


35 x (L + 4)

25 x (L + 4)

9 x (L + 4)

TAGLINE

	TR	TRW	LEDLINE	ST	ON
1 PROFILE					
PROFILE / m	425 01 00 00 ◊	425 02 00 00 ◊	425 03 00 00 ◊	425 05 00 00 ◊	425 04 00 00 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ B ●	◊ B ●	◊ B ●	◊ B ● / W ○	◊ B ● / GC ● / W ○
POLYCARBONATE / m					
SANDBLASTED (SBL)	-	-	INCLUDED	INCLUDED	INCLUDED
2 DIMENSIONS					
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.					
3 JUNCTION / CORNER					
CONNECTOR 90°	425 01 06 06	-	-	425 05 06 06	425 04 06 06
CONNECTOR 90° INTERIOR	-	425 02 06 06	-	-	-
CONNECTOR 90° EXTERIOR	-	425 02 06 16	-	-	-
4 ENDCAP					
ENDCAP (2 PCS.)	425 01 03 01 B	425 02 03 01 B	425 03 03 01 B	425 05 03 01 B / W	425 04 03 01 B / W
5 FIXATION					
RECESSED					
INSIDE CLIP (2 PCS.)	-	-	-	425 05 14 01	-
SURFACE MOUNTED					
FIXATION CLIP (2 PCS.)	-	-	-	-	425 04 06 11
SUSPENDED					
SUSPENSION SINGLE 1,6M (1 PC.)	-	-	-	-	425 09 01
SUSPENSION ST	-	-	-	-	15225 0340 B / W
6 CONNECTION					
SUSPENDED					
CURRENT SUPPLY 1,6M	2X0,5MM²	-	-	-	425 97 51
CONNECTION ST		-	-	-	15225 0360 B / W
CABLE BASE R		-	-	-	203 99 55 B / W
CABLE BASE S		-	-	-	203 99 56 B / W
COVERSET R	100MM	-	-	-	204 00 100 B / W
7 LED FLEX					
					LIGHT MODULES
					SEE PAGE 417



TAGLINE TR


SPY 27

3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	30°	18717 9320 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA			18717 9220 ◇
				◇ B ● / FBR ● / FG ● / GC ● / W ○



PRO

PROFILES



Dividable per
29,4mm
238 smd LED/m

8,4W/m
820lm/m

LEDFLEX

SMALL

4000K CRI > 90	IN	300 91 51 94
3000K CRI > 90	IN	300 91 51 93
2700K CRI > 90	IN	300 91 51 92

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)

NON DIM	24W / IP20	21012 0160	max. 2,8m
	150W / IP67	300 89 24 150	max. 17,8m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 7,1m
	90W / IP20	21012 0181	max. 10,7m
	120W / IP20	21012 0191	max. 14,2m
	60W / IP67	21012 0101	max. 7,1m
	90W / IP67	21012 0111	max. 10,7m
	120W / IP67	21012 0121	max. 14,2m
DALI (DIM5)	60W / IP20	21012 0205	max. 7,1m
	100W / IP20	21012 0225	max. 11,9m
	60W / IP67	21012 0135	max. 7,1m
	90W / IP67	21012 0145	max. 10,7m
	120W / IP67	21012 0155	max. 14,2m

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

SPY 27

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	i min. 55	R*
1-10V DIM 15	300 90 124	i min. 55	R*
DALI 14	300 90 125	i min. 55	R*
FINISH	VISOR 27	216 12 01	A



* REMOTE INSTALLATION

CONNECT A / I

CONNECT I

Connect I balances on the edge between wall and ceiling or wall and wall, as you like. Mounted directly into the corner, this minimalistic profile generates a soft line of light on one or both sides, transforming bare corners into decorative perimeters.



CONNECT A

The delicate Connect A is designed to add subtle accents onto vertical surfaces. Emitted from a profile of only 11 by 51mm, Connect A can be applied as a linear down-up light.

www.deltalight.com/connect

PRO

A



CONNECT

	A	I
--	---	---

1 PROFILE

PROFILE / m	28101 0000 ◊	28102 0000 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ B ● / W ○	◊ B ● / W ○
POLYCARBONATE / m		
SANDBLASTED (SBL)	INCLUDED	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

--	--	--

4 ENDCAP

ENDCAP (2 PCS.)	28101 0310 B / W	28102 0310 B / W
-----------------	------------------	------------------

5 FIXATION



SURFACE MOUNTED		
INSIDE CLIP (2 PCS.)	391 06 11	-

6 CONNECTION

--	--	--

7 LED FLEX

	LIGHT MODULES
	SEE PAGE 419

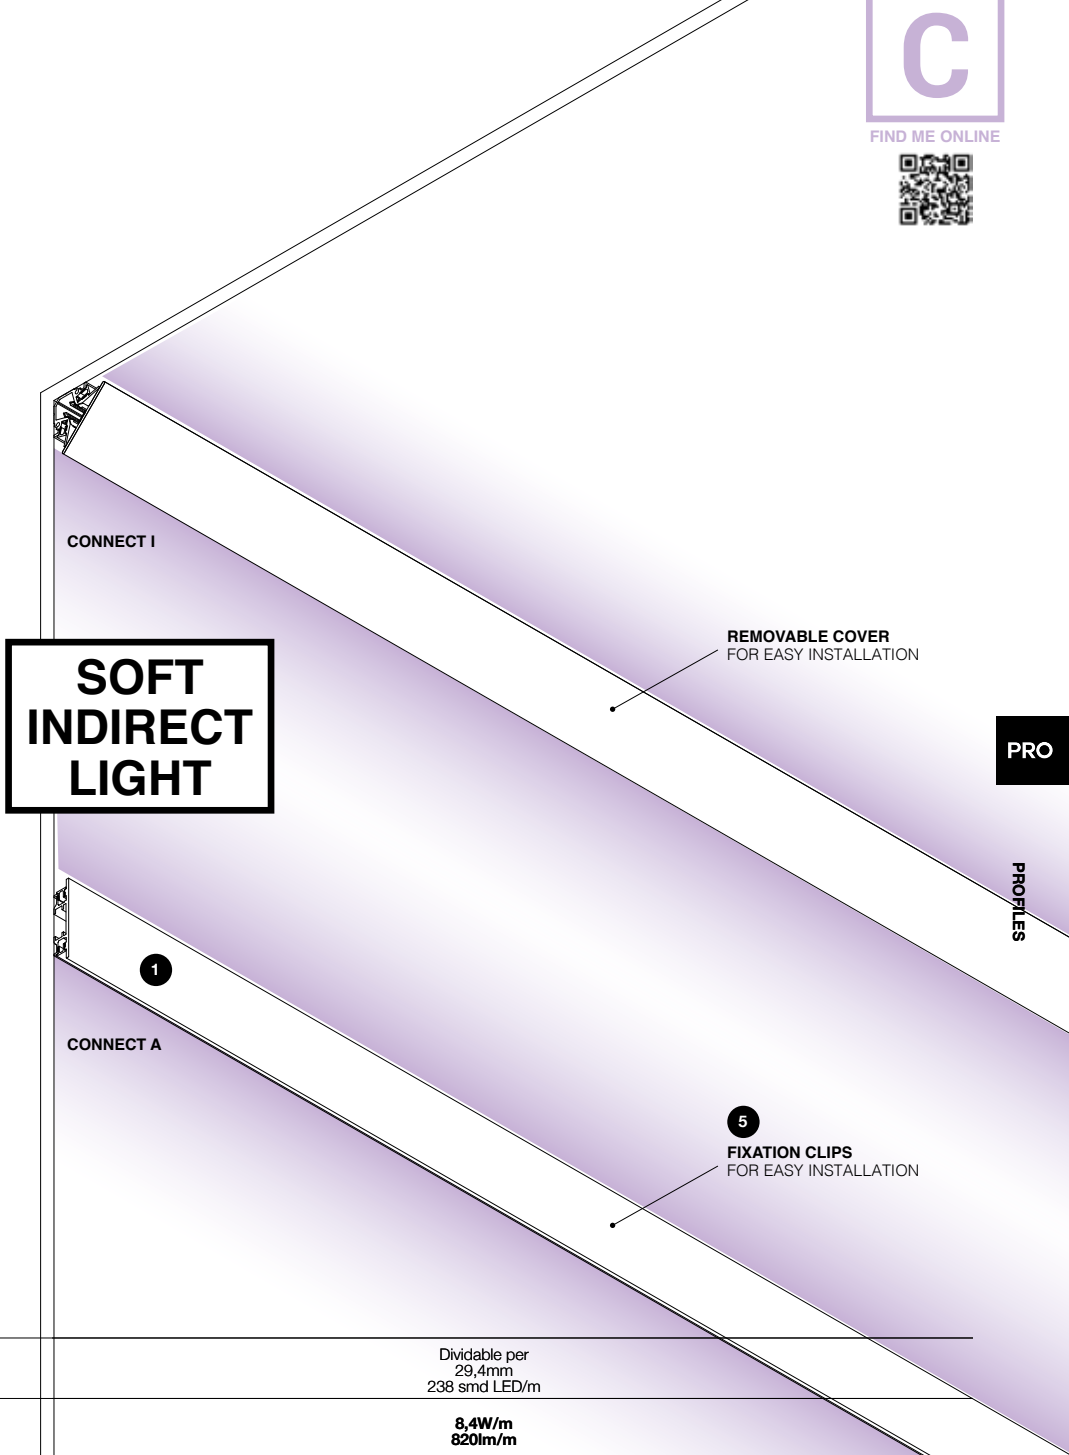

Dividabile per
29,4mm
238 smd LED/m

8,4W/m
820lm/m

LEDFLEX		SMALL
4000K CRI > 90	IN	300 91 51 94
3000K CRI > 90	IN	300 91 51 93
2700K CRI > 90	IN	300 91 51 92

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER


NON DIM	24W / IP20	21012 0160	max. 2,8m
	150W / IP67	300 89 24 150	max. 17,8m
	60W / IP20	21012 0171	max. 7,1m
0-10V DIM (DIM1)	90W / IP20	21012 0181	max. 10,7m
	120W / IP20	21012 0191	max. 14,2m
	60W / IP67	21012 0101	max. 7,1m
	90W / IP67	21012 0111	max. 10,7m
	120W / IP67	21012 0121	max. 14,2m
DALI (DIM5)	60W / IP20	21012 0205	max. 7,1m
	100W / IP20	21012 0225	max. 11,9m
	60W / IP67	21012 0135	max. 7,1m
	90W / IP67	21012 0145	max. 10,7m
	120W / IP67	21012 0155	max. 14,2m

DOT.COM



Our Dot.Com family is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires, as modules to fit in the magnetic profiles and as a bespoke trimless or surface mounted profile solution, perfect to adapt the light to your specific desires.

www.detailight.com/dotcom

How to build your DOT.COM
Example for Dot.Com ON

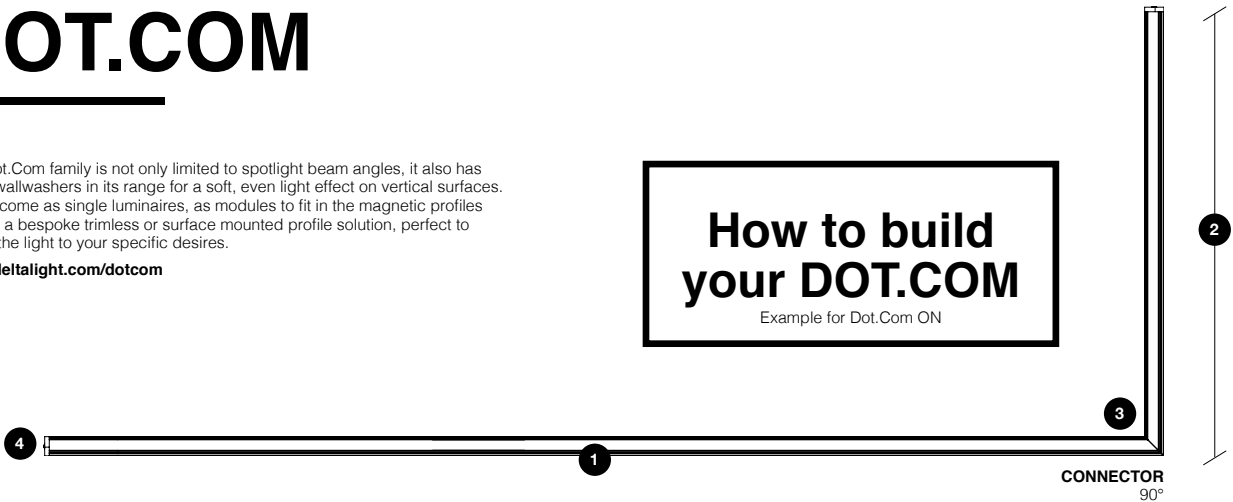



PRO



35 x (L + 5)


1 PROFILE	TR	LEDLINE	ON
DOT.COM WALLWASH			
PROFILE / m	424 01 00 00 ◇	424 02 00 00 ◇	16312 0000 ◇
MAX. LENGTH PER PROFILE SECTION 6m	◇ B ●	◇ B ●	◇ B ● / W ○
POLYCARBONATE / m			
SANDBLASTED (SBL)	-	INCLUDED	INCLUDED
2 DIMENSIONS	The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.		
3 JUNCTION / CORNER			
CONNECTOR 180°	424 01 06 01	-	16312 0620
CONNECTOR 90°	424 01 06 06	-	16312 0630
4 ENDCAP			
ENDCAP (2 PCS.)	424 01 03 01 B	424 02 03 01 B	16312 0310 B / W
5 FIXATION			
SURFACE MOUNTED			
INSIDE CLIP (2 PCS.)	-	-	391 06 11
SUSPENDED			
SUSPENSION SINGLE 1,6M (1 PC.)	-	-	391 09 01
SUSPENSION ST	-	-	15225 0340 B / W
6 CONNECTION			
POWERBOX			
NON DIM 24V-DC / 60W	-	-	300 24 060 B / W
1-10V DIM 24V-DC / 60W	-	-	300 24 060 ED1 B / W
DALI 24V-DC / 150W	-	-	300 24 150 ED5 B / W
SUSPENDED			
CURRENT SUPPLY 1,6M	2X0,75MM ²	-	391 97 51
CONNECTION ST		-	15225 0360 B / W
CABLE BASE R		-	203 99 55 ANO / B / W
CABLE BASE S		-	203 99 56 ANO / B / W
COVERSET R	100MM	-	204 00 100 B / W
7 LED FLEX	LIGHT MODULES SEE PAGE 437		

A

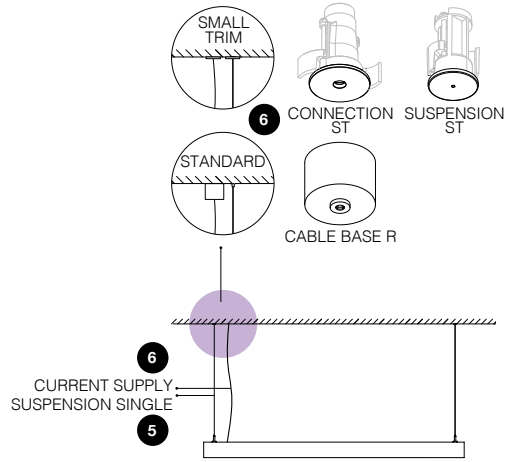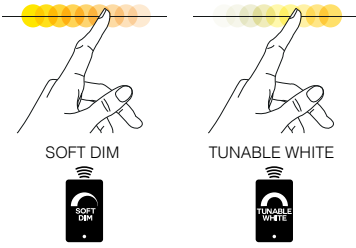

PRO

PROFILES

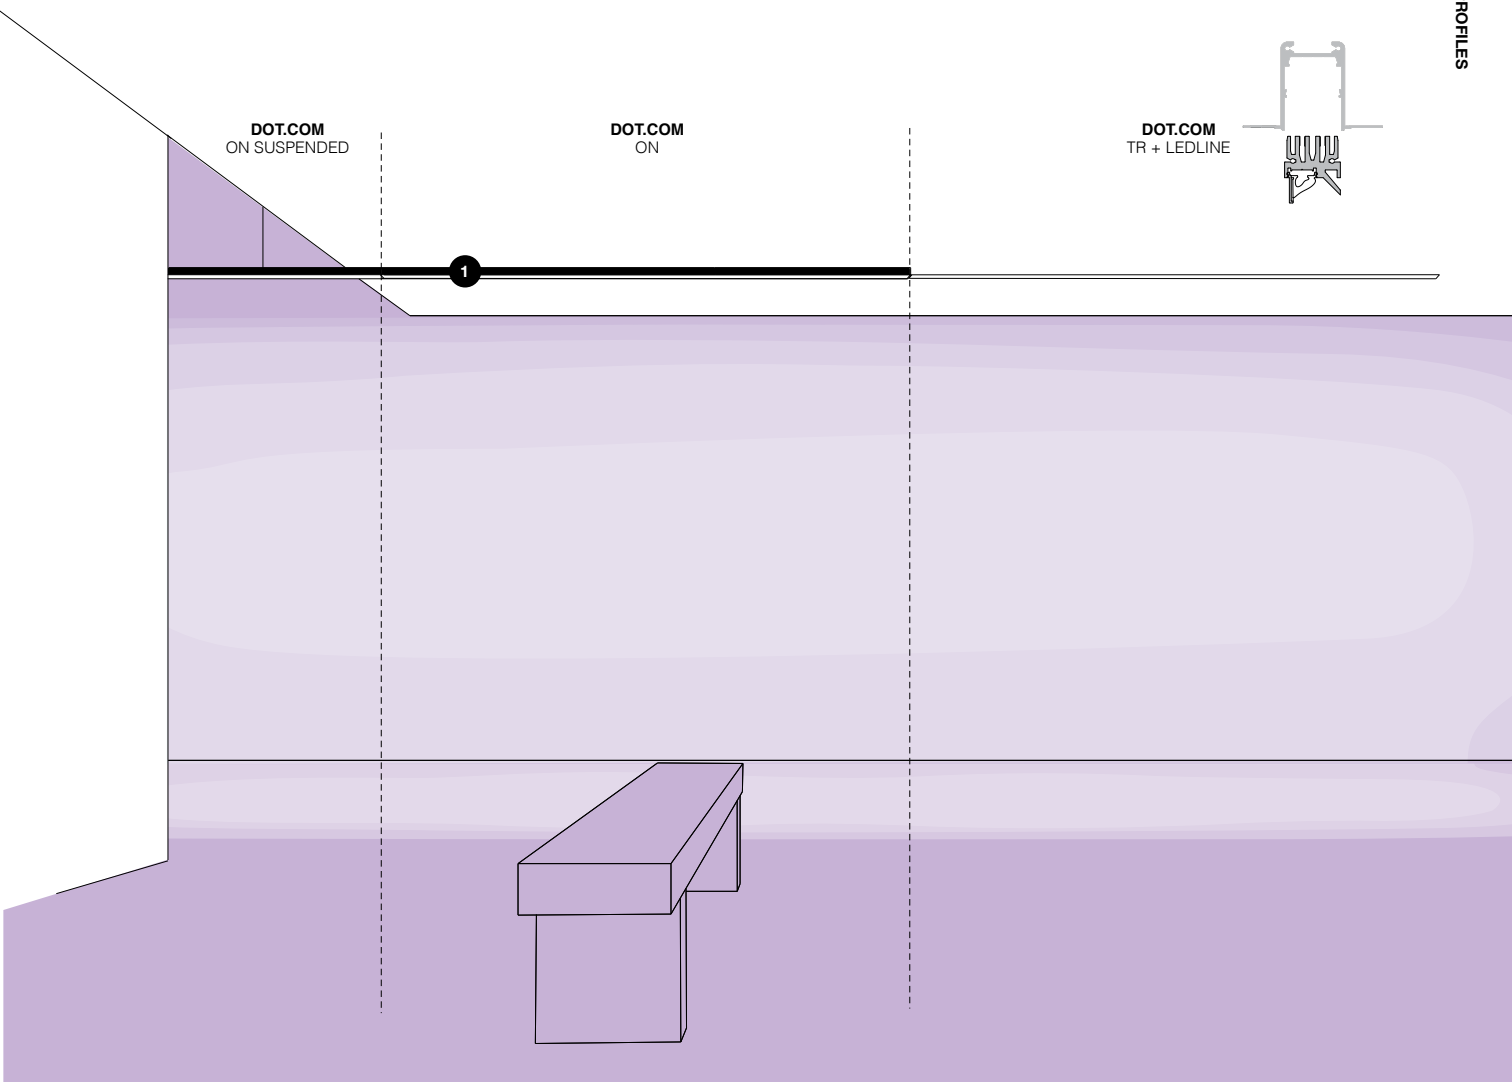


PRO

Multifunctional in use, the Femtoline profiles can be used in both interior and exterior lighting concepts. The ultra-minimalistic design and extensive options in flexible RGB, tunable white, warm and cold white LED allow you to create endless lines of light, either recessed, surface or pendant mounted. The polycarbonate that closes the profile guarantees a pleasurable light effect and unifies single led dots to one continuous line.

The range of Femtoline profiles is very extensive, with each family member having its own specific design and application area. Small or wider profile design, down or down-up lighting, wall, ceiling or floor mounted, flush or tilted plexi, ... the Femtoline family offers a solution to any lighting problem.

www.detalight.com/femtoline

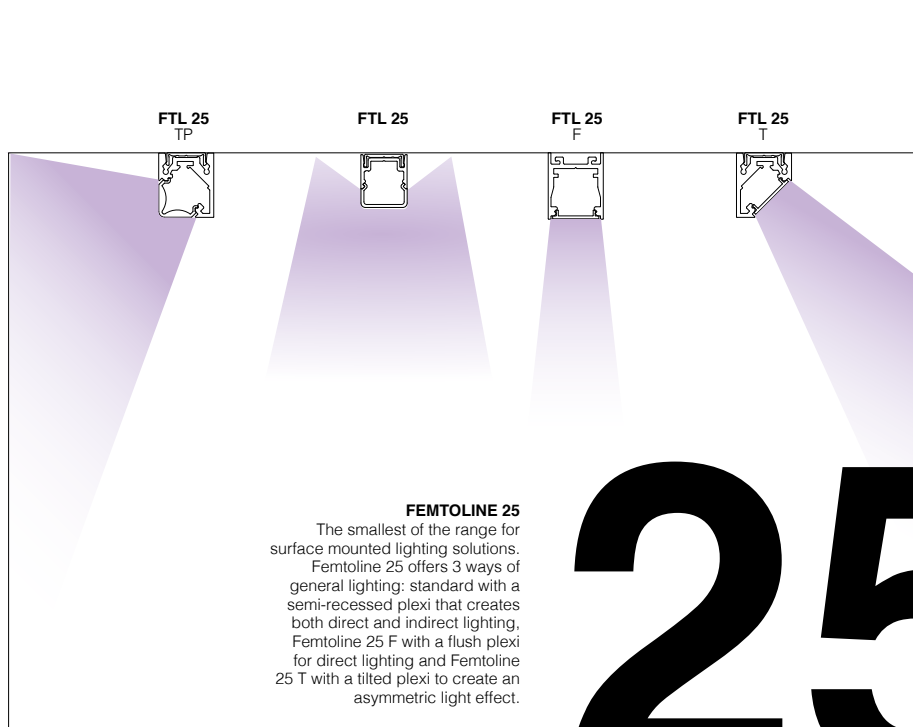


FEMTOLINE 25


The smallest of the range for surface mounted lighting solutions. Femtoline 25 offers 3 ways of general lighting: standard with a semi-recessed plexi that creates both direct and indirect lighting, Femtoline 25 F with a flush plexi for direct lighting and Femtoline 25 T with a tilted plexi to create an asymmetric light effect.

25
45

FEMTOLINE 45

The recessed solution. Femtoline 45 complements the Femtoline 25 range in applications that allow recessed installation.



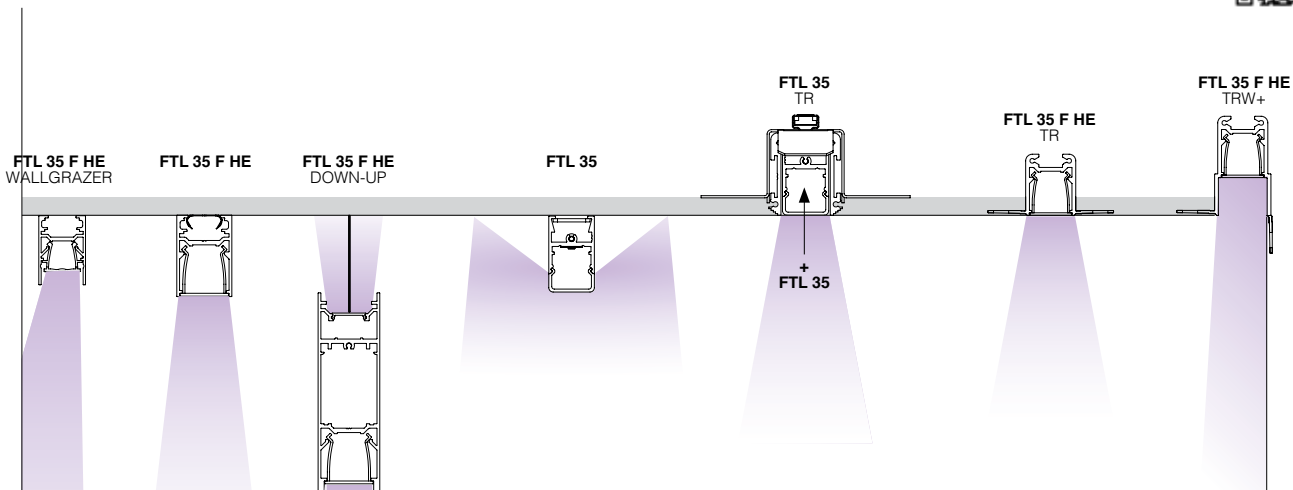

35 W

FEMTOLINE 35

The most versatile of the range. Similar as with Fentoline 25, one can opt for direct lighting with Fentoline 35 or a more indirect general lighting with Fentoline 35 F. Furthermore, Fentoline 35 can also be used within the trimless Fentoline 35 TR profile, creating a black cove filled with strokes of light. Fentoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Fentoline 35 F HE.

As diverse applications ask for diverse optics, Fentoline 35 F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from the side. Dedicated to enhance structured vertical surfaces, Fentoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.

FEMTOLINE W

The wall mounted solution. Fentoline W is a very slim and multifunctional LED profile, which can be used in both interior and exterior lighting concepts. This wall mounted profile can be used for either up- or downlight, creating a cosy wall grazing effect.



FEMTOLINE

PRO

PROFILES

FEMTOLINE 25

The smallest of the range for surface mounted lighting solutions. Femtoline 25 offers 3 ways of general lighting: standard with a semi-recessed plexi that creates both direct and indirect lighting, Femtoline 25 F with a flush plexi for direct lighting and Femtoline 25 T with a tilted plexi to create an asymmetric light effect.


PRO

A




FEMTOLINE

	25	25 F	25 T	25 TP
1 PROFILE				
PROFILE / m	375 00 00 ◇	382 00 00 ◇	381 00 00 ◇	381 01 00 00 ◇
MAX. LENGTH PER PROFILE SECTION 6m	◇ ANO ● / B ● / W ○	◇ ANO ● / B ● / W ○	◇ ANO ● / B ● / W ○	◇ ANO ● / B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)	INCLUDED	INCLUDED	INCLUDED	INCLUDED
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CONNECTOR 90°	375 06 06	382 06 06	-	-
4 ENDCAP				
ENDCAP (2 PCS.)	375 03 01 A / B / W	382 03 01 A / B / W	381 03 01 A / B / W	381 01 03 01 A / B / W
5 FIXATION				
SURFACE MOUNTED				
FIXATION CLIP	INCLUDED	398 03 06 11 (10 PCS.)	INCLUDED	INCLUDED
6 CONNECTION				
-				
7 LED FLEX	LIGHT MODULES			
	SEE PAGE 437			

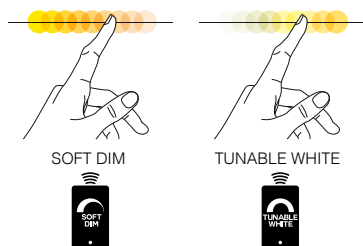

How to build your FEMTOLINE

Example for Femtoline 25 F



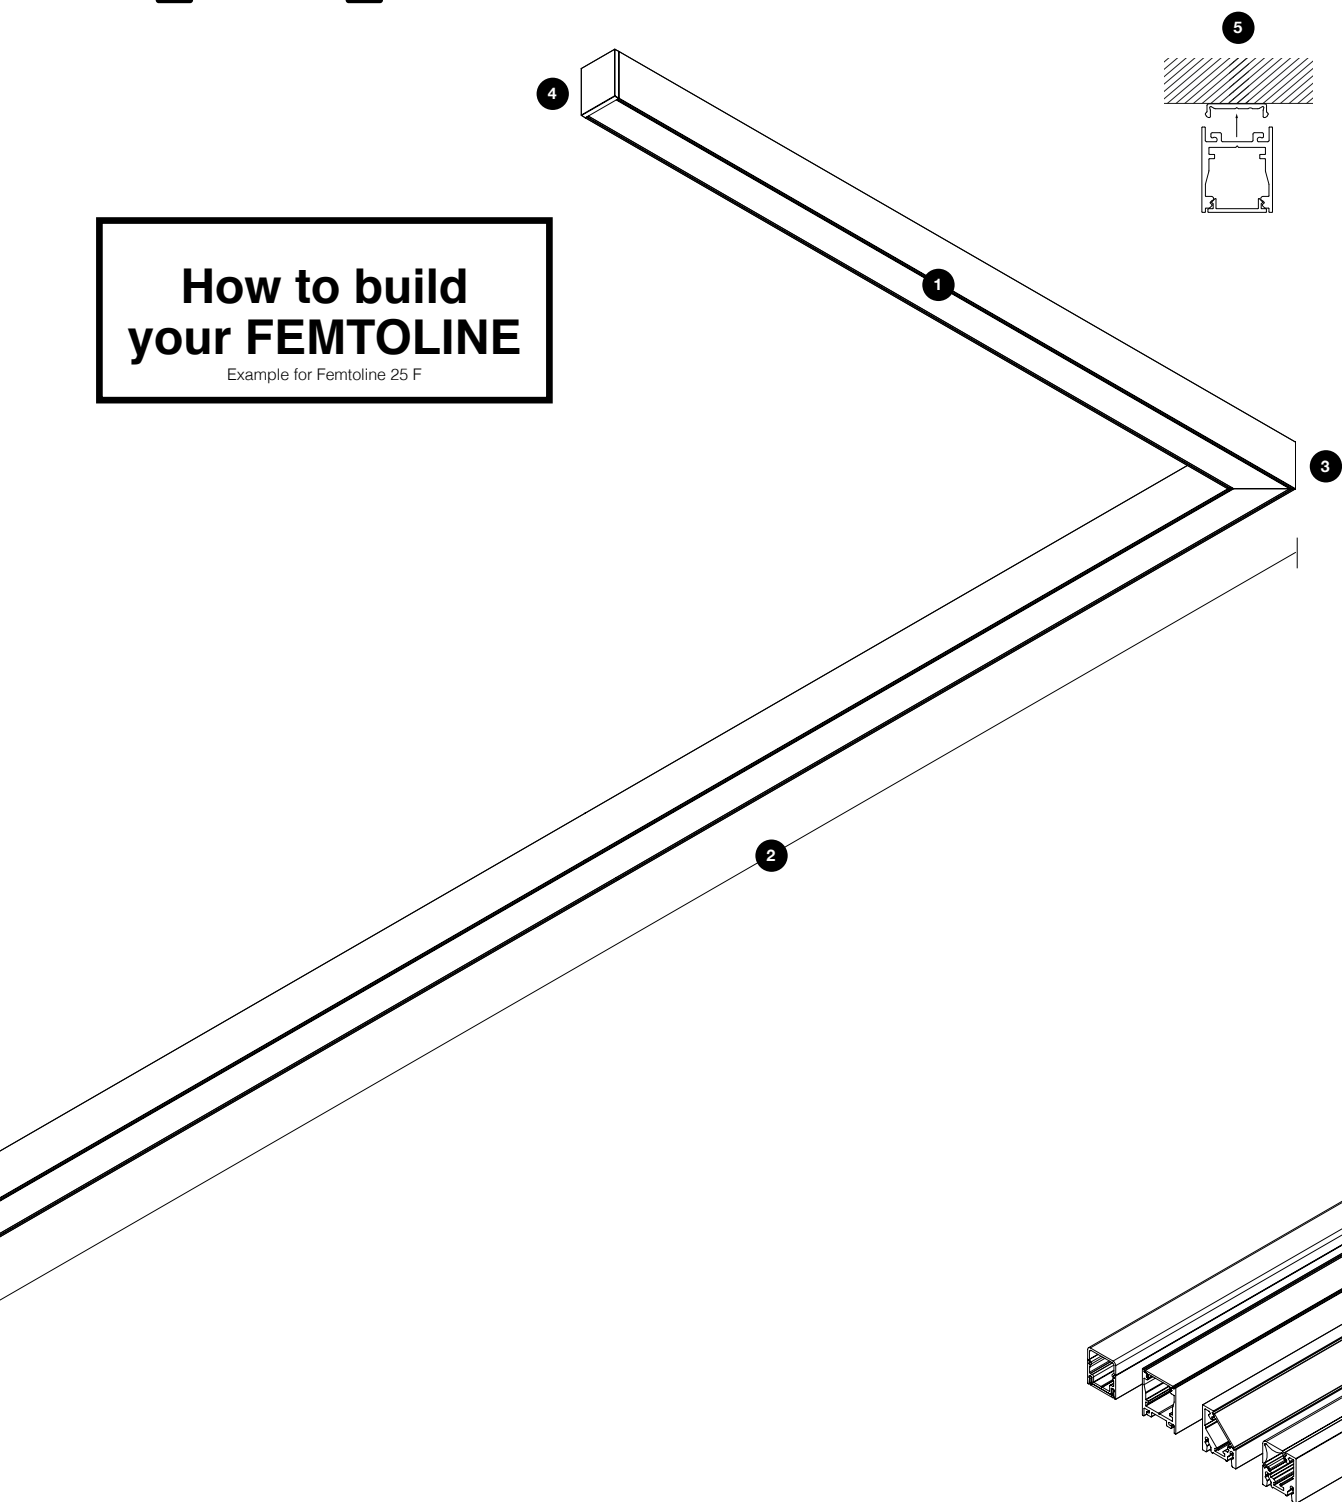


PRO

PROFILES

FEMTOLINE 35

PRO




IN COMBINATION WITH FTL 35

37 x (L + 6) x 60
min.9 / max.18


FEMTOLINE		35 TRIMLESS	35	35 WALLGRAZER
1 PROFILE				
PROFILE / m		393 00 00 ◊	391 00 00 ◊	16427 0000 ◊
MAX. LENGTH PER PROFILE SECTION 6m		◊ B ●	◊ ANO ● / B ● / W ○	◊ ANO ● / B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)			INCLUSIVE	
WALLGRAZER HE				INCLUSIVE
2 DIMENSIONS	The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.			
3 JUNCTION / CORNER				
CONNECTOR 180° (2PCS.)		393 06 01	391 06 11	391 06 11
CONNECTOR 180° for SUSPENSION (1PCS.)		-	16410 0010	16410 0010
CONNECTOR 90°		393 06 06	391 06 06	391 06 06
4 ENDCAP				
ENDCAP (2 PCS.)		393 03 01 B	391 03 01 ANO / B / W	16427 0310 A / B / W
5 FIXATION				
RECESSED				
INSIDE CLIP (1 PC.)		393 14 01	-	-
SURFACE MOUNTED				
FIXATION CLIP (2 PCS.)		-	391 06 11	391 06 11
TILT SET (2 PCS.)		-	-	16427 1480 A / B / W
SUSPENDED				
SUSPENSION 20 SINGLE 1,6M (1 PC.)		-	391 09 01	391 09 01
SUSPENSION ST		-	15225 0340 B / W	15225 0340 B / W
6 CONNECTION				
POWERBOX				
NON DIM 24V-DC / 60W		-	300 24 060 B / W	300 24 060 B / W
1-10V DIM 24V-DC / 60W		-	300 24 060 ED1 B / W	300 24 060 ED1 B / W
DALI 24V-DC / 150W		-	300 24 150 ED5 B / W	300 24 150 ED5 B / W
SUSPENDED				
CURRENT SUPPLY 1,6M	2X0,75MM²	-	391 97 51	391 97 51
CONNECTION ST		-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R		-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S		-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM	-	204 00 100 B / W	204 00 100 B / W
7 LED FLEX		LIGHT MODULES SEE PAGE 437		

A

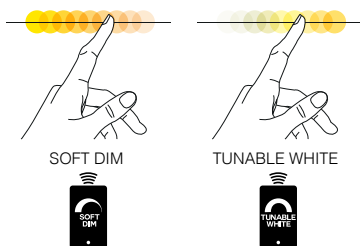


How to build your FEMTOLINE

Example for Femtoline 35

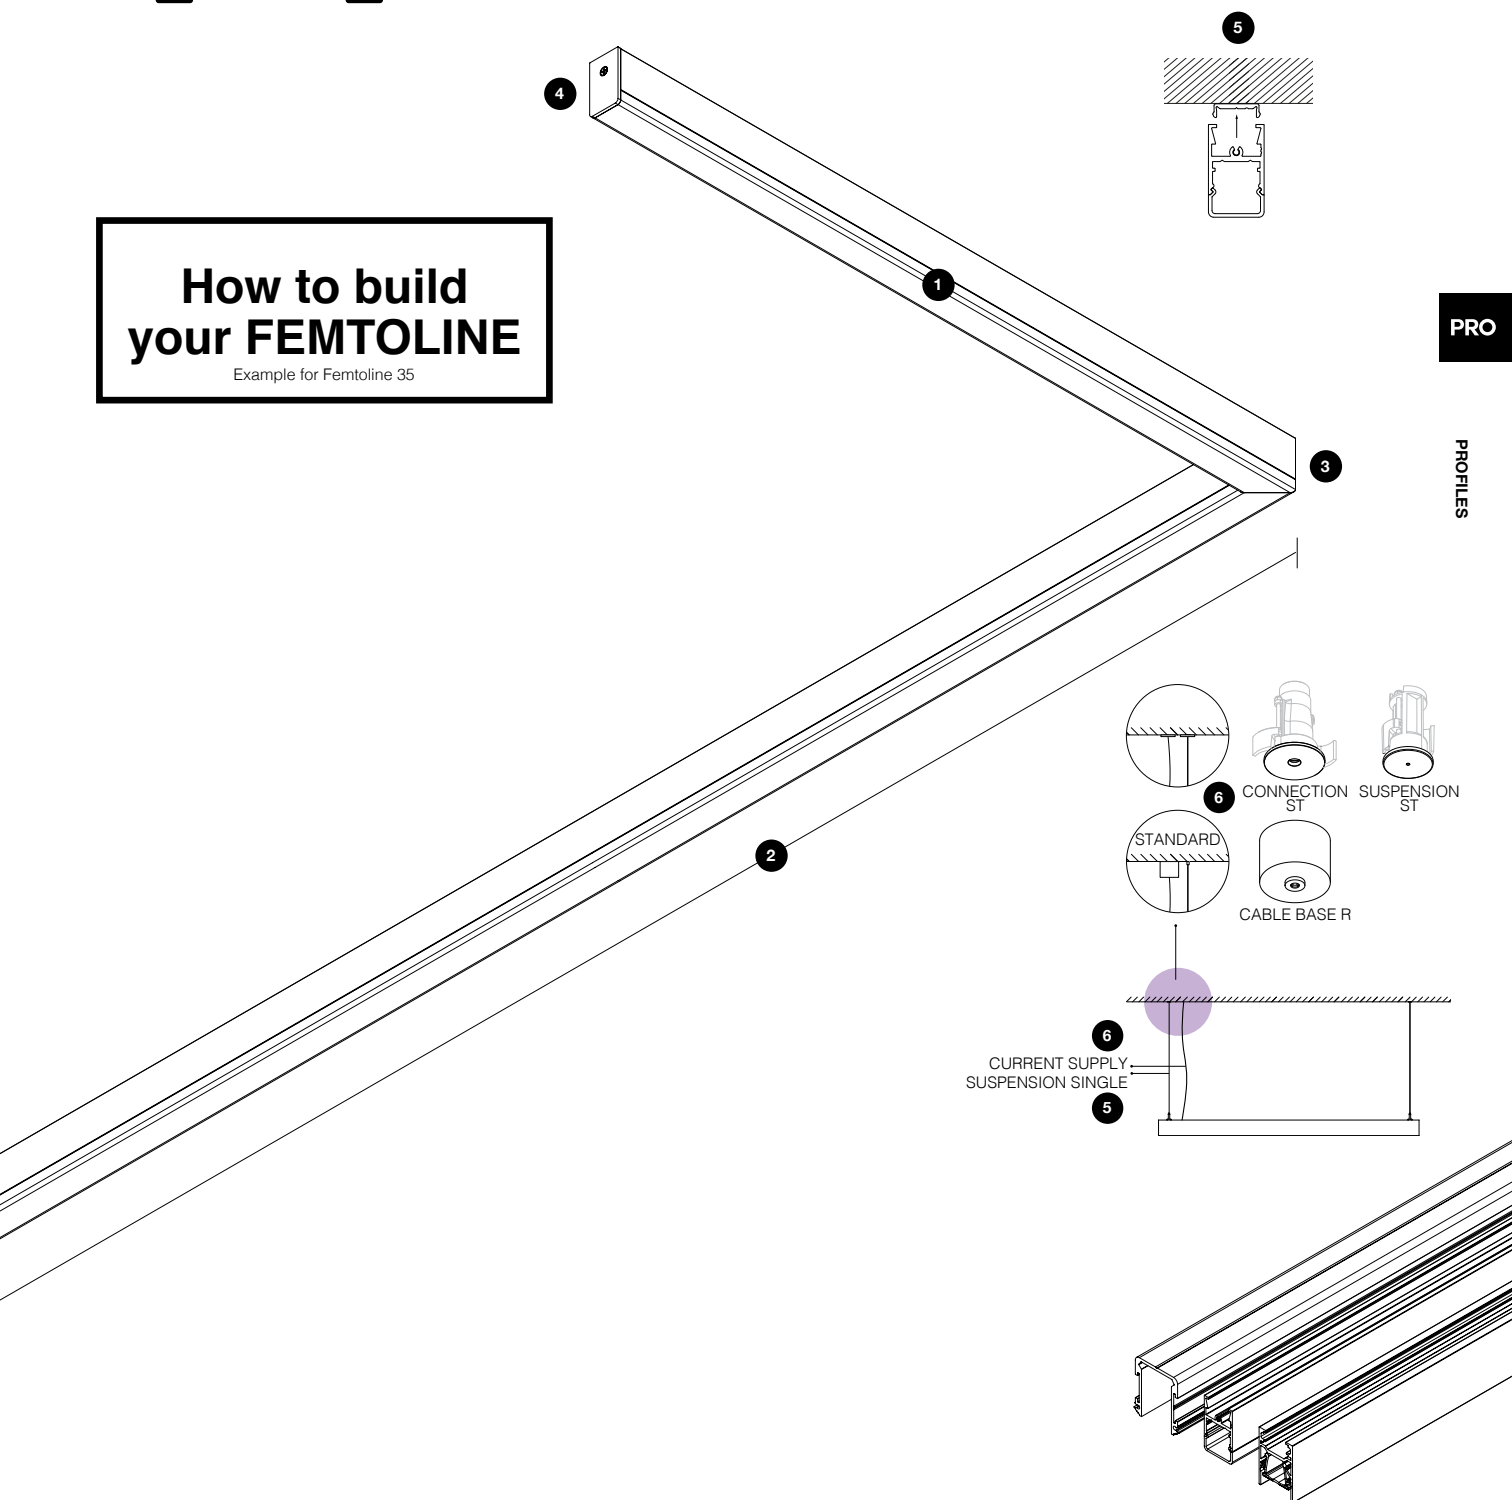

PRO

PROFILES

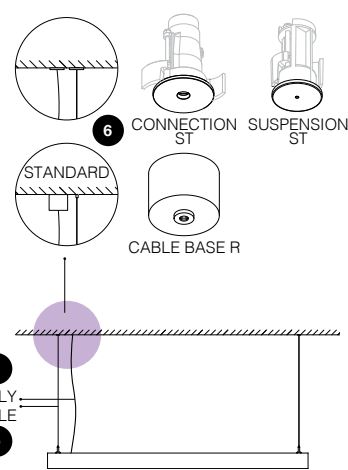


FEMTOLINE 35 F HE TR

The most versatile of the range. Similar as with Femtoline 25, one can opt for direct lighting with Femtoline 35 or a more indirect general lighting with Femtoline 35 F. Furthermore, Femtoline 35 can also be used within the trimless Femtoline 35 TR profile, creating a black cove filled with strokes of light. Femtoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Femtoline 35 F HE.

As diverse applications ask for diverse optics, Femtoline 35 F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside. Dedicated to enhance structured vertical surfaces, Femtoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.

PRO

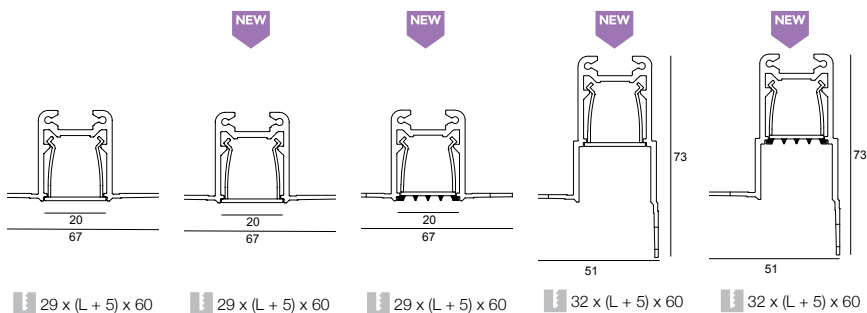

FEMTOLINE

35 F HE TR SBL **35 F HE TR PR** **35 F HE TR LGC** **35 F HE TRW+ SBL** **35 F HE TRW+ LGC**

1 PROFILE

PROFILE / m	16428 0000 ◊	16433 0000 ◊	16434 0000 ◊	16429 0000 ◊	16430 0000 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ ANO ●	◊ ANO ●	◊ ANO ●	◊ ANO ●	◊ ANO ●
POLYCARBONATE / m					
SANDBLASTED (SBL)	INCLUDED			INCLUDED	
PRISMATIC (PR)		INCLUDED			
LONGITUDINAL GLARE CONTROL (LGC)			INCLUDED		INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CONNECTOR 180°	16428 0620	16428 0620	16428 0620	16428 0620	16428 0620
CONNECTOR 90°	16428 0630	16428 0630	16428 0630	16428 0630	16428 0630

4 ENDCAP

ENDCAP (2 PCS.)	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO
-----------------	----------------	----------------	----------------	----------------	----------------

5 FIXATION

-					
---	--	--	--	--	--


6 CONNECTION

-					
---	--	--	--	--	--

7 LED FLEX

LIGHT MODULES

SEE PAGE 437

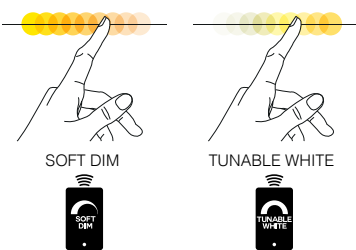


How to build your FEMTOLINE



Example for FemtoLine 35 F HE Trimless

PRO


PROFILES

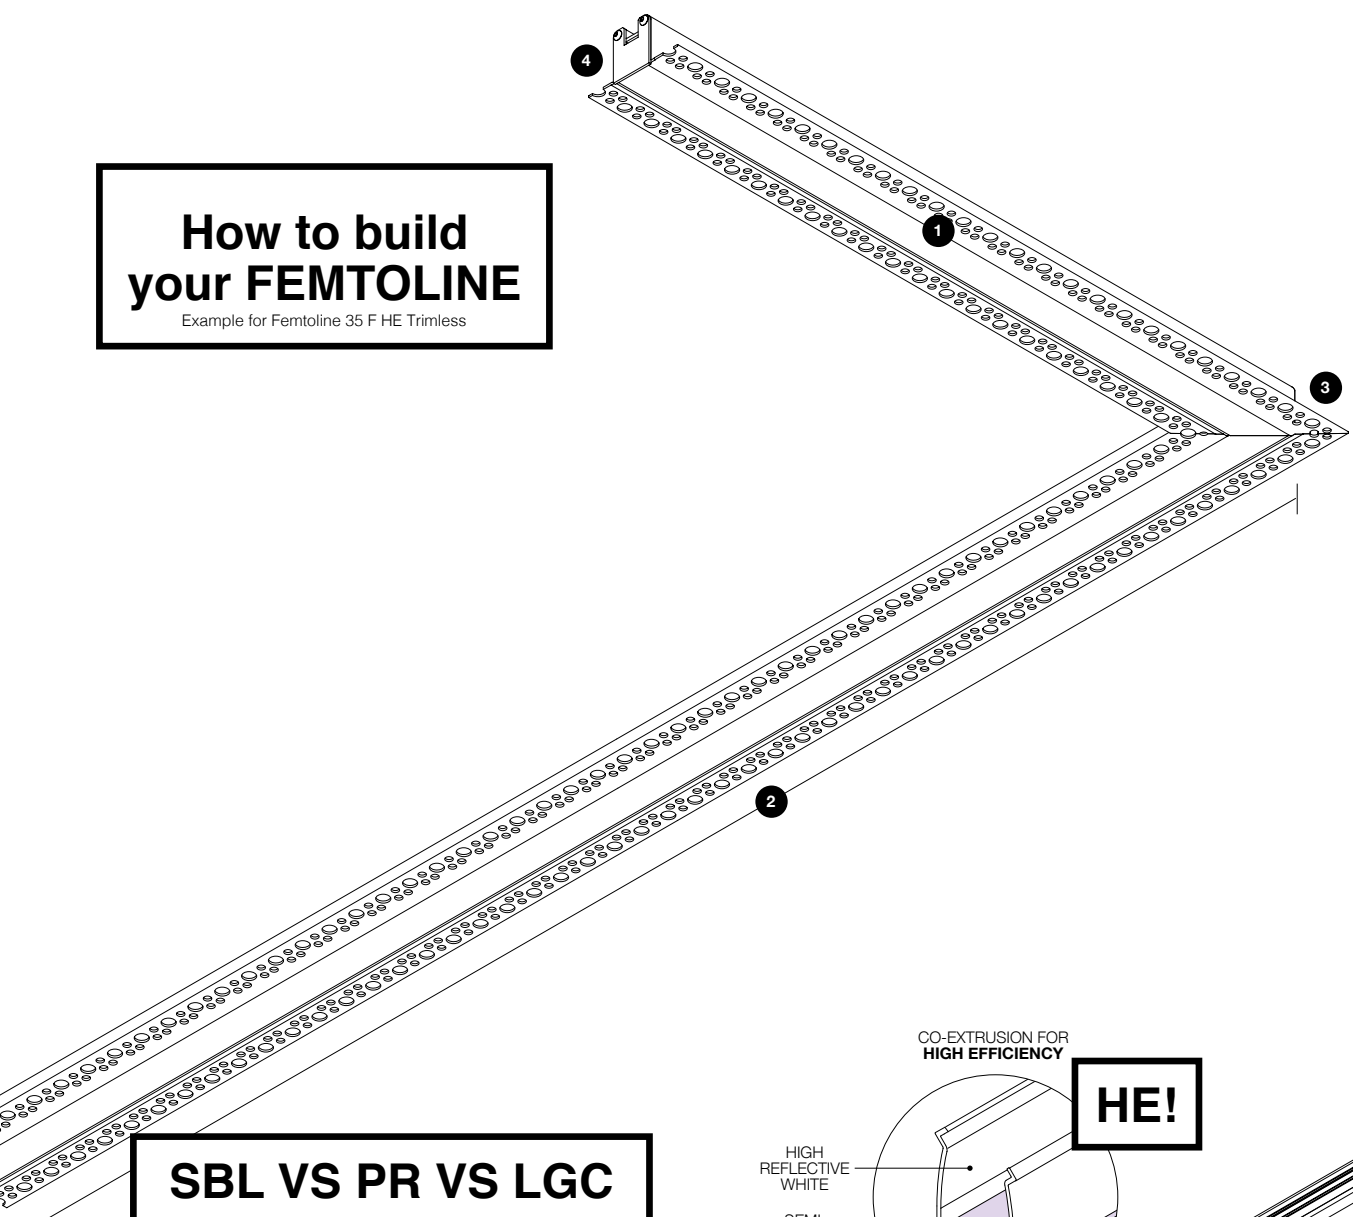

SBL VS PR VS LGC

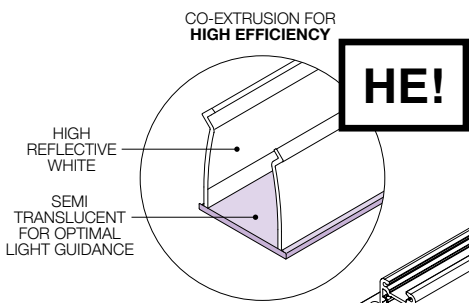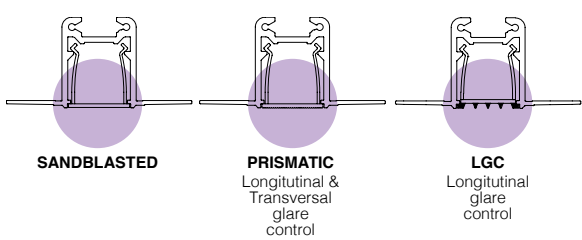

HE!

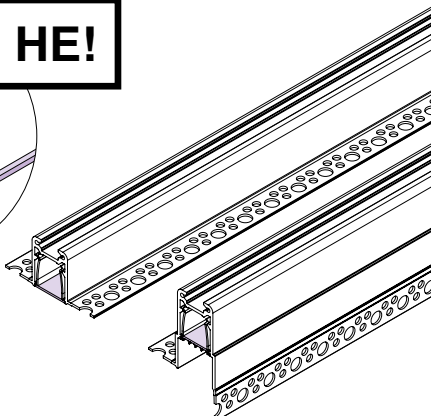


FEMTOLINE 35 F HE

The most versatile of the range. Similar as with Femtoline 25, one can opt for direct lighting with Femtoline 35 or a more indirect general lighting with Femtoline 35 F. Furthermore, Femtoline 35 can also be used within the trimless Femtoline 35 TR profile, creating a black cove filled with strokes of light. Femtoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Femtoline 35 F HE.


As diverse applications ask for diverse optics, Femtoline 35 F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside. Dedicated to enhance structured vertical surfaces, Femtoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.

PRO

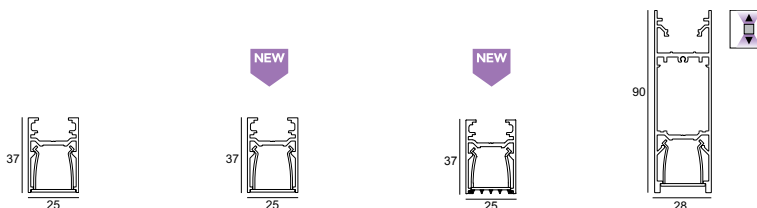

FEMTOLINE	35 F HE SBL	35 F HE PR	35 F HE LGC	35 F HE D/U
1 PROFILE				
PROFILE / m	392 01 00 00 ◊	16431 0000 ◊	16432 0000 ◊	392 02 00 00 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ ANO ● / B ● / W ○	◊ ANO ● / B ● / W ○	◊ ANO ● / B ● / W ○	◊ B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)	INCLUDED			INCLUDED
SANDBLASTED (SBL) UP				392 02 02 05 SBL
PRISMATIC (PR)		INCLUDED		
LONGITUDINAL GLARE CONTROL (LGC)			INCLUDED	
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CONNECTOR 180° (2PCS.)	391 06 11	391 06 11	391 06 11	-
CONNECTOR 180° for SUSPENSION (1PCS.)	16410 0010	16410 0010	16410 0010	392 02 06 01
CONNECTOR 90°	391 06 06	391 06 06	391 06 06	-
4 ENDCAP				
ENDCAP (2 PCS.)	392 01 03 01 A / B / W	392 01 03 01 A / B / W	392 01 03 01 A / B / W	392 02 03 01 B / W
5 FIXATION				
SURFACE MOUNTED				
FIXATION CLIP (2 PCS.)	391 06 11	391 06 11	391 06 11	-
SUSPENDED				
SUSPENSION SINGLE 1,6M (1 PC.)	391 09 01	391 09 01	391 09 01	392 02 09 01
SUSPENSION ST	15225 0340 B / W	15225 0340 B / W	15225 0340 B / W	15225 0340 B / W
6 CONNECTION				
POWERBOX				
NON DIM 24V-DC / 60W	300 24 060 B / W	300 24 060 B / W	300 24 060 B / W	300 24 060 B / W
1-10V DIM 24V-DC / 60W	300 24 060 ED1 B / W	300 24 060 ED1 B / W	300 24 060 ED1 B / W	300 24 060 ED1 B / W
DALI 24V-DC / 150W	300 24 150 ED5 B / W	300 24 150 ED5 B / W	300 24 150 ED5 B / W	300 24 150 ED5 B / W
SUSPENDED				
CURRENT SUPPLY 1,6M	2X0,75MM²	391 97 51	391 97 51	391 97 51
CONNECTION ST		15225 0360 B / W	15225 0360 B / W	15225 0360 B / W
CABLE BASE R		203 99 55 ANO / B / W	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S		203 99 56 ANO / B / W	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM		204 00 100 B / W	
7 LED FLEX	LIGHT MODULES			
	SEE PAGE 437			

A

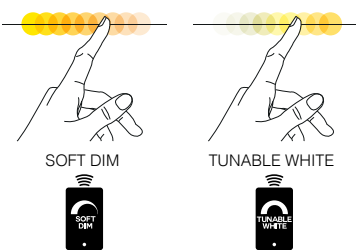


How to build your FEMTOLINE


Example for Femtoine 35 F HE

PRO



PROFILES

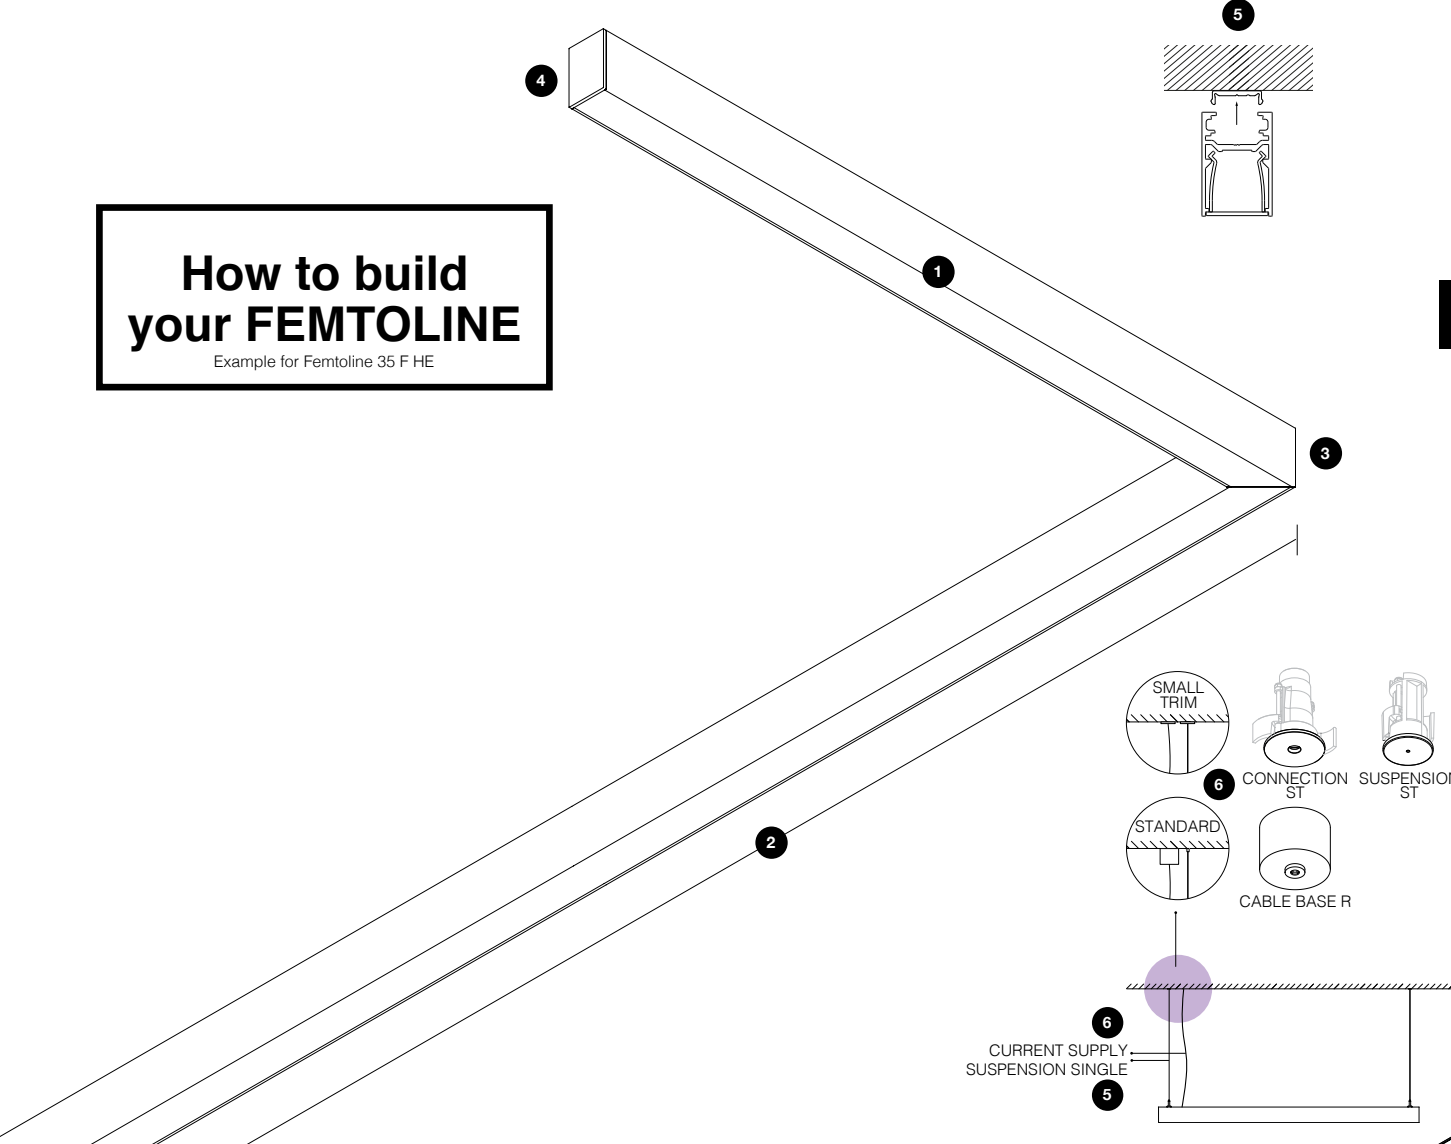

SBL VS PR VS LGC

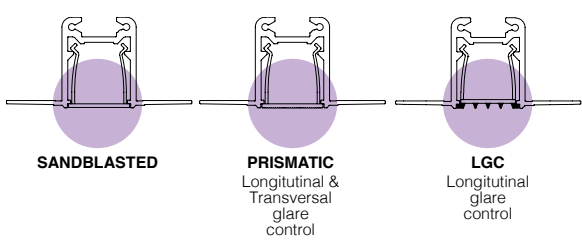

HE!

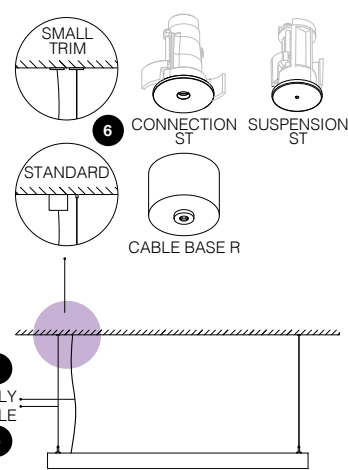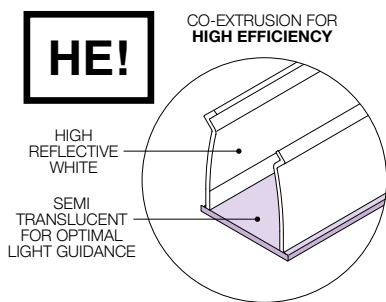

FEMTOLINE 45 + WALL

FEMTOLINE 45




The recessed solution. Fentoline 45 complements the Fentoline 25 range in applications that allow recessed installation.

FEMTOLINE W

The wall mounted solution. Fentoline W is a very slim and multifunctional LED profile, which can be used in both interior and exterior lighting concepts. This wall mounted profile can be used for either up- or downlight, creating a cosy wall grazing effect.

PRO

A



37 x (L + 12) x 40
max. 13


FEMTOLINE

45

W


W D/U

	45	W	W D/U
1 PROFILE		CLEAR	SBL
PROFILE / m	376 00 00 ◊	366 00 00 CL ◊	366 00 00 SBL ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ ANO ● / B ● / W ○	◊ ANO ●	◊ ANO ●
POLYCARBONATE / m			426 00 00 ◊
CLEAR (CL)		INCLUDED	◊ ANO ● / B ● / W ○
SANDBLASTED (SBL)	INCLUDED		INCLUDED
2 DIMENSIONS			
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.			
3 JUNCTION / CORNER			
CONNECTOR 180°	-	-	426 06 01
CONNECTOR 90°	376 06 06	-	-
4 ENDCAP			
ENDCAP (2 PCS.)	376 03 01 ANO / B / W	364 03 01 A	364 03 01 A
			426 03 01 A / B / W
5 FIXATION			
RECESSED			
INSIDE CLIP (2 PCS.)	376 14 01	-	-
SURFACE MOUNTED	-	398 03 06 11 (10 PCS.)	398 03 06 11 (10 PCS.)
			426 14 01 (2 PCS.)
6 CONNECTION			
-	-	-	-
7 LED FLEX		LIGHT MODULES	
		SEE PAGE 437	

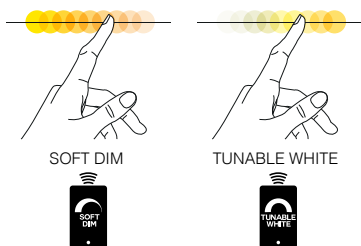

How to build your FEMTOLINE

Example for Femtoline 45

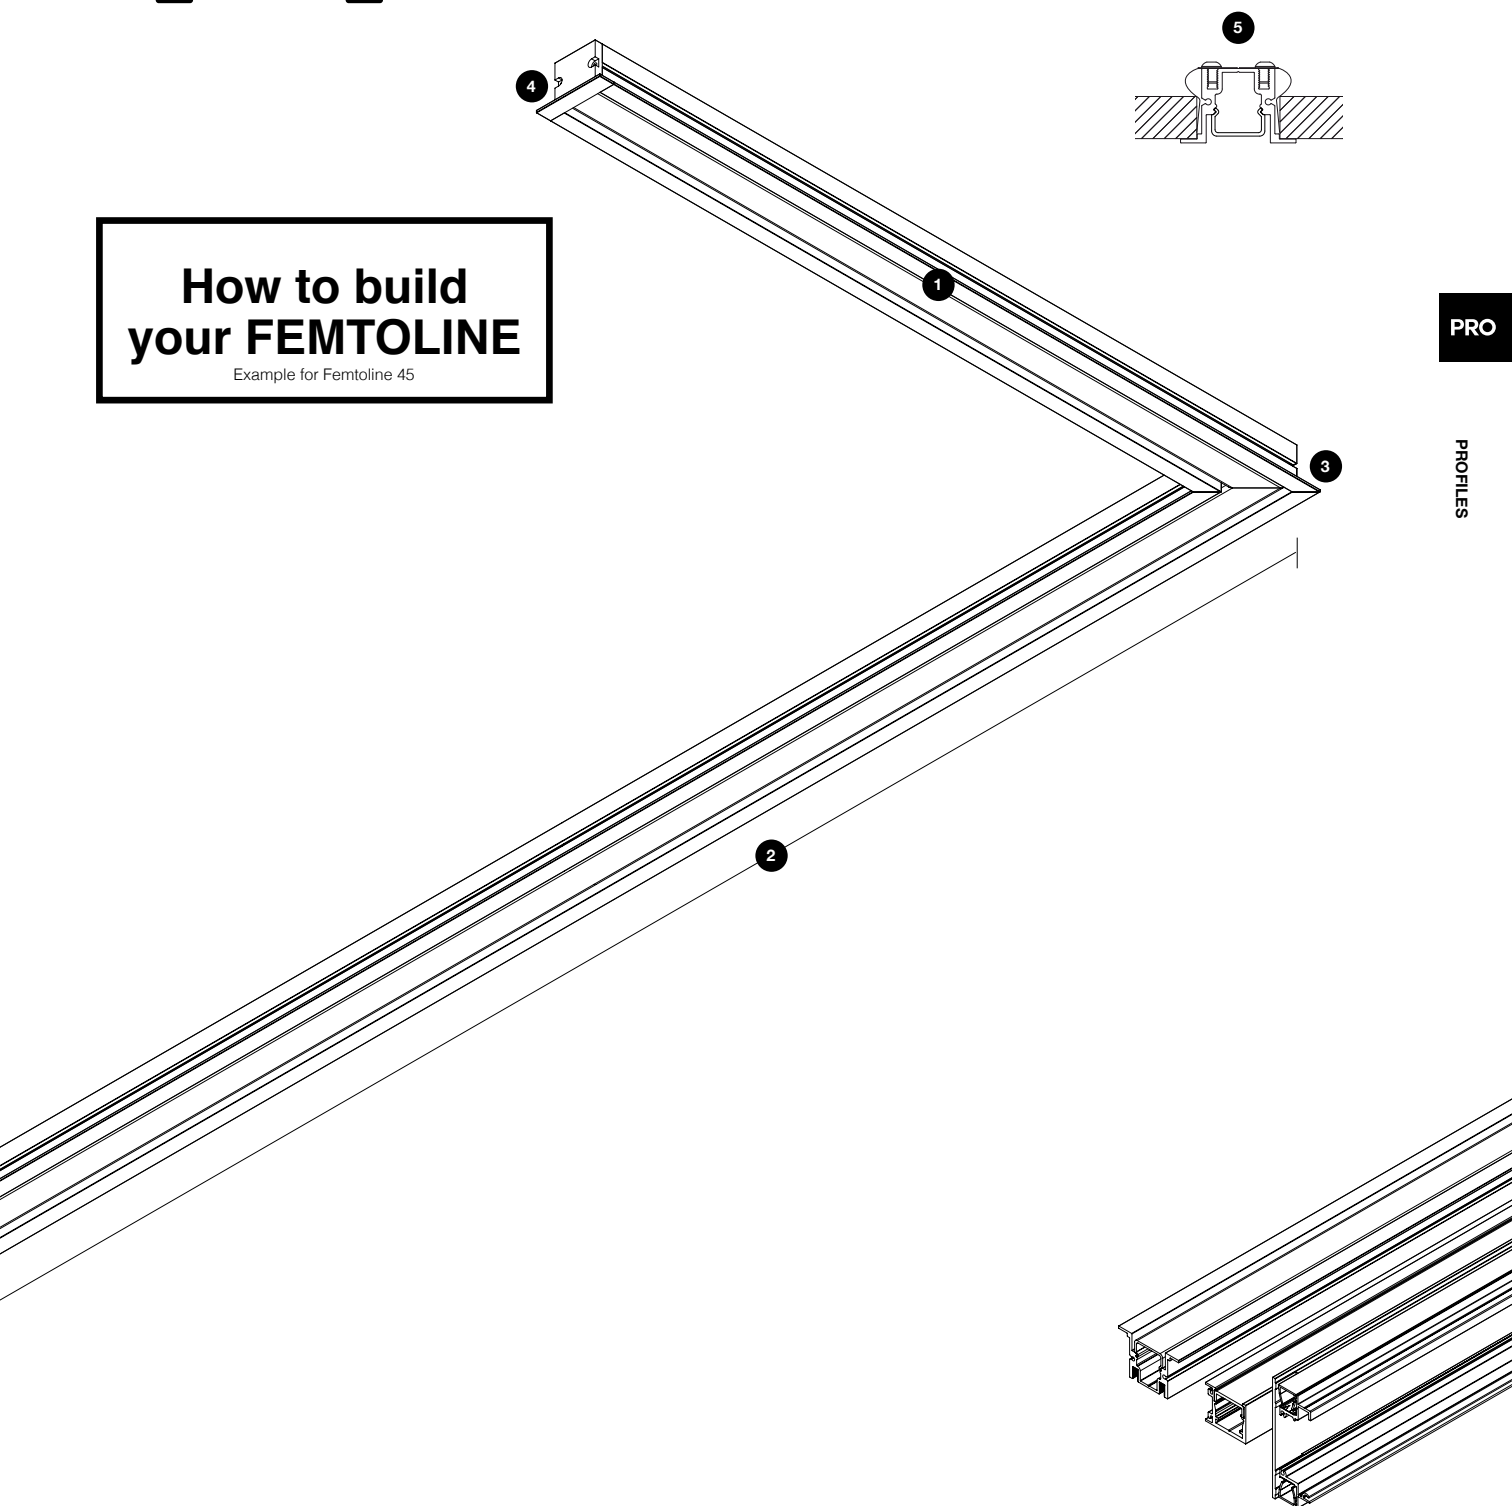

PRO

PROFILES

BORDERLINE


With the Borderline profile Delta Light introduces a generation of recessed led profiles, setting standards in the indirect lighting segment. It features a remarkable trimless finishing, although easy to install and finish.

The Borderline can be used for both wall and ceiling application, enabling you to frame the room with light. Available with RGB, tunable white, warm or cold white LEDs, offering a contemporary indirect lighting solution with exceptional eye for architectural detail.

www.deltalight.com/borderline

PRO

A



BORDERLINE

1 PROFILE	
PROFILE / m	371 00 00 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ W ○

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CONNECTOR 180°	371 06 01
CONNECTOR 90° INTERIOR	371 06 06
CONNECTOR 90° EXTERIOR	371 06 16

4 ENDCAP

-

5 FIXATION



-

6 CONNECTION

-


LIGHT MODULES

7 LED FLEX	SEE PAGE 437
-------------------	--------------

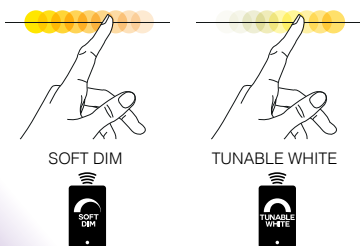

CEILING FIXATION

1



WALL FIXATION

3

CONNECTOR 90°
EXTERIOR

PRO




PROFILES

**INDIRECT
COVE LIGHTING**

OUTLINER

Outliner defines the perimeter. It comes as single luminaire or as a bespoke profile, perfectly optimizable to any desired length. Designed as an unobtrusive linear solution, Outliner shields off the light source and gently casts its light towards the surface. As such, Outliner is ideal to serve as perimeter lighting across paths, terraces or parking lots, areas that function as passageway.

www.detalight.com/outliner

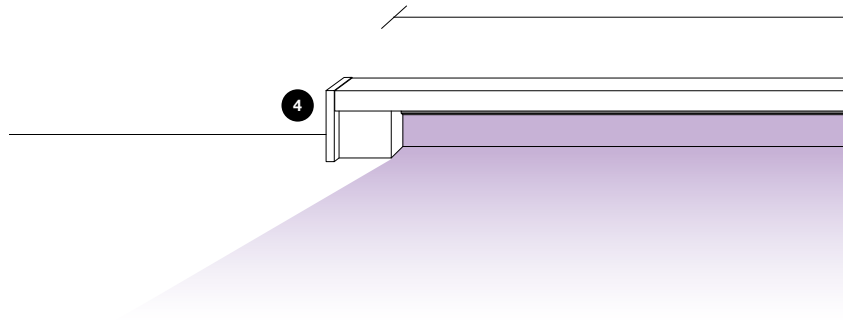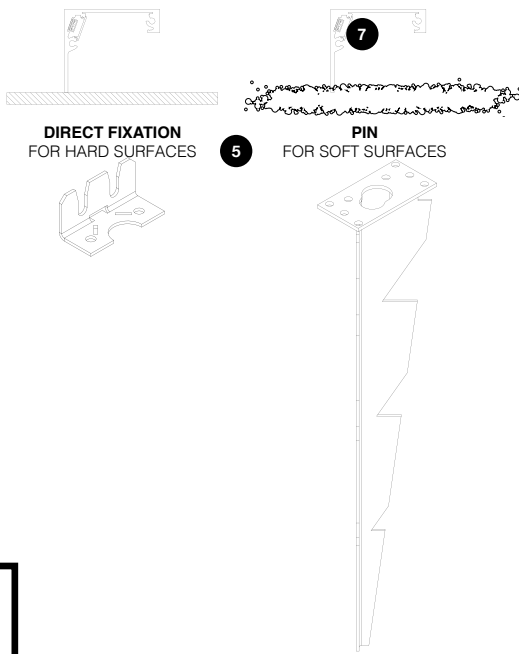

PRO

A


OUTLINER

1 PROFILE	PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m POLYCARBONATE / m SANDBLASTED (SBL)	27800 0000 ◊ ◊ N ● INCLUDED
2 DIMENSIONS	The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.	
3 JUNCTION / CORNER	-	
4 ENDCAP	ENDCAP (2 PCS.)	27800 0310 N
5 FIXATION	SURFACE MOUNTED	
	DIRECT FIXATION (2 PCS.)	27800 1410 N
	PIN (2 PCS.)	27800 1490 N
6 CONNECTION	-	
7 LED FLEX	SEE PAGE 437	

LED FLEX FOR DOT.COM FEMTO LINE BORDERLINE OUTLINER




LED FLEX OUT NOT SUITABLE FOR
FTL W D/U, FTL 35 WALLGRAZER AND
DOT.COM WALLWASH TR

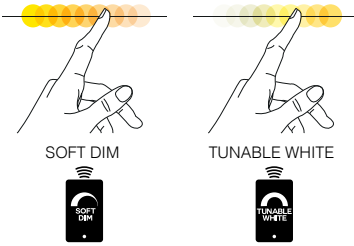

2
1

PRO
PROFILES



		SOFT DIM		TUNABLE WHITE					
		Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m				
		5W/m 551lm/m	10W/m 1045lm/m	15W/m 1853lm/m	20W/m 2470lm/m	18W/m 1460 lm/m	9,5W/m ⁽¹⁾ 1116lm/m	11W/m	19,2W/m ⁽²⁾
LED FLEX		WHITE	WHITE MP	WHITE FP	WHITE HP**	SOFT DIM	TW	RGB	RGB / TW
4000K CRI > 90	IN	21031 0060	21031 0140	21031 0220	21031 0300				
	OUT (IP65)	21031 0100	21031 0180	21031 0260					
3000K CRI > 90	IN	21031 0040	21031 0120	21031 0200	21031 0280				
	OUT (IP65)	21031 0080	21031 0160	21031 0240					
2700K CRI > 90	IN	21031 0030	21031 0110	21031 0190	21031 0270				
	OUT (IP65)	21031 0070	21031 0150	21031 0230					
1800K ▶ 3000K CRI > 90	IN					21031 0020			
	OUT (IP65)								
2700K ▶ 6000K CRI > 90	IN						21031 0390		
	OUT (IP65)								
RGB CRI > 90	IN							21031 0400	
	OUT (IP65)							21031 0410	
RGB WW / TW ⁽³⁾ CRI > 90	IN								21031 0420
	OUT (IP65)								

LED POWER SUPPLY 24V-DC / (MAX. 3M/POWERLINE FOR LED FLEX > 15W/M) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	21012 0160	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	300 89 24 150	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	21012 0181	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	21012 0191	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	21012 0101	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0111	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0121	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI (DIM5)	60W / IP20	21012 0205	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	21012 0225	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	21012 0135	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0145	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
120W / IP67	21012 0155	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*	

CONTROL MORE INFO TECHNICAL CHAPTER


	RGB / RGB TW DRIVER							300 90 331	300 90 331	21032 0010
	TOUCH CONTROLLER							300 90 332	300 93 330	21032 0120
NON DIM							300 90 003 ED1			
1-10V	24V-DC DIM UNIT						300 90 003 ED5			
DALI							300 90 010			

(1) 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
 (2) RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K
 * TO BE USED AS NON DIM
 ** LED FLEX HP ONLY FOR FREE STANDING PROFILES

ONE AND ONLY

A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.

www.deltalight.com/oneandonly



ONE AND ONLY

1 PROFILE

PROFILE / m	404 00 00 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ B ● / GC ● / W ○
POLYCARBONATE / m	
SANDBLASTED (SBL) 3x UP and 2x DOWN	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

-

4 ENDCAP

ENDCAP (2 PCS.)	404 03 01 B / W
-----------------	-----------------

5 FIXATION

SUSPENDED	
SUSPENSION SINGLE 1,6M (1 PC.)	404 09 01
SUSPENSION ROD 0,4M (1 PC.) EXCL. CABLING	328 27 40 B / W
SUSPENSION ROD 0,8M (1 PC.) EXCL. CABLING	328 27 80 B / W
SUSPENSION ST	-

6 CONNECTION


LED POWER SUPPLY KIY		-
NON DIM 24V-DC / 100W		404 24 100
1-10V DIM 24V-DC / 60W		404 24 60 ED1
SUSPENDED		
CURRENT SUPPLY 1,6M	3X0,75MM ²	377 98 51
	5X0,75MM ²	377 99 51
CURRENT SUPPLY 6,0M	3X0,75MM ²	377 98 56
	5X0,75MM ²	377 99 56
CONNECTION ST		15225 0360 B / W
CABLE BASE R		203 99 55 B / W
CABLE BASE S		203 99 56 B / W
COVERSET R	100MM	204 00 100 B / W

LIGHT MODULES



NEXT PAGE

7 LED FLEX

A

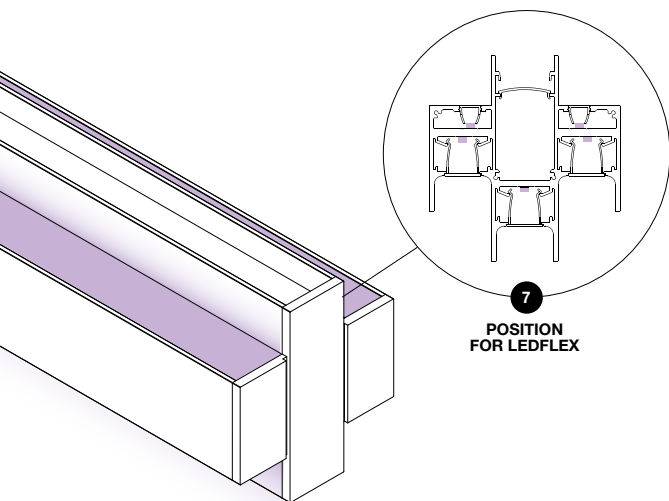

7
POSITION
FOR LEDFLEX

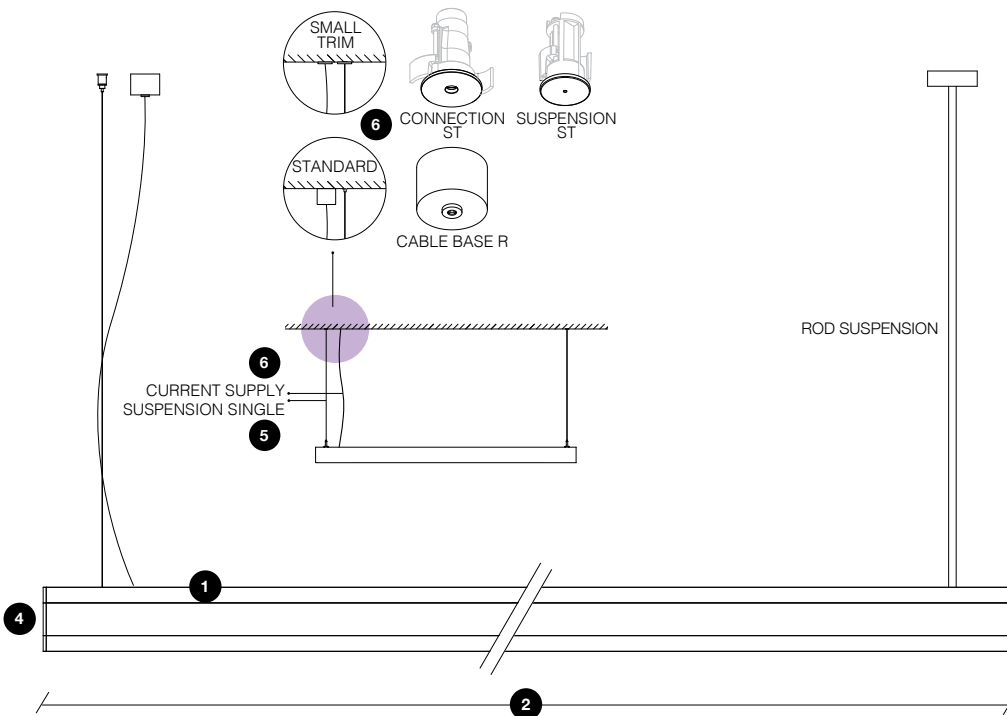

10 |
/ m - 24V-DC
MOUNTED

Dividable per
33,3mm
210 smd LED/m

LEDFLEX		10W/m 1045lm/m
		IN MP
4000K CRI > 90	IN	21031 0140
3000K CRI > 90	IN	21031 0120
2700K CRI > 90	IN	21031 0110

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	21012 0160	max. 2,4m
	150W / IP67	300 89 24 150	max. 15m
	60W / IP20	21012 0171	max. 6m
0-10V DIM (DIM1)	90W / IP20	21012 0181	max. 9m
	120W / IP20	21012 0191	max. 12m
	60W / IP67	21012 0101	max. 6m
	90W / IP67	21012 0111	max. 9m
	120W / IP67	21012 0121	max. 12m
DALI (DIM5)	60W / IP20	21012 0205	max. 6m
	100W / IP20	21012 0225	max. 10m
	60W / IP67	21012 0135	max. 6m
	90W / IP67	21012 0145	max. 9m
	120W / IP67	21012 0155	max. 12m

PRO
PROFILES




SHELFLINE

A series of miniature profiles, to be finished with the ledflex of your choice. Ideal to softly enlighten shelves, cupboards, wardrobes or for other indirect lighting applications.


www.deltalight.com/shelfline

PRO

A




SHELFLINE		20 ST	18	19
1 PROFILE				
PROFILE / m		398 01 00 ◊	398 02 00 ◊	398 03 00 ◊
MAX. LENGTH PER PROFILE SECTION 3m		◊ ANO ●	◊ ANO ●	◊ ANO ●
POLYCARBONATE / m				
SANDBLASTED (SBL)		INCLUDED	INCLUDED	398 03 05 SBL
CLEAR		-	-	398 03 05 CL
2 DIMENSIONS	The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.			
3 JUNCTION / CORNER	-			
4 ENDCAP				
ENDCAP (2 PCS.)		398 01 03 01 A	398 02 03 01 A	398 03 03 01 A
5 FIXATION				
SURFACE MOUNTED				
MOUNTING CLIP (10 PCS.)		-	398 02 06 11	398 03 06 11
MOUNTING CLIP 45° (10 PCS.)		-	398 02 06 45	398 03 06 45
6 CONNECTION	-			
7 LED FLEX	LIGHT MODULES NEXT PAGE			

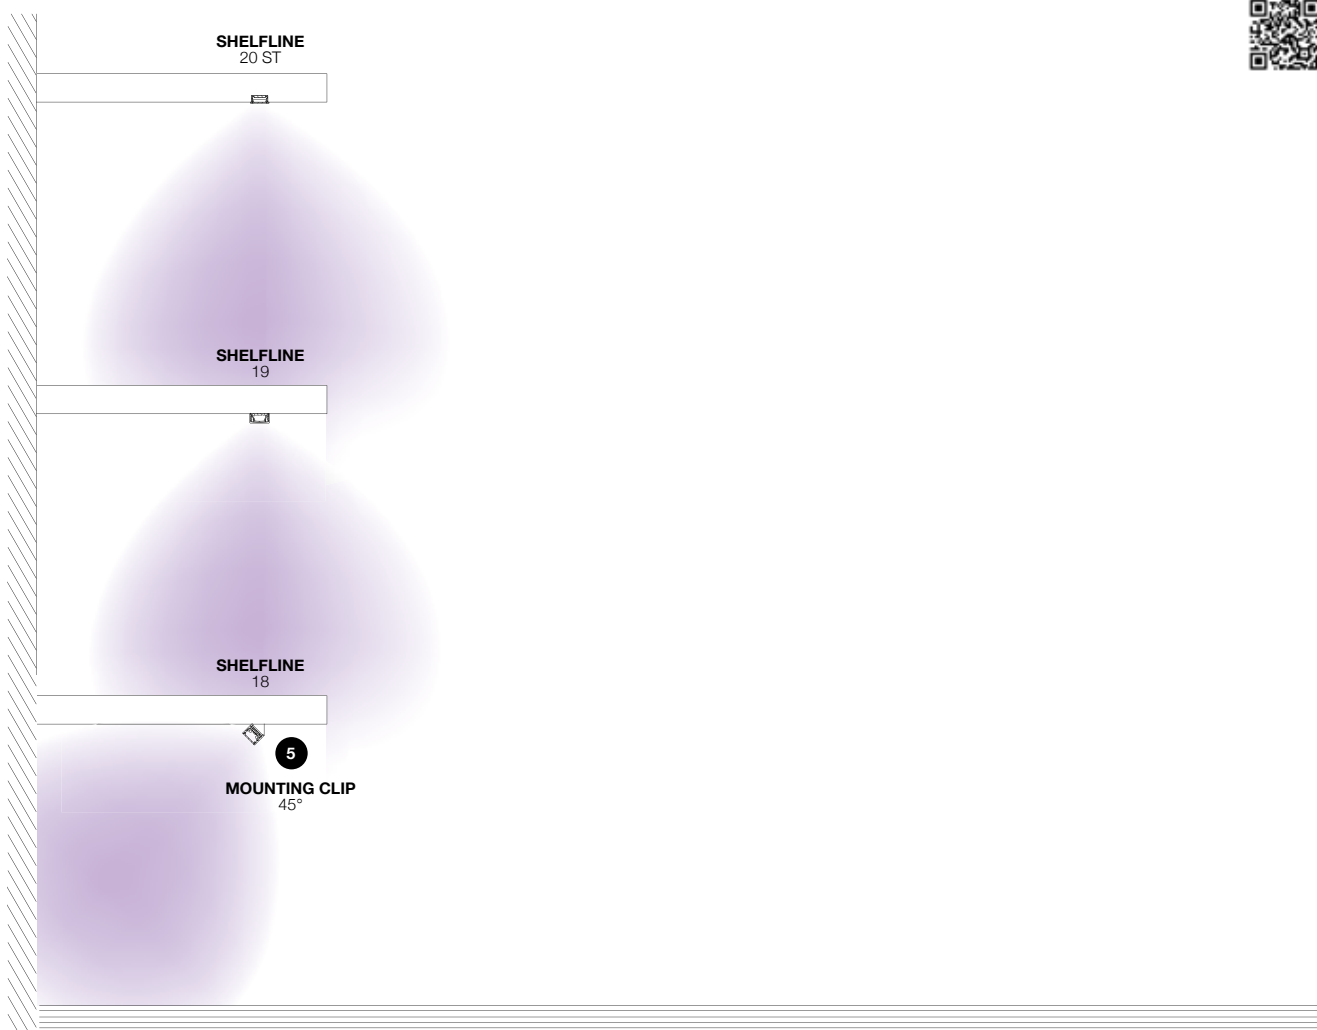

PRO

PROFILES



5m - 24V-DC
NOT MOUNTED

Dividable
per 25 mm
Continuous LED

9W/m
608lm/m

LED FLEX		IN CL
4000K CRI > 90	IN	21030 0340
3000K CRI > 90	IN	21030 0320
2700K CRI > 90	IN	21030 0310

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)

NON DIM	24W / IP20	21012 0160	max. 2,6m
	150W / IP67	300 89 24 150	max. 16,6m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 6,6m
	90W / IP20	21012 0181	max. 10m
	120W / IP20	21012 0191	max. 13,3m
	60W / IP67	21012 0101	max. 6,6m
	90W / IP67	21012 0111	max. 10m
	120W / IP67	21012 0121	max. 13,3m
DALI (DIM5)	60W / IP20	21012 0205	max. 6,6m
	100W / IP20	21012 0225	max. 11,1m
	60W / IP67	21012 0135	max. 6,6m
	90W / IP67	21012 0145	max. 10m
	120W / IP67	21012 0155	max. 13,3m

MICROLINE 60 / 40

A series of slim, made-to-measure LED profiles which stand out for their versatility and clean-cut design. The Microline profiles are designed to create uninterrupted lines of light, ideal to accentuate architectural lines or be used as general lighting.


MICROLINE 40/60



The Microline 40/60 profile was created as a high efficiency replacement for the original 30/50 profile. The high-output led array is available with a dimmable power supply with 151lm/W and as a non-dimmable version delivering 167lm/W. In addition, the 40+ features a protruding polycarbonate for extra wide light output.

www.deltalight.com/microline


**Go around
the corner**

40 VS 40+

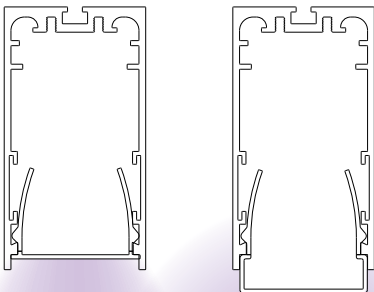


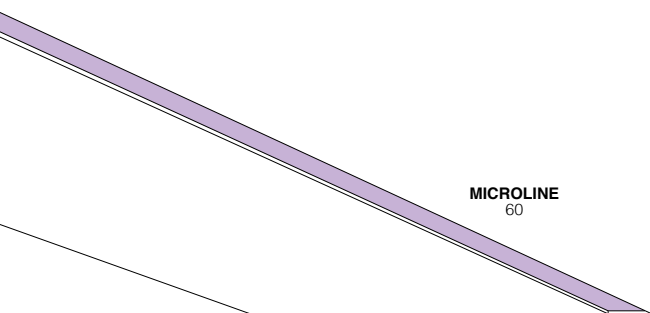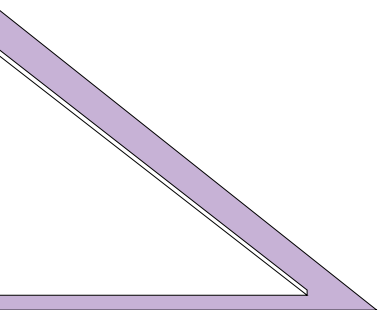

MICROLINE
60

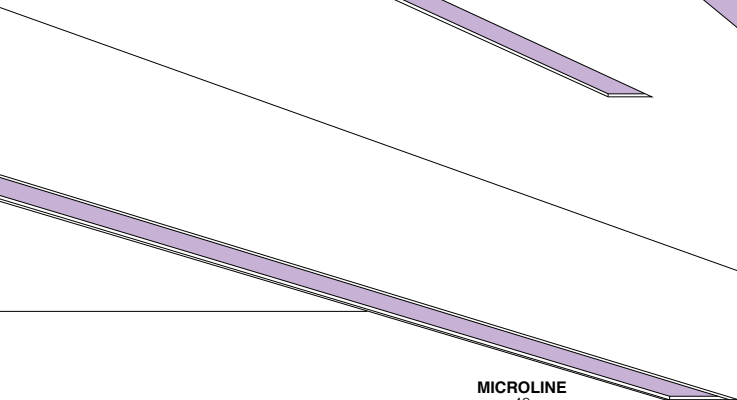


MICROLINE
40

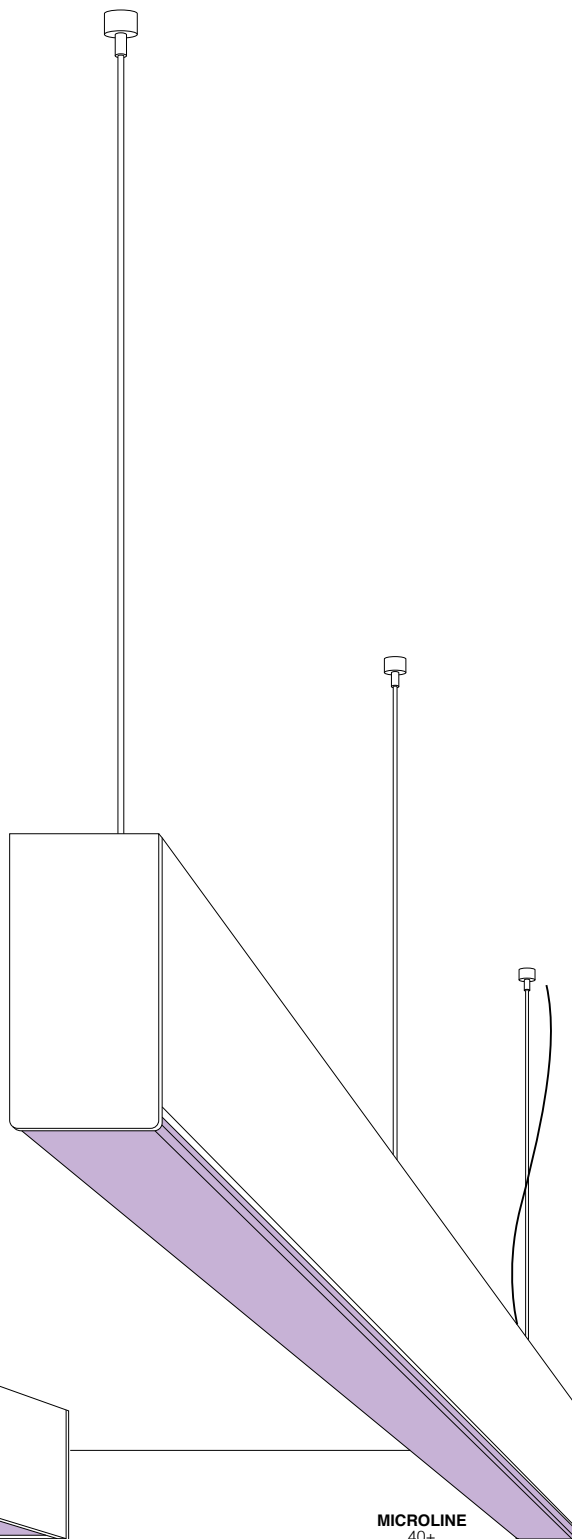

MICROLINE
40+

MICROLINE 60 / 40

TOP VIEW

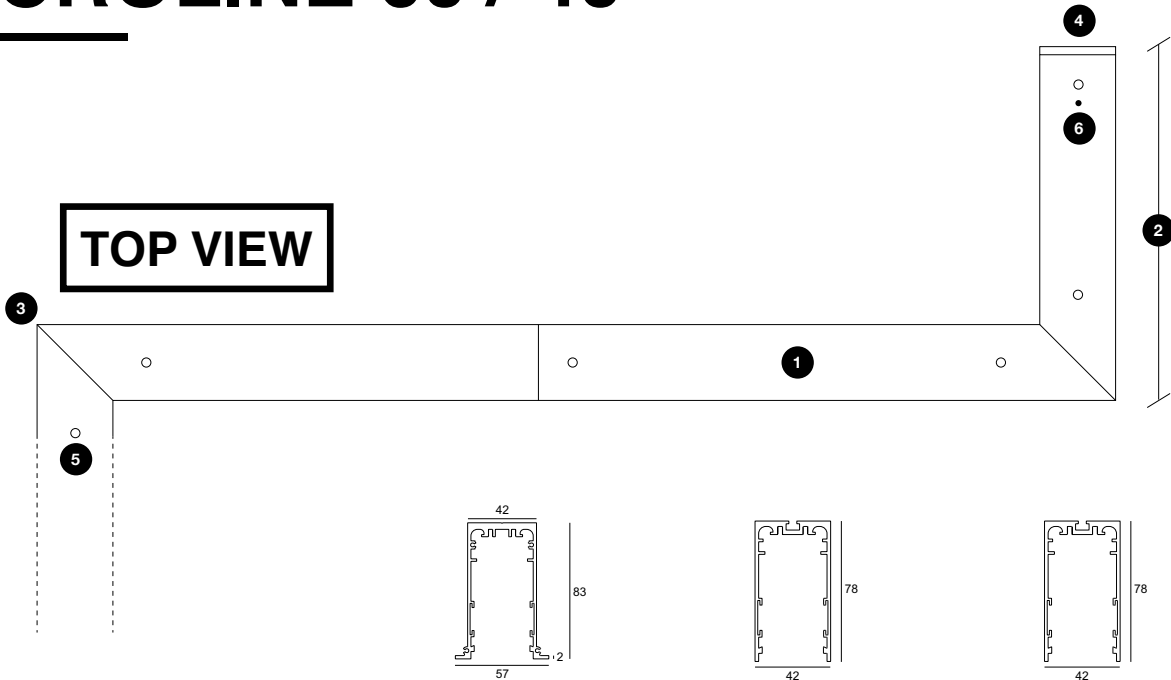

49 x (L + 10) x 120
min.5 - max.15


MICROLINE

1 PROFILE	60	40	40+
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	399 03 00 ◊ ◊ ANO ● / W ○	399 01 00 ◊ ◊ ANO ● / B ● / W ○	399 01 00 ◊ ◊ ANO ● / B ● / W ○
POLYCARBONATE / m SANDBLASTED (SBL)	399 01 02 05 SBL HE	399 01 02 05 SBL HE	399 02 02 05 SBL HE
2 DIMENSIONS			
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.			
3 JUNCTION / CORNER			
CONNECTOR 180°	399 06 01	399 06 01	399 06 01
CONNECTOR 90°	399 06 06	399 06 06	399 06 06
4 ENDCAP			
ENDCAP (1 PC.)	399 03 03 01 ANO / W	399 01 03 01 ANO / B / W	399 02 03 01 ANO / B / W
5 FIXATION			
RECESSED			
INSIDE CLIP (1 PC.)	399 03 14 01	-	-
SUSPENDED			
SUSPENSION 20 SINGLE 1,6M (1 PC.)	-	328 12 01	328 12 01
SUSPENSION 20 SINGLE 6,0M (1 PC.)	-	328 12 06	328 12 06
SUSPENSION ST	-	15225 0340 B / W	15225 0340 B / W
6 CONNECTION			
RECESSED			
SURFACE MOUNTED			
SUSPENDED			
CURRENT SUPPLY 1,6M	3X0,75MM ²	399 98 51	399 98 51
	5X0,75MM ²	399 99 51	399 99 51
CURRENT SUPPLY 6,0M	3X0,75MM ²	399 98 56	399 98 56
	5X0,75MM ²	399 99 56	399 99 56
CONNECTION ST	-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R	-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S	-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM	204 00 100 B / W	204 00 100 B / W



How to build your MICROLINE


Example for Microline 40

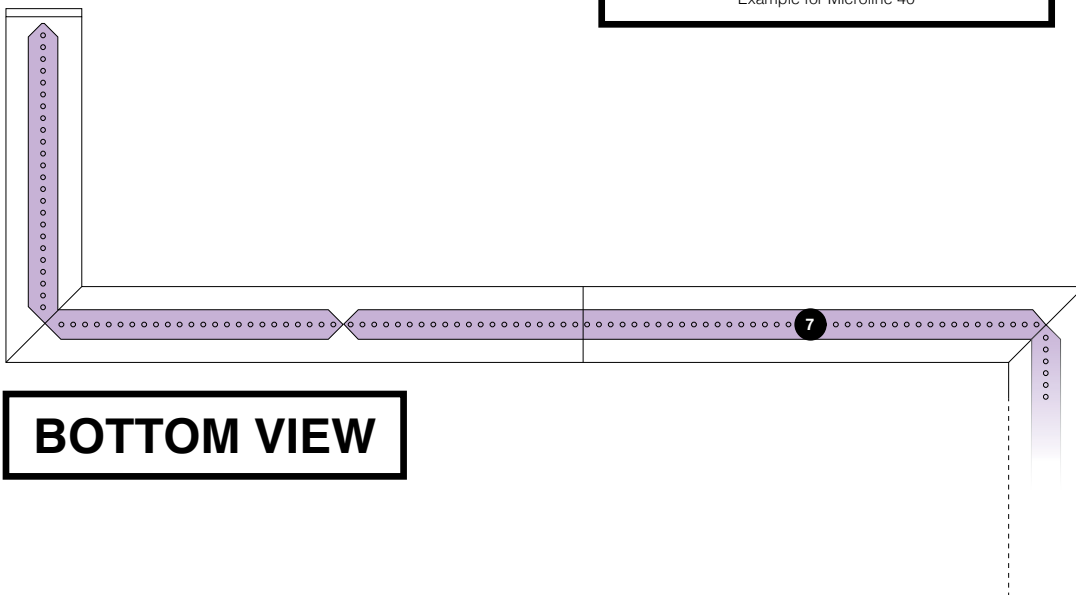

BOTTOM VIEW

PRO

PROFILES

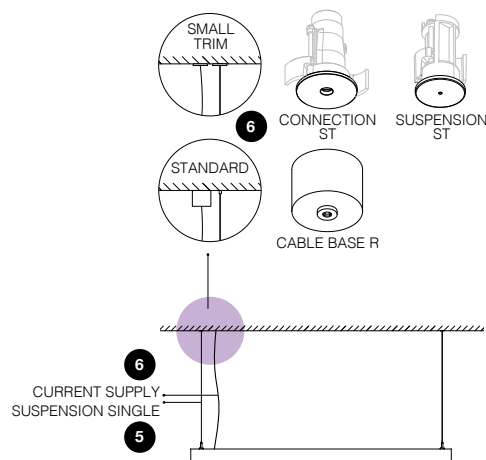

7 LED ARRAY DOWN

				LIGHT MODULES			
				NON DIM	1-10V DIM	DALI	SWITCH DIM
HIGH OUTPUT	3000K / CRI>90 3365 lm/m 155 lm/W	560mm	12W	399 610 12 E	399 610 12 ED1	399 610 12 ED2	
		840mm	18W	399 610 18 E	399 610 18 ED1	399 610 18 ED2	
		1120mm	24W	399 610 24 E	399 610 24 ED1	399 610 24 ED2	
		1400mm	30W	399 610 30 E	399 610 30 ED1	399 610 30 ED2	
		1680mm	36W	399 610 36 E	-	399 610 36 ED2	
		2240mm	48W	399 610 48 E	-	399 610 48 ED2	
HIGH EFFICIENCY	3000K / CRI>90 1742 lm/m 171 lm/W	560mm	6W	399 613 06 E	-	-	-
		840mm	9W	399 613 09 E	-	-	-
		1120mm	12W	399 613 12 E	-	-	-
		1400mm	15W	399 613 15 E	-	-	-
		1680mm	18W	399 613 18 E	-	-	-
		2240mm	24W	399 613 24 E	-	-	-


220-240V | 50-60Hz
IP20

EXTRA CIRCUIT

CABLING EXTRA CIRCUIT (PER MODULE)

328 90 01

STREAMLINER

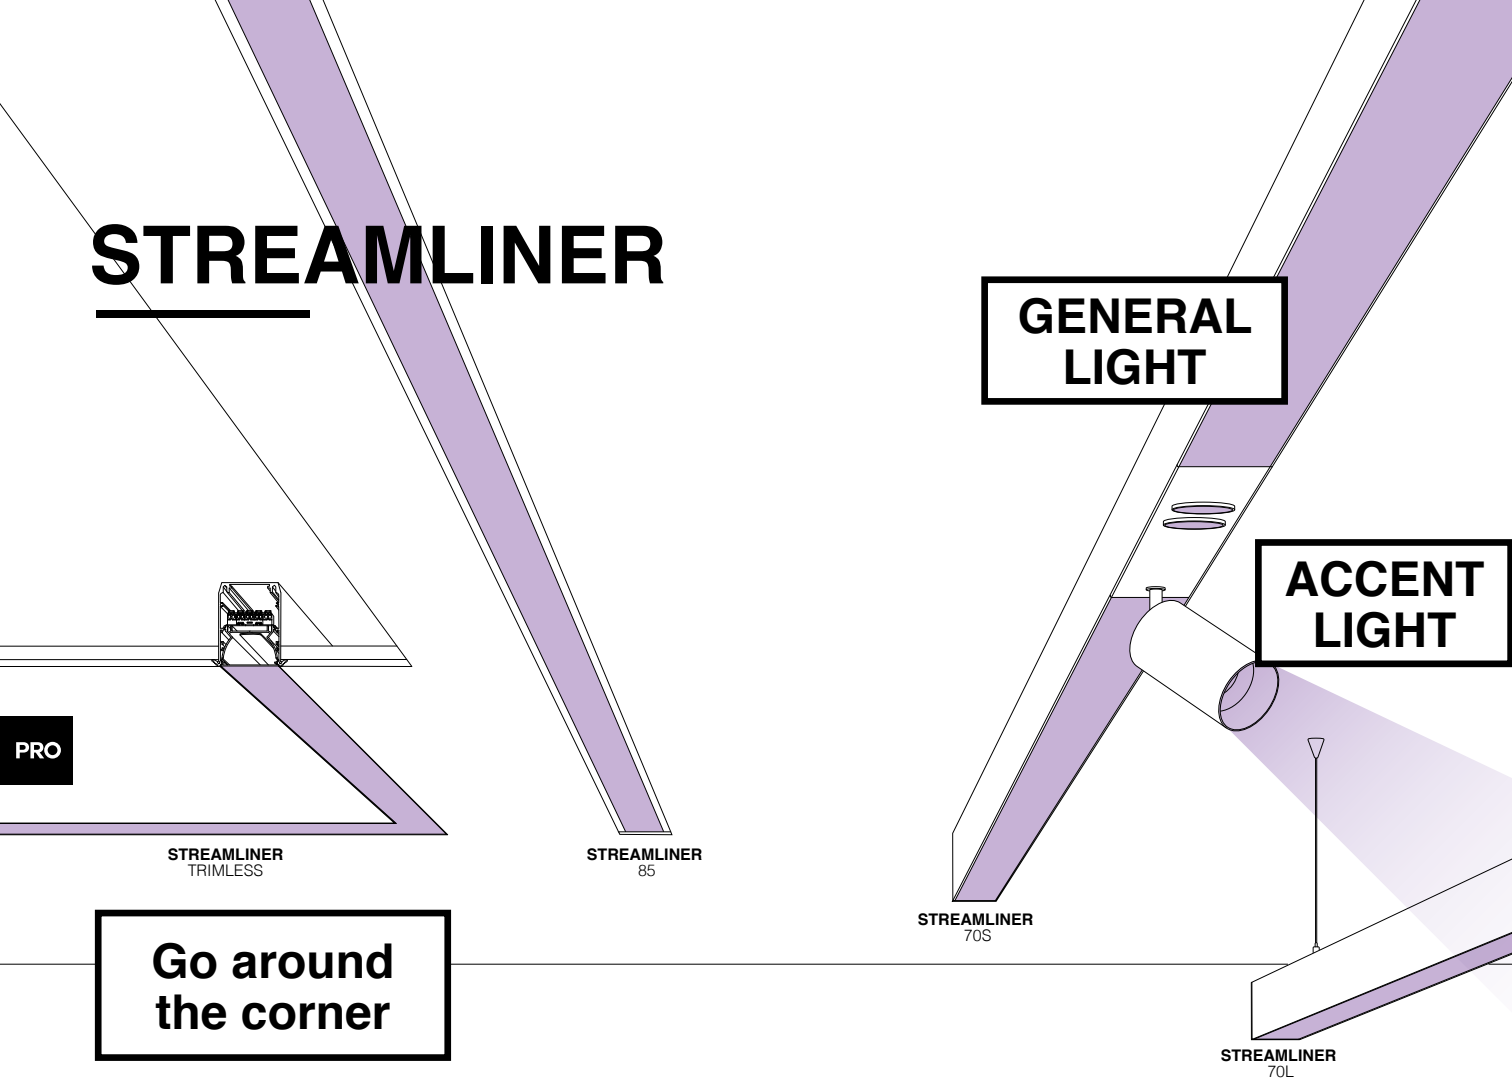

GENERAL
LIGHT

ACCENT
LIGHT

STREAMLINER
TRIMLESS

STREAMLINER
85

STREAMLINER
70S

STREAMLINER
70L

Go around
the corner

The made-to-measure Streamliner is a very versatile LED-focused profile family. Its multiple installation options combined with the possibility to add spots and downlights, allow Streamliner to be used in various applications. Inside, the LED array is available in 2 different output levels and can be finished with an opal or prismatic cover. The possibility to use Tunable White, emergency modules and sensors further add to the flexibility of Streamliner

Streamliner can be recessed mounted, with (Streamliner 85) or without trim (Streamliner TR), surface or pendant mounted. As a pendant version, the profile can be used with only direct light or there is also the opportunity to have it direct-indirect. To give the profile even more flexibility, also integrated downlighters and additional spots are available.



STREAMLINER TR / STREAMLINER 85

Streamliner TR and Streamliner 85 are the recessed solutions within the Streamliner range. Streamliner TR can be finished without any visible trim, while Streamliner 85 has a small trim covering the hole in the ceiling. In both cases a homogenous line of light is all you see, as the profile completely disappears into the ceiling. Fully lit corners allow you to play around with lines of light, creating unique patterns that strengthen the architecture of the building.

STREAMLINER 70S / 70L

Streamliner 70S and 70L can be used for surface mounted or suspended applications, both offering the possibility to be used as a direct-indirect or purely direct line of light. With its Dimensions of 70 by 85mm, Streamliner 70S has a more minimalistic look, while Streamliner 70L (70 by 108mm) enables to hide away an emergency unit inside its body.

www.detailight.com/streamliner

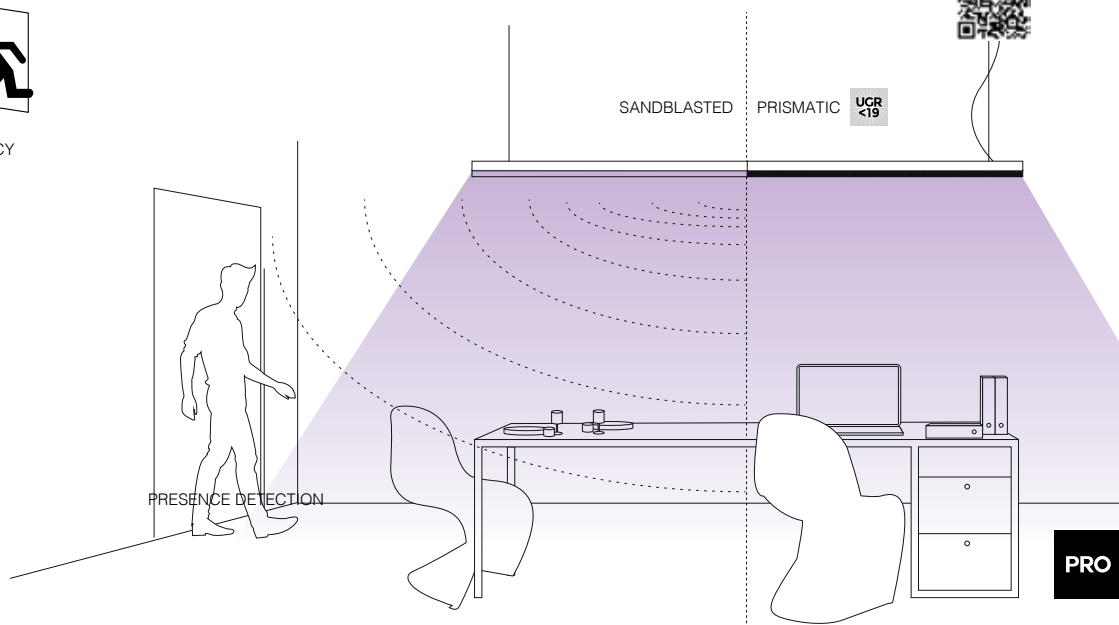

PRO

PROFILES


	STREAMLINER TR	STREAMLINER 85	STREAMLINER 70S	STREAMLINER 70L
	W 85mm H 96mm	W 85mm H 95mm	W 70mm H 85mm	W 70mm H 108mm
OPTICS				
SANDBLASTED	•	•	•	•
PRISMATIC	•	•	•	•
LIGHT EFFECT				
LINEAR DOWN	3625lm/m or 1879lm/m	3625lm/m or 1879lm/m	3625lm/m or 1879lm/m	3625lm/m or 1879lm/m
LINEAR DOWN-UP			▲ 3625lm/m ▼ 3625lm/m or 1879lm/m	▲ 3625lm/m ▼ 3625lm/m or 1879lm/m
SPOT MODULE	8,6W - 1089lm	8,6W - 1089lm	8,6W - 1089lm	8,6W - 1089lm
DOWNLIGHT MODULE	6,4W - 587lm	6,4W - 587lm	6,4W - 587lm	6,4W - 587lm
COLOUR TEMPERATURE				
3000K	•	•	•	•
TUNABLE WHITE	•	•	•	•
CONTROL				
NON DIM	•	•	•	•
MAINS DIM				
1-10V DIM	•	•	•	•
DALI DIM	•	•	•	•
SWITCH DIM	•	•	•	•
WIRELESS DIM	•	•	•	•
COLOUR				
WHITE ○		•	•	•
BLACK ●			•	•
ANODIZED ●	•	•	•	•
INSTALLATION				
INTERIOR	RECESSED TRIMLESS	•		
	RECESSED TRIM		•	
	SURFACE MOUNTED			•
	SUSPENDED			•
CONSTRUCTION				
STRAIGHT LINES	•	•	•	•
90° CORNER	•	•	•	•
CURVES				
OTHER				
PRESENCE DETECTION SENSOR	•	•	•	•
LIGHT SENSOR	•	•	•	•
EMERGENCY	•	•		•

• STANDARD
• ON REQUEST

STREAMLINER

PRO

A

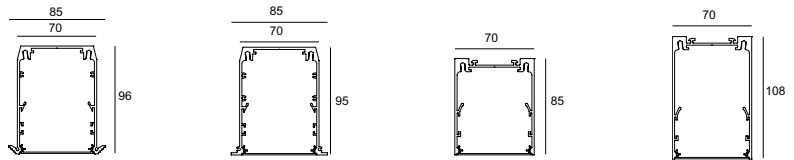

90 x (L + 10) x 125
min.6 / max.25

78 x (L + 5) x 140
max.35

STREAMLINER

TRIMLESS

85

70 S

70 L

1 PROFILE

PROFILE / m	389 04 00 00 ◊	389 03 00 00 ◊	389 01 00 00 ◊	389 02 00 00 ◊
MAX. LENGTH PER PROFILE SECTION 6m	◊ ANO ●	◊ ANO ● / W ○	◊ ANO ● / B ● / W ○	◊ ANO ● / B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)			389 02 05 SBL	
PRISMATIC			389 02 06 PR	

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

CONNECTOR 180°	389 03 06 01	389 03 06 01	389 01 06 01	389 01 06 01
CONNECTOR 90°	389 03 06 06	389 03 06 06	389 01 06 06	389 01 06 06

4 ENDCAP

ENDCAP (1 PIECE)	389 04 03 01 ANO	389 03 03 01 ANO/ W	389 01 03 01 A / B / W	389 02 03 01 A / B / W
------------------	------------------	---------------------	------------------------	------------------------

5 FIXATION

RECESSED				
RECESSED CLIP (1 PC.)	389 04 14 01	-	-	-
INSIDE CLIP (1 PC.)	-	389 03 14 01	-	-
SURFACE MOUNTED	-	-	DIRECT FIXATION TO THE CEILING	
SUSPENDED				
SUSPENSION 20 SINGLE 1,6M (1 PC.)	-	-	377 20 21	
SUSPENSION 20 SINGLE 6,0M (1 PC.)	-	-	377 20 26	
SUSPENSION ST	-	-	15225 0340 B / W	


6 CONNECTION

RECESSED				
SURFACE MOUNTED				
SUSPENDED				
CURRENT SUPPLY 1,6M	3X0,75MM ²	-	-	377 98 51
	5X0,75MM ²	-	-	377 99 51
CURRENT SUPPLY 6,0M	3X0,75MM ²	-	-	377 98 56
	5X0,75MM ²	-	-	377 99 56
CONNECTION ST		-	-	15225 0360 B / W
CABLE BASE R		-	-	203 99 55 ANO / B / W
CABLE BASE S		-	-	203 99 56 ANO / B / W
COVERSET R	100MM	-	-	204 00 100 B / W

LIGHT MODULES


NEXT PAGE

7 LED FLEX

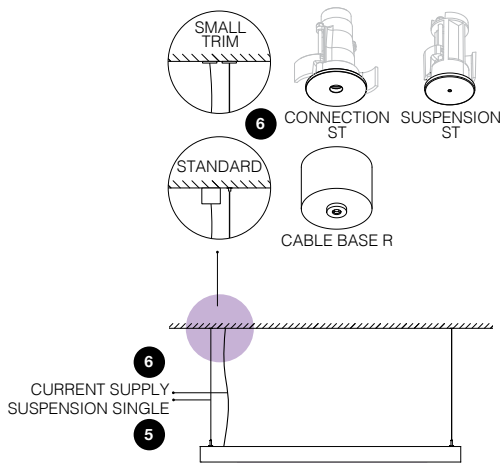

How to build your STREAMLINER

Example for Streamliner 70

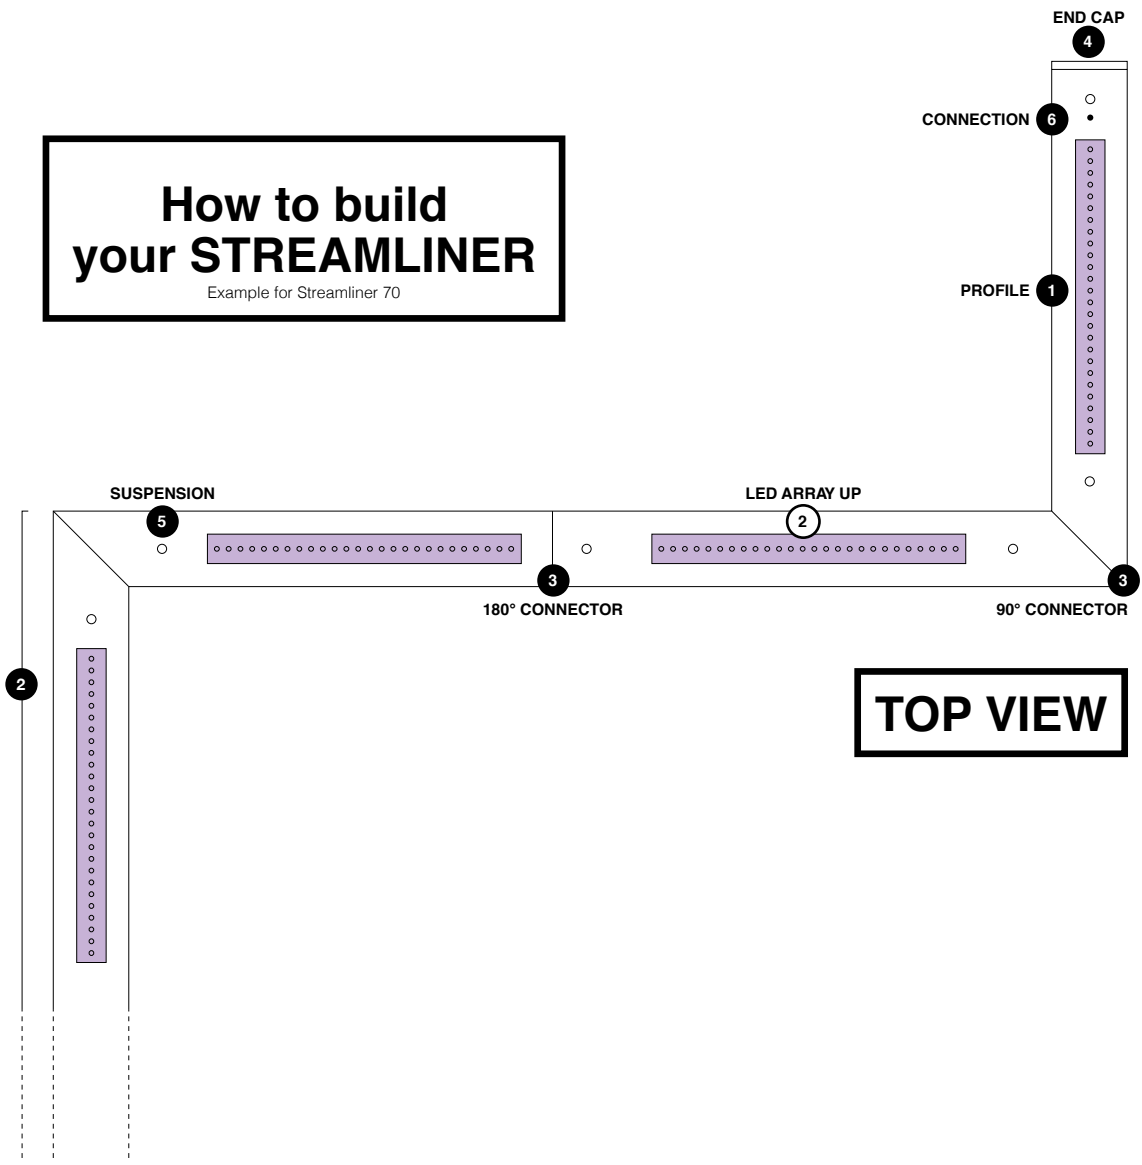

PRO

PROFILES

1 LED ARRAY DOWN

				NON DIM	1-10V DIM	DALI	SWITCH DIM
HIGH OUTPUT	3000K / CRI>90 3365 lm/m 155 lm/W	560mm	12W	389 610 12 E	389 610 12 ED1	389 610 12 ED2	
		840mm	18W	389 610 18 E	389 610 18 ED1	389 610 18 ED2	
		1120mm	24W	389 610 24 E	389 610 24 ED1	389 610 24 ED2	
		1400mm	30W	389 610 30 E	389 610 30 ED1	389 610 30 ED2	
		1680mm	36W	389 610 36 E	389 610 36 ED1	389 610 36 ED2	
		2240mm	48W	389 610 48 E	389 610 48 ED1	389 610 48 ED2	
		1120mm + emergency unit *	24W	389 610 24 E EM1	389 610 24 ED1 EM1	389 610 24 ED2 EM1	
		90° corner - 563mm - 563mm	2 x 12W	389 610 212 E	389 610 212 ED1	389 610 212 ED2	
HIGH EFFICIENCY	3000K / CRI>90 1742 lm/m 171 lm/W	560mm	6W	389 613 06 E	-	-	-
		840mm	9W	389 613 09 E	-	-	-
		1120mm	12W	389 613 12 E	-	-	-
		1400mm	15W	389 613 15 E	-	-	-
		1680mm	18W	389 613 18 E	-	-	-
		2240mm	24W	389 613 24 E	-	-	-
		1120mm + emergency unit *	12W	389 613 12 E EM1	-	-	-
		90° corner - 563mm - 563mm	2 x 12W	389 613 206 E	-	-	-
	2500-5700K / CRI>80 2668-3089lm/m 2 DALI CONTROL CHANNELS DT6	840mm	21W	-	-	389 610 26 18 ED5	-
		1120mm	28W	-	-	389 610 26 24 ED5	-
		1400mm	35W	-	-	389 610 26 30 ED5	-
		1680mm	42W	-	-	389 610 26 36 ED5	-
		2240mm	56W	-	-	389 610 26 48 ED5	-



* NOT FOR STREAMLINER 70S
220-240V | 50-60Hz
IP20

2 LED ARRAY UP (INCL. PC CLEAR UP)

				NON DIM	1-10V DIM	DALI	SWITCH DIM
STRL 70S	3000K / CRI>90 3365 lm/m 155 lm/W	560mm	12W	389 01 620 12 E	389 01 620 12 ED1	389 01 620 12 ED2	
		1120mm	24W	389 01 620 24 E	389 01 620 24 ED1	389 01 620 24 ED2	
STRL 70L	3000K / CRI>90 3365 lm/m 155 lm/W	560mm	12W	389 02 620 12 E	389 02 620 12 ED1	389 02 620 12 ED2	
		1120mm	24W	389 02 620 24 E	389 02 620 24 ED1	389 02 620 24 ED2	

220-240V | 50-60Hz
IP20

3 SPY 52 M10

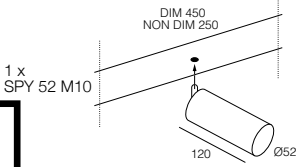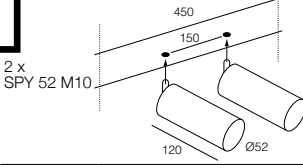				NON DIM	1-10V DIM	DALI	SWITCH DIM
	3000K / CRI>90 LED 8,6W / 1089lm / 500mA	20°		389 90 01 + 18696 9320 B/W	389 90 01 ED1 + 18696 9320 B/W	389 90 01 ED5 + 18696 9320 B/W	-
		45°		389 90 01 + 18696 9330 B/W	389 90 01 ED1 + 18696 9330 B/W	389 90 01 ED5 + 18696 9330 B/W	-
		20°		389 90 01 + 18696 9220 B/W	389 90 01 ED1 + 18696 9220 B/W	389 90 01 ED5 + 18696 9220 B/W	-
		45°		389 90 01 + 18696 9230 B/W	389 90 01 ED1 + 18696 9230 B/W	389 90 01 ED5 + 18696 9230 B/W	-
	3000K / CRI>90 2 x LED 8,6W / 1089lm / 500mA	20°		389 90 02 + 2 x 18696 9320 B/W	389 90 02 ED1 + 2 x 18696 9320 B/W	389 90 02 ED5 + 2 x 18696 9320 B/W	-
		45°		389 90 02 + 2 x 18696 9330 B/W	389 90 02 ED1 + 2 x 18696 9330 B/W	389 90 02 ED5 + 2 x 18696 9330 B/W	-
	2700K / CRI>90 2 x LED 8,6W / 1041lm / 500mA	20°		389 90 02 + 2 x 18696 9220 B/W	389 90 02 ED1 + 2 x 18696 9220 B/W	389 90 02 ED5 + 2 x 18696 9220 B/W	-
		45°		389 90 02 + 2 x 18696 9230 B/W	389 90 02 ED1 + 2 x 18696 9230 B/W	389 90 02 ED5 + 2 x 18696 9230 B/W	-

220-240V | 50-60Hz
IP20

4 LED DOWNLIGHT

				NON DIM	1-10V DI	DALI	SWITCH DIM
1 x LED	3000K / CRI>90 LED 6,4W / 587lm / 350mA	40°		389 611 933	-	-	-
	2700K / CRI>90 LED 6,4W / 587lm / 350mA	40°		389 611 923	-	-	-
2 x LED	3000K / CRI>90 2 x LED 6,4W / 587lm / 350mA	40°		389 612 933	-	-	-
	2700K / CRI>90 2 x LED 6,4W / 587lm / 350mA	40°		389 612 923	-	-	-


220-240V | 50-60Hz
IP20

5 EXTRA CIRCUIT

CABLING EXTRA CIRCUIT (PER MODULE)	328 90 01
------------------------------------	-----------

6 SENSOR

AMBIENT LIGHT & MOTION SENSOR DIM2 + INFRARED PROGRAMMING UNIT	389 92 00 ED2 ANO / B / W
INFRARED PROGRAMMING UNIT	300 90 019

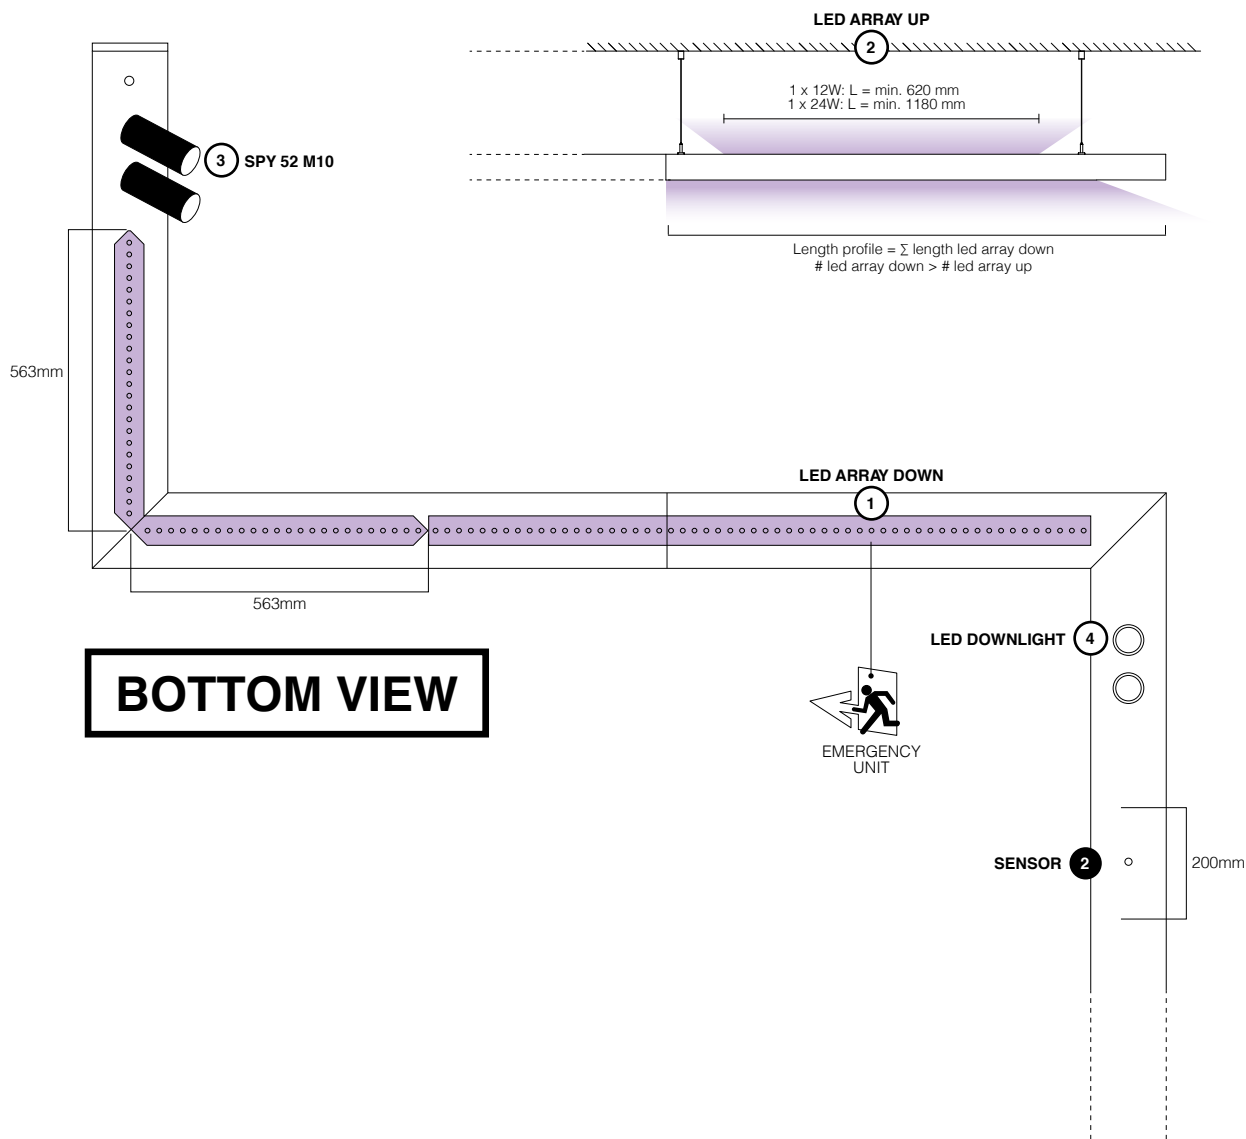

BOTTOM VIEW

PRO

PROFILES

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SPY 52 M10	
			1	2
FINISH				
	SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W	R	R
HONEYCOMB / LENS / GLASS				
	HONEYCOMB SINGLE USE	19810 0010 B	A	A
	HONEYCOMB DOUBLE USE	19810 0060 B	A	A
	LINEAR SPREAD LENS	19810 0020	A	A
	SPREAD LENS	19810 0030	A	A
	SOFTENING LENS	19810 0040	A	A
	GLASS SBL	19810 0050	A	A

B



Exterior

Outdoor


INDEX

Exterior Ceiling Recessed



INDEX

Exterior Ceiling Surface

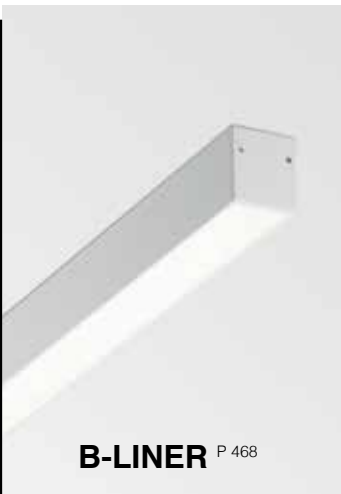

Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.




**I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.**

REO


The Reo collection is more than one product, it is a family which offers a solution for many lighting demands, from residential to hotel, restaurant to retail and much more. In line with this philosophy, Reo comes in single and double fixtures, round or square, orientable or fixed, in multiple finishing colours, for both indoor and outdoor use.

The design of these recessed conical spots delivers a hardly visible transition from the intense light to the ceiling, resulting in a halo-like effect, ideal to give the space an extra dimension.


www.deltalight.com/reo

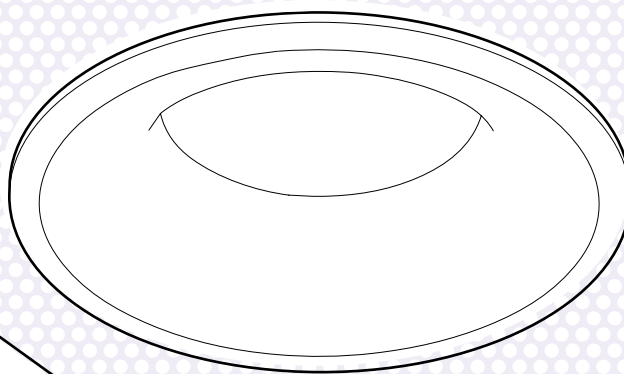

REO X



46 x 90 / min.5



56 x 60 / min.5



Ø70 x 60 / min.5



0-30°/360°

MICRO REO X / MINI REO X


MICRO REO X

MINI REO II X


MINI REO II OK X

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP43	35°	302 23 811 932 ◊		
	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP65	37°		19352 9330 ◊	19354 9330 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP43	35°	302 23 811 922 ◊		
	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP65	37°		19352 9230 ◊	19354 9230 ◊

◊ B ● / W ○



76 x 55 / max.22



76 x 55

REO X

S1


S2

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	202 25 811 932 ◊	202 252 811 932 ◊
	LED [H] 10.4W / 1128lm / 500mA	IP65		202 256 811 932 ◊	202 2562 811 932 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44	33°	202 25 811 922 ◊	202 252 811 922 ◊
	LED [H] 10.4W / 1083lm / 500mA	IP65		202 256 811 922 ◊	202 2562 811 922 ◊

◊ A ● / B ● / W ○




A

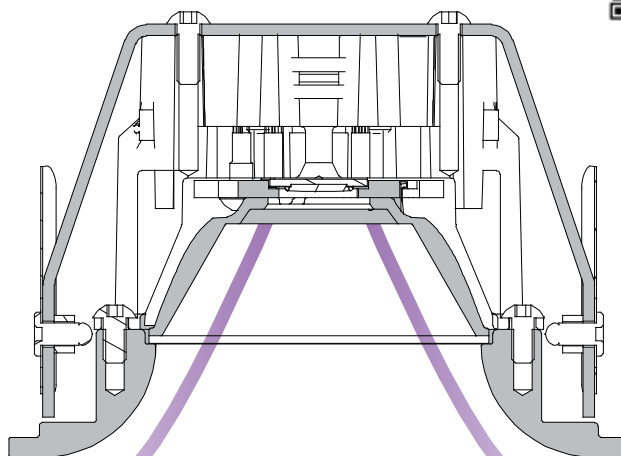

CURVES
a halo-like effect

EXTERIOR CEILING

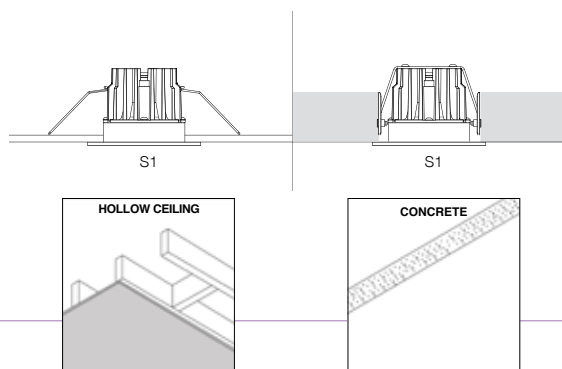

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			MICRO REO		MINI REO		REO X	
			X	II X	II OK X	S1	S2	
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	21012 0298	i min. 55	R*	R*	R*	R*	R*	
1-10V DIM 15	300 90 124	i min. 55	R*	R*	R*	R*	R*	
DALI DIM 14	300 90 125	i min. 55	R*	R*	R*	R*	R*	


* REMOTE INSTALLATION

DEEP RINGO X


The conical shaped design of the Deep Ringo fixtures and the deeper placed LED source make sure that glare is reduced to a minimum when Deep Ringo is installed in the ceiling. The small trim gives a refined touch to this elegant luminaire.

www.deltalight.com/deepringo


IP65

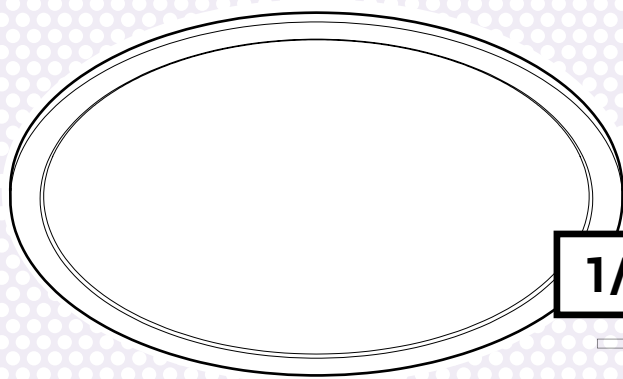


DEEP RINGO
X

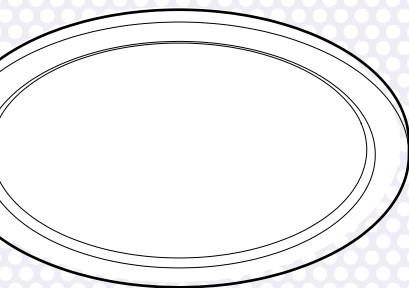

MINI
DEEP RINGO II
X



56 x 80 / min.5



76 x 90 / min.5

DEEP RINGO


MINI DEEP RINGO II X

DEEP RINGO X

Color Temperature / CRI	LED Type	Power / Lumen	Beam Angle	Product Code
3000K CRI>90	LED [Q]	5.8W / 734lm / 350mA	37°	19424 9330 ◇
	LED [Q]	8.6W / 1018lm / 500mA	33°	19434 9320 ◇
2700K CRI>90	LED [H]	7.1W / 812lm / 350mA	37°	19424 9230 ◇
	LED [H]	10.4W / 1128lm / 500mA	33°	19434 9220 ◇

◇ B ● / W ○



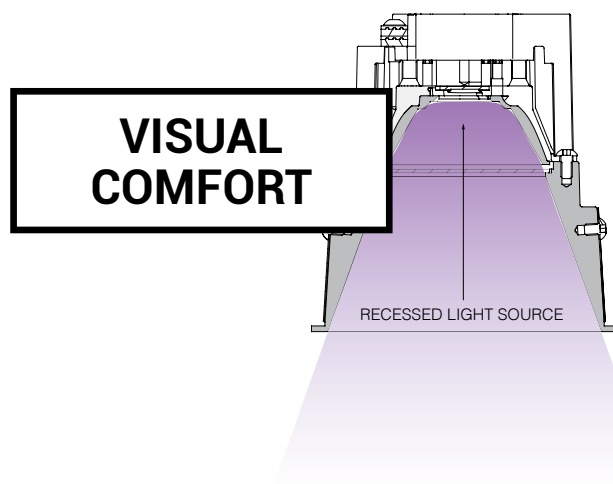

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY <small>MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT</small>			MINI DEEP RINGO II X	DEEP RINGO X
MAINS DIM (FE) 11	21012 0298	min. 55	R *	R *
1-10V DIM 15	300 90 124	min. 55	R *	R *
DALI DIM 14	300 90 125	min. 55	R *	R *




* REMOTE INSTALLATION

ENTERO X

The diversity within the Entero family makes it a versatile range, suitable for a multitude of applications and to fulfill various kinds of lighting needs. Apart from interior use, Entero can also be installed in exterior settings, this to create a uniform look and feel throughout the entire project. To ensure a hassle-free answer to these harsh environments, Entero X is designed to perfection in every detail.

www.detalight.com/entero

IP65

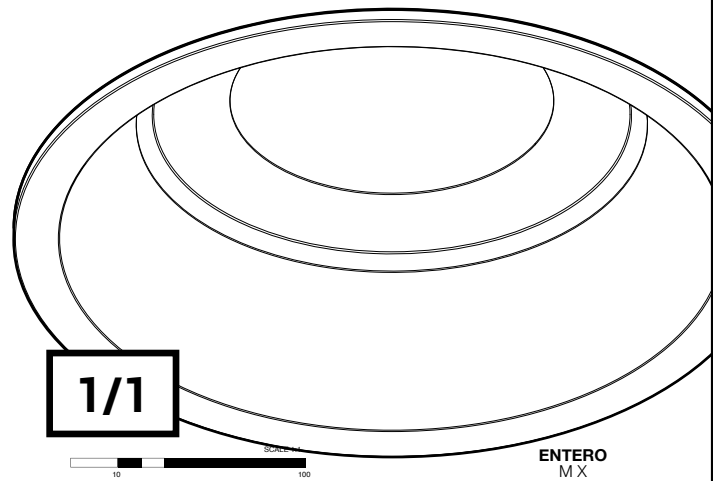

IK06 \varnothing 76 x 110 / max.16

IK06 76 x 76 x 110 / max.12,5 or 25

ENTERO SMALL X

3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	IP65
	LED [U] 8.6W / 1089lm / 500mA	
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA	
	LED [U] 8.6W / 1041lm / 500mA	
SOFT DIM	3000-1800K / CRI>90	
	LED [X] 10.2W / 1038lm / 500mA	
TUNABLE WHITE	4000-1800K / CRI>90	
	LED [Y] 9W / 979lm / 500mA	
	6500-2700K / CRI>90	
	LED [Y] 9W / 1087lm / 500mA	

IK06

ROUND

10°	28438 9310
20°	28439 9320
45°	28439 9330
10°	28438 9210
20°	28439 9220
45°	28439 9230
20°	28483 9020
45°	28483 9030
20°	28470 9020
45°	28470 9030
20°	28441 9020
45°	28441 9030

SQUARE

10°	28538 9310
20°	28539 9320
45°	28539 9330
10°	28538 9210
20°	28539 9220
45°	28539 9230
20°	28583 9020
45°	28583 9030
20°	28570 9020
45°	28570 9030
20°	28541 9020
45°	28541 9030


◇ B ● / W ○




Reliability
for exterior use

IK06

A



R & S



IK06 \varnothing 92 x 140 / max.16

IK06 92 x 92 x 140 / max.12,5 or 25

ENTERO MEDIUM X

3000K CRI>90	LED [E] 8.2W / 677lm / 700mA	IP65
	LED [R] 17.2W / 2101lm / 500mA	
2700K CRI>90	LED [E] 8.2W / 677lm / 700mA	
	LED [R] 17.2W / 2009lm / 500mA	
SOFT DIM	3000-1800K / CRI>90	
	LED [X] 16.1W / 1618lm / 450mA	
TUNABLE WHITE	4000-1800K / CRI>90	
	LED [Y] 9W / 979lm / 500mA	
	6500-2700K / CRI>90	
	LED [Y] 9W / 1087lm / 500mA	

IK06

ROUND

10°	28442 9310
18°	28443 9310
30°	28443 9320
10°	28442 9210
18°	28443 9210
30°	28443 9220
18°	28444 9010
30°	28444 9020
18°	28471 9010
30°	28471 9020
18°	28445 9010
30°	28445 9020

SQUARE

10°	28542 9310
18°	28543 9310
30°	28543 9320
10°	28542 9210
18°	28543 9210
30°	28543 9220
18°	28544 9010
30°	28544 9020
18°	28571 9010
30°	28571 9020
18°	28545 9010
30°	28545 9020

◇ B ● / W ○





What if there is only one?


A GLIMPSE OF ME
ON PAGE 8



FIND ME ONLINE

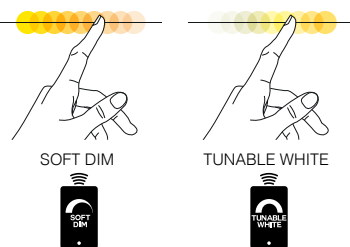

Ø112 x 175 / max.16



112 x 112 x 175 / 12,5 or 25

NEW

ENTERO LARGE X

IK06

ROUND

SQUARE

3000K CRI>90	LED [E] 10.7W / 814lm / 900mA	IP65	10°	28446 9310 ◊	28546 9310 ◊
	LED [I] 30.8W / 3974lm / 900mA		18°	28447 9310 ◊	28547 9310 ◊
			30°	28447 9320 ◊	28547 9320 ◊
2700K CRI>90	LED [E] 10.7W / 814lm / 900mA		10°	28446 9210 ◊	28546 9210 ◊
	LED [I] 30.8W / 3802lm / 900mA		18°	28447 9210 ◊	28547 9210 ◊
			30°	28447 9220 ◊	28547 9220 ◊
TUNABLE WHITE	6500-2700K / CRI>90		18°	28449 9010 ◊	28549 9010 ◊
	LED [Z] 17.8W / 2054lm / 500mA		30°	28449 9020 ◊	28549 9020 ◊

◊ B ● / W ○



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	SMALL		MEDIUM		LARGE	
	ROUND	SQUARE	ROUND	SQUARE	ROUND	SQUARE
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	21012 0298		min. 55	R	R	R
1-10V DIM 15	300 90 124		min. 55	R	R	R
DALI DIM 14	300 90 125		min. 55	R	R	R
TUNABLE WHITE DALI DT8 20	21012 0355		min. 86	R	R	R
HONEYCOMB / GLASS / LENS						
HONEYCOMB SINGLE USE	28500 0050 B			A *	A *	
	28500 0110 B				A **	A **
	28500 0170 B					A ***
HONEYCOMB DOUBLE USE	28500 0060 B	Not for 10°		A *	A *	
	28500 0120 B	Not for 10°			A **	A **
	28500 0180 B	Not for 10°				A ***
LINEAR SPREAD LENS	28500 0010	Not for 10°		A *	A *	
	28500 0070	Not for 10°			A **	A **
	28500 0130	Not for 10°				A ***
SPREAD LENS	28500 0020	Not for 10°		A *	A *	
	28500 0080	Not for 10°			A **	A **
	28500 0140	Not for 10°				A ***
SOFTENING LENS	28500 0030	Not for 10°		A *	A *	
	28500 0090	Not for 10°			A **	A **
	28500 0150	Not for 10°				A ***
GLASS SBL	28500 0040	Not for 10°		A *	A *	
	28500 0100	Not for 10°			A **	A **
	28500 0160	Not for 10°				A ***
INSTALLATION						
S MOUNTING SET S2 FOR CONCRETE	28500 0190			○		
M MOUNTING SET S2 FOR CONCRETE	28500 0200				○	
L MOUNTING SET S2 FOR CONCRETE	28500 0210					○

* MAX.500MA
** MAX.500MA FOR 1 ACCESSORY / ** MAX.450MA FOR 2 ACCESSORIES
*** MAX.900MA FOR 1 ACCESSORY / *** MAX.800MA FOR 2 ACCESSORIES

EXTERIOR CEILING



CARREE X

The Carree range is Delta Light's answer for easy-to-install, timeless and functional recessed spots, as it has been a Delta Light classic for many years.

This family of square recessed luminaires offers refined solutions for LED or halogen, either with or without trim. The straight lines in the design make a contemporary spot out of Carree, not only useful in modern architecture but also in many other applications. Carree can be used throughout the entire project, as it also includes IP44 solutions for bathrooms and IP65 luminaires for outdoor use.

www.deltalight.com/carree

IP44 IP65



CARREE
ST OK LED

1/1

SCALE 1:1



A



75 x 75 x 80 / max.35

75 x 75 x 80

CARREE X LED

S1

S2

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	202 20 811 932 ◊	
		IP65			202 206 811 932 ◊
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44		202 20 811 922 ◊	
		IP65		202 206 811 922 ◊	202 207 811 922 ◊

◊ A ● / N ● / W ○






FIND ME ONLINE



EXTERIOR CEILING

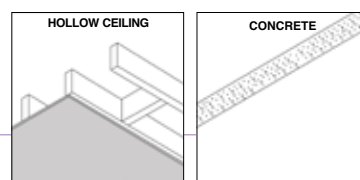

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

CARREE X LED

LED POWER SUPPLY			S1	S2
MAINS DIM (FE) 11	21012 0298	i min. 55	R *	R *
1-10V DIM 15	300 90 124	i min. 55	R *	R *
DALI DIM 14	300 90 125	i min. 55	R *	R *

* REMOTE INSTALLATION



BOXY

What once began as a cubic luminaire is now an elaborate family of surface mounted luminaires, both cubic and cylindrical shaped. Though different in shape, still uniform in look, as both shapes have a deeper recessed LED module with a conical, coloured insert in front. While the deeper recessed LED module reduces the glare, the choice in colour creates possibilities for playful and attractive lighting solutions.




Alongside the different shapes, this family offers indoor and outdoor luminaires, a perfect solution when recessing is not an option.

www.deltalight.com/boxy

IP53

R & S

A




BOXY

R DIM8

L+

2L+

		MAINS		33°		110-240V / 50-60Hz		220-240V / 50-60Hz			
3000K CRI>90	7.1W / 812lm / 350mA	●	●	●	●	●	●	●	●		
	2 x 7.1W / 812lm / 350mA									251 67 811 932 ED8 ◇	251 67 812 932 ED8 ◇
	10.4W / 1128lm / 500mA									251 70 811 932 ED8 ◇	
2700K CRI>90	7.1W / 779lm / 350mA	●	●	●	●	●	●	●	●		
	2 x 7.1W / 779lm / 350mA									251 67 811 922 ED8 ◇	251 67 812 922 ED8 ◇
	10.4W / 1083lm / 500mA									251 70 811 922 ED8 ◇	
		◇ B-B ●● / W-B ●● / W-W ○○		◇ B-B ●● / W-W ○○							
		IP53		IP53							

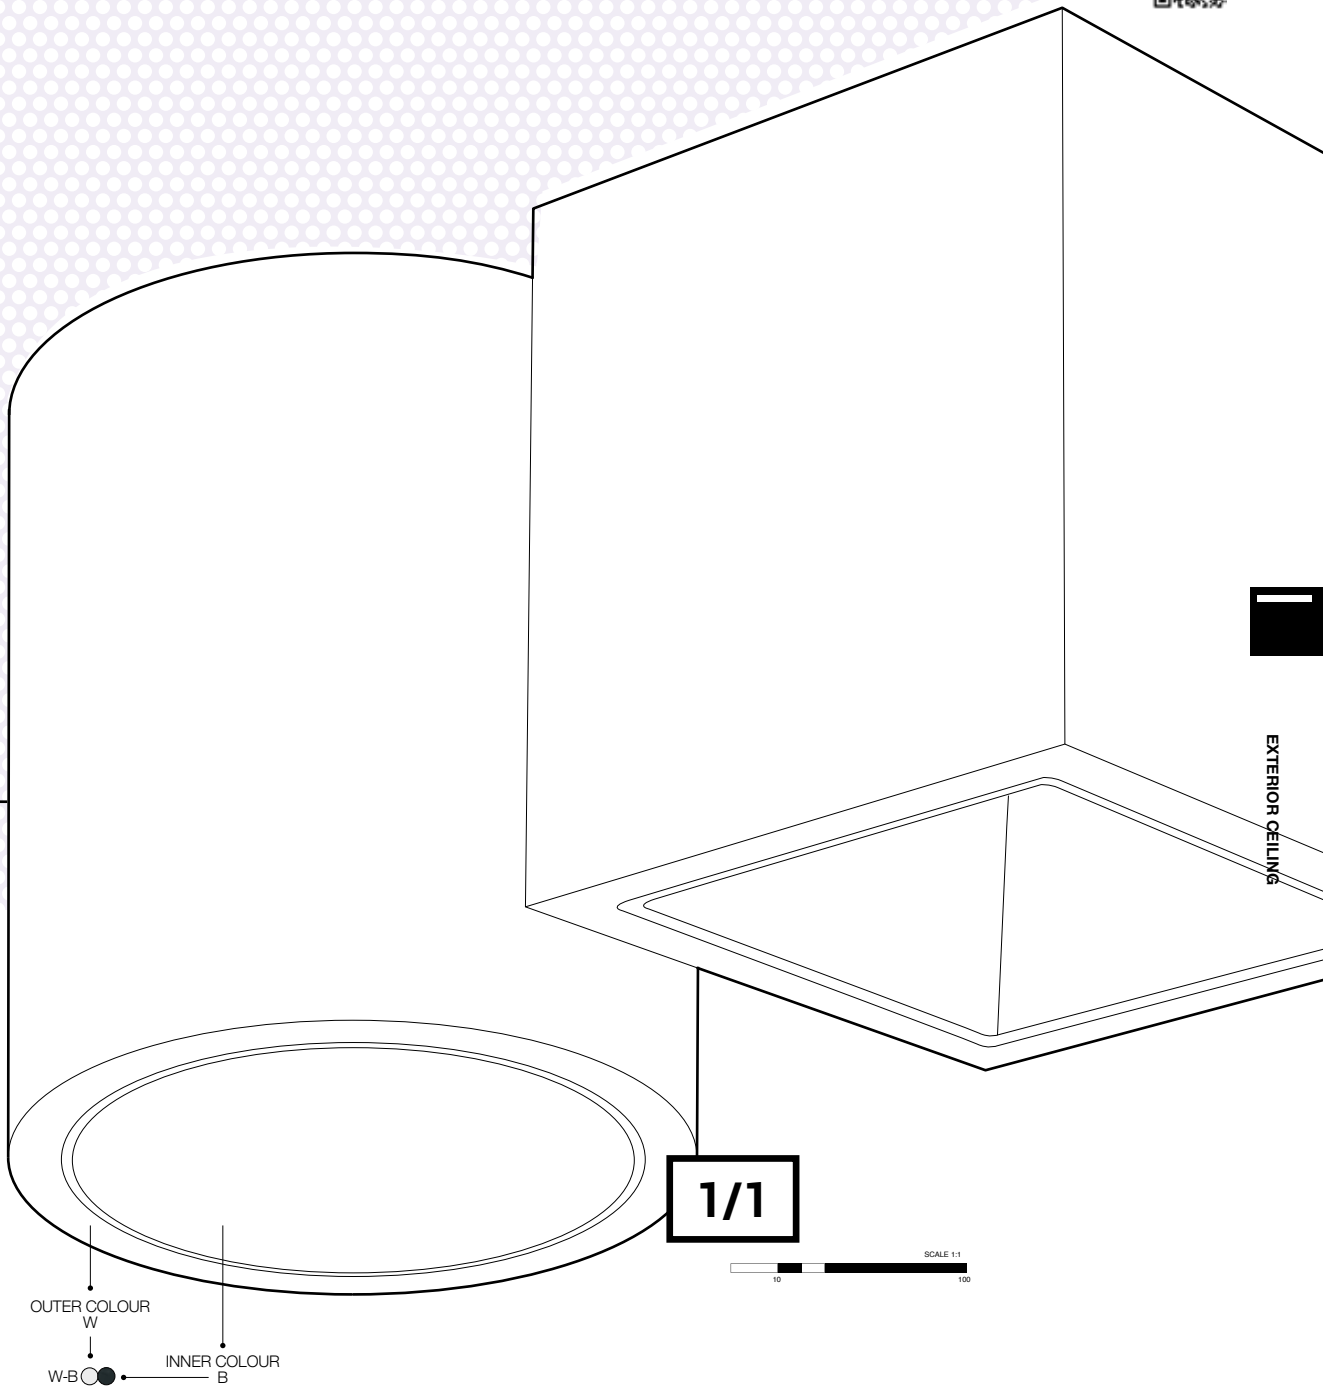

EXTERIOR CEILING

SUPERNOVA XS




Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. The range comes in different diameters and application possibilities.

With its 26 cm or 33 cm diameter, the Supernova XS (Extra Small) can be considered to be the baby in the range when it comes to size, but not when it comes to performance and skills. It only needs 6 cm of height to hide away an intense cluster of powerleds in its perfectly curved aluminium body.

www.detalight.com/supernovaxs

IP64

TILT, TWIST & TURN ME ON...

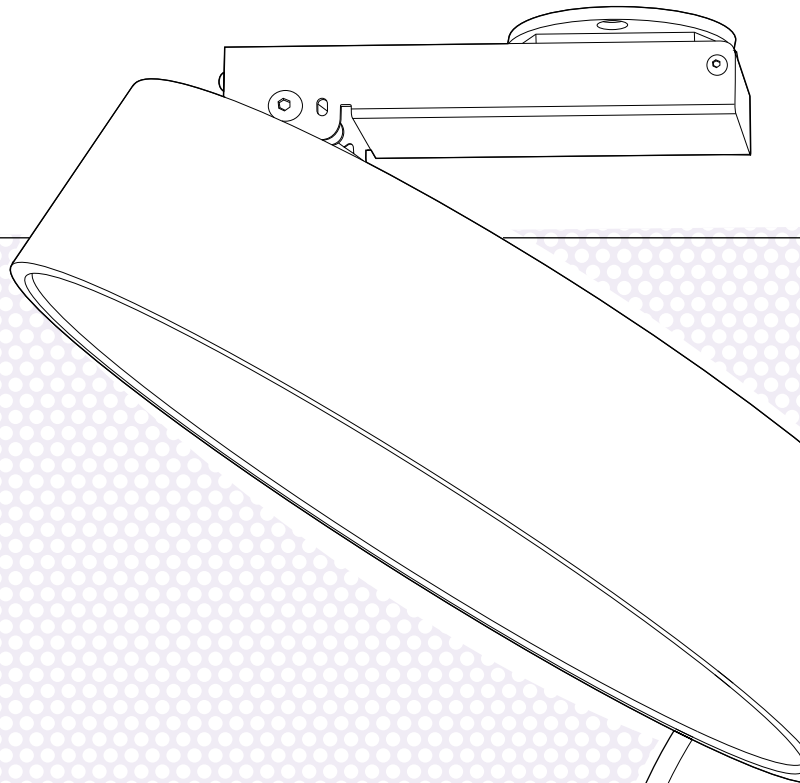

SUPERNOVA XS

260 X

PIVOT 260 X

3000K
CRI>80

LED 10W / 900lm

IP64

274 87 2610 83 ◊

274 88 2610 83 ◊

◊ N ● W ○
220-240V / 50-60Hz





FIND ME ONLINE



1/2



EXTERIOR CEILING


B-LINER

With its IP65 rating - to avoid water ingress inside the profile - and its robust looks, B-Liner is your go-to linear lighting solution for outdoors. Available in 3 sizes and 3 finishing colours, B-Liner offers an answer for multiple exterior applications: create a long line of light or opt for a playful setting with different lengths, B-Liner will perform!


www.deltalight.com/bliner

IP65

1/1

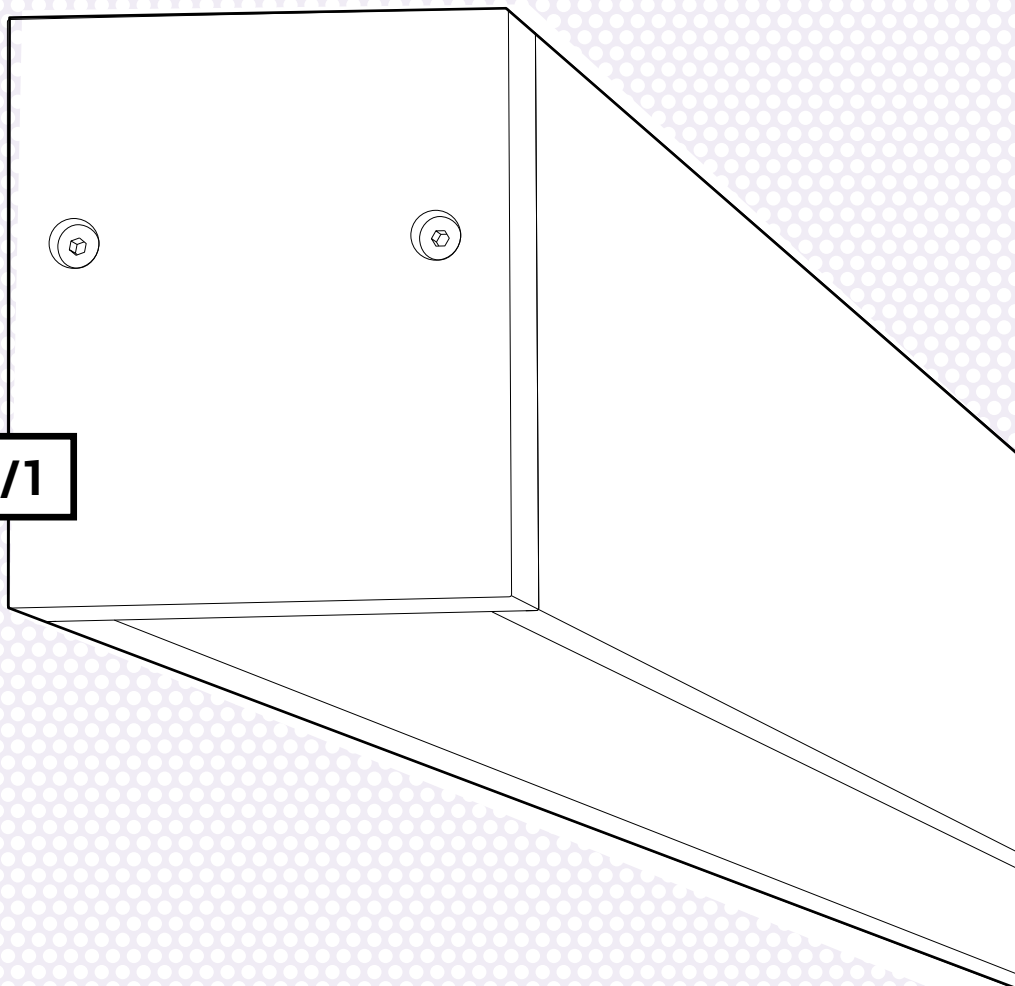

A




B-LINER 65 IP

B-LINER 65 IP

		B-LINER 65 IP		
		580 mm	860 mm	1140 mm
3000K CRI>90	LED 14,7W / 2159lm	IP65	388 01 22 ◇	
	LED 22W / 3238lm			388 01 32 ◇
	LED 29,4W / 4318lm			

◇ A ● / N ● / W ○
110-240V / 50-60Hz




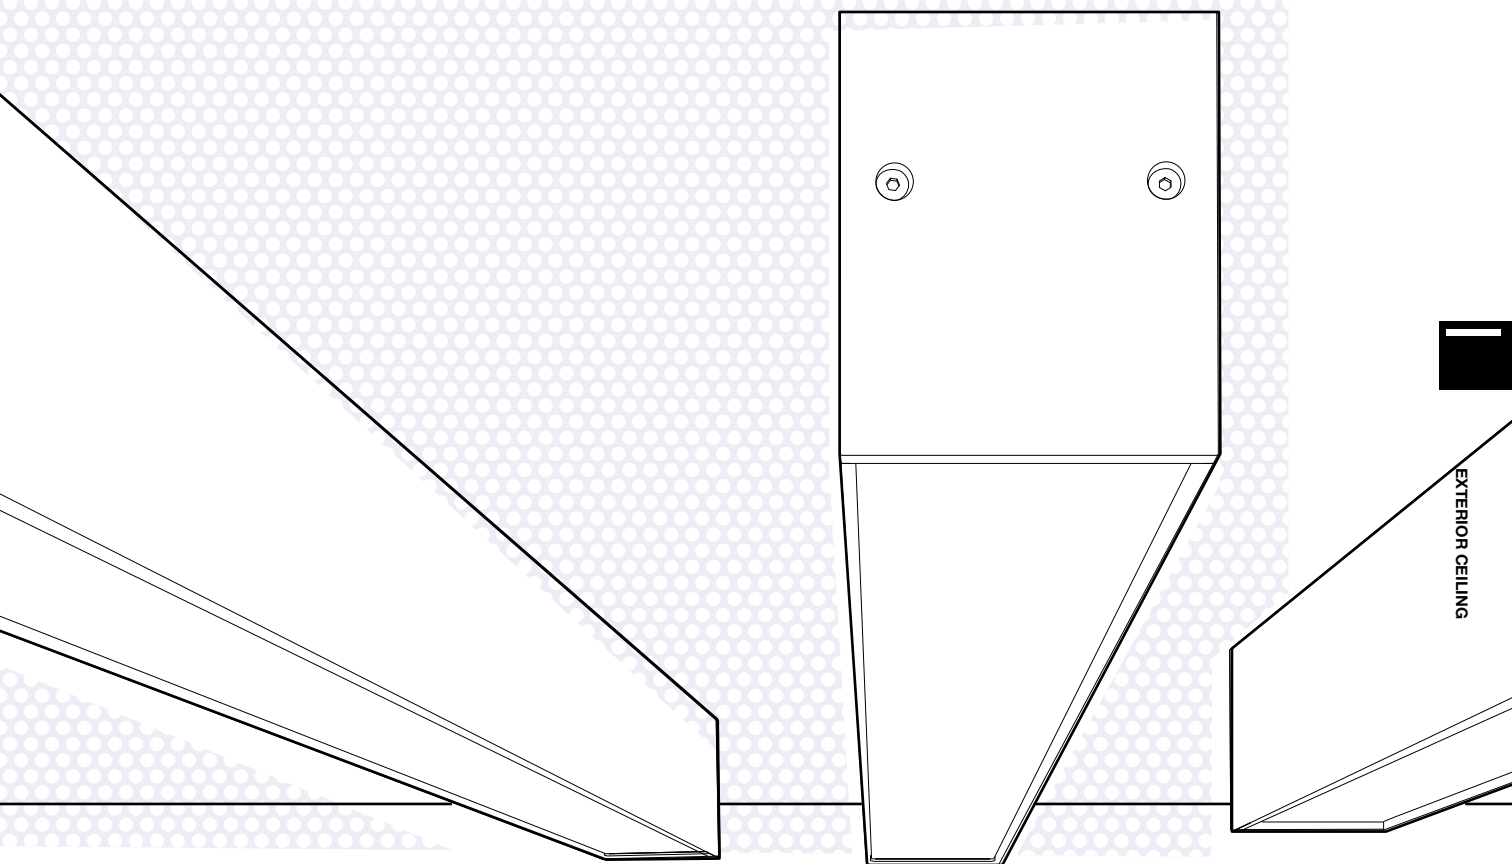

EXTERIOR CEILING

INDEX


Exterior Wall Recessed

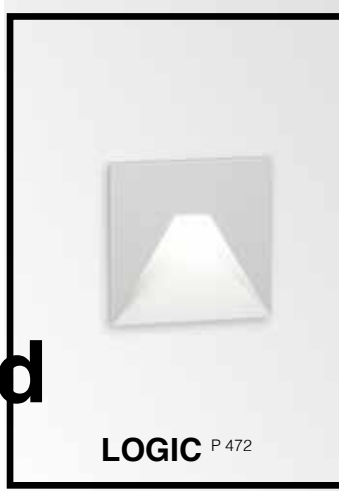

INDEX

Exterior Wall Surface

New
members
to the
family!

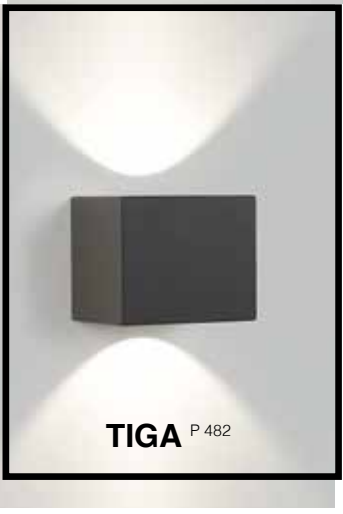

Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.

Hi!
I'm new
to the
range.

NOCTA P 484

BACKSPACE P 488

WALKER P 488

MONTUR P 490

SPY 39W P 492

KIX P 494

SOIREE P 496

POLESANO W P 536

LOGIC


As a family of guidance lights, Logic W exists out of small and large wall luminaires to be installed slightly above ground level. As such, they provide a soft glow on the floor to guide you along pathways or in corridors, both in- and outdoors.

www.deltalight.com/logic






IP54

IP65

Let me guide you...



LOGIC
MINI W R & S



55 x 50 / min. 12

55 x 50 / min. 12

BOX / 115-140

BOX / 110-135

BOX / 110-135

LOGIC

MINI W R




MINI W S

W S


W L F

W L


3000K CRI>80	LED 0,6W / 40lm / 24V-DC	IP54	304 30 12 ◇	304 31 12 ◇			
	LED 9W / 1480lm / 350mA	IP65				304 32 02 83 ◇	304 32 01 83 ◇
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP65			304 33 811 930 ◇		
			◇ A ● / W ○		◇ A ● / N ● / W ○	◇ A ● / N ● / W ○	
					110-240V / 50-60Hz INCL. 1 x PG11	220-240V / 50-60Hz INCL. 1 x PG11	

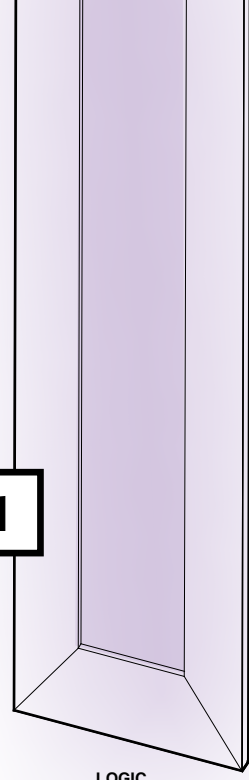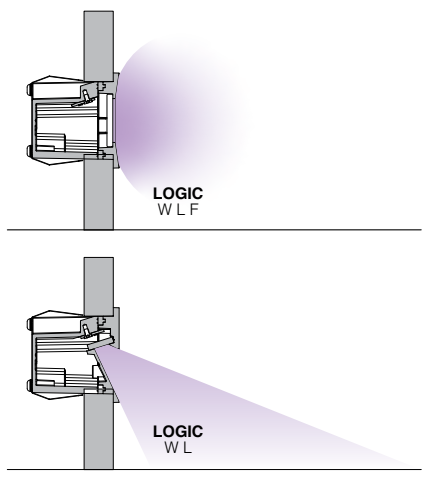

LOGIC WLF

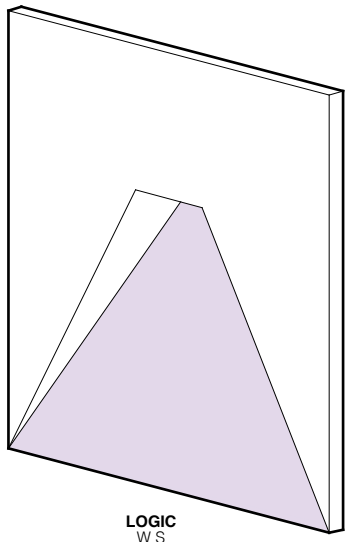

LOGIC WS

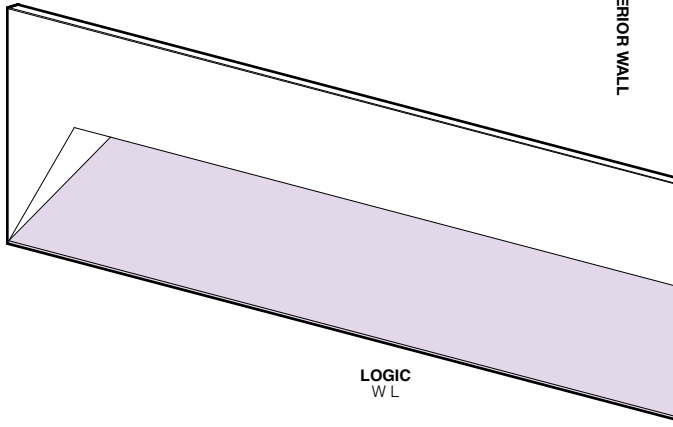

LOGIC WL

EXTERIOR WALL

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			LOGIC MINI		LOGIC		
			WR	WS	WS	WLF	WL
LED POWER SUPPLY MORE INFO IN TECHNICAL CHAPTER							
NON DIM 24V-DC - 24W	21012 0160	min. 55	R*	R*			
INSTALLATION							
FOR PLASTER FINISH	270 11 192				R		
	270 11 191					R	R
FOR EXPOSED CONCRETE	270 11 188		O	O			
	304 33 96				R		
	304 32 96					R	R


* REMOTE INSTALLATION

LEDS GO / C


This family offers some miniature fixtures that serve as orientation and atmosphere lighting. Available round and square, these little dots of light are perfect as guidance lights along paths and driveways.

www.deltalight.com/edsgo
www.deltalight.com/edsc

IP67



38 x 38 x 45



41 x 45

A

LEDS GO / C / HELI

LEDS GO IN FORTE

LEDS C R ST

4000K CRI>80	LED [A] 1W / 134lm / 350mA	IP67	302 10 34 ◊	302 20 34 ◊
3000K CRI>80	LED [A] 1W / 132lm / 350mA		302 10 32 ◊	302 20 32 ◊

◊ ANO ●




HELI X

As a small wall recessed luminaire, Heli is perfect as a guidance light. Be it in a corridor or as a safety light for the steps of your stairs at night, Heli does the trick. Also outside, Heli X will guide you the way.


www.deltalight.com/heli

IP65



75 x 87 x 60

HELI X
SCREEN LED

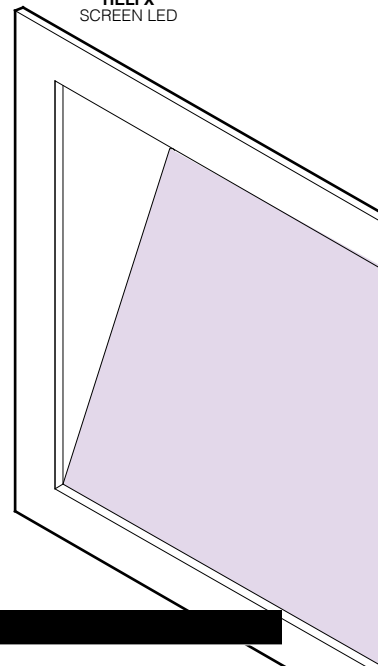

LEDS GO / C / HELI


HELI X SCREEN LED

3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP54	202 04 22 ◊
-----------------	----------------------------	------	-------------


◊ A ● / N ●





STEP LIGHT



LEDS C
R ST

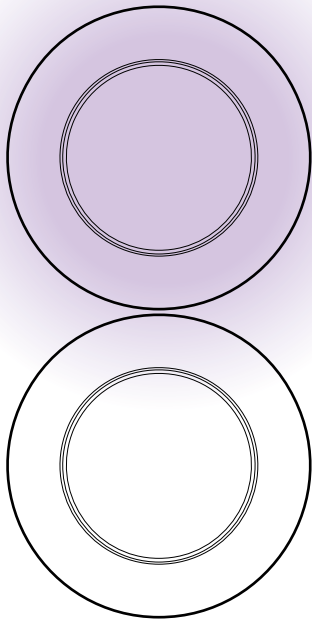


LEDS GO
IN FORTE




1/1



EXTERIOR WALL

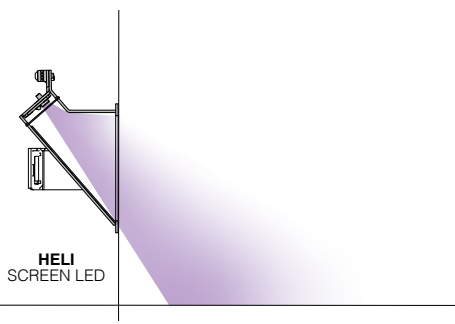

HELI
SCREEN LED



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

			LEDS GO IN FORTE	LEDS C R ST	HELI X SCREEN LED
MAINS DIM (FE) 11	21012 0298	min. 55	R (min. 3 LED A) *	R (min. 3 LED A) *	R (min. 3 LED A)
1-10V DIM 15	300 90 124	min. 55	R (min. 6 LED A) *	R (min. 6 LED A) *	R (min. 6 LED A)
DALI DIM 14	300 90 125	min. 55	R (min. 4 LED A) *	R (min. 4 LED A) *	R (min. 4 LED A)

INSTALLATION

CONCRETE BOX 151	302 19 21		O		
CONCRETE BOX TR 152	302 19 22		O		
CONCRETE BOX 187	270 11 187				O

* REMOTE INSTALLATION

OONO




How to describe Oono in one sentence?
*'A soft glow of light during golden hour,
 at the end of a sky-blue summers day...'*

That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.

It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass. It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors. It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold. It brings together the shimmer of dusk with the fresh start of dawn.

www.deltalight.com/oono

IP54



NEW
OONO

		IK04	OONO W S	OONO W M	OONO W L	
3000K / CRI>90	LED 8,6W / 1089lm / 500mA	IP54	MAINS	29611 9308 ◊		
	LED 12,4W / 1467lm / 700mA				29612 9308 ◊	
LED 17,2W / 2101lm / 500mA					29613 9300 ◊	
2700K / CRI>90	LED 8,6W / 1041lm / 500mA			29611 9208 ◊		
	LED 12,4W / 1403lm / 700mA				29612 9208 ◊	
	LED 17,2W / 2009lm / 500mA					29613 9200 ◊

◊ B ●
 220-240V / 50-60Hz






1/2

SCALE 1:1



EXTERIOR WALL



OONO
WS



**The shimmer of
dusk with the
fresh start of
dawn**

STIP

With Stip, you choose for either a round or square surface mounted wall luminaire for outdoor use. The round one can be used for general lighting, while the square version has an inhouse developed lens that throws the light to both sides, generating a line of light that is ideal to enlighten a pathway.

www.deltalight.com/stip

IP55



STIP W

R

S



3000K / CRI>90	LED 3.9W / 385lm / 350mA	IP55	223 54 83 ◇	223 55 83 ◇
			◇ A ● / N ●	
			100-240V / 50-60Hz INCL.GLASS	100-240V / 50-60Hz INCL.SYMMETRIC LENS

SKOV

Skov is perfect as a guidance light, both for in- and outdoors. The luminaire stands out in slenderness, with only 32mm of thickness for a surface mounted wall application with integrated power supply. The combination of a recessed LED array with the specific design of Skov generates visibility along the path without being obtrusive for the passer-by. The light leaving the luminaire gently falls onto the veil of Skov, revealing a soft light effect to guide you wherever the path may take you.

www.deltalight.com/skov

IP54



SKOV


S

M



3000K CRI>90	LED 3,5W / 470lm / 250mA	IP54	25314 9300 ◇	25312 9300 ◇
	LED 9,6W / 1281lm / 500mA			
2700K CRI>90	LED 3,5W / 442lm / 250mA		25314 9200 ◇	25312 9200 ◇
LED 9,6W / 1204lm / 500mA				
			◇ A ● / N ● / W ○	
			220-240V / 50-60Hz	220-240V / 50-60Hz




1/4

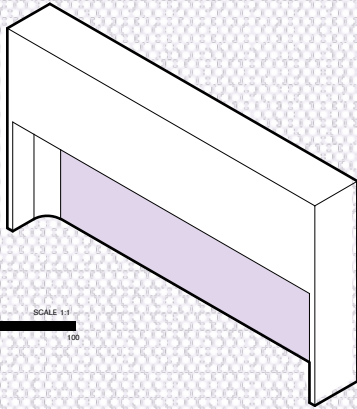

SKOV
M/S




STIP
R/S




EXTERIOR WALL

Light as a guide



SKOV
M






SKOV
M

VISION OUT

Since its launch, Vision has already won multiple awards, thanks to its impressive and nicely delineated parabolic light pattern on the wall. This classic is available both for indoor and outdoor use. Vision thanks its powerful light effect to the combination of LED technology in combination with a lens, giving its unique design and playful light effect.

www.deltalight.com/vision

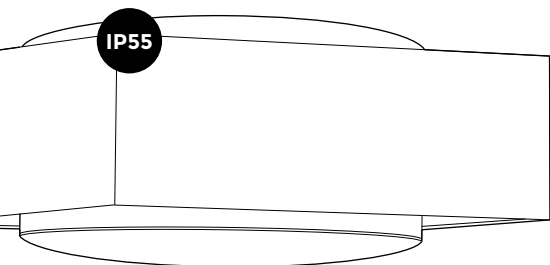

VISION

OUT LED

S OUT LED

3000K CRI>80	2 x LED 1.4W / 182lm / 500mA	IP55
-----------------	------------------------------	------

278 27 22 ◊

278 26 22 ◊


◊ A ● / N ●
120-240V / 50-60Hz
□

A TOPIX

This multi award-winning luminaire ensures a playful effect and offers a lot of freedom. On its own, Topix wows you with its peculiar yet attractive design, when put together, you can create artistic clusters of light. Topix comes for in- and outdoors, giving you the opportunity to make your façade stand out.

www.deltalight.com/topix

IP55



TOPIX

L X

3000K CRI>80	2 x LED 3.5W / 478lm / 350mA	IP55
-----------------	------------------------------	------

304 17 52 ◊


◊ A ● / G ●
120-240V / 50-60Hz
□



FIND ME ONLINE





EXTERIOR WALL

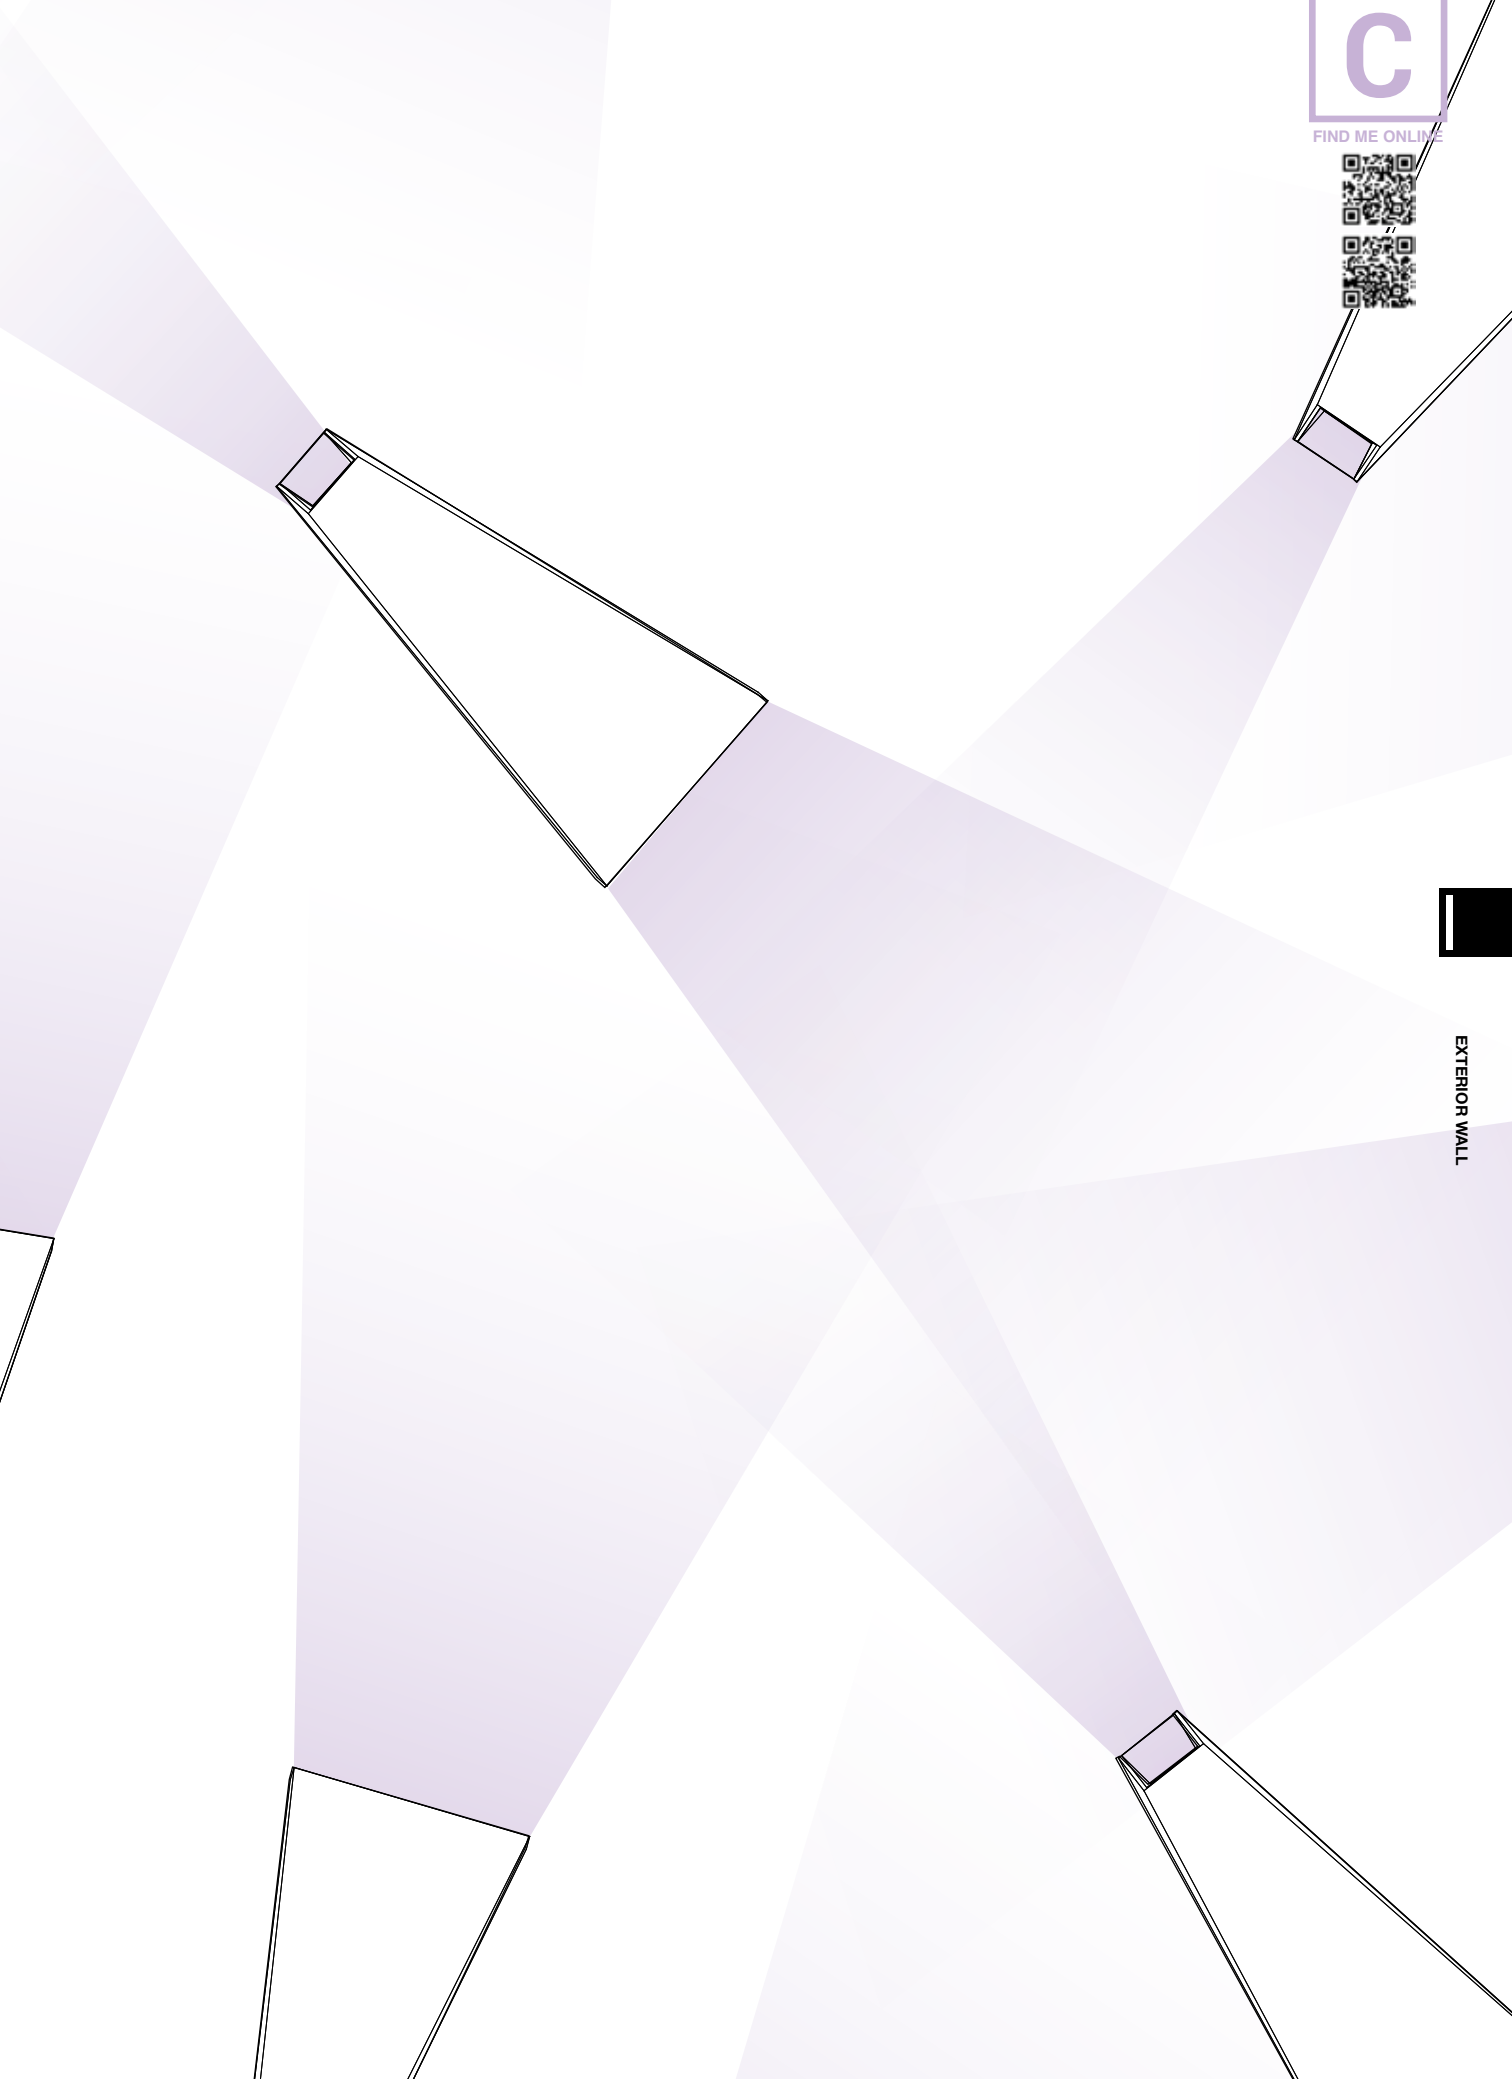

TIGA

A medium sized rectangular lighting fixture, delivering a pleasant up and downward light effect on your wall. As a surface mounted wall unit, Tiga is perfect for both residential use or for hospitality usage in hotels and restaurants. Standard, Tiga creates a wide beam effect for both down- and uplight, while Tiga BS allow you to play with a combination of a wide and small beam effect within 1 luminaire. Despite its IP65 rating for outdoor use, this unit also feels very comfortable when used indoors.

www.deltalight.com/tiga





TIGA				IK06	LED BS	LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP65	MAINS		223 752 811 932 ED8 ◇	223 751 811 932 ED8 ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA				223 752 811 922 ED8 ◇	223 751 811 922 ED8 ◇
					◇ A ● / G ● / W ○	
					220-240V / 50-60Hz	
					□	



MONO II

Mono is a well-known member of the Delta Light outdoor range. It was the first outdoor wall fixture within the range that combines a LED module with a lens, resulting in a far-reaching and strongly delineated lighting effect. The Mono's timeless and sharp contoured design adds a contemporary touch to any façade.


www.deltalight.com/mono





MONO II					LED	DOWN-UP LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP54			223 13 811 930 ◇	
	2 x LED 7.1W / 812lm / 350mA				223 53 812 930 ◇	
					◇ A ● / N ●	
					220-240V / 50-60Hz	100-240V / 50-60Hz
					◇	□



1/1

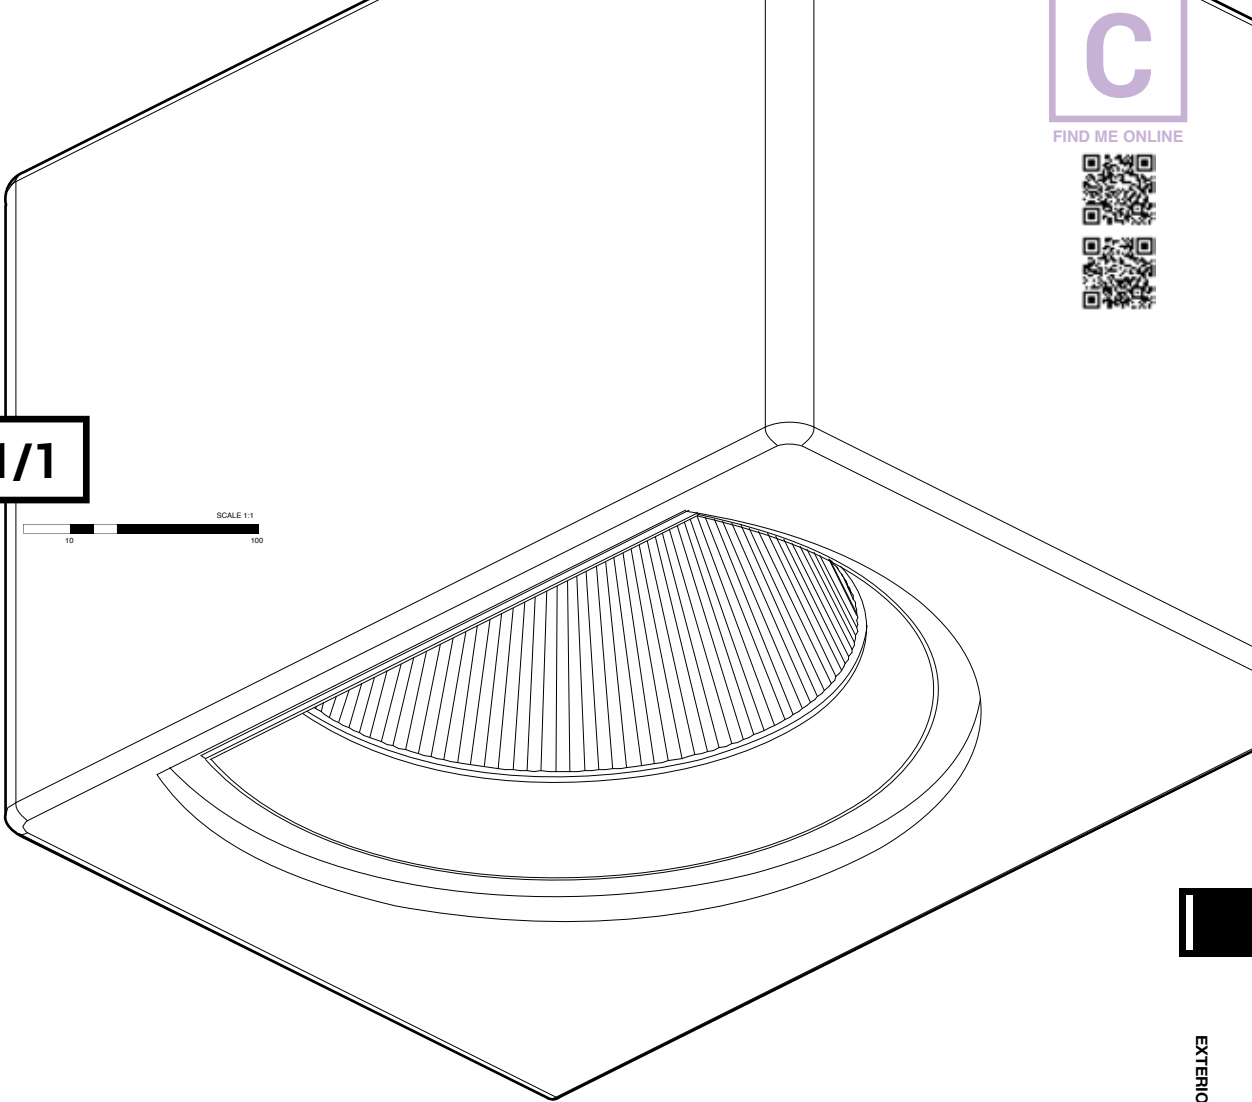

EXTERIOR WALL

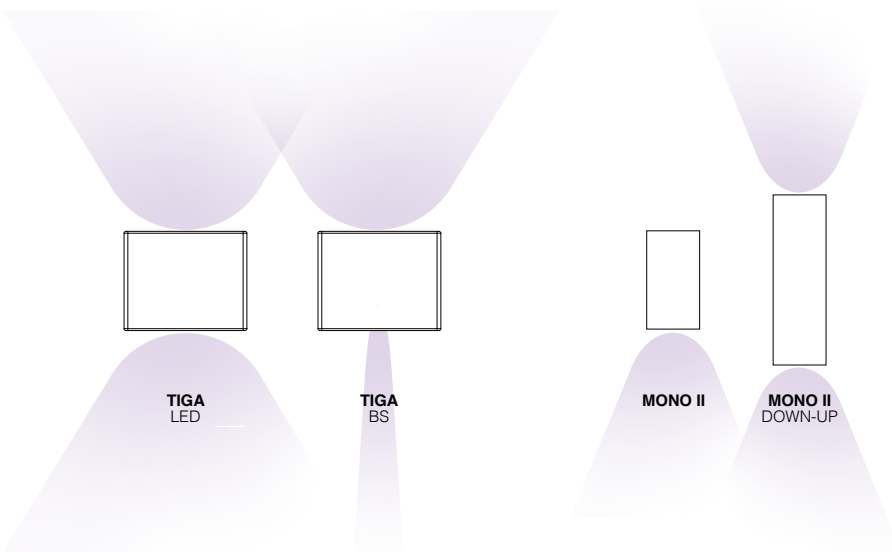

NOCTA

As a range of full IP65 wall fixtures, Nocta is the example that form and function can be merged into one. Build around 4 types of optics, Nocta is available in a cylindrical or cubical design, both with a down or down-up light emission. The cubical version also has a wider brother with double light beams, a way to add a more decorative touch onto the wall. All of them have some functional design elements in common that define Nocta.

At the front Nocta has a raised collar to improve the visual comfort for the passer-by, while at the back the collar has a moon-shaped cut-out to allow excess water to seep out. An additional plus to this cut-out is that the light directly hits the wall Nocta is mounted onto, resulting in the perfect light effect.

Although small in size, Nocta has some installation benefits hidden away inside also: space for an integrated DALI power supply, possibility to loop through for the down-up versions and an internal connector for time-saving installation.

And to make Nocta futureproof? All individual parts can easily be disassembled, allowing an update of the LEDboard when needed.


With its 4 different light effects, Nocta offers a variety of options to the designer. A spot version for powerful, slender streaks of light, a wide flood version for a single or double V-shaped light effect, a very wide flood with a distinctive delineated output on the wall and the double shaped beams of the wider Nocta for an additional playful touch.

www.deltalight.com/nocta

IP65

**MOON
SHAPED
CUT-OUT**

Allows excess water to seep out,
and let's the light directly hit the
wall for the perfect light effect.

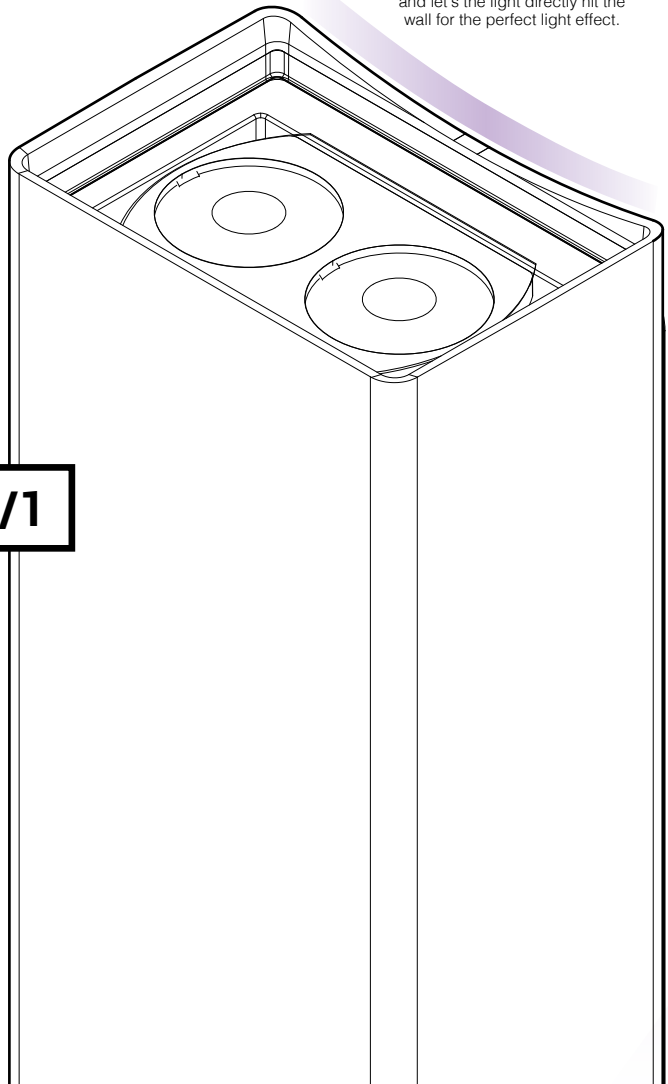

1/1


SCALE 1:1






A VARIETY IN SHAPES AND OPTICS


NOCTA
RD 80



NOCTA
SQ 85



NOCTA
SQ 155



SP
SPOT



WFL
WIDE FLOOD



VWFL
VERY WIDE FLOOD



SP
SPOT




WFL
WIDE FLOOD



VWFL
VERY WIDE FLOOD



2VWFL
2 x VERY WIDE FLOOD

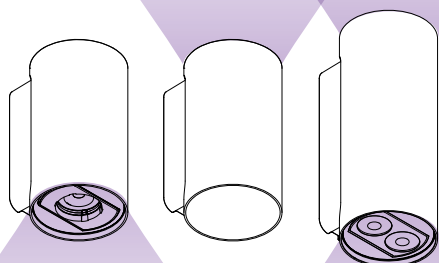



DOWN, UP or DOWN-UP

EXTERIOR WALL

NOCTA

NEW

NOCTA SQ



IK06

85

85 DOWN UP

			NON DIM		DALI DIM	
3000K CRI>90	2 x LED [A] 2W / 232lm / 700mA	SP	30118 9300 ◇			
		WFL	30119 9300 ◇			
	LED [Q] 5.8W / 734lm / 350mA	VWFL	30117 9300 ◇	30117 9305 ◇		
	UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA	SP			30121 9300 ◇	30121 9305 ◇
		WFL			30122 9300 ◇	30122 9305 ◇
UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL			30120 9300 ◇	30120 9305 ◇	
	2700K CRI>90	2 x LED [A] 2W / 221lm / 700mA	SP	30118 9200 ◇		
WFL			30119 9200 ◇			
LED [Q] 5.8W / 702lm / 350mA		VWFL	30117 9200 ◇	30117 9205 ◇		
UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA		SP			30121 9200 ◇	30121 9205 ◇
		WFL			30122 9200 ◇	30122 9205 ◇
UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA	VWFL			30120 9200 ◇	30120 9205 ◇	



◇ N ●

NON DIM: 100-240V / 50-60Hz
DALI DIM: 220-240V / 50-60Hz

◇ IP65

NEW

NOCTA SQ



IK06

155

155 DOWN UP

			NON DIM		DALI DIM	
3000K CRI>90	4 x LED [A] 2W / 232lm / 700mA	SP	30126 9300 ◇			
		WFL	30127 9300 ◇			
	LED [Q] 5.8W / 734lm / 350mA	VWFL	30123 9300 ◇	30123 9305 ◇ *		
	2 x LED [A] 2W / 232lm / 700mA	2VWFL	30124 9300 ◇			
	UP 4 x LED [A] 2W / 232lm / 700mA DOWN 4 x LED [A] 2W / 232lm / 700mA	SP			30131 9300 ◇ *	30131 9305 ◇ *
		WFL			30132 9300 ◇ *	30132 9305 ◇ *
	UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL			30128 9300 ◇	30128 9305 ◇ *
UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA		2VWFL			30129 9300 ◇	30129 9305 ◇ *
	2700K CRI>90	4 x LED [A] 2W / 221lm / 700mA	SP	30126 9200 ◇		
WFL			30127 9200 ◇			
LED [Q] 5.8W / 702lm / 350mA		VWFL	30123 9200 ◇	30123 9205 ◇ *		
2 x LED [A] 2W / 221lm / 700mA		2VWFL	30124 9200 ◇			
UP 4 x LED [A] 2W / 221lm / 700mA DOWN 4 x LED [A] 2W / 221lm / 700mA		SP			30131 9200 ◇ *	30131 9205 ◇ *
		WFL			30132 9200 ◇ *	30132 9205 ◇ *
UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA		VWFL			30128 9200 ◇	30128 9205 ◇ *
	UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA	2VWFL			30129 9200 ◇	30129 9205 ◇ *

◇ N ●

100-240V / 50-60Hz
* 220-240V / 50-60Hz

◇ IP65





SP
SPOT

WFL
WIDE FLOOD

VWFL
VERY WIDE FLOOD

2VWFL
2 x VERY WIDE FLOOD



NEW

NOCTA RD

IK06

80

80 DOWN UP

		NON DIM		DALI DIM		NON DIM		DALI DIM	
3000K CRI>90	2 x LED [A] 2W / 232lm / 700mA	SP	30112 9300	◇					
		WFL	30113 9300	◇					
	LED [Q] 5.8W / 734lm / 350mA	VWFL	30111 9300	◇	30111 9305	◇			
	UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA	SP				30115 9300	◇	30115 9305	◇
		WFL				30116 9300	◇	30116 9305	◇
UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL				30114 9300	◇	30114 9305	◇	
2700K CRI>90	2 x LED [A] 2W / 221lm / 700mA	SP	30112 9200	◇					
		WFL	30113 9200	◇					
	LED [Q] 5.8W / 702lm / 350mA	VWFL	30111 9200	◇	30111 9205	◇			
	UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA	SP				30115 9200	◇	30115 9205	◇
		WFL				30116 9200	◇	30116 9205	◇
UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA	VWFL				30114 9200	◇	30114 9205	◇	

◇ N ●


NON DIM: 100-240V / 50-60Hz
DALI DIM: 220-240V / 50-60Hz

◇ IP65

WALKER

Walker II splits the light open. Starting from 1 light source, Walker II is designed to guide the light into two directions to provide a double light effect on the surface below. The light falls on the V-shaped inner part of the luminaire, breaking it open and throwing it to the front- and backside of the luminaire. Walker II can serve as a guiding light on your wall or pathway, as it comes as a wall luminaire and as a bollard. Different heights and multiple colour combinations can be combined to your preference to create the perfect setting.

www.deltalight.com/walker



WALKER II

W

3000K / CRI>90	LED 5,7W / 791lm / 350mA	IP54	22618 9300 ◊	22619 9300 ◊
2700K / CRI>90	LED 5,8W / 742lm / 350mA		22618 9200 ◊	22619 9200 ◊
			◊ A ● / N ●	◊ A -N ●● / N-GC ●●
100-240V / 50-60Hz				




BACKSPACE

In many ways, Backspace II is a joy for the eye, be it by its slender design, by its pleasant light effect or by its playful colour combinations. Backspace II is designed to create a 2-way light effect on the wall, the choice to install it in a horizontal or vertical way is up to you. By mounting the light source in the front part of the luminaire, it is perfectly shielded from looking directly into the source.

Backspace II can be used for interior lighting in a white, grey or dark grey finish or for outdoor settings in grey or dark grey.


www.deltalight.com/backspace



BACKSPACE II

X

3000K / CRI>90	LED 9,6W / 1281lm / 500mA	IP54	10214 9300 ◊
2700K / CRI>90	LED 9,7W / 1204lm / 500mA		10214 9200 ◊
			◊ A ● / N ●
220-240V / 50-60Hz			

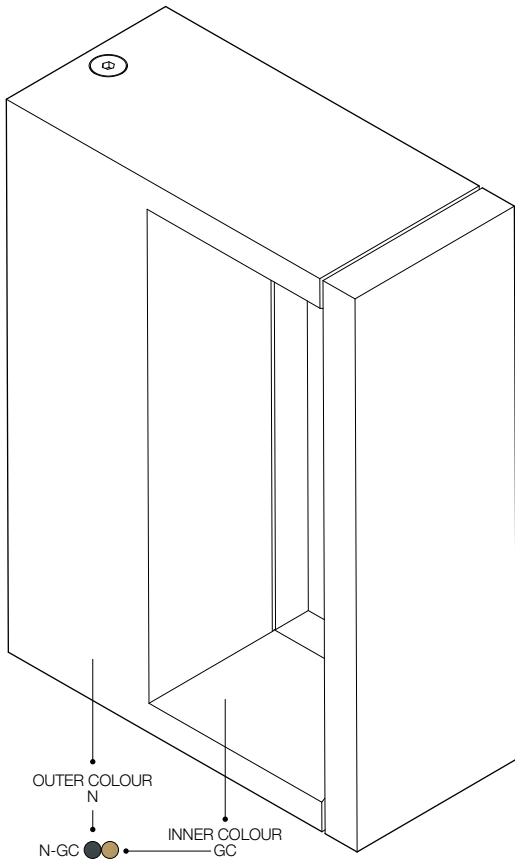

OUTER COLOUR

N


N-GC

INNER COLOUR


GC

READ MY COLOUR

1/2

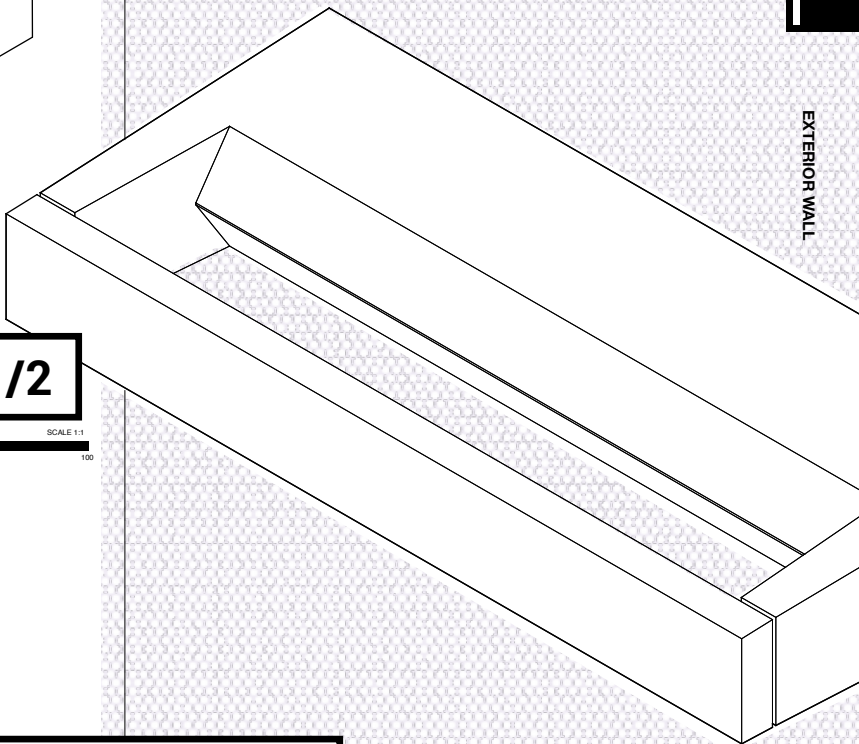

EXTERIOR WALL



Split the light

MONTUR

With Montur we offer a highly original interpretation of an archetypical concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look.




The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.

www.deltalight.com/montur


IP54

IP65

A highly original interpretation of an archetypical concept





MONTUR		IK07	MINI M	S LED	M LED	M E27
3000K / CRI>90	LED 4,2W / 617lm / 350mA	IP65	232 012 83 ◊			
	LED 6,3W / 925lm / 350mA			232 112 83 ◊	232 212 83 ◊	
2700K / CRI>90	LED 4,2W / 584lm / 350mA		232 012 82 ◊			
	LED 6,3W / 877lm / 350mA			232 112 82 ◊	232 212 82 ◊	
A60 max.40W						232 213 00 ◊
				◊ B ● 100-240V / 50-60Hz INCL.GLASS OPAL		◊ B ● E27Ls / 100-240V / 50-60Hz INCL.GLASS CLEAR




MONTUR		IK08	L PC LED
3000K / CRI>90	LED 14,7W / 2159lm / 700mA	IP54	232 318 83 ◊
			◊ B ● 220-240V / 0 50-60Hz INCL.PC OPAL




**Milky, cone shaped core,
with a transparent glass
surface**

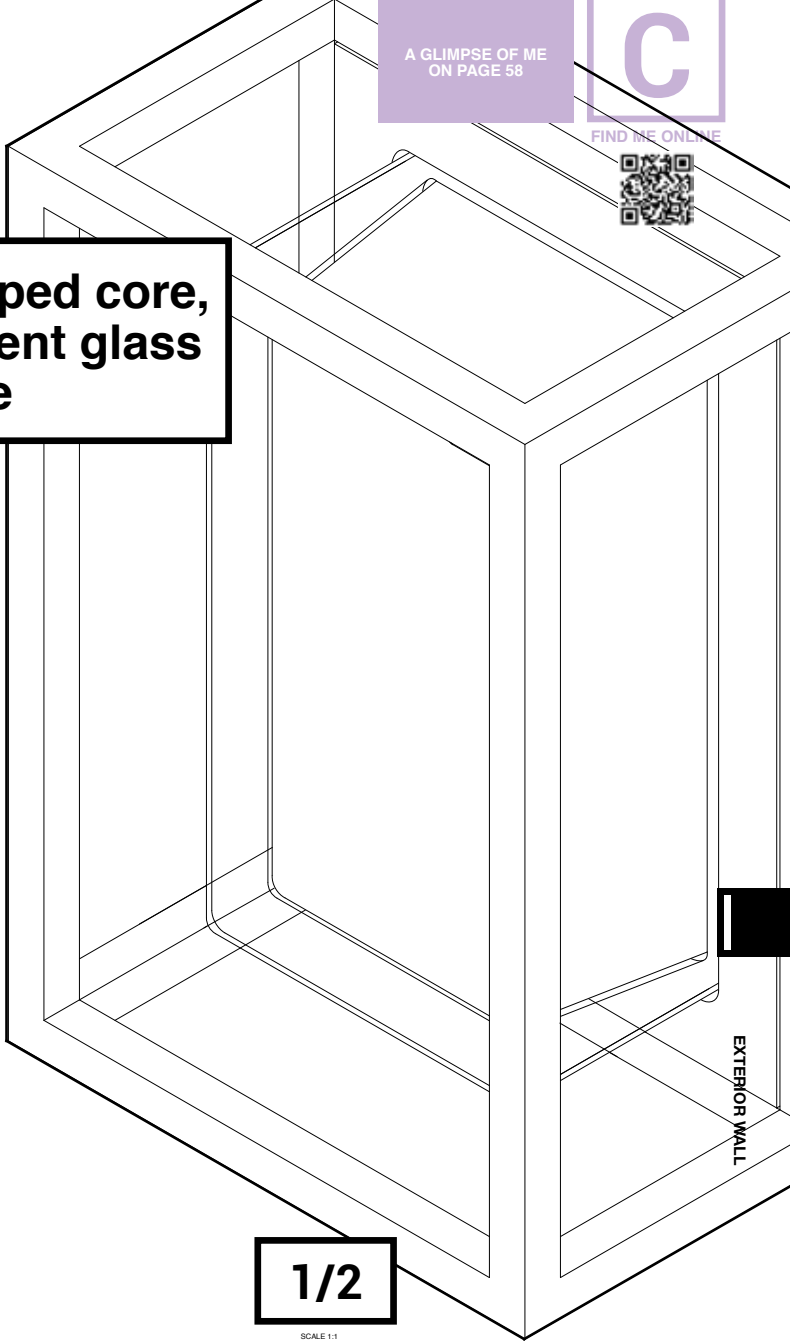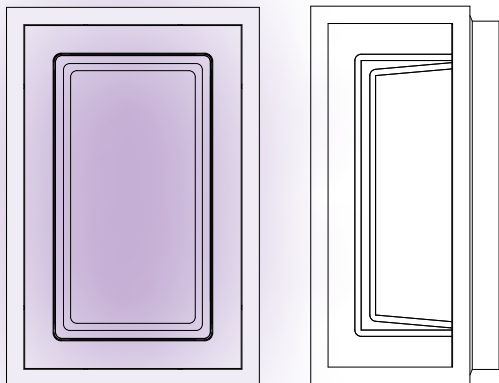


EXTERIOR WALL



MONTUR
LED



MONTUR
E27



MONTUR
BOLLARDS

1/2



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

MONTUR

LED LAMP	MINI M	S LED	M LED	M E27	L PC LED	SQL LED
MORE INFO TECHNICAL CHAPTER				○		

SPY 39 W

Spy 39 W translates elegance and finesse into an outdoor wall light. Composed as a slender cylinder, Spy 39 W is available as a minimalistic down- or down-up luminaire. Despite its refined design, Spy 39 W succeeds in adding body to your exterior with its prolonged tubes and distinctive light effect.

www.deltalight.com/spy

IP55



SPY 39

W

W DOWN-UP

				W	W DOWN-UP
3000K CRI>90	LED 3.9W / 385lm / 350mA 2 x LED 3.9W / 385lm / 350mA	IP55	13°	24148 9310 ◊	24147 9310 ◊
2700K CRI>90	LED 3.9W / 385lm / 350mA 2 x LED 3.9W / 385lm / 350mA			24148 9210 ◊	24147 9210 ◊

◊ B ●
220-240V / 50-60Hz



ULTRA

The looks of Ultra are very straightforward: its small mounting bracket is perfectly hidden away behind the compact tubular shape of the luminaire. Mounted on the wall, it creates a comfortable down or down-up effect onto the façade.

www.deltalight.com/ultra

IP55



ULTRA X

LED

DOWN-UP LED


				LED	DOWN-UP LED
3000K CRI>90	LED 7.1W / 812lm / 350mA 2x LED 7.1W / 812lm / 350mA	IP55	NON DIM	279 61 811 930 ◊	279 61 812 930 ◊
			MAINS		

100-240V / 50-60Hz


◊ A ● / N ● / W ○

220-240V / 50-60Hz






ULTRA
X

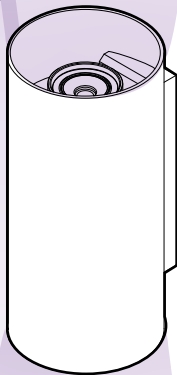

ULTRA
X DOWN-UP

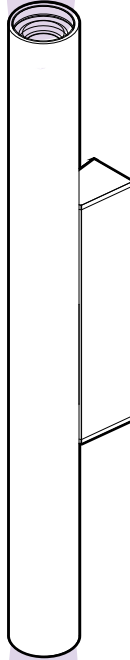

SPY 39
W DOWN-UP



SPY 39
W

1/4



SCALE 1:1



EXTERIOR WALL

KIX


Flexible, subtle, elegant and powerful: these are the keywords that describe the Kix perfectly. Despite its low-profile appearance, Kix excels in light output and quality, ideal for walkway lighting or other landscape applications. Kix is easy and flexible to use thanks to the adjustable head, designed to provide optimal cooling and eliminate glare.

Kix is available for installation on wall or floor, to strap around a tree or to mount in soft green areas with a pin. In addition to the more robust version of Kix, there is also a S(mall) and M(edium) version available. Kix S combines a powered with a lens, resulting in a nice 10° light beam. All models have an IP65 rating and are available in alu grey or dark grey.


www.detalight.com/kix




CURRENT CONTROLLED VS 24V-DC




0-180°/350°



0-180°/350°



IK07 0-180°/350°






IK07 0-90°/350°


A

KIX		S	M	II	II HP	
3000K / CRI>80	LED [A] 1W / 132lm / 350mA	232 08 831 ◊				
	LED [A] 1.4W / 182lm / 500mA					
3000K / CRI>90	LED [A] 2W / 245lm / 700mA	13528 8310 ◊				
	LED 2W / 245lm / 24V-DC (PWM)					
	LED 6.4W / 587lm / 350mA		232 12 933 ◊			
	LED 7.1W / 812lm / 350mA	IP65	11°		13534 9310 ◊	
			30°		13534 9320 ◊	
			55°		13534 9330 ◊	
			120°		13533 9300 ◊	
	LED [J] 16.3W / 2309lm / 500mA	IP65	11°			13532 9310 ◊
30°					13532 9320 ◊	
55°					13532 9330 ◊	
		◊ N ●	◊ A ● / N ●	◊ A ● / N ●	◊ A ● / N ●	
		INCL. 1 x CABLE H05 RN-F 2 x 1mm ² 2m	100-240V / 50-60Hz INCL. 1 x KAP STRIPER B (REMOVABLE)	100-240V / 50-60Hz		
		◻	◻	◻	◻	

On sturdy surfaces, in between the green, strapped around a tree

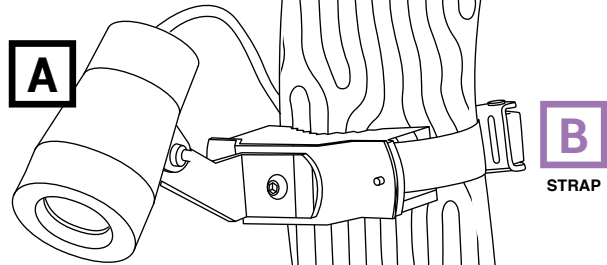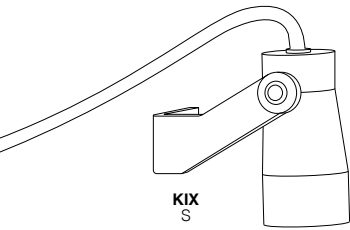

VISUAL COMFORT

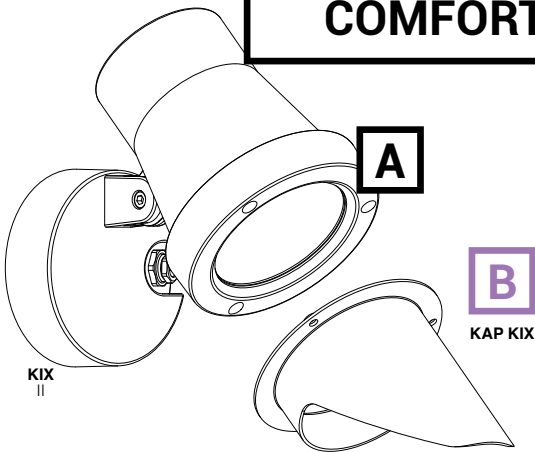

EXTERIOR WALL

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			KIX			
			S	M	II	II HP
			mA	24V-DC		
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35		R*		
DALI DIM - 60W (PWM)	21012 0135	150 x 53 x 35		R*		
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
1-10V DIM 16	300 90 63	i min. 84	R*			R*
DALI DIM 16	300 90 63	i min. 84	R*			R*
HONEYCOMB / LENS / GLASS						
HONEYCOMB (only + KAP KIX)	232 10 03 N				A	A
KAP KIX	232 10 00 N				A	A
INSTALLATION						
STRAP	232 20 99	Max. Ø200mm	O	O		
PIN 16	229 01 16	Floor mounting	O	O		

* REMOTE INSTALLATION

B

SOIREE


The Soiree range was designed to be voluminous, lightweight and transparent. Its sophisticated form creates a dense and decorative effect, filled with a warm light.

The interaction between the pure circular and rectangular forms, with the warm light sources and the symmetric configurations, triggers a dynamic tension. The Soiree takes its inspiration from many angles. From the play of light and shadow in architecture, to natural light effects, the shape of everyday objects and sculptural art.

The result is a nest of light, made of circles or rectangles, both structural and decorative, generating a seductive luminous effect.

www.deltalight.com/soiree






IP54



SOIREE			WR X	WS X	WS X DOWN-UP
3000K CRI>90	LED 3.2W / 309lm / 350mA 2 x LED 3.2W / 309lm / 350mA	IP54	24019 9300 ◇	24018 9300 ◇	24020 9300 ◇
2700K CRI>90	LED 3.2W / 297lm / 350mA 2 x LED 3.2W / 297lm / 350mA		24019 9200 ◇	24018 9200 ◇	24020 9200 ◇

◇ B ●
100-240V / 50-60Hz



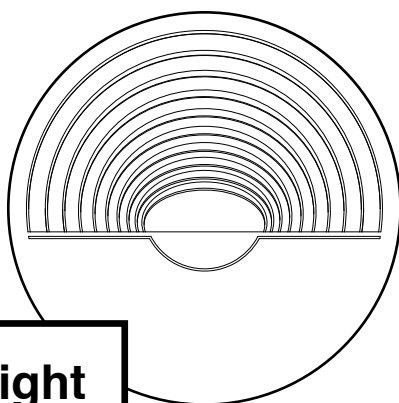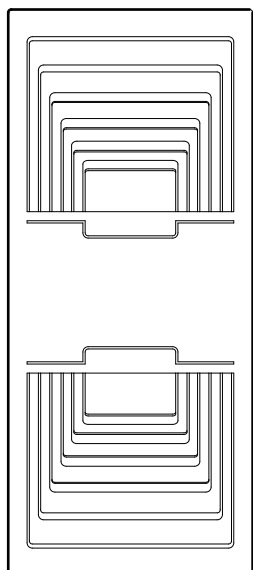

A nest of light




EXTERIOR WALL

INDEX

Exterior Floor Recessed



Hi!
We are
new to the
range.

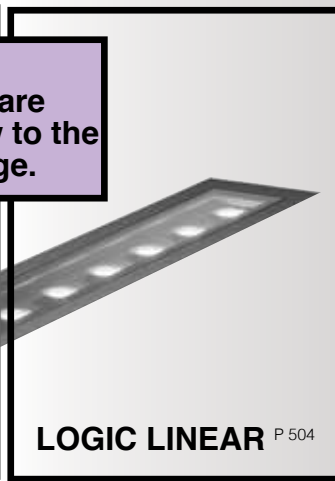

INDEX

Exterior Floor Surface



New
members
to the
family!



Want the full
Delta Light
experience?
Have a look on our
website and plunge in
inspiration, application
and product details.



I'm not alone.
You can find me &
my family members
in other chapters
within this Lighting
Bible.



ELBO P 526



WALKER P 526



OBLIX P 528



STRIPER P 530



MONOPOL P 530




BAZIL P 532




POLESANO P 534

LOGIC

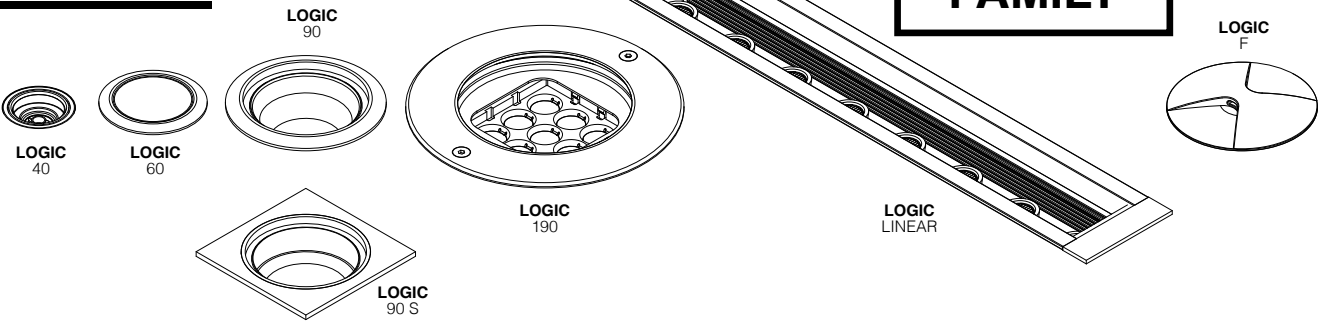


FAMILY

LOGIC 190 R OK

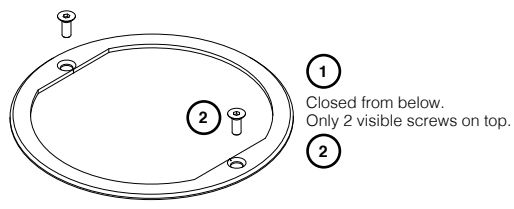


- 1 Closed from below. Only 2 visible screws on top.
- 2

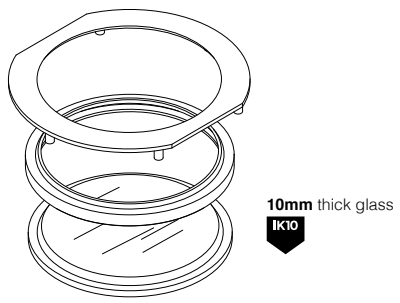

10mm thick glass
IK10

LED CASSET® TECHNOLOGY

Logic 190 R is based on Delta Light's LED Caset® technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a clean 8° or 14° beam angle. Other beam angles or other light effects are being obtained by adding microlenses in front, sculpting the light into a 26° or 47° beam angle or into a linear or wallwash effect.




Integrated (DALI) Power Supply

Thanks to its multiple reflector options, Logic can be used to accentuate trees or sculptures, to light up facades or large garden features, to create a sense of depth or indicate the right direction along paths and driveways. The choice of installation – trimless or with trim – and its round or square shape allow you to match look & feel with the design of the building. Within the same family, Logic W can be used as guidance light, built into the wall.

With Logic 190 R and Logic Linear, we extend on the existing floor recessed range of Logic luminaires.

Widening the range expands the possible use from residential to more commercial applications. Logic 190 R and the linear Logic are fully adapted to these applications.


www.deltalight.com/logic

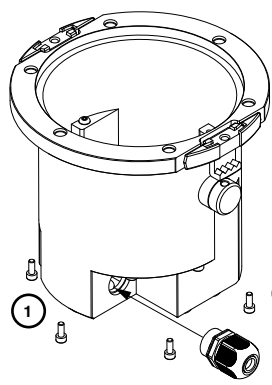

0-25° 360°
Fully adjustable on-side without opening the fixture.

IP67

IP67
Integrated moisture lock + IP68 Connector

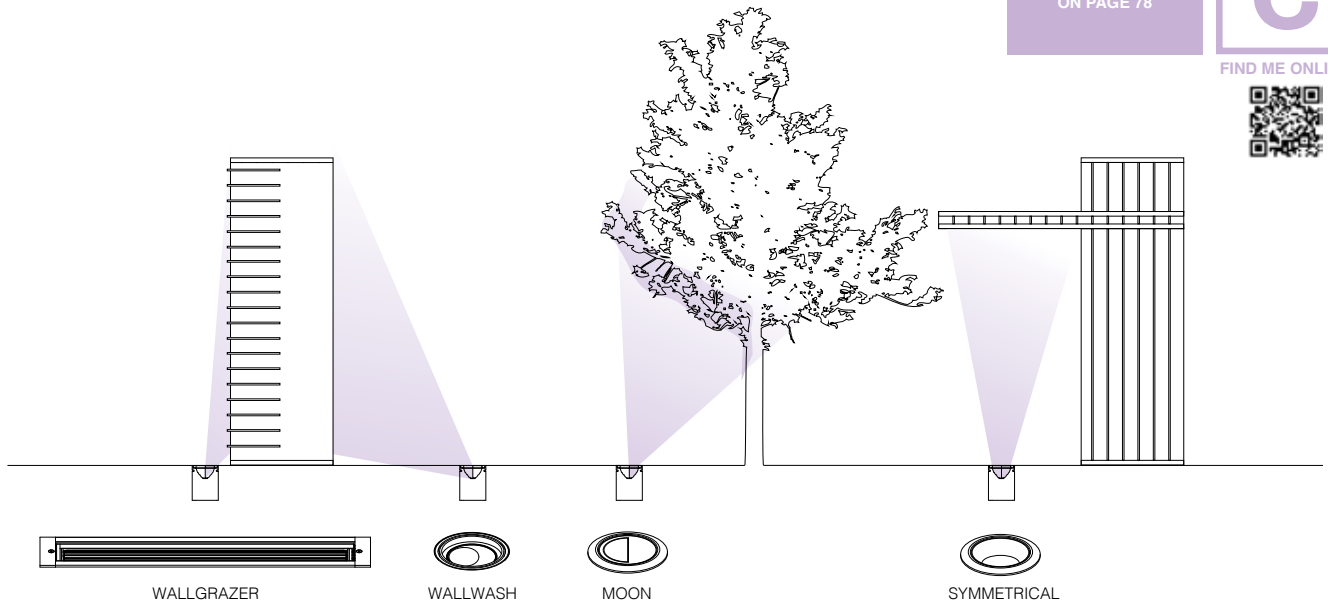

LOGIC

	40	60	90	190		LINEAR	F1 / F2
	REFLECTOR	REFLECTOR	REFLECTOR	LENS	REFLECTOR	LENS	
LIGHT SOURCE							
LED	3,9W - 385lm	2W - 229lm 3,2W - 319lm 4W - 335lm	5,7W - 519lm 8,6W - 1089lm 12,4W - 1467lm	11,9W - 1406lm 12,6W - 1530lm	13W - 1855lm 14,7W - 2076lm	14,4W - 1726lm 28,8W - 3452lm	0,6W - 40lm

OPTICS

6°		•					
8°				•			
11°			•				
14°				•			
15°	•					•	
18°					•		
20°		•					
25°						•	
26°				•			
30°			•				
32°					•		
40°						•	
45°					•		
47°				•			
55°			•				
LINEAR SPREAD					•		
MOON	•	•					
WALLWASH		•	•	•			
WALLGRAZER (60° x 10°)						•	

COLOUR TEMPERATURE

2700K				•	•	•	
3000K	•	•	•	•	•	•	•
4000K				•	•	•	

CONTROL

EXCL. POWER SUPPLY	•	•	•				•
NON DIM			•	•	•	•	
MAINS DIM							
1-10V DIM							
DALI DIM				•	•	•	
WIRELESS DIM							

COLOUR

ALU GREY ●							•
ANODIZED ●	•	•	•				
BLACK ●		•	•				
DARK GREY ●						•	
INOX ●	•			•	•	•	

SHAPE


ROUND	•	•	•	•	•		•
SQUARE			•				
LINEAR						•	

ACCESSORIES


HONEYCOMB				•	•	•	
VISOR	•						
ANTI-GLARE SHIELD						•	

• STANDARD
• NOT FOR ALL VERSIONS

LOGIC 190 R



LOGIC
190 R



NEW

LOGIC 190

		IK10	R				R SP		
			NO ACCESSORY	HONEYCOMB	LINEAR	WALLWASH	NO ACCESSORY	HONEYCOMB	
4000K CRI>90	LED 11,9W / 1537lm / 600mA	NON DIM	8°					30221 9410 ◇	30222 9410 ◇
			14°	30211 9410 ◇	30212 9410 ◇	30213 9400 ◇	30215 9400 ◇		
			26°	30211 9420 ◇	30212 9420 ◇	-	-		
			47°	30211 9430 ◇	30212 9430 ◇	-	-		
3000K CRI>90	LED 11,9W / 1406lm / 600mA	NON DIM	8°					30221 9310 ◇	30222 9310 ◇
			14°	30211 9310 ◇	30212 9310 ◇	30213 9300 ◇	30215 9300 ◇		
			26°	30211 9320 ◇	30212 9320 ◇	-	-		
			47°	30211 9330 ◇	30212 9330 ◇	-	-		
2700K CRI>90	LED 11,9W / 1344lm / 600mA	NON DIM	8°					30221 9210 ◇	30222 9210 ◇
			14°	30211 9210 ◇	30212 9210 ◇	30213 9200 ◇	30215 9200 ◇		
			26°	30211 9220 ◇	30212 9220 ◇	-	-		
			47°	30211 9230 ◇	30212 9230 ◇	-	-		

◇ INOX

NON DIM: 220-240V / 50-60Hz


DALI DIM: 110-240V / 50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR

DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR

IEC 60598 2-13 : Max 500Kg - ESG 10mm

◇ IP67



A

NEW

LOGIC 190

		IK10	R OK				R OK SP			
			NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB	
4000K CRI>90	LED 11,9W / 1537lm / 600mA	NON DIM	8°						30223 9410 ◇	30224 9410 ◇
			14°	30216 9410 ◇	30217 9410 ◇	30218 9400 ◇	30219 9400 ◇	30220 9400 ◇		
			26°	30216 9420 ◇	30217 9420 ◇	-	-			
			47°	30216 9430 ◇	30217 9430 ◇	-	-			
3000K CRI>90	LED 11,9W / 1406lm / 600mA	NON DIM	8°						30223 9310 ◇	30224 9310 ◇
			14°	30216 9310 ◇	30217 9310 ◇	30218 9300 ◇	30219 9300 ◇	30220 9300 ◇		
			26°	30216 9320 ◇	30217 9320 ◇	-	-			
			47°	30216 9330 ◇	30217 9330 ◇	-	-			
2700K CRI>90	LED 11,9W / 1344lm / 600mA	NON DIM	8°						30223 9210 ◇	30224 9210 ◇
			14°	30216 9210 ◇	30217 9210 ◇	30218 9200 ◇	30219 9200 ◇	30220 9200 ◇		
			26°	30216 9220 ◇	30217 9220 ◇	-	-			
			47°	30216 9230 ◇	30217 9230 ◇	-	-			

◇ INOX

NON DIM: 220-240V / 50-60Hz

DALI DIM: 110-240V / 50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR


DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR

IEC 60598 2-13 : Max 500Kg - ESG 10mm

◇ IP67




FIND ME ONLINE



LOGIC
190 R REFLECTOR

NEW

LOGIC 190



IK10

R REFL

		NO ACCESSORY		HONEYCOMB	
4000K CRI>90	LED 13W / 1963lm / 400mA	NON DIM	18°	30225 9410 ◊	30226 9410 ◊
			DIM	30225 9420 ◊	30226 9420 ◊
			45°	30225 9430 ◊	30226 9430 ◊
			18°	30225 9310 ◊	30226 9310 ◊
3000K CRI>90	LED 13W / 1855lm / 400mA	NON DIM	32°	30225 9320 ◊	30226 9320 ◊
			45°	30225 9330 ◊	30226 9330 ◊
			18°	30225 9210 ◊	30226 9210 ◊
2700K CRI>90	LED 13W / 1775lm / 400mA	NON DIM	32°	30225 9220 ◊	30226 9220 ◊
			45°	30225 9230 ◊	30226 9230 ◊
			18°	30225 9415 ◊	30226 9415 ◊
4000K CRI>90	LED 13W / 1963lm / 400mA	DALI	32°	30225 9425 ◊	30226 9425 ◊
			45°	30225 9435 ◊	30226 9435 ◊
			18°	30225 9315 ◊	30226 9315 ◊
3000K CRI>90	LED 13W / 1855lm / 400mA	DALI	32°	30225 9325 ◊	30226 9325 ◊
			45°	30225 9335 ◊	30226 9335 ◊
			18°	30225 9215 ◊	30226 9215 ◊
2700K CRI>90	LED 13W / 1775lm / 400mA	DALI	32°	30225 9225 ◊	30226 9225 ◊
			45°	30225 9235 ◊	30226 9235 ◊
			18°	30225 9415 ◊	30226 9415 ◊

◊ INOX

NON DIM: 220-240V / 50-60Hz

DALI DIM: 110-240V / 50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 10mm

◊ IP67

Innovation in design

Logic 190 R OK is fully adjustable on-site, without the need of opening the fixture. As such, it can be rotated 360° and tilted up to 25°, without any possible damage by ingress of water or dust. It even goes the extra mile, as it can be adjusted while installed into the floor, allowing a perfect alignment of light effect on architecture. By tightening the flange onto the housing from below, the only visible screws on top of the fixture are the ones to remove the flange in order to adjust the LED engine for an optimal light effect. A perfect merge from design and functionality, as it minimizes possible galvanic corrosion.

Smart design

Within Logic 190 R, we opt for a clever re-use of existing building blocks. LED engine, optics and accessories are shared components with the Frax family, a range of exterior projectors. As such we do not only create a uniform look and feel for the end-user (both in design and light effect), we also optimize the internal supply chain to build and assemble our product portfolio. Future thinking: the building blocks of Logic 190 R are designed for future updates as well, thinking for example on integration of Tunable White or RGBW LEDs, new optics or installation in new or other materials. A toolbox of smart thinking.



Quality

Durable: Logic 190 R is designed to last, be it in the choice of material, components or the way it is assembled. An integrated moisture lock prohibits incoming water from below, in-house designed gaskets avoid water ingress from above to make it full IP67, a stainless steel flange holds the 10mm thick glass to ensure an IK10 value and an integrated DALI driver makes it dimmable and adaptable to the specific needs of the project. Standard Logic 190 R comes with 0,5m of cable and an integrated IP68-connector to facilitate a waterproof installation. Quality of light: Logic 190 R not only excels from the outside, it is the inner part that makes it shine. Precise optics that reduce unwanted spill of light, a set of individual collimator lenses to reduce glare, accessories that further refine the light or improve on visual comfort, the engine that makes a powerful lighting tool of Logic 190 R.

Family thinking

Next to the adjustable version, Logic 190 R also comes as a fix version to be used in more straightforward set-ups. All of these available with a range of optics: 8°, 14°, 26°, 47° and wallwash, applicable. To complete the range, a linear version is available within the same design language, adding even wallgrazer options that can be used to highlight vertical structured surfaces at night. As a straightforward upright, Logic 190 R also comes as reflector version with a single COB. Available with 3 different beam angles and a honeycomb version with improved visual comfort, the reflector version offers smooth beam projections without any unwanted disturbances.

EXTERIOR FLOOR

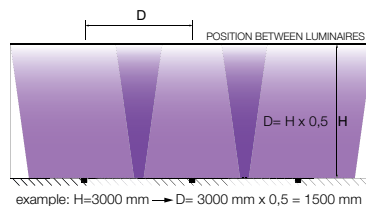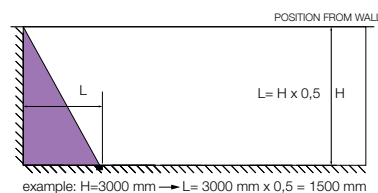

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		LOGIC 190				
		R	R SP	R OK	R OK SP	R REFL
INSTALLATION						
LOGIC 190 R BOX (max. 500KG)	30210 0010	R	R	R	R	R
LOGIC 190 ANTI VANDAL SCREWS 2 PCS	30210 0020	O	O	O	O	O
IP68 JUNCTION BOX 4P	431 99 02	O	O	O	O	O
IP68 Y-CONNECTOR 5P	21034 0150	O	O	O	O	O



LOGIC LINEAR


Based on the same principles as Logic 190 R, Logic Linear offers additional options in linear uplighting. As an individual projector or installed in a continuous line, these fittings are perfect to install around facades or other architectural elements. With its wallgrazing optics, Logic Linear easily lights up structured vertical surfaces to enhance the sense of depth of the structure and make them more lively.

Apart from its wallgrazing optics, Logic Linear offers 3 symmetrical beams and can be provided with an internal accessory to improve the visual comfort of the passer-by.

Opt for powder-painted aluminium front cover in Dark Grey or go for the additional benefits of the Inox cover for use in more harsh environments. Similar to the round version, Logic Linear comes with an integrated power supply and has the IP68-connector installed on the product to facilitate the in-ground installation.



Reduces unwanted backlight towards the passer-by



NEW

LOGIC LINEAR



		440				880					
		NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG	NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG		
4000K CRI>90	LED 14,4W / 1884lm / 650mA For 440 For 880 LED 28,8W / 3768lm / 650mA	NON DIM	15°	30811 9410 ◇	30812 9410 ◇			30814 9410 ◇	30815 9410 ◇		
			25°	30811 9420 ◇	30812 9420 ◇			30814 9420 ◇	30815 9420 ◇		
			40°	30811 9430 ◇	30812 9430 ◇			30814 9430 ◇	30815 9430 ◇		
			WG			30813 9400 ◇	30823 9400 ◇			30816 9400 ◇	30824 9400 ◇
3000K CRI>90	LED 14,4W / 1726lm / 650mA For 440 For 880 LED 28,8W / 3452lm / 650mA	NON DIM	15°	30811 9310 ◇	30812 9310 ◇			30814 9310 ◇	30815 9310 ◇		
			25°	30811 9320 ◇	30812 9320 ◇			30814 9320 ◇	30815 9320 ◇		
			40°	30811 9330 ◇	30812 9330 ◇			30814 9330 ◇	30815 9330 ◇		
			WG			30813 9300 ◇	30823 9300 ◇			30816 9300 ◇	30824 9300 ◇
2700K CRI>90	LED 14,4W / 1648lm / 650mA For 440 For 880 LED 28,8W / 3296lm / 650mA	NON DIM	15°	30811 9210 ◇	30812 9210 ◇			30814 9210 ◇	30815 9210 ◇		
			25°	30811 9220 ◇	30812 9220 ◇			30814 9220 ◇	30815 9220 ◇		
			40°	30811 9230 ◇	30812 9230 ◇			30814 9230 ◇	30815 9230 ◇		
			WG			30813 9200 ◇	30823 9200 ◇			30816 9200 ◇	30824 9200 ◇
4000K CRI>90	LED 14,4W / 1884lm / 650mA for 440 LED 28,8W / 3768lm / 650mA for 880	DALI	15°	30811 9415 ◇	30812 9415 ◇			30814 9415 ◇	30815 9415 ◇		
			25°	30811 9425 ◇	30812 9425 ◇			30814 9425 ◇	30815 9425 ◇		
			40°	30811 9435 ◇	30812 9435 ◇			30814 9435 ◇	30815 9435 ◇		
			WG			30813 9405 ◇	30823 9405 ◇			30816 9405 ◇	30824 9405 ◇
3000K CRI>90	LED 14,4W / 1726lm / 650mA for 440 For 880 LED 28,8W / 3452lm / 650mA	DALI	15°	30811 9315 ◇	30812 9315 ◇			30814 9315 ◇	30815 9315 ◇		
			25°	30811 9325 ◇	30812 9325 ◇			30814 9325 ◇	30815 9325 ◇		
			40°	30811 9335 ◇	30812 9335 ◇			30814 9335 ◇	30815 9335 ◇		
			WG			30813 9305 ◇	30823 9305 ◇			30816 9305 ◇	30824 9305 ◇
2700K CRI>90	LED 14,4W / 1648lm / 650mA for 440 for 880 LED 28,8W / 3296lm / 650mA	DALI	15°	30811 9215 ◇	30812 9215 ◇			30814 9215 ◇	30815 9215 ◇		
			25°	30811 9225 ◇	30812 9225 ◇			30814 9225 ◇	30815 9225 ◇		
			40°	30811 9235 ◇	30812 9235 ◇			30814 9235 ◇	30815 9235 ◇		
			WG			30813 9205 ◇	30823 9205 ◇			30816 9205 ◇	30824 9205 ◇

◇ N ●



220-240V / 0/150-60Hz

NON DIM: INCL. 1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR

DALI DIM: INCL. 1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR

IEC 60598 2-13 : Max 500Kg - ESG 8mm

◇ IP67

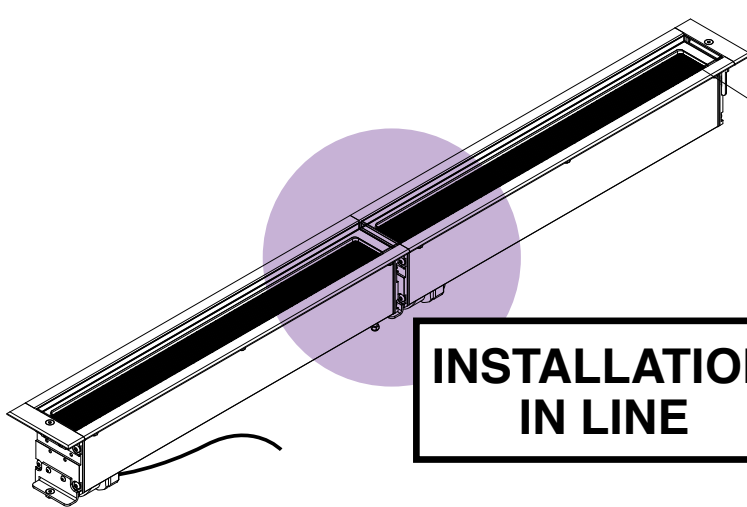


HONEYCOMB


For improved visual comfort

INSTALLATION IN LINE

NEW



BOX 440
Flattened side
to stay close to the wall
for perfect wallgrazing



LOGIC LINEAR INOX

		440				880			
		NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG	NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA For 880 LED 28,8W / 3768lm / 650mA	NON DIM	15°	30817 9410 ◇	30818 9410 ◇		30820 9410 ◇	30821 9410 ◇	
			25°	30817 9420 ◇	30818 9420 ◇		30820 9420 ◇	30821 9420 ◇	
			40°	30817 9430 ◇	30818 9430 ◇		30820 9430 ◇	30821 9430 ◇	
			WG			30819 9400 ◇	30825 9400 ◇		
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA	NON DIM	15°	30817 9310 ◇	30818 9310 ◇		30820 9310 ◇	30821 9310 ◇	
			25°	30817 9320 ◇	30818 9320 ◇		30820 9320 ◇	30821 9320 ◇	
			40°	30817 9330 ◇	30818 9330 ◇		30820 9330 ◇	30821 9330 ◇	
			WG			30819 9300 ◇	30825 9300 ◇		
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA For 880 LED 28,8W / 3296lm / 650mA	NON DIM	15°	30817 9210 ◇	30818 9210 ◇		30820 9210 ◇	30821 9210 ◇	
			25°	30817 9220 ◇	30818 9220 ◇		30820 9220 ◇	30821 9220 ◇	
			40°	30817 9230 ◇	30818 9230 ◇		30820 9230 ◇	30821 9230 ◇	
			WG			30819 9200 ◇	30825 9200 ◇		
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA for 880 LED 28,8W / 3768lm / 650mA	DALI	15°	30817 9415 ◇	30818 9415 ◇		30820 9415 ◇	30821 9415 ◇	
			25°	30817 9425 ◇	30818 9425 ◇		30820 9425 ◇	30821 9425 ◇	
			40°	30817 9435 ◇	30818 9435 ◇		30820 9435 ◇	30821 9435 ◇	
			WG			30819 9405 ◇	30825 9405 ◇		
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA	DALI	15°	30817 9315 ◇	30818 9315 ◇		30820 9315 ◇	30821 9315 ◇	
			25°	30817 9325 ◇	30818 9325 ◇		30820 9325 ◇	30821 9325 ◇	
			40°	30817 9335 ◇	30818 9335 ◇		30820 9335 ◇	30821 9335 ◇	
			WG			30819 9305 ◇	30825 9305 ◇		
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA for 880 LED 28,8W / 3296lm / 650mA	DALI	15°	30817 9215 ◇	30818 9215 ◇		30820 9215 ◇	30821 9215 ◇	
			25°	30817 9225 ◇	30818 9225 ◇		30820 9225 ◇	30821 9225 ◇	
			40°	30817 9235 ◇	30818 9235 ◇		30820 9235 ◇	30821 9235 ◇	
			WG			30819 9205 ◇	30825 9205 ◇		

◇ INOX

220-240V / 0150-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR

DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR

IEC 60598 2-13 : Max 500Kg - ESG 8mm

◇ IP67


EXTERIOR FLOOR

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

INSTALLATION	LOGIC LINEAR		LOGIC LINEAR INOX	
	440	880	440	880
BOX 440	30810 0010	R	R	
BOX 880	30810 0030			R
IP68 JUNCTION BOX 4P	431 99 02	O	O	O
IP68 Y-CONNECTOR 5P	21034 0150	O	O	O


LOGIC



43 x 85



43 x 70



43 x 85



43 x 70

LOGIC 40

IK08

R	RA	R MOON	RA MOON
---	----	--------	---------

3000K CRI>90	LED [E] 3.9W / 385lm / 350mA	IP67	15°	13955 9310 ◇	13957 9310 ◇	13956 9310 ◇	13958 9310 ◇
-----------------	------------------------------	------	-----	---------------------	---------------------	---------------------	---------------------


◇ ANO ● ◇ INOX ◇ ANO ● ◇ INOX

INCL. 1 x MICRO VISOR


INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 6mm




61 x 100




61 x 100



61 x 100



61 x 100



61 x 100

LOGIC 60


IK08

R	RA	R WALLWASH	R MOON	RA MOON
---	----	------------	--------	---------


3000K CRI>80	LED [F] 2W / 229lm / 700mA LED [F] 3.2W / 319lm / 1050mA	IP67	6°	213 45 15 ◇	213 46 15 ◇			
	LED 2W / 229lm / 24V-DC (PWM)			13959 8310 ◇	13961 8310 ◇			
	LED 4W / 335lm / 24V-DC (PWM)		WALLWASH		213 45 212 ◇			
			WALLWASH + SBL		213 45 2125 ◇			
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP67	20°	213 45 811 932 ◇	213 46 811 932 ◇	213 45 10 811 932 ◇	213 46 10 811 932 ◇	
	LED 7.1W / 812lm / 24V-DC (NON DIM)				13963 9320 ◇	13964 9320 ◇		
	LED 7.1W / 812lm / 24V-DC (PWM)			13960 9320 ◇	13962 9320 ◇			

◇ ANO ● ◇ ANO ● / ◇ B ● (BLACK ANODISED) ◇ ANO ● ◇ ANO ● ◇ ANO ● / ◇ B ● (BLACK ANODISED)


INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm



93 x 125




93 x 125



112 x 112 x 125



93 x 125



93 x 125

LOGIC 90

R	RA	S	R WALLWASH	RA WALLWASH
---	----	---	------------	-------------

3000K CRI>90	LED 7.1W / 812lm / 350mA	IP67	11°	213 47 811 931 ◇	213 48 811 931 ◇	213 49 811 931 ◇		
			30°	213 47 811 932 ◇	213 48 811 932 ◇	213 49 811 932 ◇		
			55°	213 47 811 933 ◇	213 48 811 933 ◇	213 49 811 933 ◇		
			WALLWASH				213 473 811 930 ◇	213 483 811 930 ◇
	WW + SBL					213 474 811 930 ◇	213 484 811 930 ◇	
	LED 7.1W / 812lm / 24V-DC (PWM)		11°	13965 9310 ◇	13966 9310 ◇	13967 9310 ◇		
			30°	13965 9320 ◇	13966 9320 ◇	13967 9320 ◇		
			55°	13965 9330 ◇	13966 9330 ◇	13967 9330 ◇		
			WALLWASH				13968 9300 ◇	13970 9300 ◇
			WW + SBL				13969 9300 ◇	13971 9300 ◇

◇ ANO ● ◇ ANO ● / ◇ B ● (BLACK ANODISED) ◇ ANO ● ◇ ANO ● ◇ ANO ● / ◇ B ● (BLACK ANODISED)

INCL. CABLE H05 RN-F 2 x 1mm² 0,5m + IP68 CONNECTOR 3P
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

100-240V / 50-60Hz (not for 24V-DC versions)





LOGIC 40


The Logic range stands for a complete family of water and shock resistant lighting fixtures. Logic 40 is the smallest of the family, a minimalistic recessed uplight with a diameter of only 40mm. With its small beam angle of 15°, it perfectly serves as an accent light to highlight any architectural aspect you want. Available with trim or as a trimless installation for an even more minimalistic look. To take care of the visual well-being, Logic 40 either comes with a micro vizor inside or as a Moon version, shielding off the light that is thrown backwards. The perfect addition to accentuate green or sculptures, to highlight façade or small garden features, to create a sense of depth or indicate the right direction along paths and driveways.

LOGIC 60




With a diameter of only 60mm, Logic 60 can easily be integrated in any landscape design, without disturbing the visual perception of it. Its smallest beam angle is ideal for highlighting, while the wallwash versions emphasize façades and bring depth into the architecture. The specific Moon version cuts of the light spill going backwards, ideal to accentuate trees or reduce the glare for passers-by.

LOGIC 90

The bigger version of Logic allows for more choice in beam angles, letting the designer be creative and play with light effect and light intensity. Similar to Logic 60 also wallwash versions are available within the bigger range to offer multiple light effects within the same design language.

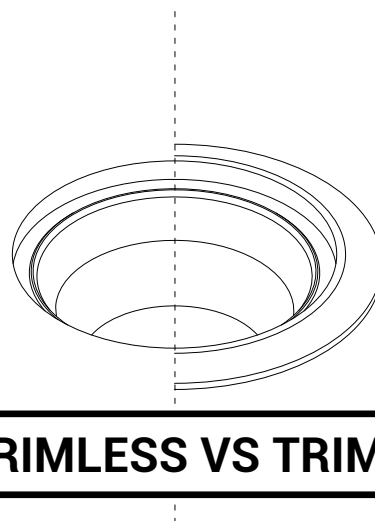

TRIMLESS VS TRIM

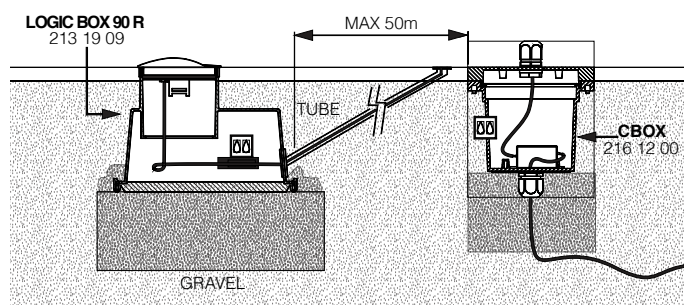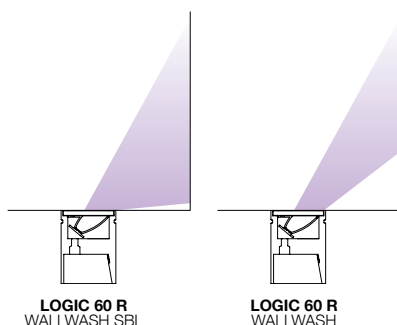

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY																
LOGIC 40				LOGIC 60					LOGIC 90							
R	RA	R MOON	RA MOON	R	RA	RA WALLWASH	R MOON	RA MOON	R	RA	S	R WALLWASH	RA WALLWASH			
				mA	mA	mA	mA	mA	mA	mA	mA	mA	mA	mA	mA	mA
				24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC	24V-DC

LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

Model	Code	Dimensions	R*	RA	R MOON	RA MOON	R	RA	RA WALLWASH	R MOON	RA MOON	R	RA	S	R WALLWASH	RA WALLWASH
NON DIM - 24W	21012 0160	137 x 50 x 16								R*	R*					
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35					R*	R*	R*				R*	R*	R*	R*
DALI DIM - 60W (PWM)	21012 0135	150 x 53 x 35					R*	R*	R*				R*	R*	R*	R*

LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

Model	Code	Min. mA	R*	RA	R MOON	RA MOON	R	RA	RA WALLWASH	R MOON	RA MOON	R	RA	S	R WALLWASH	RA WALLWASH
MAINS DIM (FE) 11	21012 0298	min. 55	R*	R*	R*	R*				R*	R*	R*	R*	R*	R*	R*
1-10V DIM 16	300 90 63	min. 84	R*	R*	R*	R*	R*	R*		R*	R*	R*	R*	R*	R*	R*
DALI DIM 16	300 90 63	min. 84	R*	R*	R*	R*	R*	R*		R*	R*	R*	R*	R*	R*	R*

INSTALLATION

Accessory	Code	R*	RA	R MOON	RA MOON	R	RA	RA WALLWASH	R MOON	RA MOON	R	RA	S	R WALLWASH	RA WALLWASH
CBOX	216 12 00														
LOGIC 40 BOX R	13910 0010														
LOGIC 60 BOX R	213 19 10														
LOGIC 90 BOX R	213 19 09														
LOGIC 90 BOX S	213 19 08														
IP68 CONNECTION KIT	216 12 01														
IP68 CONNECTOR 3P	216 12 02														

* REMOTE INSTALLATION

EXTERIOR FLOOR




LOGIC


LOGIC F

Logic F creates a playful effect on your path or driveway, perfect to enhance the architectural character of your project and landscape.


IP67

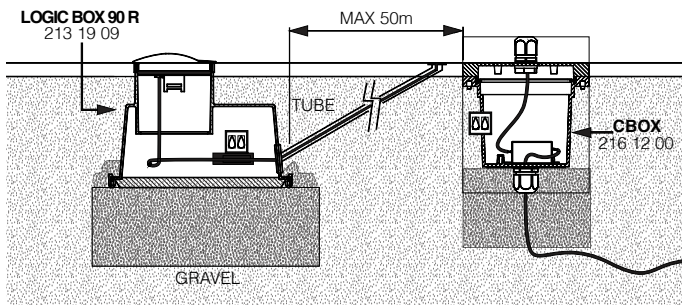

A



93 x 40



93 x 40

LOGIC


F1

F2

3000K / CRI>80	LED 0,6W / 40lm / 24V-DC	IP67	213 47 112 ◊
	2 x LED 0,6W / 40lm / 24V-DC		213 47 122 ◊

◊ A ●
max.600kg



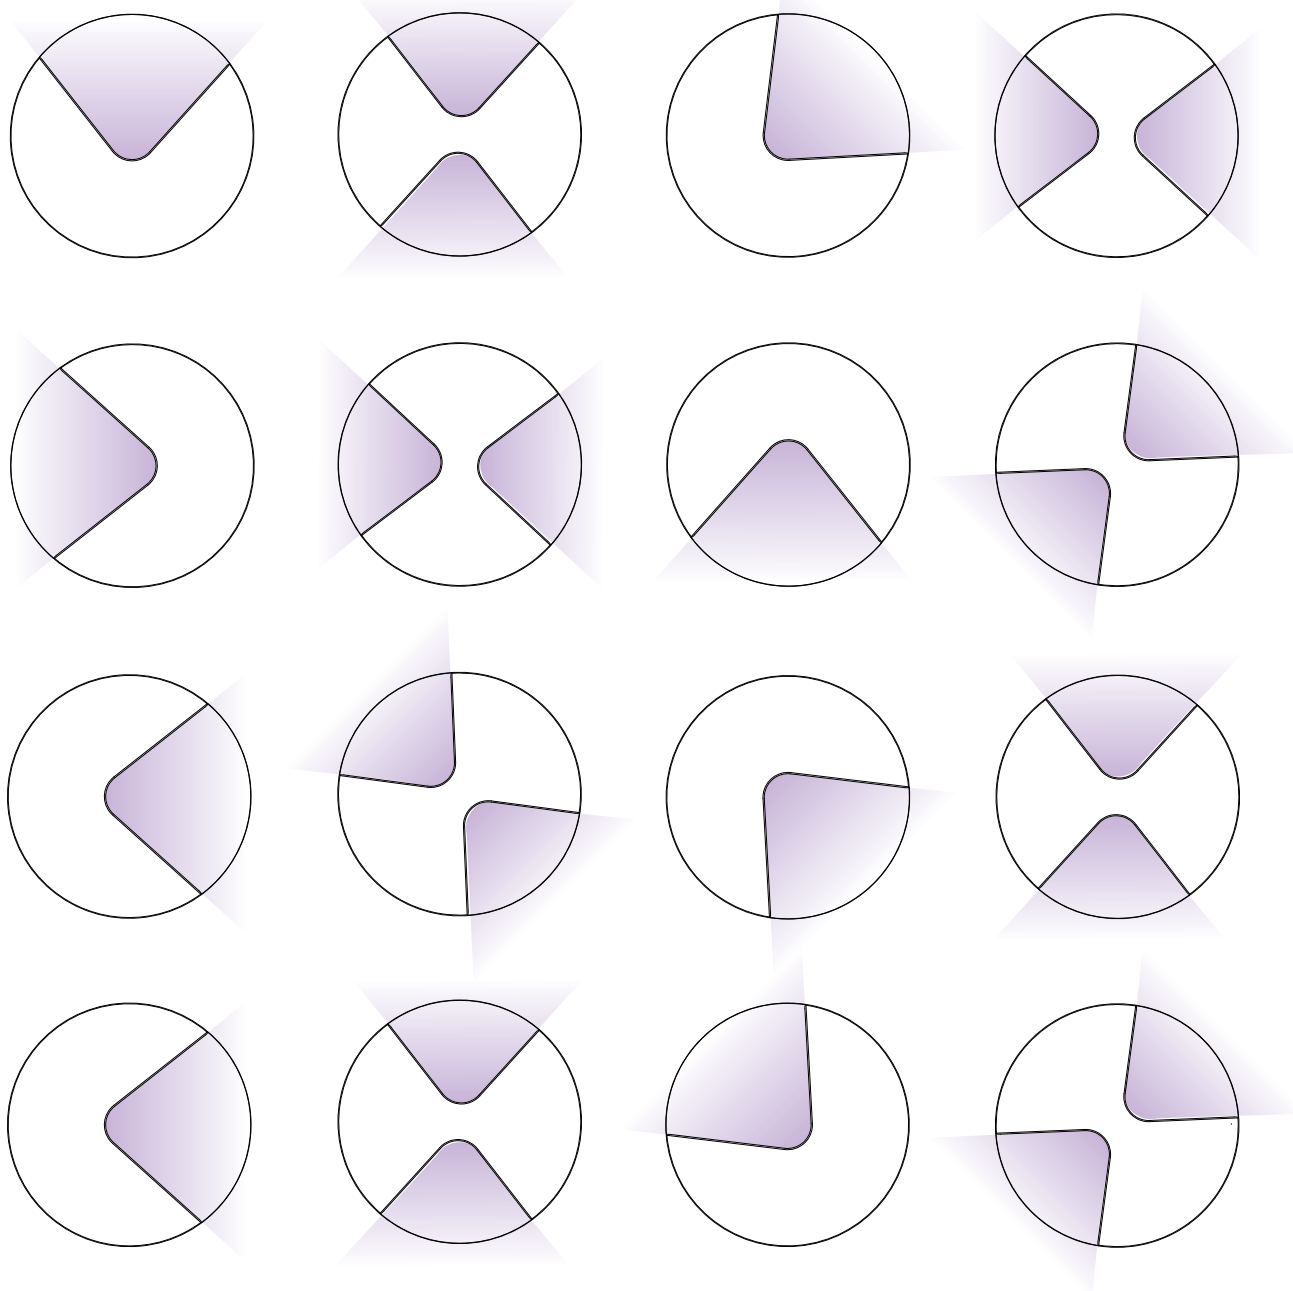

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

NON DIM - 24W	21012 0160	137 x 50 x 16
---------------	-------------------	---------------

LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

INSTALLATION

CBOX	216 12 00	
LOGIC 90 BOX R	213 19 09	

LOGIC	
F1	F2
R*	R*
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>






* REMOTE INSTALLATION

LEDS C / GO


This family offers some miniature fixtures that serve as orientation and atmosphere lighting. Available round and square, these little dots of light are perfect as guidance lights along paths and driveways.

www.detalight.com/ledsc
www.detalight.com/ledsgo

IP67

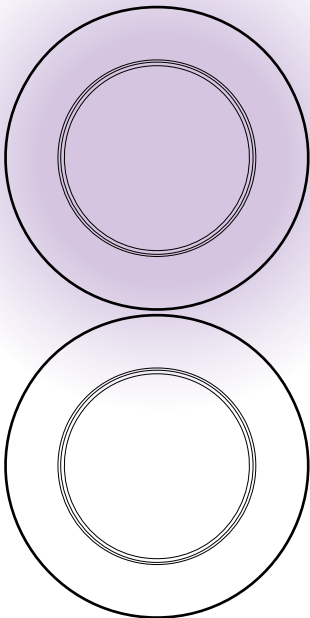

41 x 45



38 x 38 x 45

LEDS C / GO IN FORTE

LEDS C R ST

LEDS GO IN FORTE


4000K / CRI>80	LED [A] 1W / 134lm / 350mA	IP67	302 20 34 ◊	302 10 34 ◊
3000K / CRI>80	LED [A] 1W / 132lm / 350mA		302 20 32 ◊	302 10 32 ◊

◊ ANO ●







LEDS C
R ST



1/1




LEDS GO
IN FORTE

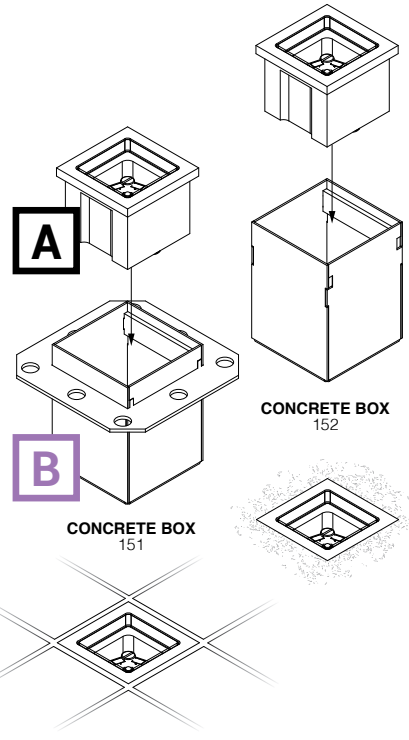

EXTERIOR FLOOR

B



FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	i min. 55
1-10V DIM 15	300 90 124	i min. 55
DALI DIM 14	300 90 125	i min. 55

	LEDS C R ST	LEDS GO IN FORTE
	R * (MIN. 3 LED)	R * (MIN. 3 LED)
	R * (MIN. 6 LED)	R * (MIN. 6 LED)
	R * (MIN. 4 LED)	R * (MIN. 4 LED)
INSTALLATION		
CBOX	O	O
or CBOX 350mA/10W	O (MIN. 7 LED)	O (MIN. 7 LED)
CONCRETE BOX 151		O
CONCRETE BOX TR 152		O

* REMOTE INSTALLATION

KIX


Flexible, subtle, elegant and powerful: these are the keywords that describe the Kix perfectly. Despite its low-profile appearance, Kix excels in light output and quality, ideal for walkway lighting or other landscape applications. Kix is easy and flexible to use thanks to the adjustable head, designed to provide optimal cooling and eliminate glare.

Kix is available for installation on wall or floor, to strap around a tree or to mount in soft green areas with a pin. In addition to the more robust version of Kix, there is also a S(mall) and M(edium) version available. Kix S combines a powered with a lens, resulting in a nice 10° light beam. All models have an IP65 rating and are available in alu grey or dark grey.

www.deltalight.com/kix



KIX

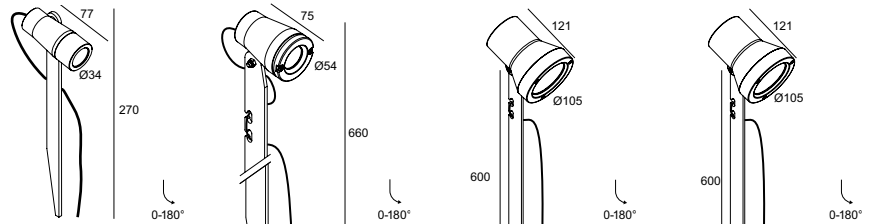

S PIN M PIN II PIN HP PIN

Color Temperature / CRI	LED Power / Lumens / Current	Beam Angle	Model
3000K / CRI>80	LED [A] 1W / 132lm / 350mA	10°	232 09 831 ◊
	LED [A] 1.4W / 182lm / 500mA		
	LED [A] 2W / 245lm / 700mA		
3000K / CRI>90	LED 2W / 245lm / 24V-DC (PWM)		13529 8310 ◊
	LED 7.1W / 812lm / 350mA	11°	13537 9310 ◊
		30°	13537 9320 ◊
		55°	13537 9330 ◊
		120°	13536 9300 ◊
		11°	13531 9310 ◊
		30°	13531 9320 ◊
	LED 7.1W / 812lm / 24V-DC (PWM)	55°	13531 9330 ◊
		120°	13538 9300 ◊
LED [D] 6.4W / 587lm / 350mA	IP55	30°	232 13 933 ◊
			13530 9330 ◊
	LED 6.4W / 587lm / 24V-DC (PWM)		
LED [J] 16.3W / 2309lm / 500mA		IP65	11°
		30°	13535 9320 ◊
		55°	13535 9330 ◊




INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m

INCL.1 x KAP STRIPER B (REMOVABLE)

100-240V / 50-60Hz (not for 24V-DC versions)



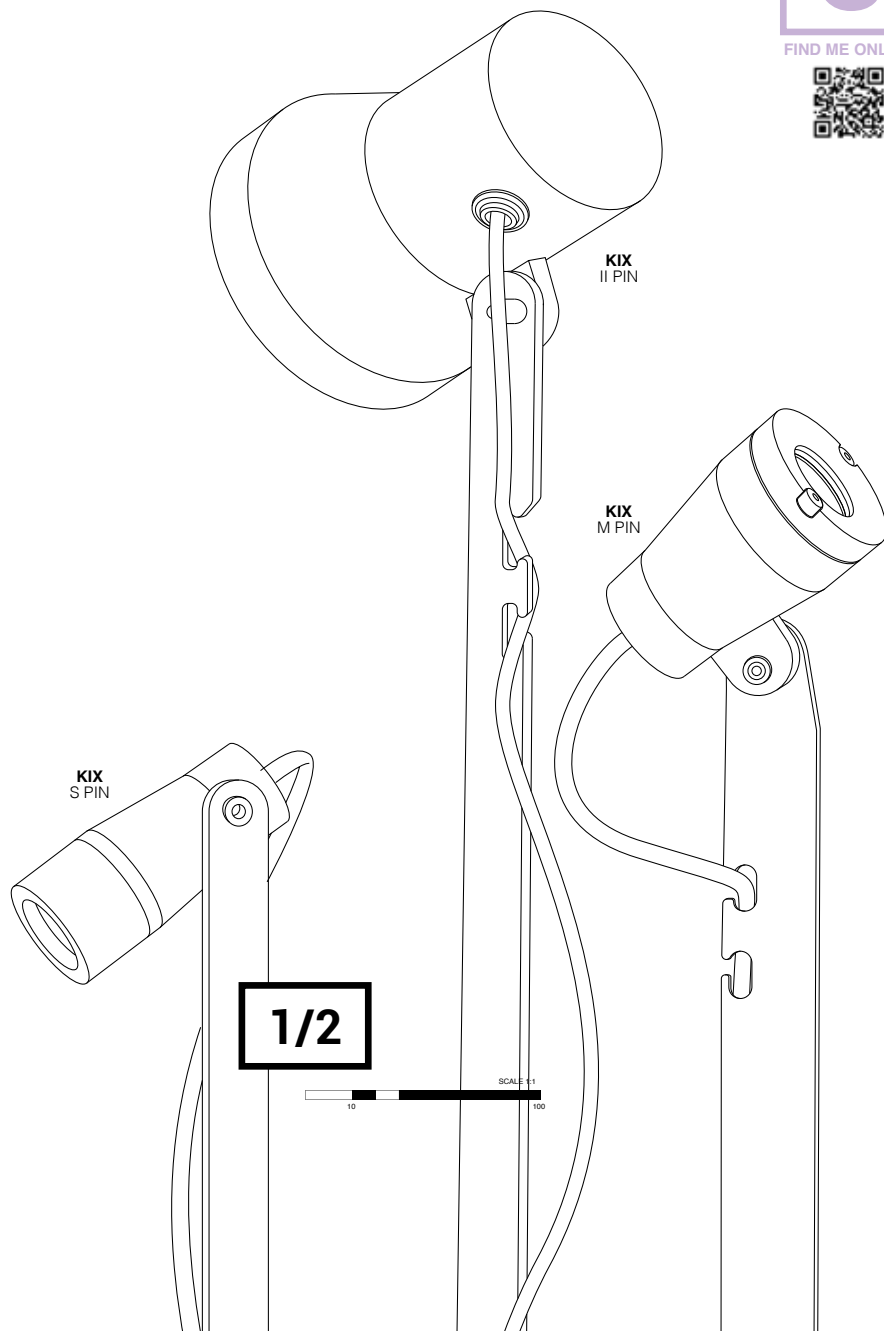

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


			KIX						
			S PIN		M PIN				
			mA	24V-DC	mA	24V-DC	mA	24V-DC	
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35		R *		R *		R *	
DALI DIM - 60W (PWM)	21012 0135	150 x 53 x 35		R *		R *		R *	
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
MAINS DIM (FE) 11	21012 0298	i min. 55	R* (MIN. 3 LED)		R *		R *		R *
1-10V DIM 15	300 90 124	i min. 55	R* (MIN. 6 LED)		R *		R *		R *
DALI DIM 14	300 90 125	i min. 55	R* (MIN. 4 LED)		R *		R *		R *
HONEYCOMB / LENS / GLASS									
HONEYCOMB (only + KAP KIX)	232 10 03 N						A	A	A
KAP KIX	232 10 00 N						A	A	A
INSTALLATION									
CBOX	216 12 00		O	O	O	O	O	O	O
IP68 CONNECTION KIT	216 12 01		O	O	O	O	O	O	O
IP68 CONNECTOR 3P	216 12 02		O	O	O	O	O	O	O

* REMOTE INSTALLATION

FRAX

IP65

FRAX



0-120°/360°




0-120°/360°


		SB					SB SUPERSPOT		
		NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB	
3000K CRI>90	LED 6W / 696lm / 700mA	8°							
	LED 8W / 928lm / 700mA	14°	26000 9310 ◊	26000 9320 ◊	26000 9330 ◊	26000 9340 ◊	26000 9350 ◊	26100 9310 ◊	26100 9320 ◊
		26°	26000 9360 ◊	26000 9370 ◊	-	-	-		
		47°	26000 9380 ◊	26000 9390 ◊	-	-	-		

220-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m

110-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m



0-120°/360°




0-120°/360°


FRAX

		MB					MB SUPERSPOT		
		NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB	
3000K CRI>90	LED 18,2W / 2002lm / 900mA	8°							
	LED 23,4W / 2574lm / 900mA	14°	26010 9310 ◊	26010 9320 ◊	26010 9330 ◊	26010 9340 ◊	26010 9350 ◊	26110 9310 ◊	26110 9320 ◊
		26°	26010 9360 ◊	26010 9370 ◊	-	-	-		
		47°	26010 9380 ◊	26010 9390 ◊	-	-	-		

220-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m



0-120°/360°




0-120°/360°

FRAX


		S					S SUPERSPOT		
		NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB	
3000K CRI>90	LED 6W / 696lm / 700mA	8°							
	LED 8W / 928lm / 700mA	14°	26001 9310 ◊	26001 9320 ◊	26001 9330 ◊	26001 9340 ◊	26001 9350 ◊	26101 9310 ◊	26101 9320 ◊
		26°	26001 9360 ◊	26001 9370 ◊	-	-	-		
		47°	26001 9380 ◊	26001 9390 ◊	-	-	-		

220-240V / 50-60Hz

110-240V / 50-60Hz



0-120°/360°



0-120°/360°

FRAX

		M					M SUPERSPOT		
		NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB	
3000K CRI>90	LED 18,2W / 2002lm / 900mA	8°							
	LED 23,4W / 2574lm / 900mA	14°	26011 9310 ◊	26011 9320 ◊	26011 9330 ◊	26011 9340 ◊	26011 9350 ◊	26111 9310 ◊	26111 9320 ◊
		26°	26011 9360 ◊	26011 9370 ◊	-	-	-		
		47°	26011 9380 ◊	26011 9390 ◊	-	-	-		

220-240V / 50-60Hz




FIND ME ONLINE



THERMALLY TOUGHENED GLASS

D-LOCK

in-house developed D-lock system avoids damage by overheating, overvoltage and water ingress.

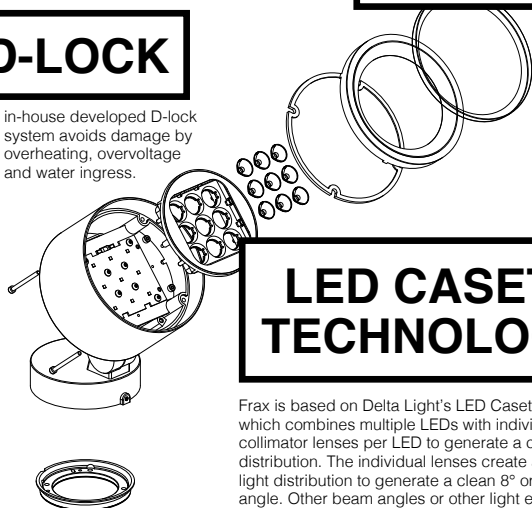

LED CASET® TECHNOLOGY

Frax is based on Delta Light's LED Caset® technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a clean 8° or 14° beam angle. Other beam angles or other light effects are being obtained by adding microlenses in front, sculpting the light into a 26° or 47° beam angle or into a linear or wallwash effect.


FIXATION

A multitude of options allows Frax to be installed in different ways:
Surface mounted on hard surfaces

— On a pin in soft surfaces

— Strapped around a tree




— Mounted on a pole with a bracket

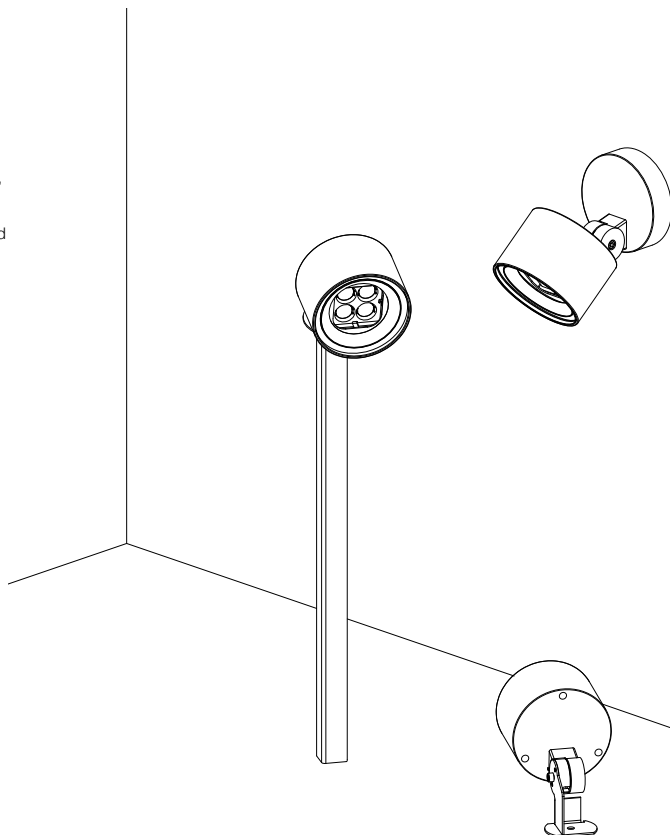

EXTERIOR FLOOR

VISUAL WELL-BEING

Frax not only cares about the perfect light effect, it takes care about the passer-by as well. Frax can be provided with an additional honeycomb or a kap to reduce the possibility from directly looking into the light source. Both of them reduce any undesired light effect and the glare associated with it.

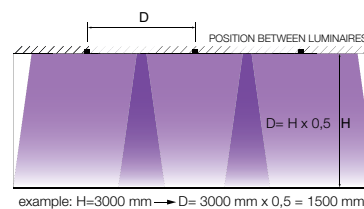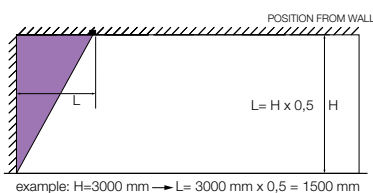

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

FRAX


			FRAX								
			SB	SB	MB	MB	S	S	M	M	
			SUPERSPOT			SUPERSPOT			SUPERSPOT		
FINISH											
	FRAX S KAP	26070 0010 N		A	A			A	A		
	FRAX M KAP	26070 0020 N				A	A			A	A
INSTALLATION											
	FRAX BRACKET	26070 0060 N		R	R	R	R				
	or FRAX STRAP	26070 0050 N	max. Ø250mm	R	R	R	R				
	or FRAX PIN	26070 0040 N		R	R	R	R				
	FRAX ANTI VANDAL SCREWS 5 PCS	26070 0030		O	O	O	O	O	O	O	O



FRAX

Light and ambiance is not only for indoors, by combining light and architecture in outdoor settings, the city also remains vibrant at night. With its 7 different light effects and its multiple installation options, Frax has been designed for every aspect of the urban architecture: any form, any material or any composition.

www.deltalight.com/frax


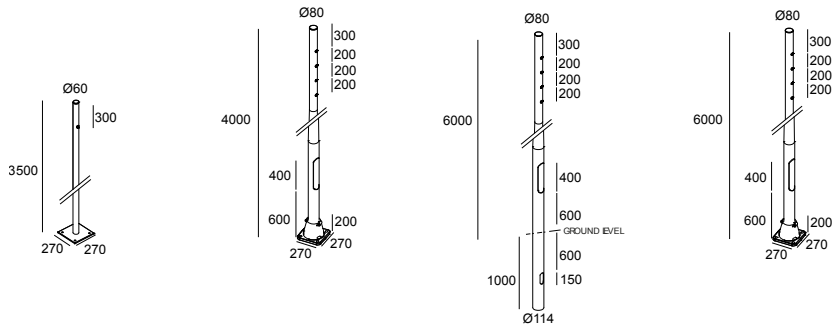


FRAX POLE

	IK08 60 3,5M	80 4M	80 6M	
	BASE PLATE	BASE	ANCHORAGE 1000mm	BASE
1 FRAX MB	26071 0030 ◇			
1 to 4 FRAX MB - 4 LEVELS		26071 0010 ◇	26071 0040 ◇	26071 0020 ◇



FRAX





		IK08	MB POLE				MB POLE SUPERSPOT		
			NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	NO ACCESSORY	HONEYCOMB	
3000K CRI>90	LED 18,2W / 2002lm / 900mA	IP65	8°					26025 9310 ◇	26026 9310 ◇
			14°	26020 9310 ◇	26021 9310 ◇	26022 9300 ◇	26023 9300 ◇		
			26°	26020 9320 ◇	26021 9320 ◇				
			47°	26020 9330 ◇	26021 9330 ◇				



220-240V / 50-60Hz

INCL. 1 x CABLE H05 RN-F 3 x 1mm² 6m



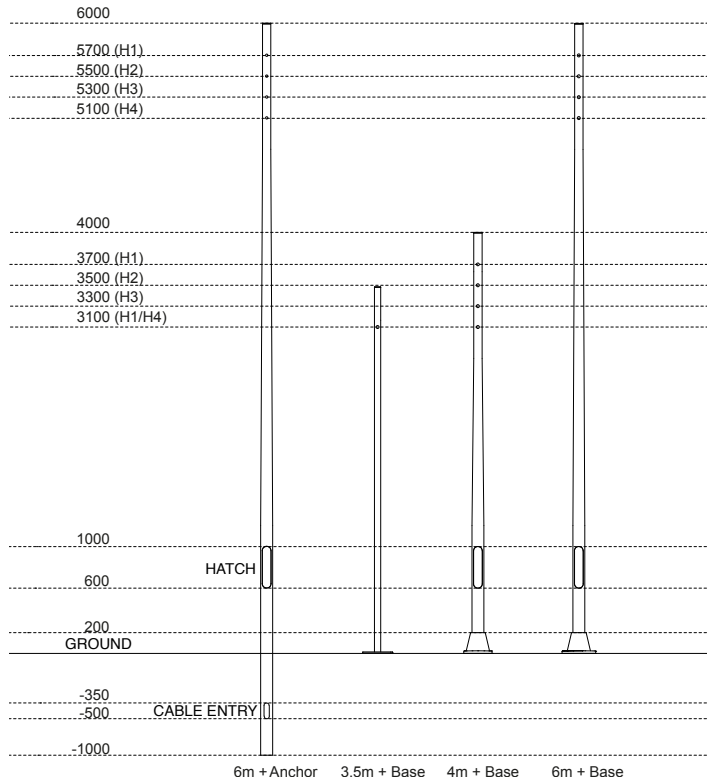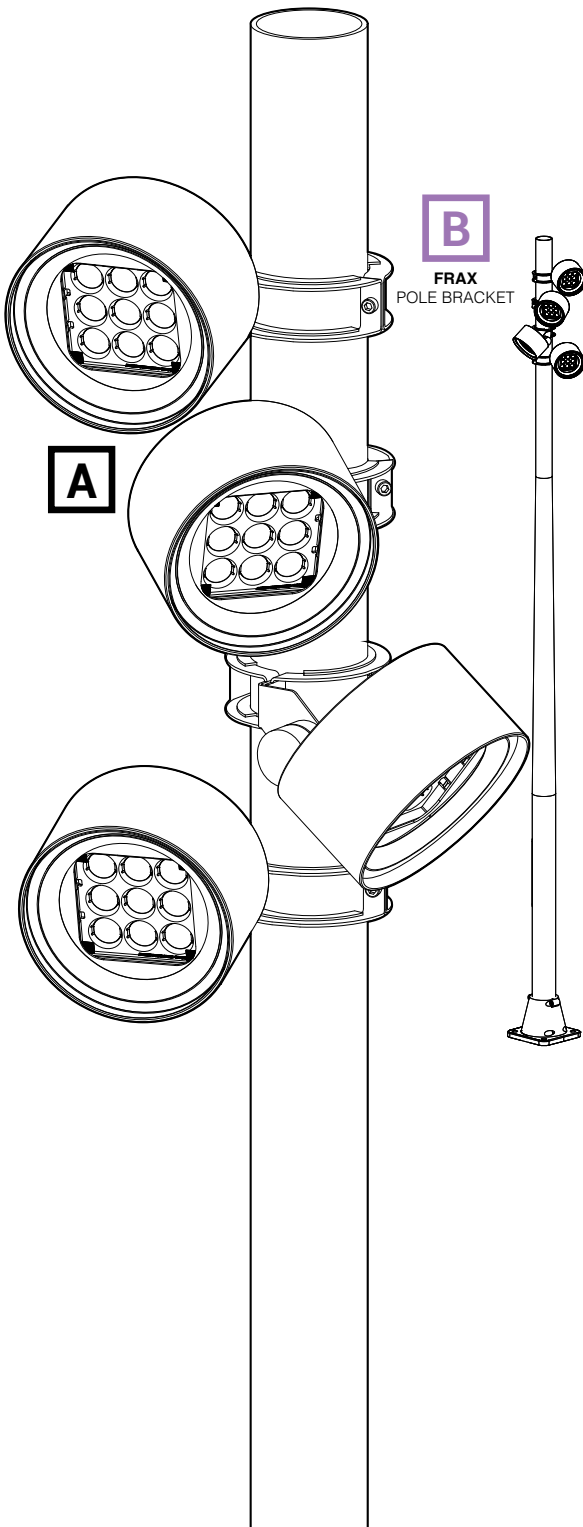

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

	FRAX		
	MB POLE	MB POLE SUPERSPOT	POLE
FINISH			
FRAX M KAP	26070 0020 N	A	A
INSTALLATION			
FRAX POLE 60 BRACKET	26071 0050 N	R	R
FRAX POLE 80 BRACKET	26071 0060 N	R	R
FUSE BOX	431 99 01		○
IP68 JUNCTION BOX 4P	431 99 02		○
IP68 CONNECTOR 4P	21034 0010		○
PLATE 11	229 02 11		○*
FRAX ANTI VANDAL SCREWS 5 PCS	26070 0030	○	○

ALL ELECTRICAL CONNECTION NEED TO COMPLY WITH IP53 REGULATIONS
* ONLY FOR VERSION WITH BASE PLATE

B

OONO

How to describe Oono in one sentence?
*'A soft glow of light during golden hour,
 at the end of a sky-blue summers day...'*

That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.




It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass. It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with straightforward surface mounted and pendant luminaires for indoors. It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold. It brings together the shimmer of dusk with the fresh start of dawn.

www.deltaight.com/oono



IP54



NEW
OONO



		P		F		F PORTABLE
		H 400mm	H 700mm	H 400mm	H 600mm	H 400mm
3000K / CRI>90	LED 8.6W / 1089lm / 500mA	29615 9308 ◊	29616 9308 ◊	29617 9300 ◊	29618 9300 ◊	29619 9300 ◊
	LED 17.2W / 2101lm / 500mA					
2700K / CRI>90	LED 8.6W / 1041lm / 500mA	29615 9208 ◊	29616 9208 ◊	29617 9200 ◊	29618 9200 ◊	29619 9200 ◊
	LED 17.2W / 2009lm / 500mA					
		◊ B ●		◊ B ●		◊ B ●
		220-240V / 50-60Hz		100-240V / 50-60Hz		220-240V / 50-60Hz
		◊		◊		◊
						INCL. BATTERY PACK + CHARGER AUTONOMY 4 HOURS ON FULLY CHARGED BATTERY IP20

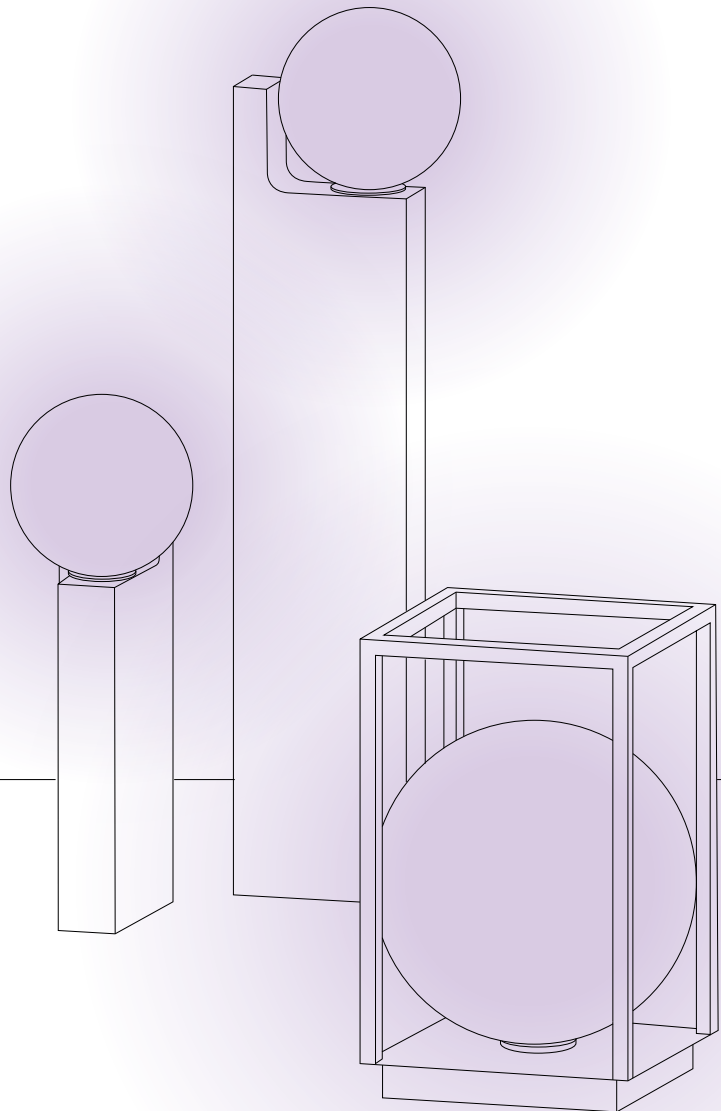

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			OONO		
			P	F	F PORTABLE
INSTALLATION					
	CBOX	216 12 00	<input type="checkbox"/>	<input type="checkbox"/>	
	IP68 CONNECTION KIT	216 12 01	<input type="checkbox"/>	<input type="checkbox"/>	
	IP68 CONNECTOR 3P	216 12 02	<input type="checkbox"/>	<input type="checkbox"/>	
	PIN 12	229 01 12	<input type="checkbox"/>		
	or PLATE 7	229 02 07	<input type="checkbox"/>		



SPIX


As a projector for exterior use, Spix has many appearances. It comes as a surface mounted spotlight, as a version on pin to put in between the greenery or as a bollard with 2 or 3 light units. Like this, Spix can be used throughout a complete outdoor project, to light up trees, emphasize architecture or highlight pathways.

Although compact in size, the clever design of Spix offers a solution without any visible cabling outside of the luminaire. The hinge of the projector not only serves to tilt it into the wanted direction, it also hides away a passage for the cabling.

Uniform in design, Spix comes in 2 sizes: a smaller 10° version for accent lighting and a bigger 30° version for more general light. To shield the passerby from looking into the projector and to reduce unwanted spill light, the bigger version can be finished with a kap on the front.

www.deltalight.com/spix

IP65

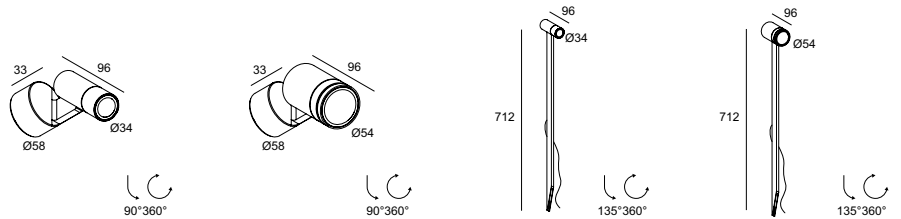

NEW
SPIX

IK05	S	M	S PIN	M PIN
------	---	---	-------	-------

3000K / CRI>90	LED [A] 2.6W / 286lm / 900mA	IP65	10°	29713 9310 ◊	29711 9310 ◊
	LED 2.6W / 286lm / 24V-DC (PWM)			29714 9310 ◊	
	LED [E] 8.2W / 677lm / 700mA	30°	29715 9330 ◊	29712 9330 ◊	
	LED 8.2W / 677lm / 24V-DC (PWM)		29716 9330 ◊		

◊ N ● / NEW COLOUR: PGR ●

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m



NEW
SPIX


IK05	P 70-2	P 100-3
------	--------	---------

3000K / CRI>90	2 x LED 2W / 232lm / 700mA	IP65	10°	29717 9310 ◊	
	3 x LED 2W / 232lm / 700mA				29718 9310 ◊


◊ N ● / NEW COLOUR: PGR ●

100-240V / 50-60Hz





B

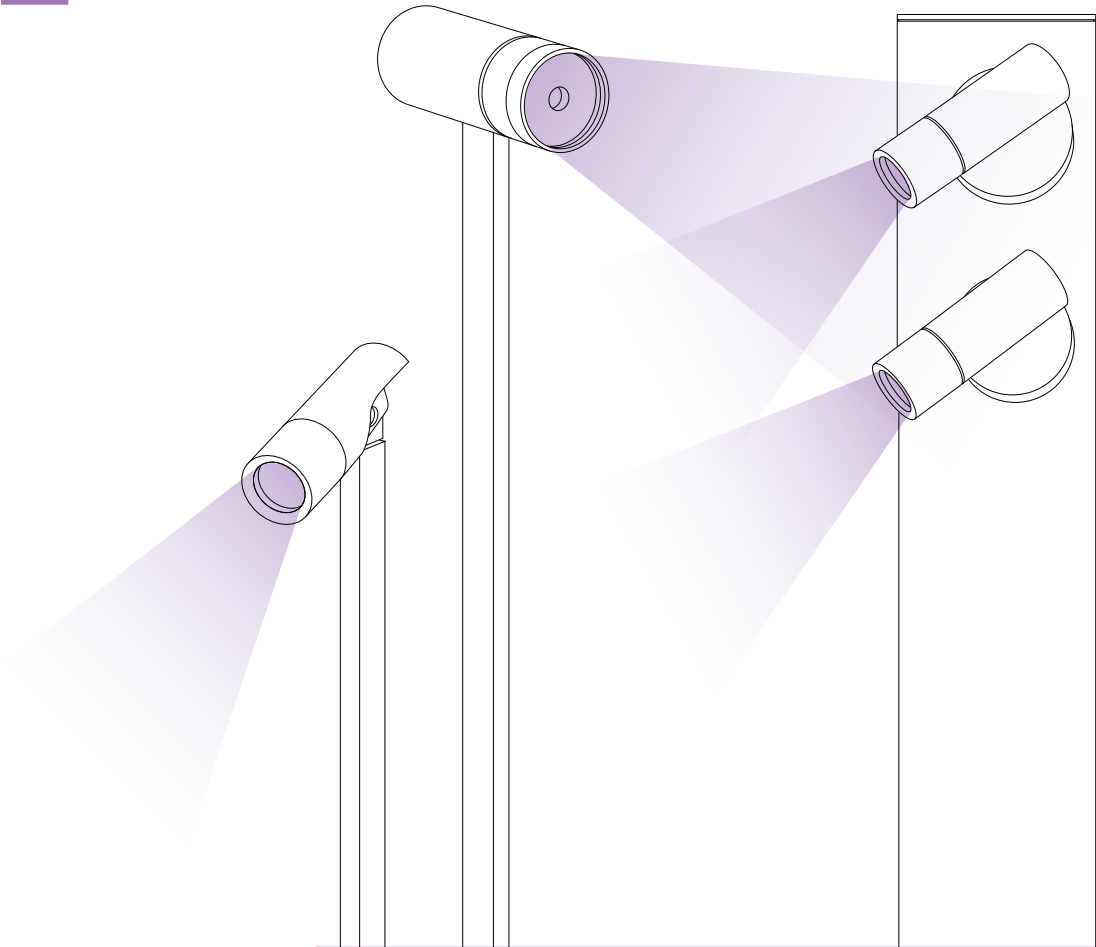

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SPIX							
			S		M		S PIN	M PIN	P 70-2	P 100-3
			mA	24V-DC	mA	24V-DC				
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35		R *		R *				
DALI DIM - 60W (PWM)	21012 0135	150 x 53 x 35		R *		R *				
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	21012 0298	i min. 55	R (min. 3 LED)			R *	R * (MIN. 3 LED)	R *		
1-10V DIM 15	300 90 124	i min. 55	R (min. 2 LED)			R *	R * (MIN. 2 LED)	R *		
DALI DIM 14	300 90 125	i min. 55	R (min. 2 LED)			R *	R * (MIN. 2 LED)	R *		
FINISH										
KAP STRIPER	223 00 10 B					A	A	A		
INSTALLATION										
CBOX	216 12 00						O	O	O	O
IP68 CONNECTION KIT	216 12 01						O	O	O	O
IP68 CONNECTOR 3P	216 12 02						O	O	O	O
PIN 11	229 01 11								R	R
or PLATE 12	15223 0120 N								R	R

* REMOTE INSTALLATION

B


OUTLINER

Outliner defines the perimeter. It comes as single luminaire or as a bespoke profile, perfectly optimizable to any desired length. Designed as an unobtrusive linear solution, Outliner shields off the light source and gently casts its light towards the surface. As such, Outliner is ideal to serve as perimeter lighting across paths, terraces or parking lots, areas that function as passageway.

www.deltalight.com/outliner

IP54

OUTLINER



3000K CRI>90	LED FLEX OUT 4,75W / 523lm / 24V-DC	IP54
-----------------	-------------------------------------	------

27810 9300 ◇

◇ N ●




STIEVIE

Stieve is not your typical lighting bollard. The sharp pin underneath the luminaire allows you to install it in many different ways, like a spear has been thrown into the lawn. Its linear light generates a pleasant and warm light effect, ideal to light up a sculpture or to guide a way along the light.

www.deltalight.com/stieve

IP65

STIEVIE



3000K / CRI>80	LED TUBE 6W / 513lm / 24V-DC	IP65
	LED TUBE 10W / 873lm / 24V-DC	

270 73 075 ◇



270 73 130 ◇

◇ N ●

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 2m

INCL. PIN



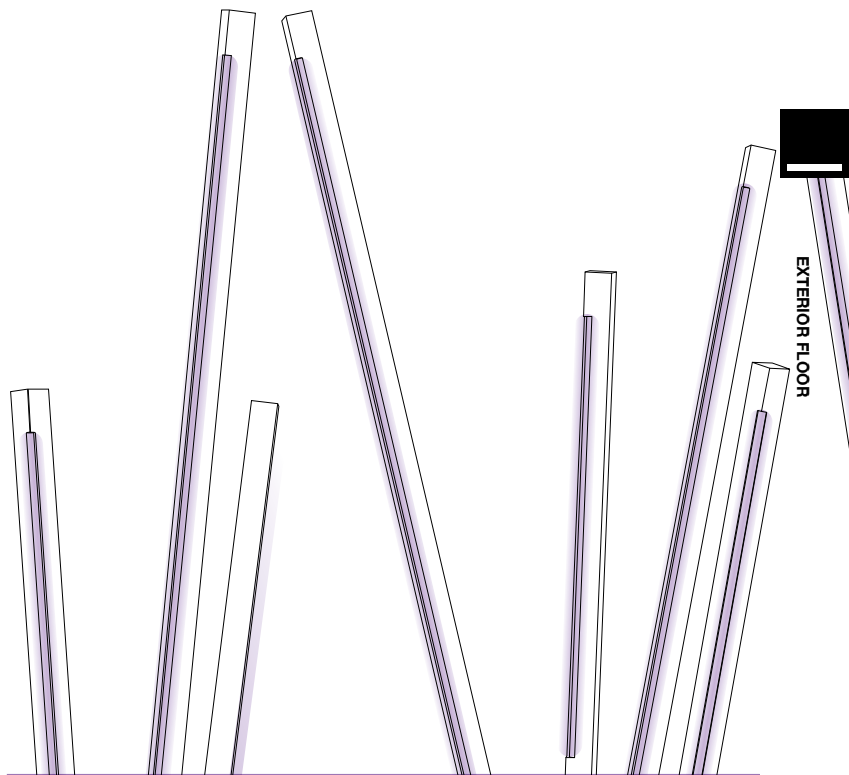

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			OUTLINER 100	STIEVE
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
1-10V DIM - 60W	21012 0101	150 x 53 x 35	R *	R *
DALI DIM - 60W	21012 0135	150 x 53 x 35	R *	R *
INSTALLATION				
CBOX	216 12 00		O	O
IP68 CONNECTION KIT	216 12 01			O
IP68 CONNECTOR 3P	216 12 02			O
2x PIN 11	229 01 11		O	



* REMOTE INSTALLATION

MONTUR

With Montur we offer a highly original interpretation of an archetypal concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look. The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.


The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet. The indoor version of the Montur is also available as an open cube, with one or two bulbs, or in a rectangular shape with a powerful LED cluster concealed behind a protective cover in polycarbonate. By using them as outdoor fixtures, you can extend your lighting style into the garden or parking area. The outdoor versions are available in the same models as the indoor ones, but always feature a protective cover in glass or polycarbonate. There is also a bollard version, with a choice of various heights.

www.detailight.com/montur



MONTUR

				S P LED			L P LED
				H 320mm	H 670mm	H 920mm	
3000K / CRI>80	LED 6W / 960lm / 350mA	IP55	NON DIM	232 432 83 ◊	232 472 83 ◊	232 492 83 ◊	232 659 83 ◊
	LED 13,3W / 1250lm / 500mA	IP54	MAINS				
				◊ B ●			◊ B ●
				100-240V / 50-60Hz			220-240V / 50-60Hz
				INCL. GLASS OPAL			□
				↓			□

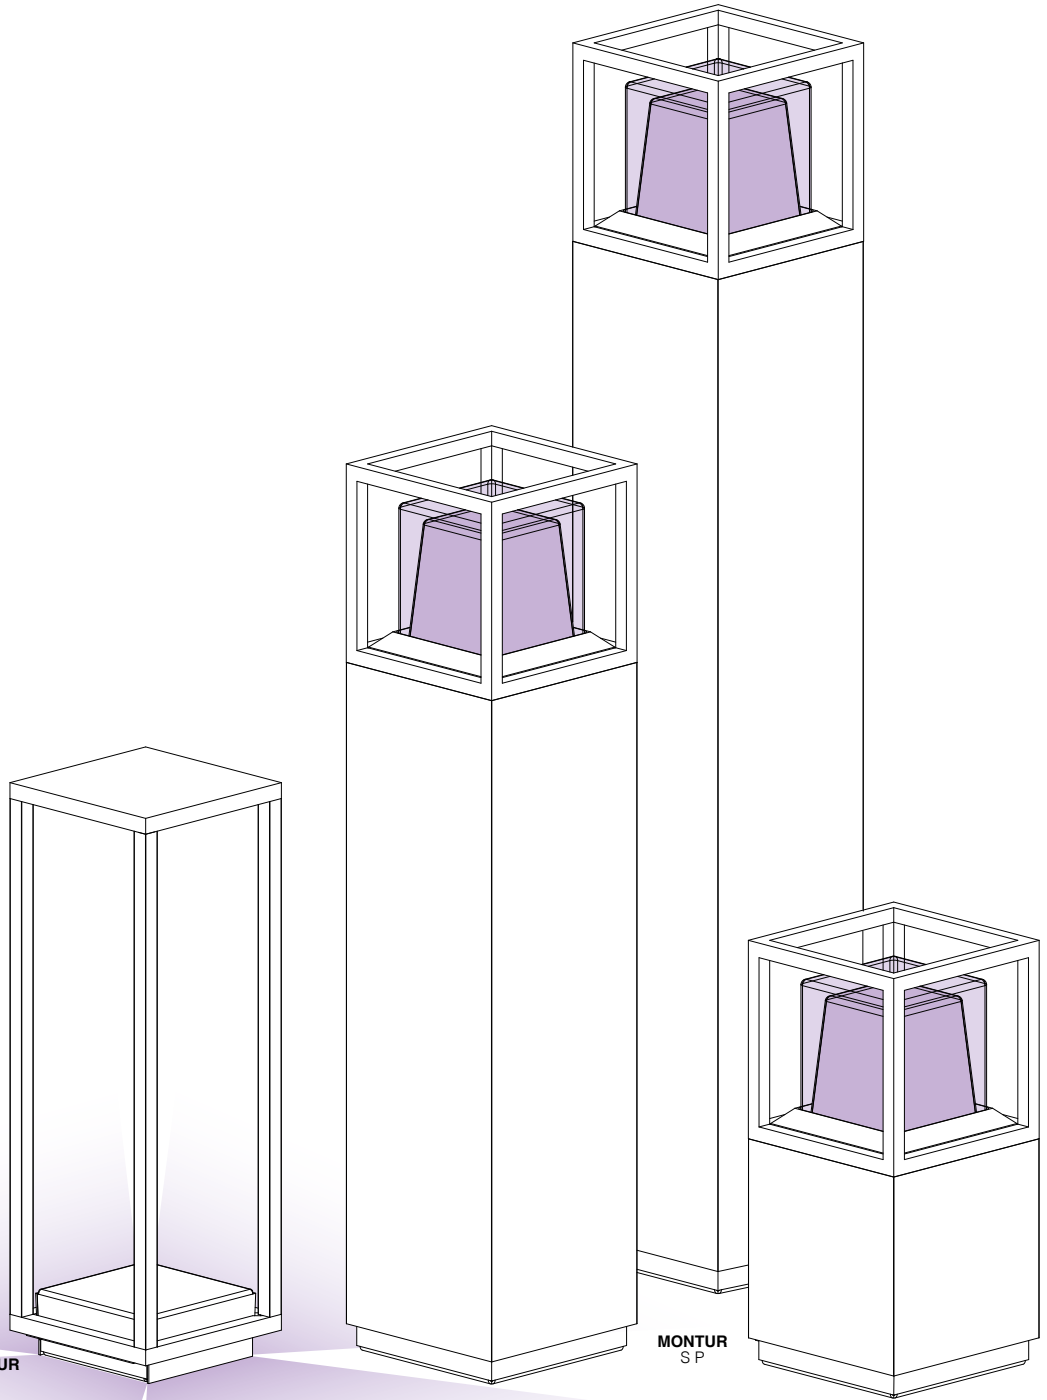

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY




INSTALLATION			MONTUR	
			S P LED	L P LED
CBOX	216 12 00		<input type="checkbox"/>	<input type="checkbox"/>
IP68 CONNECTION KIT	216 12 01		<input type="checkbox"/>	<input type="checkbox"/>
IP68 CONNECTOR 3P	216 12 02		<input type="checkbox"/>	<input type="checkbox"/>
PLATE 3	229 02 03		<input type="checkbox"/>	<input type="checkbox"/>

ELBO

Elbo can be used as functional lighting along a path thanks to the in-house developed lens. The lens solution creates a double effect with a wide general soft glow combined with a narrow delineated beam in the middle. According to the position in the luminaire, it can create a long line of light along a pathway or it can create a linear pattern as the light is thrown forward.

www.deltalight.com/elbo

IP55



ELBO

			SYMMETRIC P		ASYMMETRIC P		BRIDGE P	
			H 400mm	H 600mm	H 400mm	H 600mm	H 200mm	H 600mm
3000K / CRI>80	LED 3.9W / 419lm / 350mA	IP55	223 24 83 ◊	223 26 83 ◊	223 34 83 ◊	223 36 83 ◊	223 122 83 ◊	223 126 83 ◊
			◊ A ● / B ●		◊ A ● / B ●		INCL.SYMMETRIC LENS	
			100-240V / 50-60Hz		100-240V / 50-60Hz		100-240V / 50-60Hz	
			□		□		□	




WALKER

Split the light

Walker II splits the light open. Starting from 1 light source, Walker II is designed to guide the light into two directions to provide a double light effect on the surface below. The light falls on the V-shaped inner part of the luminaire, breaking it open and throwing it to the front- and backside of the luminaire. Walker II can serve as a guiding light on your wall or pathway, as it comes as a wall luminaire and as a bollard. Different sizes, different heights and multiple colour combinations can be combined to your preference to create the perfect setting.

www.deltalight.com/walker


IP54





WALKER II

WALKER II

			H 200mm	H 400mm	H 700mm	H 200mm	H 400mm	H 700mm
3000K CRI>90	LED 6,2W / 790lm / 350mA	IP54	22628 9300 ◊	22624 9300 ◊	22626 9300 ◊	22629 9300 ◊	22625 9300 ◊	22627 9300 ◊
2700K CRI>90	LED 6,2W / 740lm / 350mA		22628 9200 ◊	22624 9200 ◊	22626 9200 ◊	22629 9200 ◊	22625 9200 ◊	22627 9200 ◊
			◊ A ● / N ●		◊ A -N ● / N-GC ●			
			100-240V / 50-60Hz					
			□					



B



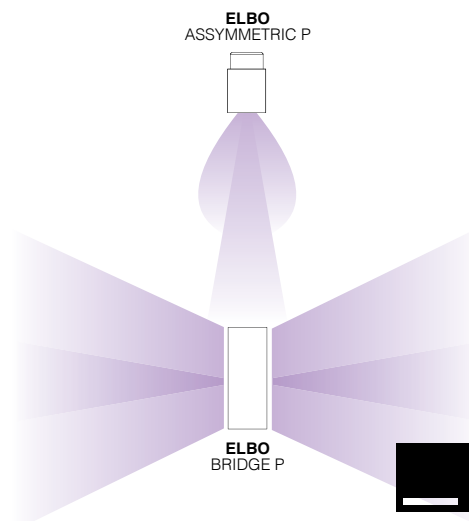
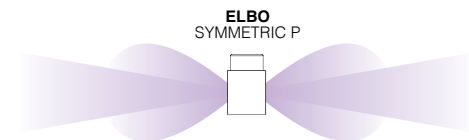


EXTERIOR FLOOR

OUTER COLOUR N
INNER COLOUR GC
N-GC

READ MY COLOUR

1/4

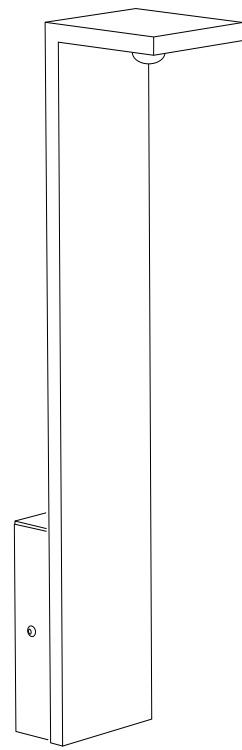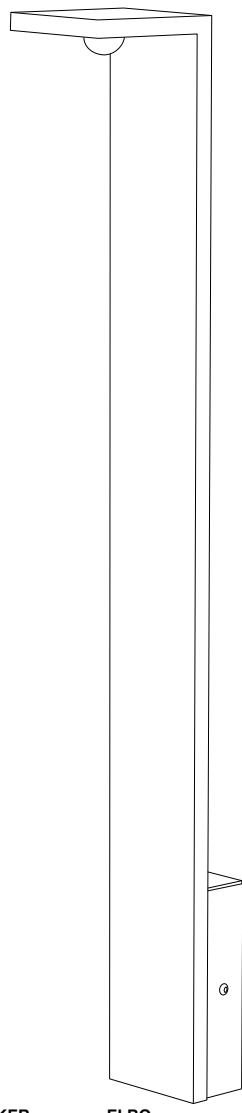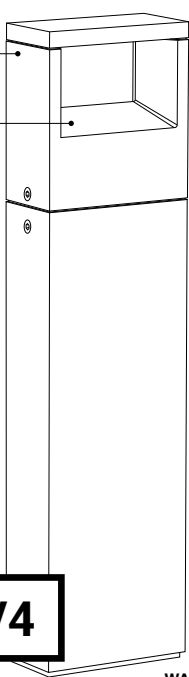

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			ELBO		BRIDGE P	OBLIX			WALKER II
			SYMMETRIC P	ASYMMETRIC P		OBLIX S	OBLIX	OBLIX F	
INSTALLATION									
	CBOX	216 12 00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	IP68 CONNECTION KIT	216 12 01	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	IP68 CONNECTOR 3P	216 12 02	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	PIN 4	229 01 04			<input type="checkbox"/>				
	PIN 11	229 01 11	<input type="checkbox"/>	<input type="checkbox"/>					
	PIN 12	229 01 12					<input type="checkbox"/>		<input type="checkbox"/>
	PIN 17	15222 0170				<input type="checkbox"/>			
	PIN 18	15222 0180						<input type="checkbox"/>	
	PLATE 7	229 02 07					<input type="checkbox"/>		<input type="checkbox"/>

B

OBLIX

The Oblix light effect tops any expectation. The unique design of this bollard and the positioning of its light unit results in maximum beam spread and a powerful play of light, providing an expressive and architectural touch to your project.


Oblix has a standard width of 150mm, while Oblix S is its smaller version of only 100mm wide. With its additional floor base, Oblix F increases the contact area between the bollard and its mounting surface for a more robust installation.

As such, one can opt for Oblix F for higher impact resistant bollards as it has an IK08 rating.




By shielding of the LED from sight, Oblix avoids direct exposure and dazzle, without compromising on light output. Oblix can be directly installed on any hard surface or - when combined with a pin - be planted in any green surrounding. Available in multiple heights from 150mm up to 1000mm, in both alu grey and dark grey finish.

www.detailight.com/oblif

IP55

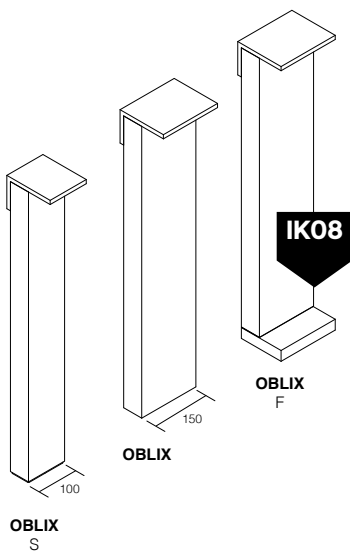

A



		OBLIX S			OBLIX			OBLIX F		
		H 164mm	H 418mm	H 716mm	H 160mm	H 410mm	H 710mm	H 158mm	H 708mm	H 1018mm
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP55	15112 9300 ◇	15113 9300 ◇	15114 9300 ◇	15118 9300 ◇	220 74 811 930 ◇	220 77 811 930 ◇	15117 9300 ◇	
	LED 10.4W / 1128lm / 500mA									15115 9300 ◇

◇ N ●



◇ A ● / N ●

◇ A ● / N ●

120-240V / 50-60Hz

OBLIX F - H1018mm: 100-240V / 50-60Hz



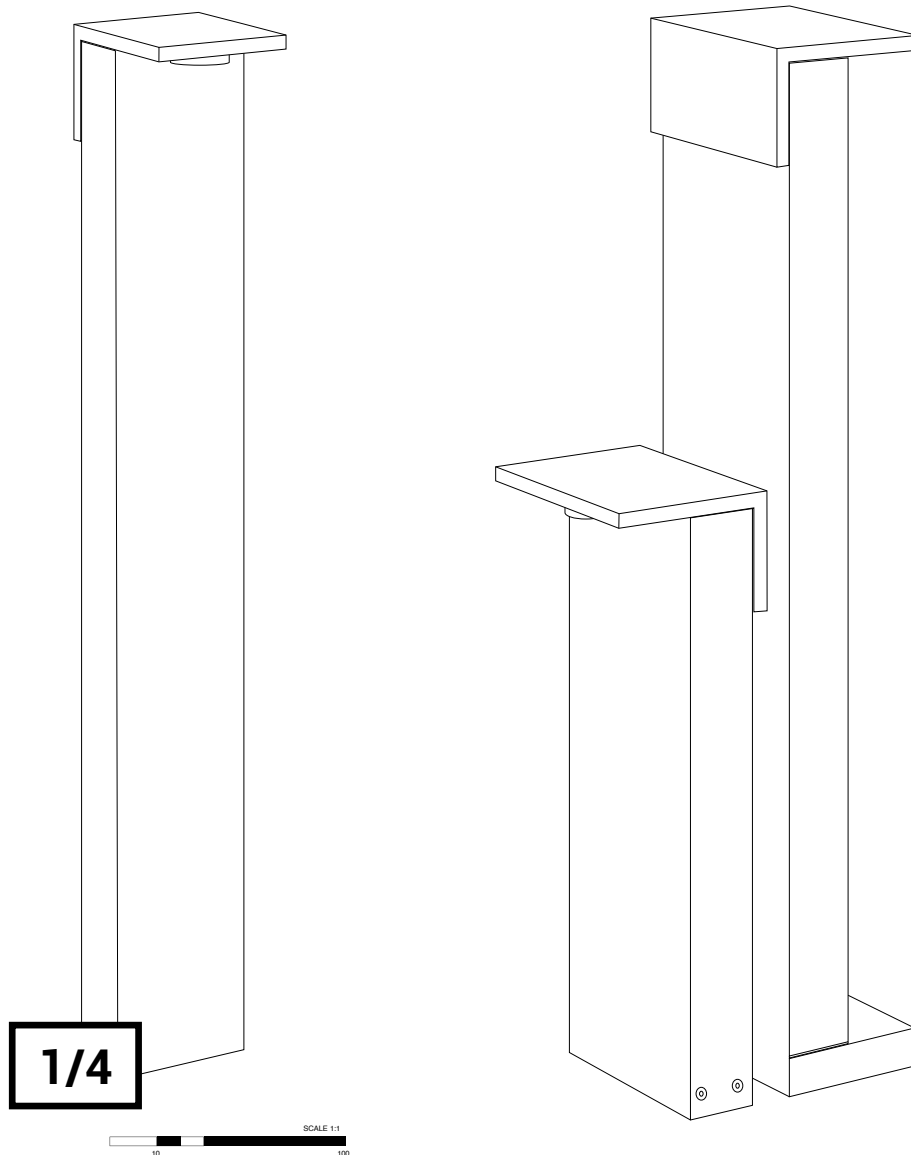

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


		ELBO			OBLIX			WALKER II
		SYMMETRIC P	ASYMMETRIC P	BRIDGE P	OBLIX S	OBLIX	OBLIX F	
INSTALLATION								
CBOX	216 12 00	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
IP68 CONNECTION KIT	216 12 01	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
IP68 CONNECTOR 3P	216 12 02	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
PIN 4	229 01 04			<input type="radio"/>				
PIN 11	229 01 11	<input type="radio"/>	<input type="radio"/>					
PIN 12	229 01 12					<input type="radio"/>		<input type="radio"/>
PIN 17	15222 0170				<input type="radio"/>			
PIN 18	15222 0180						<input type="radio"/>	
PLATE 7	229 02 07					<input type="radio"/>		<input type="radio"/>



STRIPER

If you are looking for a subtle floor surface light for outdoor use, the Striper might just be what you need. Due to its rather small size it is the perfect solution to light a path or driveway without disturbing the surrounding architecture or view of the nature around you. The rectangular shape of this product gives it a modern and sleek look. The combination of the poweredled with a 4° LENS, results in a very long and narrow beam.

www.deltalight.com/stripers



STRIPER




STRIPER

3000K / CRI>80	LED 2W / 245lm / 700mA	IP55	4°	223 00 12 ◇
				◇ A ● N ●
				120-240V / 50-60Hz

MONOPOL

Monopol is a bollard taking on the shape of a slender girder, rising from the ground up. Minimalistic in design, straightforward in functionality as it produces a very focused spread of light through its narrow opening at the front. Available in 2 sizes, 2 colors and perfect to create a play of light on paths or driveways.


www.deltalight.com/monopol



MONOPOL LED

MONOPOL LED


		H 260mm		H 700mm	
3000K / CRI>90	LED 7.1W / 812lm / 350mA	IP55	223 16 811 930 ◇	223 17 811 930 ◇	
				◇ A ● N ●	
				100-240V / 50-60Hz	



VISUAL COMFORT

B
KAP STRIPER

A

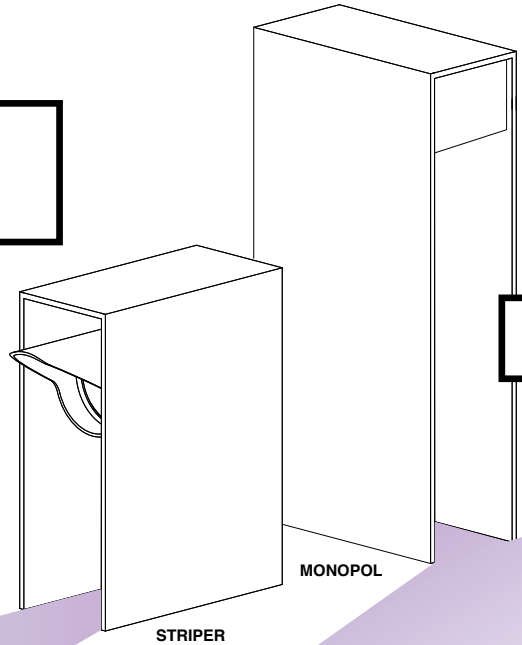

1/4

EXTERIOR FL

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

HONEYCOMB / LENS / GLASS			STRIPER		MONOPOL LED	
KAP STRIPER	223 00 10 B		A			
INSTALLATION						
CBOX	216 12 00			<input type="checkbox"/>		<input type="checkbox"/>
IP68 CONNECTION KIT	216 12 01			<input type="checkbox"/>		<input type="checkbox"/>
IP68 CONNECTOR 3P	216 12 02			<input type="checkbox"/>		<input type="checkbox"/>
PIN 1	229 01 01			<input type="checkbox"/>		<input type="checkbox"/>
PLATE 1	229 02 01			<input type="checkbox"/>		<input type="checkbox"/>

BAZIL


Bazil is characterized by an aluminum disc which holds a ring of leds, supported by a softly curved body that serves as a reflector, combining design and functionality.

The result is a pleasant, soft light that poses no risk of dazzling.



The large and more robust model fits perfectly around office buildings, public buildings, hotels and grand houses. Bazil comes in different colour combinations, including Delta Light's unique dark grey.

www.detalight.com/bazil

IP55

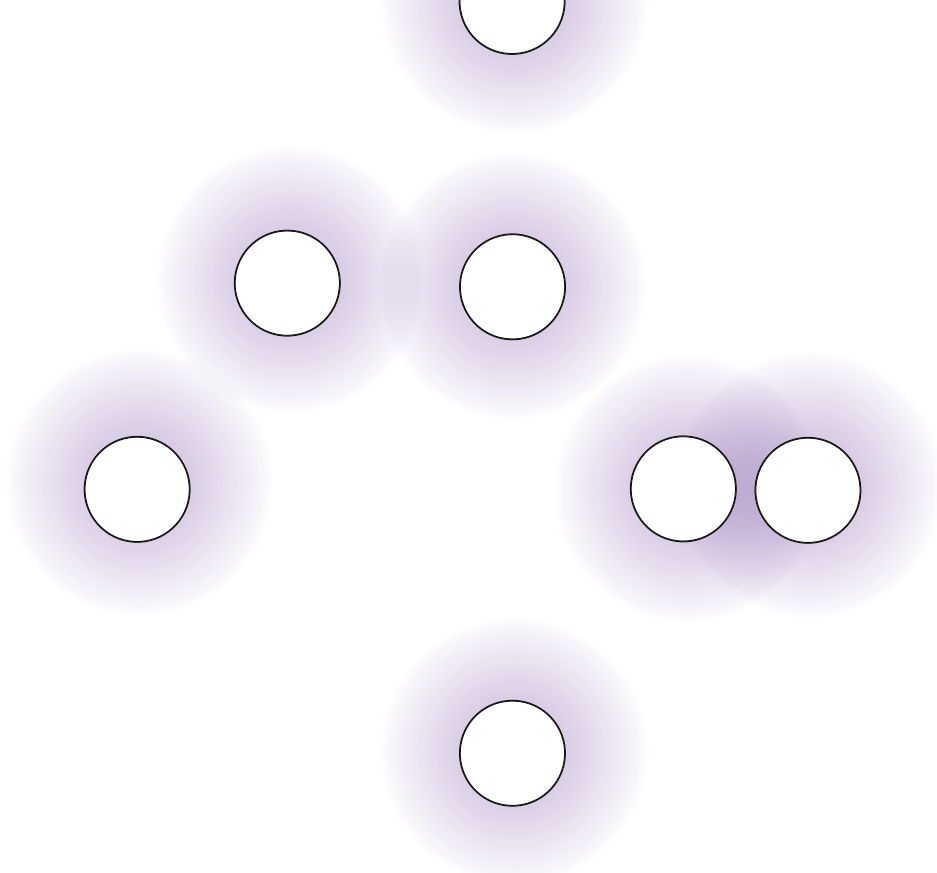

CURVED & SOFT

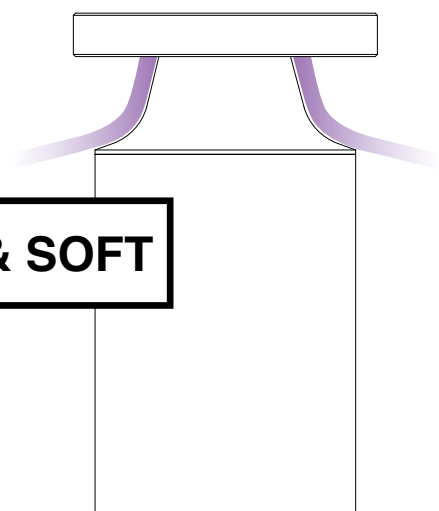

BAZIL


IK08

BAZIL

		BAZIL		
		H 215mm	H 365mm	H 715mm
3000K / CRI>80	LED 11W / 735lm / 500mA	IP55	222 121 12 ◇	
	LED 15W / 1020lm / 700mA			222 126 12 ◇

◇ A-ANO ●●● / N-ANO ●●●
110-240V / 50-60Hz



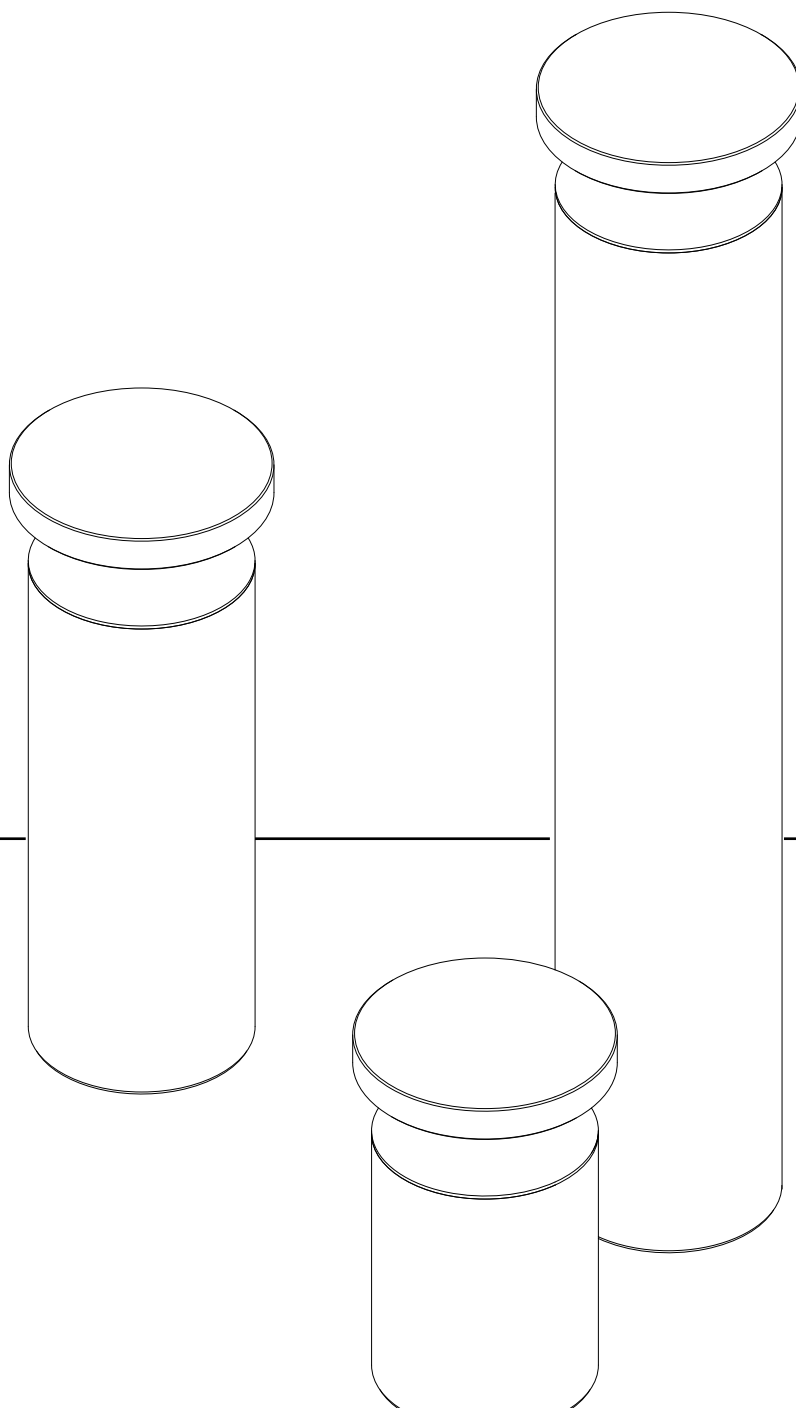

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

BAZIL

INSTALLATION

CBOX	216 12 00			<input type="checkbox"/>
IP68 CONNECTION KIT	216 12 01			<input type="checkbox"/>
IP68 CONNECTOR 3P	216 12 02			<input type="checkbox"/>
PIN 3	229 01 03			<input type="checkbox"/>



POLESANO

Polesano, a collaboration in product design between Dean Skira and Delta Light. The goal was to develop a new concept in lighting instruments, designed specifically for urban settings, be that a pedestrian pathway, roadway, park, square, façade or landscape. It needed to provide maximum flexibility for the designer to combine different optical characteristics, whilst keeping the same aesthetic for the entire system, regardless of the area.


The result is Polesano, offering modularity and flexibility, and providing personal involvement for the designer to meet specific functional and aesthetic needs of the project. Future developments can be integrating video surveillance, Wi-Fi, speakers or other IoT units.

DESIGN BY DELTA LIGHT® & DEAN SKIRA


www.deltalight.com/polesano

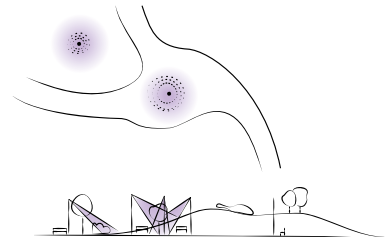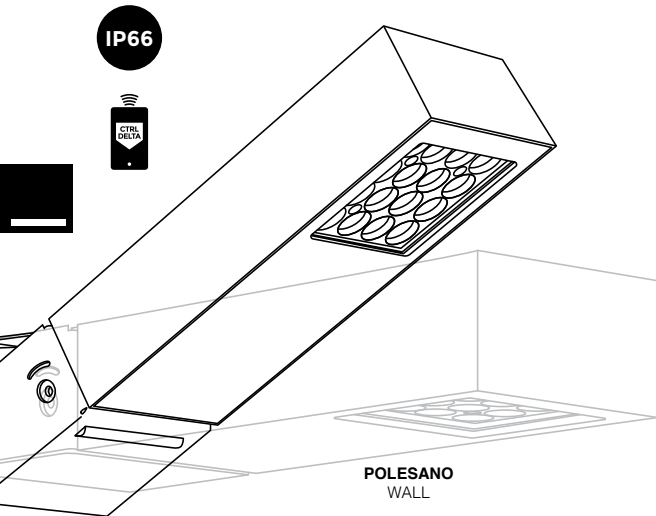


SPOT 13°

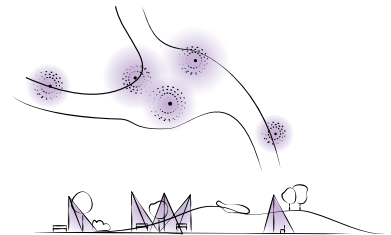

MEDIUM 47°


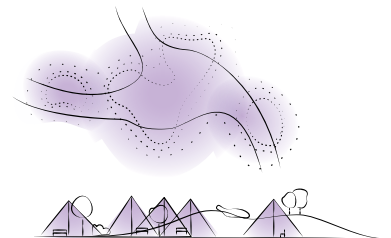


FLOOD 63°

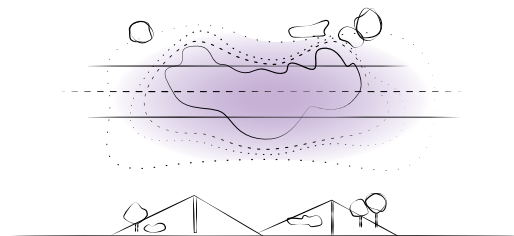


STREETLIGHT


Flexibility of multiple luminaires from a single infrastructure

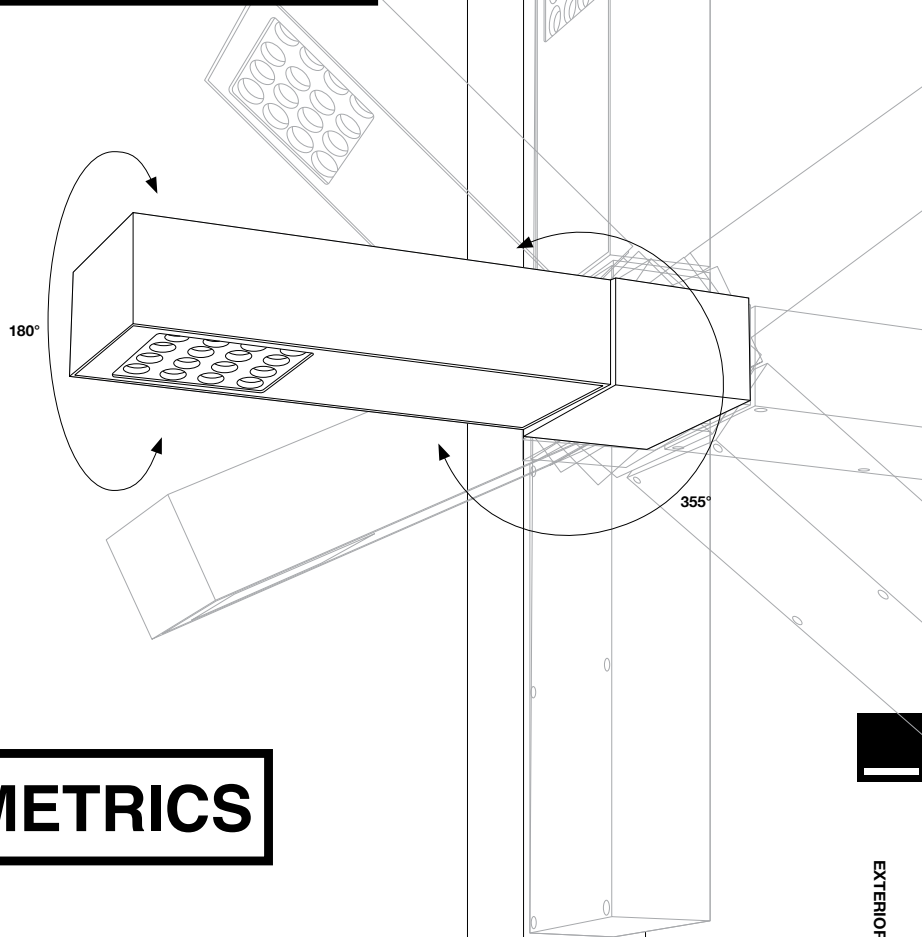


SPOT 13°



MEDIUM 47°



FLOOD 63°



PHOTOMETRICS

STREETLIGHT



THAT'S THE ONLY LIGHT I KNOW...

POLESANO
POLE

EXTERIOR FLOOR

POLESANO

Conventional street lights primarily illuminate horizontal areas. However, this is not sufficient to meet the needs of today's landscape design and illuminate with impact. The flexibility of the Polesano enables to illuminate vertically and horizontally, as the double axis in the connection box allows a 355° rotation from the luminaire vs. the pole and a 180° rotation from the luminaire itself. In this way, any possible set-up can be achieved.



POLESANO



POLESANO

(DALI-2 DIM)

POLESANO WALL





NON DIM

		POLESANO		POLESANO WALL	
4000K CRI>80	4481m / 42W	IP66	SPOT 13°	43 11 841 ◊	15931 8410 ◊
			MEDIUM 47°	43 11 842 ◊	15931 8420 ◊
			FLOOD 63°	43 11 843 ◊	15931 8430 ◊
			STREET LIGHT	43 11 844 ◊	15931 8440 ◊
3000K CRI>80	4481m / 42W	IP66	SPOT 13°	43 11 831 ◊	15931 8310 ◊
			MEDIUM 47°	43 11 832 ◊	15931 8320 ◊
			FLOOD 63°	43 11 833 ◊	15931 8330 ◊
			STREET LIGHT	43 11 834 ◊	15931 8340 ◊

◊ N-B ● ● / ◊ A-B ● ●

◊ N-B ● ●

220-240V / 0/50-60Hz



POLESANO



POLE 4m

H 4000mm

POLE 6m

H 6000mm

		POLE 4m		POLE 6m	
		ANCHORAGE 800mm	BASE PLATE RECESSED	ANCHORAGE 1000mm	BASE PLATE RECESSED
1 LUMINAIRE	IP54	431 400 111 11 ◊	431 400 221 11 ◊	431 600 121 11 ◊	431 600 321 11 ◊
2 LUMINAIRES - 1 LEVEL		431 400 111 211 ◊	431 400 221 211 ◊	431 600 121 211 ◊	431 600 321 211 ◊
2 LUMINAIRES - 2 LEVELS		431 400 111 221 ◊	431 400 221 221 ◊	431 600 121 221 ◊	431 600 321 221 ◊
3 LUMINAIRES		431 400 111 31 ◊	431 400 221 31 ◊	431 600 121 31 ◊	431 600 321 31 ◊
4 LUMINAIRES		431 400 111 41 ◊	431 400 221 41 ◊	431 600 121 41 ◊	431 600 321 41 ◊


◊ N ● ● / ◊ A ● ●

220-240V / 0/50-60Hz


INCL. 1 x CABLE H05 RN-F 4 x 1mm² / LUMINAIRE

INCL. WIRING




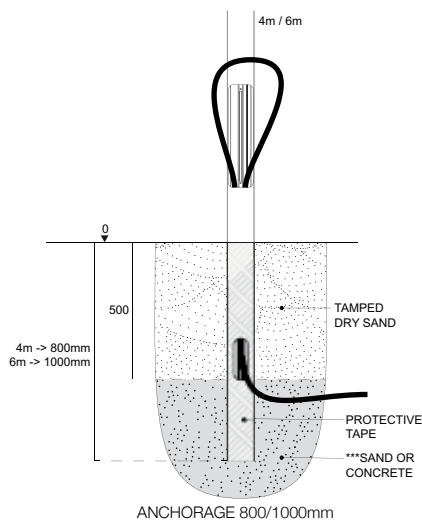


ANCHORAGE 800/1000mm

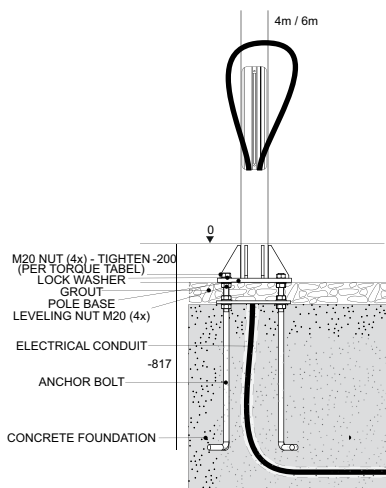


BASE PLATE RECESSED + PLATE 11




FINISH YOUR SPECIFICATION

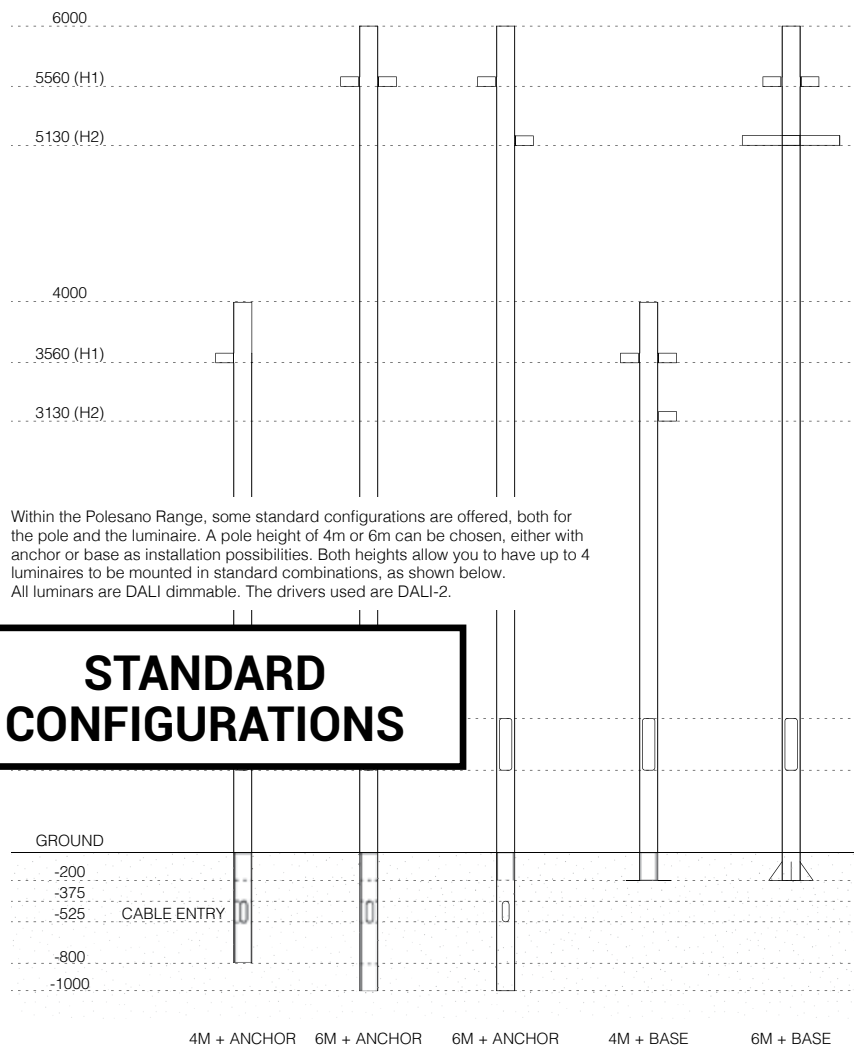

STANDARD CONFIGURATIONS

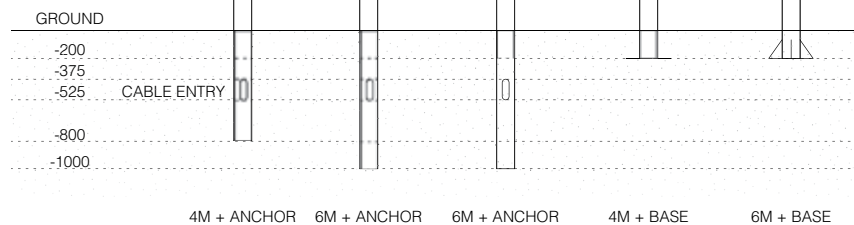

HEAD COMBINATIONS (TOPVIEW) : (POSSIBLE WITH ALL TYPES OF POLE)

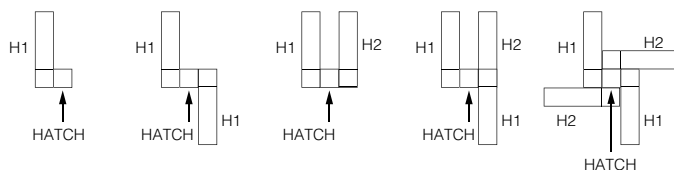

REQUIREMENT / OPTION / ACCESSORY

		POLESANO	POLESANO WALL	POLESANO POLE
HONEYCOMB / LENS / GLASS				
HONEYCOMB S105	431 03 01 B	A	A	
LINEAR SPREAD LENS S105	431 03 02	A	A	
INSTALLATION				
FUSE BOX	431 99 01			○
IP68 JUNCTION BOX 4P	431 99 02			○
IP68 CONNECTOR 4P	21034 0010			○
PLATE 11	229 02 11			○*
FINISH				
CAMERA (INCL. CABLE RJ 45)	15932 0020 A-B / N-B			○**
WIFI PUCK (INCL. CABLE RG 58)	15932 0030 A / N			○

ALL ELECTRICAL CONNECTION NEED TO COMPLY WITH IP53 REGULATIONS
* ONLY FOR VERSION WITH BASE PLATE
** POWER SUPPLY VIA POE / 8W

EXTERIOR FLOOR

B

Lighting is still a fast-changing business due to the evolution in led.

On the following pages we inform you on some typical characteristics of led and show you the possibilities on how to connect, switch and dim power supplies in a correct way. Further in this chapter you can find specific technical information on options, requirements and accessories.

OPTIONS

Depending on the material in which the luminaire will be installed, options can be used for the installation of a luminaire but are not necessary.

REQUIREMENTS

Needed for a proper installation of the luminaire.

ACCESSORIES

To modify the beam of the luminaire.

Technical

WIRELESS CONTROL

Delta Light introduces **CTRL DELTA**, enabling you to control and manage a selection of LED luminaires via mobile devices (Apple or Android). In essence, all dimmable luminaires can be wireless controlled, as long as the required components are either integrated or installed externally. Throughout this Lighting Bible®, the symbols below show if wireless control is possible with the luminaire in question.



CTRL DELTA INSIDE

WIRELESS CONTROL IS STANDARD AND THE LUMINAIRE HAS THE REQUIRED COMPONENT INTEGRATED.



CTRL DELTA READY

LUMINAIRE CAN BE WIRELESS CONTROLLED, BUT REQUIRES AN EXTERNAL COMPONENT. IN ORDER TO ENSURE THE BEST INTERACTION, THIS COMPONENT NEEDS TO BE INSTALLED NEARBY THE LUMINAIRE. INSTALLATION OPTIONS NEED TO BE CHECKED ACCORDING TO THE NATURE OF THE LUMINAIRE AND THE INSTALLATION POSSIBILITIES.

Easy to install. You don't need any new wiring, switches, devices or networks. Plug in the lighting fixture and pair it with your smartphone or tablet. No other configurations needed.

Easy to use. You can control your lights with an intuitive and visual user interface on your smartphone or tablet.

Easy to enjoy. With a tap on your smartphone you can set the ambience. With the Casambi App you can control your luminaires individual or in groups.

How to in 5 easy steps

1. Order your desired CTRL DELTA unit (not standard included with luminaire)
2. Install the CTRL DELTA unit
3. Download the Casambi App in the App or Play Store.
4. Find your CTRL DELTA unit in the Casambi app, using Bluetooth.
5. Take a picture of your room and place the light controls upon the related pictures. Now you can visually manage your luminaires directly through the picture.


For more information and technical info please go to www.deltalight.com/CTRLDELTA




TEC

CTRL DELTA IDENTITY KIT	
RF TECHNOLOGY	
GATEWAY	OPTIONAL*
MOBILE PLATFORM	
APPLE HOME	COMPATIBLE PENDING
WALL SWITCH	WIRELESS SWITCH PUSH BUTTON INTERFACE
NODES PER NETWORK	128 (IN & OUT)
iBEACON PROXIMITY	YES
AVAILABLE HARDWARE	1-10V DALI FE DIMMING 4 CHANNEL FLEX INTERFACE

* For external communication only

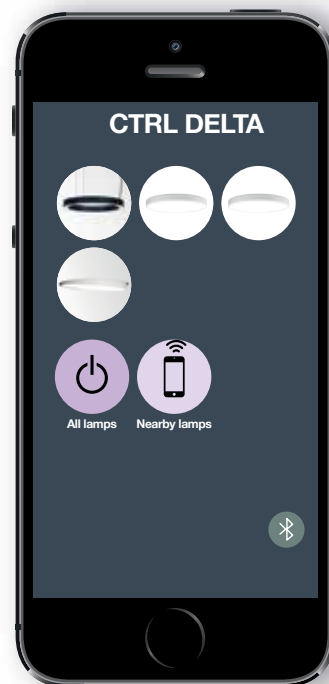





WIRELESS CONTROL

WIRELESS CONTROL DIM8
300 90 004 ED8

100-240V / 0,6A

IP20





WIRELESS CONTROL

WIRELESS CONTROL DIM5
300 90 004 ED5

220-240V / 0,6A

max.4 DALI DEVICES

IP20


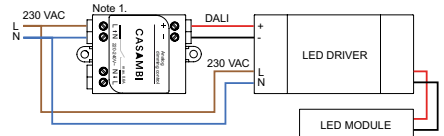


WIRELESS CONTROL

WIRELESS CONTROL 5A DIM1
300 90 016 ED1

100-240V / 5A

IP20


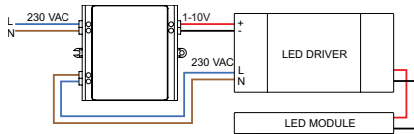


WIRELESS CONTROL

DALI REPEATER
300 90 137

max.64 DALI DEVICES
 max.DISTANCE 300m

IP20

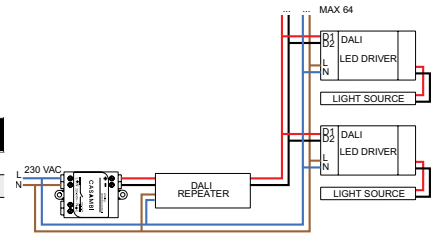


WIRELESS CONTROL

WIRELESS CONTROL 4 CHANNEL WHITE
300 90 005

12/24V-DC / 4 x 4A

IP20

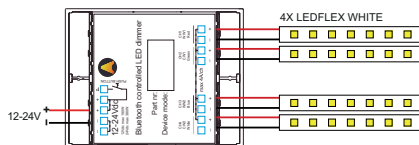


WIRELESS CONTROL

RGB
300 90 007

12/24V-DC / 3 x 4A

IP20

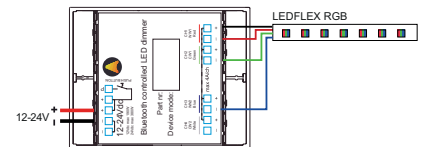


WIRELESS CONTROL

WIRELESS CONTROL 2 CHANNEL TUNABLE WHITE
300 90 006

12/24V-DC / 2 x 4A


IP20

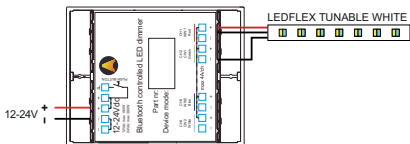

WIRELESS CONTROL FOR LEDFLEX RGBTW:
 USE 300 90 007 and 300 90 006

TEC

TECHNICAL



WIRELESS CONTROL

WIRELESS CONTROL DIM5 + DALI GATEWAY

21032 0065

DUAL MODE
WIRELESS CONTROL MODE:
 BROADCAST 1 ADDRESS:
 DALI or DT8 TW or DT8 RGB or
 DT8 RGB TW*
 (MAX. 35 DALI DEVICES)
 DALI POWER SUPPLY REQUIRED
 (21032 0075)


DALI GATEWAY MODE:
 1 ADDRESS/CTRL DELTA DEVICE

MAX DALI BUS CURRENT: 250mA
 VOLTAGE RANGE: 9.5-22.5V-DC


IP20

*selection to be made in app


WIRELESS CONTROL MODE

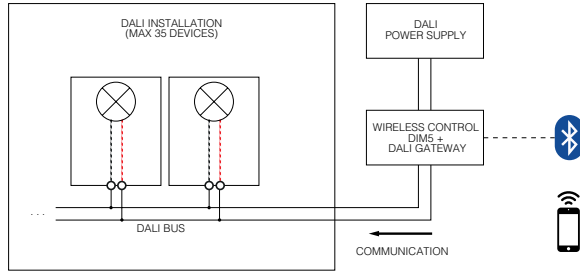

DALI GATEWAY MODE

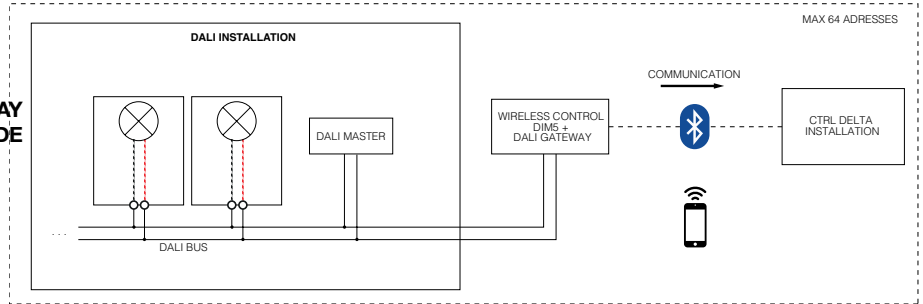

TEC




DALI

DALI POWER SUPPLY

21032 0075

DALI OUTPUT CURRENT:
 70mA
 DALI VOLTAGE RANGE:
 13.6-18.4V-DC
 220-240V / 50-60Hz
 IP20




WIRELESS CONTROL

M-WIRELESS CONTROL DIM5

21032 0085

MAX. 64 DALI DEVICES
 DIVIDED INTO 8 GROUPS.
 EACH GROUP CAN BE
 CONTROLLED SEPARATELY.

IP20





WIRELESS CONTROL

CTRL DELTA GATEWAY

21032 0090

CASAMBI APP
 PRE-INSTALLED
 220-240V / 50-60Hz
 IP20

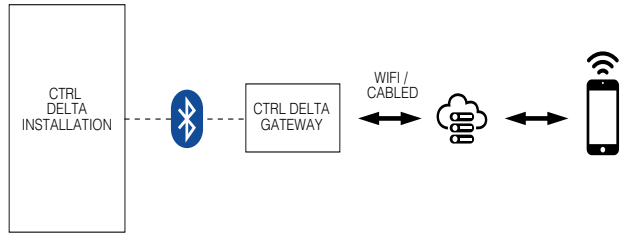

CTRL DELTA TRANSMITTER


WIRELESS SWITCH

300 90 312

◊ B ● / W ○

BATTERY POWERED
 5 YEAR LIFETIME
 4 FUNCTIONS

IP20




WIRELESS PUSH BUTTON INTERFACE

300 90 009

BATTERY POWERED
 5 YEAR LIFETIME
 4 FUNCTIONS EXTERNAL PUSH
 BUTTON
 TYPE OF FUNCTION
 SET BY CTRL DELTA

IP20




WIRELESS PUSH BUTTON INTERFACE 24V-DC

21032 0020

24V-DC

4 FUNCTIONS EXTERNAL PUSH
 BUTTON
 TYPE OF FUNCTION
 SET BY CTRL DELTA

IP20




SENSOR

AMBIENT LIGHT SENSOR + 24V DIMMER (PWM)

21032 0320




INPUT 24V-DC
 OUTPUT 24V-DC (PWM) max. 5A

IP67

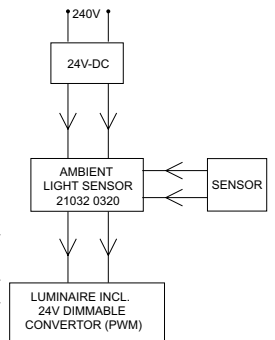

SMART 48 PATENTED

SMART 48: Dimming 48V luminaires or profiles by 2 wires!
 It collects the power from the 48V power supply and combines it with a DALI, 1-10V or Touch Dim input and sends it to the 48V converter in the luminaire. With the Dimmable Modulator 48V-DC DIM9, dimming can be done by only using 2 wires for both power and dimming. Or dimming can be done wireless, by choosing for the Wireless Dimmable Modulator 48V-DC.

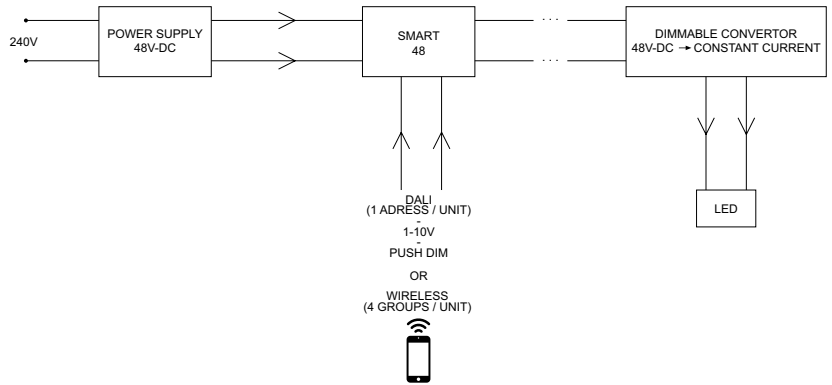

SMART 48 DIMMABLE MODULATOR

	DIM9	WD	PLUG-IN WD
IP20	300 90 011	300 90 012	21032 0030
	1-10V / DALI / PUSH DIM	WIRELESS	WIRELESS

MODULATED 48V-DC + DIM
 (MAX.200W)




TEC

TECHNICAL

PRESENCE DETECTION

PRESENCE DETECTION

By adding a presence detection sensor to a luminaire, energy consumption can be reduced while user comfort is raised. The sensor can switch luminaires on or off, according to the occupation in the room and the specific needs and wishes of the user. Time between departure and lights off (hold time), plus the detection zone, can be programmed to match the needs of your project. The presence detection sensor is particular for the Supernova Line range and needs to be installed inside the luminaire, avoiding visible sensors and resulting in clean ceilings and walls.

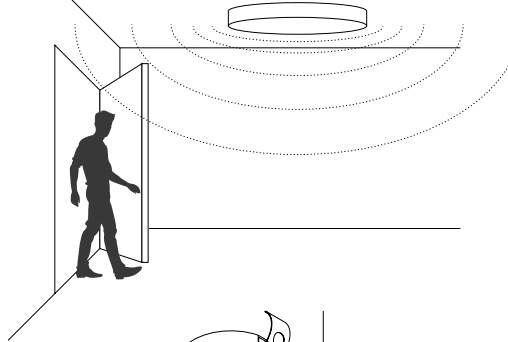


PRESENCE + DAYLIGHT DETECTION

Together with presence detection, also daylight detection provides energy savings in spaces with a lot of incoming daylight. The sensor captures the amount of daylight coming into the room and changes the light output of the luminaire according to the specific level of lux that is wanted in the room. In this way, luminaires will provide nearly no light on bright, sunny days and will be at full power on cloudy, grey days. To be used in the Streamliner profile, this sensor combines both presence and daylight detection, to allow you to reduce energy consumption to a minimum. For proper functioning of the daylight detection, this sensor needs to be visible and comes in an additional profile module. A remote control can be used to change the settings to your preference.

NEW

ST-SENSE

IP20




Ø97
68 x 40

DALI PRESENCE & DAYLIGHT SENSOR

21032 0205 ◊

◊ B ●



Ø97
68 x 40


WIRELESS SENSOR HUB

21032 0210 ◊

◊ B ●





DETECTION PATTERN 84°



PRESENCE & DAYLIGHT TEMPERATURE & HUMIDITY - AIR QUALITY

DETECTION PATTERN 94° x 82°



NEW

HF SENSOR

IP20

PRESENCE + DAYLIGHT DETECTION HF SENSOR

SRL-AMBIENT LIGHT & MOTION SENSOR DIM2

389 92 00 ED2 ◊


◊ ANO ● / B ● / W ○



220-240V / 50-60Hz

INFRARED PROGRAMMING UNIT

300 90 019



PRESENCE DETECTION HF SENSOR


300 90 311



220-240V / 50-60Hz
INVISIBLE MOUNTING - MAX. 400W LED POWER


2 / LIGHT LEVEL © BASED ON DAYLIGHT

3 / DELAY TIME © + CORRIDOR FUNCTION ©©

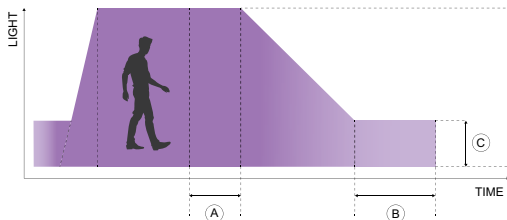


3 SETTINGS

1 / DETECTION PATTERN



3 SETTINGS

1 / DETECTION PATTERN




2 / HOLD-TIME 5 SECONDS / 30 MIN




3 / DAY-NIGHT

LAMPS LED SOLUTION

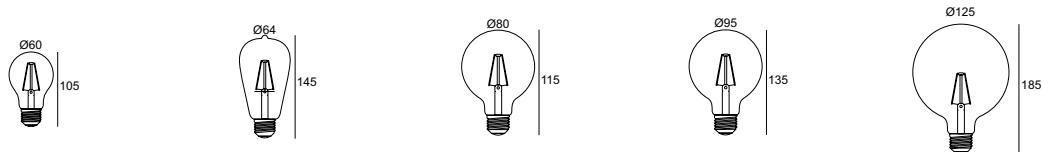

LED FILAMENT E27

A60 E27 6W 2700K	T64 E27 8W 2700K	GL80 E27 8W 2700K	GL95 E27 8W 2700K	GL125 E27 6W 2700K
CRI>80	CRI>80	CRI>80	CRI>80	CRI>80
670lm / 6W	870lm / 8W	870lm / 8W	950lm / 8W	800lm / 6W
NON DIM	NON DIM	NON DIM	NON DIM	NON DIM
21024 0120	309 109 01 27	309 109 02 27	309 109 03 27	309 109 06 27
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20	IP20

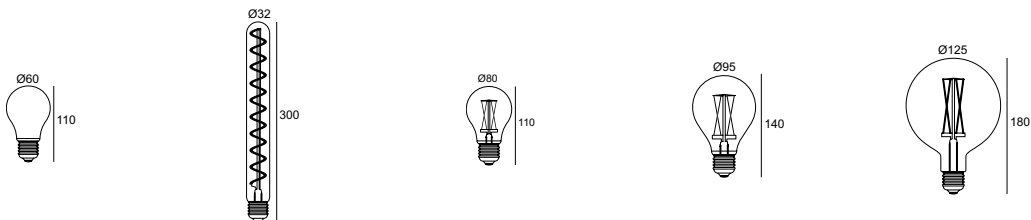

A60 E27 6W 2200K - MIST	T30 E27 12W 2200K	GL80 E27 6W 2200K - SMOKE	GL95 E27 6W 2200K - SMOKE	GL125 E27 6W 2200K - SMOKE
CRI>90	CRI>90	CRI>90	CRI>90	CRI>90
470lm / 6W	550lm / 12W	250lm / 6W	250lm / 6W	250lm / 6W
MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)
21024 0130	21024 0110	21024 0060	21024 0080	21024 0090
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20	IP20

NEW



T64 E27 6W 2200K - SMOKE	GL95 E27 8W 2700K - GOLD	GL125 E27 8W 2700K - GOLD	T45 E27 8W 2700K - MIST
CRI>90	CRI>80	CRI>80	CRI>80
250lm / 6W	800lm / 8W	800lm / 8W	900lm / 8W
MAINS DIMMING (FE)	NON DIM	NON DIM	MAINS DIMMING
21024 0070	309 109 04 27	309 109 05 27	21024 0280
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20




HALOLED

HALOLED Hi - 40° (5,5W) WW
2700K / CRI97
350lm / 4,5W
36°
MAINS DIMMING (FE)
309 107 38 32
GU10 / 220-240V / 50-60Hz
IP20

TEC

TECHNICAL

LED FLEX



LED FLEX IN INCL. 10 SILICONE MOUNTING BRACKETS
LED FLEX OUT INCL. 10 SILICONE MOUNTING BRACKETS + 3 ENDCAPS CLOSED + 3 ENDCAPS HOLES



Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62,5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
5W/m 551lm/m	10W/m 1045lm/m	15W/m 1853lm/m	20W/m 2470lm/m	18W/m 1460 lm/m	9,5W/m⁽¹⁾ 1116lm/m	11W/m	19,2W/m⁽²⁾

LED FLEX

		WHITE	WHITE MP	WHITE FP	WHITE HP	SOFT DIM	TW	RGB	RGB / TW
4000K ● CRI > 90	IN	21030 0060	21030 0140	21030 0220	21030 0300				
	OUT (IP65)	21030 0100	21030 0180	21030 0260	21030 0280				
3000K ● CRI > 90	IN	21030 0040	21030 0120	21030 0200	21030 0280				
	OUT (IP65)	21030 0080	21030 0160	21030 0240					
2700K ● CRI > 90	IN	21030 0030	21030 0110	21030 0190	21030 0270				
	OUT (IP65)	21030 0070	21030 0150	21030 0230					
1800K ● ▶ 3000K ● CRI > 90	IN					21030 0020			
	OUT (IP65)								
2700K ● ▶ 6000K ● CRI > 90	IN						21030 0390		
	OUT (IP65)								
RGB ● CRI > 90	IN							21030 0400	
	OUT (IP65)							21030 0410	
RGB WW ● / TW ⁽²⁾ CRI > 90	IN								21030 0420
	OUT (IP65)								

LED POWER SUPPLY 24V-DC (MAX. 3M/POWERLINE FOR LED FLEX > 15W/M)

NON DIM	24W / IP20	21012 0160	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	300 89 24 150	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	21012 0181	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	21012 0191	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	21012 0101	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0111	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0121	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI DIM (DIM5)	60W / IP20	21012 0205	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	21012 0225	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	21012 0135	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	21012 0145	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	21012 0155	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*

CONTROL


	RGB / RGB TW DRIVER							300 90 331	300 90 331	21032 0010
	TOUCH CONTROLLER							300 90 332	300 93 330	21032 0120
NON DIM								300 90 003 ED1		
1-10V	24V-DC DIM UNIT							300 90 003 ED5		
DALI DIM								300 90 010		

⁽¹⁾ 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS

⁽²⁾ RGB = 11,52W/m - TW = 3,4W/m - TW = 2700-6000K

* TO BE USED AS NON DIM

LED FLEX CL



5m - 24V-DC
NOT V MOUNTED

Dividable
per 25 mm
Continuous LED

9W/m
608lm/m

LED FLEX CL

LED FLEX IN/OUT

4000K ● CRI > 90	IN	21030 0340
	OUT	21030 0380
3000K ● CRI > 90	IN	21030 0320
	OUT	21030 0360
2700K ● CRI > 90	IN	21030 0310
	OUT	21030 0350

LED POWER SUPPLY 24V-DC (MAX. 5m/POWERLINE)

NON DIM	24W / IP20	21012 0160	max. 2,6m
	150W / IP67	300 89 24 150	max. 16,6m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 6,6m
	90W / IP20	21012 0181	max. 10m
	120W / IP20	21012 0191	max. 13,3m
	60W / IP67	21012 0101	max. 6,6m
	90W / IP67	21012 0111	max. 10m
	120W / IP67	21012 0121	max. 13,3m
DALI DIM (DIM5)	60W / IP20	21012 0205	max. 6,6m
	100W / IP20	21012 0225	max. 11,1m
	60W / IP67	21012 0135	max. 6,6m
	90W / IP67	21012 0145	max. 10m
	120W / IP67	21012 0155	max. 13,3m

OPTIONS LED FLEX

	LED FLEX IN SUPPLY CABLE SET	LED FLEX IN CONNECTION SET	LED FLEX IN CONNECTION CLIP SET
LED FLEX IN	21031 0470	21031 0510	21031 0480
LED FLEX FP	21031 0430	21031 0500	21031 0440
LED FLEX MP / HP	21031 0450	21031 0490	21031 0460

2 x 0.35mm² / 150mm
SET OF 10 pcs

2 x 0.35mm² / 150mm
SET OF 10 pcs


-
SET OF 10 pcs



LED FLEX IN
SUPPLY CABLE SET

LED FLEX IN
CONNECTION CLIP SET

LED FLEX IN
CONNECTION SET

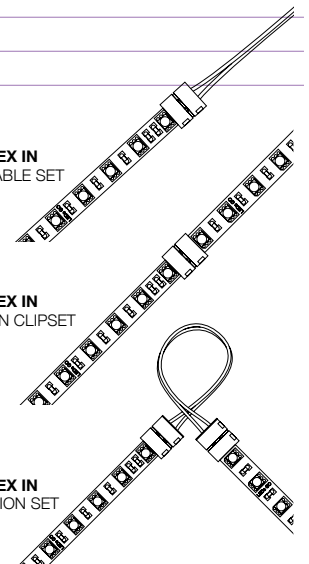

TEC

TECHNICAL

LED


At Delta Light®, we follow the evolution in LED at close range. What appears to be similar quality at first sight, can be totally different when looking at some of the underlying characteristics. These characteristics, like binning, risk factor, thermal management, degradation in luminous flux are part of the DNA of the Light Emitting Diode. These aspects determine the lifespan and the quality of the LED. For this matter, Delta Light® assures it only selects qualitative LEDs from qualitative manufacturers. High quality design cannot be made without high quality components.

COLOUR BINNING

No 2 LEDs are the same. When LEDs are produced, they vary in light output and in colour temperature, even when they are produced in the same batch. These differences may be small, but they do influence the quality of the LED. That is why manufacturers sort the LEDs, according to these performances, in different 'bins'. By reducing the number of bins to choose from, quality increases as performances are closer to each other.

MACADAM STEP

The differences in colour temperature between LEDs can be measured by looking at the MacAdam ellipses in Standard Deviation of Colour Matching (SDCM), according to the CIE 1931 Standard. This system looks at the ability of the human eye to perceive colour differences and ranks it on a scale from 0 to 10. Within 1 MacAdam ellipse a colour difference is not noticeable to the human eye under any condition. From 1 to 3 ellipses it is very difficult for the human eye to notice any difference in colour, meaning that up to 3 MacAdam ellipses all LEDs are very homogeneous when it comes to colour temperature.

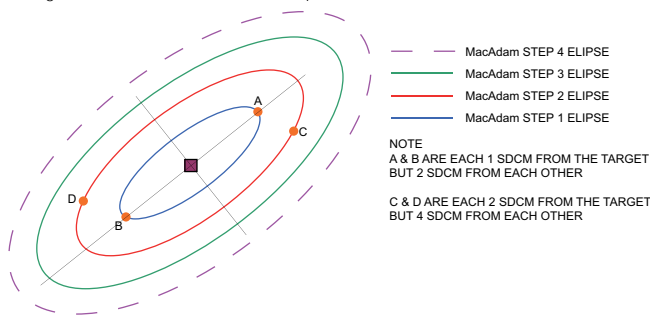

RISK FACTOR

The European standard for photo biological safety EN 62471 describes a measuring method to determine whether a lamp or luminaire carries a risk of eye and skin damage. LED light contains almost no light from the ultraviolet or infrared spectrum, and therefore is not dangerous to the skin.



It does however provide a high peak in the blue spectrum which, when looking into a bright light source (for a long period of time), may result in irreversible damage to the retina, the so-called the Blue Light Hazard.

Whether the risk is real, depends on several factors: luminance of the LED, colour temperature, but also light distribution and distance to the luminaire play an important role. When a LED is placed in a luminaire, it is located behind a lens, reflector or diffuser, thus levelling off the luminance.

To allow users to estimate the risk, the standard EN 62471 determines that lamps and luminaires must be divided into four risk groups:

- Risk group 0 ("exempt" group): this means that there is no danger, even with unlimited viewing of the light source.
- Risk group 1: The risk is limited, no more than 10.000 seconds of viewing is allowed (just under 3 hours).
- Risk group 2: up to 100 seconds of viewing is allowed.
- Risk group 3: up to 0.25 seconds of viewing is allowed. This is shorter than the natural aversion reflex of the eye.

For light sources of risk group 3, protective measures are always needed. For the other groups, it depends on the application. If the light sources belong in group 2 or 3, then this must be indicated.

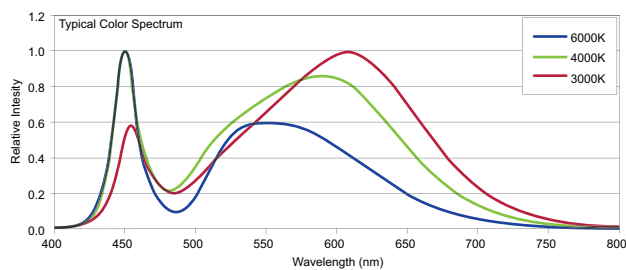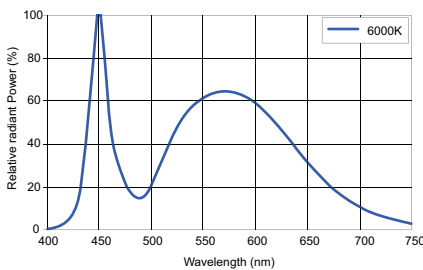


LED LIFESPAN LM-80 – TM-21

Conventional light sources mostly burn out before a serious loss of light output is noticeable. As the lifetime of LEDs exceeds the lifetime of conventional light sources, light output degrades over time before burning out. This degradation in luminous flux can be measured according to the L value and the operating period of time:

- L value shows the percentage of luminous flux regarding the initial luminous flux over a period of time.
- The operating period of time, expressed in hours.

Example: L₇₀ 60.000h means that after 60.000 hours the luminous flux will be at least 70% of the original luminous flux.


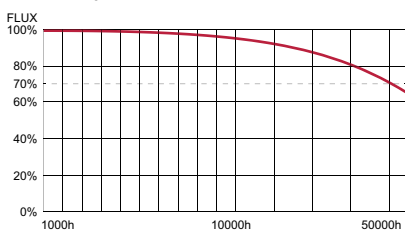


SOFT DIM

Soft Dim LED technology replicates the dimming behaviour of a conventional lamp where the colour temperature increases in warmth as it's dimmed. This is achieved through the use of specially selected LEDs of different colour temperatures and power types from premium chip manufacturers. Consistency is ensured without complexity with the use of specific and precise LED selection. The LEDs selected have colour tolerances that are tighter than 3 SDCM ensuring module-to-module accuracy.

The Soft Dim technology is incorporated in familiar Delta Light product families such as the Reo, Haloscan, iMax, Deep Ringo, Carree, Spy family, Tweeter and Minigrid. Also available in some of Delta Light's 48V Solutions such as Superloop MDL & Magnetic Profiles Splitline / Shittline M.

LED DIMMING

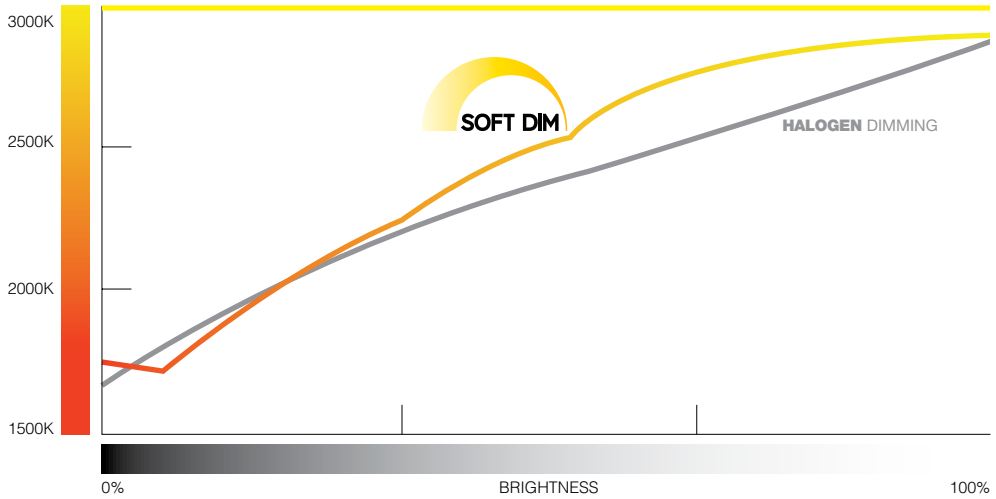

SOFT DIM





HUMAN CENTRIC LIGHTING

Since its creation, DL has embraced a continuous innovation process to integrate the latest technological developments towards fixtures characterized by good colour consistency, glare mitigation, design and aesthetics. These aspects satisfy the functionality of the lighting installation and create a pleasant ambient to affect the emotions of the end-user in a positive way. So far, the impact of these aspects were considered only for the visual task. Supernova Tunable White, with integrated Human Centric Light (HCL), also impacts the circadian rhythm.

The circadian clock regulates processes such as the melatonin secretion - a hormone responsible for the sleep - and our concentration and level of alertness. Unfortunately, the change in the working places towards indoor spaces isolates us from the natural stimulus of sunlight and therefore our circadian clock needs to be stimulated by artificial lighting emulating the daylight cycle.

The last years DL has been working on a lighting management system to enhance the well-being of the end-users in the frame of the HCL paradigm. Besides the in-house research and developments, joint efforts with universities and other research centers like the Light & Lighting laboratory from the KU Leuven, Attentia and the health care center of Roeselare allow us to provide better solutions aiming to address specific niches of application such as offices, schools, nursing homes, hotels and residences.

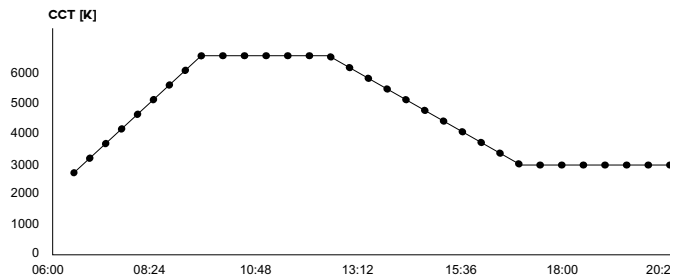


One of these solutions is Supernova Tunable White with integrated HCL, a system that changes its colour temperature during the day according to the graph shown above. This solution includes CTRL Delta and lets you control the luminaires easily with the touch of your smart device.



TUNABLE WHITE



LED SPECS

CRI 80			2700K ●	3000K ●	4000K ●	TYPICAL VALUES		LIFETIME		RISK GROUP ¹	SDCM ¹	EMERGENCY
CRI	LED	POWER	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	FORW. CUR.	FORW. VOLT.	LXX	HOURS			BLF %
	 [A]	1W	132lm - 132lm/W	132lm - 132lm/W	134lm - 134lm/W	350mA	2,85V*	L ₉₀	>120000h	RG2 THRESHOLD 0,6m	3	-
		1,4W	182lm - 128lm/W	182lm - 128lm/W	186lm - 131lm/W	500mA	2,85V*					-
		2W	245lm - 123lm/W	245lm - 123lm/W	255lm - 128lm/W	700mA	2,85V*					-
	 [C]	4,1W	420lm - 103lm/W	420lm - 103lm/W	ON REQUEST	350mA	11,6V*	L ₉₀	>45500h	-	2	100 %
		6W	558lm - 94lm/W	558lm - 94lm/W	ON REQUEST	500mA	11,9V*					72 %
	 [D]	6,4W	647lm - 101lm/W	647lm - 101lm/W	ON REQUEST	350mA	18,3V*	L ₉₀ L ₈₀	>30000h >60500h	RG1	2	100 %
9,5W		842lm - 89lm/W	842lm - 89lm/W	ON REQUEST	500mA	19,1V*	71 %					

TM30
Consult our website for more info on R9 values and TM30 details : Fidelity Index (Rf) and Gamut Index (Rg)

* +/- 8%

All the technical parameters for LED-apply to the entire module. In view of the complex manufacturing process for light emitting diodes (LED), the typical values given in this **Lighting Bible®** are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values. For most accurate info, please consult: www.deltalight.com/ledspecs.pdf


All lumen values in this catalogue are related to the Led units. For more info on the lumen values of the products please visit our website www.deltalight.com

CRI 90		2700K ●		3000K ●		4000K ●		TYPICAL VALUES		LIFETIME ¹		RISK GROUP ¹	SDCM ¹	EMERGENCY ²
LED	POWER	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	FORW. CUR.	FORW. VOLT.	L _{xx}	HOURS		BLF %				
	[A]	2W	221lm - 110lm/W	232lm - 116lm/W	NOT AVAILABLE	700mA	2,9V*	L ₉₀	>120000h	RG2 THRESHOLD 0.6m	3	-		
		2,3W	245lm - 106lm/W	260lm - 112lm/W	NOT AVAILABLE	800mA	2,9V*					-		
		2,6W	268lm - 102lm/W	286lm - 109lm/W	NOT AVAILABLE	900mA	2,9V*					-		
		3W	303lm - 98lm/W	327lm - 106lm/W	NOT AVAILABLE	1050mA	2,9V*					-		
	[C]	-												
	[D]	6,4W	587lm - 92lm/W	587lm - 92lm/W	NOT AVAILABLE	350mA	18,3V*	L ₉₀ L ₈₀	>30000h >60500h	RG1	2	50 %		
		9,5W	755lm - 79lm/W	755lm - 79lm/W	NOT AVAILABLE	500mA	19,1V*					35 %		
	[E]	3,9W	385lm - 98lm/W	385lm - 98lm/W	NOT AVAILABLE	350mA	11,3V*	L ₉₀	>41000h	RG2 THRESHOLD 0.6m	2	54 %		
		5,1W	480lm - 94lm/W	480lm - 94lm/W	NOT AVAILABLE	450mA	11,4V*					43 %		
		5,7W	519lm - 90lm/W	519lm - 90lm/W	NOT AVAILABLE	500mA	11,5V*					40 %		
		8,2W	677lm - 83lm/W	677lm - 83lm/W	NOT AVAILABLE	700mA	11,7V*					29 %		
		10,7W	814lm - 76lm/W	814lm - 76lm/W	NOT AVAILABLE	900mA	11,9V*					27 %		
	[F]	2W	201lm - 101lm/W	229lm - 115lm/W	NOT AVAILABLE	700mA	2,9V*	L ₈₀	>36300h	RG2 THRESHOLD 0.6m	3	-		
		3,2W	280lm - 88lm/W	319lm - 100lm/W	NOT AVAILABLE	1050mA	3,0V*					-		
		4,3W	351lm - 82lm/W	400lm - 93lm/W	NOT AVAILABLE	1400mA	3,1V*					-		
	[G]	2,9W	369lm - 126lm/W	386lm - 131lm/W	NOT AVAILABLE	350mA	8,4V*	L ₉₀	>50000h	RG1	2	-		
		6,2W	697lm - 112lm/W	728lm - 117lm/W	NOT AVAILABLE	700mA	8,9V*					-		
	[H]	6W	675lm - 112lm/W	703lm - 117lm/W	752lm - 125lm/W	300mA	20,0V*	L ₇₀	>50000h	RG1	2	55 %		
		7,1W	779lm - 110lm/W	812lm - 115lm/W	870lm - 123lm/W	350mA	20,2V*					48 %		
		10,4W	1083lm - 105lm/W	1128lm - 109lm/W	1204lm - 116lm/W	500mA	20,7V*					34 %		
		15W	1456lm - 97lm/W	1517lm - 101lm/W	1620lm - 108lm/W	700mA	21,4V*					26 %		
	[I]	11,3W	1561lm - 138lm/W	1632lm - 145lm/W	NOT AVAILABLE	350mA	32,2V*	L ₉₀	>50000h	RG1	1	30 %		
		13W	1775lm - 137lm/W	1855lm - 143lm/W	1963lm - 151lm/W	400mA	32,4V*					25 %		
		14,7W	1986lm - 135lm/W	2076lm - 141lm/W	2196lm - 149lm/W	450mA	32,6V*					25 %		
		16,4W	2195lm - 134lm/W	2294lm - 140lm/W	NOT AVAILABLE	500mA	32,8V*					20 %		
		27,1W	3410lm - 126lm/W	3565lm - 132lm/W	NOT AVAILABLE	800mA	33,9V*					14 %		
		30,8W	3802lm - 123lm/W	3974lm - 129lm/W	NOT AVAILABLE	900mA	34,2V*					13 %		
		36,5W	4380lm - 120lm/W	4579lm - 126lm/W	NOT AVAILABLE	1050mA	34,7V*					11 %		
	[J]	16,3W	2209lm - 136lm/W	2309lm - 142lm/W	2443lm - 150lm/W	500mA	32,5V*	L ₉₀	>50000h	RG1	1	22 %		
		23,2W	3031lm - 130lm/W	3169lm - 136lm/W	3353lm - 144lm/W	700mA	33,2V*					16 %		
		36W	4393lm - 122lm/W	4592lm - 127lm/W	4859lm - 135lm/W	1050mA	34,3V*					10 %		
		41,7W	4948lm - 119lm/W	5173lm - 124lm/W	5473lm - 131lm/W	1200mA	34,7V*					9 %		
	[Q]	5,8W	702lm - 121lm/W	734lm - 127lm/W	777lm - 134lm/W	350mA	16,7V*	L ₉₀	>50000h	RG1	1	51 %		
		7,7W	885lm - 115lm/W	925lm - 120lm/W	979lm - 127lm/W	450mA	17V*					41 %		
		8,6W	974lm - 113lm/W	1018lm - 118lm/W	1078lm - 125lm/W	500mA	17,2V*					37 %		
		12,5W	1318lm - 105lm/W	1378lm - 110lm/W	1457lm - 117lm/W	700mA	17,9V*					28 %		
	[R]	11,6W	1458lm - 125lm/W	1524lm - 131lm/W	1612lm - 139lm/W	350mA	33,2V*	L ₉₀	>50000h	RG1	1	32 %		
		15,3W	1830lm - 120lm/W	1913lm - 125lm/W	2024lm - 132lm/W	450mA	33,9V*					25 %		
		17,2W	2009lm - 117lm/W	2101lm - 123lm/W	2222lm - 130lm/W	500mA	34,3V*					23 %		
		25W	2688lm - 108lm/W	2811lm - 112lm/W	2974lm - 119lm/W	700mA	35,7V*					16 %		
	[U]	4,1W	551lm - 135lm/W	576lm - 141lm/W	ON REQUEST	250mA	16,3V*	L ₉₀	>50000h	RG1	1	72 %		
		5,8W	753lm - 129lm/W	787lm - 135lm/W	ON REQUEST	350mA	16,6V*					53 %		
		8,6W	1041lm - 121lm/W	1089lm - 127lm/W	ON REQUEST	500mA	17,1V*					38 %		
		12,4W	1403lm - 113lm/W	1467lm - 118lm/W	ON REQUEST	700mA	17,7V*					28 %		
CRI 90														
	[W]	6W	623lm - 105lm/W	NOT AVAILABLE	NOT AVAILABLE	350mA	17V*	L ₉₀	>50000h	RG1	2	54 %		
			[X]	8,3W	934lm - 113lm/W	NOT AVAILABLE	NOT AVAILABLE					250mA	33V*	48 %
				11,8W	1307lm - 110lm/W	NOT AVAILABLE	NOT AVAILABLE					350mA	33,8V*	35 %
				16,1W	1618lm - 101lm/W	NOT AVAILABLE	NOT AVAILABLE					450mA	35,7V*	20 %
				10,2W	1038lm - 109lm/W	NOT AVAILABLE	NOT AVAILABLE					500mA	20,4V*	32 %
CRI 90														
	[Y]	8,1W	1007lm - 124lm/W	NOT AVAILABLE	NOT AVAILABLE	450mA	18V*	L ₉₀	>50000h	RG1	2	-		
		9W	1087lm - 121lm/W	979lm - 109lm/W	NOT AVAILABLE	500mA	18V*					-		
	[Z]	17,8W	2054lm - 116lm/W	NOT AVAILABLE	NOT AVAILABLE	500mA	35,5V*	L ₉₀	>50000h	RG1	2	-		

DO'S & DON'TS PLAY.DELTALIGHT.COM/CONNECTLEDS


CONNECTION

CORRECT CONNECTION: SERIAL CONNECTION




WRONG CONNECTION: PARALLEL CONNECTION

Depending on the number of fixtures the LED modules will function at half (2 LED's), one third (3 LED's) the luminous intensity. Moreover, due to different forward voltages the current will not split in equal part.

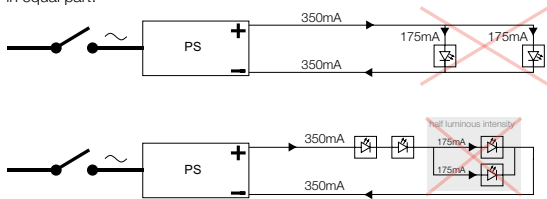

WRONG CONNECTION: TESTING OF LED MODULES ON SWITCHED ON POWER SUPPLY

Risk for an output voltage that exceeds the max for the LED.
A power supply that is switched on has max output on the secondary side (eg. 49V). The LED in eg. a Reo 3030 is 7W works at 350mA and 20,1V. 49V is far too high for the Reo 3030 >> LED will be damaged.

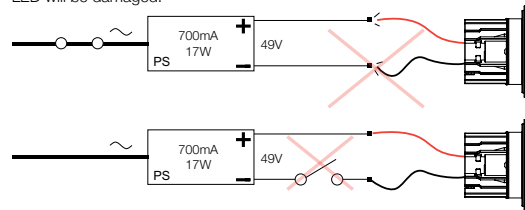


WRONG POWER SUPPLY:

Question:
How many Reo (7W) luminaires can be connected to power supply 300 90 914?
 $7W \times 4 = 28W \gg \text{max power of } 300\ 90\ 914 = 35W \gg \gg \text{OK}$
 $4 \times 20,1V = 80,4V \gg \gg \text{max voltage of } 300\ 90\ 914 = 72V \gg \gg \text{NOT OK}$

Answer:
3 x Reo (7W) luminaires can be connected to power supply 300 90 914

Therefore: **always consult the matrix on FOLD-OUT!**

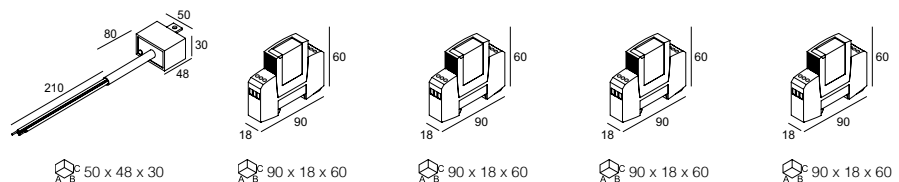


SURGE PROTECTION

PATENT	AC	AC 110-120V DIN	AC 230-240V DIN	DC 30V-DC	DC 75V-DC
--------	----	-----------------	-----------------	-----------	-----------

	300 90 013	300 90 017	300 90 018	300 90 014	300 90 015
IP20					
IP65					
	5 kA Nominal Discharge Current	2 kA Nominal Discharge Current	3 kA Nominal Discharge Current	1 kA Nominal Discharge Current	2 kA Nominal Discharge Current
	10 kA Max. Discharge Current	4 kA Max. Discharge Current	5 kA Max. Discharge Current	2 kA Max. Discharge Current	4 kA Max. Discharge Current
	230-240V / 50-60Hz	110-120V / 50-60Hz	230-240V / 50-60Hz	30V-DC	75V-DC
	□	□	□	◊	◊

Electrical devices are sensitive for excessive voltage peaks. Especially outdoor power lines are subject to direct and indirect lightning discharges. Also in industrial or semi-industrial area's the powerlines can be subject to high switching spikes. Therefore Deltalight strongly advises to use proper power line surge protection. Our AC surge protectors are to be installed on the primary side of led power supplies and the DC types on the secondary side. Both as close as possible to the device they have to protect.







CURRENT CONTROLLED

DIMMABLE LED POWER SUPPLY - INSTALLATION SCHEME

PLAY.DELTALIGHT.COM/DIMLEDS

- DIM1** 1-10V
- DIM6** SWITCH DIM
- DIM7** 1-10V + SWITCH DIM
- DIM8** FALLING EDGE DIMMING
- DIM9** 1-10V + SWITCH DIM + DALI

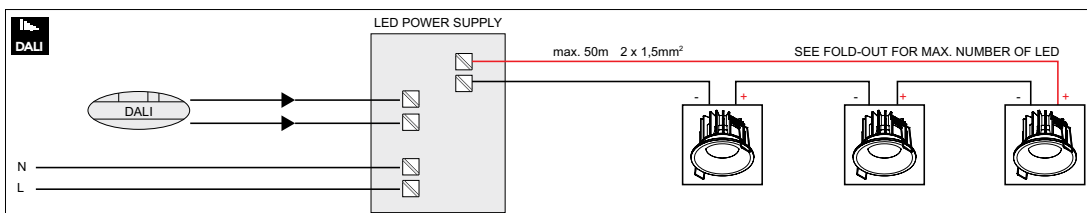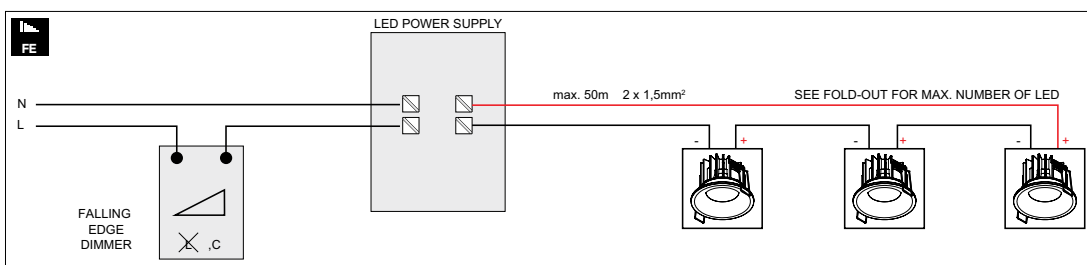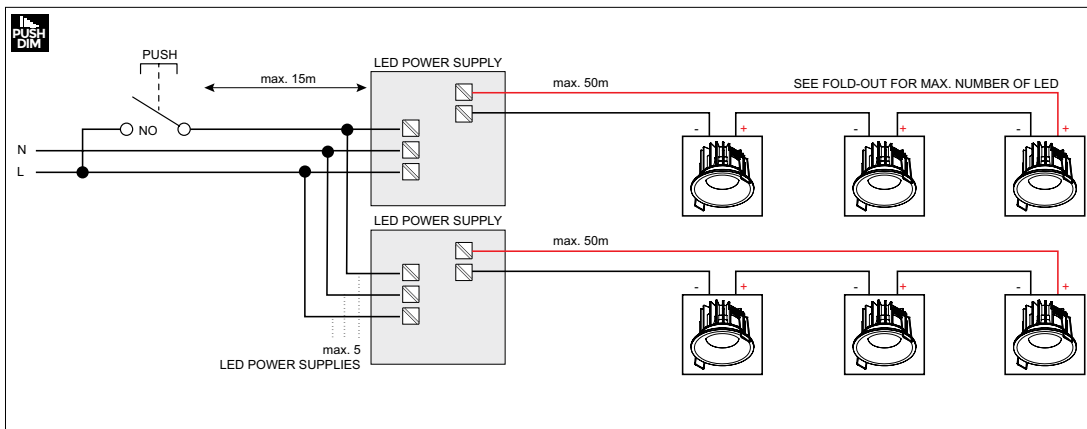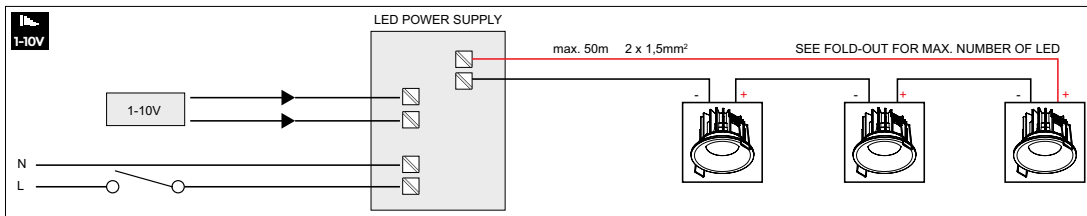

ALL DIAGRAMS ARE TYPICAL, PLEASE CHECK MAXIMUM POWER OF EACH INDIVIDUAL DEVICE FOR PRACTICAL USE.

TEC

TECHNICAL

POWER SUPPLY

NON DIM **CC** CONSTANT CURRENT


DIM **CCR** CONSTANT CURRENT REDUCTION

FF FLICKER-FREE


DIM 8 (MAINS DIM) **CCR** CONSTANT CURRENT REDUCTION

FF FLICKER-FREE: MIN DIM LEVEL OF DIMMING DEVICE TO BE ADJUSTED FOR FLICKER FREE DIMMING

TYPE 1




TYPE 2




TYPE 3



TYPE 4



TYPE 5




LASS-OH!	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
TEC	NON DIM	21012 0010	350mA / 15W	15-44V-DC	220-240V / 0 50-60Hz	II	20	$\lambda > 0,9$	147 x 44 x 22	ⓘ min. 50	2
			700mA / 30W	10-44V-DC	220-240V / 0 50-60Hz				147 x 44 x 22		
			1050mA / 40W	10-38V-DC	220-240V / 0 50-60Hz				147 x 44 x 22		
	1-10V	21012 0021	350mA / 18W	10-54V-DC	220-240V / 0 50-60Hz				130 x 42 x 30	ⓘ min. 54	2
			700mA / 36W	10-51V-DC	220-240V / 0 50-60Hz				130 x 42 x 30		
			1050mA / 36W	10-35V-DC	220-240V / 0 50-60Hz				130 x 42 x 30		
	DALI	21012 0035	350mA / 18W	10-54V-DC	220-240V / 0 50-60Hz				147 x 44 x 30	2	
			700mA / 38W	10-54V-DC	220-240V / 0 50-60Hz				147 x 44 x 30		
			1050mA / 38W	10-36V-DC	220-240V / 0 50-60Hz				147 x 44 x 30		
GYN W	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
TEC	MAINS	300 90 110	350mA / 10W	12-28V-DC	220-240 / 50-60Hz	II	20	$\lambda > 0,9$	102 x 39 x 21	ⓘ min. 42	4
	NON DIM	300 90 91	350mA / 15W (110V: 10W)	2-41V-DC	110-240 / 0 50-60Hz			$\lambda > 0,5$	115 x 34 x 19	ⓘ min. 40	2
INFORM / D-LINER	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
TEC	NON DIM	25510 0420	17W		220-240V / 0 50-60Hz	I	20		200 x 70 x 31	ⓘ min. 78	2
		25510 0430	45W		220-240V / 0 50-60Hz				200 x 70 x 31	ⓘ min. 78	
		25510 0440	25W		220-240V / 0 50-60Hz				200 x 70 x 31	ⓘ min. 78	
		25510 0450	60W		220-240V / 0 50-60Hz				200 x 85 x 31	ⓘ min. 92	
		25510 0460	100W		220-240V / 0 50-60Hz				235 x 100 x 31	ⓘ min. 106	
	DALI	25510 0075	50W		220-240V / 0 50-60Hz				360 x 30 x 21	ⓘ min. 45	
		25510 0085	75W		220-240V / 0 50-60Hz				360 x 30 x 21	ⓘ min. 45	
		25510 0375	17W		220-240V / 0 50-60Hz				200 x 70 x 31	ⓘ min. 78	
		25510 0385	45W		220-240V / 0 50-60Hz				200 x 70 x 31	ⓘ min. 78	
		25510 0395	25W		220-240V / 0 50-60Hz				200 x 70 x 31	ⓘ min. 78	
		25510 0405	60W		220-240V / 0 50-60Hz				200 x 85 x 31	ⓘ min. 92	
		25510 0415	100W		220-240V / 0 50-60Hz				235 x 100 x 31	ⓘ min. 106	
		SUPERLOOP	DIM	ART NR	POWER				OUTPUT	VOLTAGE	
TEC	1-10V	300 90 127	500mA / 27W		220-240V / 0 50-60Hz	II	20	$\lambda > 0,9$	98x43x30	ⓘ min. 54	2
		300 90 128	700mA / 36W		220-240V / 0 50-60Hz				98x43x30	ⓘ min. 54	
		300 90 132	1200mA / 70W		220-240V / 0 50-60Hz				240x60x40	ⓘ min. 80	
		300 90 133	1700mA / 99W		220-240 / 50-60Hz				240x60x40	ⓘ min. 80	
	DALI	300 90 131	700mA / 38W		220-240 / 50-60Hz				147x43x30	ⓘ min. 54	2
		300 90 129	900mA / 60W		220-240V / 0 50-60Hz				125x79x22	ⓘ min. 84	5
		300 90 130	1200mA / 60W		220-240V / 0 50-60Hz				220x85x31	ⓘ min. 95	2

CURRENT CONTROLLED

NR	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE	
3	NON DIM	21012 0080	180mA / 7,4W (110V: 7W)	2-41,5V-DC	110-240 / 50-60Hz		20	$\lambda > 0,8$	115 x 34 x 19	i min. 40	2	
			250mA / 10W (110V: 10W)	2-41,5V-DC								
4	MAINS	21012 0308	350mA / 7,35W	13-21V-DC	220-240 / 50-60Hz		44	$\lambda > 0,9$	48 x 30 x 20	i min. 40	3	
5		21012 0318	500mA / 10W	13-20V-DC					58 x 36 x 20		3	
6		21012 0328	700mA / 14,7W	13-21V-DC					68 x 36 x 23		3	
7		21012 0258	250mA / 4,2W	16-29V-DC					122 x 41 x 23		i min. 50	1
8	21012 0268		300mA / 8,7W	16-29V-DC								
9			250mA / 10,5W	26-42V-DC								
10		300mA / 12,6W	26-42V-DC									
11	MAINS	21012 0278	500mA / 14W	15-28V-DC	220-240 / 50-60Hz		44	$\lambda > 0,9$	138 x 44 x 30	i min. 55	2	
12			700mA / 19,6W	15-28V-DC								
13	DALI	300 90 148	1050mA / 22W (110V: 12W)	2-21V-DC	110-240 / 50-60Hz		20	$\lambda > 0,6$	111 x 38 x 28	i min. 48	4	
14			300 90 68	250mA / 12W (110V: 12W)								10-48V-DC
				350mA / 17W (110V: 15W)								5-48V-DC
				450mA / 22W (110V: 15W)								5-48V-DC
				500mA / 24W (110V: 15W)								5-48V-DC
		700mA / 32W (110V: 15W)		3-46V-DC								
15		300 90 125	250mA / 12W (110V: 12W)	15-49V-DC								
			350mA / 17W (110V: 15W)	10-49V-DC								
			450mA / 20W (110V: 15W)	5-45V-DC								
			500mA / 20W (110V: 15W)	5-40V-DC								
	700mA / 20W (110V: 15W)		3-28V-DC									
16	300 90 124	250mA / 13W (110V: 13W)	20-53V-DC									
		350mA / 18W (110V: 15W)	15-50V-DC									
		450mA / 20W (110V: 15W)	5-45V-DC									
		500mA / 20W (110V: 15W)	5-40V-DC									
		700mA / 20W (110V: 15W)	3-29V-DC									
		900mA / 20W (110V: 15W)	3-23V-DC									
17	300 90 63	350mA / 25W (110V: 25W)	2-74V-DC									
		500mA / 35W (110V: 35W)	2-72V-DC									
		700mA / 50W (110V: 40W)	2-72V-DC									
		850mA / 60W (110V: 40W)	2-70V-DC									
		900mA / 60W (110V: 40W)	2-66V-DC									
		1050mA / 60W (110V: 40W)	2-57V-DC									
18	300 90 136	1050mA / 45W (110V: 40W)	2-44V-DC									
		1200mA / 52W (110V: 40W)	2-44V-DC									
		1400mA / 55W (110V: 40W)	2-43V-DC									
19	300 90 69	250mA / 28W (110V: 28W)	20-112V-DC									
		350mA / 39W (110V: 39W)	20-112V-DC									
		450mA / 50W (110V: 40W)	20-112V-DC									
		500mA / 56W (110V: 40W)	2-112V-DC									
		700mA / 60W (110V: 40W)	2-86V-DC									
20	WDL	21012 005W	350mA / 18W	10-54V-DC	220-240 / 50-60Hz		44	$\lambda > 0,9$	147 x 43 x 30	i min. 54	2	
			450mA / 24W	10-54V-DC								
			500mA / 27W	10-54V-DC								
			700mA / 36W	10-51V-DC								
			900mA / 38W	10-42V-DC								
1050mA / 38W	10-36V-DC											
20	DALI DT8	21012 0355	500mA / 25W	10-50V-DC	220-240 / 50-60Hz			123 x 79 x 24	i min. 85	5		

TEC
TECHNICAL

POWER SUPPLY

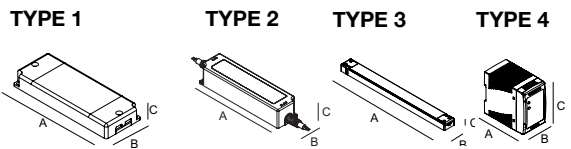


24V-DC

DIM	CLASS	IP	POWER / 24V-DC	ART NUMBER	VOLTAGE	LAMBDA	A X B X C	TYPE
NON DIM		IP20	24W	21012 0160	220-240V / 50-60Hz	$\lambda > 0,95$	137 x 50 x 16	1
		IP67	150W	300 89 24 150	100-240V / 0 50-60Hz		180 x 63 x 36	2
MAINS		IP20	75W	21032 0358	220-240V / 50-60Hz		110 x 75 x 30	1
			150W	21032 0368			170 x 75 x 30	1
0-10V		IP20	60W	21012 0171	220-240V / 50-60Hz		170 x 57 x 18	1 (PWM)
			90W	21012 0181			190 x 65 x 22	1 (PWM)
			120W	21012 0191			190 x 65 x 22	1 (PWM)
		IP67	60W	21012 0101	110-240V / 0 50-60Hz		150 x 53 x 35	2 (PWM)
			90W	21012 0111			171 x 63 x 38	2 (PWM)
			120W	21012 0121			171 x 63 x 38	2 (PWM)
DALI DIM		IP20	60W	21012 0205	220-240V / 50-60Hz		170 x 57 x 18	1
			100W	21012 0225			190 x 65 x 22	1
		IP67	60W	21012 0135	110-240V / 0 50-60Hz		150 x 53 x 35	2 (PWM)
			90W	21012 0145			171 x 63 x 38	2 (PWM)
			120W	21012 0155		171 x 63 x 38	2 (PWM)	

48V-DC

DIM	CLASS	IP	POWER / 48V-DC	ART NUMBER	VOLTAGE	LAMBDA	A X B X C	TYPE
NON DIM		IP20	100W (120V: 80W)	21012 0230	120-240V / 50-60Hz	$\lambda > 0,95$	298 x 30 x 17	3
			100W	300 89 48 100	110-240V / 50-60Hz	$\lambda > 0,90$	100 x 55 x 90	4
			200W (120V: 150W)	21012 0240	120-240V / 50-60Hz	$\lambda > 0,95$	332 x 30 x 22	3
			240W	300 89 48 240	100-240V / 50-60Hz	$\lambda > 0,90$	114 x 63 x 125	4
1-10V		IP67	90W	21032 0331	110-240V / 50-60Hz	$\lambda > 0,90$	171 x 63 x 38	2
DALI		IP67	90W	21032 0345	110-240V / 50-60Hz	$\lambda > 0,90$	171 x 63 x 38	2

POWERBOX

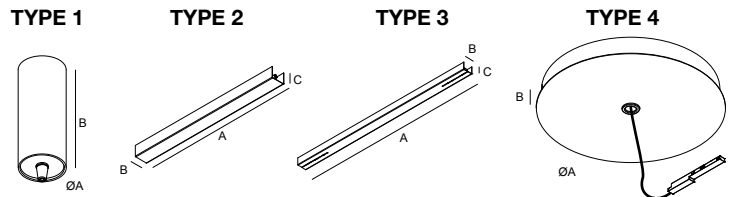


POWERBOX

	DIM	ART NR	COLOR	NAME	VOLTAGE	IP	A X B X C	TYPE
CUPPA C	NON DIM	24814 0080	B	LASS-OH! POWERBOX H15	110-240V / 50-60Hz	2	60x150	1
	DALI DIM	24814 0075	B	LASS-OH! POWERBOX H15 DIM5	110-240V / 50-60Hz	2	60x150	1
FEMTOLINE 35 / DOT.COM ON	NON DIM	300 24 060	B / W	FTL - POWERBOX 24V-DC / 60W	220-240V / 50-60Hz	1	480x58x40	2
	1-10V DIM	300 24 060 ED1	B / W	FTL - POWERBOX 24V-DC / 60W DIM1	220-240V / 0j50-60Hz	1	480x58x40	2
INFORM	DALI DIM	300 24 150 ED5	B / W	FTL - POWERBOX 24V-DC / 150W DIM5	220-240V / 0j50-60Hz	1	480x58x40	2
	NON DIM	25510 0010	B / W	INFORM SQ POWERBOX 50W	220-240V / 0j50-60Hz	1	800x40x30	3
	NON DIM	25510 0020	B / W	INFORM SQ POWERBOX 75W	220-240V / 0j50-60Hz	1	800x40x30	3
	NON DIM	25510 0030	B / W	INFORM SQ POWERBOX 25W	220-240V / 0j50-60Hz	1	800x40x30	3
	NON DIM	25510 0480	B / W	INFORM SQ POWERBOX L 50W	220-240V / 0j50-60Hz	1	570x48x40	2
	NON DIM	25510 0500	B / W	INFORM SQ POWERBOX L 75W	220-240V / 0j50-60Hz	1	570x48x40	2
	DALI DIM	25510 0015	B / W	INFORM SQ POWERBOX 50W DIM5	220-240V / 0j50-60Hz	1	800x40x30	3
	DALI DIM	25510 0025	B / W	INFORM SQ POWERBOX 75W DIM5	220-240V / 0j50-60Hz	1	800x40x30	3
	DALI DIM	25510 0045	B / W	INFORM SQ POWERBOX 35W DIM5	220-240V / 0j50-60Hz	1	800x40x30	3
	DALI DIM	25510 0495	B / W	INFORM SQ POWERBOX L 50W DIM5	220-240V / 0j50-60Hz	1	570x48x40	2
	DALI DIM	25510 0515	B / W	INFORM SQ POWERBOX L 75W DIM5	220-240V / 0j50-60Hz	1	570x48x40	2
	DALI DIM	25510 0475	B / W	INFORM SQ POWERBOX L 85W DIM5	220-240V / 0j50-60Hz	1	570x48x40	2
	DALI DIM	26810 0015	B / W	INFORM R POWERBOX D DIM5	220-240V / 50-60Hz	1	186x35x66	2
	DALI DIM	26810 0025	B / W	INFORM R POWERBOX D/U DIM5	220-240V / 50-60Hz	1	320x35x66	2
LASS-OH!	NON DIM	24814 0010	B	LASS-OH! POWERBOX	220-240V / 50-60Hz	1	250x58x39	2
	NON DIM	24814 0080	B	LASS-OH! POWERBOX H15	110-240V / 50-60Hz	2	60x150	1
	1-10V DIM	24814 0011	B	LASS-OH! POWERBOX DIM1	220-240V / 50-60Hz	1	250x58x39	2
	DALI DIM	24814 0015	B	LASS-OH! POWERBOX DIM5	220-240V / 50-60Hz	1	250x58x39	2
DALI DIM	24814 0075	B	LASS-OH! POWERBOX H15 DIM5	110-240V / 50-60Hz	2	60x150	1	
MIKALINE	NON DIM	30610 0170	B	POWERBOX 48V-DC / 100W PLUG-IN	220-240V / 50-60Hz	2	490x30x33	2
MILES C	MAINS DIM	23942 0018	B	MILES POWERBOX 350 mA DIM8	220-240V / 50-60Hz	2	60x167	1
SHIFTLINE M26L / M26H	NON DIM	23380 0030	B / W	SLM26H - POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	490x30x65	2
	NON DIM	23380 004W	B / W	SLM26H - POWERBOX 48V-DC / 100W WD	120-240V / 50-60Hz	2	490x30x65	2
	NON DIM	23380 0050	B / W	SLM26H - MID POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	490x30x65	2
	NON DIM	23380 0060	B / W	SLM26 - C POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	490x30x33	2
	NON DIM	23380 007W	B / W	SLM26 - C POWERBOX 48V-DC / 100W WD	120-240V / 50-60Hz	2	490x30x33	2
	NON DIM	23377 0040	B / W	SLM26L - POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	490x30x33	2
	NON DIM	23377 0050	B / W	SLM26L - MID POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	490x30x33	2
SOLISCAPE	NON DIM	27110 0090	B / W	SOLI - POWERBOX R 48V-DC / 200W	220-240V / 50-60Hz	1	183x40	3
	NON DIM	27110 0100	B / W	SOLI - POWERBOX L 48V-DC / 200W	220-240V / 50-60Hz	2	530x30x33	2
SUPERLOOP MDL	NON DIM	300 48 060	B	SUPERLOOP POWERBOX F - 48V / 60W	220-240V / 50-60Hz	1	480x58x40	2
	NON DIM	418 48 050	B	SUPERLOOP POWERBOX L - 48V-DC / 50W	220-240V / 50-60Hz	2	80x200	1
	NON DIM	418 48 100	B	SUPERLOOP POWERBOX H - 48V-DC / 100W	220-240V / 50-60Hz	1	80x300	1
SUPERLOOP SBL	1-10V DIM	321 55 205 ED1	B / W	SUPERLOOP POWERBOX L 500mA DIM1	220-240V / 0j50-60Hz	2	80x200	1
	1-10V DIM	321 55 207 ED1	B / W	SUPERLOOP POWERBOX L 700mA DIM1	220-240V / 0j50-60Hz	2	80x200	1
	1-10V DIM	321 55 312 ED1	B / W	SUPERLOOP POWERBOX H8 1200mA DIM1	110-240V / 50-60Hz	1	80x300	1
	1-10V DIM	321 55 317 ED1	B / W	SUPERLOOP POWERBOX H8 1700mA DIM1	110-240V / 50-60Hz	1	80x300	1
	DALI DIM	321 55 307 ED5	B / W	SUPERLOOP POWERBOX H8 700mA DIM5	220-240V / 0j50-60Hz	2	80x300	1
	DALI DIM	20548 0015	B / W	SUPERLOOP POWERBOX H9 900mA DIM5	220-240V / 0j50-60Hz	2	90x300	1
DALI DIM	20548 0025	B / W	SUPERLOOP POWERBOX H9 1200mA DIM5	220-240V / 0j50-60Hz	2	90x300	1	

TEC


TECHNICAL

POWER CONVERTER



LED POWER CONVERTER 48V-DC DIM5

DIM	CLASS	IP	POWER	ART NUMBER	CURRENT	LAMBDA	A X B X C	
DALI DIM (DIM5)		IP20	15W	300 48 350 ED5	48V-DC ▶ 350mA-DC	$\lambda > 0,95$	298 x 30 x 17	min. 45
			22W	300 48 500 ED5	48V-DC ▶ 500mA-DC	$\lambda > 0,93$	100 x 55 x 90	min. 45
			25W	300 48 700 ED5	48V-DC ▶ 700mA-DC	$\lambda > 0,95$	332 x 30 x 22	min. 45

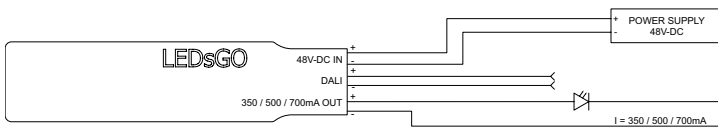


EXAMPLE POWER CONVERTOR


1. LED Power Convertor 48V-DC to 500mA/22W DIM5

300 48 500 ED5 + 48V-DC Power Supply *
Min 1 / Max.2 PLAT-OH! can be connected - Dimming by DALI

* Minimum power 48V-DC Power Supply = (number of luminaires x power of luminaire) + 15%



Ø KIT x 55 / max.12,5



76 x 55 / max.12,5

PLAT-OH!

PLAT-OH! TRIMLESS

PLAT-OH!

Color	LED [U]	LED [W]	IP20	Beam Angle	Trimless Part Number	Standard Part Number
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	LED [U] 8.6W / 1089lm / 500mA	IP20	23°	29513 9310	29511 9310
	LED [U] 5.8W / 753lm / 350mA	LED [U] 8.6W / 1041lm / 500mA		36°	29513 9320	29511 9320
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA	LED [U] 8.6W / 1041lm / 500mA	IP20	23°	29513 9210	29511 9210
	LED [U] 5.8W / 753lm / 350mA	LED [U] 8.6W / 1041lm / 500mA		36°	29513 9220	29511 9220
SOFT DIM	3000-1800K / CRI>90	LED [W] 6W / 623lm / 350mA	IP20	23°	29514 9010	29512 9010
	LED [W] 6W / 623lm / 350mA			36°	29514 9020	29512 9020

EMERGENCY UNIT

7W / 1H

65 x 180 (unit)
 27 x 60 / max. 25 (led indicator)

25-200mA - 9-58V-DC

21032 0270 B / W


220-240V / 50-60 Hz

NI-MH BATTERY 7,2V - 2Ah
EMERGENCY OPERATION 1h
CHARGING TIME 24h

IP20


Emergency units are battery powered units that come into force in case of general power failure.

In this Lighting Bible we offer emergency units specifically for LED luminaires. Thanks to the battery, a luminaire can keep emitting an amount of light, equal to a percentage of the nominal value when the luminaire is emitting at full power. This percentage is determined by the emergency unit and is known as the Ballast-Lumen Factor (BLF).

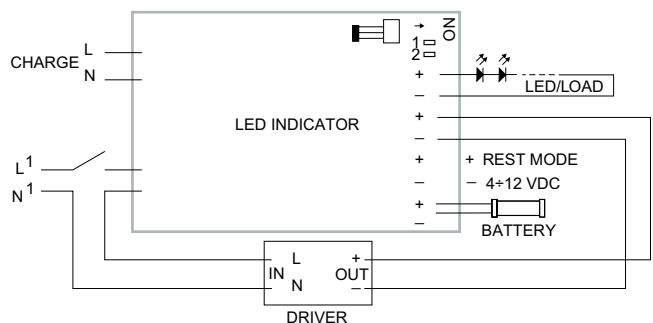





MAINTAINED WITH EXTERNAL ELECTRONIC DRIVER DIAGRAM
MAX. 2m DISTANCE EMERGENCY UNIT - DRIVER

VOLTAGE CONTROLLED






24V-DC DIM UNIT

24V-DC / 4A DIM1	24V-DC / 4A DIM5	24V-DC / 4A WIRELESS DIM
min. 30 1-10V	min. 30 DALI	min. 30 WIRELESS
300 90 003 ED1	300 90 003 ED5	300 90 010
24V-DC / 4A (max.96W)	24V-DC / 4A (max.96W)	24V-DC / 2 x 4A (max.96W)
IP20	IP20	IP20

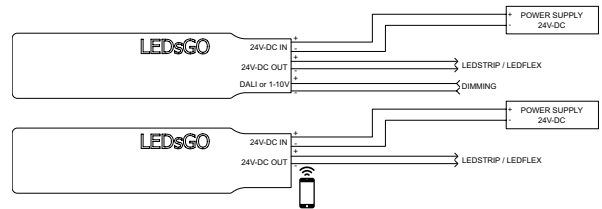





TOUCH CONTROLLER

TW TOUCH CONTROLLER DMX	RGB TOUCH CONTROLLER DMX	RGBTW TOUCH CONTROLLER DMX
min. 30 DMX	min. 30 DMX	min. 30 DMX
300 90 332	300 90 330	21032 0120
INPUT 12V-DC / 24V-DC - DMX OUT	INPUT 12V-DC / 24V-DC - DMX OUT	INPUT 12V-DC / 24V-DC - DMX OUT
STATIC MODE EXCL. POWER SUPPLY 12V-DC / 24V-DC	DUAL MODE STATIC / DYNAMIC EXCL. POWER SUPPLY 12V-DC / 24V-DC	DUAL MODE STATIC / DYNAMIC EXCL. POWER SUPPLY 12V-DC / 24V-DC
IP20	IP20	IP20



LED DIMMODULE 24V

3CH / 6A DIM2	5CH / 5A DIM5
DALI / SWITCH DIM ONE UNIT ONLY	DALI DT8
300 90 24 ED2	21032 0145
EXCL. POWER SUPPLY 12V-DC / 24V-DC INPUT 12/24V-DC OUTPUT MAX 432W / 18A (3 DALI CHANNELS OF 6A) FOR LEDFLEX W	EXCL. POWER SUPPLY 12V-DC / 24V-DC INPUT 12/24V-DC OUTPUT MAX 600W / 25A (5 DALI CHANNELS OF 5A 1 ADDRESS) FOR LEDFLEX RGBTW
IP20	IP20
INSTALLATION SCHEME: TEC 26	INSTALLATION SCHEME: TEC 26



RGB

RGB DRIVER DMX	RGBTW DRIVER DMX	RGBTW REPEATER
DMX	DMX	-
300 90 331	21032 0010	21032 0130
INPUT 12V-DC OUTPUT RGB 75W	INPUT 24V-DC OUTPUT 5 x 120W	INPUT 24V-DC OUTPUT 5 x 5A
INPUT 24V-DC OUTPUT RGB 150W	DUAL MODE DMX / STAND ALONE EXCL. POWER SUPPLY 24V-DC	EXCL. POWER SUPPLY 24V-DC
DUAL MODE DMX / STAND ALONE EXCL. POWER SUPPLY 12V-DC / 24V-DC	IP20	IP20
IP20		
FOR COMMON ANODE RGB LEDFLEX	FOR COMMON ANODE RGBTW LEDFLEX	FOR COMMON ANODE RGBTW LEDFLEX

TRANSFO

LED TRANSFO 12V - 70W
MAINS DIMMING (FE)
300 89 12 71
220-240V / 50-60Hz
OUTPUT 12V-AC
IP20

FE DIMMER


FALLING EDGE DIMMER
200W DIM 2
DIMMING OUTPUT FE DIMMING (ED8) 3-200W
300 90 126
220-240V / 50-60Hz
IP20
FOR BUTLER / SUPERNOVA XS / SUPER-OHI XS

TEC


TECHNICAL

VOLTAGE CONTROLLED


LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX WHITE

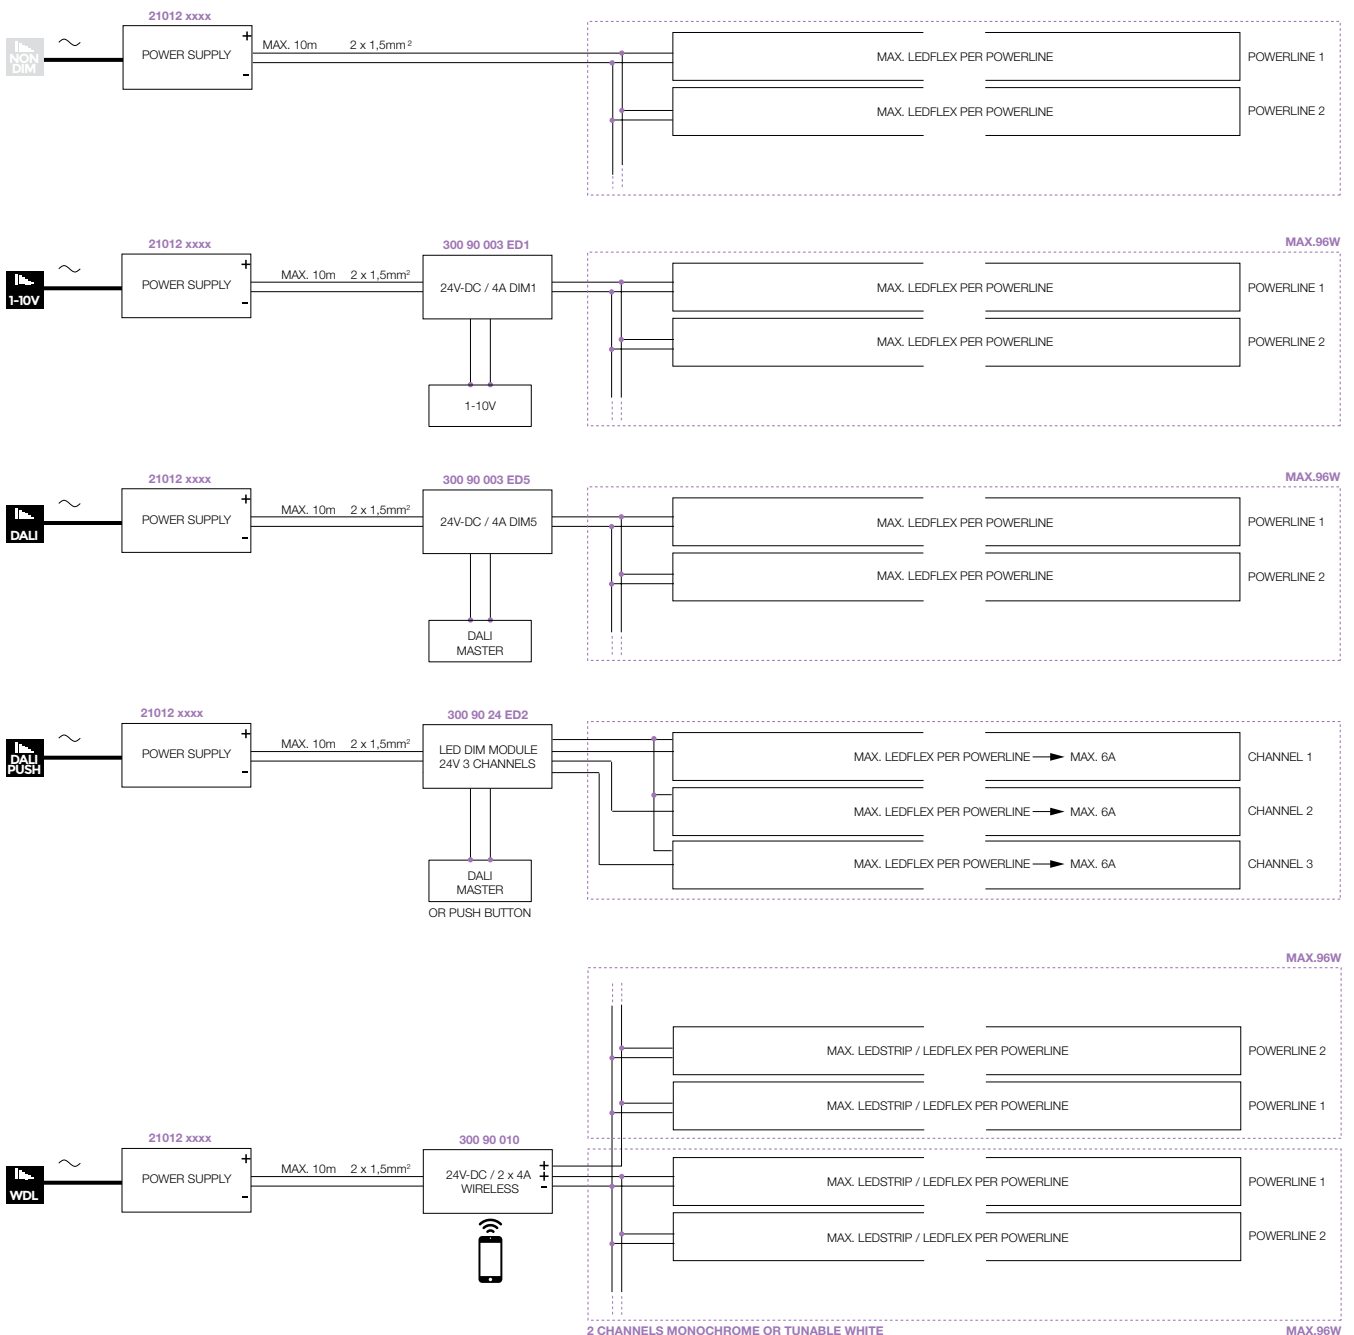


LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX RGB

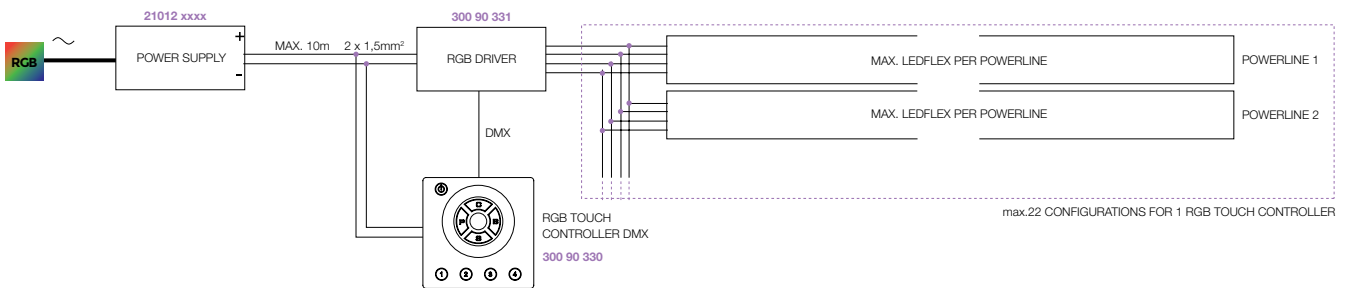

LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME - LEDFLEX TW

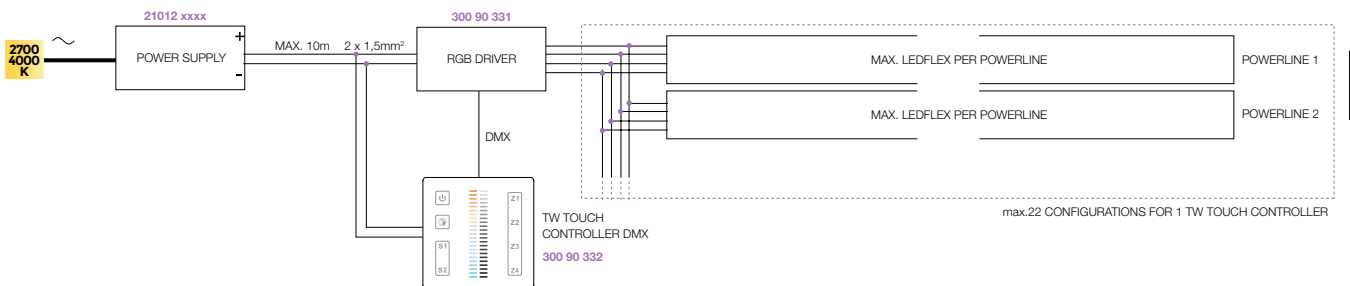

LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX RGBTW

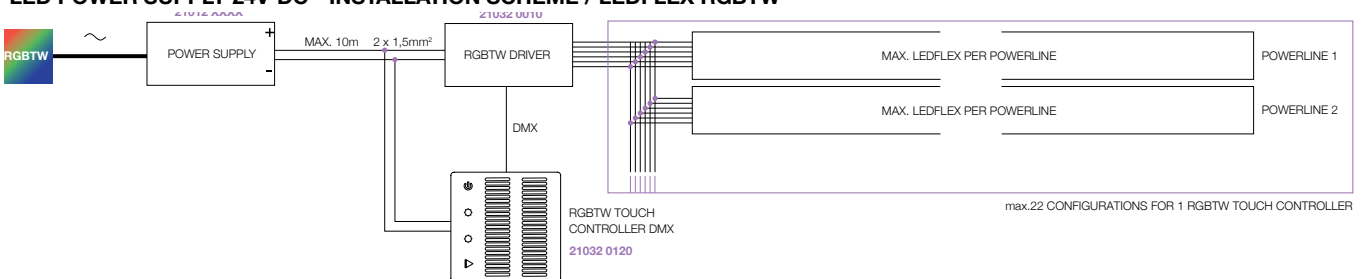

ALL DIAGRAMS ARE TYPICAL, PLEASE CHECK MAXIMUM POWER OF EACH INDIVIDUAL DEVICE FOR PRACTICAL USE.
MAX. LEDFLEX PER POWERLINE PAG 546-547


TEC

TECHNICAL

INSTALLATION


APPLICATION OF MOUNTING OPTIONS Consult where used list of mounting options per luminaire: www.deltalight.com/mountingoptions

SUSPENDED T-BAR & CEILING TILES (MIN. 8 MM)




APPLY: (replace tile by MDF)
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

MF (METAL FRAME) CEILING DRY LINED / GYPROC / MDF




APPLY:
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

STUCANET




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
ZB BOX

EXPOSED CONCRETE



APPLY:
EXPOSED CONCRETE PACK

CONCRETE + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

CONCRETE BEAM & BLOCK + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

PREFABRICATED CONCRETE PLATE



APPLY:
EXPOSED CONCRETE PACK

PREFABRICATED CONCRETE PLATE + PLASTER




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

BRICK + PLASTER




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

STRETCHED CEILING





APPLY:
MOUNTING KIT CSC / WSC



S1 S2

PLASTERKIT

PLASTERKIT	REFERENCE	A x B	□	○	KG	↓	↓ min. - max.	↓ min. - max.	TYPE
PLASTERKIT 101	202 11 19	205 x 205		77	0.1	80 x 180	195 - 205		3
PLASTERKIT 126	202 72 99 01	215 x 215	112 x 112		0.3	120 x 120			1
PLASTERKIT 127	202 72 99 02	215 x 250	112 x 215		0.3	120 x 225			2
PLASTERKIT 145	304 05 99	140 x 235	24 x 170		0.1	110 x 180			2
PLASTERKIT 161	207 01 161	200 x 200	75 x 75		0.2	175 x 175	185 - 200	110 - 200	1
PLASTERKIT 170	207 01 170	230 x 230		98	0.3	100 x 220	220 - 230		3
PLASTERKIT 186	207 01 186	190 x 150	75 x 75		0.2	150 x 110		105 - 140	1

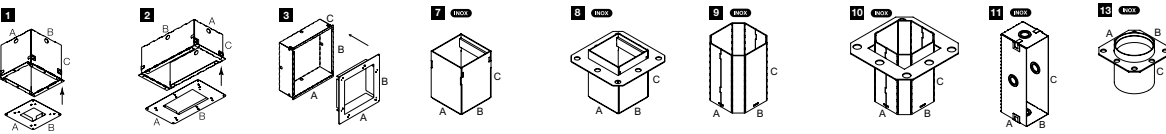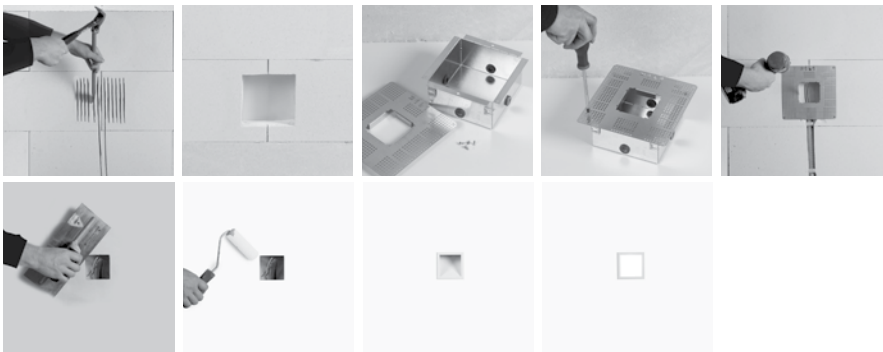

CONCRETE BOX

CONCRETE BOX	REFERENCE	A x B x C	KG	↓	↓	TYPE
CONCRETE BOX 145	304 05 98	150 x 210 x 75	0.9	155 x 215	80	5
CONCRETE BOX 151	302 19 21	42 x 42 x 58	0.1	43 x 43	65	8
CONCRETE BOX TR 152	302 19 22	42 x 42 x 58	0.1	43 x 43	65	7
CONCRETE BOX 153	302 20 21	43 x 43 x 60	0.1	43 x 43	65	10
CONCRETE BOX TR 154	302 20 22	43 x 43 x 60	0.1	43 x 43	65	9
CONCRETE BOX 161	270 11 161	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 186	270 11 186	145 x 105 x 70	0.4	150 x 110	75	3
CONCRETE BOX 187	270 11 187	80 x 95 x 70	0.5	85 x 100	75	11
CONCRETE BOX 188	270 11 188	Ø60 x 65	0.5	Ø67	65	13
CONCRETE BOX 191	270 11 191	310 x 80 x 95	0.4	315 x 80	110	2
CONCRETE BOX 192	270 11 192	130 x 120 x 105	0.4	135 x 125	115	2
CONCRETE BOX 195	270 11 195	Ø54 x 60	0.1	Ø56	65	13
CONCRETE BOX 196	270 11 196	51 x 51 x 60	0.1	52 x 52	65	8

INSTALLATION


MOUNTING KIT TYPE 6



MOUNTING KIT TYPE 8



MOUNTING KIT TYPE 7

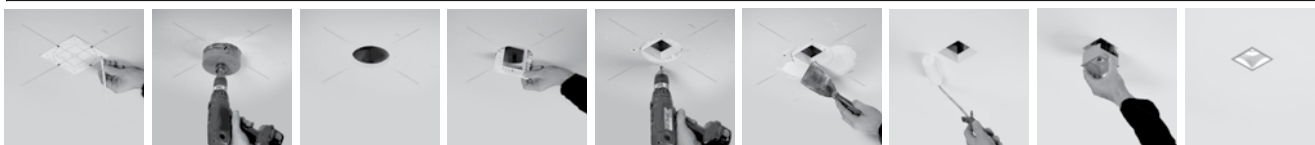

TEC

AIR

NEW


MOUNTING KIT TYPE AIR


AIR merges two in one.

The result? One design language, one installation layout, one look and feel, two functionalities. By using one design language, AIR allows you to either opt for light and ventilation combined, only offer a light unit, or go for ventilation only.



- SUPPLY**
- SPM20
 - Spotlight
 - Dummy light only
- EXTRACTION**
- SPM20
 - Spotlight
 - Dummy light only

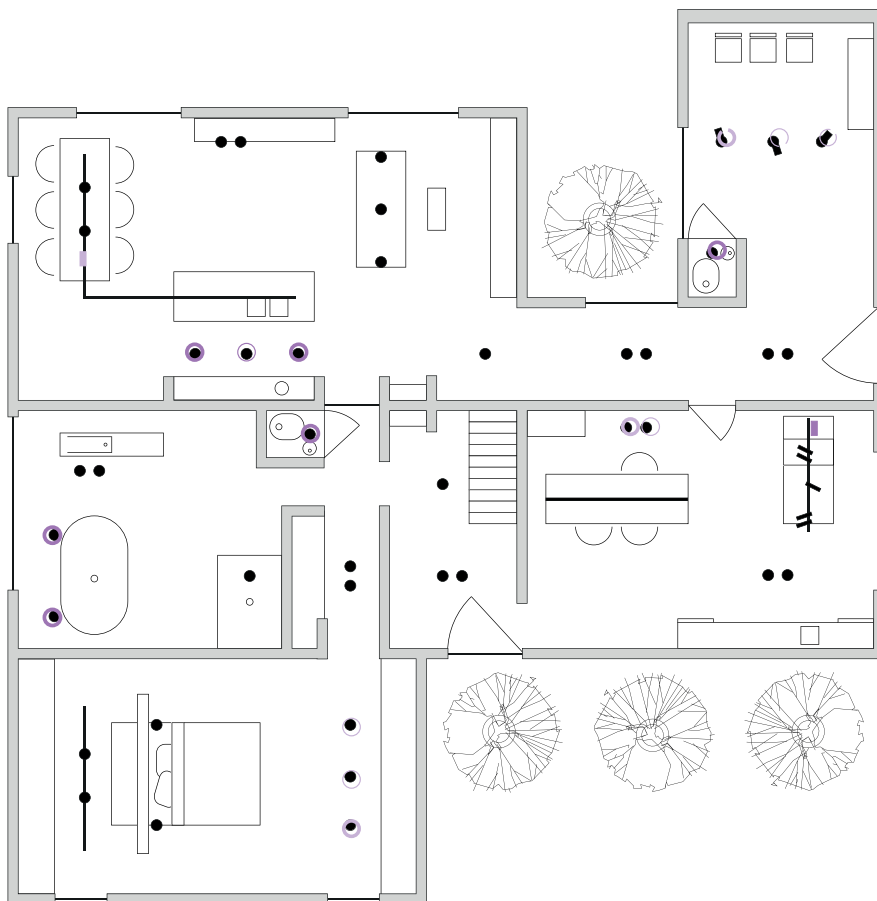

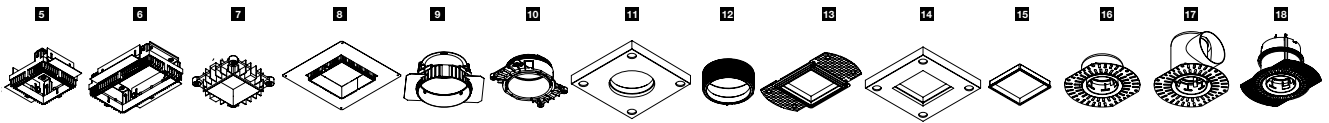



MOUNTING KITS

	REFERENCE	A x B x C	HOLLOW MATERIAL			SOLID MATERIAL		TYPE
			I	I	I	I MIN.-MAX.		
MINIGRID IN 1 MOUNTING KIT	202 71 95 01	129 x 129 x 100		130 x 130			max.25	5
MINIGRID IN 1 MOUNTING KIT HP	202 71 95 01 HP	129 x 129 x 100		130 x 130			max.25	5
MINIGRID IN 1 MOUNTING KIT LARGE	202 71 95 01L	245 x 245 x 100					Ø202	8
MINIGRID IN 2 MOUNTING KIT	202 71 95 02	129 x 232 x 100		130 x 233			max.25	6
MINIGRID IN 2 MOUNTING KIT HP	202 71 95 02 HP	129 x 232 x 100		130 x 233			max.25	6
MINIGRID IN 2 MOUNTING KIT LARGE	202 71 95 02L	342 x 245 x 100					Ø202-100-Ø202*	8
MOUNTING KIT 1 LARGE MINIGRID 67	19310 0110	185 x 185 x 38			170			8
MOUNTING KIT 1 MINIGRID 67	19310 0050	148 x 113 x 38		105 x 105			max.16	5
MOUNTING KIT 2 LARGE MINIGRID 67	19310 0120	250 x 185 x 38			Ø170-60-Ø170			8
MOUNTING KIT 2 MINIGRID 67	19310 0060	185 x 148 x 38		105 x 176			max.16	6
MOUNTING KIT 75	202 00 75	117 x 117 x 30				121	9 or 12	7
MOUNTING KIT 75 TRIMLESS	202 01 75	117 x 117 x 30				121	9 or 12	7
MOUNTING KIT 75 TRIMLESS O.F.A.	202 01 75 OFA	240 x 240 x 40					Ø182	10
MOUNTING KIT DEEP ENTERO RD-S TRIMLESS	28500 0220	Ø66 x 41		Ø133		min.6 - max.16		10
MOUNTING KIT DOT.COM M4 TRIMLESS	424 512 04 00	199 x 35 x 43	127 x 36 x 60				5 to 22	6
MOUNTING KIT DOT.COM M4 TRIMLESS CSC	15212 0110	170 x 80 x 43						6
MOUNTING KIT DOT.COM M4 TRIMLESS WSC	15212 0180	126 x 36 x 37						6
MOUNTING KIT ENTERO RD-L	28400 0030	225 x 160 x 20			162		min.10 - max.15	12
MOUNTING KIT ENTERO RD-L CSC	28400 0090	190 x 190 x 18						11
MOUNTING KIT ENTERO RD-L WSC	28400 0150	Ø121 x 13						12
MOUNTING KIT ENTERO RD-M CSC	28400 0080	170 x 170 x 18						11
MOUNTING KIT ENTERO RD-M O.F.A.	28400 0020	172 x 117 x 45			127			10
MOUNTING KIT ENTERO RD-M WSC	28400 0140	Ø111 x 39						12
MOUNTING KIT ENTERO RD-S CSC	28400 0070	150 x 150 x 18						11
MOUNTING KIT ENTERO RD-S O.F.A.	28400 0010	138 x 97 x 45			105			10
MOUNTING KIT ENTERO RD-S WSC	28400 0130	Ø90 x 36						12
MOUNTING KIT ENTERO SQ-L	28400 0060	235 x 145 x 20	142 x 142			min.10 - max.15		13
MOUNTING KIT ENTERO SQ-L CSC	28400 0120	190 x 190 x 18						14
MOUNTING KIT ENTERO SQ-L WSC	28400 0180	121 x 121 x 13						15
MOUNTING KIT ENTERO SQ-M	28400 0050	210 x 119 x 18	122 x 122			min.10 - max.15		13
MOUNTING KIT ENTERO SQ-M CSC	28400 0110	170 x 170 x 18						14
MOUNTING KIT ENTERO SQ-M WSC	28400 0170	97 x 97 x 13						15
MOUNTING KIT ENTERO SQ-S	28400 0040	190 x 98 x 15	106 x 106			min.10 - max.15		13
MOUNTING KIT ENTERO SQ-S CSC	28400 0100	150 x 150 x 18						14
MOUNTING KIT ENTERO SQ-S WSC	28400 0160	83 x 83 x 13						15
MOUNTING KIT FLUSH IMAX II ROUND	15215 0010	118 x 118 x 25			121	12	Ø121	7
MOUNTING KIT FLUSH IMAX II SQUARE	15215 0020	125 x 170 x 23	126 x 126			12		7
MOUNTING KIT FLUSH INLET S	304 05 01	200 x 50 x 41	55 x 190			min.4 - max.32		10
MOUNTING KIT FLUSH SPY	414 90 01	140 x 82 x 22			Ø83	9 or 12		10
MOUNTING KIT INLET TRIMLESS H20	13210 0050	241 x 149 x 28	205 x 110					13
MOUNTING KIT INLET TRIMLESS H7	13210 0030	116 x 149 x 28	80 x 110					13
MOUNTING KIT INLET TRIMLESS L113	13210 0070	1141 x 112 x 28	1145 x 75					13
MOUNTING KIT INLET TRIMLESS L20	13210 0040	204 x 112 x 28	205 x 75					13
MOUNTING KIT INLET TRIMLESS L38	13210 0060	381 x 112 x 28	395 x 75					13
MOUNTING KIT INLET TRIMLESS XS	13210 0010	65 x 175 x 42	30 x 135					6
MOUNTING KIT MINI DEEP RINGO II TRIMLESS	19410 0010	122 x 64 x 50			Ø68	12,5 or 25		10
MOUNTING KIT MINIGRID IN 1 CSC	15212 0120	180 x 180 x 67						5
MOUNTING KIT MINIGRID IN 2 CSC	15212 0130	180 x 285 x 67						6
MOUNTING KIT NIME O.F.A.	26410 0010	172 x 117 x 56			127	max.12	Ø127	10
MOUNTING KIT NO AIR 101	29810 0050	180 x 205 x 73						16
MOUNTING KIT NO AIR 102	29810 0060	180 x 205 x 73						16
MOUNTING KIT NO AIR 103	29810 0070	180 x 205 x 73						16
MOUNTING KIT NO AIR 104	29810 0080	180 x 205 x 73						16
MOUNTING KIT NO AIR 105	29810 0120	180 x 205 x 73						16
MOUNTING KIT PLAT-OHI TRIMLESS	29510 0020							9
MOUNTING KIT R102 TRIMLESS CSC	15212 0090	160 x 160 x 56						10
MOUNTING KIT R102 TRIMLESS O.F.A.	15212 2010	172 X 117 X 56			127		Ø127	10
MOUNTING KIT R102 TRIMLESS WSC	15212 0170	111 x 111 x 50						10
MOUNTING KIT R60 TRIMLESS CSC	15212 0060	120 x 120 x 59						10
MOUNTING KIT R60 TRIMLESS O.F.A.	15212 2050	155 x 155 x 60			92	max.25	Ø92 - 125	10
MOUNTING KIT R60 TRIMLESS WSC	15212 0140	59 x 59 x 53						10
MOUNTING KIT R82 TRIMLESS CSC	15212 0070	140 x 140 x 45						10
MOUNTING KIT R82 TRIMLESS O.F.A.	15212 2000	138 x 97 x 45			105	max.25	Ø105	10
MOUNTING KIT R82 TRIMLESS WSC	15212 0150	90 x 90 x 31						10
MOUNTING KIT S102 TRIMLESS	400 92 00	125 x 220 x 55	125 x 125			min11		5
MOUNTING KIT S102 TRIMLESS O.F.A.	400 92 00 OFA	264 x 264 x 56	230 x 160					5
MOUNTING KIT SIDE AIR 101	29810 0010	180 x 205 x 73			168	max.12		17
MOUNTING KIT SIDE AIR 102	29810 0020	180 x 205 x 73			168	max.12		17
MOUNTING KIT SIDE AIR 103	29810 0030	180 x 205 x 73			168	max.12		17
MOUNTING KIT SIDE AIR 104	29810 0040	180 x 205 x 73			168	max.12		17
MOUNTING KIT SIDE AIR 105	29810 0110	180 x 205 x 73			168	max.12		17
MOUNTING KIT SIDE AIR ONLY 1	29810 0100	180 x 205 x 73			168	max.12		17
MOUNTING KIT SPY 39 PLUG O.F.A.	24144 0060							12
MOUNTING KIT SPY 39 TRIMLESS IN	24144 0050	140 x 82 x 125			82	9 or 12		12
MOUNTING KIT SPY 39/52 TRIMLESS CSC	15212 0080	140 x 140 x 67						10
MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	15212 2030	138 x 97 x 45			105	max.25	Ø105	10
MOUNTING KIT SPY 39/52 TRIMLESS WSC	15212 0160	90 x 90 x 55						10
MOUNTING KIT TAGLINE TRIMLESS	304 04 01	172 x 72 x 33	174 x 26 x 45				min.12,5	6
MOUNTING KIT TOP AIR 101	29810 0210	171 x 235 x 172						18
MOUNTING KIT TOP AIR 102	29810 0220	171 x 235 x 172						18
MOUNTING KIT TOP AIR 103	29810 0230	171 x 235 x 172						18
MOUNTING KIT TOP AIR 104	29810 0240	171 x 235 x 172						18
MOUNTING KIT TOP AIR 105	29810 0130	171 x 235 x 172						18
MOUNTING KIT TOP AIR ONLY 1	29810 0200	171 x 235 x 172						18
MOUNTING KIT TRIMLESS ARTUUR S/SA	27710 0020	121 x 121 x 36			121	9 or 12		7
MOUNTING KIT TRIMLESS MICROSPY IN	15212 2040	100 x 65 x 33			Ø48			10
MOUNTING KIT TRIMLESS MICROSPY IN OK	15212 2020	125 x 60 x 33			Ø68	fix 12mm		10
MOUNTING KIT TRIMLESS O.F.A. ARTUUR R	27710 0010	142 x 98 x 47			105	max.25		10
MOUNTING KIT TWEETER TRIMLESS	202 15 61 971	214 x 125 x 70			152	max.25	Ø182	9
MOUNTING KIT TWEETER TRIMLESS CSC	15212 0100	200 x 200 x 80						9
MOUNTING KIT UHO L TRIMLESS	15212 2060	100 x 65 x 38					Ø50	10
MULTINOVA 30 RECESSED KIT	27910 0050	Ø339 x 120			Ø341	max 25 mm		12
MULTINOVA 55 RECESSED KIT	28010 0050	Ø589 x 117			Ø610	max 25 mm		12
SUPERDOME RECESSED KIT	321 96 1036	1210 x 56	1105 x 1105			fix 12mm		12
SUPERNOVA 125 RECESSED KIT	274 94 1310	1325 x 115			Ø1335	max 25 mm		12
SUPERNOVA 65 RECESSED KIT	274 94 0710	725 x 115			Ø735	max 25 mm		12
SUPERNOVA 95 RECESSED KIT	274 94 1010	1025 x 115			Ø1035	max 25 mm		12

TEC


TECHNICAL

INTSTALLATION

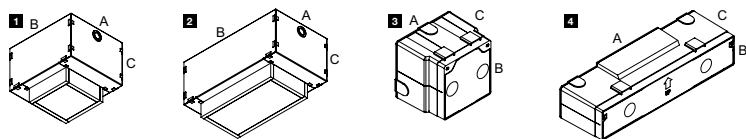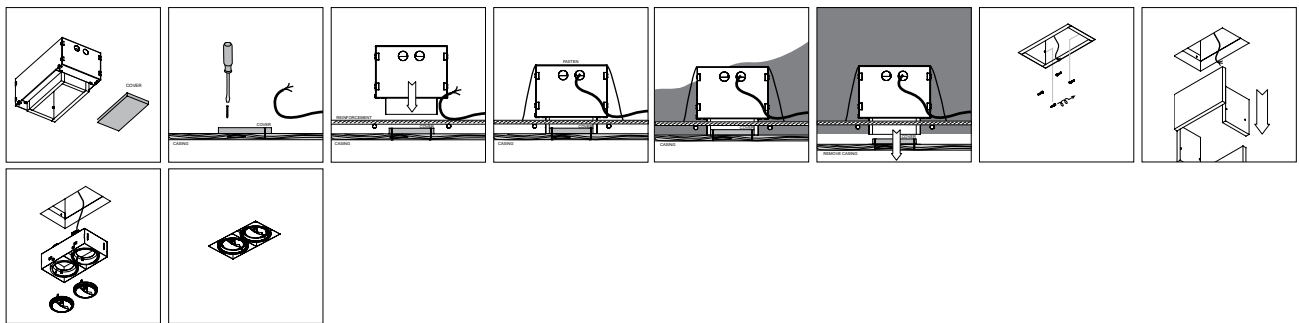


CONCRETE PACK


	REFERENCE	A x B x C	KG	h	↑	REQUIREMENT	TYPE
CONCRETE PACK LOGIC W L	304 32 96	310 x 80 x 95	0.4	315 x 80	135	REQUIREMENT	4
CONCRETE PACK LOGIC W S	304 33 96	130 x 120 x 105	0.4	135 x 125	140	REQUIREMENT	3
CONCRETE PACK MGIT 1	202 71 96 01	133 x 160 x 133	1.5	160 x 160	140	REQUIREMENT	1
CONCRETE PACK MGIT 2	202 71 96 02	234 x 160 x 133	2.1	260 x 160	140	REQUIREMENT	2



TUBE


	REFERENCE	COLOUR	TYPE
IMAX II TUBE ROUND	24213 0010	B / MMAT / W	7
IMAX II TUBE ROUND IP	24213 0040	B / MMAT / W	7
IMAX II TUBE ROUND TRIMLESS	24213 0020	B / MMAT / W	8
IMAX II TUBE SQUARE	24213 0080	B / MMAT / W	9
IMAX II TUBE SQUARE TRIMLESS	24213 0030	B / MMAT / W	10
MIDISPY TUBE	414 03 00	B / FBR / FG / MMAT / SG / W	3
SPY TUBE	414 01 00	B / FBR / FG / MMAT / SG / W	4
SPY 39 TUBE	24144 0010	B / FBR / FG / GC / W	3
SPY 39 L TUBE	24144 0020	B / FBR / FG / GC / W	3
SPY 52 TUBE	19810 0100	B / FBR / FG / GC / W	6
SPY 66 TUBE	24611 0100	B / FBR / FG / GC / W	6
SPY 66 LP/MP TUBE	24611 0010	B / MMAT / W	6
SPY 90 TUBE	19810 0170	B / FBR / FG / GC / PB / W	6
VIZIR TUBE	473 01 00	B / FBR / FG / W	6
TUBE 52	19810 0230	B / FBR / FG / GC / PB / W	6



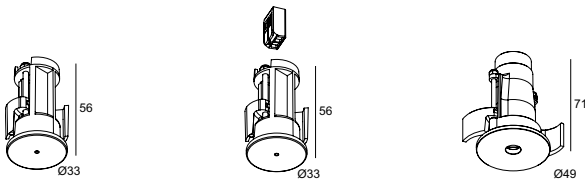

SUSPENSION / CONNECTION ST


SUSPENSION ST	SUSPENSION + CONNECTION ST	CONNECTION ST
27 x 60 max. 25	27 x 60 max. 25	43 x 80 max. 25
15225 0340 ◇	15225 0350 ◇	15225 0360 ◇
◇ B ● / W ○	◇ B ● / W ○	◇ B ● / W ○
INCL. 1 x AUTOMATIC ADJUSTMENT	ONLY CONNECTION INCL. 1 x CONNECTOR max. 2x 1,5 mm ² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 5x 1,5 mm ²

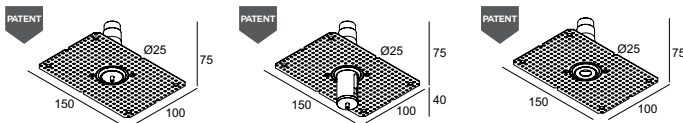

SUSPENSION / CONNECTION TRIMLESS

SUSPENSION TRIMLESS O.F.A.	SUSPENSION + CONNECTION TRIMLESS O.F.A.	CONNECTION TRIMLESS O.F.A.
62 x 80 9 or 12 102 x 80 (CONCRETE)	62 x 80 9 or 12 102 x 80 (CONCRETE)	62 x 80 9 or 12 102 x 80 (CONCRETE)
328 10 01	328 10 02	328 10 03
INCL. 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm ² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm ²

play.deltalight.com/suspensiontrimlessconcrete
 play.deltalight.com/suspensiontrimlessplasterboard



CABLE BASE

CABLE BASE R	CABLE BASE S
203 99 55 ◇	203 99 56 ◇
◇ ANO ● / B ● / W ○	◇ ANO ● / B ● / W ○

OPTIONS
COVERSET R 62-90-100

OPTIONS
COVERSET S 62-90-100

COVERSET

COVERSET R 100
204 00 100 ◇
◇ B ● / W ○





CABLE CLAMP

CABLE CLAMP
15229 0010 ◇
◇ B

TEC

TECHNICAL






INSTALLATION



CONNECTOR

IP68 CONNECTOR 3P	IP68 JUNCTION BOX 4P	IP68 CONNECTION KIT	IP68 Y-CONNECTOR 5P
216 12 02	431 99 02	216 12 01	21034 0150
CABLE Ø7,5-12 mm MAX.3 x 1,5mm ² 4A 250V	4xCABLE Ø7,5-12 mm MAX.3 x 1,5mm ² 4A 250V	CABLE Ø7,5-12 mm MAX.3 x 1,5mm ² 4A 250V	CABLE Ø8-17 mm MAX.5 x 1,5mm ² 32A 450V
IP68	IP68	IP68	IP68

TEC



CBOX





CBOX	CBOX 350mA / 10W
1 142 x 142 x 300	1 142 x 142 x 300
216 12 00	216 14 35
INCL.2 x PG13,5 / 1 x PG11	220-240V / 50-60Hz INCL.2 x PG13,5 / 2 x PG11 INCL.LED POWER SUPPLY 350mA-DC / 10W CURRENT CONTROLLED
IP67	IP67

GENIE BOX

LOGIC 90 BOX R	LOGIC 90 BOX S
1 224 x 159 x 150	1 224 x 159 x 155
213 19 09	213 19 08
INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg	INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg



LOGIC BOX R

LOGIC 40 BOX R
1 Ø140 x 136
13910 0010
max.500kg



LOGIC BOX

LOGIC 60 BOX R	LOGIC 190 R BOX	LOGIC LINEAR 440 BOX	LOGIC LINEAR 880 BOX
1 175 x 125 x 105	1 175 x 125 x 190	1 480 x 150 x 140	1 920 x 150 x 140
213 19 10	30210 0010	30810 0010	30810 0030
INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg	max.500kg	max.500kg	max.500kg








PIN

229 01 01

229 01 02

229 01 03

229 01 04



PIN





229 01 11

229 01 12

229 01 16

15222 0170

15222 0180



PLATE

229 02 01

229 02 02

229 02 03

229 02 07

229 02 11

Projects.



SHARP INSURANCE
DNA ARCHITECTEN



Office





SHARP INSURANCE
DNA ARCHITECTEN







W : ARCHITEKTEN
PHOTOGRAPHY FOTOGRAFIE FREI & STEFFEN SCHRAEGLE











NEELS ARCHITECTEN



Hospitality

INTERIOR DESIGN STUDIO DOTT.
PHOTOGRAPHY OLIVIER VAN DAELE





ARCHITECT OLSON KUNDIG
LIGHTING DESIGN NITEO LIGHTING
PHOTOGRAPHY AARON LEITZ





RESTAURANT COMMOTIE
INTERIOR DESIGN MERLIN DEGRAEVE
LIGHTING DESIGN JULIAN LANGERAERT (ALFALICHT GENT)



INTERIOR DESIGN MAISTER
PHOTOGRAPHY CAFEINE



Residential














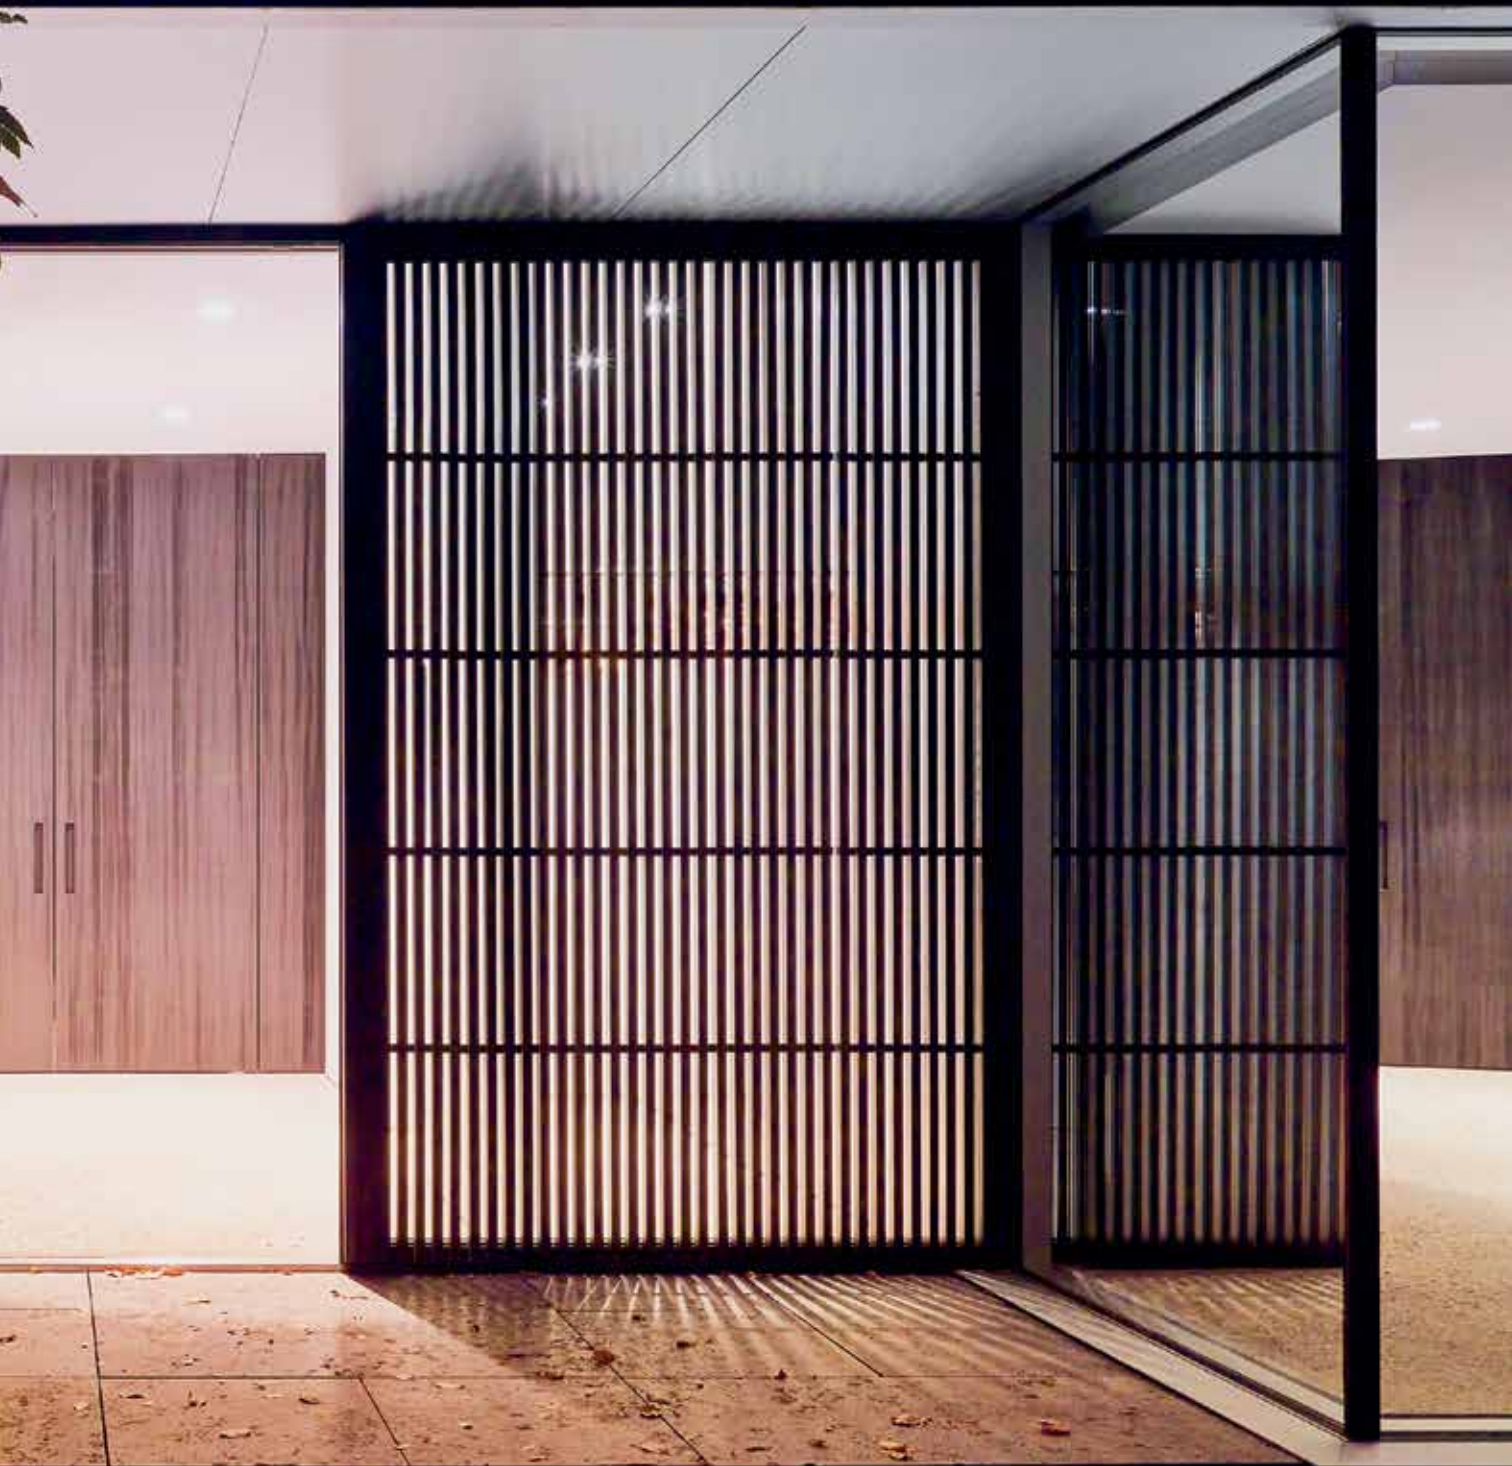









Retail





ARCHITECT STARBUCKS IN-HOUSE / PERKINS & WILL
LIGHTING DESIGN NITEO LIGHTING











ARCHITECT HANGAR DESIGN











Public



ARCHITECTS HELIOPOLIS 21 & ARX
PHOTOGRAPHY LUCA CIOCI







PROJECT CAMPUS DELL'UNIVERSITA' CATTOLICA A CREMONA
ARCHITECT LAMBERTO ROSSI ASSOCIATI / L. ROSSI E M. TARABELLA
CLIENT FONDAZIONE GIOVANNI ARVEDI E LUCIANA BUSCHINI



ARCHITECTS DREAMER + ROGER NELSON
PHOTOGRAPHY NICOLE ENGLAND







A photograph of an outdoor landscape at dusk or dawn. The scene features several tall, dark green pine trees with dense foliage. In the foreground, a well-maintained green lawn is visible, with a dirt path or clearing winding through it. The lighting is soft and directional, creating long shadows and highlighting the textures of the trees and grass. A white rectangular box is superimposed over the center of the image, containing the word "Outdoor" in a bold, white, sans-serif font.

Outdoor





















**Create on paper.
Imagine online.**


We are Delta Light

Delta Light's success is built on the determination, passion, and talent of our global team.

We hereby thank all of our colleagues and partners for their invaluable work. The lighting industry is evolving and growing at very high speed.

As a family run business, we have a personal stake in keeping our clients happy. As such we are committed to make a difference through original designs, outstanding service levels, an eye for detail and personal contact and striving to be the best in all we do.

Our product development process is based on a combination of creativity and technological innovation. It is our mission to present to the world a portfolio of lighting solutions that satisfy people's desires and needs, realise peoples visions, whilst creating a perfect symbiosis between architecture, function and atmosphere.

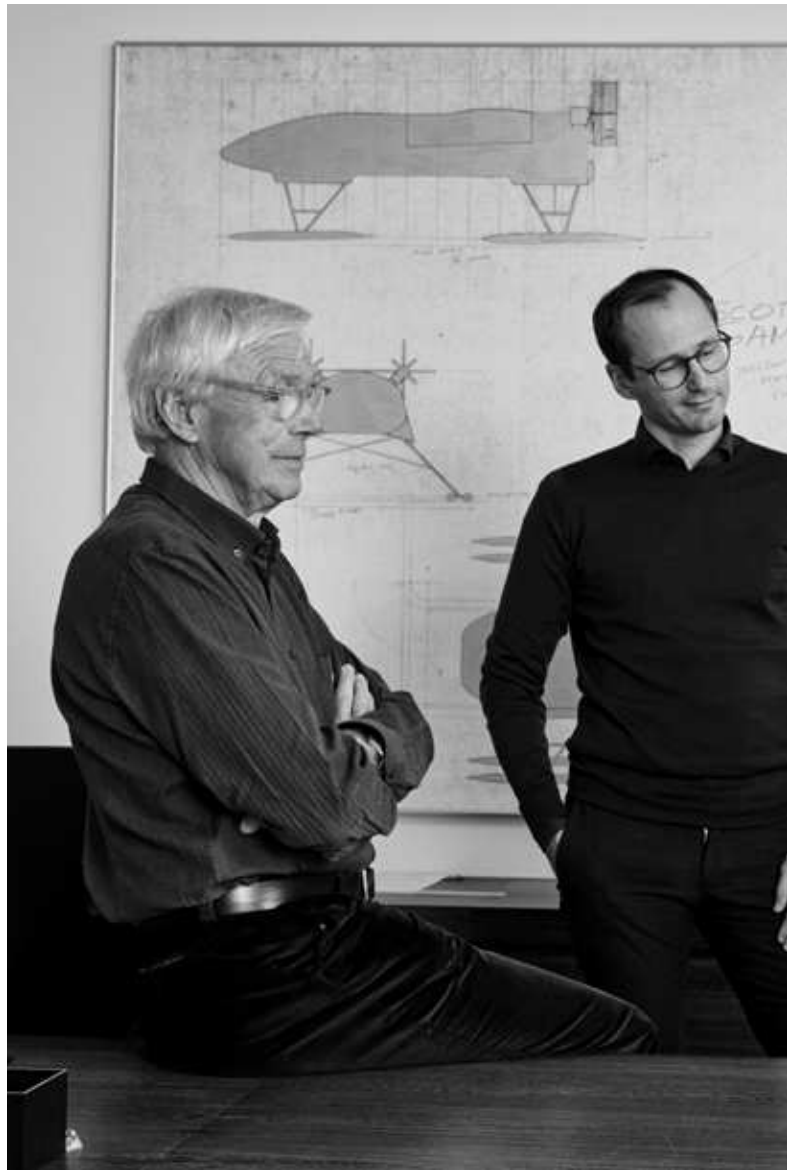

Jan, Peter & Paul Ameloot



worldwide

#wearedeltaight

For additional product information, technical downloads, project inspiration, contact details and much more... please go to

www.deltalight.com

Whether you access the site via your desktop computer or mobile device, an inspiring platform opens up with up-to-date content, exciting images, extensive product information, upgraded user experience... all in a fresh look & feel.

The **product search engine** will quickly guide you to the right product page, where you can download 3D files, Revit files, product data sheets, manual, IES files and drawings.

The **My Delta Light Toolbox**

helps you to quickly collect, save, download and share images and product information. Start creating your personal shortlists and share them with your partner, client, architect, electrical installer or other people involved in your project. You are free to use this feature without login, or you can register to save and edit multiple pinlists.

If you are looking for a contact person in your region or country please go to

www.deltalight.com/contact

offices

<p>Asia</p> <p>Delta Light Asia asia@deltalight.com www.deltalight.asia</p> <p>South East Asia T +65 9832 3753</p> <p>North East Asia T +852 9293 0096</p>	<p>China</p> <p>Delta Light China china@deltalight.com www.deltalight.com</p> <p>Beijing T+86 138 1070 8782</p> <p>Shanghai T+86 135 8578 5451</p>	<p>Latin America</p> <p>Delta Light Latin America M +32 492 724 070 latin@deltalight.com www.deltalight.com</p> <p>Colombia T +57 1 749 5307 M +57 321 202 5501 M +57 312 301 3823 Colombia@deltalight.com</p> <p>Mexico Mexico@deltalight.com</p> <p>Mexico City M +52 556 204 1203</p> <p>Monterrey M +52 181 3081 4196</p>	<p>Russia / Eastern Europe/ Middle Asia</p> <p>Delta Light REEMA reema@deltalight.com www.deltalight.ru</p> <p>Moscow T +7 926 167 76 98</p> <p>Saint-Petersburg T +7 921 79 183 88</p>	<p>United Kingdom</p> <p>Delta Light UK LTD T +44 (0)20 7960 5030 uk@deltalight.com www.deltalight.co.uk</p>
<p>Belgium / Luxembourg</p> <p>Delta Light nv T +32 (0)56 435 735 F +32 (0)56 435 736 belux@deltalight.com www.deltalight.be</p>	<p>France</p> <p>Delta Light SAS T +33 (0)9 70 73 52 42 T +33 (0)9 70 73 52 43 france@deltalight.com www.deltalight.fr</p>			<p>USA</p> <p>Delta Light USA, LLC. T +1 (954) 677 9800 F +1 (954) 677 1007 usa@deltalight.us www.deltalight.us</p> <p>New York T +1 (646) 973-3284 nyc@deltalight.us</p> <p>Los Angeles T +1 (213) 289-3048 la@deltalight.us</p> <p>Miami T +1 (954) 677-9800 miami@deltalight.us</p>
<p>Canada</p> <p>Delta Light Canada Inc. T +1 905 813 6130 F +1 289 805 7388 canada@deltalight.com www.deltalight.ca</p>	<p>Germany / Austria</p> <p>Delta Light GmbH T +49 (0)2451 4090-0 F +49 (0)2451 4090-200 germany@deltalight.com www.deltalight.de</p>	<p>Middle East / North Africa</p> <p>Delta Light Mena T +961 1 491 175 mena@deltalight.com www.deltalight-mena.com</p> <p>Dubai</p> <p>Delta Light EMEA T +971 52 530 35 90 uae@deltalight.com</p>	<p>Slovakia</p> <p>Delta Light Slovakia s.r.o. T +421 2 6353 0180 F +421 2 6353 0181 slovakia@deltalight.com www.deltalight.sk</p>	
<p>Czech Republic</p> <p>Delta Light Czech s.r.o. T⁽¹⁾ +420 241 740 775 T⁽²⁾ +420 241 740 776 czech@deltalight.com www.deltalight.cz</p>	<p>India</p> <p>Delta Light India T +9111 4056 2720 india@deltalight.com www.deltalight.com</p>	<p>The Netherlands</p> <p>Delta Light Nederland B.V. T +31 (0)88 80 40 600 F +31 (0)88 80 40 699 netherlands@deltalight.com www.deltalight.nl</p>	<p>Spain</p> <p>Delta Light Iberia S.L. T +34 633 936 027 hola@deltalight.com www.deltalight.es</p>	
	<p>Italy</p> <p>Delta Light Italia S.r.l. T +39 02 2305 6210 F +39 02 2316 6064 italy@deltalight.com www.deltalight.it</p>	<p>Poland</p> <p>Delta Light Poland T +48 698 33 00 03 poland@deltalight.com www.deltalight.pl</p>	<p>Switzerland</p> <p>Delta Light AG T +41 (0)61 485 99 10 F +41 (0)61 485 99 11 switzerland@deltalight.com www.deltalight.ch</p>	<p>HQ</p> <p>Delta Light nv Muizelstraat 2 B-8560 Wevelegem (Moorsele) Belgium T +32 (0)56 435 735 F +32 (0)56 435 736 info@deltalight.com www.deltalight.com</p>

Manufacturer Delta Light nv

Product Design - Research - Development: Delta Light Team & Nice 2C

Coordination - Concept: Delta Light Team & Nice 2C

Graphic Design - Realisation: Delta Light Team & Nice 2C

Finally, to everyone who contributed in some way
to the realisation of this Lighting Bible...

Thanks.

Copyright © Delta Light nv
First Print - DOC 100 00022
Made in Belgium

For the latest edition of the Lighting Bible, please visit
www.deltalight.com

All information in this catalogue is provided for information purposes only and Delta Light NV makes no representations about the accuracy or completeness of the information in this catalogue.

Delta Light NV may, in its sole discretion, revise the information and technical data contained herein at any time without notice. The catalogue does not contain any guarantee on the Delta Light NV products nor any warranty of merchantability or fitness for a particular purpose or use

All Delta Light products are supplied without lamps and any lamp data is given as a mere example.

The general terms & conditions of Delta Light NV shall be applicable on each sale of a Delta Light product.

Any trademarks, texts, images, graphics, designs and other information in this catalogue are the sole property and subject to the intellectual property rights of Delta Light NV and may not be copied, modified or used for any purpose without Delta Light's prior written consent.



INDEX

by Reference

100001 XXX0	160	10737 XXX5	391	15113 XXX0	528	19425 XXX0	148	200 12 01	348
100002 XXX0	160	10738 XXX5	391	15114 XXX0	528	19434 XXX0	458	200 12 02	348
100003 XXX0	160	10739 XXX0	391	15115 XXX0	528	19435 XXX0	148	200 12 11	348
100004 XXX0	160	10740 XXX0	391	15116 XXX0	528	19436 XXX0	148	200 12 12	348
100005 XXX8	160	10741 XXX5	391	15117 XXX0	528	19437 XXX0	148	200 12 13	348
100006 XXX8	160	10742 XXX5	391	15118 XXX0	528	19438 XXX0	148	200 12 14	348
100008 0000	162	10743 XXX5	391	15212 0060	565	19439 XXX0	148	200 12 21	348
100009 XXX0	162	10744 XXX8	204	15212 0070	565	19810 0010	133	200 12 24	348
100013 XXX0	162	10745 XXX8	202	15212 0080	565	19810 0020	133	200 12 34	348
100015 0000	162	11045 XXX0	134	15212 0090	565	19810 0030	133	200 12 35	348
100016 XXX0	162	11046 XXX0	134	15212 0110	565	19810 0040	133	200 12 41	348
100017 XXX0	162	11048 XXX0	134	15212 0120	565	19810 0050	133	200 12 410	348
100023 0000	162	11049 XXX0	134	15212 0130	565	19810 0060	133	200 12 420	348
100024 XXX0	162	11435 XXX0	156	15212 0140	565	19810 0100	566	200 12 430	348
100025 XXX0	162	11436 XXX0	156	15212 0150	565	19810 0110	221	200 12 50	348
100034 0000	162	11522 XXX0	210	15212 0160	565	19810 0120	237	200 13 11	348
100035 XXX0	162	11523 XXX0	210	15212 0170	565	19810 0130	237	200 13 12	348
100036 XXX0	162	11524 XXX0	210	15212 0180	565	19810 0140	237	200 13 14	348
100044 XXX8	162	11525 XXX0	209	15212 2000	565	19810 0150	237	200 13 14 01	348
100045 XXX8	162	12219 XXX8	336	15212 2010	565	19810 0160	237	200 13 41	348
100046 XXX8	162	12220 XXX0	336	15212 2020	229	19810 0170	566	200 13 410	348
100047 XXX0	162	12816 0000	131	15212 2030	565	19810 0180	353	200 13 420	348
100048 XXX0	162	12817 XXX0	130	15212 2040	229	19810 0190	353	200 13 430	348
100049 XXX0	162	12820 0050	131	15212 2050	565	19810 0200	357	200 14 06	349
100050 XXX0	162	12820 0090	131	15212 2060	225	19810 0210	357	200 14 11	348
100051 XXX0	150	13210 0010	565	15222 0170	569	19810 0220	357	200 14 12	348
100052 XXX0	150	13210 0030	565	15222 0180	569	19810 0230	149	200 14 13	348
100053 XXX0	324	13210 0040	565	15223 0120	521	19811 XXX0	234	200 14 14	348
100054 XXX0	324	13210 0050	565	15225 0280	249	19813 XXX0	234	200 14 21	348
100055 XXX0	160	13210 0060	565	15225 0290	249	19814 XXX0	234	200 14 34	348
100057 XXX0	160	13210 0070	565	15225 0300	291	19816 XXX0	234	200 14 35	348
100059 XXX0	160	13211 XXX0	328	15225 0310	291	19820 XXX0	234	200 14 41	348
100066 XXX0	150	13213 XXX0	328	15225 0320	291	19822 XXX0	234	200 14 410	348
100068 XXX0	150	13214 XXX0	328	15225 0330	291	19823 XXX0	234	200 14 420	348
100069 XXX0	132	13215 XXX0	328	15225 0340	567	19825 XXX0	234	200 14 430	348
100070 XXX0	132	13216 XXX0	328	15225 0350	567	19826 XXX8	234	200 99 53	348
100071 XXX0	132	13217 XXX0	328	15225 0360	567	19827 XXX8	234	201 02 01	203
100072 XXX0	132	13528 XXX0	494	15229 0010	567	19828 XXX8	234	201 02 04	203
100073 XXX0	132	13529 XXX0	512	15411 XXX0	138	19831 XXX8	234	201 02 05	203
100074 XXX0	132	13530 XXX0	512	15412 XXX0	138	19832 XXX8	234	201 05 01	163
100075 XXX0	132	13531 XXX0	512	15413 XXX0	138	19834 XXX0	352	201 05 04	163
100076 XXX0	132	13532 XXX0	494	15414 XXX0	138	19834 XXX5	352	201 50 50	131
100081 XXX0	162	13533 XXX0	494	15931 XX40	536	19836 XXX0	352	202 00 75	565
100082 XXX0	162	13534 XXX0	494	15932 0020	537	19836 XXX5	352	202 01 26	148
100083 XXX0	162	13535 XXX0	512	15932 0030	537	19840 XXX0	234	202 01 75	565
100084 XXX0	162	13536 XXX0	512	16312 0000	420	19841 XXX0	234	202 01 75 OFA	565
100085 XXX0	150	13537 XXX0	512	16312 0310	420	19842 XXX0	234	202 014 26	148
100086 XXX0	150	13538 XXX0	512	16312 0620	420	19843 XXX0	234	202 04 1X	324
100087 XXX8	162	13910 0010	568	16312 0630	420	19844 XXX5	352	202 04 2X	474
100088 XXX8	162	13955 XXX0	506	16313 XXX0	210	19845 XXX5	352	202 11 19	563
100089 XXX8	162	13956 XXX0	506	16314 XXX0	210	19873 XXX0	240	202 11 26	148
10034 0010	161, 229	13957 XXX0	506	16315 XXX0	210	19874 XXX0	240	202 144 811 XXX	148
10212 XXX8	342	13958 XXX0	506	16410 0010	428, 430	19875 XXX0	352	202 145 811 XXX	148
10214 XXX0	342, 488	13959 XXX0	506	16427 0000	426	19875 XXX5	352	202 146 811 XXX	148
10215 0010	343	13960 XXX0	506	16427 0310	426	19876 XXX8	238	202 20 811 XXX	462
10722 XXX5	202	13961 XXX0	506	16427 1480	426	19877 XXX0	240	202 206 811 XXX	462
10723 XXX5	204	13962 XXX0	506	16428 0000	428	19878 XXX0	240	202 207 811 XXX	462
10726 XXX8	204	13963 XXX0	506	16428 0310	428	19879 XXX0	352	202 25 811 XXX	456
10727 XXX8	204	13964 XXX0	506	16428 0620	428	19879 XXX5	352	202 252 811 XXX	456
10729 XXX0	391	13965 XXX0	507	16428 0630	428	19881 XXX5	352	202 256 811 XXX	456
10730 XXX0	391	13966 XXX0	507	16429 0000	428	19882 XXX1	236	202 2562 811 XXX	456
10731 XXX5	391	13967 XXX0	507	16430 0000	428	19883 XXX0	356	202 26 811 XXX	138
10732 XXX5	391	13968 XXX0	507	16431 0000	430	19883 XXX1	356	202 262 811 XXX	138
10733 XXX5	391	13969 XXX0	507	16432 0000	430	19883 XXX5	356	202 272 811 XXX	148
10734 XXX0	391	13970 XXX0	507	16433 0000	428	19884 XXX0	234	202 273 811 XXX	148
10735 XXX0	391	13971 XXX0	507	16434 0000	428	19885 XXX0	352	202 274 811 XXX	148
10736 XXX5	391	15112 XXX0	528	18428 XXX0	412	19885 XXX5	352	202 275 811 XXX	148
				18431 XXX0	412	19886 XXX0	352	202 296 XX	156
				18434 XXX0	412	19886 XXX5	352	202 297 XX	156
				18696 XXX0	450	19887 XXX0	400	202 37 811 XXX	138
				18717 XXX0	417	19888 XXX5	400	202 372 811 XXX	138
				19310 0050	565	19889 XXX0	400	202 38 811 XXX	138
				19310 0060	565	19890 XXX5	400	202 38 812 XXX	138
				19310 0110	565	19891 XXX0	234	202 510 811 XXX	134
				19310 0120	565	19892 XXX0	400	202 511 811 XXX	134
				19351 XXX0	138	19893 XXX5	400	202 71 95 01	565
				19352 XXX0	456	19894 XXX0	400	202 71 95 01 HP	565
				19353 XXX0	138	19895 XXX5	400	202 71 95 01L	565
				19354 XXX0	156	19896 XXX0	234	202 71 95 02	565
				19410 0010	565	19897 XXX0	234	202 71 95 02 HP	565
				19423 XXX0	148	19898 XXX0	234	202 71 95 02L	565
				19424 XXX0	458	19899 XXX0	234	202 71 96 01	566

202 71 96 02	566	20624 XXX1	178	21012 0181	556	21031 0440	547	21425 0005	276
202 72 99 01	563	20624 XXX5	178	21012 0191	556	21031 0450	547	21426 0005	276
202 72 99 02	563	20626 XXX0	178	21012 0205	556	21031 0460	547	21427 0005	276
202 91 97 01	131	20626 XXX1	178	21012 0225	556	21031 0470	547	21428 0005	276
202 91 97 11	131	20626 XXX5	178	21012 0230	556	21031 0480	547	216 12 00	568
202 911 811 XXX	130	20628 XXX0	176	21012 0240	556	21031 0490	547	216 12 01	568
202 912 811 XXX	130	20628 XXX1	176	21012 0258	555	21031 0500	547	216 12 02	568
202 913 XXX	130	20628 XXX5	176	21012 0268	555	21031 0510	547	216 14 35	568
202 914 XXX	130	20629 XXX0	176	21012 0278	555	21032 0010	559	21612 XXX0	218
203 99 55	567	20629 XXX1	176	21012 0288	555	21032 0020	542	21613 XXX0	218
203 99 56	567	20629 XXX5	176	21012 0298	555	21032 0030	543	220 74 811 XXX	528
204 00 100	567	20630 XXX0	176	21012 0308	555	21032 0040	387	220 77 811 XXX	528
20514 XXX0	254	20630 XXX1	176	21012 0318	555	21032 0065	542	222 121 12	532
20543 XXX0	254	20630 XXX5	176	21012 0328	555	21032 0075	542	222 123 12	532
20546 XXX0	255	20631 XXX0	180	21012 0355	555	21032 0085	542	222 126 12	532
20547 XXX0	255	20631 XXX1	180	21024 0060	545	21032 0090	542	223 00 10	521, 531
20548 0015	557	20631 XXX5	180	21024 0070	545	21032 0120	559	223 00 12	530
20548 0025	557	20632 XXX0	180	21024 0080	545	21032 0130	559	223 122 XX	526
20548 0030	253, 257	20632 XXX1	180	21024 0090	545	21032 0145	559	223 126 XX	526
20548 0040	253, 257	20632 XXX5	180	21024 0110	545	21032 0150	275, 279	223 13 811 XXX	482
20548 0050	253, 257	20633 XXX0	180	21024 0120	545	21032 0160	275, 279	223 16 811 XXX	530
20548 0060	253, 257	20633 XXX1	180	21024 0130	545	21032 0170	275, 279	223 17 811 XXX	530
20548 0070	253, 257	20633 XXX5	180	21024 0280	545	21032 0185	387	223 24 XX	526
20548 0080	253, 257	20634 XXX0	180	21030 0020	546	21032 0190	387	223 26 XX	526
20549 XXX0	256	20634 XXX1	180	21030 0030	546	21032 0205	544	223 34 XX	526
20550 XXX0	256	20634 XXX5	180	21030 0040	546	21032 0210	544	223 36 XX	526
20551 XXX0	256	20635 XXX0	180	21030 0060	546	21032 0220	279	223 53 812 XXX	482
20552 XXX0	256	20635 XXX1	180	21030 0070	546	21032 0245	387	223 54 XX	478
20553 XXX0	256	20635 XXX5	180	21030 0080	546	21032 0250	387	223 55 XX	478
20554 XXX0	256	20636 XXX0	180	21030 0100	546	21032 0260	387	223 751 811 XXX ED8	336, 482
20555 0000	252	20636 XXX1	180	21030 0110	546	21032 0270	558	223 752 811 XXX ED8	336, 482
20556 0000	252	20636 XXX5	180	21030 0120	546	21032 0320	542	223 753 01	337
20557 0000	252	20637 XXX0	180	21030 0140	546	21032 0331	556	223 753 811 XXX ED8	336
20558 0000	252	20637 XXX1	180	21030 0150	546	21032 0345	556	22519 XXX0	192
20559 0000	252	20637 XXX5	180	21030 0160	546	21032 0358	556	22525 XXX0	192
20560 0000	252	20638 XXX0	180	21030 0180	546	21032 0368	556	22528 XXX0	192
20561 XXX0	256	20638 XXX1	180	21030 0190	546	21034 0010	537	22532 XXX0	192
20562 XXX0	256	20638 XXX5	180	21030 0200	546	21034 0150	568	22534 XXX0	338
20563 XXX0	256	207 01 161	563	21030 0220	546	213 19 08	568	22535 XXX0	338
20564 0000	252	207 01 170	563	21030 0230	546	213 19 09	568	22536 XXX0	338
20565 0000	252	207 01 186	563	21030 0240	546	213 19 10	568	22618 XXX0	488
20566 0000	252	20729 XXX1	246	21030 0260	546	213 45 10 811 XXX	506	22619 XXX0	488
20567 XXX0	255	20729 XXX5	246	21030 0270	546	213 45 15	506	22624 XXX0	526
20569 XXX0	255	20730 XXX1	246	21030 0280	546	213 45 212	506	22625 XXX0	526
20570 XXX0	256	20730 XXX5	246	21030 0300	546	213 45 2125	506	22626 XXX0	526
20571 XXX0	256	20733 XXX0	248	21030 0310	547	213 45 811 XXX	506	22627 XXX0	526
20572 XXX0	258	20733 XXX4	248	21030 0320	547	213 46 10 811 XXX	506	22628 XXX0	526
20573 XXX0	258	20734 XXX0	248	21030 0340	547	213 46 15	506	22629 XXX0	526
20574 XXX0	258	20734 XXX4	248	21030 0350	547	213 46 811 XXX	506	229 01 01	569
20575 XXX0	258	20735 XXX0	248	21030 0360	547	213 47 112	508	229 01 03	569
20576 XXX0	258	20735 XXX4	248	21030 0380	547	213 47 122	508	229 01 04	569
20577 XXX0	258	20736 XXX0	248	21030 0390	546	213 47 811 XXX	507	229 01 11	569
20578 XXX0	258	20736 XXX4	248	21030 0400	546	213 473 811 XXX	507	229 01 12	569
20579 XXX0	258	20737 XXX0	248	21030 0410	546	213 474 811 XXX	507	229 02 01	569
20580 XXX0	258	20737 XXX4	248	21030 0420	546	213 48 811 XXX	507	229 02 03	569
20582 XXX0	258	20738 XXX0	248	21031 0020	437	213 483 811 XXX	507	229 02 07	569
20583 XXX0	255	20738 XXX4	248	21031 0030	437	213 484 811 XXX	507	229 02 11	569
20612 XXX0	180	20739 XXX0	248	21031 0040	437	213 49 811 XXX	507	23110 0040	215, 397
20612 XXX1	180	20739 XXX4	248	21031 0060	437	21401 0000	276	23110 0050	215, 397
20612 XXX5	180	20740 XXX0	248	21031 0070	437	21402 0000	276	23110 0060	215, 397
20613 XXX0	180	20740 XXX4	248	21031 0080	437	21403 0000	276	23111 XXX0	214
20613 XXX1	180	20741 XXX0	248	21031 0100	437	21404 0000	276	23112 XXX0	214
20613 XXX5	180	20741 XXX4	248	21031 0110	437, 439	21405 0000	276	23114 XXX0	214
20614 XXX0	180	20742 XXX0	248	21031 0120	437, 439	21406 0000	276	23115 XXX0	214
20614 XXX1	180	20742 XXX4	248	21031 0140	437, 439	21407 0000	276	23117 XXX0	214
20614 XXX5	180	20743 XXX0	248	21031 0150	437	21408 0000	276	23118 XXX0	214
20615 XXX0	180	20743 XXX4	248	21031 0160	437	21409 0000	276	23120 XXX0	214
20615 XXX1	180	20744 XXX0	248	21031 0180	437	21410 0000	276	23121 XXX0	214
20615 XXX5	180	20744 XXX4	248	21031 0190	437	21411 0000	276	23123 XXX0	396
20616 XXX0	178	21012 0010	554	21031 0200	437	21412 0000	276	23124 XXX5	396
20616 XXX1	178	21012 0021	554	21031 0220	437	21413 0005	276	23125 XXX0	396
20616 XXX5	178	21012 0035	554	21031 0230	437	21414 0005	276	23126 XXX5	396
20618 XXX0	178	21012 005W	555	21031 0240	437	21415 0005	276	23129 XXX0	396
20618 XXX1	178	21012 0080	555	21031 0260	437	21416 0005	276	23130 XXX5	396
20618 XXX5	178	21012 0101	556	21031 0270	437	21417 0005	276	23131 XXX0	396
20620 XXX0	178	21012 0111	556	21031 0280	437	21418 0005	276	23132 XXX5	396
20620 XXX1	178	21012 0121	556	21031 0300	437	21419 0005	276	23135 XXX0	396
20620 XXX5	178	21012 0135	556	21031 0390	437	21420 0005	276	23136 XXX5	396
20622 XXX0	178	21012 0145	556	21031 0400	437	21421 0005	276	23137 XXX0	396
20622 XXX1	178	21012 0155	556	21031 0410	437	21422 0005	276	23138 XXX5	396
20622 XXX5	178	21012 0160	556	21031 0420	437	21423 0005	276	23141 XXX0	396
20624 XXX0	178	21012 0171	556	21031 0430	547	21424 0005	276	23142 XXX5	396

23143 XXX0	396	23314 XXX5	398	23383 XXX0	388	23921 0000	312	24215 XXX0	128
23144 XXX5	396	23315 XXX0	260, 399	23384 XXX5	388	23922 0000	312	24217 XXX0	128
23147 XXX8	214	23316 XXX5	399	23385 XXX0	398	23923 0000	312	24218 XXX0	128
23148 XXX8	214	23317 XXX0	260, 399	23386 XXX5	398	23924 0000	312	24220 XXX0	128
23149 XXX8	214	23318 XXX5	399	23387 XXX0	398	23925 0000	312	24224 XXX0	128
23150 XXX8	214	23319 XXX5	388	23388 XXX5	398	23926 XXX0	312	24225 XXX0	128
232 012 XX	490	23320 XXX5	388	23389 XXX0	399	23927 XXX0	312	24227 XXX0	128
232 08 XXX	494	23321 XXX5	388	23390 XXX5	399	23928 XXX0	312	24229 XXX0	128
232 09 XXX	512	23322 XXX5	388	23397 0000	380	23929 XXX0	312	24231 XXX0	128
232 10 00	495, 513	23323 XXX0	400	23397 0020	380	23930 XXX0	312	24413 0000	380
232 10 03	495, 513	23324 XXX5	400	23397 0030	380	23931 XXX0	312	24414 XXX5	392
232 111 00	330	23327 XXX0	401	23397 0140	380	23932 XXX0	312	24415 XXX5	393
232 112 XX	330, 490	23328 XXX5	401	23397 0310	380	23933 XXX0	312	24417 XXX5	392
232 12 9XX	494	23331 XXX5	400	23397 0640	380	23934 XXX0	312	24418 XXX5	393
232 13 9XX	512	23332 XXX0	402	23398 XXX0	400	23935 XXX0	312	24419 XXX5	392
232 20 99	495	23347 XXX5	388	23399 XXX5	400	23936 XXX0	312	24426 XXX0	402
232 211 00	330	23348 XXX5	388	23411 XXX0	400	23937 XXX0	312	24427 XXX5	402
232 212 XX	330, 490	23349 XXX5	388	23412 XXX5	400	23938 XXX0	312	24428 XXX0	402
232 213 00	330, 490	23350 XXX5	388	23413 XXX0	400	23939 XXX0	312	24429 XXX5	402
232 318 XX	330, 490	23352 XXX5	404	23414 XXX5	400	23940 XXX0	312	24430 XXX0	399
232 321 00	330	23353 XXX5	404	23610 XXX0	361	23941 XXX0	312	24431 XXX5	399
232 659 XX	524	23354 XXX5	404	23610 XXX1	361	23942 0018	557	24434 XXX0	400
23210 XXX0	398	23355 XXX5	389	23610 XXX5	361	23943 0010	313, 315, 317	24435 XXX5	400
23211 XXX5	398	23358 0000	384	23610 XXXP	361			24438 XXX0	401
23212 XXX0	398	23358 0010	384	23610 XXXW	361	23943 0020	315	24439 XXX5	401
23213 XXX5	398	23358 0020	384	23611 XXX0	360	23943 0030	311, 315	24440 XXX0	399
23215 XXX5	400	23358 0030	384	23611 XXX1	360	23944 0010	313, 315	24441 XXX5	399
23230 XXX0	402	23358 0320	384	23611 XXX5	360	23945 0010	313	24445 XXX5	400
23231 XXX5	402	23358 0620	384	23611 XXXP	360	23945 0020	313	24446 XXX5	401
23232 XXX0	402	23358 1410	384	23611 XXXW	360	24010 0000	318	24451 XXX0	400
23233 XXX5	402	23358 1510	384	23612 XXX0	360	24011 0000	318	24452 XXX5	400
23242 XXX0	404	23358 1520	384	23612 XXX1	360	24013 0000	318	24610 XXX0	354
23243 XXX5	404	23358 1540	384	23612 XXX5	360	24014 0000	318	24610 XXX5	354
23244 XXX0	397	23358 9640	384	23612 XXXP	360	24015 0000	318	24611 0010	566
23245 XXX5	397	23358 9810	384	23612 XXXW	360	24016 0000	318	24611 0050	355
23246 9XX0	402	23358 9820	384	23613 0010	361	24017 0000	318	24611 0060	355
23247 9XX5	402	23358 9830	384	23613 0020	360	24018 XXX0	496	24611 0070	355
23248 XXX0	403	23359 0000	384	23613 0030	360	24019 XXX0	496	24611 0090	355
23249 XXX5	403	23359 0010	384	23613 0040	361	24020 XXX0	496	24611 0100	566
23250 9XX0	403	23359 0020	384	23613 0050	360	24110 XXX0	228	24611 0150	237
23251 9XX5	403	23359 0030	384	23613 0060	360	24111 XXX0	228	24611 0160	237
23252 XXX0	403	23359 0320	384	23613 0070	361	24112 XXX0	228	24611 0170	237
23253 XXX5	403	23359 0510	384	23613 0080	361	24113 XXX0	228	24611 0190	237
23258 XXX0	260, 399	23359 0620	384	23613 0090	361	24118 XXX0	230	24611 0200	237
23259 XXX5	399	23359 0690	384	23613 0100	361	24119 XXX8	230	24611 0210	237
23260 XXX0	260, 399	23359 0700	384	23613 0120	361	24120 XXX8	230	24611 0220	355
23261 XXX5	399	23359 1410	384	23613 0140	361	24121 XXX0	232	24611 0230	355
23274 XXX0	400	23359 2120	384	23613 0160	361	24123 XXX0	232	24611 0240	355
23275 XXX5	400	23359 2140	384	23613 0170	361	24125 XXX0	232	24612 XX10	354
23278 XXX0	401	23359 2160	384	23613 0180	361	24127 XXX0	232	24612 XX15	354
23279 XXX5	401	23359 2220	384	23613 0190	361	24129 XXX8	232	24612 XX20	354
23280 XXX0	398	23359 2240	384	23613 0200	361	24130 XXX8	232	24612 XX25	354
23281 XXX5	398	23359 2260	384	23613 0220	361	24133 XXX0	230	24612 XXX0	354
23282 XXX0	398	23359 2340	384	23613 0230	361	24134 XXX0	232	24612 XXX5	354
23283 XXX5	398	23359 2440	384	23613 0240	361	24136 XXX0	232	24621 XXX0	236
23284 XXX0	399	23359 9640	384	23613 0250	361	24138 XXX8	232	24622 XXX0	236
23285 XXX5	399	23360 XXX5	401	23613 0260	361	24140 XXX8	232	24623 XXX0	236
23292 XXX5	401	23362 XXX5	403	23613 0270	361	24142 XXX0	232	24624 XXX0	236
23293 XXX0	400	23363 9XX5	403	23614 XXX0	360	24144 0010	566	24625 XXX0	354
23294 XXX5	400	23364 XXX5	403	23614 XXX1	360	24144 0020	566	24625 XXX5	354
23295 XXX0	400	23365 XXX0	402	23614 XXXP	360	24144 0030	233, 383	24626 XXX0	354
23296 XXX5	400	23366 XXX0	403	23614 XXXW	360	24144 0040	231	24626 XXX5	354
23297 XXX0	400	23367 XXX5	389	23615 XXX1	360	24144 0050	565	24629 XXX5	354
23298 XXX5	400	23368 XXX5	389	23615 XXX5	360	24144 0060	565	24630 XXX0	236
23300 9920	384	23369 XXX5	389	23615 XXXP	360	24144 0070	230	24631 XXX0	354
23301 0000	380	23370 XXX5	389	23615 XXXW	360	24145 XXX8	233	24631 XXX5	354
23301 0690	380	23371 9XX5	402	23616 XXX0	361	24147 XXX0	492	24632 XXX0	354
23302 0010	380	23372 XXX5	397	23616 XXX1	361	24148 XXX0	492	24632 XXX5	354
23302 0020	380	23373 XXX5	402	23616 XXX5	361	24149 XXX0	232	24633 XXX0	361
23302 0030	380	23376 XXX0	388	23616 XXXP	361	24210 XXX0	128	24634 XXX5	401
23302 0040	380	23377 0030	384	23616 XXXW	361	24211 XXX0	128	24635 XXX0	401
23303 XXX0	388	23377 0040	557	23910 0000	312	24213 0010	566	24636 XXX5	401
23304 XXX0	388	23377 0050	557	23911 0000	312	24213 0020	566	24811 XXX0	262
23305 XXX0	388	23378 XXX0	402	23912 0000	312	24213 0030	566	24812 XXX0	262
23306 XXX0	388	23379 XXX5	402	23913 0000	312	24213 0040	566	24813 XXX0	262
23307 XXX5	388	23380 0030	557	23914 0000	312	24213 0050	129	24814 0010	557
23308 XXX5	388	23380 004W	557	23915 0000	312	24213 0060	129	24814 0011	557
23309 XXX5	388	23380 0050	557	23916 0000	312	24213 0070	129	24814 0015	557
23310 XXX5	388	23380 0060	557	23917 0000	312	24213 0080	566	24814 0020	263
23311 XXX0	398	23380 007W	557	23918 0000	312	24213 0090	129	24814 0030	263
23312 XXX5	398	23381 XXX0	388	23919 0000	312	24213 0100	129	24814 0075	557
23313 XXX0	398	23382 XXX5	388	23920 0000	312	24214 XXX0	128	24814 0080	557

24816 XXX0	262	25571 XXX0	286	26217 XXX5	394	27031 XXX5	409	27161 XXX5	275
24818 XXX0	262	25572 XXX0	284	26218 XXX0	260, 394	27032 XXX0	409	27162 XXX5	275
24819 XXX0	262	25573 XXX0	286	26219 XXX5	394	27033 XXX5	409	27163 XXX5	275
24821 XXX0	262	25574 XXX0	284	26220 XXX0	260, 394	271 04 XX ED8	338	27164 XXXQ	275
24822 XXX0	262	25575 XXX0	286	26221 XXX5	394	271 05 XX	338	27165 XXXQ	275
25010 XXX0	198	25610 0020	311	26222 XXX0	260, 394	271 08 XX ED8	338	27166 XXXQ	275
25011 XXX0	198	25611 0000	310	26223 XXX5	394	27110 0010	272	27167 0000	276
25014 XXX0	198	25811 0000	314	26410 0010	565	27110 0020	272	27168 0000	276
25015 XXX0	198	25813 0000	314	26411 XXX0	116	27110 0030	272	27169 0000	276
25016 XXX0	395	25814 0000	314	26412 XXX0	116	27110 0040	272	27170 0000	276
25017 XXX5	395	25816 0000	314	26413 XXX0	116	27110 0055	279	27171 0000	276
25018 XXX0	395	25817 0000	314	26414 XXX0	116	27110 0070	279	27172 0000	276
25019 XXX5	395	25818 0000	314	26415 XXX0	116	27110 0080	279	27173 0005	276
251 67 20	204	25821 0000	314	26510 0010	289, 305	27110 0090	557	27174 0005	276
251 67 811 XXX ED8	464	25822 0000	314	26510 0020	289, 305	27110 0100	557	27175 0005	276
251 67 811 XXX WDL	204	26000 XX10	514	26511 XXX4	304	27110 0110	272	27176 0005	276
251 67 812 XXX ED8	464	26000 XX20	514	26512 XXX4	304	27110 0120	272	27177 0005	276
251 70 03 01	203	26000 XX30	514	26513 XXX4	304	27110 0130	272	27178 0005	276
251 70 03 04	203	26000 XX40	514	26514 XXX0	304	27110 0140	272	27179 0005	276
251 70 03 05	203	26000 XX50	514	26515 XXX0	304	27110 0150	272	27180 0005	276
251 70 811 XXX	202, 464	26000 XX60	514	26516 XXX0	304	27110 0160	272	27181 XXX0	276
251 70 811 XXX ED8	202, 464	26000 XX70	514	26713 XXX0	222	27110 0170	272	27182 XXX0	276
251 70 811 XXX WDL	202	26000 XX80	514	26714 XXX8	222	27110 0180	272	27184 XXX0	274
251 71 21 9XX	202	26000 XX90	514	26715 XXX8	222	27111 0020	272	27185 XXX5	274
251 71 21 9XX ED1	202	26001 XX10	514	26716 XXX0	394	27111 0030	272	27186 XXX0	274
251 72 21 9XX	204	26001 XX20	514	26717 XXX5	394	27111 0410	272	27187 XXX0	276
251 72 21 9XX ED1	204	26001 XX30	514	26718 XXX0	394	27111 0530	272	27211 XXX0	224
251 73 21 9XX	202	26001 XX40	514	26719 XXX5	394	27111 0620	272	27212 XXX0	224
251 77 811 XXX ED8	202	26001 XX50	514	26720 XXX0	394	27111 0630	272	27214 XXX0	224
251 77 XX	156	26001 XX60	514	26721 XXX5	394	27111 0640	272	27215 XXX0	224
251 81 XX	156	26001 XX70	514	26722 XXX0	394	27111 0650	272	27216 XXX0	224
25211 XXX0	152	26001 XX80	514	26723 XXX5	394	27111 0720	272	27217 XXX0	224
25213 XXX0	152	26001 XX90	514	26810 0015	557	27111 0730	272	27218 XXX0	224
25214 XXX0	152	26010 XX10	514	26810 0025	557	27111 9940	272	27300 0020	408
25216 XXX0	152	26010 XX20	514	26811 XXX0	290	27111 9950	272	27300 0030	408
25312 XXX0	478	26010 XX30	514	26812 XXX0	290	27111 9960	272	27300 0300	408
25314 XXX0	478	26010 XX40	514	26813 XXX5	290	27112 XXX0	274	27300 0640	408
25501 XXX0	282	26010 XX50	514	26814 XXX5	290	27113 XXX0	274	27300 0650	408
25502 XXX0	282	26010 XX60	514	26815 XXX5	290	27115 XXX5	274	27300 0910	408
25503 XXX0	282	26010 XX70	514	26816 XXX5	290	27116 XXX5	274	27300 9970	408
25510 0010	557	26010 XX80	514	26817 XXX0	290	27118 XXXQ	274	27311 XXX0	303, 409
25510 0015	557	26010 XX90	514	26818 XXX0	290	27119 XXXQ	274	27312 XXX5	303, 409
25510 0020	557	26011 XX10	514	26819 XXX5	290	27121 XXX0	274	27313 XXX0	303, 409
25510 0025	557	26011 XX20	514	26820 XXX5	290	27122 XXX0	274	27314 XXX5	303, 409
25510 0030	557	26011 XX30	514	26821 XXX5	290	27123 XXX5	274	27315 XXX0	303, 409
25510 0045	557	26011 XX40	514	26822 XXX0	290	27124 XXX5	274	27316 XXX5	303, 409
25510 0075	554	26011 XX50	514	26823 XXX0	290	27125 XXXQ	274	27319 XXX0	303, 409
25510 0085	554	26011 XX60	514	26824 XXX0	292	27126 XXXQ	274	27320 XXX5	303, 409
25510 0375	554	26011 XX70	514	26825 XXX0	292	27127 XXX0	275	27321 XXX0	303, 409
25510 0385	554	26011 XX80	514	26826 XXX0	292	27128 XXX0	275	27322 XXX5	303, 409
25510 0395	554	26011 XX90	514	270 11 161	563	27129 XXX0	275	27323 XXX0	303, 409
25510 0405	554	26020 XXX0	516	270 11 186	563	27130 XXX5	275	27324 XXX5	303, 409
25510 0415	554	26021 XXX0	516	270 11 187	563	27131 XXX5	275	274 87 2610 83	466
25510 0420	554	26022 XXX0	516	270 11 188	563	27132 XXX5	275	274 88 2610 83	466
25510 0430	554	26023 XXX0	516	270 11 191	563	27133 XXXQ	275	274 89 06 26 ED5	176
25510 0440	554	26025 XXX0	516	270 11 192	563	27134 XXXQ	275	274 89 06 26 WD	176
25510 0450	554	26026 XXX0	516	270 11 195	563	27135 XXXQ	275	274 89 09 26 ED5	176
25510 0460	554	26070 0010	515	270 11 196	563	27136 XXX0	275	274 89 09 26 WD	176
25510 0475	557	26070 0020	515, 517	270 63 06 XX	344	27137 XXX0	275	274 89 12 26 ED5	176
25510 0480	557	26070 0030	515, 517	270 63 12 XX	344	27138 XXX0	275	274 89 12 26 WD	176
25510 0495	557	26070 0040	515	270 73 075	522	27139 XXX5	275	274 94 0710	179
25510 0500	557	26070 0050	515	270 73 130	522	27140 XXX5	275	274 94 1010	179
25510 0515	557	26070 0060	515	270 75 060	344	27141 XXX5	275	274 94 1310	179
25511 XXX0	284	26071 0010	516	270 75 100	344	27142 XXX5	275	274 95 06 26 ED5	178
25512 XXX0	286	26071 0020	516	27011 0050	408	27143 XXX5	275	274 95 06 26 WD	178
25513 XXX0	284	26071 0030	516	27011 0060	408	27144 XXXQ	275	274 95 09 26 ED5	178
25514 XXX0	286	26071 0040	516	27011 0310	408	27145 XXXQ	275	274 95 09 26 WD	178
25515 XXX0	284	26071 0050	517	27011 0630	408	27146 XXXQ	275	274 95 12 26 ED5	178
25516 XXX0	286	26071 0060	517	27011 0670	408	27147 XXXQ	275	274 95 12 26 WD	178
25517 XXX0	284	26100 XX10	514	27011 0910	408	27148 XXXQ	275	274 96 06 26 ED5	178
25518 XXX0	286	26100 XX20	514	27011 9910	272, 408	27149 XXX0	275	274 96 09 26 ED5	178
25519 XXX0	284	26101 XX10	514	27011 9920	272, 408	27150 XXX0	275	274 96 12 26 ED5	178
25520 XXX0	286	26101 XX20	514	27011 9930	408	27151 XXX0	275	274 97 10	181
25521 XXX0	284	26110 XX10	514	27020 XXX0	409	27152 XXX5	275	275 12 82 XX ED8	336
25522 XXX0	286	26110 XX20	514	27021 XXX5	409	27153 XXX5	275	275 13 82 XX ED8	336
25523 XXX0	282	26111 XX10	514	27022 XXX0	409	27154 XXX5	275	275 161 XX ED8	336
25524 XXX0	282	26111 XX20	514	27023 XXX5	409	27155 XXXQ	275	275 162 XX ED1	336
25525 XXX0	282	26210 0020	261, 395	27024 XXX0	409	27156 XXXQ	275	27710 0010	143
25526 XXX0	282	26213 XXX0	222	27025 XXX5	409	27157 XXXQ	275	27710 0020	143
25527 XXX0	282	26214 XXX8	222	27028 XXX0	409	27158 XXX0	275	27711 XXX0	142
25528 XXX0	282	26215 XXX8	222	27029 XXX5	409	27159 XXX0	275	27712 XXX0	142
25570 XXX0	284	26216 XXX0	260, 394	27030 XXX0	409	27160 XXX0	275	27713 XXX0	142

27714 XXX0	142	28011 XXX0	168	28400 0060	565	28481 XXX0	120	28563 XXX0	122
27715 XXX0	142	28011 XXX4	168	28400 0070	565	28482 XXX0	120	28564 XXX0	120
27717 XXX0	142	28012 XXX0	168	28400 0080	565	28483 XXX0	460	28565 XXX0	120
27719 XXX0	142	28012 XXX4	168	28400 0090	565	28484 XXX0	120	28566 XXX0	120
27720 XXX0	142	28013 XXX0	168	28400 0100	565	285 501 124 ED8	242	28567 XXX0	122
27721 XXX0	142	28013 XXX4	168	28400 0110	565	285 501 224 ED8	242	28568 XXX0	122
27722 XXX0	142	28014 XXX5	168	28400 0120	565	285 501 324 ED8	242	28569 XXX0	122
27723 XXX0	142	28015 XXX5	168	28400 0130	565	28500 0010	121	28570 XXX0	460
27724 XXX0	142	28016 XXX5	168	28400 0140	565	28500 0020	121	28571 XXX0	460
27725 XXX0	142	28017 XXX0	168	28400 0150	565	28500 0030	121	28572 XXX0	120
27726 XXX0	142	28017 XXX4	168	28400 0160	565	28500 0040	121	28573 XXX0	122
27727 XXX0	142	28018 XXX0	168	28400 0170	565	28500 0050	121	28580 XXX0	120
27729 XXX0	142	28018 XXX4	168	28400 0180	565	28500 0060	121	28581 XXX0	120
27800 0000	436	28019 XXX0	168	28401 XXX0	120	28500 0070	123	28582 XXX0	120
27800 0310	436	28019 XXX4	168	28402 XXX0	120	28500 0080	123	28583 XXX0	460
27800 1410	436	28020 XXX5	168	28404 XXX0	120	28500 0090	123	28584 XXX0	120
27800 1490	436	28021 XXX5	168	28405 XXX0	120	28500 0100	123	286 67 01	309, 405
27810 XXX0	522	28022 XXX0	170	28406 XXX0	120	28500 0110	123	286 67 02	309, 405
279 61 811 XXX	492	28022 XXX4	170	28408 XXX0	120	28500 0120	123	286 67 03	309, 405
279 61 812 XXX	492	28023 XXX0	170	28409 XXX0	122	28500 0130	125	286 67 811 XXX ED8	308
279 72 20	202	28023 XXX4	170	28410 XXX0	122	28500 0140	125	28700 0040	217, 317
279 773 811 XXX	238	28024 XXX0	170	28411 XXX0	122	28500 0150	125	28700 0070	217, 317
279 776 811 XXX ED8	238	28024 XXX4	170	28412 XXX0	122	28500 0160	125	28800 0010	317, 405
27910 0010	169	28025 XXX0	170	28413 XXX0	122	28500 0170	125	28800 0020	317, 405
27910 0020	169	28025 XXX4	170	28414 XXX0	122	28500 0180	125	28800 0030	317, 405
27910 0030	169	28026 XXX0	170	28415 XXX0	122	28500 0190	121	28800 0040	317, 405
27910 0040	169	28026 XXX4	170	28416 XXX0	122	28500 0200	123	28811 XXX0	405
27910 0050	169	28027 XXX0	170	28417 XXX0	124	28500 0210	125	28812 XXX5	405
27911 XXX0	168	28027 XXX4	170	28418 XXX0	124	28500 0220	565	28813 XXX0	405
27911 XXX4	168	28028 XXX0	170	28420 XXX0	124	28501 XXX0	120	28814 XXX5	405
27912 XXX0	168	28028 XXX4	170	28421 XXX0	124	28502 XXX0	120	28815 XXX0	316
27912 XXX4	168	28029 XXX0	170	28423 XXX0	124	28504 XXX0	120	28816 XXX0	316
27913 XXX0	168	28029 XXX4	170	28424 XXX0	120	28505 XXX0	120	29011 XXX0	196
27913 XXX4	168	28030 XXX0	170	28425 XXX0	120	28506 XXX0	120	29012 XXX0	397
27914 XXX5	168	28030 XXX4	170	28427 XXX0	120	28508 XXX0	120	29013 XXX0	397
27915 XXX5	168	28031 XXX0	362	28428 XXX0	120	28509 XXX0	122	29014 XXX5	397
27916 XXX5	168	28031 XXX5	362	28429 XXX0	122	28510 XXX0	122	29015 XXX5	397
27917 XXX0	168	28032 XXX0	362	28430 XXX0	122	28511 XXX0	122	29016 XXX0	196
27917 XXX4	168	28032 XXX5	362	28431 XXX0	122	28512 XXX0	122	29018 XXX8	196
27918 XXX0	168	28033 XXX5	362	28432 XXX0	122	28513 XXX0	122	29019 XXX8	196
27918 XXX4	168	28034 XXX5	362	28433 XXX0	122	28514 XXX0	122	29020 XXX0	397
27919 XXX0	168	28056 XXX4	170	28434 XXX0	124	28515 XXX0	122	29021 XXX0	397
27919 XXX4	168	28057 XXX4	170	28435 XXX0	124	28516 XXX0	122	29022 XXX5	397
27920 XXX5	168	28058 XXX4	170	28437 XXX0	124	28517 XXX0	124	29023 XXX5	397
27921 XXX5	168	28059 XXX5	170	28438 XXX0	460	28518 XXX0	124	290110 0010	302
27928 XXX0	170	28060 XXX5	170	28439 XXX0	460	28520 XXX0	124	29110 0030	302
27928 XXX4	170	28061 XXX5	170	28441 XXX0	460	28521 XXX0	124	29110 0065	297
27929 XXX0	170	28062 XXX4	170	28442 XXX0	460	28523 XXX0	124	29111 XXX0	298
27929 XXX4	170	28063 XXX4	170	28443 XXX0	460	28524 XXX0	120	29112 XXX0	298
27930 XXX0	170	28064 XXX4	170	28444 XXX0	460	28525 XXX0	120	29113 XXX0	298
27930 XXX4	170	28065 XXX5	170	28445 XXX0	460	28527 XXX0	120	29114 XXX5	298
27931 XXX0	362	28066 XXX5	170	28446 XXX0	461	28528 XXX0	120	29115 XXX5	298
27931 XXX5	362	28067 XXX5	170	28447 XXX0	461	28529 XXX0	122	29116 XXX5	298
27932 XXX0	362	28101 0000	418	28449 XXX0	461	28530 XXX0	122	29117 XXX0	298
27932 XXX5	362	28101 0310	418	28450 XXX0	120	28531 XXX0	122	29118 XXX0	298
27933 XXX5	362	28102 0000	418	28452 XXX0	120	28532 XXX0	122	29119 XXX0	298
27934 XXX5	362	28102 0310	418	28453 XXX0	122	28533 XXX0	122	29120 XXX5	298
27935 XXX0	362	28211 XXX0	320	28454 XXX0	122	28534 XXX0	124	29121 XXX5	298
27935 XXX5	362	28211 XXX4	320	28455 XXX0	122	28535 XXX0	124	29122 XXX5	298
27936 XXX0	362	28212 XXX0	320	28456 XXX0	120	28537 XXX0	124	29123 XXX0	299
27936 XXX5	362	28212 XXX4	320	28457 XXX0	120	28538 XXX0	460	29124 XXX0	299
27937 XXX0	362	28213 XXX0	320	28458 XXX0	120	28539 XXX0	460	29125 XXX0	299
27937 XXX5	362	28213 XXX4	320	28459 XXX0	120	28541 XXX0	460	29126 XXX5	299
27938 XXX0	396	28214 XXX0	320	28460 XXX0	122	28542 XXX0	460	29127 XXX5	299
27939 XXX5	396	28214 XXX4	320	28461 XXX0	122	28543 XXX0	460	29128 XXX5	299
27940 XXX0	396	28215 0005	320	28462 XXX0	122	28544 XXX0	460	29129 XXX0	297
27941 XXX5	396	28216 0005	320	28463 XXX0	122	28545 XXX0	460	29130 XXX0	297
27942 XXX0	396	28217 0005	320	28464 XXX0	120	28546 XXX0	461	29131 XXX0	297
27943 XXX5	396	28218 0005	320	28465 XXX0	120	28547 XXX0	461	29211 XXX0	300
27944 XXX5	396	28219 XXX0	320	28466 XXX0	120	28549 XXX0	461	29212 XXX0	300
27945 XXX5	396	28219 XXX4	320	28467 XXX0	122	28550 XXX0	120	29213 XXX0	300
27946 XXX5	396	28220 XXX0	320	28468 XXX0	122	28552 XXX0	120	29214 XXX5	300
27947 XXX0	396	28220 XXX4	320	28469 XXX0	122	28553 XXX0	122	29215 XXX5	300
27948 XXX5	396	28221 XXX0	320	28470 XXX0	460	28554 XXX0	122	29216 XXX5	300
27949 XXX0	396	28221 XXX4	320	28471 XXX0	460	28555 XXX0	122	29217 XXX0	300
27950 XXX5	396	28222 XXX0	320	28472 XXX0	120	28556 XXX0	120	29218 XXX0	300
27951 XXX0	396	28222 XXX4	320	28473 XXX0	120	28557 XXX0	120	29219 XXX0	300
27952 XXX5	396	28400 0010	565	28474 XXX0	124	28558 XXX0	120	29220 XXX5	300
27953 XXX5	396	28400 0020	565	28476 XXX0	124	28559 XXX0	120	29221 XXX5	300
27954 XXX5	396	28400 0030	565	28477 XXX0	124	28560 XXX0	122	29222 XXX5	300
27955 XXX5	396	28400 0040	565	28479 XXX0	124	28561 XXX0	122	29223 XXX0	301
28010 0050	169	28400 0050	565	28480 XXX0	120	28562 XXX0	122	29224 XXX0	301

29225 XXX0	301	300 48 700 PRO ED5	413	30132 XXX0	487	30611 XXX0	266	309 109 06 27	545
29226 XXX5	301	300 89 12 71	559	30132 XXX5	487	30612 XXX0	266	321 107 XX	256
29227 XXX5	301	300 89 24 150	556	302 10 3X	474, 510	30613 XXX0	266	321 109 XX	256
29228 XXX5	301	300 89 48 100	556	302 19 21	563	30614 XXX0	266	321 112 XX	256
29311 XXX0	366	300 89 48 240	556	302 19 22	563	30615 XXX0	266	321 117 XX	256
29311 XXX5	366	300 90 003 ED1	559	302 20 21	563	30616 XXX0	266	321 207 XX	256
29312 XXX0	366	300 90 003 ED5	559	302 20 22	563	30710 0010	289	321 209 XX	256
29312 XXX5	366	300 90 004 ED5	541	302 20 3X	474, 510	30710 0020	289	321 212 XX	256
29315 XXX0	388	300 90 004 ED8	541	302 22 811 XXX	138	30710 0030	289	321 217 XX	256
29316 XXX5	388	300 90 005	541	302 23 811 XXX	138, 456	30710 0040	289	321 407 XX	256
29319 XXX0	388	300 90 006	541	30210 0010	568	30711 XXX5	288	321 409 XX	256
29320 XXX5	388	300 90 007	541	30210 0020	503	30712 XXX5	288	321 412 XX	256
29321 0010	260	300 90 009	542	30211 XXX0	502	30713 XXX5	288	321 507 XX	256
29322 002W	260	300 90 010	559	30211 XXX5	502	30714 XXX5	288	321 509 XX	256
29323 XXXW	260	300 90 011	543	30212 XXX0	502	30715 XXX5	288	321 512 XX	256
29411 XXX0	390	300 90 012	543	30212 XXX5	502	30716 XXX5	288	321 55 205 ED1	557
29412 XXX5	390	300 90 013	552	30213 XXX0	502	30717 XXX5	288	321 55 207 ED1	557
29413 XXX0	390	300 90 014	552	30213 XXX5	502	30718 XXX5	288	321 55 307 ED5	557
29414 XXX5	390	300 90 015	552	30215 XXX0	502	30719 XXX5	288	321 55 312 ED1	557
29415 XXX0	390	300 90 016 ED1	541	30215 XXX5	502	30720 XXX5	288	321 55 317 ED1	557
29416 XXX5	390	300 90 017	552	30216 XXX0	502	30721 XXX5	289	321 96 1036	183
29417 XXX0	390	300 90 018	552	30216 XXX5	502	30722 XXX5	289	321 96 9528 ED1	182
29418 XXX5	390	300 90 110	554	30217 XXX0	502	30723 XXX5	289	328 10 01	567
29510 0020	565	300 90 124	555	30217 XXX5	502	30724 XXX5	289	328 10 02	567
29511 XXX0	144	300 90 125	555	30218 XXX0	502	30725 XXX5	289	328 10 03	567
29512 XXX0	144	300 90 126	559	30218 XXX5	502	30726 XXX5	289	328 12 01	444
29513 XXX0	144	300 90 127	554	30219 XXX0	502	30727 XXX5	289	328 12 06	444
29514 XXX0	144	300 90 128	554	30219 XXX5	502	30728 XXX5	289	328 18 43	179
29611 XXX8	332, 476	300 90 129	554	30220 XXX0	502	30729 XXX5	288	328 18 43 ED1	179
29612 XXX8	332, 476	300 90 130	554	30220 XXX5	502	30730 XXX5	288	328 18 43 TW ED5	179
29613 XXX0	332, 476	300 90 131	554	30221 XXX0	502	30731 XXX5	288	328 24 61	179
29614 XXX0	216	300 90 132	554	30221 XXX5	502	30732 XXX5	288	328 24 91	179
29615 XXX8	518	300 90 133	554	30222 XXX0	502	308 21 02 XX ED8	246	328 25 43	181
29616 XXX8	518	300 90 136	555	30222 XXX5	502	308 21 03 XX ED8	246	328 25 43 ED	181
29617 XXX0	518	300 90 137	541	30223 XXX0	502	308 22 02 83 ADM ED8	364	328 26 23	181
29618 XXX0	518	300 90 148	555	30223 XXX5	502	308 22 02 XX ED8	246	328 27 40	438
29619 XXX0	518	300 90 24 ED2	559	30224 XXX0	502	308 22 03 XX ADM ED8	364	328 27 80	438
29621 0000	216	300 90 311	544	30224 XXX5	502	308 22 03 83 ADM ED8	364	328 90 01	445, 450
29622 0000	216	300 90 312	542	30225 XXX0	503	308 24 99	247	364 03 01	432
29624 XXX0	216	300 90 330	559	30225 XXX5	503	308 22 03 XX ED8	246	366 00 00 CL	432
29711 XXX0	520	300 90 331	559	30226 XXX0	503	308 20 99	247	366 00 00 SBL	432
29712 XXX0	520	300 90 332	559	30226 XXX5	503	308 241 03 XX ED8	246	371 00 00	434
29713 XXX0	520	300 90 63	555	30311 XXX8	334	30810 0010	568	371 06 01	434
29714 XXX0	520	300 90 68	555	304 05 01	565	30810 0030	568	371 06 06	434
29715 XXX0	520	300 90 69	555	304 05 1X	328	30811 XXX0	504	371 06 16	434
29716 XXX0	520	300 90 91	554	304 05 98	563	30811 XXX5	504	372 01 00	410
29717 XXX0	520	300 91 51 XX	417, 419	304 05 99	563	30812 XXX0	504	372 01 06 05	410
29718 XXX0	520	300 94 017 XX	412	304 17 0X	340	30812 XXX5	504	372 01 06 06	410
29810 0010	565	300 94 050 XX	412	304 17 5X	480	30813 XXX0	504	372 01 06 090	410
29810 0020	565	300 94 100 XX	412	304 30 1X	326, 472	30813 XXX5	504	372 01 06 10	410
29810 0030	565	300 94 93 04	413	304 31 1X	326, 472	30814 XXX0	504	372 01 06 11	410
29810 0040	565	30111 XXX0	486	304 32 01 XX	326, 472	30814 XXX5	504	372 01 06 150	410
29810 0050	565	30111 XXX5	486	304 32 02 XX	326, 472	30815 XXX0	504	372 01 06 16	410
29810 0060	565	30112 XXX0	486	304 32 96	566	30815 XXX5	504	375 00 00	424
29810 0070	565	30113 XXX0	486	304 33 811 XXX	326, 472	30816 XXX0	504	375 03 01	424
29810 0080	565	30114 XXX0	486	304 33 96	566	30816 XXX5	504	375 06 06	424
29810 0100	565	30114 XXX5	486	30411 XXX5	384	30817 XXX0	504	376 00 00	432
29810 0110	565	30115 XXX0	486	30412 XXX5	384	30817 XXX5	504	376 03 01	432
29810 0120	565	30115 XXX5	486	30413 XXX5	384	30818 XXX0	504	376 06 06	432
29810 0130	565	30116 XXX0	486	30511 XXX5	220	30818 XXX5	504	376 14 01	432
29810 0200	565	30116 XXX5	486	30511 XXX8	220	30819 XXX0	504	377 20 21	448
29810 0210	565	30117 XXX0	487	30512 XXX8	220	30819 XXX5	504	377 20 26	448
29810 0220	565	30117 XXX5	487	30513 XXX0	390	30820 XXX0	504	377 98 51	438, 448
29810 0230	565	30118 XXX0	487	30514 XXX5	390	30820 XXX5	504	377 98 56	438, 448
29810 0240	225	30119 XXX0	487	30610 0010	267	30821 XXX0	504	377 99 51	438, 448
29810 1010	380	30120 XXX0	487	30610 0020	267	30821 XXX5	504	377 99 56	438, 448
29810 1020	380	30120 XXX5	487	30610 0030	267	30822 XXX0	504	381 00 00	424
29811 XXX0	382	30121 XXX0	487	30610 0040	267	30822 XXX5	504	381 01 00 00	424
29813 XXX0	382	30121 XXX5	487	30610 0050	267	30823 XXX0	504	381 01 03 01	424
29815 XXX0	382	30122 XXX0	487	30610 0060	267	30823 XXX5	504	381 03 01	424
29911 0000	374	30122 XXX5	487	30610 0070	267	30824 XXX0	504	382 00 00	424
29912 0000	374	30123 XXX0	487	30610 0080	267	30824 XXX5	504	382 03 01	424
29913 0000	374	30123 XXX5	487	30610 0090	267	30825 XXX0	504	382 06 06	424
29914 0000	374	30124 XXX0	487	30610 0100	267	30825 XXX5	504	388 01 22	468
300 24 060	557	30126 XXX0	487	30610 0110	267	30826 XXX0	504	388 01 32	468
300 24 060 ED1	557	30127 XXX0	487	30610 0120	267	30826 XXX5	504	388 01 42	468
300 24 150 ED5	557	30128 XXX0	487	30610 0140	267	309 107 38 32	545	389 01 00 00	448
300 48 060	557	30128 XXX5	487	30610 0150	267	309 109 01 27	545	389 01 03 01	448
300 48 350 ED5	558	30129 XXX0	487	30610 0160	267	309 109 02 27	545	389 01 06 01	448
300 48 500 ED5	558	30129 XXX5	487	30610 0170	557	309 109 03 27	545	389 01 06 06	448
300 48 500 PRO ED5	413	30131 XXX0	487	30610 0180	267	309 109 04 27	545	389 01 620 12 E	450
300 48 700 ED5	558	30131 XXX5	487	30610 0190	267	309 109 05 27	545	389 01 620 12 ED1	450

389 01 620 12 ED2	450	393 00 00	426	418 21 811 XXX	218	424 02 00 00	420
389 01 620 24 E	450	393 03 01	426	418 263 XXX MDL	254	424 02 03 01	420
389 01 620 24 ED1	450	393 06 01	426	418 367 811 XXX MDL	254	424 113 02 XXX ED8	209
389 01 620 24 ED2	450	393 06 06	426	418 368 811 XXX MDL	254	424 211 03 XXX	208
389 02 00 00	448	393 14 01	426	418 48 050	557	424 211 06 XXX	208
389 02 03 01	448	398 01 00	440	418 48 100	557	424 213 02 XXX	209
389 02 05 SBL	448	398 01 03 01	440	418 481 07	252	424 213 04 XXX	209
389 02 06 PR	448	398 02 00	440	418 481 09	252	424 222 04 XXX	208
389 02 620 12 E	450	398 02 03 01	440	418 481 12	252	424 242 02 XX	210
389 02 620 12 ED1	450	398 02 06 11	440	418 481 17	252	424 512 04 00	565
389 02 620 12 ED2	450	398 02 06 45	440	418 482 106	252	424 512 04 XXX	208
389 02 620 24 E	450	398 03 00	349, 440	418 482 109	252	424 612 04 XXX MDL	389
389 02 620 24 ED1	450	398 03 03 01	349, 440	418 482 211	252	424 642 02 XX MDL	389
389 02 620 24 ED2	450	398 03 05 CL	349, 440	418 482 217	252	424 642 06 XX MDL	389
389 03 00 00	448	398 03 05 SBL	349, 440	418 51 811 XXX ED8	218	424 642 08 XX MDL	389
389 03 03 01	448	398 03 06 11	432, 440	418 51 811 XXX WDL	218	424 642 12 XX MDL	389
389 03 06 01	448	398 03 06 45	440	418 51 812 XXX ED8	218	425 01 00 00	416
389 03 06 06	448	399 01 00	444	418 51 812 XXX WDL	218	425 01 03 01	416
389 03 14 01	448	399 01 02 05 SBL HE	444	418 561 XX MDL	254	425 01 06 06	416
389 04 00 00	448	399 01 03 01	444	420 06 01	380, 408	425 02 00 00	416
389 04 03 01	448	399 02 02 05 SBL HE	444	420 20 03 01	380	425 02 03 01	416
389 04 14 01	448	399 02 03 01	444	420 20 06 06	380	425 02 06 06	416
389 610 12 E	450	399 03 00	444	420 20 06 17	380	425 02 06 16	416
389 610 12 ED1	450	399 03 03 01	444	420 20 10 00	380	425 03 00 00	416
389 610 12 ED2	450	399 03 14 01	444	420 20 14 01	380, 408	425 03 03 01	416
389 610 18 E	450	399 06 01	444	420 20 20 00	380	425 04 00 00	416
389 610 18 ED1	450	399 06 06	444	420 20 30 00	380	425 04 03 01	416
389 610 18 ED2	450	399 610 12 E	445	420 52 03 01	380	425 04 06 06	416
389 610 212 E	450	399 610 12 ED1	445	420 52 06 06	380	425 04 06 11	416
389 610 212 ED1	450	399 610 12 ED2	445	420 52 10 00	380	425 05 00 00	416
389 610 212 ED2	450	399 610 18 E	445	420 52 20 00	380	425 05 03 01	416
389 610 24 E	450	399 610 18 ED1	445	420 52 30 00	380	425 05 06 06	416
389 610 24 E EM1	450	399 610 18 ED2	445	420 52 98 01	380	425 05 14 01	416
389 610 24 ED1	450	399 610 24 E	445	420 99 01	380, 384	425 09 01	416
389 610 24 ED1 EM1	450	399 610 24 ED1	445	420 99 02	380	425 97 51	416
389 610 24 ED2	450	399 610 24 ED2	445	420 99 03	380, 384	426 00 00	432
389 610 24 ED2 EM1	450	399 610 30 E	445	421 218 1XXX MDL	392	426 03 01	432
389 610 26 18 ED5	450	399 610 30 ED1	445	421 218 2XXX MDL	392	426 06 01	432
389 610 26 24 ED5	450	399 610 30 ED2	445	421 228 811 XXX	393	426 14 01	432
389 610 26 30 ED5	450	399 610 36 E	445	D MDL	393	431 03 01	537
389 610 26 36 ED5	450	399 610 36 ED2	445	421 228 812 XXX	393	431 03 02	537
389 610 26 48 ED5	450	399 610 48 E	445	D MDL	393	431 400 111 11	536
389 610 30 E	450	399 610 48 ED2	445	421 248 2XXX MDL	392	431 400 111 211	536
389 610 30 ED1	450	399 613 06 E	445	421 313 06 XX MDL	388	431 400 111 221	536
389 610 30 ED2	450	399 613 09 E	445	421 313 08 XX MDL	388	431 400 111 31	536
389 610 36 E	450	399 613 12 E	445	421 313 10 XX MDL	388	431 400 111 41	536
389 610 36 ED1	450	399 613 15 E	445	421 313 12 XX MDL	388	431 400 221 11	536
389 610 36 ED2	450	399 613 18 E	445	421 522 811 XXX MDL	404	431 400 221 211	536
389 610 48 E	450	399 613 24 E	445	421 612 811 XXX MDL	404	431 400 221 221	536
389 610 48 ED1	450	399 98 51	444	421 622 811 XXX MDL	404	431 400 221 31	536
389 610 48 ED2	450	399 98 56	444	422 111 XX	186	431 400 221 41	536
389 611 XXX	450	399 99 51	444	422 111 XX ED1	186	431 600 121 11	536
389 612 XXX	450	399 99 56	444	422 111 XX ED5	186	431 600 121 211	536
389 613 06 E	450	400 03 01	129	422 112 XX	186	431 600 121 221	536
389 613 09 E	450	400 92 00	565	422 112 XX ED1	186	431 600 121 31	536
389 613 12 E	450	400 92 00 OFA	565	422 112 XX ED5	186	431 600 121 41	536
389 613 12 E EM1	450	404 00 00	438	422 121 XX	186	431 600 321 11	536
389 613 15 E	450	404 03 01	438	422 121 XX ED1	186	431 600 321 211	536
389 613 18 E	450	404 09 01	438	422 121 XX ED5	186	431 600 321 221	536
389 613 206 E	450	404 12 XX	306	422 122 XX	186	431 600 321 31	536
389 613 24 E	450	404 12 XX ED1	306	422 122 XX ED1	186	431 600 321 41	536
389 90 01	450	404 20 XX	306	422 122 XX ED5	186	431 99 01	517, 537
389 90 01 ED1	450	404 20 XX ED1	306	422 131 XX	186	431 99 02	568
389 90 01 ED5	450	404 20 XX ED5	306	422 132 XX	186	471 111 811 XXX	188
389 90 02	450	404 24 100	438	422 141 XX	186	471 151 811 XXX MDL	397
389 90 02 ED1	450	404 24 60 ED1	438	422 141 XX ED1	186	471 152 811 XXX MDL	403
389 90 02 ED5	450	413 03 01	131	422 141 XX ED5	186	473 211 811 XXX	192
389 92 00 ED2	544	413 03 02	187	422 142 XX	186	473 212 811 XXX	192
391 00 00	426	413 03 03	187	422 142 XX ED1	186	473 231 811 XXX	192
391 03 01	426	413 03 04	187	422 142 XX ED5	186	473 231 812 XXX ED1	194
391 06 06	428, 430	413 03 05	187	422 161 811 XXX	186	473 232 811 XXX	192
391 06 11	428, 430	414 01 00	566	422 161 811 XXX ED1	186	473 252 811 XXX MDL	403
391 09 01	428, 430	414 03 00	566	422 161 811 XXX ED5	186		
391 97 51	428, 430	414 90 01	565	422 162 811 XXX	186		
392 01 00 00	430	415 35 00	154	422 162 811 XXX ED1	186		
392 01 03 01	430	416 99 00	410	422 162 811 XXX ED5	186		
392 02 00 00	430	418 11 811 XXX	218	422 912 XX WDL	186		
392 02 02 05 SBL	430	418 161 XXX MDL	254	422 99 01	187		
392 02 03 01	430	418 162 XXX MDL	254	424 01 00 00	420		
392 02 06 01	430	418 163 01	255	424 01 03 01	420		
392 02 09 01	430	418 163 02	255	424 01 06 01	420		
392 02 97 51	430	418 163 XXX MDL	254	424 01 06 06	420		

INDEX

by Name

24V-DC / 2 x 4A WIRELESS DIM UNIT	559
24V-DC UNIT DIM1	559
24V-DC UNIT DIM5	559
AC SURGE PROTECTOR	552
AMBIENT LIGHT SENSOR & 24V DIMMER (PWM)	542
ARTUUR R	142
ARTUUR R WALLWASH	142
ARTUUR S	142
ARTUUR S WALLWASH	142
ARTUUR SA	142
BACKSPACE II 22	342
BACKSPACE II 22 X	342, 488
BACKSPACE II REFLECTOR	343
BAND-OH!	334
BAZIL 12	532
B-LINER 65 IP	468
BORDERLINE - PROFILE	434
BOWIE CLIP	222
BOWIE ON	222
BOWL GLASS	309, 405
BOXY 2 L	204
BOXY 2 L+	464
BOXY GLASS SBL	203
BOXY HI	204
BOXY HONEYCOMB	203
BOXY L	204
BOXY L+	464
BOXY R	202, 464
BOXY R DIM8	202, 464
BOXY R HI	202
BOXY R OK	202
BOXY SOFTENING LENS	203
BOXY XL R	202
BOXY XL R C	202
BOXY XL S	204
CABLE BASE R	567
CABLE BASE S	567
CABLE CLAMP	567
CARREE ST	134
CARREE ST OK	134
CARREE TRIMLESS	134
CARREE TRIMLESS OK	134
CARREE X	462
CBOX	568
CBOX 350 mA / 10W	568
CEILING BASE 1RC	311, 315
CEILING BASE 3L	313
CEILING BASE 3R	313
CEILING BASE 3RC	311
CEILING BASE 3ROC	315
CEILING BASE MULTI 1	217, 317
CEILING BASE MULTI 3	217, 317
CEILING BASE R	313, 315, 317
CENTRAL ROD SUSPENSION	179
CENTRAL ROD SUSPENSION SUPERNOVA FLAT	181
CENTRAL SUSPENSION SUPERNOVA FLAT	181
CONCRETE BOX	563
CONCRETE BOX TR	563
CONCRETE PACK LOGIC W L	566
CONCRETE PACK LOGIC W S	566
CONCRETE PACK MGIT 1	566
CONCRETE PACK MGIT 2	566
CONE PUT LED	131
CONFORM P DOWN-UP	304
CONFORM P PDS DOWN-UP	304

CONNECT-A - PROFILE	418
CONNECT-I - PROFILE	418
CONNECTION ST	567
CONNECTION TRIMLESS O.F.A.	567
COVERSET R	567
CTRL DELTA GATEWAY	542
CUPPA C	316
CUPPA DISK	317, 405
CUPPA SHADE	317, 405
DALI POWER SUPPLY	542
DALI REPEATER	541
DALI VOICE CONTROL	387
DC SURGE PROTECTOR	552
DEEP RINGO	148
DEEP RINGO OK	148
DEEP RINGO RIBS	148
DEEP RINGO TRIMLESS	148
DEEP RINGO TRIMLESS OK	148
DEEP RINGO X	458
DIRO SBL	156
DIRO SBL ON	156
D-LINER 19 INF SAPP/30BD	297
D-LINER 19 SL PROFILE SET	302
D-LINER 30 INF 30BD	298
D-LINER 30 INF HF40	299
D-LINER 30 INF SAPP	298
D-LINER 30 SBL 30BD	300
D-LINER 30 SBL HF40	301
D-LINER 30 SBL SAPP	300
D-LINER DALI PRESENCE AND DAYLIGHT SENSOR	297
DOT.COM L WALLWASH ST	210
DOT.COM L2 ON	209
DOT.COM L2 ST	209
DOT.COM L4 ON	209
DOT.COM L4 ST	209
DOT.COM LEDLINE - PROFILE	420
DOT.COM M4 ST OK	208
DOT.COM M4 TRIMLESS	208
DOT.COM ON - PROFILE	420
DOT.COM ON WALLWASH	210
DOT.COM S3 ST	208
DOT.COM S6 ST	208
DOT.COM TRIMLESS - PROFILE	420
ELBO ASYMMETRIC P	526
ELBO BRIDGE P	526
ELBO SYMMETRIC P	526
EMERGENCY UNIT 7W	558
ENTERO L GLASS SBL	125
ENTERO L HONEYCOMB	125
ENTERO L LINEAR SPREAD LENS	125
ENTERO L SOFTENING LENS	125
ENTERO L SPREAD LENS	125
ENTERO M GLASS SBL	123
ENTERO M HONEYCOMB	123
ENTERO M LINEAR SPREAD LENS	123
ENTERO M SOFTENING LENS	123
ENTERO M SPREAD LENS	123
ENTERO RD-L	124
ENTERO RD-L MOUNTING SET S2	125
ENTERO RD-L TRIMLESS	124
ENTERO RD-L TRIMLESS WALLWASH	124
ENTERO RD-L WALLWASH	124
ENTERO RD-L X	461
ENTERO RD-M	122
ENTERO RD-M MOUNTING SET S2	123
ENTERO RD-M TRIMLESS	122

ENTERO RD-M TRIMLESS WALLWASH	122
ENTERO RD-M WALLWASH	122
ENTERO RD-M X	460
ENTERO RD-S	120
ENTERO RD-S MOUNTING SET S2	121
ENTERO RD-S TRIMLESS	120
ENTERO RD-S TRIMLESS WALLWASH	120
ENTERO RD-S WALLWASH	120
ENTERO RD-S X	460
ENTERO S GLASS SBL	121
ENTERO S HONEYCOMB	121
ENTERO S LINEAR SPREAD LENS	121
ENTERO S SOFTENING LENS	121
ENTERO S SPREAD LENS	121
ENTERO SQ-L	124
ENTERO SQ-L TRIMLESS	124
ENTERO SQ-L X	461
ENTERO SQ-M	122
ENTERO SQ-M TRIMLESS	122
ENTERO SQ-M TRIMLESS WALLWASH	122
ENTERO SQ-M WALLWASH	122
ENTERO SQ-M X	460
ENTERO SQ-S	120
ENTERO SQ-S TRIMLESS	120
ENTERO SQ-S TRIMLESS WALLWASH	120
ENTERO SQ-S WALLWASH	120
ENTERO SQ-X	460
FALLING EDGE DIMMER 200W DIM2	559
FEMTOLINE 25 - PROFILE	424
FEMTOLINE 25 FLUSH - PROFILE	424
FEMTOLINE 25 T - PROFILE	424
FEMTOLINE 25 TP - PROFILE	424
FEMTOLINE 35 - PROFILE	426
FEMTOLINE 35 F HE - PROFILE	430
FEMTOLINE 35 F HE D/U - PROFILE	430
FEMTOLINE 35 F HE TR - PROFILE	428
FEMTOLINE 35 F HE TRW+ - PROFILE	428
FEMTOLINE 35 TR - PROFILE	426
FEMTOLINE 35 WG - PROFILE	426
FEMTOLINE 45 - PROFILE	432
FEMTOLINE TP WALL	344
FEMTOLINE W DOWN-UP	344
FEMTOLINE WALL - PROFILE	432
FEMTOLINE WALL D/U - PROFILE	432
FIX 40 GLASS	255
FRAGMA L ADM	361
FRAGMA L BEAM LENS	361
FRAGMA L FLAPS	361
FRAGMA L HONEYCOMB	361
FRAGMA L LINEAR SPREAD LENS	361
FRAGMA L RASTER	361
FRAGMA L SOFTENING LENS	361
FRAGMA L WALLWASH LENS	361
FRAGMA M ADM	360
FRAGMA M BEAM LENS	360
FRAGMA M FLAPS	361
FRAGMA M HONEYCOMB	361
FRAGMA M LINEAR SPREAD LENS	361
FRAGMA M RASTER	361
FRAGMA M SOFTENING LENS	361
FRAGMA M WALLWASH LENS	361
FRAGMA S ADM	360
FRAGMA S BEAM LENS	360
FRAGMA S HONEYCOMB	361
FRAGMA S LINEAR SPREAD LENS	361
FRAGMA S RASTER	361
FRAGMA S SOFTENING LENS	361
FRAGMA S WALLWASH LENS	361
FRAX ANTI VANDAL SCREWS	515, 517
FRAX BRACKET	515
FRAX M	514
FRAX M KAP	515, 517
FRAX MB	514
FRAX MB POLE	516
FRAX PIN	515
FRAX POLE BRACKET	517
FRAX S	514
FRAX S KAP	515
FRAX SB	514
FRAX STRAP	515
GALA T	336
GALA XL	336

GALA XL HP	336
GALA XL LP	336
GIBBO	308
GLASS SBL 42	133
GLASS SBL 50	187
GLASS SBL 57	237
GLASS SBL 75	237
GLASS SBL 78	203
GYN	150
GYN D	150
GYN DS	150
GYN OK	150
GYN W M	324
GYN W S	324
HALOLED HI	545
HALOSCAN CLIP	214
HALOSCAN HONEYCOMB	215, 397
HALOSCAN KAP MP	215, 397
HALOSCAN LINEAR SPREAD LENS	215, 397
HALOSCAN ON 1	214
HALOSCAN ON 2	214
HALOSCAN ST	214
HEDRA 39 W	338
HEDRA 39 W 40	338
HEDRA 39 W 60	338
HEDRA 391 C	194
HEDRA 392 C	194
HEDRA 393 C	194
HEDRA 451 C	194
HEDRA 452 C	194
HEDRA 62 ON	194
HEDRA 62 W	338
HEDRA CLIP	192
HEDRA L CLIP	192
HEDRA L ON	192
HEDRA ON	192
HELI 1 SCREEN LED	324
HELI X SCREEN LED	474
HIGH PROFILE C	374
HIGH PROFILE F1	374
HIGH PROFILE F2	374
HIGH PROFILE W	374
HOLE IN ONE R15	131
HOLE IN ONE S15	131
HOLE IN ONE S6	131
HONEYCOMB 42	133
HONEYCOMB 50	131
HONEYCOMB 57	237
HONEYCOMB 72	163
HONEYCOMB 75	221
HONEYCOMB 78	203
HONEYCOMB KIX	495, 513
HONEYCOMB S105	537
IMAX HONEYCOMB	129
IMAX II ADJUSTABLE TRIMLESS	128
IMAX II GLASS SBL	129
IMAX II HONEYCOMB	129
IMAX II LINEAR SPREAD LENS	129
IMAX II ROUND ADJUSTABLE	128
IMAX II ROUND ADJUSTABLE TRIMLESS	128
IMAX II SOFTENING LENS	129
IMAX II SPREAD LENS	129
IMAX II SQUARE ADJUSTABLE	128
IMAX II SQUARE ADJUSTABLE TRIMLESS	128
IMAX II TUBE	566
INFORM 40 SQ	288
INFORM 40 SQ DOWN-UP	289
INFORM 40 SQ PDS	288
INFORM 40 SQ UP	288
INFORM 40 SQ UP TW	288
INFORM OK ADM SLIM	366
INFORM POWER SUPPLY	554
INFORM R POWERBOX D	557
INFORM R POWERBOX D/U	557
INFORM R1 DOWN	290
INFORM R1 DOWN-UP	290
INFORM R1+ CS DOWN	290
INFORM R1+ CS DOWN-UP	290
INFORM R1+ DOWN	290
INFORM R1+ DOWN-UP	290
INFORM R2 DOWN	290
INFORM R2 DOWN-UP	290

INFORM R2+ DOWN	290
INFORM R2+ DOWN-UP	290
INFORM R3 DOWN	290
INFORM R3 DOWN-UP	290
INFORM R3+ DOWN	290
INFORM R4 C DOWN	292
INFORM R4 C DOWN-UP	292
INFORM R4 DOWN	292
INFORM SQ F	282
INFORM SQ P DOWN	284
INFORM SQ P DOWN-UP	286
INFORM SQ POWERBOX	557
INFORM SQ POWERBOX L	557
INFORM ST	282
INLET S	328
INLET TRIMLESS H20	328
INLET TRIMLESS H7	328
INLET TRIMLESS L113	328
INLET TRIMLESS L20	328
INLET TRIMLESS L38	328
INLET TRIMLESS XS	328
IP68 CONNECTION KIT	568
IP68 CONNECTOR 3P	568
IP68 CONNECTOR 4P	537
IP68 JUNCTION BOX 4P	568
IP68 Y-CONNECTOR 5P	568
JIHA!	263
KAP KIX	495, 513
KAP STRIPER	521, 531
KIX II	494
KIX II PIN	512
KIX M	494
KIX M PIN	512
KIX S	494
KIX S PIN	512
LASS-OH!	262
LASS-OH! L	262
LASS-OH! POWERBOX	557
LASS-OH! R	262
LED DIMMODULE 24V / 3CH / 6A DIM2	559
LED DIMMODULE 24V / 5CH / 5A DIM5	559
LED FILAMENT LAMP	545
LED LAMP	545
LED LINE OK ADM SLIM	366
LED POWER CONVERTER 48V-DC to 350 mA-DC DIM5	558
LED POWER CONVERTER 48V-DC to 500 mA-DC DIM5	558
LED POWER CONVERTER 48V-DC to 500 mA-DC PRO DIM5	413
LED POWER CONVERTER 48V-DC to 700 mA-DC DIM5	558
LED POWER CONVERTER 48V-DC to 700 mA-DC PRO DIM5	413
LED POWER SUPPLY 1050mA-DC	555
LED POWER SUPPLY 1200mA-DC DIM1	554
LED POWER SUPPLY 1200mA-DC DIM5	554
LED POWER SUPPLY 1700mA-DC DIM1	554
LED POWER SUPPLY 24V-DC	556
LED POWER SUPPLY 350mA	554
LED POWER SUPPLY 48V-DC	556
LED POWER SUPPLY 500mA	554
LED POWER SUPPLY 700mA	554
LED POWER SUPPLY 900mA	554
LED POWER SUPPLY MULTI POWER	554
LED POWER SUPPLY MULTI-POWER	554
LED TRANSFO 12V	559
LED FLEX IN	437
LED FLEX IN 5m	546
LED FLEX IN CL 5m	547
LED FLEX IN CONNECTION CLIP SET	547
LED FLEX IN CONNECTION SET	547
LED FLEX IN DIM	437
LED FLEX IN DIM 5m	546
LED FLEX IN FP	437
LED FLEX IN FP 5m	546
LED FLEX IN FP CONNECTION CLIP SET	547
LED FLEX IN FP CONNECTION SET	547
LED FLEX IN FP SUPPLY CABLE SET	547
LED FLEX IN HP	437
LED FLEX IN HP 5m	546

LED FLEX IN MP	437, 439
LED FLEX IN MP / HP CONNECTION CLIP SET	547
LED FLEX IN MP / HP CONNECTION SET	547
LED FLEX IN MP / HP SUPPLY CABLE SET	547
LED FLEX IN MP 5m	546
LED FLEX IN RGB	437
LED FLEX IN RGB 5m	546
LED FLEX IN RGB/TW	437
LED FLEX IN RGBTW 5m	546
LED FLEX IN SMALL	417, 419
LED FLEX IN SUPPLY CABLE SET	547
LED FLEX IN TW	437
LED FLEX IN TW 5m	546
LED FLEX OUT	437
LED FLEX OUT 5m	546
LED FLEX OUT CL 5m	547
LED FLEX OUT FP	437
LED FLEX OUT FP 5m	546
LED FLEX OUT MP	437
LED FLEX OUT MP 5m	546
LED FLEX OUT RGB	437
LED FLEX OUT RGB 5m	546
LEDS C R ST	474, 510
LEDS GO IN FORTE	474, 510
LINEAR SPREAD LENS 42	133
LINEAR SPREAD LENS 50	187
LINEAR SPREAD LENS 57	237
LINEAR SPREAD LENS 75	237
LINEAR SPREAD LENS S105	537
LOGIC 190 ANTI VANDAL SCREWS	503
LOGIC 190 R	502
LOGIC 190 R BOX	568
LOGIC 190 R OK	502
LOGIC 190 R REFL	503
LOGIC 40 BOX R	568
LOGIC 40 R	506
LOGIC 40 R A	506
LOGIC 40 R A MOON	506
LOGIC 40 R MOON	506
LOGIC 60 BOX R	568
LOGIC 60 R	506
LOGIC 60 R A	506
LOGIC 60 R A MOON	506
LOGIC 60 R MOON	506
LOGIC 60 R WALLWASH	506
LOGIC 90 BOX R	568
LOGIC 90 BOX S	568
LOGIC 90 R	507
LOGIC 90 R A	507
LOGIC 90 R A WALLWASH	507
LOGIC 90 R WALLWASH	507
LOGIC 90 S	507
LOGIC F1	508
LOGIC F2	508
LOGIC LINEAR	504
LOGIC LINEAR BOX	568
LOGIC MINI W R	326, 472
LOGIC MINI W S	326, 472
LOGIC W L	326, 472
LOGIC W L F	326, 472
LOGIC W S	326, 472
M - CUPPA C	405
M - DALI PRESENCE AND DAYLIGHT SENSOR	387
M - DOT.COM M4	389
M - DOT.COM WALLWASH	389
M - INFORM L	388
M - LED LINE HE	388
M - LED LINE UP	388
M - MICROSPY 39 C	404
M - WIRELESS CONTROL	542
M - WIRELESS PRESENCE & DAYLIGHT SENSOR	387
M - WIRELESS SENSOR HUB	387
M20/M26H - BOWIE	394
M20/M26H - HALOSCAN	396
M20/M26H - HEDRA	403
M20/M26H - HEDRA L	403
M20/M26H - JUM-OH! 2R	390
M20/M26H - JUM-OH! 4R	390
M20/M26H - MULTINOVA 30	396

M20/M26H - NEEDLE	395
M20/M26H - NEEDLE OK	395
M20/M26H - OBIN	390
M20/M26H - OCTAV 27	397
M20/M26H - OCTAV 39	397
M20/M26H - ODRON	260, 394
M20/M26H - PUNK 39	397
M20/M26H - SPY 271	398
M20/M26H - SPY 271 L	398
M20/M26H - SPY 272	398
M20/M26H - SPY 272 L	398
M20/M26H - SPY 391	260, 399
M20/M26H - SPY 391 L	399
M20/M26H - SPY 392	260, 399
M20/M26H - SPY 52	400
M20/M26H - SPY 52 FOCUS	400
M20/M26H - SPY 52 TW	400
M20/M26H - SPY 52 WALLWASH	400
M20/M26H - SPY 66	401
M20/M26H - SPY 66 WALLWASH	401
M20/M26H - SPY FOCUS	402
M20/M26H - TWEETER BL	404
M20/M26H - VIZIR	402
M20/M26H - VIZIR L	403
M26H - LED LINE OK	388
M26H - VOICE COMMAND GOOGLE HOLDER	387
M26L - BOWIE	394
M26L - BOXY L	391
M26L - BOXY L A	391
M26L - BOXY R	391
M26L - HALOSCAN	396
M26L - HEDRA	403
M26L - HEDRA L	403
M26L - JUM-OH! 2R	390
M26L - JUM-OH! 4R	390
M26L - LED LINE OK	388
M26L - MULTINOVA 30	396
M26L - OCTAV 27	397
M26L - OCTAV 39	397
M26L - ODRON	260, 394
M26L - PUNK 39	397
M26L - SPY 271	398
M26L - SPY 271 L	398
M26L - SPY 272	398
M26L - SPY 272 L	398
M26L - SPY 391	260, 399
M26L - SPY 391 L	399
M26L - SPY 392	260, 399
M26L - SPY 52	400
M26L - SPY 52 FOCUS	400
M26L - SPY 52 WALLWASH	400
M26L - SPY 66	401
M26L - SPY 66 WALLWASH	401
M26L - SPY FOCUS	402
M26L - TWEETER BL	404
M26L - VIZIR	402
M26L - VIZIR L	403
M26L - VOICE COMMAND GOOGLE HOLDER	387
M52 - 1 LED	392
M52 - 1 LED D	393
M52 - 2 LED	392
M52 - 2 LED D	393
M52 - 2 LED OK	392
M52 - SPY 391	399
M52 - SPY 391 L	399
M52 - SPY 52	400
M52 - SPY 66	401
M52 - SPY FOCUS	402
MANTELLO	314
MANTELLO GLASS	314
MICRO REO	138
MICRO REO X	138, 456
MICRO SNAP-IN	228
MICRO SNAP-IN OK	228
MICRO VISOR	161, 229
MICROGRID IN	160
MICROLINE 40 - PROFILE	444
MICROLINE 60 - PROFILE	444
MICROSPY 39 C	238

MICROSPY IN	228
MICROSPY IN OK	228
MIDISPY TUBE	566
MIKALINE L	266
MIKALINE-OH!	266
MILES C1	312
MILES C2	312
MILES C3	312
MILES C4	312
MILES POWERBOX	557
MILES TUBE	313, 315
MINI DEEP RINGO II	148
MINI DEEP RINGO II OK	148
MINI DEEP RINGO II TRIMLESS	148
MINI DEEP RINGO II X	458
MINI PARTOU IP	152
MINI REO II	138
MINI REO II OK	138
MINI REO II OK X	456
MINI REO II X	456
MINIGRID 67 IN	160
MINIGRID 67 IN TRIMLESS	160
MINIGRID 67 ON	160
MINIGRID IN	162
MINIGRID IN 1 MOUNTING KIT	565
MINIGRID IN 2 MOUNTING KIT	565
MINIGRID IN TRIMLESS	162
MINIGRID ON	162
MONO II	482
MONO II DOWN-UP	482
MONOPOL	530
MONTUR	330, 490
MONTUR L O	330
MONTUR L P	524
MONTUR L PC	330, 490
MONTUR M	330, 490
MONTUR M O	330
MONTUR MINI M	490
MONTUR S	330, 490
MONTUR S O	330
MONTUR S P	524
MOUNTING KIT 1 LARGE MINIGRID 67	565
MOUNTING KIT 1 MINIGRID 67	565
MOUNTING KIT 2 LARGE MINIGRID 67	565
MOUNTING KIT 2 MINIGRID 67	565
MOUNTING KIT 75	565
MOUNTING KIT 75 TRIMLESS	565
MOUNTING KIT 75 TRIMLESS O.F.A.	565
MOUNTING KIT DEEP ENTERO RD-S TRIMLESS	565
MOUNTING KIT DOT.COM M4 TRIMLESS	565
MOUNTING KIT ENTERO RD-L	565
MOUNTING KIT ENTERO RD-M	565
MOUNTING KIT ENTERO RD-S	565
MOUNTING KIT ENTERO SQ-L	565
MOUNTING KIT ENTERO SQ-M	565
MOUNTING KIT ENTERO SQ-S	565
MOUNTING KIT FLUSH INLET	565
MOUNTING KIT FLUSH SPY	565
MOUNTING KIT INLET TRIMLESS	565
MOUNTING KIT MINI DEEP RINGO II TRIMLESS	565
MOUNTING KIT MINIGRID IN 1	565
MOUNTING KIT MINIGRID IN 2	565
MOUNTING KIT NIME O.F.A.	565
MOUNTING KIT NO AIR	565
MOUNTING KIT PLAT-OH! TRIMLESS	565
MOUNTING KIT PLUG O.F.A.	565
MOUNTING KIT R102 TRIMLESS	565
MOUNTING KIT R60 TRIMLESS	565
MOUNTING KIT R82 TRIMLESS	565
MOUNTING KIT S102 TRIMLESS	565
MOUNTING KIT SIDE AIR	565
MOUNTING KIT SIDE AIR ONLY	565
MOUNTING KIT SPY 39 TRIMLESS IN	565
MOUNTING KIT SPY 39/52 TRIMLESS	565
MOUNTING KIT TOP AIR	565
MOUNTING KIT TOP AIR ONLY	565
MOUNTING KIT TRIMLESS ARTUUR S/SA	143
MOUNTING KIT TRIMLESS MICROSPY IN	229
MOUNTING KIT TRIMLESS MICROSPY IN OK	229

MOUNTING KIT TRIMLESS O.F.A. ARTUUR R	143
MOUNTING KIT UHO L TRIMLESS	225
MULTINOVA 255	170
MULTINOVA 30	168
MULTINOVA 30 ADM	362
MULTINOVA 30 ADM	362
MULTINOVA 30 DOWN-UP	168
MULTINOVA 30 PIVOT	170
MULTINOVA 30 PIVOT ADM	362
MULTINOVA 30 PRISM	168
MULTINOVA 30 PRISM ADM	362
MULTINOVA 30 SUSPENSION SET	169
MULTINOVA 355	170
MULTINOVA 55	168
MULTINOVA 55 ADM	362
MULTINOVA 55 DOWN-UP	168
MULTINOVA 55 OK	170
MULTINOVA 55 PIVOT	170
MULTINOVA 55 PRISM	168
MULTINOVA 55 PRISM ADM	362
MULTINOVA 55 ROD SUSPENSION	169
MULTINOVA 55 SMOKE	168
MULTINOVA 55 SUSPENSION SET	169
MULTINOVA RECESSED KIT	169
NEEDLE 1	198
NEEDLE 1 OK	198
NEEDLE 1 TRC	198
NEEDLE 1 TRC OK	198
NIME II	116
NIME II AIR	116
NIME II TRIMLESS	116
NIME II TRIMLESS OK	116
NIME TRIMLESS	116
NOCTA RD80	486
NOCTA RD80 DOWN-UP	486
NOCTA SQ155	487
NOCTA SQ155 DOWN-UP	487
NOCTA SQ85	487
NOCTA SQ85 DOWN-UP	487
OAO - ROD SUSPENSION	438
OBIN ON	220
OBLIX	528
OBLIX F	528
OBLIX S	528
OCTAV 27 CLIP	196
OCTAV 39 CLIP	196
OCTAV 39 ON	196
ODRON CLIP	222
ODRON COVER	261, 395
ODRON ON	222
ONE-AND-ONLY - PROFILE	438
ONE-AND-ONLY P	306
OONO C	216
OONO F	518
OONO F PORTABLE	518
OONO L TABLE LIGHT	216
OONO ON	216
OONO ON 2	216
OONO P	518
OONO W L	332, 476
OONO W M	332, 476
OONO W S	332, 476
ORBIT LED	338
ORBIT PUNK Hi	338
ORBIT PUNK LED	338
ORBIT T LED	338
OUTLINER - PROFILE	436
OUTLINER 100	522
PANEL 120 DARK GREY	253, 257
PANEL 120 LIGHT GREY	253, 257
PANEL 70 DARK GREY	253, 257
PANEL 70 LIGHT GREY	253, 257
PANEL 90 DARK GREY	253, 257
PANEL 90 LIGHT GREY	253, 257
PARTOU IP	152
PARTOU OK	152
PARTOU S IP	152
PDS REMOTE CONTROL	289, 305
PDS SENSOR PROGRAMMER	289, 305
PIN	569
PLASTERKIT	563

PLATE	569
PLAT-OH!	144
PLAT-OH! TRIMLESS	144
POLE 60	516
POLE 80	516
POLESANO	536
POLESANO CAMERA HEAD	537
POLESANO FUSE BOX	517, 537
POLESANO W	536
POLESANO WIFI PUCK	537
PRESENCE DETECTION HF SENSOR	544
PUNK 39 CLIP	188
PUNK 451 C	188
PUNK 452 C	188
PUNK 621 C	188
PUNK 622 C	188
PUT CENTER	130
PUT MAGNETIC	130
PUT S6 HONEYCOMB	131
PUT S6 MAGNETIC	130
PUT S6 SOFTENING LENS	131
Q-CONTROL	275, 279
Q-GATEWAY	275, 279
Q-PUSH BUTTON INTERFACE	275, 279
RAND 111 LED	242
RAND 211 LED	242
RAND 311 LED	242
REO	138
REO 2 S OK	138
REO OK	138
REO S OK	138
REO X	456
RGB DRIVER	559
RGB TOUCH CONTROLLER DMX	559
RGB/TW DRIVER	559
RGB/TW REPEATER	559
RGB/TW TOUCH CONTROLLER DMX	559
SHELFLINE 18 - PROFILE	440
SHELFLINE 19 - PROFILE	349, 440
SHELFLINE 20 ST - PROFILE	440
SHIFTLINE 19 - PROFILE	408
SHIFTLINE M26H - PROFILE	384
SHIFTLINE M26H + SBL	384
SHIFTLINE M26L - PROFILE	384
SKOV M	478
SKOV S	478
SL19 - SPY 27	409
SL19 - SPY 27 L	409
SL19 - SPY 39	409
SL19 - SPY 39 L	409
SL19 - UHO	409
SL19 - UHO L	409
SLM26H F	260
SLM26L F	260
SMART 48 MODULATOR	543
SOFTENING LENS 42	133
SOFTENING LENS 50	187
SOFTENING LENS 57	237
SOFTENING LENS 72	163
SOFTENING LENS 75	237
SOFTENING LENS 78	203
SOIREE RC	318
SOIREE RC OPAL	318
SOIREE SC	318
SOIREE SC OPAL	318
SOIREE WR X	496
SOIREE WS X	496
SOIREE WS X DOWN-UP	496
SOLI - 52	274
SOLI - 52 NLT	274
SOLI - 52 SHHH	276
SOLI - 52 SHHH NLT	276
SOLI - 66	274
SOLI - 66 NLT	274
SOLI - FORM DOWN	275
SOLI - FORM DOWN-UP	275
SOLI - LINE DOWN	275
SOLI - LINE UP	275
SOLI - POWERBOX	557
SOLI - SENSE	279
SOLI - SHHH 120 C	276


SOLI - SHHH 60	272
SOLI - SHHH 60 C	276
SOLI - SHHH 90	272
SOLI - SHHH 90 C	276
SOLI - SHHH PLUS 120	276
SOLI - SHHH PLUS 60	276
SOLI - SHHH PLUS 90	276
SOLI - VOICE COMMAND GOOGLE HOLDER	279
SOLISCAPE - PROFILE	272
SPIX M	520
SPIX M 2	520
SPIX M PIN	520
SPIX P	520
SPIX S	520
SPIX S PIN	520
SPL14 - SPY 27	303, 409
SPL14 - SPY 27 L	303, 409
SPL14 - SPY 39	303, 409
SPL14 - SPY 39 L	303, 409
SPL14 - UHO	303, 409
SPL14 - UHO L	303, 409
SPLITBOX SPY 52	132
SPLITBOX SPY FOCUS	132
SPLIT-IT PRO - PROFILE	410
SPLIT-IT SPY 52	412
SPLIT-IT SPY 66	412
SPLIT-IT SPY FOCUS	412
SPLITLINE 14 - PROFILE	408
SPLITLINE M20 - PROFILE	380
SPLITLINE M20 ST - PROFILE	380
SPLITLINE M52 - PROFILE	380
SPM20 - AIR JUM-OH! 4R	382
SPM20 - AIR KIT	380
SPM20 - AIR SPY 392	382
SPM20 - AIR SPY 522	382
SPM20 - GIBBO	404
SPREAD LENS 42	133
SPREAD LENS 50	187
SPREAD LENS 57	237
SPREAD LENS 75	237
SPT PRO - LED LINE	412
SPY 27 CLIP	230
SPY 27 L CLIP	230
SPY 27 L ON 4	230
SPY 27 ON 1	230
SPY 27 ON 2	230
SPY 39 CLIP	232
SPY 39 L CLIP	232
SPY 39 L ON	232
SPY 39 L ON 1	232
SPY 39 L ON 2	232
SPY 39 L TUBE	566
SPY 39 ON	232
SPY 39 ON 1	232
SPY 39 ON 2	232
SPY 39 PLUG	232
SPY 39 ST	232
SPY 39 TRIMLESS	232
SPY 39 TRIMLESS IN	232
SPY 39 TUBE	566
SPY 39 W X	492
SPY 39 W X DOWN-UP	492
SPY 52 ADM	352
SPY 52 ADM SLIM	352
SPY 52 CLIP	234
SPY 52 CLIP WALLWASH	234
SPY 52 FOCUS CLIP	234
SPY 52 FOCUS TRIMLESS	234
SPY 52 M10	450
SPY 52 ON	234
SPY 52 ON 1	234
SPY 52 ON 2	234
SPY 52 ON 3	234
SPY 52 REFLECTOR	353
SPY 52 ST	234
SPY 52 TRIMLESS	234
SPY 52 TUBE	566
SPY 52 WALLWASH ADM	352
SPY 52 WALLWASH ADM SLIM	352
SPY 66 ADM	354
SPY 66 ADM SLIM	354

SPY 66 CLIP	236
SPY 66 CLIP WALLWASH	236
SPY 66 LP ADM	354
SPY 66 LP/MP GLASS SBL	355
SPY 66 LP/MP HONEYCOMB	355
SPY 66 LP/MP LINEAR SPREAD LENS	355
SPY 66 LP/MP SOFTENING LENS	355
SPY 66 LP/MP TUBE	566
SPY 66 MP ADM	354
SPY 66 ON	236
SPY 66 REFLECTOR	355
SPY 66 TUBE	566
SPY 66 WALLWASH ADM	354
SPY 66 WALLWASH ADM SLIM	354
SPY 90 ADM	356
SPY 90 ON	236
SPY 90 REFLECTOR	357
SPY 90 TUBE	566
SPY C	238
SPY FOCUS ADM	352
SPY FOCUS CLIP	240
SPY FOCUS ON	240
SPY S	238
SPY TUBE	566
ST - DALI PRESENCE AND DAYLIGHT	544
ST - WIRELESS SENSOR HUB	544
STIEVIE	522
STILL	310
STIP W R	478
STIP W S	478
STRAP	495
STREAMLINER 70L - PROFILE	448
STREAMLINER 70S - PROFILE	448
STREAMLINER 85 - PROFILE	448
STREAMLINER TRIMLESS - PROFILE	448
STRIPER	530
SUPERDOME RECESSED	182
SUPERDOME RECESSED KIT	183
SUPERLOOP HC MDL	252
SUPERLOOP HC SBL	256
SUPERLOOP HC SBL OVAL	256
SUPERLOOP HC SPR	256
SUPERLOOP PLUS HC	256
SUPERLOOP PLUS HC MDL	252
SUPERLOOP POWERBOX F - 48V	557
SUPERLOOP POWERBOX H - 48V	557
SUPERLOOP POWERBOX H8	557
SUPERLOOP POWERBOX H9	557
SUPERLOOP POWERBOX L	557
SUPERLOOP POWERBOX L - 48V	557
SUPERLOOP S HC MDL	252
SUPERLOOP SLIM DOWN	258
SUPERLOOP SLIM IN	258
SUPERLOOP SLIM OUT	258
SUPERLOOP VC SBL	256
SUPERLOOP VR SBL	256
SUPERLOOP-FIX 40	254
SUPERLOOP-FIX 40 DOWN-UP	254
SUPERLOOP-FIX 40 DOWN-UP GT	254
SUPERLOOP-FIX 45	254
SUPERLOOP-HEDRA	254
SUPERLOOP-SPY 52	255
SUPERLOOP-SPY 66	255
SUPERLOOP-SPY FOCUS	255
SUPERLOOP-VIZIR	254
SUPERLOOP-XY180	254
SUPERNOVA 125 RECESSED KIT	179
SUPERNOVA 65 RECESSED KIT	179
SUPERNOVA 95 RECESSED KIT	179
SUPERNOVA FLAT 65	180
SUPERNOVA FLAT 65 DOWN-UP	180
SUPERNOVA FLAT 65 PRISMATIC	180
SUPERNOVA FLAT 65 PRISMATIC DOWN-UP	180
SUPERNOVA FLAT 65 PRISMATIC SMOOTH UP	180
SUPERNOVA FLAT 65 SMOOTH UP	180
SUPERNOVA FLAT 95	180
SUPERNOVA FLAT 95 DOWN-UP	180
SUPERNOVA FLAT 95 PRISMATIC	180
SUPERNOVA FLAT 95 PRISMATIC DOWN-UP	180
SUPERNOVA FLAT 95 PRISMATIC SMOOTH UP	180

SUPERNOVA FLAT 95 SMOOTH UP	180
SUPERNOVA LINE 125	178
SUPERNOVA LINE 125 DOWN-UP	178
SUPERNOVA LINE 65	178
SUPERNOVA LINE 65 DOWN-UP	178
SUPERNOVA LINE 95 DOWN-UP	178
SUPERNOVA LINE 95 SBL	178
SUPERNOVA LINE 95 TW	178
SUPERNOVA LINE 95 TW DOWN-UP	178
SUPERNOVA LINE TRIMLESS 125	176
SUPERNOVA LINE TRIMLESS 65	176
SUPERNOVA LINE TRIMLESS 95	176
SUPERNOVA XS 260 X	466
SUPERNOVA XS PIVOT 260 X	466
SUPER-OH! 120 SBL TRIMLESS	246
SUPER-OH! 70 SBL TRIMLESS	246
SUPER-OH! SLIM 120 C DOWN-UP	248
SUPER-OH! SLIM 120 CS DOWN	248
SUPER-OH! SLIM 120 CS DOWN-UP	248
SUPER-OH! SLIM 120 DOWN	248
SUPER-OH! SLIM 80 C DOWN-UP	248
SUPER-OH! SLIM 80 CS	248
SUPER-OH! SLIM 80 CS DOWN	248
SUPER-OH! SLIM 80 CS DOWN-UP	248
SUPER-OH! SLIM 80 DOWN	248
SUPER-OH! XS	246
SUPER-OH! XS C	246
SUPER-OH! XS CEILING BASE	247
SUPER-OH! XS PIVOT	246
SUPER-OH! XS PIVOT ADM	364
SUPPLY CABLE LED LINE	413
SUSPENSION + CONNECTION ST	567
SUSPENSION + CONNECTION TRIMLESS	567
SUSPENSION SET 18	179
SUSPENSION SET 25	181
SUSPENSION SET 28	249
SUSPENSION SET 29	249
SUSPENSION SET 30	291
SUSPENSION SET 31	291
SUSPENSION SET 32	291
SUSPENSION SET 33	291
SUSPENSION ST	567
SUSPENSION TRIMLESS O.F.A.	567
TAGLINE LEDLINE - PROFILE	416
TAGLINE ON - PROFILE	416
TAGLINE ST - PROFILE	416
TAGLINE TRIMLESS - PROFILE	416
TAGLINE TRIMLESS WALL - PROFILE	416
TGL-TR - SPY 27	417
TIGA IN LED	336
TIGA LED	336, 482
TIGA LED BS	336, 482
TIGA V-PLATE	337
TOPIX	340
TOPIX L X	480
TRACK 3F DIM CORNER	348
TRACK 3F DIM CUTTING TOOL	348
TRACK 3F DIM H	348
TRACK 3F DIM H CORNER	348
TRACK 3F DIM H END CAP	348
TRACK 3F DIM H SUPPLY	348
TRACK 3F DIM H SUSPENSION	348
TRACK 3F DIM IN	348
TRACK 3F DIM IN - INSIDE CLIP	348
TRACK 3F DIM IN END CAP	348
TRACK 3F DIM IN RECESSED COVER	348
TRACK 3F DIM ON	348
TRACK 3F DIM ON CORNER	348
TRACK 3F DIM ON DIRECT FIXATION	348
TRACK 3F DIM ON END CAP	348
TRACK 3F DIM ON ROD SUSPENSION	348
TRACK 3F DIM ON SUSPENSION	348
TRACK 3F DIM SUPPLY	348
TRACK CURRENT SUPPLY	348
TRACK DIM MIDDLE SUPPLY	348
TRACK SHL 19 - MOUNTING CLIP SET	349
TUBE 52	149
TUNABLE WHITE TOUCH CONTROLLER DMX	559
TWEETER M ON 1	218
TWEETER M ON 1 WDL	218
TWEETER M ON 2	218


TWEETER M ON 2 WDL	218
TWEETER M ST	218
TWEETER M TRIMLESS	218
TWENTY-7 TRIMLESS	154
UHO CLIP	224
UHO CLIP 2	224
UHO L 2 AIR	224
UHO L CLIP	224
UHO L CLIP 2	224
UHO L ON 3	224
UHO L TRIMLESS	224
ULTRA X DOWN-UP LED	492
ULTRA X LED	492
VISION LED	340
VISION OUT LED	480
VISION S OUT LED	480
VISOR 27	231
VISOR 39	233, 383
VIZIR CLIP	192
VIZIR HONEYCOMB	193
VIZIR L CLIP	192
VIZIR L ON	192
VIZIR ON	192
VIZIR SOFTENING LENS	193
VIZIR TUBE	566
WALKER II	526
WALKER II W	488
WANT-IT L	336
WANT-IT S	336
WIRELESS CONTROL	541
WIRELESS CONTROL 2 CHANNEL TUNABLE WHITE	541
WIRELESS CONTROL 5A DIM1	541
WIRELESS CONTROL DIM5	541
WIRELESS CONTROL DIM5 + DALI GATEWAY	542
WIRELESS CONTROL DIM8	541
WIRELESS CONTROL RGB	541
WIRELESS PUSH BUTTON INTERFACE	542
WIRELESS SWITCHBOARD - 4 FUNCTIONS	542
XY180 CONNECTION BOX	187
XY180 F120 WDL	186
XY180 S120 MINI	186
XY180 S121	186
XY180 S121 MINI	186
XY180 S121 PUNK	186
XY180 S122	186
XY180 S80 MINI	186
XY180 S81	186
XY180 S81 MINI	186
XY180 S81 PUNK	186
XY180 S82	186
ZOOVER 120	320
ZOOVER 120 DOWN-UP	320
ZOOVER 140	320
ZOOVER 140 DOWN-UP	320
ZOOVER 140 DOWN-UP DIM4	320
ZOOVER 4CLIP 120	320
ZOOVER 4CLIP 140	320

SUSPENSION / CONNECTION ST

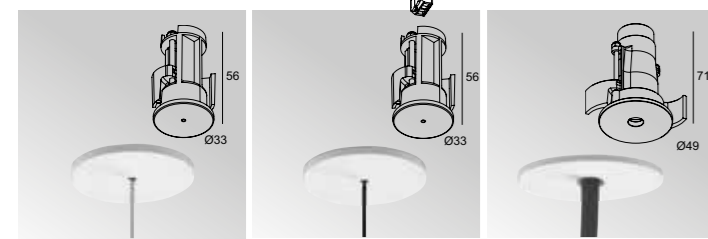


SUSPENSION ST	SUSPENSION + CONNECTION ST	CONNECTION ST
27 x 60 max. 25	27 x 60 max. 25	43 x 80 max. 25
15225 0340	15225 0350	15225 0360
∅ B / W	∅ B / W	∅ B / W
INCL. 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 2x 1,5 mm ² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 5x 1,5 mm ²

SUSPENSION / CONNECTION TRIMLESS

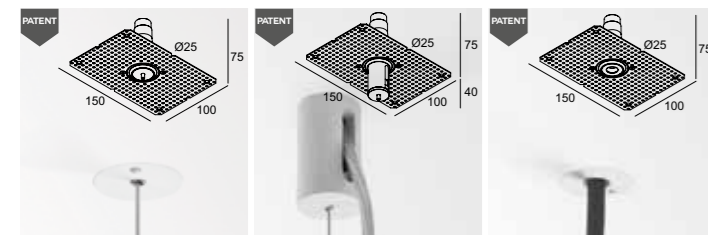

SUSPENSION TRIMLESS O.F.A.	SUSPENSION + CONNECTION TRIMLESS O.F.A.	CONNECTION TRIMLESS O.F.A.
62 x 80 9 or 12	62 x 80 9 or 12	62 x 80 9 or 12
102 x 80 (CONCRETE)	102 x 80 (CONCRETE)	102 x 80 (CONCRETE)
328 10 01	328 10 02	328 10 03
INCL. 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm ² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm ²

CABLE BASE CABLE BASE COVERSET

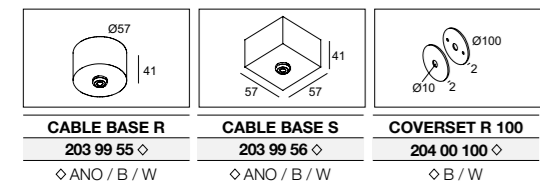


CABLE BASE R	CABLE BASE S	COVERSET R 100
203 99 55	203 99 56	204 00 100
∅ ANO / B / W	∅ ANO / B / W	∅ B / W

HOW TO MOUNT KITS

CSC

O.F.A.

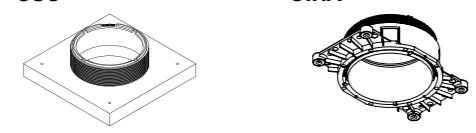

STRETCHED CEILING*

CONCRETE

PLASTERBOARD




24V-DC

DIM	CLASS / IP	Power / 24V-DC	Art number	Voltage	LAMBDA	A x B x C	TYPE
NON DIMMABLE	IP20	24W	21012 0160	220-240V / 50-60Hz	λ > 0,95	137 x 50 x 16	1
	IP67	150W	300 89 24 150	100-240V / 0/50-60Hz		180 x 63 x 36	2
MAINS DIM (FE)	IP20	75W	21032 0358	220-240V / 50-60Hz		110 x 75 x 30	1
		150W	21032 0368			170 x 75 x 30	1
0-10V (DIM1)	IP20	60W	21012 0171	220-240V / 50-60Hz		170 x 57 x 18	1 (PWM)
		90W	21012 0181			190 x 65 x 22	1 (PWM)
		120W	21012 0191			190 x 65 x 22	1 (PWM)
	IP67	60W	21012 0101			150 x 53 x 35	2 (PWM)
		90W	21012 0111			171 x 63 x 38	2 (PWM)
		120W	21012 0121			171 x 63 x 38	2 (PWM)
DALI DIM (DIM5)	IP20	60W	21012 0205	220-240V / 50-60Hz		170 x 57 x 18	1
		100W	21012 0225			190 x 65 x 22	1
	IP67	60W	21012 0135			150 x 53 x 35	2 (PWM)
		90W	21012 0145			171 x 63 x 38	2 (PWM)
		120W	21012 0155	171 x 63 x 38	2 (PWM)		

48V-DC

DIM	CLASS / IP	Power / 48V-DC	Art number	Voltage	LAMBDA	A x B x C	TYPE
NON DIMMABLE	IP20	100W (120V: 80W)	21012 0230	120-240V / 50-60Hz	λ > 0,95	298 x 30 x 17	3
		100W	300 89 48 100	110-240V / 50-60Hz	λ > 0,90	100 x 55 x 90	4
		200W (120V: 150W)	21012 0240	120-240V / 50-60Hz	λ > 0,95	332 x 30 x 22	3
1-10V (DIM1)	IP67	240W	300 89 48 240	100-240V / 50-60Hz	λ > 0,90	114 x 63 x 125	4
		90W	21032 0331	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	2
DALI DIM (DIM5)	IP67	90W	21032 0345	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	2



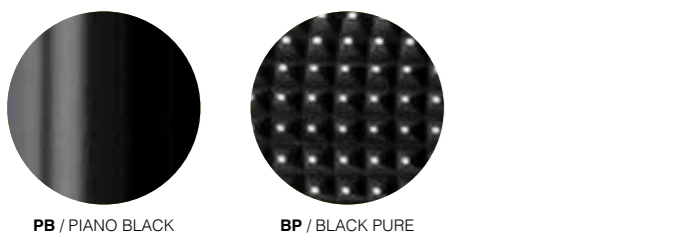

PB / PIANO BLACK
BP / BLACK PURE



BRAT / BRUSHED ANTHRACITE
MMAT / GOLD MATT
BRB / BRUSHED BRONZE



BRA / BRUSHED ALU
B / BLACK RAL 9005
PA / POLISHED ALU



BRG / BRUSHED GOLD
FBR / FLEMISH BRONZE
ANO / ANODIZED



BROB / BRUSHED OLD BRONZE
FG / FLEMISH GOLD
GC / GOLD COLOURED



BRCU / BRUSHED COPPER
BBR / BLACK BRONZE
W / WHITE RAL 9003



AM / ALU MARBLED
G / GREY BROWN
BL / BARRIER BLUE



GM / GOLD MARBLED
PGR / PINE GREEN



A / ALU GREY



N / DARK GREY



RW / RAW WHITE

BRB / BRUSHED BRONZE

PA / POLISHED ALU

ANO / ANODIZED

GC / GOLD COLOURED

W / WHITE RAL 9003

BL / BARRIER BLUE

G / GREY BROWN

PGR / PINE GREEN

BP / BLACK PURE

MMAT / GOLD MATT

GM / GOLD MARBLED

B / BLACK RAL 9005

FBR / FLEMISH BRONZE

FG / FLEMISH GOLD

AM / ALU MARBLED

BBR / BLACK BRONZE

A / ALU GREY

PB / PIANO BLACK

BRAT / BRUSHED ANTHRACITE

BRA / BRUSHED ALU

BRG / BRUSHED GOLD

BROB / BRUSHED OLD BRONZE

BRCU / BRUSHED COPPER

N / DARK GREY

RW / RAW WHITE

Browse through our Digital Material Library to get the look & feel of our finishes and textures.

DIGITAL MATERIAL LIBRARY 





SAND / SOLI-SHHH

SCARLET / SOLI-SHHH

PINK GLASS

ARCTIC / SOLI-SHHH

LILAC / SOLI-SHHH

SMOKE GLASS

DARK GREY / SOLI-SHHH

LIGHT GREY / SOLI-SHHH

OPAL / MIST GLASS

AMBER GLASS

LIGHT GREY / PET FELT

DARK GREY / PET FELT



SAND / SOLI-SHHH




SCARLET / SOLI-SHHH



ARCTIC / SOLI-SHHH




LILAC / SOLI-SHHH



DARK GREY / SOLI-SHHH



LIGHT GREY / SOLI-SHHH



LIGHT GREY / PET FELT



DARK GREY / PET FELT

 **DIGITAL MATERIAL LIBRARY**

Browse through our Digital Material Library to get the look & feel of our finishes and textures.